

FCC / IC DTS REPORT

Certification

Applicant Name: LG Electronics Inc.	Date of Issue: April 15, 2019
Address: 222, LG-ro, Jinwi-myeon, Pyeongtaek-si, Gyeonggi-do, 451-713, Korea	Location: HCT CO., LTD., 74, Seoicheon-ro 578beon-gil, Majang-myeon, Icheon-si, Gyeonggi-do, 17383, Rep. of KOREA
	Report No.: HCT-RF-1904-FI005

FCC ID:	BEJLGSBWAC93
IC:	2703H-LGSBWAC93
APPLICANT:	LG Electronics Inc.

Model:	LGSBWAC93
EUT Type:	RF Module
Peak Output Power:	802.11b : 24.92 dBm 802.11g : 26.75 dBm 802.11n(HT20) : 26.99 dBm 802.11n(HT40) : 29.78 dBm
Frequency Range:	2412 MHz - 2472 MHz
Modulation type:	CCK/DSSS/OFDM
FCC Classification:	Digital Transmission System(DTS)
FCC Rule Part(s):	Part 15.247
ISED Rule Part(s):	RSS-247 Issue 2 (February 2017), RSS-Gen Issue 5(April 2018)

Engineering Statement:

The measurements shown in this report were made in accordance with the procedures indicated, and the emissions from this equipment were found to be within the limits applicable. I assume full responsibility for the accuracy and completeness of these measurements, and for the qualifications of all persons taking them. It is further stated that upon the basis of the measurements made, the equipment tested is capable of operation in accordance with the requirements of the FCC / IC Rules under normal use and maintenance



Report prepared by : **Se Wook Park**
Engineer of Telecommunication testing center



Approved by : **Jong Seok Lee**
Manager of Telecommunication testing center

Version

TEST REPORT NO.	DATE	DESCRIPTION
HCT-RF-1904-FI005	April 15, 2019	- First Approval Report

Table of Contents

- 1. EUT DESCRIPTION 4
 - ANTENNA CONFIGURATIONS..... 5
- 2. TEST METHODOLOGY 6
 - EUT CONFIGURATION 6
 - EUT EXERCISE..... 6
 - GENERAL TEST PROCEDURES..... 6
 - DESCRIPTION OF TEST MODES 6
- 3. INSTRUMENT CALIBRATION 7
- 4. FACILITIES AND ACCREDITATIONS..... 7
 - FACILITIES 7
 - EQUIPMENT..... 7
- 5. ANTENNA REQUIREMENTS 7
- 6. MEASUREMENT UNCERTAINTY 8
- 7. DESCRIPTION OF TESTS 9
- 8. SUMMARY TEST OF RESULTS 27
- 9. TEST RESULT 29
 - 9.1 6dB BANDWIDTH & 99 % BANDWIDTH 29
 - 9.2 OUTPUT POWER..... 45
 - 9.3 POWER SPECTRAL DENSITY 53
 - 9.4 BAND EDGE/ CONDUCTED SPURIOUS EMISSIONS..... 58
 - 9.5 RADIATED SPURIOUS EMISSIONS..... 87
 - 9.6 RADIATED RESTRICTED BAND EDGES..... 99
 - 9.7 RECEIVER SPURIOUS EMISSIONS..... 105
 - 9.8 POWERLINE CONDUCTED EMISSIONS 106
- 10. LIST OF TEST EQUIPMENT..... 110
- 11. ANNEX A_ TEST SETUP PHOTO..... 112

1. EUT DESCRIPTION

Model	LGSBWAC93		
EUT Type	RF Module		
Power Supply	DC 3.30 V		
Frequency Range	2412 MHz - 2472 MHz		
Max. RF Output Power	Peak Power	Ant. 1 (SISO)	802.11b : 21.97 dBm 802.11g : 23.60 dBm 802.11n(HT20) : 24.11 dBm 802.11n(HT40) : 26.51 dBm
		Ant. 2 (SISO)	802.11b : 21.85 dBm 802.11g : 23.87 dBm 802.11n(HT20) : 23.84 dBm 802.11n(HT40) : 27.02 dBm
		Ant. 1 + Ant. 2 (MIMO)	802.11b : 24.81 dBm 802.11g : 26.60 dBm 802.11n(HT20) : 26.93 dBm 802.11n(HT40) : 29.70 dBm
	Average Power	Ant. 1 (SISO)	802.11b : 16.07 dBm 802.11g : 15.31 dBm 802.11n(HT20) : 15.75 dBm 802.11n(HT40) : 20.02 dBm
		Ant. 2 (SISO)	802.11b : 15.48 dBm 802.11g : 15.36 dBm 802.11n(HT20) : 15.33 dBm 802.11n(HT40) : 19.05 dBm
		Ant. 1 + Ant. 2 (MIMO)	802.11b : 18.76 dBm 802.11g : 18.35 dBm 802.11n(HT20) : 18.46 dBm 802.11n(HT40) : 22.57 dBm
Modulation Type	DSSS/CCK : 802.11b OFDM : 802.11g, 802.11n		
Number of Channels	13 Channels		
Antenna Specification	Antenna type: FPCB Peak Gain Ant1: 2.89 dBi / Ant2: 2.91 dBi		
Date(s) of Tests	March 06, 2019 ~ April 05, 2019		
PMN (Product Marketing Number)	LGSBWAC93		
HVIN (Hardware Version Identification Number)	TWCM-K504D		
FVIN (Firmware Version Identification Number)	MT7668_V1.0		
HMN (Host Marketing Name)	N/A		

ANTENNA CONFIGURATIONS

1. The device employs MIMO technology. Below are the possible configurations

Configurations	SISO		SDM	CDD
	Ant1	Ant2	Ant1 + Ant2	Ant1 + Ant2
802.11b	O	O	X	O
802.11g	O	O	X	O
802.11n(HT20)	O	O	O	O

Note:

1. O = Support, X = Not Support
2. SISO = Single Input Single Output
3. SDM = Spatial Diversity Multiplexing
4. CDD = Cyclic Delay Diversity

2. Directional Gain Calculation

▪ If any transmit signals are correlated with each other(802.11b/g/n_HT20),

$$\text{Directional gain} = 10 \cdot \log[(10^{G1/20} + 10^{G2/20} + \dots + 10^{GN/20})^2 / N] \text{ dBi}$$

■ **Antenna Gain**

2.4 GHz Band

Antenna Gain	802.11b/g/n	Ant 0	2.89 dBi
		Ant 1	2.91 dBi
Directional Antenna Gain	802.11g/n	Ant 0 & 1	5.90 dBi

2. TEST METHODOLOGY

FCC KDB 558074 D01 15.247 Meas Guidance v05r01 dated February 11, 2019 entitled “guidance for compliance measurements on digital transmission system, frequency hopping spread spectrum system, and hybrid system devices and the measurement procedure described in ANSI C63.10(Version : 2013) ‘the American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices’.

EUT CONFIGURATION

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner that intends to maximize its emission characteristics in a continuous normal application.

EUT EXERCISE

The EUT was operated in the engineering mode to fix the Tx frequency that was for the purpose of the measurements. According to its specifications, the EUT must comply with the requirements of the Section 15.207, 15.209 and 15.247 under the FCC Rules Part 15 Subpart C / RSS-Gen issue 5, RSS-247 issue 2.

GENERAL TEST PROCEDURES

Conducted Emissions

The EUT is placed on the turntable, which is 0.8 m above ground plane. According to the requirements in Section 6.2 of ANSI C63.10. (Version :2013) Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30MHz using CISPR Quasi-peak and average detector modes.

Radiated Emissions

The EUT is placed on a turn table, which is 0.8 m above ground plane below 1GHz. Above 1GHz with 1.5m using absorbers between the EUT and receive antenna. The turntable shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3.75 m away from the receiving antenna, which varied from 1 m to 4 m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the max. emission, the relative positions of this hand-held transmitter (EUT) was rotated through three orthogonal axes according to the requirements in Section 6.6.5 of ANSI C63.10. (Version: 2013)

Conducted Antenna Terminal

See Section from 8.3.(KDB 558074 v05r01)

DESCRIPTION OF TEST MODES

The EUT has been tested under operating condition. Test program used to control the EUT for staying in continuous transmitting and receiving mode is programmed.

3. INSTRUMENT CALIBRATION

The measuring equipment, which was utilized in performing the tests documented herein, has been calibrated in accordance with the manufacturer's recommendations for utilizing calibration equipment's, which is traceable to recognized national standards.

Especially, all antenna for measurement is calibrated in accordance with the requirements of C63.5 (Version : 2017).

4. FACILITIES AND ACCREDITATIONS

FACILITIES

The SAC(Semi-Anechoic Chamber) and conducted measurement facility used to collect the radiated data are located at the 74, Seoicheon-ro 578beon-gil, Majang-myeon, Icheon-si, Gyeonggi-do, 17383, Rep. of KOREA.

The site is constructed in conformance with the requirements of ANSI C63.4. (Version :2014) and CISPR Publication 22.

Detailed description of test facility was submitted to the Commission and accepted dated April 02, 2018 (Registration Number: KR0032).

For ISED, test facility was accepted dated February 14, 2019 (CAB identifier: KR0032).

EQUIPMENT

Radiated emissions are measured with one or more of the following types of Linearly polarized antennas: tuned dipole, bi-conical, log periodic, bi-log, and/or ridged waveguide, horn. Spectrum analyzers with pre-selectors and quasi-peak detectors are used to perform radiated measurements.

Conducted emissions are measured with Line Impedance Stabilization Networks and EMI Test Receivers. Calibrated wideband preamplifiers, coaxial cables, and coaxial attenuators are also used for making measurements.

All receiving equipment conforms to CISPR Publication 16-1, "Radio Interference Measuring Apparatus and Measurement Methods."

5. ANTENNA REQUIREMENTS

According to FCC 47 CFR §15.203:

"An intentional radiator antenna shall be designed to ensure that no antenna other than that furnished by the responsible party can be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section."

* The antennas of this E.U.T are permanently attached.

* The E.U.T Complies with the requirement of §15.203

6. MEASUREMENT UNCERTAINTY

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI C63.10-2013.

All measurement uncertainty values are shown with a coverage factor of $k = 2$ to indicate a 95 % level of confidence.

The measurement data shown herein meets or exceeds the U_{CISPR} measurement uncertainty values specified in CISPR 16-4-2 and, thus, can be compared directly to specified limits to determine compliance.


Parameter	Expanded Uncertainty (\pm dB)
Conducted Disturbance (150 kHz ~ 30 MHz)	1.82
Radiated Disturbance (9 kHz ~ 30 MHz)	3.40
Radiated Disturbance (30 MHz ~ 1 GHz)	4.80
Radiated Disturbance (1 GHz ~ 18 GHz)	5.70
Radiated Disturbance (18 GHz ~ 40 GHz)	5.71

7. DESCRIPTION OF TESTS

7.1. Duty Cycle

The zero-span mode on a spectrum analyzer or EMI receiver if the response time and spacing between bins on the sweep are sufficient to permit accurate measurements of the on and off times of the transmitted signal. Set the center frequency of the instrument to the center frequency of the transmission. Set $RBW \geq OBW$ if possible; otherwise, set RBW to the largest available value. Set $VBW \geq RBW$. Set detector = peak or average. The zero-span measurement method shall not be used unless both RBW and VBW are $> 50/T$ and the number of sweep points across duration T exceeds 100. (For example, if VBW and/or RBW are limited to 3 MHz, then the zero-span method of measuring duty cycle shall not be used if $T \leq 16.7$ microseconds.)

Test Configuration

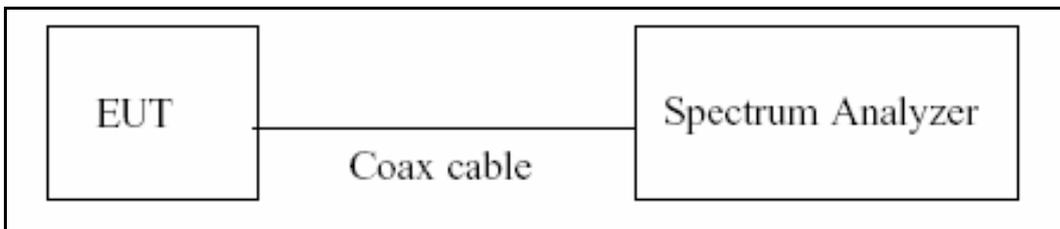

Test Procedure

The transmitter output is connected to the Spectrum Analyzer.

We tested according to the zero-span measurement method.

The largest available value of RBW is 8 MHz and VBW is 50 MHz.

The zero-span method of measuring duty cycle shall not be used if $T \leq 6.25$ microseconds. ($50/6.25 = 8$)

The zero-span method was used because all measured T data are > 6.25 microseconds and both RBW and VBW are $> 50/T$.


1. RBW = 8 MHz (the largest available value)
2. VBW = 8 MHz (\geq RBW)
3. SPAN = 0 Hz
4. Detector = Peak
5. Number of points in sweep > 100
6. Trace mode = Clear write
7. Measure T_{total} and T_{on}
8. Calculate Duty Cycle = T_{on} / T_{total} and Duty Cycle Factor = $10 \cdot \log(1/\text{Duty Cycle})$

7.2. 6dB Bandwidth & 99 % Bandwidth

Limit

The minimum permissible 6 dB bandwidth is 500 kHz.

Test Configuration



Test Procedure

The transmitter output is connected to the Spectrum Analyzer.

The Spectrum Analyzer is set to (Procedure 8.2 in KDB 558074 v05r01, Procedure 11.8.1 in ANSI 63.10-2013)

- 1) RBW = 100 kHz
- 2) VBW $\geq 3 \times$ RBW
- 3) Detector = Peak
- 4) Trace mode = max hold
- 5) Sweep = auto couple
- 6) Allow the trace to stabilize
- 7) We tested 6 dB bandwidth using the automatic bandwidth measurement capability of a spectrum analyzer. X dB is set 6 dB.

Test Procedure (99 % Bandwidth for IC)

The transmitter output is connected to the spectrum analyzer.

RBW = 1% ~ 5% of the occupied bandwidth

VBW $\approx 3 \times$ RBW

Detector = Peak

Trace mode = max hold

Sweep = auto couple

Allow the trace to stabilize


Note : We tested OBW using the automatic bandwidth measurement capability of a spectrum analyzer.

7.3. Output Power

Limit

The maximum permissible conducted output power is 1 Watt.

Test Configuration



Test Procedure

The transmitter output is connected to the Power Meter.

- Peak Power (Procedure 11.9.1.3 in ANSI 63.10-2013)
: Measure the peak power of the transmitter.

- Average Power (Procedure 11.9.2.3 in ANSI 63.10-2013)
 - 1) Measure the duty cycle.
 - 2) Measure the average power of the transmitter. This measurement is an average over both the on and off periods of the transmitter.
 - 3) Add $10 \log (1/x)$, where x is the duty cycle, to the measured power in order to compute the average power during the actual transmission times.

Sample Calculation


- Conducted Output Power(Peak) = Reading Value + ATT loss + Cable loss
- Conducted Output Power(Average) = Reading Value + ATT loss + Cable loss + Duty Cycle Factor

7.4. Power Spectral Density

Limit

The transmitter power density average over 1-second interval shall not be greater than 8dBm in any 3kHz BW.

Test Configuration

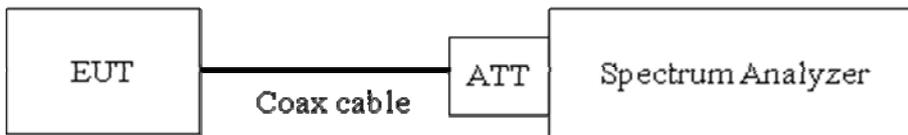

Test Procedure

The transmitter output is connected to the Spectrum Analyzer.

We tested according to Procedure 11.10 in ANSI 63.10-2013.

The spectrum analyzer is set to :

- 1) Set analyzer center frequency to DTS channel center frequency.
- 2) Set span to at least 1.5 times the OBW.
- 3) $RBW = 3 \text{ kHz} \leq RBW \leq 100 \text{ kHz}$.
- 4) $VBW \geq 3 \times RBW$.
- 5) Sweep = auto couple
- 6) Detector = power averaging (rms) or sample detector (when rms not available).
- 7) Ensure that the number of measurement points in the sweep $\geq [2 \times \text{span} / RBW]$.
- 8) Employ trace averaging (rms) mode over a minimum of 100 traces
- 9) Use the peak marker function to determine the maximum amplitude level.
- 10) Use the peak marker function to determine the maximum amplitude level within the RBW.

If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

Sample Calculation

- Power Spectral Density = Reading Value + ATT loss + Cable loss + Duty Cycle Factor


7.5. Conducted Band Edge(Out of Band Emissions) & Conducted Spurious Emissions

Limit

The maximum conducted (Peak) output power was used to demonstrate compliance, then the peak power in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 30 dB relative to the maximum in-band peak PSD level in 100 kHz.

[Conducted > 20 dBc]

Test Configuration

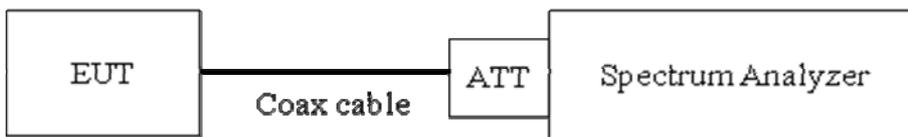

Test Procedure

The transmitter output is connected to the spectrum analyzer.

(Procedure 11.11 in ANSI 63.10-2013)

- 1) RBW = 100 kHz
- 2) VBW $\geq 3 \times$ RBW
- 3) Set span to encompass the spectrum to be examined
- 4) Detector = Peak
- 5) Trace Mode = max hold
- 6) Sweep time = auto couple
- 7) Ensure that the number of measurement points $\geq 2 \times$ Span/RBW
- 8) Allow trace to fully stabilize.
- 9) Use peak marker function to determine the maximum amplitude level.

Measurements are made over the 30 MHz to 25 GHz range with the transmitter set to the lowest, middle, and highest channels.

Factors for frequency

Freq(MHz)	Factor(dB)
30	21.35
100	19.88
200	20.24
300	20.18
400	20.28
500	20.30
600	20.37
700	20.40
800	20.40
900	20.39
1000	20.44
2000	20.69
2400*	20.68
2500*	20.70
3000	20.73
4000	20.94
5000	20.88
6000	20.91
7000	21.40
8000	21.37
9000	21.53
10000	21.61
11000	21.61
12000	21.73
13000	21.88
14000	21.95
15000	22.03
16000	22.09
17000	22.07
18000	22.13
19000	22.12
20000	22.19
21000	22.22
22000	22.36
23000	22.65
24000	22.39
25000	22.58
26000	12.07

Note : 1. "*" is fundamental frequency range.
2. Factor = Attenuator loss + Cable loss + EUT Cable loss

7.6. Radiated Test

Limit

FCC

Frequency (MHz)	Field Strength (uV/m)	Measurement Distance (m)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30	30	30

IC


Frequency (MHz)	Field Strength (uA/m)	Measurement Distance (m)
0.009 – 0.490	6.37/F(kHz)	300
0.490 – 1.705	63.7/F(kHz)	30
1.705 – 30	0.08	30

FCC&IC


Frequency (MHz)	Field Strength (uV/m)	Measurement Distance (m)
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

Test Configuration


Below 30 MHz

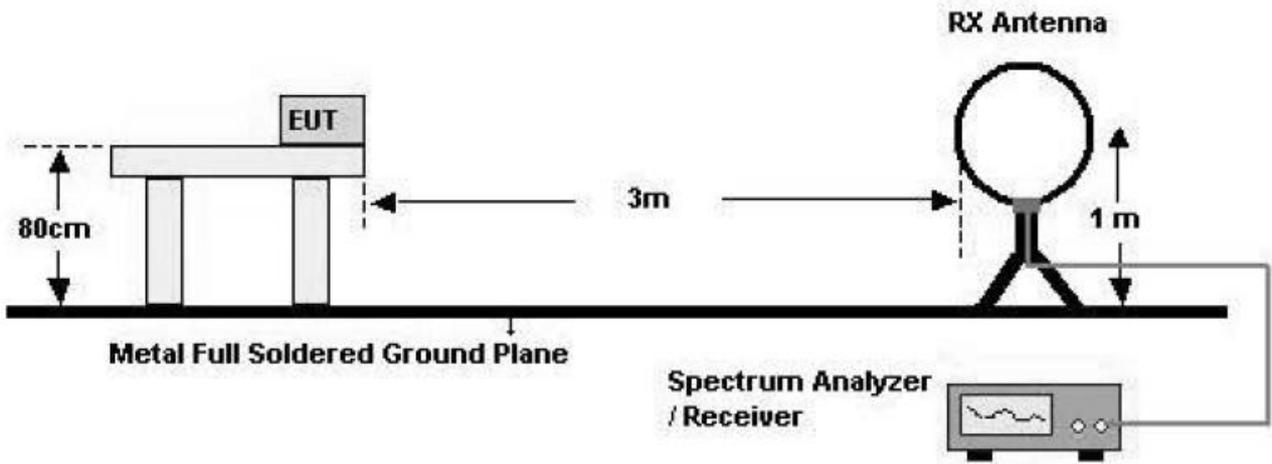

30 MHz - 1 GHz

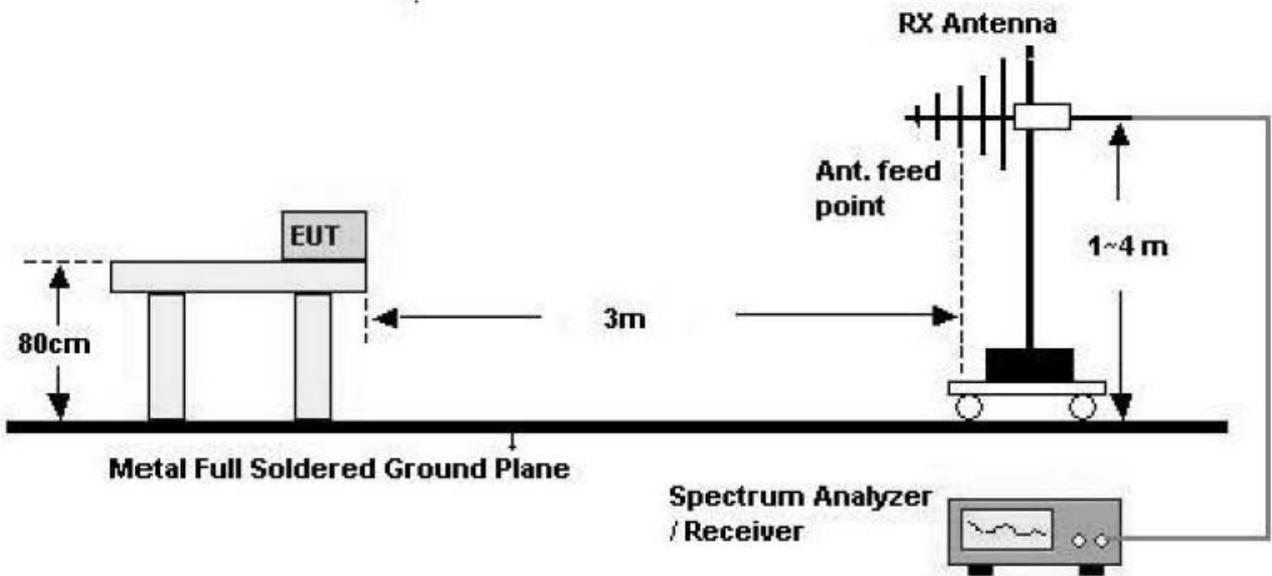

Above 1 GHz

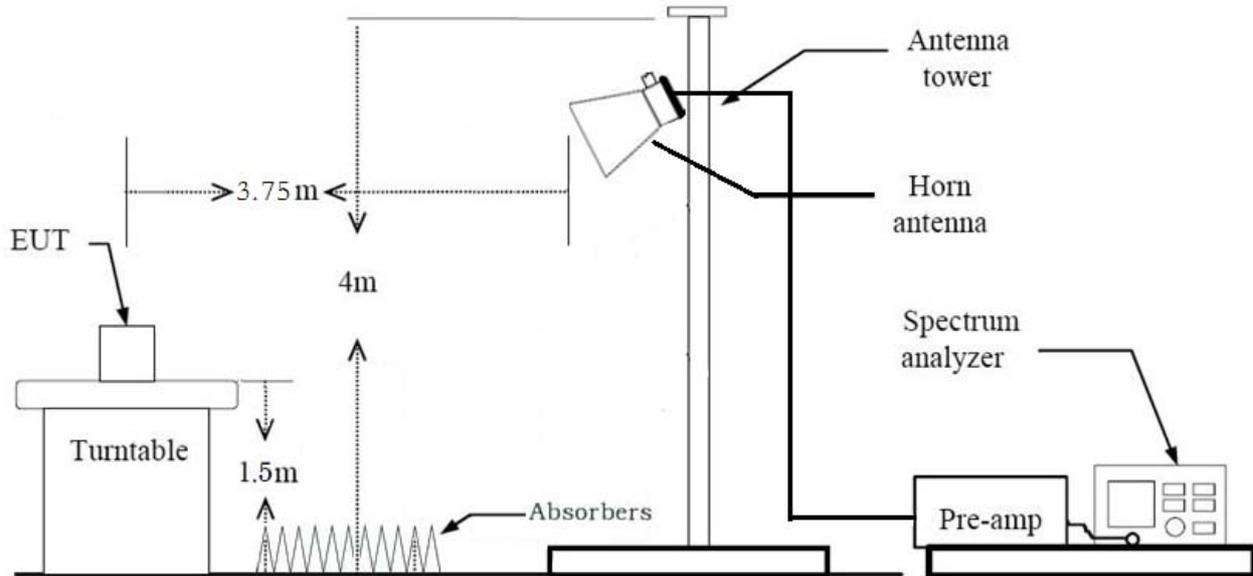

Test Procedure of Radiated spurious emissions(Below 30 MHz)

1. The EUT was placed on a non-conductive table located on semi-anechoic chamber.
2. The loop antenna was placed at a location 3m from the EUT
3. The EUT is placed on a turntable, which is 0.8m above ground plane.
4. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
5. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
6. Distance Correction Factor(0.009 MHz – 0.490 MHz) = $40 \cdot \log(3 \text{ m}/300 \text{ m}) = - 80 \text{ dB}$
Measurement Distance : 3 m
7. Distance Correction Factor(0.490 MHz – 30 MHz) = $40 \cdot \log(3 \text{ m}/30 \text{ m}) = - 40 \text{ dB}$
Measurement Distance : 3 m
8. Spectrum Setting
 - Frequency Range = 9 kHz ~ 30 MHz
 - Detector = Peak
 - Trace = Maxhold
 - RBW = 9 kHz
 - VBW $\geq 3 \cdot \text{RBW}$
9. Total = Reading Value + Antenna Factor(A.F) + Cable Loss(C.L) + Distance Factor(D.F)
10. The test results for below 30 MHz is correlated to an open site.
The result on OFS is about 2 dB higher than semi-anechoic chamber(10 m chamber)

Test Procedure of Radiated spurious emissions(Below 1GHz)

1. The EUT was placed on a non-conductive table located on semi-anechoic chamber.
2. The EUT is placed on a turntable, which is 0.8m above ground plane.
3. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
4. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
5. Spectrum Setting

(1) Measurement Type(Peak):

- Measured Frequency Range : 30 MHz – 1 GHz
- Detector = Peak
- Trace = Maxhold
- RBW = 100 kHz
- VBW \geq 3*RBW

(2) Measurement Type(Quasi-peak):

- Measured Frequency Range : 30 MHz – 1 GHz
- Detector = Quasi-Peak
- RBW = 120 kHz

*In general, (1) is used mainly

6. Total = Reading Value + Antenna Factor(A.F) + Cable Loss(C.L)

Test Procedure of Radiated spurious emissions (Above 1 GHz)

1. The EUT is placed on a turntable, which is 1.5 m above ground plane.
2. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
3. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
4. EUT is set 3.75 m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emissions.
5. According to SVSWR requirement in ANSI 63.4-2014, We performed the radiated test at 3.75 m distance from center of turn table. So, we applied the distance factor(reference distance : 3 m).
*Distance extrapolation factor = $20 \cdot \log(\text{test distance} / \text{specific distance})$ (dB)
6. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
7. Each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
8. The unit was tested with its standard battery.
9. Spectrum Setting (Method 8.6 in KDB 558074 v05r01, Procedure 11.12 in ANSI 63.10-2013)

(1) Measurement Type(Peak):

- Measured Frequency Range : 1 GHz – 25 GHz
- Detector = Peak
- Trace = Maxhold
- RBW = 1 MHz

- VBW \geq 3*RBW

(2) Measurement Type(Average): Duty cycle \geq 98%

- Measured Frequency Range : 1 GHz – 25 GHz

- Detector = RMS

- Averaging type = power (*i.e.*, RMS)

- RBW = 1 MHz

- VBW \geq 3*RBW

- Sweep time = auto.

- Trace mode = average (at least 100 traces).

(3) Measurement Type(Average): Duty cycle $<$ 98%, duty cycle variations are less than $\pm 2\%$

- Measured Frequency Range : 1 GHz – 25 GHz

- Detector = RMS

- Averaging type = power (*i.e.*, RMS)

- RBW = 1 MHz

- VBW \geq 3*RBW

- Sweep time = auto.

- Trace mode = average (at least 100 traces).

- Correction factor shall be added to the measurement results prior to comparing to the emission limit in order to compute the emission level that would have been measured had the test been performed at 100 percent duty cycle.

- Duty Cycle Factor (dB) : Please refer to the please refer to section 9.1.

10. Measurement value only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin $>$ 20 dB from the applicable limit) and considered that's already beyond the background noise floor.

11. Total(Measurement Type : Peak)

= Reading Value + Antenna Factor(A.F) + Cable Loss(C.L) - Amp Gain(G) + Distance Factor(D.F)

Total(Measurement Type : Average, Duty cycle \geq 98%)

= Reading Value + Antenna Factor(A.F) + Cable Loss(C.L) - Amp Gain(G) + Distance Factor(D.F)

Total(Measurement Type : Average, Duty cycle $<$ 98%)

= Reading Value + Antenna Factor(A.F) + Cable Loss(C.L) - Amp Gain(G) + Distance Factor(D.F)

+ Duty Cycle Factor

Test Procedure of Radiated Restricted Band Edge

1. The EUT is placed on a turntable, which is 1.5 m above ground plane.
2. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
3. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
4. EUT is set 3.75 m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emissions.
5. According to SVSWR requirement in ANSI 63.4-2014, We performed the radiated test at 3.75 m distance from center of turn table. So, we applied the distance factor(reference distance : 3 m).
*Distance extrapolation factor = $20 \cdot \log(\text{test distance} / \text{specific distance})$ (dB)
6. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
7. Each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
8. The unit was tested with its standard battery.
9. Spectrum Setting
 - (1) Measurement Type(Peak):
 - Measured Frequency Range : 2310 MHz ~ 2390 MHz/ 2483.5 MHz ~ 2500 MHz
 - Detector = Peak
 - Trace = Maxhold
 - RBW = 1 MHz
 - VBW \geq 3*RBW
 - (2) Measurement Type(Average): Duty cycle \geq 98%,
 - Measured Frequency Range : 2310 MHz ~ 2390 MHz/ 2483.5 MHz ~ 2500 MHz
 - Detector = RMS
 - Averaging type = power (*i.e.*, RMS)
 - RBW = 1 MHz
 - VBW \geq 3*RBW
 - Sweep time = auto.
 - Trace mode = average (at least 100 traces).

(3) Measurement Type(Average): Duty cycle < 98%, duty cycle variations are less than $\pm 2\%$

- Measured Frequency Range : 2310 MHz ~ 2390 MHz/ 2483.5 MHz ~ 2500 MHz
- Detector = RMS
- Averaging type = power (*i.e.*, RMS)
- RBW = 1 MHz
- VBW $\geq 3 \times$ RBW
- Sweep time = auto.
- Trace mode = average (at least 100 traces).
- Correction factor shall be added to the measurement results prior to comparing to the emission limit in order to compute the emission level that would have been measured had the test been performed at 100 percent duty cycle.
- Duty Cycle Factor (dB) : Please refer to the please refer to section 9.1.

10. Measurement value only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.

11. Total(Measurement Type : Peak)

= Reading Value + Antenna Factor(A.F) + Cable Loss(C.L) - Amp Gain(G) + Distance Factor(D.F)

Total(Measurement Type : Average, Duty cycle $\geq 98\%$)

= Reading Value + Antenna Factor(A.F) + Cable Loss(C.L) - Amp Gain(G) + Distance Factor(D.F)

Total(Measurement Type : Average, Duty cycle < 98%)

= Reading Value + Antenna Factor(A.F) + Cable Loss(C.L) - Amp Gain(G) + Distance Factor(D.F)
+ Duty Cycle Factor

7.7. AC Power line Conducted Emissions

Limit

For an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies, within the band 150 kHz to 30 MHz, shall not exceed the limits in the following table, as measured using a 50 μ H/50 ohms line impedance stabilization network (LISN).

Frequency Range (MHz)	Limits (dB μ V)	
	Quasi-peak	Average
0.15 to 0.50	66 to 56*	56 to 46*
0.50 to 5	56	46
5 to 30	60	50

*Decreases with the logarithm of the frequency.

Compliance with this provision shall be based on the measurement of the radio frequency voltage between each power line (LINE and NEUTRAL) and ground at the power terminals.

Test Configuration

See test photographs attached in Annex A for the actual connections between EUT and support equipment.

Test Procedure

1. The EUT is placed on a wooden table 80 cm above the reference ground plane.
2. The EUT is connected via LISN to a test power supply.
3. The measurement results are obtained as described below:
4. Detectors : Quasi Peak and Average Detector.

Sample Calculation

Quasi-peak(Final Result) = Reading Value + Correction Factor

7.8. Receiver Spurious Emissions**Limit**


Frequency (MHz)	Field Strength (uV/m)	Measurement Distance (m)
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

Note:


Measurements for compliance with the limits in table may be performed at distances other than 3 metres.

Test Configuration

30 MHz - 1 GHz

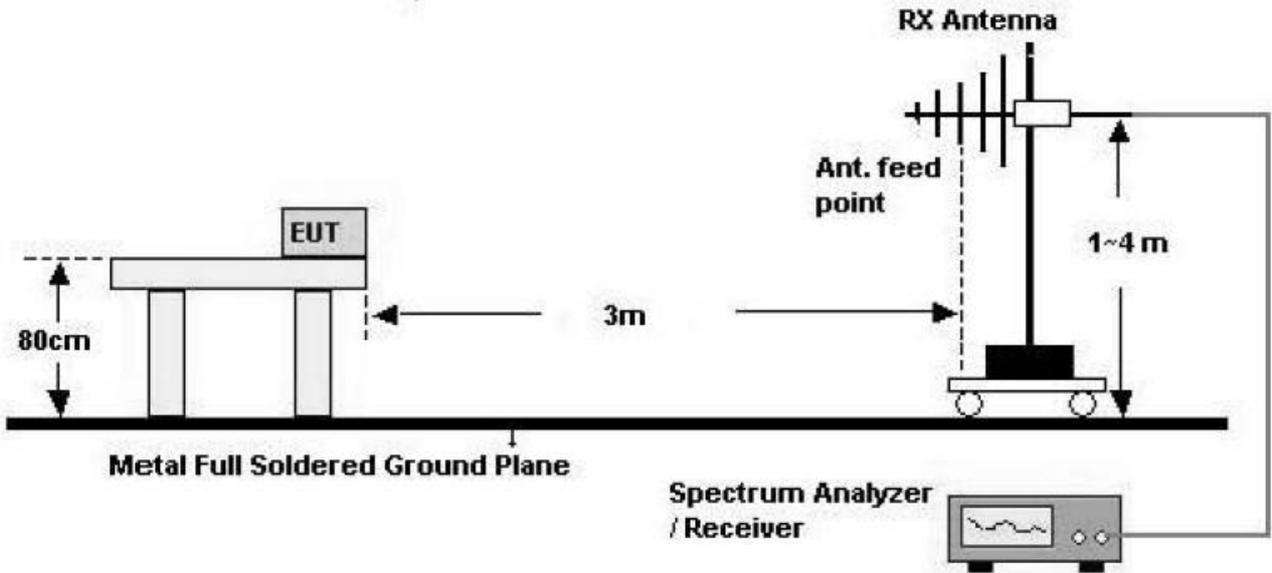

Above 1 GHz

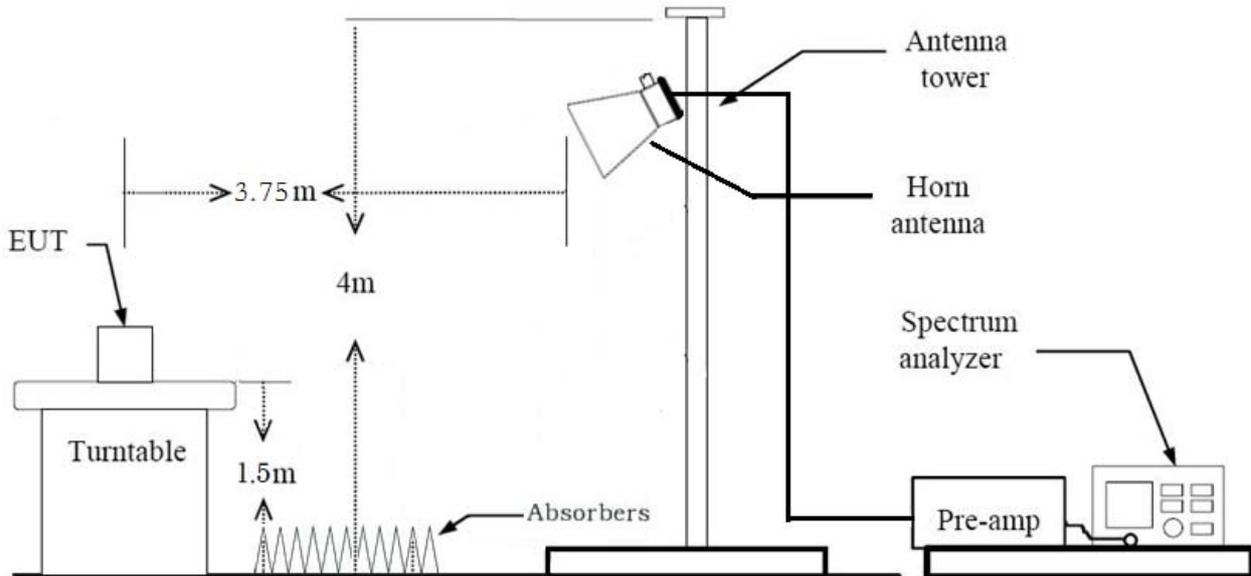

Test Procedure of Radiated spurious emissions (Above 1 GHz)

1. The EUT is placed on a turntable, which is 1.5 m above ground plane.
2. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
3. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
4. EUT is set 3.75 m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emissions.
5. According to SVSWR requirement in ANSI 63.4-2014, We performed the radiated test at 3.75 m distance from center of turn table. So, we applied the distance factor(reference distance : 3 m).
*Distance extrapolation factor = $20 \cdot \log(\text{test distance} / \text{specific distance})$ (dB)
6. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
7. Each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
8. The unit was tested with its standard battery.
9. Spectrum Setting
 - (1) Measurement Type(Peak):
 - Measured Frequency Range : 1 GHz – 25 GHz
 - Detector = Peak
 - Trace = Maxhold
 - RBW = 1 MHz
 - VBW $\geq 3 \cdot$ RBW
 - (2) Measurement Type(Average):
 - We performed using a reduced video BW method was done with the analyzer in linear mode
 - Measured Frequency Range : 1 GHz – 25 GHz
 - Detector = Peak
 - Trace = Maxhold
 - RBW = 1 MHz
 - VBW $\geq 1/\tau$ Hz, where τ = pulse width in secondsThe actual setting value of VBW = 1 kHz
10. Measurement value only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
11. Total = Reading Value + Antenna Factor(A.F) + Cable Loss(C.L) - Amp Gain(G) + Distance Factor(D.F)

7.9. Worst case configuration and mode

Radiated test

1. All modes of operation were investigated and the worst case configuration results are reported.
2. All configurations of antenna were investigated and the worst case configuration results are reported.
 - Mode : Ant1(SISO), Ant2(SISO), Ant1+Ant2(CDD)
 - Worstcase : Ant1+Ant2(CDD)
3. EUT Axis
 - Radiated Spurious Emissions : X
 - Radiated Restricted Band Edge : X
4. Duty cycle factor applies only 802.11g/n (Duty cycle < 98%).
5. All datarate of operation were investigated and the worst case datarate results are reported
 - 802.11b : 1Mbps
 - 802.11g : 6Mbps
 - 802.11n : MCS0

AC Power line Conducted Emissions

1. All modes of operation were investigated and the worst case configuration results are reported.
 - Mode : Stand alone + Notebook

Conducted test

1. All datarate of operation were investigated and the worst case datarate results are reported.
2. SISO & MIMO were tested and the all case results are reported.
 - Mode : Ant1(SISO), Ant2(SISO), Ant1+Ant2(CDD)

8. SUMMARY TEST OF RESULTS

FCC Part

Test Description	FCC Part Section(s)	Test Limit	Test Condition	Test Result
6 dB Bandwidth	§15.247(a)(2)	> 500 kHz	Conducted	PASS
Conducted Maximum Peak Output Power	§15.247(b)(3)	< 1 Watt		PASS
Power Spectral Density	§15.247(e)	< 8 dBm / 3 kHz Band		PASS
Band Edge (Out of Band Emissions)	§15.247(d)	Conducted > 20 dBc		PASS
AC Power line Conducted Emissions	§15.207	cf. Section 7.7		PASS
Radiated Spurious Emissions	§15.247(d), 15.205, 15.209	cf. Section 7.6	Radiated	PASS
Radiated Restricted Band Edge	§15.247(d), 15.205, 15.209	cf. Section 7.6		PASS

IC Part

Test Description	IC Part Section(s)	Test Limit	Test Condition	Test Result
6 dB Bandwidth	RSS-247, 5.2	> 500 kHz	Conducted	PASS
99% Bandwidth	RSS-GEN, 6.7	N/A		N/A
Conducted Maximum Peak Output Power And e.i.r.p.	RSS-247, 5.4.	< 1 Watt <4 Watt(e.i.r.p.)		PASS
Power Spectral Density	RSS-247, 5.2	< 8 dBm / 3 kHz Band		PASS
Band Edge(Out of Band Emissions)	RSS-247, 5.5	Conducted > 30 dBc		PASS
AC Power line Conducted Emissions	RSS-GEN, 8.8	cf. Section 7.7		PASS
Radiated Spurious Emissions	RSS-GEN, 8.9	cf. Section 7.6		Radiated
Receiver Spurious Emissions	RSS-GEN, 7	cf. Section 7.8	PASS	
Radiated Restricted Band Edge	RSS-GEN, 8.10	cf. Section 7.6	PASS	

9. TEST RESULT

9.1 6dB BANDWIDTH & 99 % BANDWIDTH

FCC

[Ant1]

802.11b Mode		6dB Bandwidth [MHz]	Limit [MHz]
Frequency [MHz]	Channel No.		
2412	1	9.071	> 0.5
2437	6	9.078	> 0.5
2462	11	9.068	> 0.5
2467	12	9.071	> 0.5
2472	13	9.060	> 0.5

802.11g Mode		6dB Bandwidth [MHz]	Limit [MHz]
Frequency [MHz]	Channel No.		
2412	1	16.375	> 0.5
2437	6	16.408	> 0.5
2462	11	16.350	> 0.5
2467	12	16.360	> 0.5
2472	13	16.380	> 0.5

802.11n(HT20) Mode		6dB Bandwidth [MHz]	Limit [MHz]
Frequency [MHz]	Channel No.		
2412	1	17.581	> 0.5
2437	6	17.617	> 0.5
2462	11	17.593	> 0.5
2467	12	17.650	> 0.5
2472	13	17.350	> 0.5

802.11n(HT40) Mode		6dB Bandwidth [MHz]	Limit [MHz]
Frequency [MHz]	Channel No.		
2422	3	36.408	> 0.5
2437	6	36.393	> 0.5
2452	9	36.385	> 0.5

[Ant2]

802.11b Mode		6dB Bandwidth [MHz]	Limit [MHz]
Frequency [MHz]	Channel No.		
2412	1	8.604	> 0.5
2437	6	9.064	> 0.5
2462	11	9.071	> 0.5
2467	12	9.074	> 0.5
2472	13	9.080	> 0.5

802.11g Mode		6dB Bandwidth [MHz]	Limit [MHz]
Frequency [MHz]	Channel No.		
2412	1	16.371	> 0.5
2437	6	16.383	> 0.5
2462	11	16.373	> 0.5
2467	12	16.360	> 0.5
2472	13	16.350	> 0.5


802.11n(HT20) Mode		6dB Bandwidth [MHz]	Limit [MHz]
Frequency [MHz]	Channel No.		
2412	1	17.547	> 0.5
2437	6	17.601	> 0.5
2462	11	17.594	> 0.5
2467	12	17.610	> 0.5
2472	13	17.590	> 0.5

802.11n(HT40) Mode		6dB Bandwidth [MHz]	Limit [MHz]
Frequency [MHz]	Channel No.		
2422	3	36.388	> 0.5
2437	6	36.411	> 0.5
2452	9	36.399	> 0.5


[Ant1]

■ Test Plots


6dB Bandwidth plot (802.11b-CH 13)

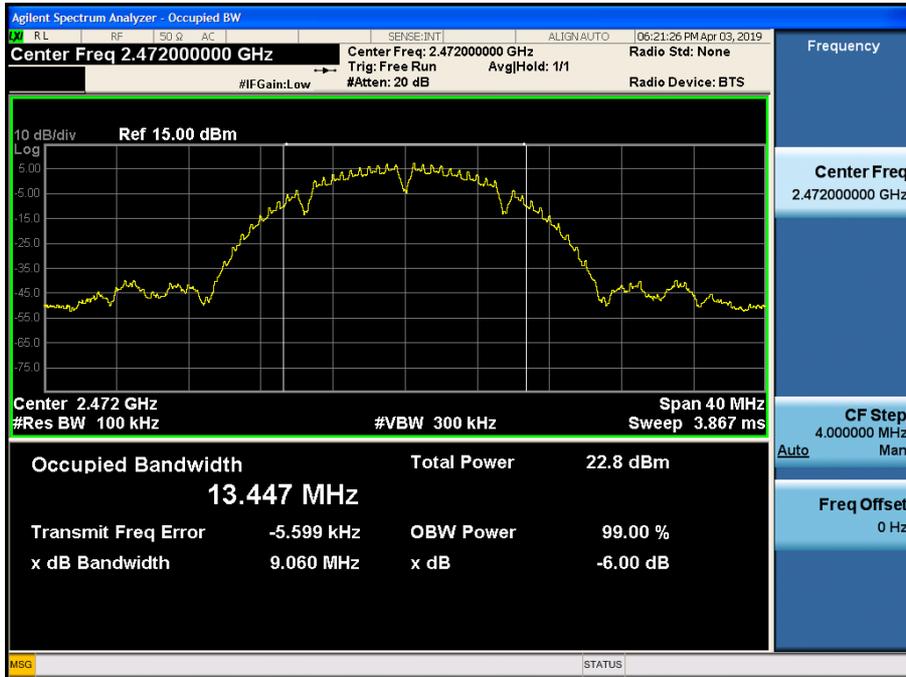


6dB Bandwidth plot (802.11g-CH 11)

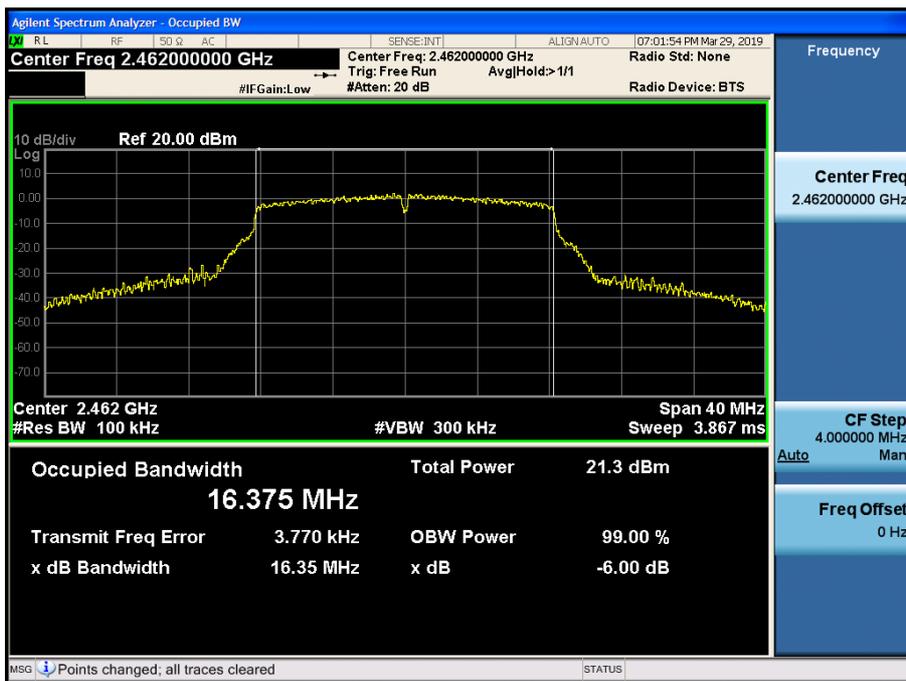

6dB Bandwidth plot (802.11n_HT20-CH 13)

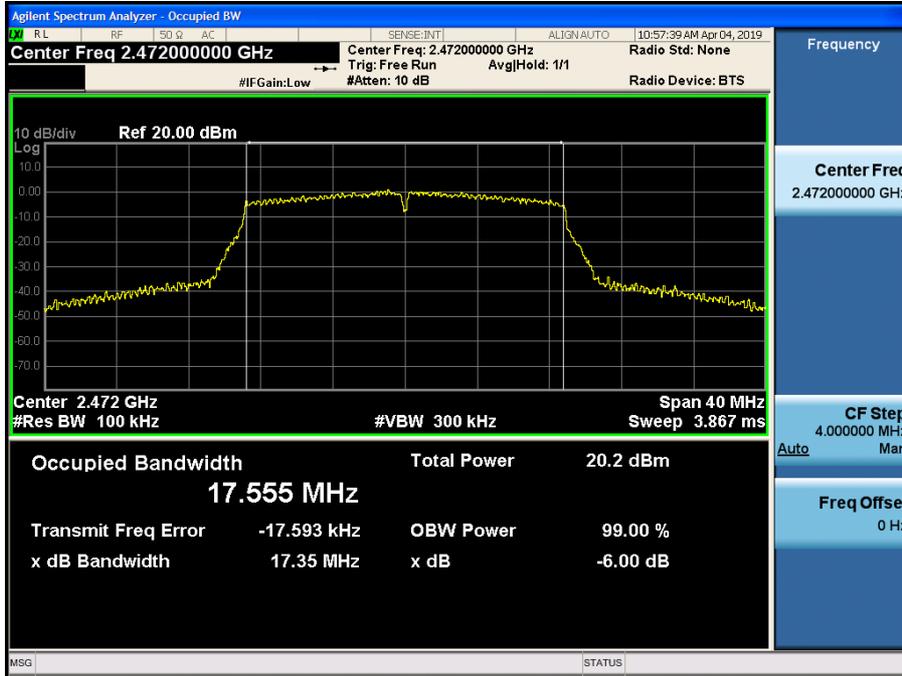

6dB Bandwidth plot (802.11n_HT40-CH 9)

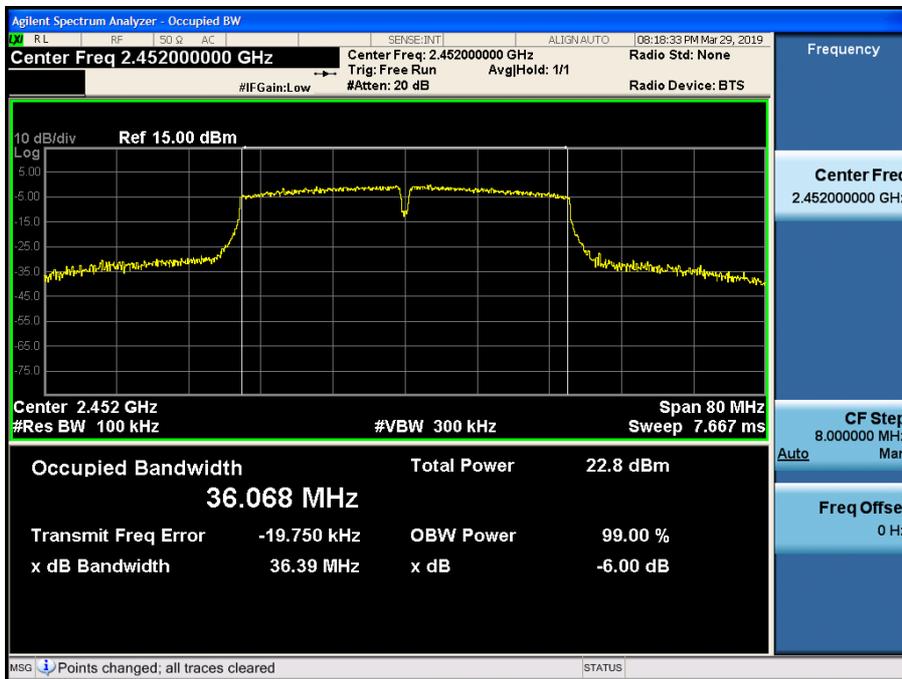


Note:

In order to simplify the report, attached plots were only the most narrow 6 dB BW channel.


[Ant2]

■ Test Plots


6dB Bandwidth plot (802.11b-CH 1)

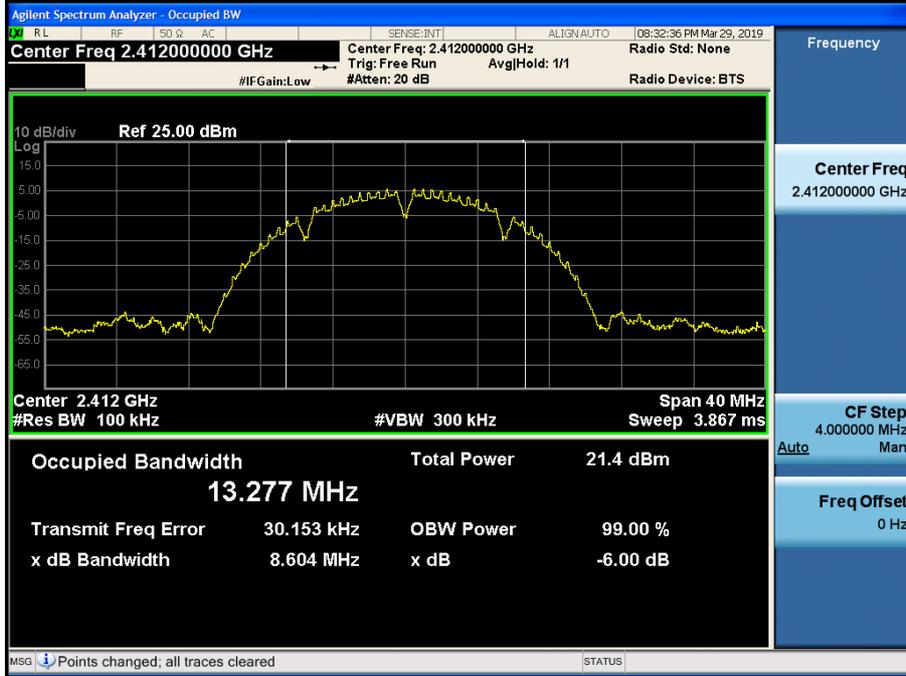


6dB Bandwidth plot (802.11g-CH 13)

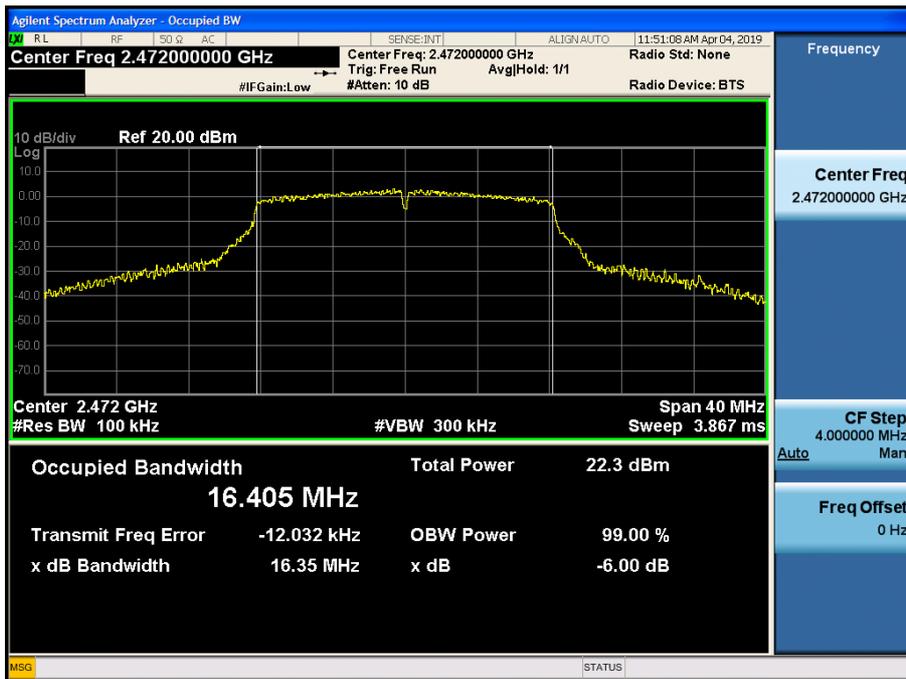

6dB Bandwidth plot (802.11n_HT20-CH 1)

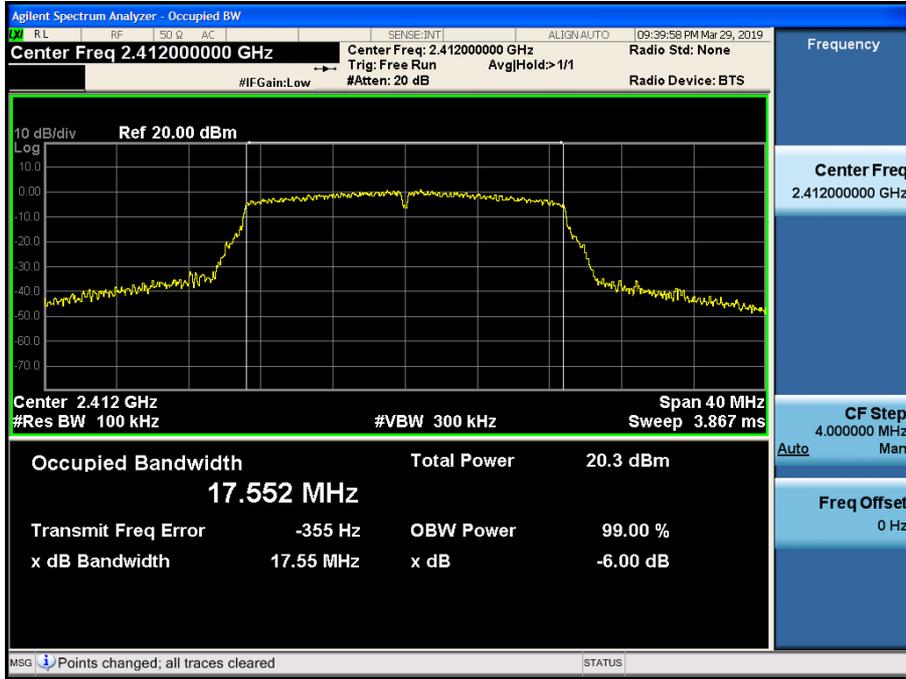

6dB Bandwidth plot (802.11n_HT40-CH 3)

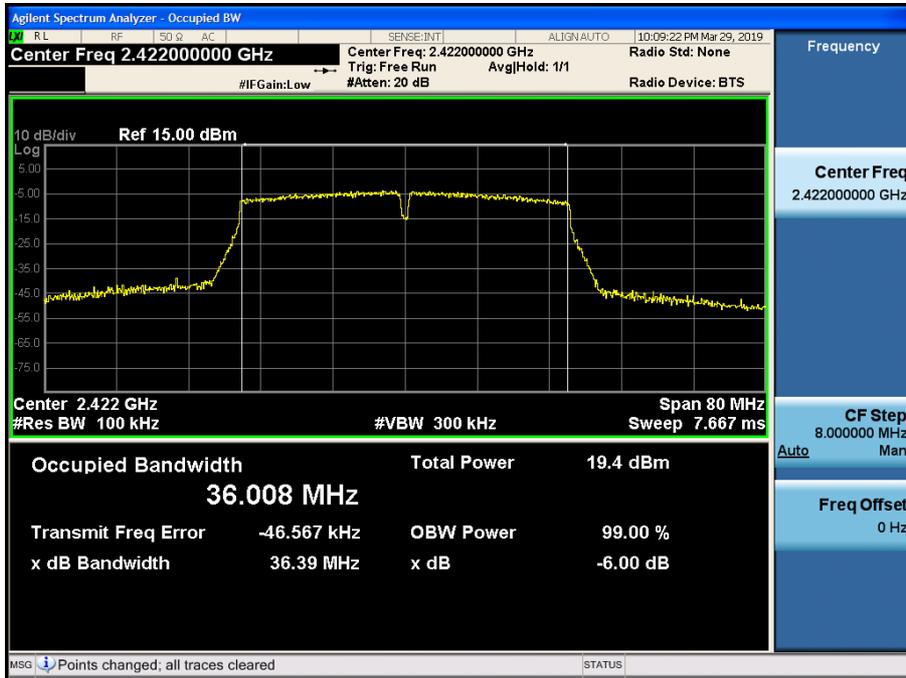

Note:

In order to simplify the report, attached plots were only the most narrow 6 dB BW channel.

IC

[Ant1]

802.11b Mode		OBW Bandwidth [MHz]	Limit [MHz]
Frequency [MHz]	Channel No.		
2412	1	13.386	N/A
2437	6	13.446	N/A
2462	11	13.489	N/A
2467	12	13.412	N/A
2472	13	13.451	N/A

802.11g Mode		OBW Bandwidth [MHz]	Limit [MHz]
Frequency [MHz]	Channel No.		
2412	1	16.842	N/A
2437	6	16.887	N/A
2462	11	16.873	N/A
2467	12	16.799	N/A
2472	13	16.605	N/A

802.11n(HT20) Mode		OBW Bandwidth [MHz]	Limit [MHz]
Frequency [MHz]	Channel No.		
2412	1	17.818	N/A
2437	6	17.879	N/A
2462	11	17.879	N/A
2467	12	17.804	N/A
2472	13	17.771	N/A

802.11n(HT40) Mode		OBW Bandwidth [MHz]	Limit [MHz]
Frequency [MHz]	Channel No.		
2422	3	36.487	N/A
2437	6	38.336	N/A
2452	9	36.589	N/A

[Ant2]

802.11b Mode		OBW Bandwidth [MHz]	Limit [MHz]
Frequency [MHz]	Channel No.		
2412	1	13.298	N/A
2437	6	13.314	N/A
2462	11	13.355	N/A
2467	12	13.360	N/A
2472	13	13.398	N/A

802.11g Mode		OBW Bandwidth [MHz]	Limit [MHz]
Frequency [MHz]	Channel No.		
2412	1	16.825	N/A
2437	6	16.879	N/A
2462	11	16.837	N/A
2467	12	16.782	N/A
2472	13	16.767	N/A


802.11n(HT20) Mode		OBW Bandwidth [MHz]	Limit [MHz]
Frequency [MHz]	Channel No.		
2412	1	17.798	N/A
2437	6	17.806	N/A
2462	11	17.873	N/A
2467	12	17.817	N/A
2472	13	17.738	N/A

802.11n(HT40) Mode		OBW Bandwidth [MHz]	Limit [MHz]
Frequency [MHz]	Channel No.		
2422	3	36.517	N/A
2437	6	37.310	N/A
2452	9	36.555	N/A

[Ant1]

■ Test Plots


99% Bandwidth plot (802.11b-CH 11)

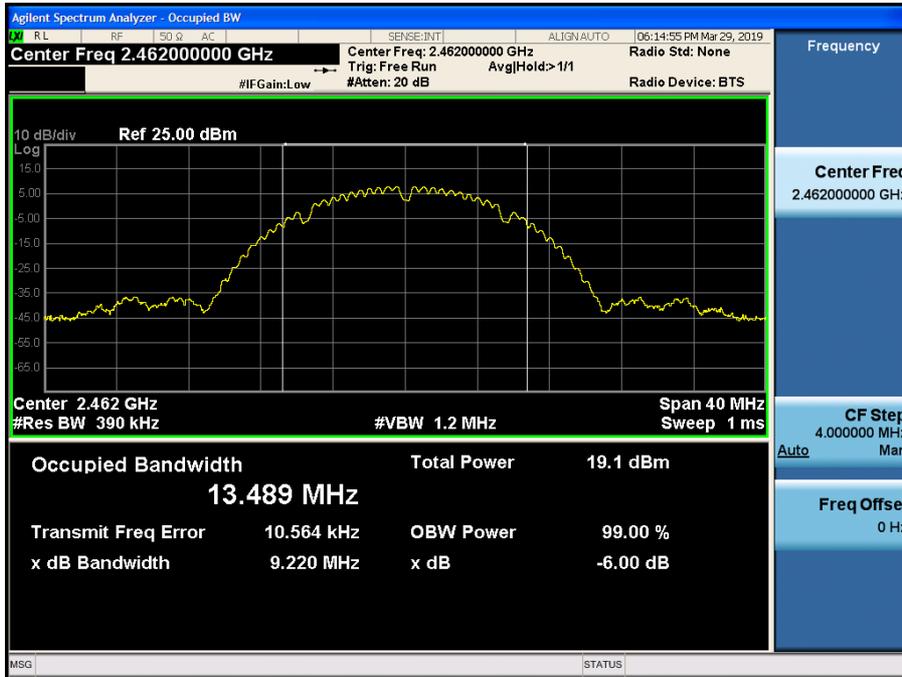

99% Bandwidth plot (802.11g-CH 6)



99% Bandwidth plot (802.11n_HT20-CH 6)

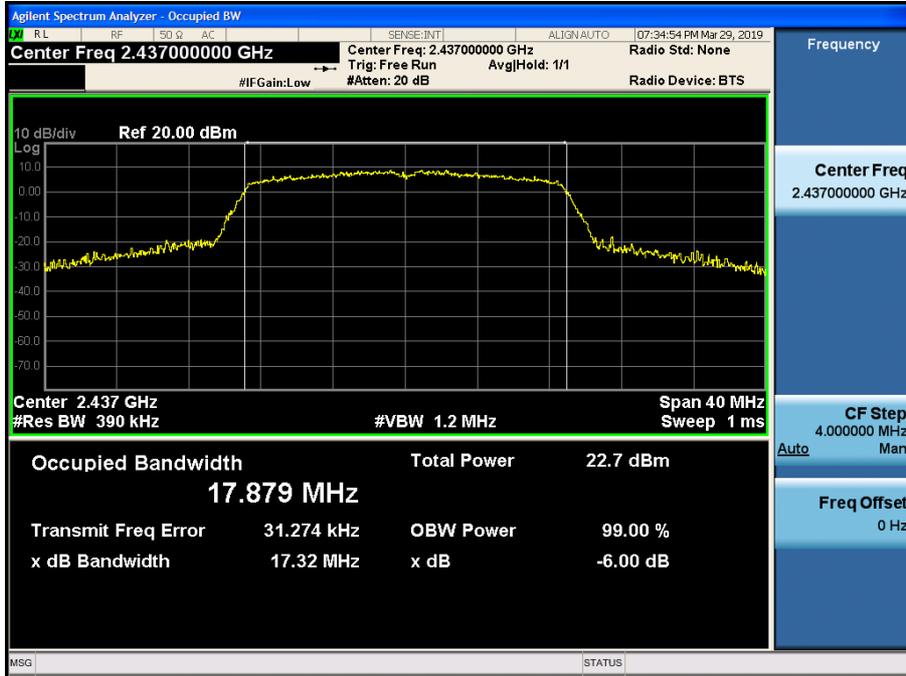

99% Bandwidth plot (802.11n_HT40-CH 6)




Note:

In order to simplify the report, attached plots were only the most wide 99% Bandwidth channel.


[Ant2]

■ Test Plots

99% Bandwidth plot (802.11b-CH 13)

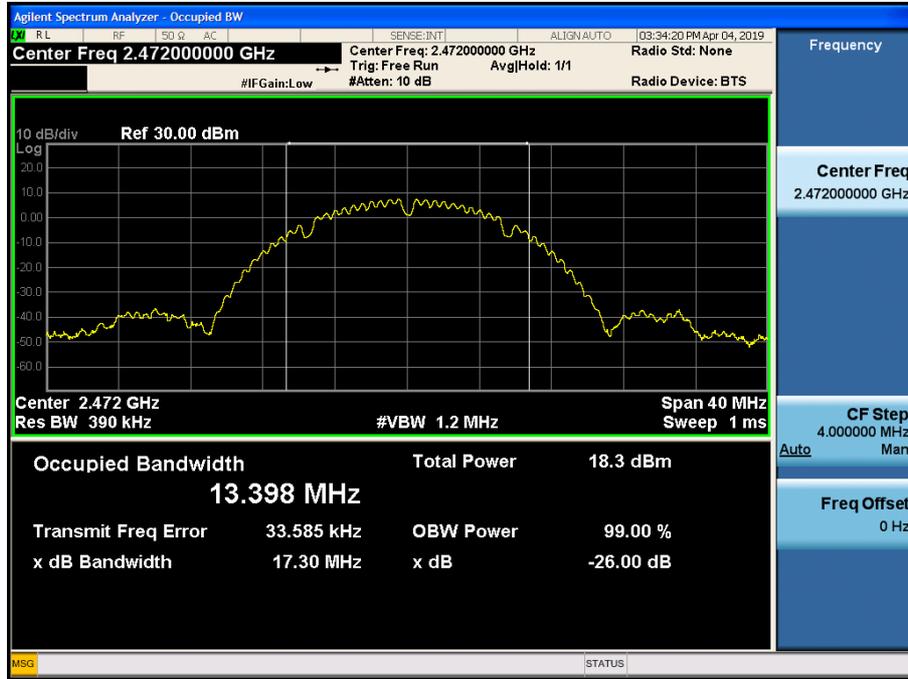


99% Bandwidth plot (802.11g-CH 6)

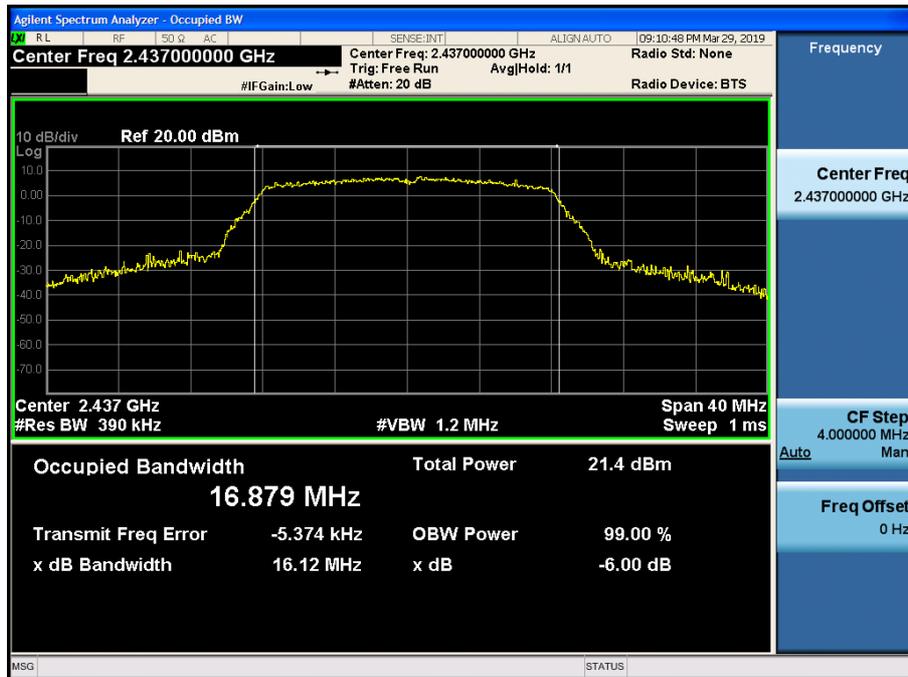

99% Bandwidth plot (802.11n_HT20-CH 11)



99% Bandwidth plot (802.11n_HT40-CH 6)

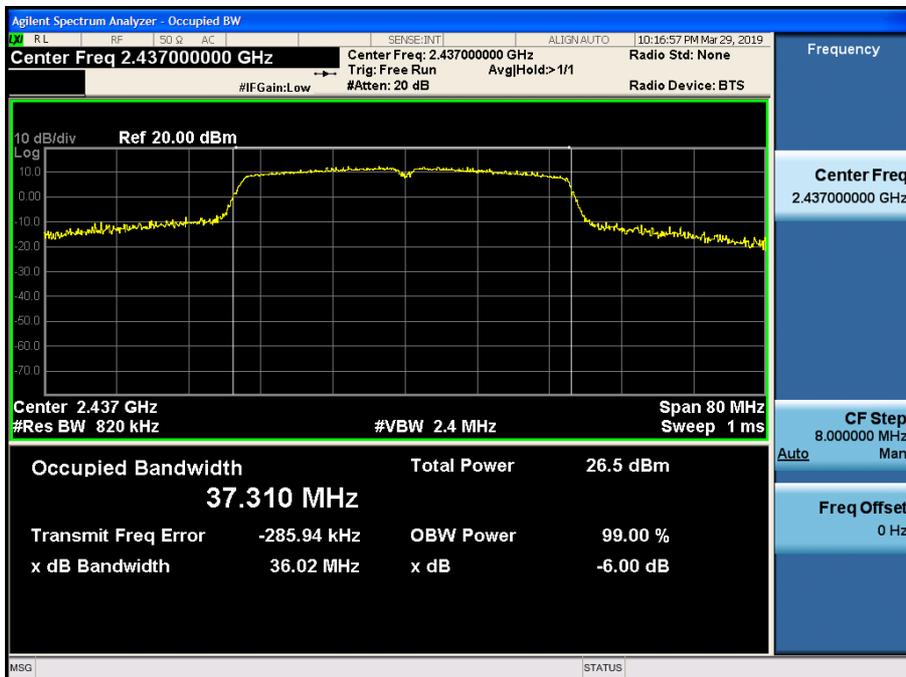

Note:

In order to simplify the report, attached plots were only the most wide 99% Bandwidth channel.

9.2 OUTPUT POWER

Peak Power

1. Power Meter offset = Attenuator loss + Cable loss
2. We apply to the offset in the 2.4 GHz range that was rounded off to the closest twentieth dB.
So, 21.03 dB is offset for 2.4 GHz Band.

802.11b Mode		Rate (Mbps)	SISO Measured Power (dBm)				MIMO (CDD) (dBm)	Limit (dBm)
Frequency [MHz]	Channel No.		Ant 1	Power Level Setting	Ant 2	Power Level Setting	Ant 1 + Ant 2	
2412	1	1	16.40	12.50	16.31	12.50	19.36	30.00
		2	16.94		16.86		19.91	30.00
		5.5	18.52		18.10		21.32	30.00
		11	20.26		19.72		23.01	30.00
2437	6	1	17.56	13.50	16.83	13.50	20.22	30.00
		2	18.15		17.19		20.70	30.00
		5.5	19.62		18.86		22.27	30.00
		11	21.26		20.24		23.79	30.00
2462	11	1	18.42	14.00	17.93	14.00	21.19	30.00
		2	18.65		18.25		21.47	30.00
		5.5	20.07		19.70		22.90	30.00
		11	21.97		21.62		24.81	30.00
2467	12	1	17.53	13.50	18.39	13.50	20.99	30.00
		2	18.47		18.67		21.58	30.00
		5.5	19.91		19.93		22.93	30.00
		11	21.56		21.85		24.72	30.00
2472	13	1	18.01	13.50	18.39	13.50	21.21	30.00
		2	18.40		18.98		21.71	30.00
		5.5	19.81		19.90		22.87	30.00
		11	21.57		21.48		24.54	30.00

802.11g Mode		Rate (Mbps)	SISO Measured Power (dBm)				MIMO (CDD) (dBm)	Limit (dBm)
Frequency [MHz]	Channel No.		Ant 1	Power Level Setting	Ant 2	Power Level Setting	Ant 1 + Ant 2	
2412	1	6	21.81	12.50	21.49	12.50	24.67	30.00
		9	22.15		21.75		24.97	30.00
		12	22.09		21.71		24.92	30.00
		18	22.12		21.69		24.92	30.00
		24	22.65		22.30		25.49	30.00
		36	22.71		22.26		25.50	30.00
		48	20.66		20.11		23.41	30.00
		54	20.62		20.02		23.34	30.00
2437	6	6	22.99	13.50	21.98	13.50	25.53	30.00
		9	23.04		22.31		25.70	30.00
		12	23.03		21.95		25.53	30.00
		18	23.04		22.05		25.58	30.00
		24	23.60		22.64		26.16	30.00
		36	23.51		22.72		26.15	30.00
		48	21.64		20.65		24.18	30.00
		54	21.61		20.73		24.20	30.00
2462	11	6	22.28	13.00	22.14	13.00	25.23	30.00
		9	22.56		22.42		25.50	30.00
		12	22.52		22.42		25.48	30.00
		18	22.51		22.16		25.35	30.00
		24	23.03		22.83		25.94	30.00
		36	23.08		22.68		25.89	30.00
		48	21.15		20.85		24.01	30.00
		54	20.89		20.95		23.93	30.00
2467	12	6	22.32	13.50	23.06	13.50	25.72	30.00
		9	22.62		23.25		25.96	30.00
		12	23.00		23.44		26.24	30.00
		18	22.48		23.25		25.89	30.00
		24	23.29		23.87		26.60	30.00
		36	23.41		23.61		26.52	30.00
		48	21.18		21.62		24.42	30.00
		54	21.39		21.82		24.62	30.00
2472	13	6	20.81	11.50	21.05	11.50	23.94	30.00
		9	21.20		21.23		24.23	30.00
		12	21.48		20.83		24.18	30.00
		18	21.06		21.40		24.24	30.00
		24	21.51		21.44		24.49	30.00
		36	21.90		21.96		24.94	30.00
		48	19.27		19.49		22.39	30.00
		54	19.60		19.72		22.67	30.00

802.11n(HT20) Mode		MCS Index	SISO Measured Power (dBm)				MIMO (CDD) (dBm)	Limit (dBm)
Frequency [MHz]	Channel No.		Ant 1	Power Level Setting	Ant 2	Power Level Setting	Ant 1 + Ant 2	
2412	1	0	21.78	12.50	21.28	12.50	24.55	30.00
		1	21.72		21.47		24.61	30.00
		2	21.81		21.61		24.72	30.00
		3	22.57		21.95		25.28	30.00
		4	22.64		22.24		25.45	30.00
		5	22.52		22.10		25.33	30.00
		6	20.56		20.18		23.38	30.00
		7	20.53		19.95		23.26	30.00
2437	6	0	23.36	14.00	22.29	14.00	25.87	30.00
		1	23.53		22.70		26.14	30.00
		2	23.39		22.55		26.00	30.00
		3	23.90		23.17		26.56	30.00
		4	23.98		23.10		26.57	30.00
		5	24.11		23.17		26.68	30.00
		6	22.12		21.16		24.68	30.00
		7	22.00		21.14		24.60	30.00
2462	11	0	23.42	14.00	23.11	14.00	26.28	30.00
		1	23.39		23.15		26.28	30.00
		2	23.40		23.11		26.27	30.00
		3	23.93		23.67		26.81	30.00
		4	23.73		23.68		26.72	30.00
		5	24.00		23.84		26.93	30.00
		6	21.92		21.73		24.83	30.00
		7	21.89		21.80		24.86	30.00
2467	12	0	22.79	13.50	22.93	13.50	25.87	30.00
		1	22.93		23.25		26.10	30.00
		2	23.22		22.77		26.01	30.00
		3	23.42		23.06		26.25	30.00
		4	23.56		23.11		26.35	30.00
		5	23.49		23.37		26.44	30.00
		6	21.22		21.29		24.27	30.00
		7	21.57		21.61		24.60	30.00
2472	13	0	21.29	12.00	21.23	12.00	24.27	30.00
		1	21.43		21.58		24.52	30.00
		2	21.74		21.17		24.47	30.00
		3	22.24		21.66		24.97	30.00
		4	21.92		22.08		25.01	30.00
		5	22.09		22.28		25.20	30.00
		6	19.59		19.78		22.70	30.00
		7	19.85		19.89		22.88	30.00

802.11n(HT40) Mode		MCS Index	SISO Measured Power (dBm)				MIMO (CDD) (dBm)	Limit (dBm)
Frequency [MHz]	Channel No.		Ant 1	Power Level Setting	Ant 2	Power Level Setting	Ant 1 + Ant 2	
2422	3	0	20.63	11.00	20.43	11.00	23.54	30.00
		1	20.67		20.48		23.58	30.00
		2	20.73		20.49		23.62	30.00
		3	21.18		20.76		23.98	30.00
		4	21.30		20.83		24.08	30.00
		5	21.37		21.03		24.21	30.00
		6	19.07		18.67		21.89	30.00
		7	19.11		18.98		22.05	30.00
2437	6	0	26.34	18.00	27.02	18.00	29.70	30.00
		1	26.42		26.66		29.55	30.00
		2	26.51		26.36		29.45	30.00
		3	26.39		26.45		29.43	30.00
		4	26.46		26.67		29.58	30.00
		5	26.48		26.67		29.59	30.00
		6	25.97		26.19		29.09	30.00
		7	26.10		26.07		29.10	30.00
2452	9	0	23.83	14.00	23.05	14.00	26.46	30.00
		1	23.84		23.11		26.50	30.00
		2	23.94		23.02		26.51	30.00
		3	24.36		23.42		26.93	30.00
		4	24.32		23.54		26.96	30.00
		5	24.45		23.46		26.99	30.00
		6	22.30		21.55		24.95	30.00
		7	22.41		21.60		25.04	30.00

Average Power

1. Power Meter offset = Attenuator loss + Cable loss
2. We apply to the offset in the 2.4 GHz range that was rounded off to the closest twentieth dB.
So, 21.03 dB is offset for 2.4 GHz Band.

802.11b Mode		Rate (Mbps)	SISO Measured Power (dBm)				MIMO (CDD) (dBm)	Limit (dBm)
Frequency [MHz]	Channel No.		Ant 1	Power Level Setting	Ant 2	Power Level Setting	Ant 1 + Ant 2	
2412	1	1	13.81	12.50	13.84	12.50	16.83	30.00
		2	14.04		13.90		16.98	30.00
		5.5	14.11		13.94		17.03	30.00
		11	14.09		13.70		16.91	30.00
2437	6	1	15.02	13.50	14.26	13.50	17.67	30.00
		2	15.29		14.30		17.84	30.00
		5.5	15.38		14.39		17.92	30.00
		11	15.11		14.12		17.65	30.00
2462	11	1	16.07	14.00	15.41	14.00	18.76	30.00
		2	15.73		15.40		18.58	30.00
		5.5	15.80		15.48		18.65	30.00
		11	15.76		15.48		18.63	30.00
2467	12	1	14.97	13.50	15.05	13.50	18.02	30.00
		2	15.20		15.07		18.15	30.00
		5.5	15.31		14.89		18.12	30.00
		11	15.03		14.83		17.94	30.00
2472	13	1	15.19	13.50	14.87	13.50	18.04	30.00
		2	15.22		15.09		18.17	30.00
		5.5	15.06		14.88		17.98	30.00
		11	15.01		14.85		17.94	30.00

802.11g Mode		Rate (Mbps)	SISO Measured Power (dBm)				MIMO (CDD) (dBm)	Limit (dBm)
Frequency [MHz]	Channel No.		Ant 1	Power Level Setting	Ant 2	Power Level Setting	Ant 1 + Ant 2	
2412	1	6	13.99	12.50	13.65	12.50	16.83	30.00
		9	14.25		13.89		17.08	30.00
		12	14.24		13.91		17.09	30.00
		18	14.25		13.90		17.09	30.00
		24	14.28		13.90		17.10	30.00
		36	14.32		13.79		17.07	30.00
		48	12.10		11.56		14.85	30.00
		54	12.10		11.58		14.86	30.00
2437	6	6	15.17	13.50	14.15	13.50	17.70	30.00
		9	15.18		14.42		17.83	30.00
		12	15.20		14.16		17.72	30.00
		18	15.21		14.18		17.73	30.00
		24	15.20		14.19		17.74	30.00
		36	15.21		14.35		17.81	30.00
		48	13.15		12.14		15.68	30.00
		54	13.18		12.15		15.70	30.00
2462	11	6	14.45	13.00	14.31	13.00	17.39	30.00
		9	14.69		14.56		17.64	30.00
		12	14.69		14.54		17.63	30.00
		18	14.70		14.22		17.47	30.00
		24	14.67		14.38		17.54	30.00
		36	14.76		14.25		17.52	30.00
		48	12.64		12.33		15.50	30.00
		54	12.42		12.35		15.40	30.00
2467	12	6	15.31	13.50	15.36	13.50	18.35	30.00
		9	15.29		15.34		18.33	30.00
		12	15.30		15.34		18.33	30.00
		18	15.26		15.16		18.22	30.00
		24	15.20		15.13		18.17	30.00
		36	15.16		15.12		18.15	30.00
		48	13.06		13.19		16.14	30.00
		54	13.05		13.05		16.06	30.00
2472	13	6	13.09	11.50	13.31	11.50	16.21	30.00
		9	13.05		13.09		16.08	30.00
		12	13.04		13.25		16.16	30.00
		18	13.10		12.93		16.03	30.00
		24	12.98		13.18		16.09	30.00
		36	13.11		13.17		16.15	30.00
		48	10.88		10.87		13.89	30.00
		54	10.92		10.92		13.93	30.00

802.11n(HT20) Mode		MCS Index	SISO Measured Power (dBm)				MIMO (CDD) (dBm)	Limit (dBm)
Frequency [MHz]	Channel No.		Ant 1	Power Level Setting	Ant 2	Power Level Setting	Ant 1 + Ant 2	
2412	1	0	13.94	12.50	13.42	12.50	16.70	30.00
		1	13.91		13.66		16.80	30.00
		2	13.95		13.67		16.82	30.00
		3	14.17		13.47		16.85	30.00
		4	14.22		13.77		17.01	30.00
		5	14.00		13.58		16.81	30.00
		6	12.01		11.59		14.81	30.00
		7	12.02		11.37		14.71	30.00
2437	6	0	15.53	14.00	14.45	14.00	18.03	30.00
		1	15.75		14.92		18.37	30.00
		2	15.55		14.70		18.16	30.00
		3	15.56		14.72		18.17	30.00
		4	15.62		14.67		18.18	30.00
		5	15.65		14.68		18.20	30.00
		6	13.54		12.54		16.08	30.00
		7	13.53		12.54		16.08	30.00
2462	11	0	15.58	14.00	15.27	14.00	18.44	30.00
		1	15.59		15.30		18.46	30.00
		2	15.58		15.30		18.45	30.00
		3	15.58		15.29		18.45	30.00
		4	15.51		15.29		18.41	30.00
		5	15.53		15.33		18.44	30.00
		6	13.42		13.18		16.31	30.00
		7	13.43		13.22		16.33	30.00
2467	12	0	15.00	13.50	14.74	13.50	17.88	30.00
		1	14.99		14.99		18.00	30.00
		2	15.04		15.01		18.04	30.00
		3	14.82		14.77		17.81	30.00
		4	14.89		15.03		17.97	30.00
		5	14.90		14.77		17.85	30.00
		6	12.78		12.87		15.84	30.00
		7	12.77		12.88		15.84	30.00
2472	13	0	13.78	12.00	13.44	12.00	16.62	30.00
		1	13.96		13.72		16.85	30.00
		2	13.74		13.75		16.76	30.00
		3	13.72		13.84		16.79	30.00
		4	13.73		13.74		16.74	30.00
		5	13.76		13.84		16.81	30.00
		6	11.85		11.65		14.76	30.00
		7	11.64		11.63		14.64	30.00

802.11n(HT40) Mode		MCS Index	SISO Measured Power (dBm)				MIMO (CDD) (dBm)	Limit (dBm)
Frequency [MHz]	Channel No.		Ant 1	Power Level Setting	Ant 2	Power Level Setting	Ant 1 + Ant 2	
2422	3	0	12.64	11.00	12.42	11.00	15.54	30.00
		1	12.67		12.44		15.56	30.00
		2	12.68		12.44		15.57	30.00
		3	12.70		12.22		15.48	30.00
		4	12.72		12.29		15.52	30.00
		5	12.76		12.32		15.56	30.00
		6	10.50		10.03		13.28	30.00
		7	10.50		10.28		13.40	30.00
2437	6	0	19.84	18.00	18.72	18.00	22.32	30.00
		1	20.02		19.05		22.57	30.00
		2	19.99		18.89		22.48	30.00
		3	19.82		18.72		22.31	30.00
		4	19.84		18.87		22.39	30.00
		5	19.83		18.69		22.31	30.00
		6	17.92		16.86		20.43	30.00
		7	17.94		16.76		20.40	30.00
2452	9	0	15.85	14.00	15.03	14.00	18.47	30.00
		1	15.87		15.06		18.50	30.00
		2	15.88		15.05		18.50	30.00
		3	15.87		14.85		18.40	30.00
		4	15.78		15.01		18.42	30.00
		5	15.81		14.81		18.35	30.00
		6	13.74		12.91		16.35	30.00
		7	13.77		12.91		16.37	30.00

9.3 POWER SPECTRAL DENSITY

Mode	Frequency (MHz)	Channel No.	Measured PSD (dBm)			Limit
			Ant 1	Ant 2	MIMO (Ant 1 + Ant 2)	
802.11b	2412	1	-8.899	-9.684	-6.198	8.00
	2437	6	-8.010	-8.566	-5.229	
	2462	11	-6.626	-6.025	-3.279	
	2467	12	-7.706	-6.831	-4.202	
	2472	13	-7.309	-7.211	-4.202	
802.11g	2412	1	-9.958	-9.622	-6.778	
	2437	6	-9.629	-9.760	-6.576	
	2462	11	-10.307	-10.076	-7.212	
	2467	12	-9.360	-8.815	-6.021	
	2472	13	-11.180	-10.706	-7.959	
802.11n(HT20)	2412	1	-10.128	-11.021	-7.447	
	2437	6	-9.034	-10.660	-6.778	
	2462	11	-8.990	-9.234	-6.021	
	2467	12	-7.753	-8.027	-4.815	
	2472	13	-10.868	-10.704	-7.696	
802.11n(HT40)	2422	3	-15.820	-16.204	-13.010	
	2437	6	-7.757	-9.061	-5.376	
	2452	9	-11.439	-13.252	-9.208	


Note :

1. Spectrum reading values are not plot data.
The PSD results in plot is already including the actual values of loss for the attenuator and cable combination.
2. Spectrum offset = Attenuator loss + Cable loss
3. We apply to the offset in the 2.4 GHz range that was rounded off to the closest twentieth dB.
So, 21.03 dB is offset for 2.4 GHz Band.


[Ant1]

■ Test Plots


Power Spectral Density (802.11b-CH 11)

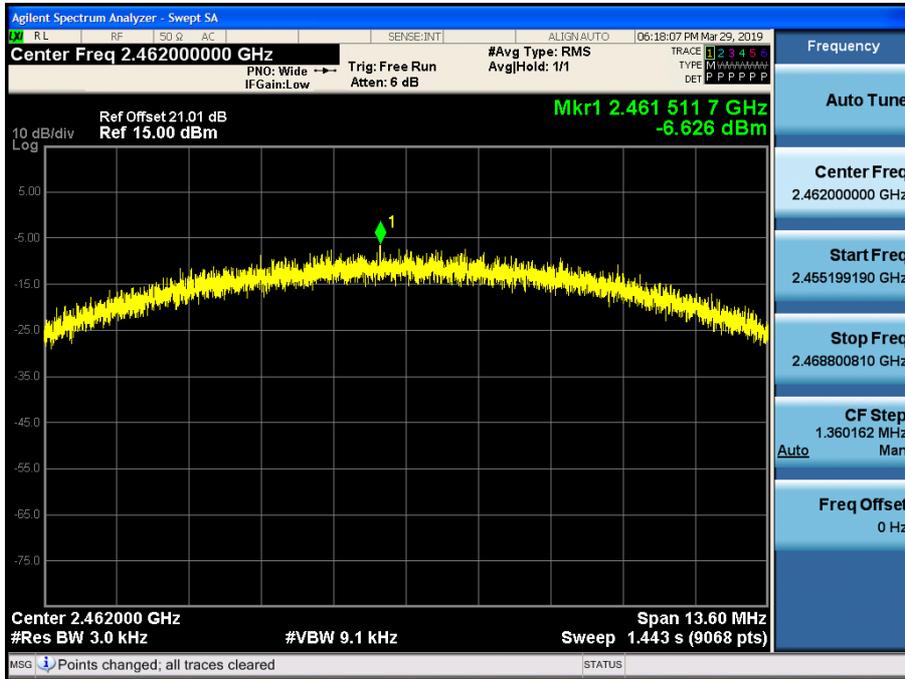


Power Spectral Density (802.11g-CH 12)

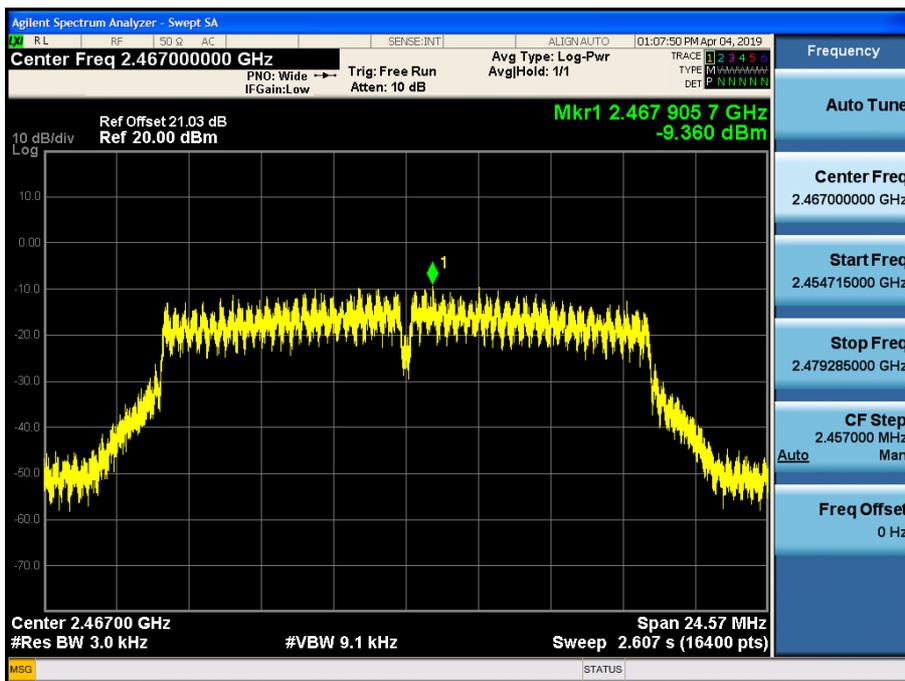

Power Spectral Density (802.11n_HT20 -CH 12)

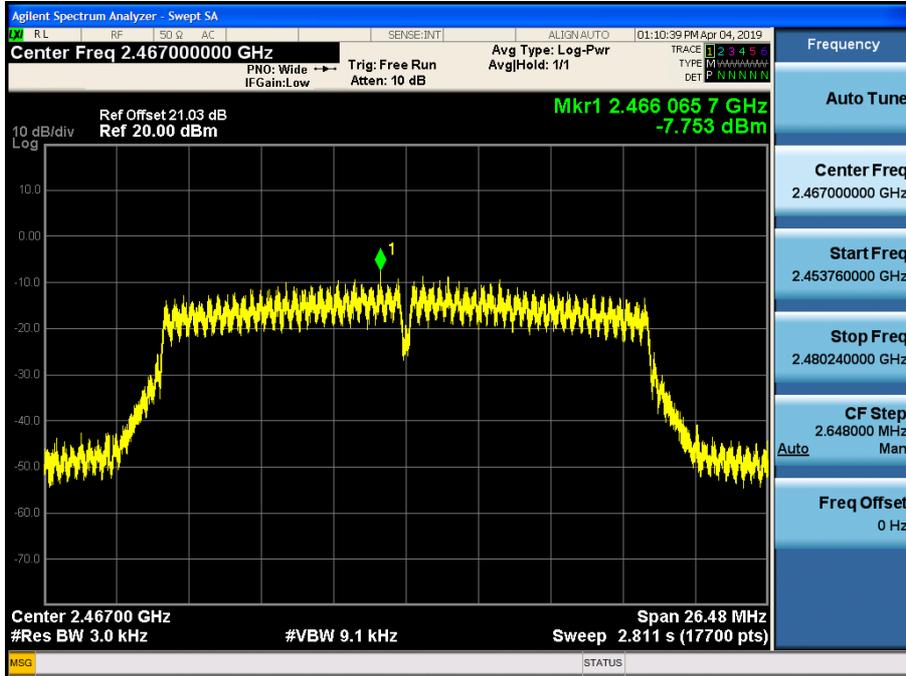

Power Spectral Density (802.11n_HT40 -CH 6)

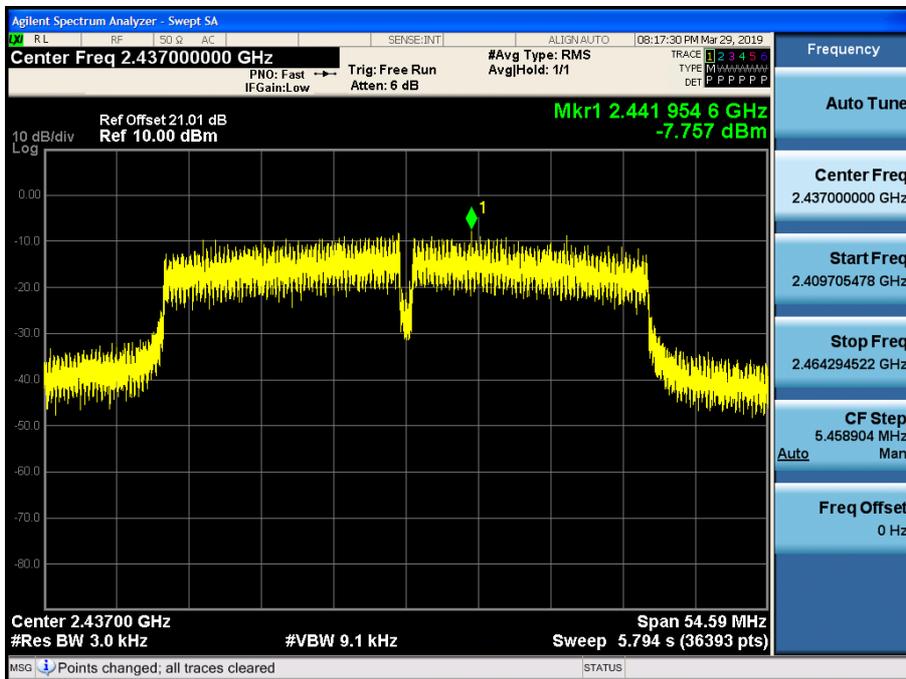


Note :

In order to simplify the report, attached plots were only the worstcase PSD channel.


[Ant2]

■ Test Plots


Power Spectral Density (802.11b-CH 11)

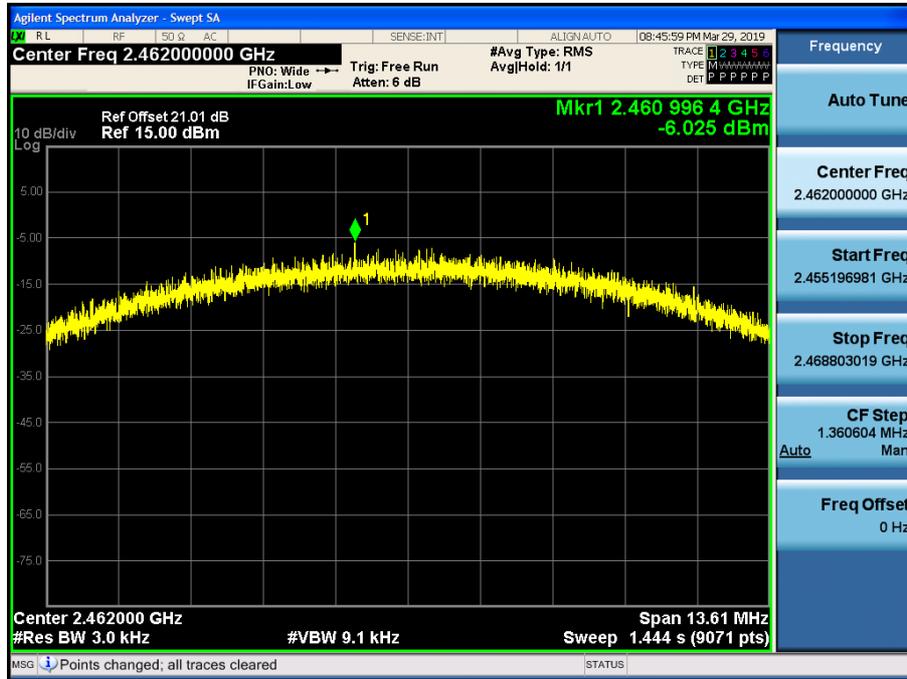


Power Spectral Density (802.11g-CH 12)

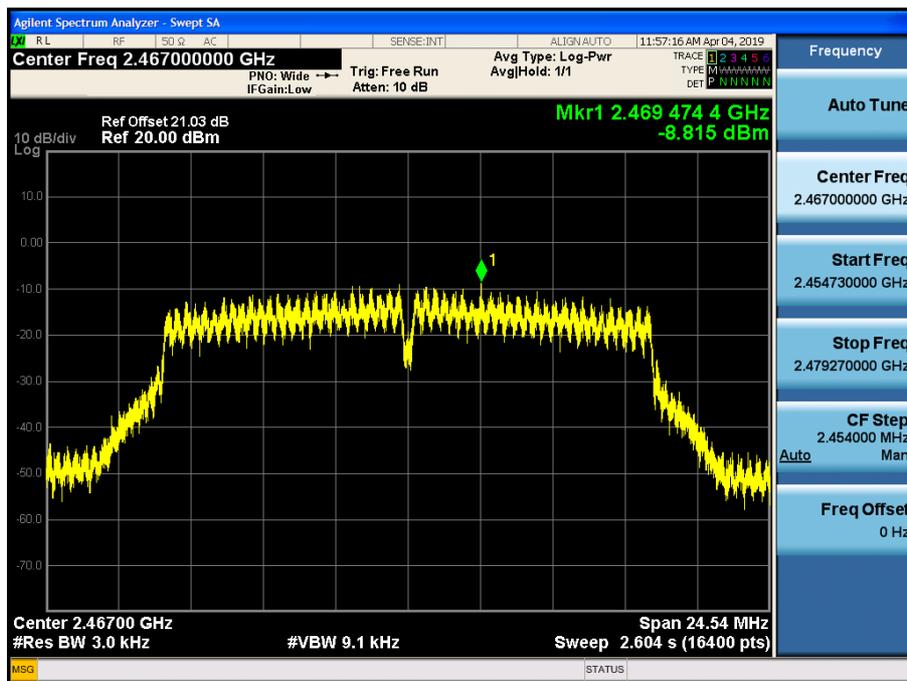

Power Spectral Density (802.11n_HT20 -CH 12)

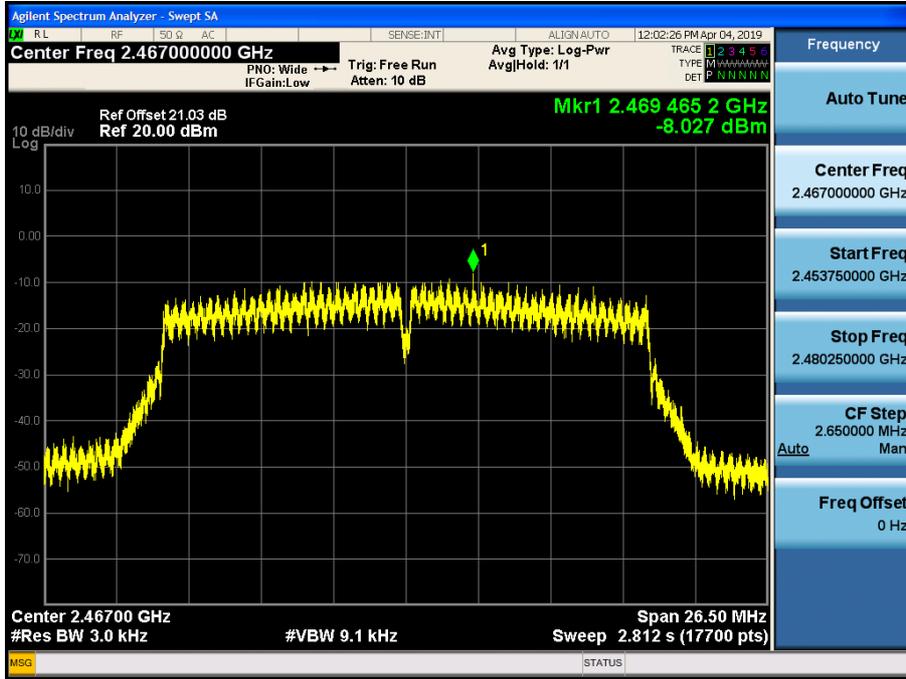

Power Spectral Density (802.11n_HT40 -CH 6)

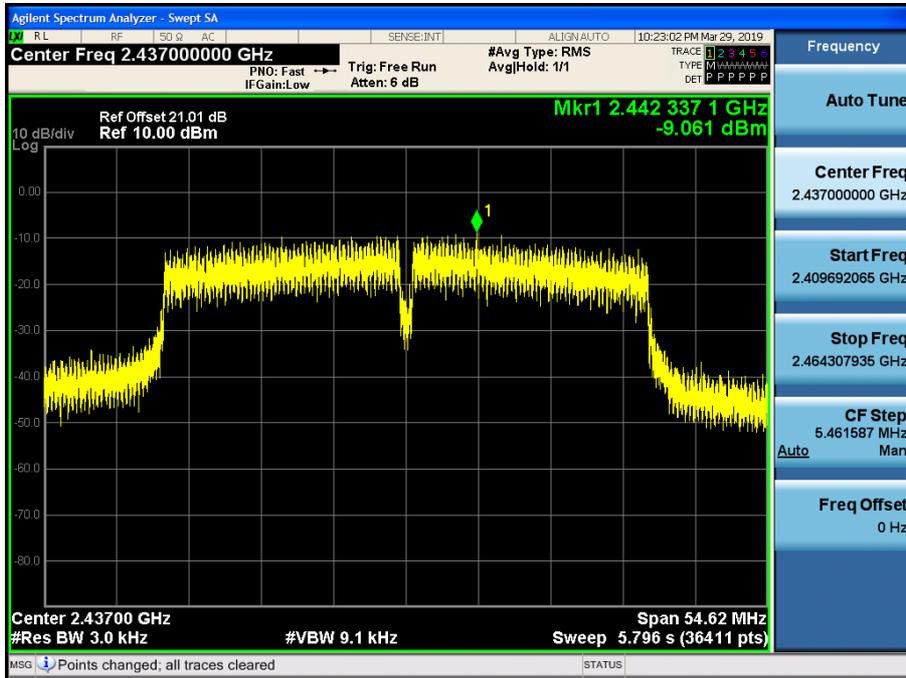

Note :

In order to simplify the report, attached plots were only the worstcase PSD channel.

9.4 BAND EDGE/ CONDUCTED SPURIOUS EMISSIONS


Test Result : please refer to the plot below.

In order to simplify the report, attached plots were only the worst case channel and data rate.


[Ant1]

■ Test Plots(BandEdge)


Band Edge (802.11b-CH1)

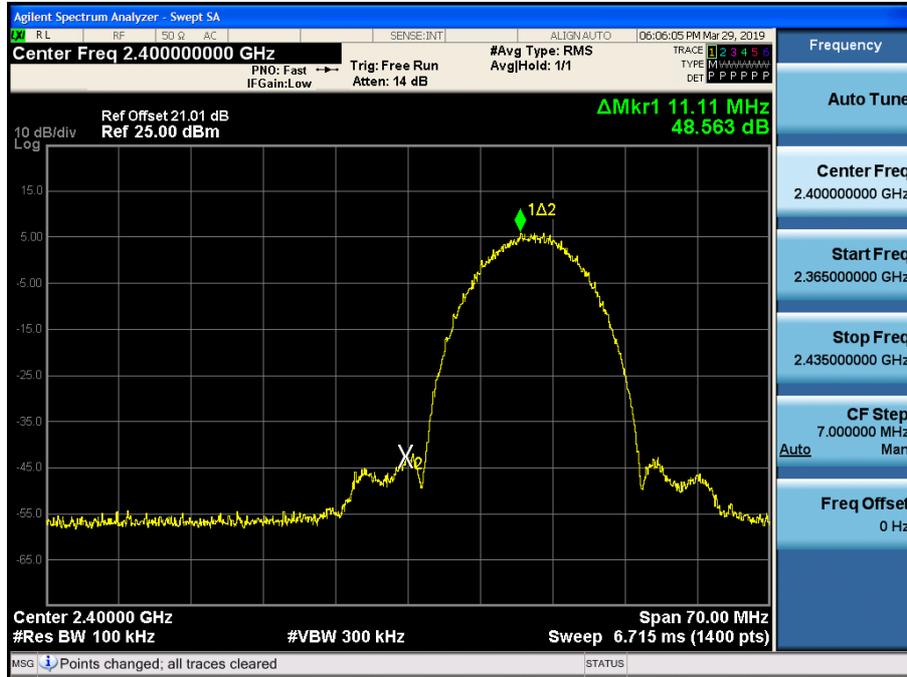


Band Edge (802.11b-CH11)

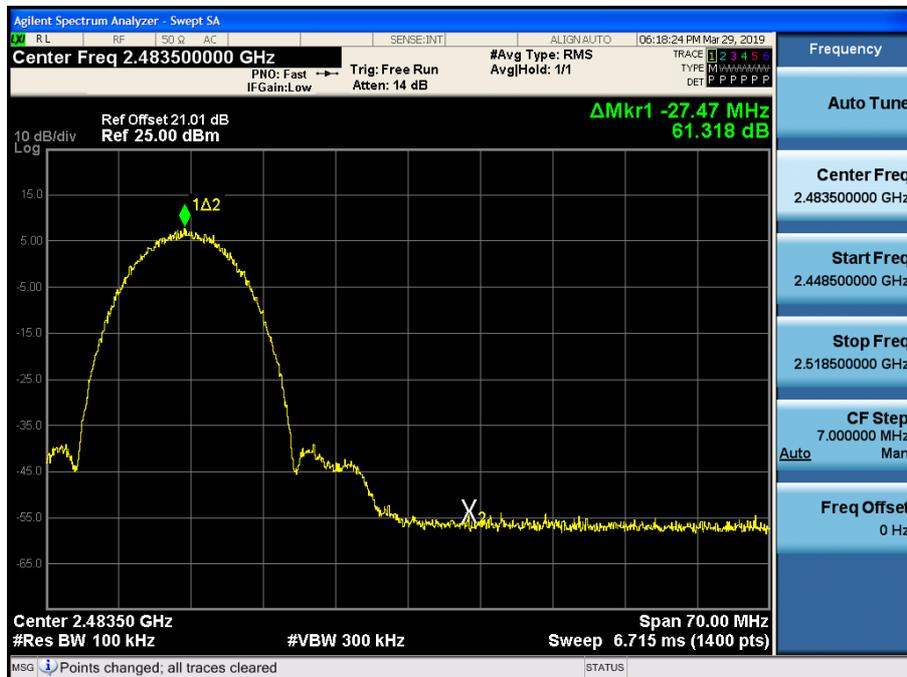


Band Edge (802.11b-CH12)

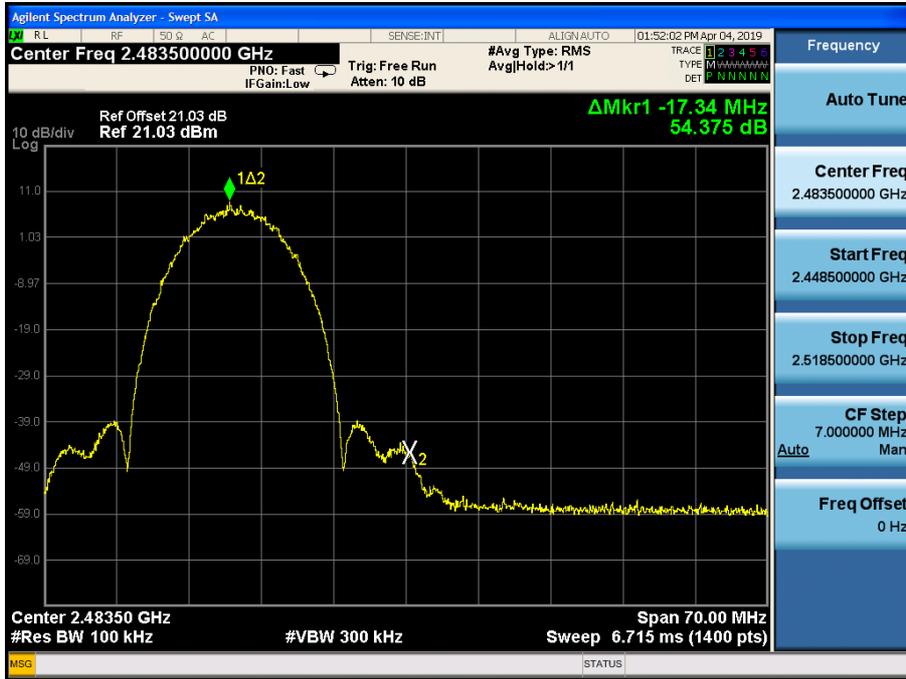


Band Edge (802.11b-CH13)

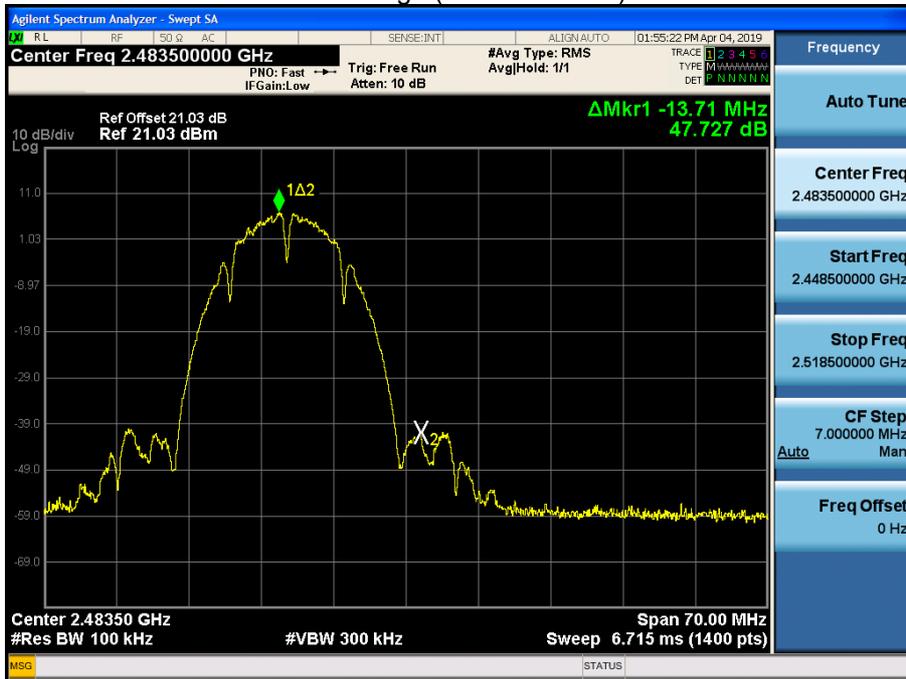


Band Edge (802.11g-CH1)

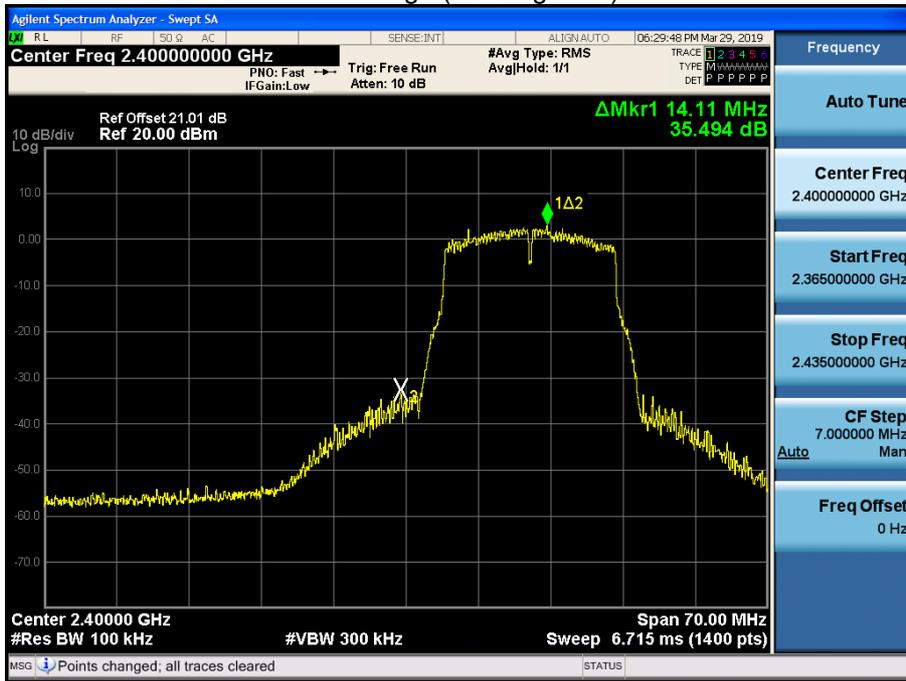


Band Edge (802.11g-CH11)

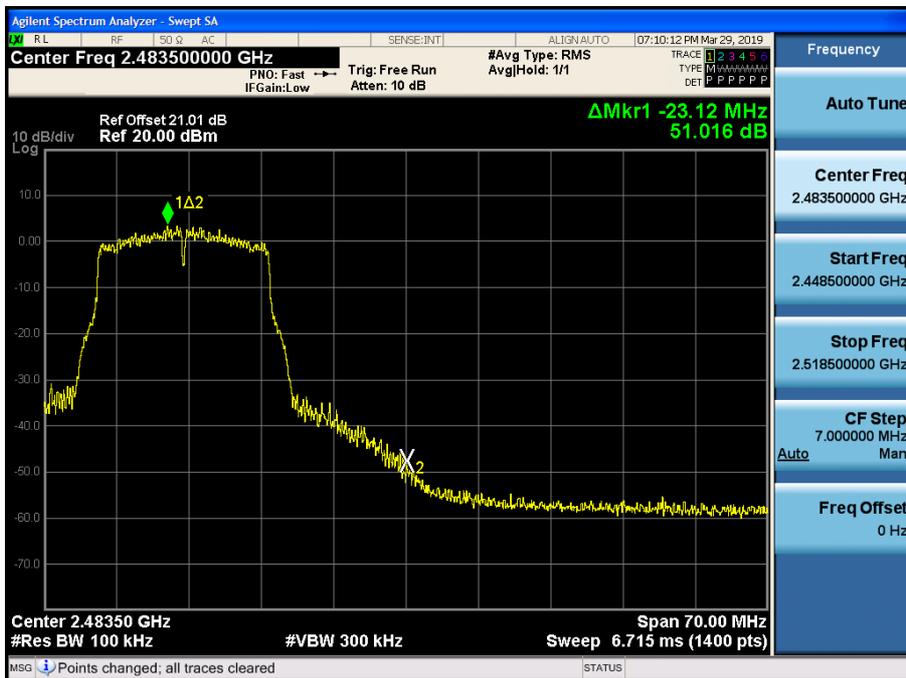


Band Edge (802.11g-CH12)

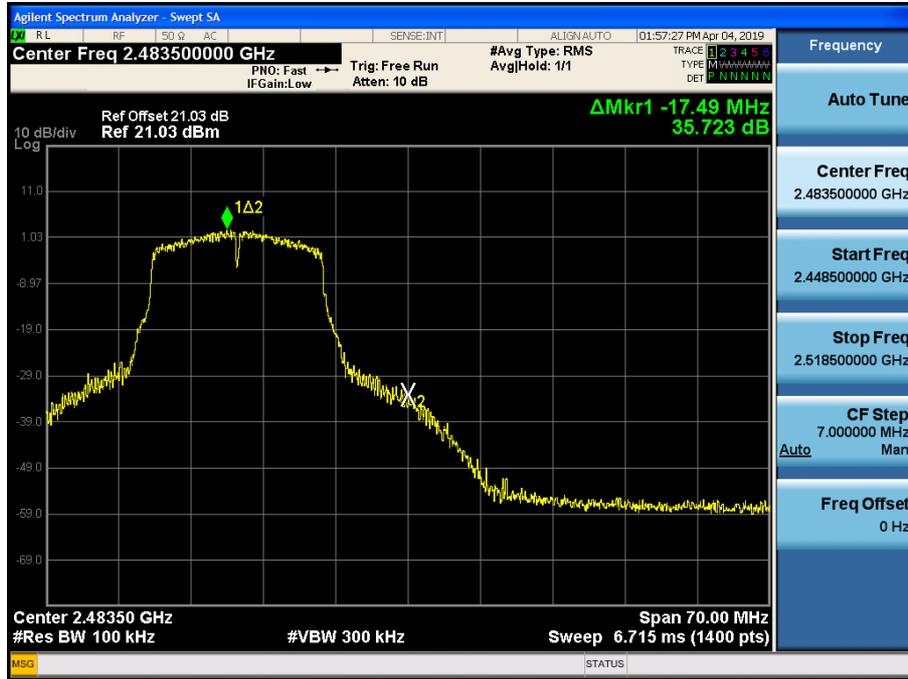


Band Edge (802.11g-CH13)

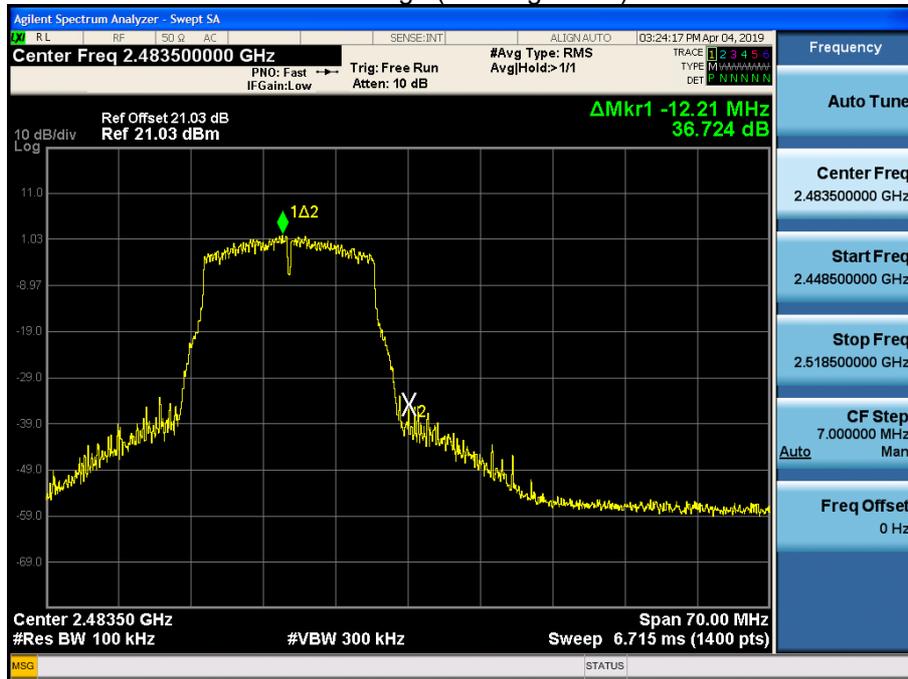


Band Edge (802.11n_HT20 -CH1)

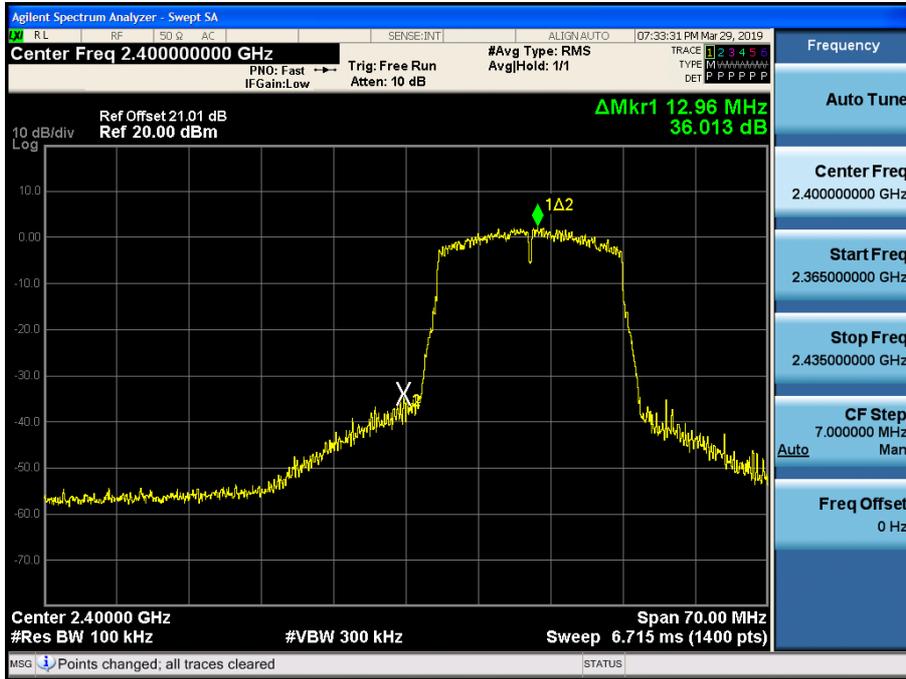


Band Edge (802.11n_HT20 -CH11)

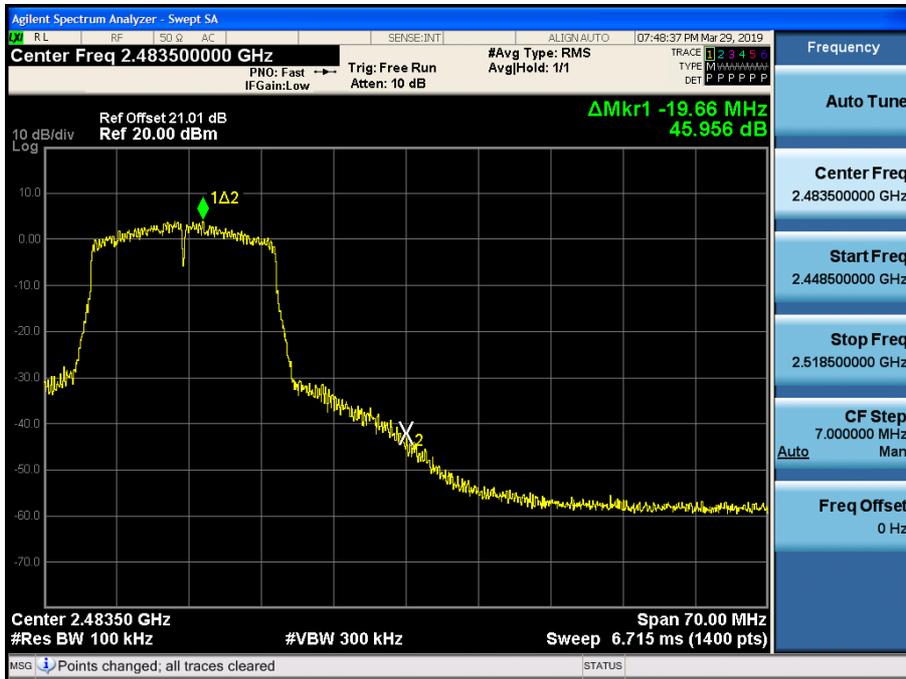


Band Edge (802.11n_HT20 -CH12)

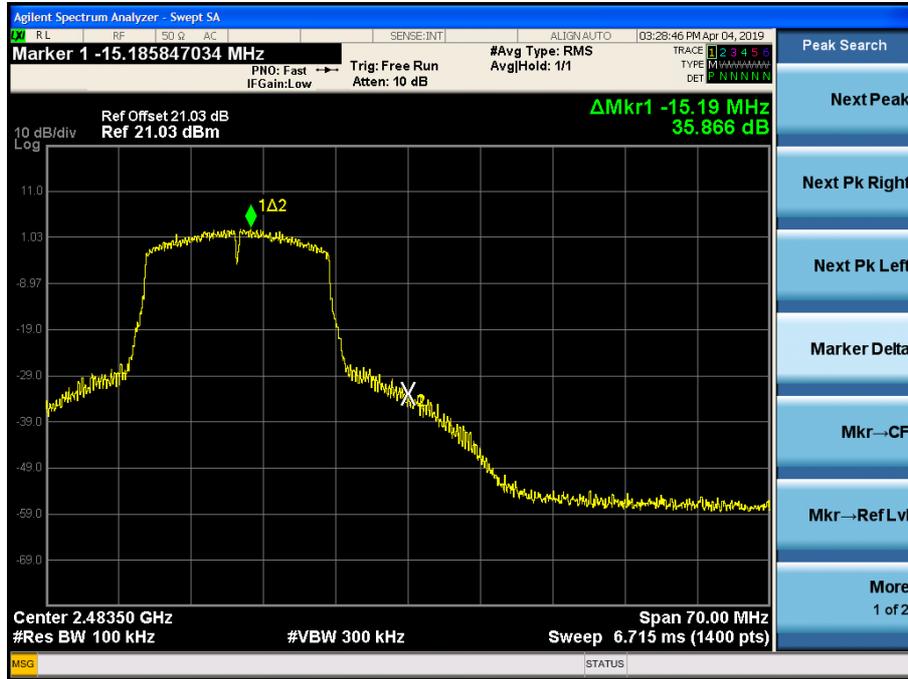


Band Edge (802.11n_HT20 -CH13)

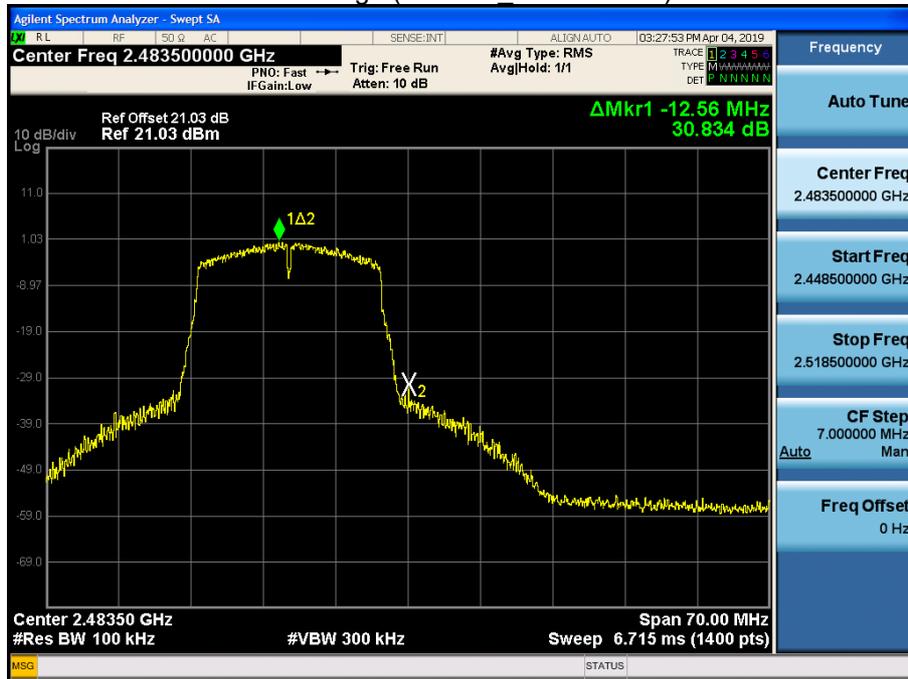

Band Edge (802.11n_HT40 -CH3)

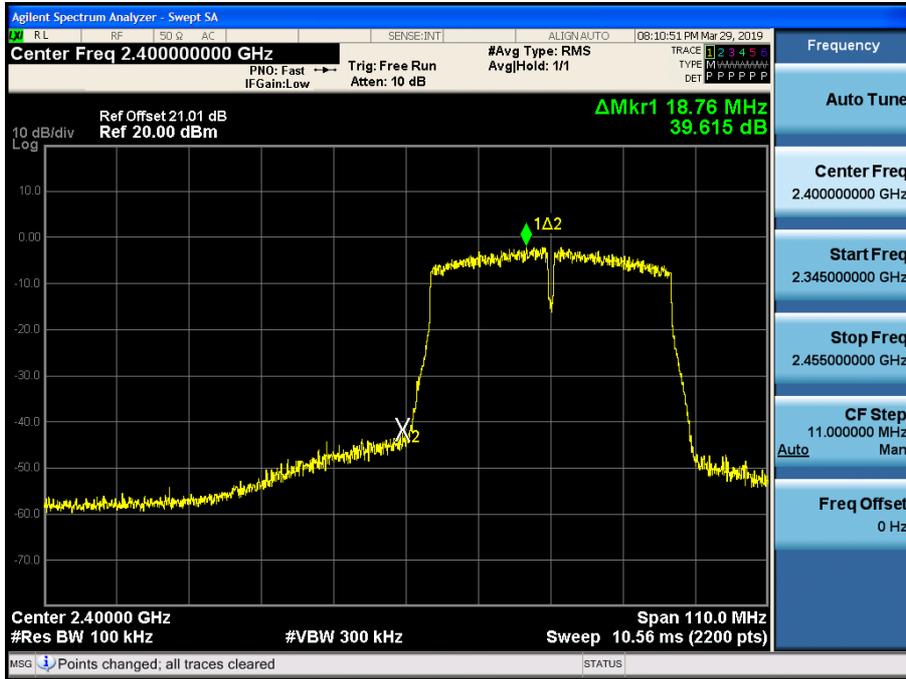


Band Edge (802.11n_HT40 -CH9)

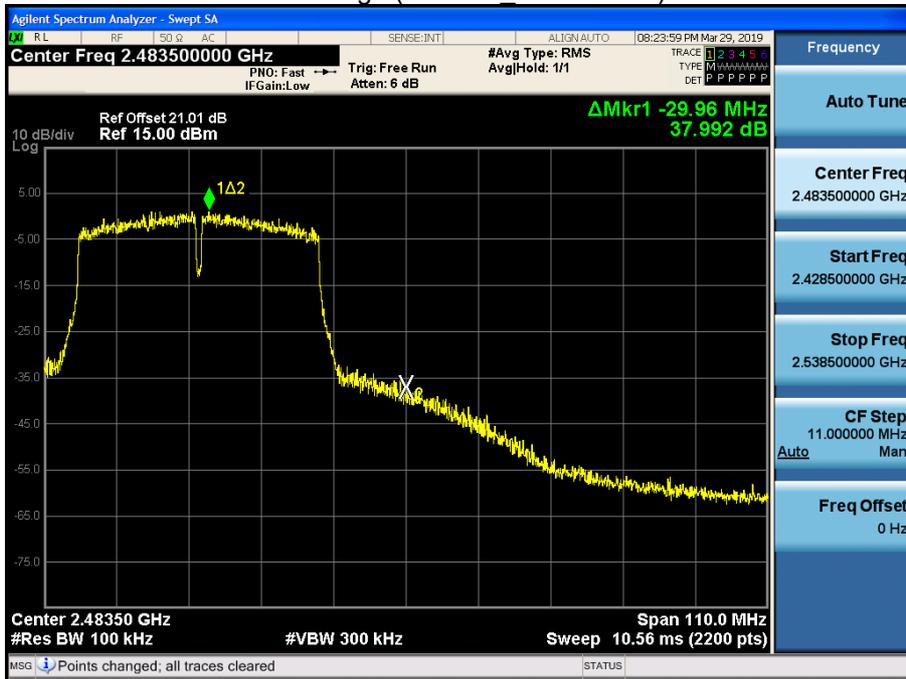

■ Test Plots(Conducted Spurious Emission)


30 MHz ~ 1 GHz

Conducted Spurious Emission (802.11n_HT40_Ch.6_MCS5)

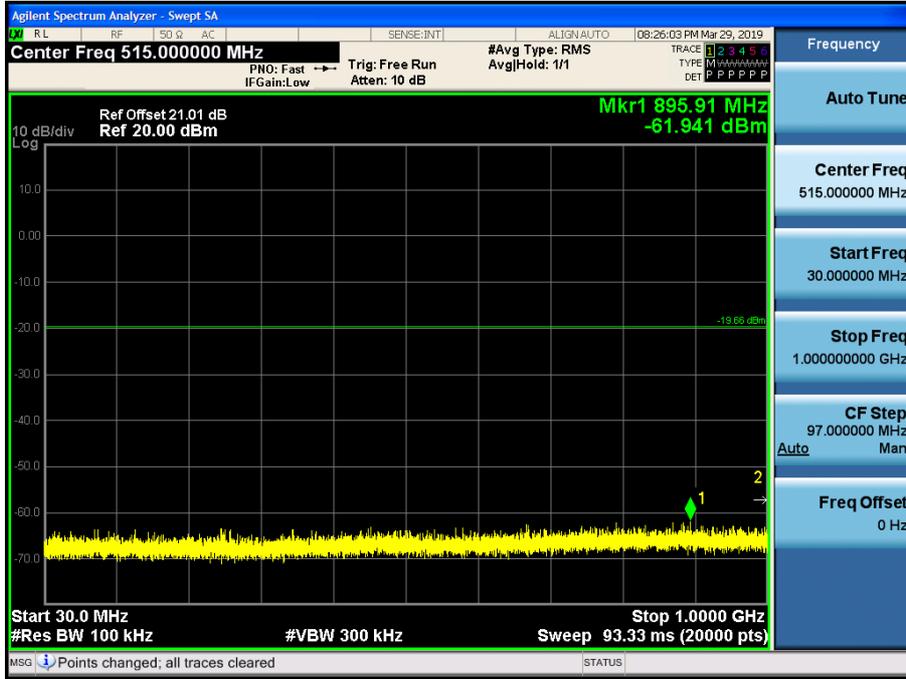


1 GHz ~ 3 GHz

Conducted Spurious Emission (802.11n_HT40_Ch.6_MCS5)

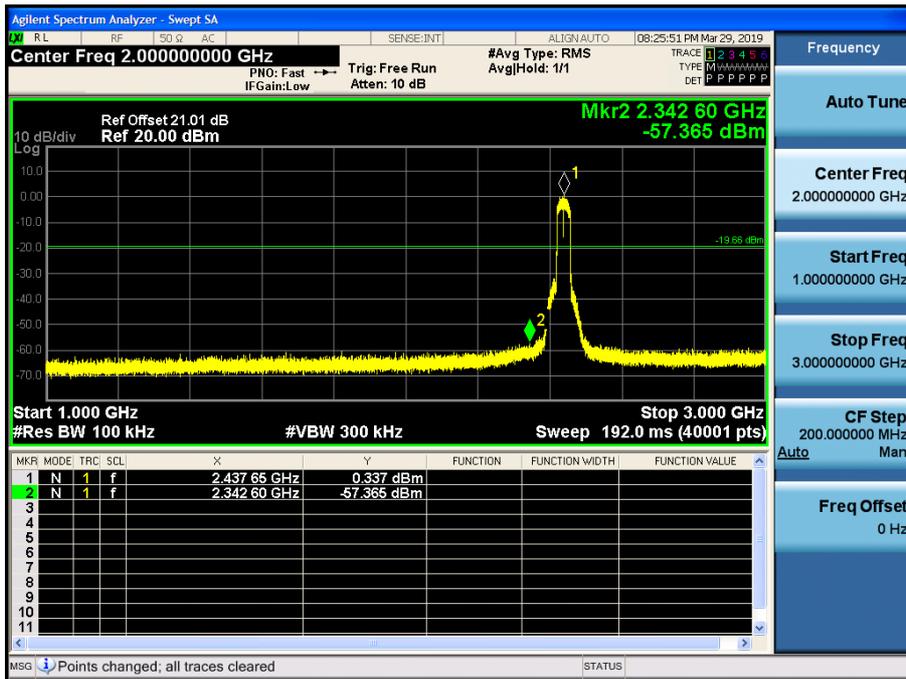


3 GHz ~ 5 GHz

Conducted Spurious Emission (802.11n_HT40_Ch.6_MCS5)

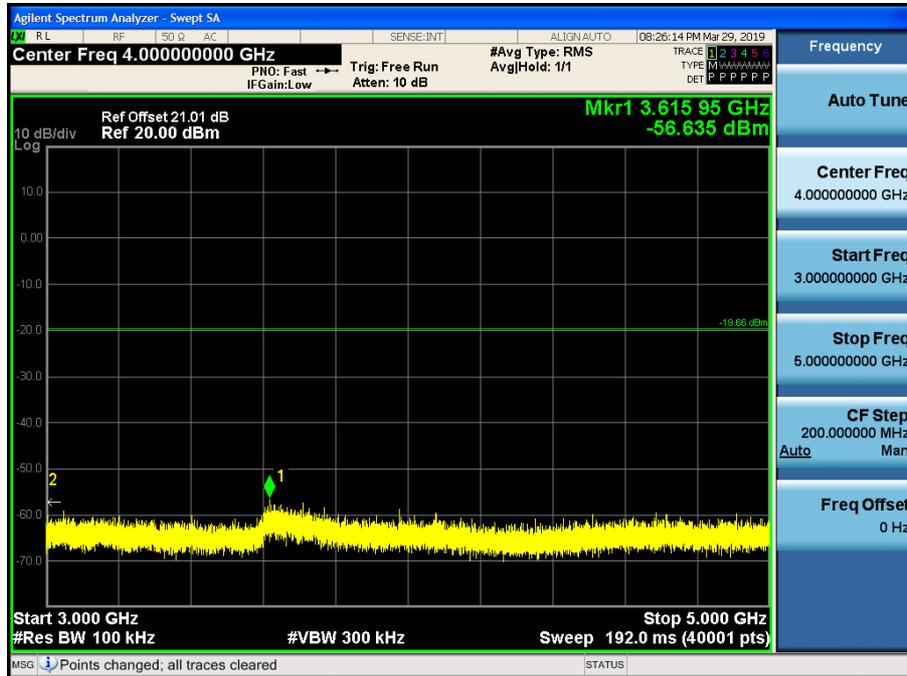


5 GHz ~ 7 GHz

Conducted Spurious Emission (802.11n_HT40_Ch.6_MCS5)

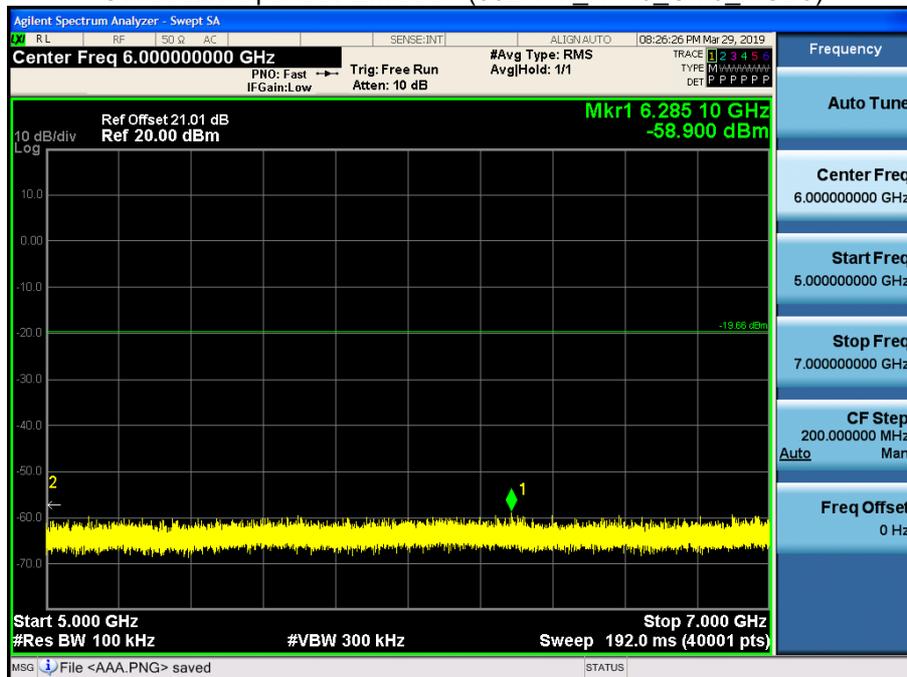


7 GHz ~ 9 GHz

Conducted Spurious Emission (802.11n_HT40_Ch.6_MCS5)

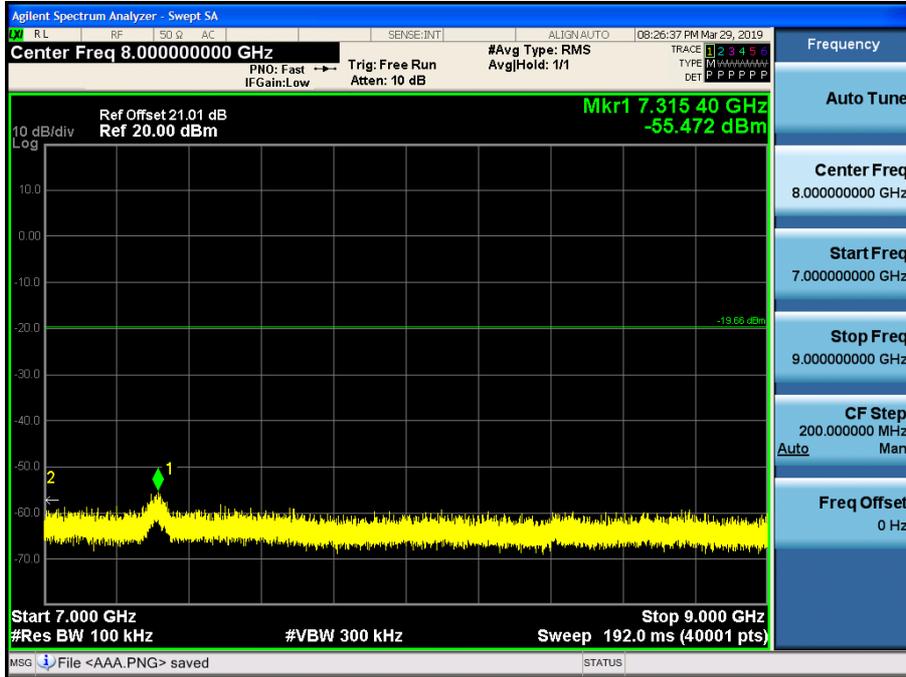


9 GHz ~ 11 GHz

Conducted Spurious Emission (802.11n_HT40_Ch.6_MCS5)

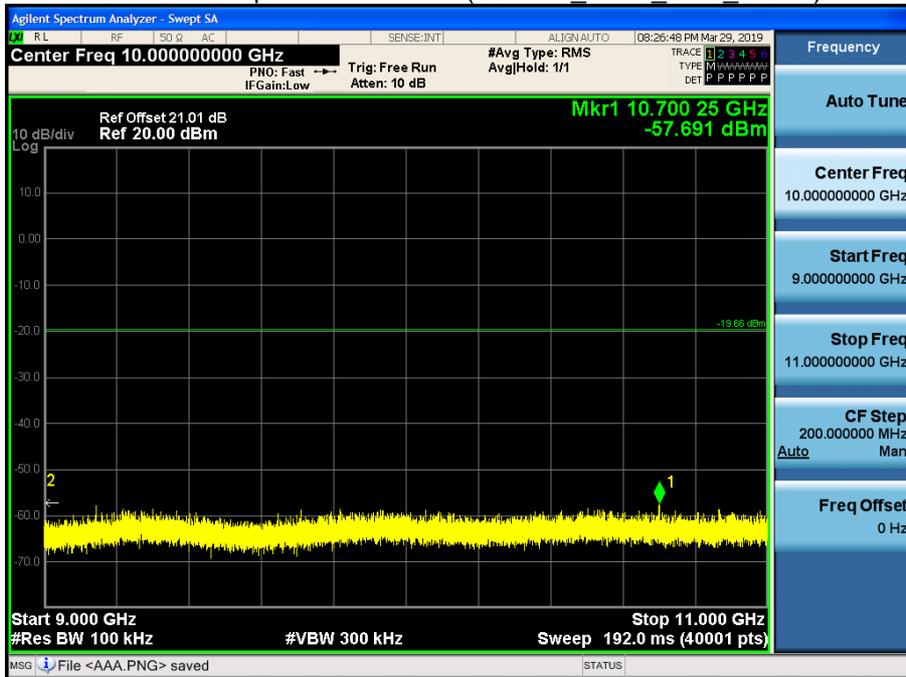


11 GHz ~ 13 GHz

Conducted Spurious Emission (802.11n_HT40_Ch.6_MCS5)

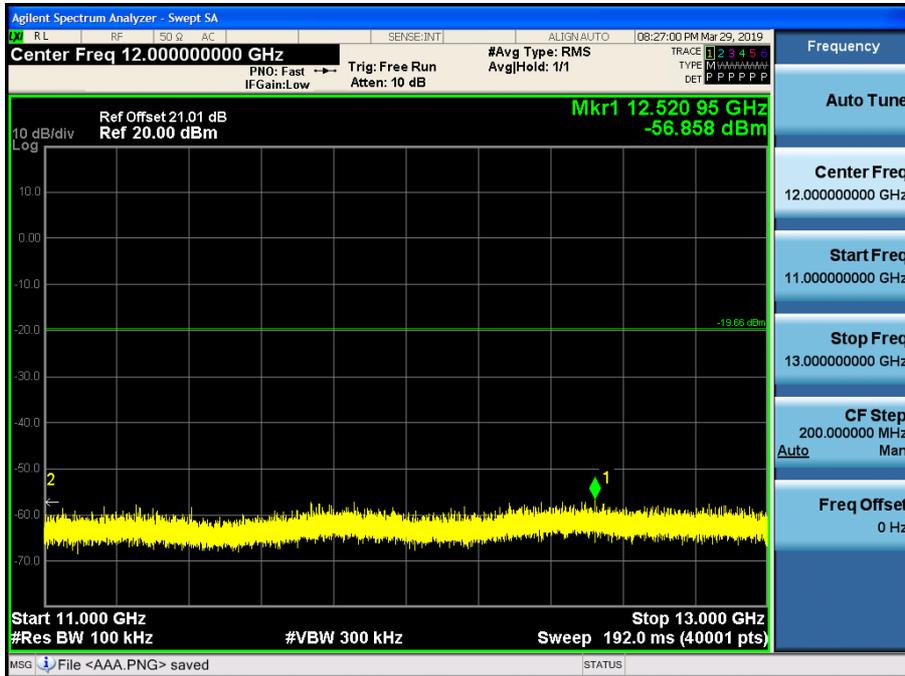


13 GHz ~ 15 GHz

Conducted Spurious Emission (802.11n_HT40_Ch.6_MCS5)

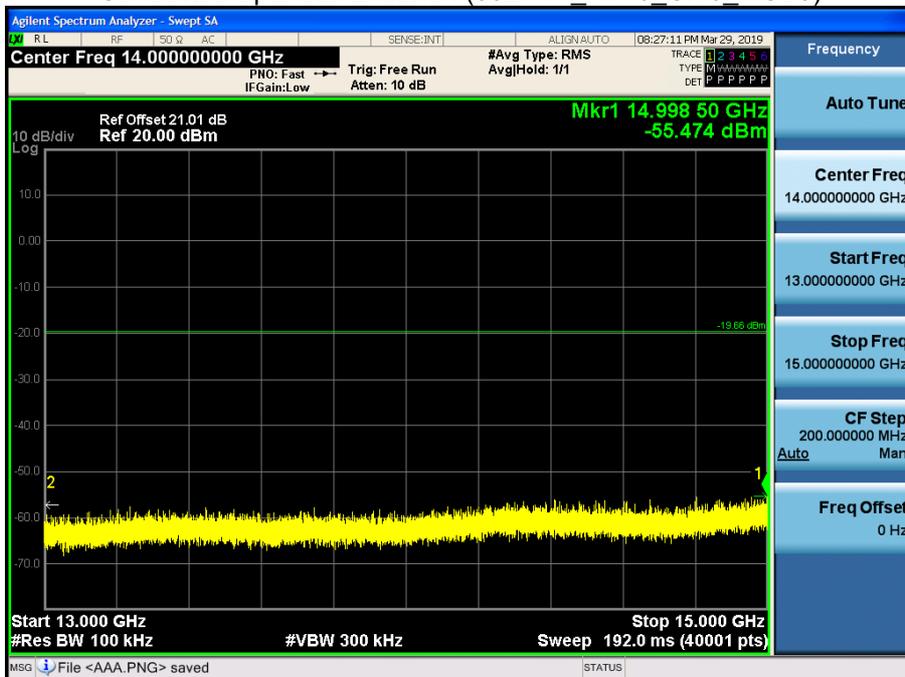


15 GHz ~ 17 GHz

Conducted Spurious Emission (802.11n HT40 Ch.6 MCS5)

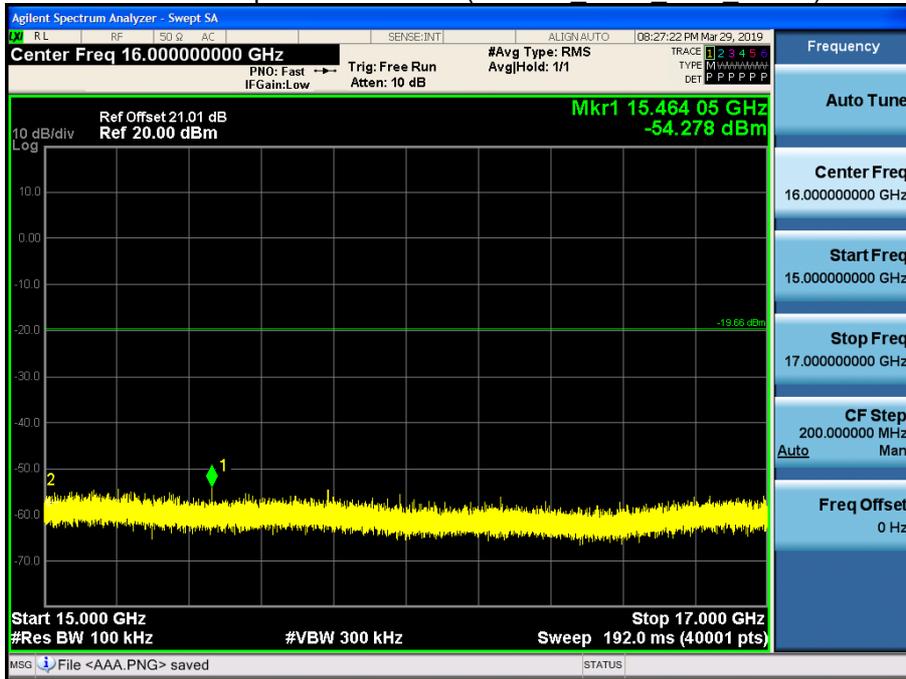


17 GHz ~ 19 GHz

Conducted Spurious Emission (802.11n HT40 Ch.6 MCS5)

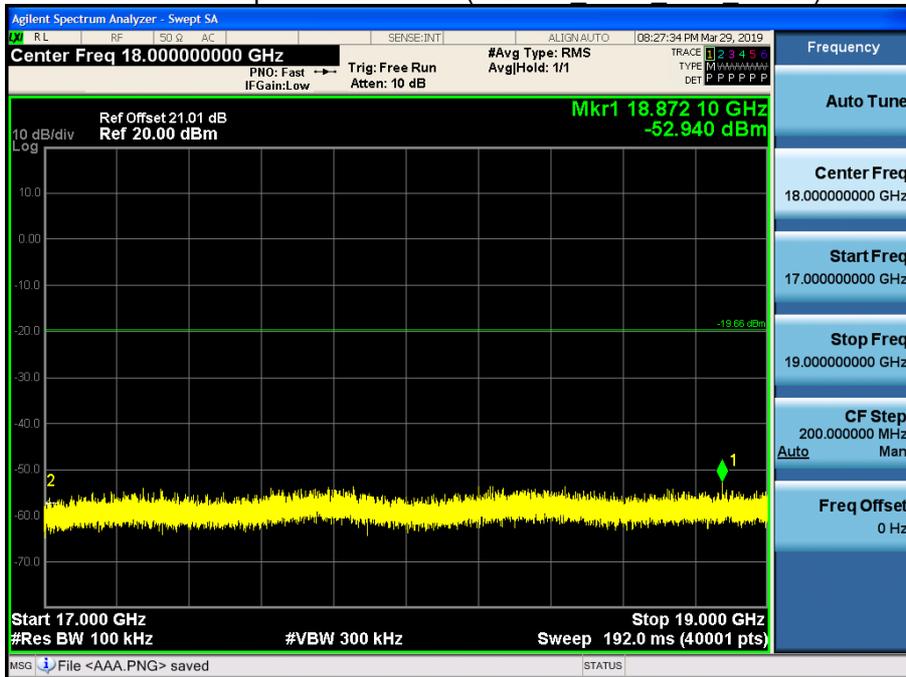


19 GHz ~ 21 GHz

Conducted Spurious Emission (802.11n HT40 Ch.6 MCS5)

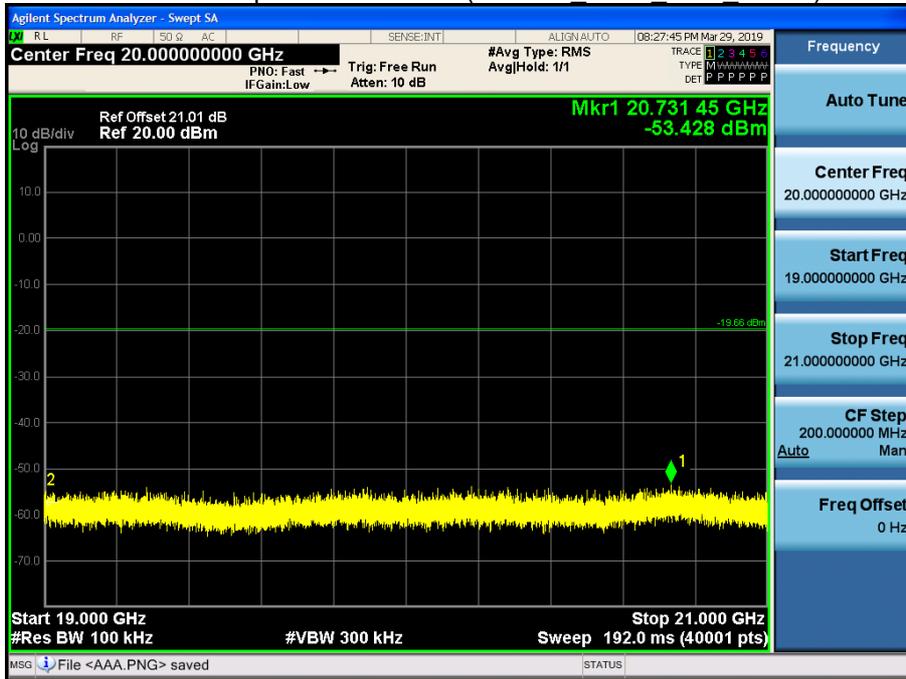


21 GHz ~ 23 GHz

Conducted Spurious Emission (802.11n_HT40_Ch.6_MCS5)

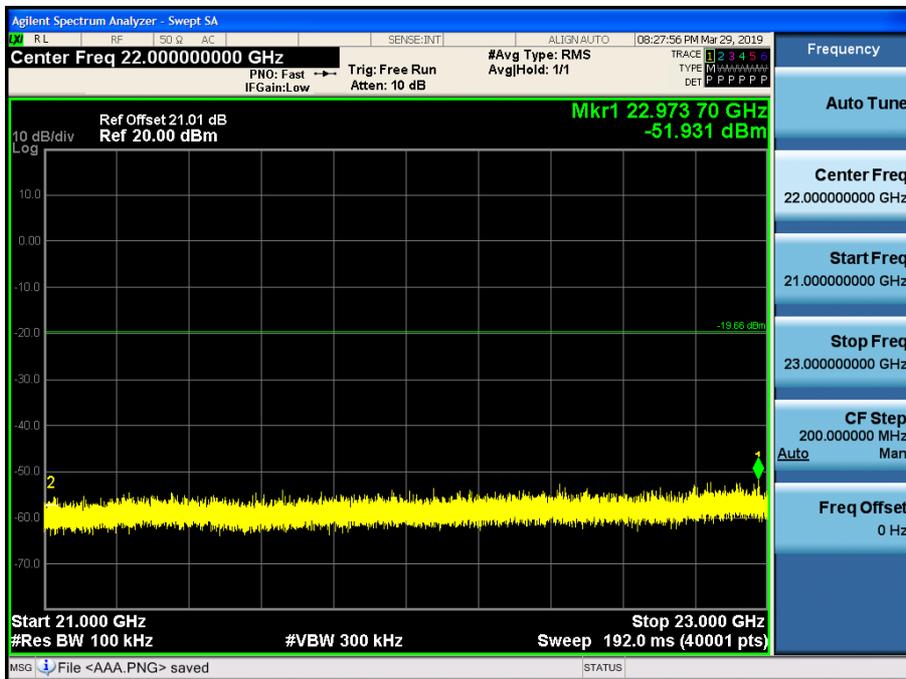

23 GHz ~ 25 GHz


Conducted Spurious Emission (802.11n_HT40_Ch.6_MCS5)

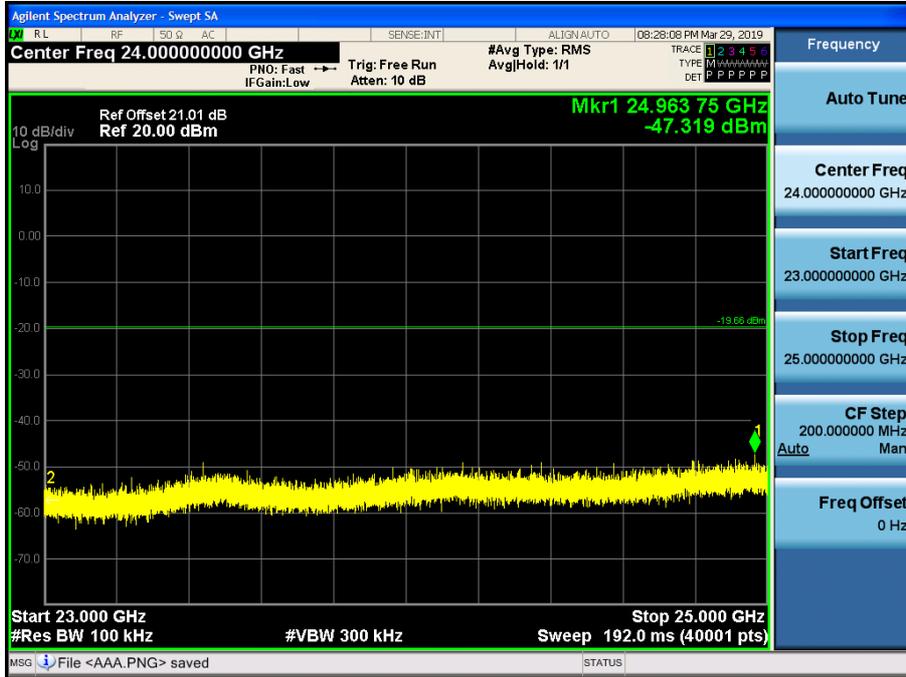

[Ant2]

■ Test Plots(BandEdge)


Band Edge (802.11b-CH1)

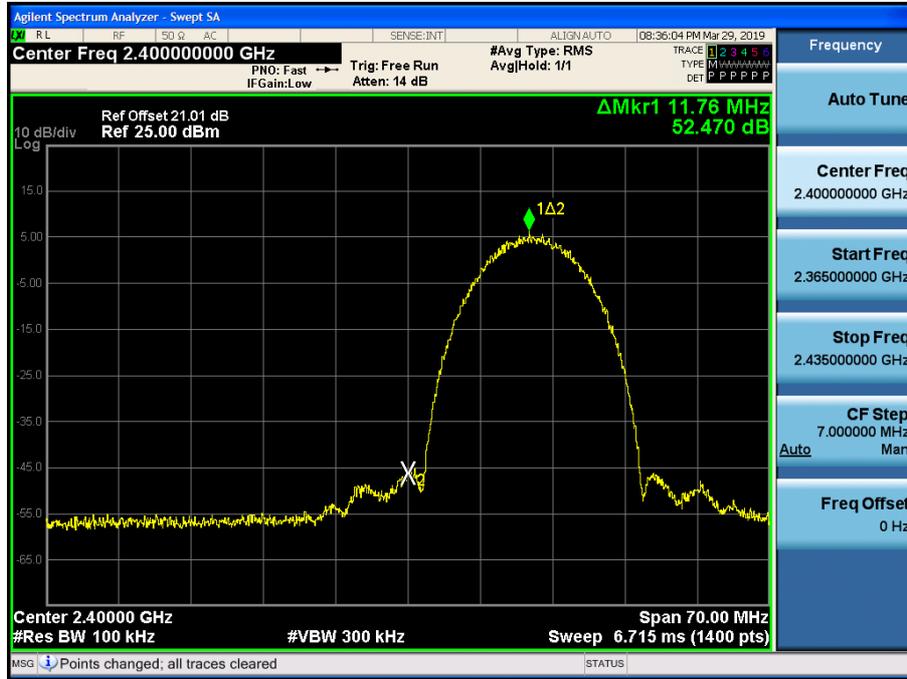


Band Edge (802.11b-CH11)




Band Edge (802.11b-CH12)

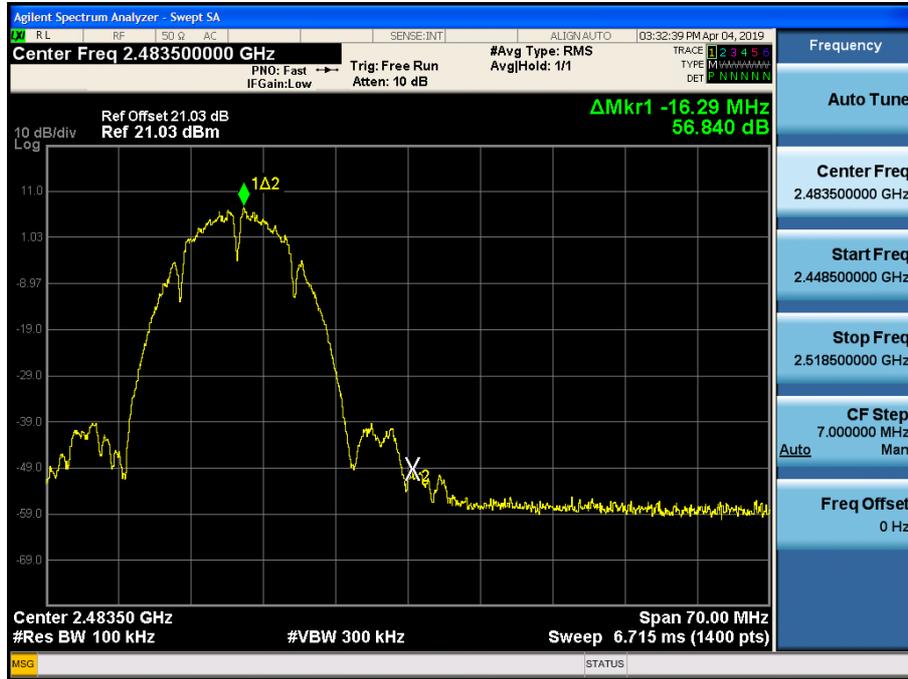

Band Edge (802.11b-CH13)

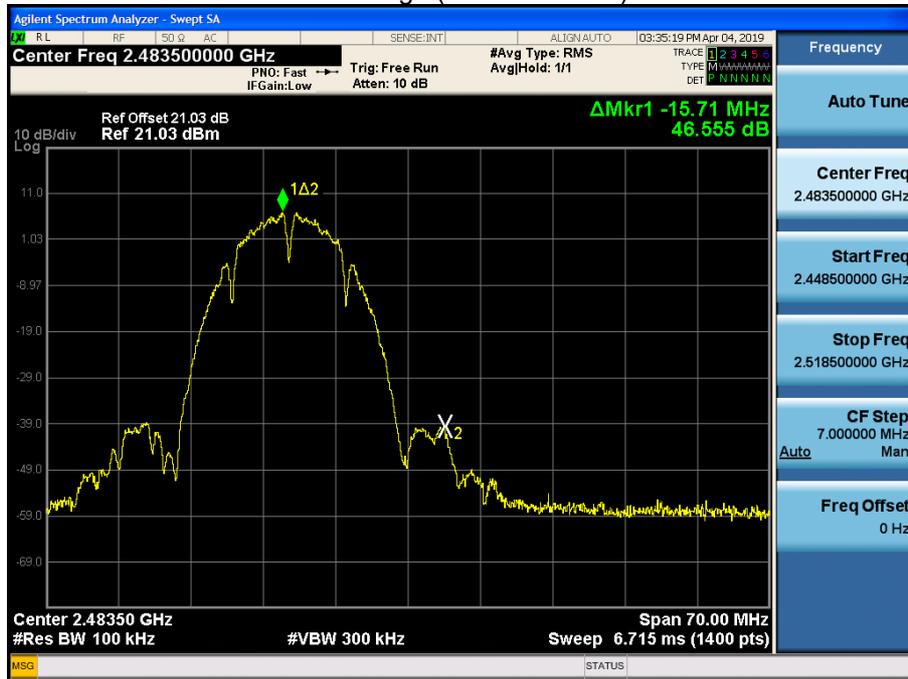


Band Edge (802.11g-CH1)

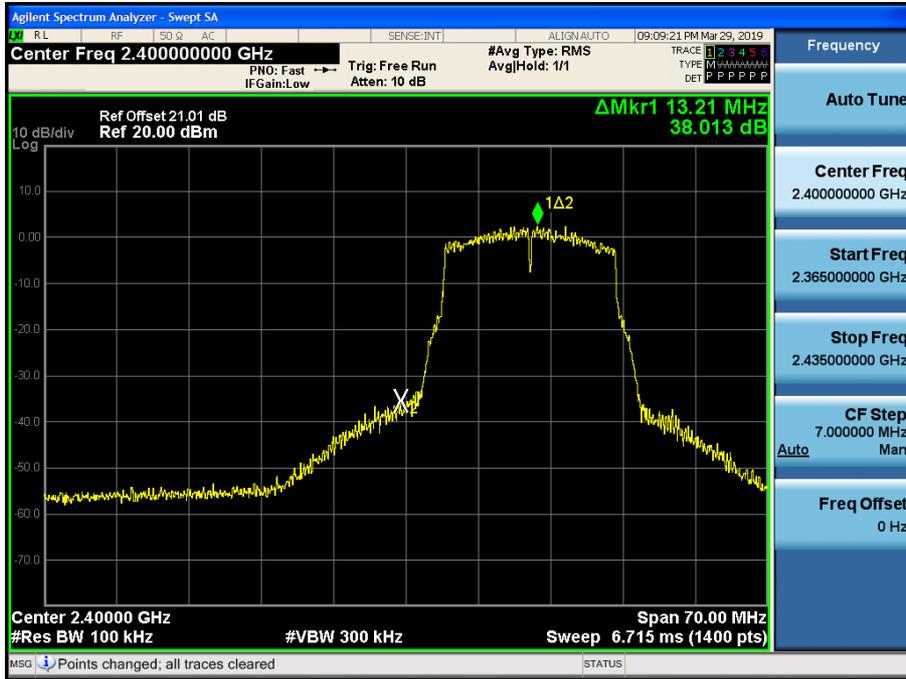


Band Edge (802.11g-CH11)




Band Edge (802.11g-CH12)

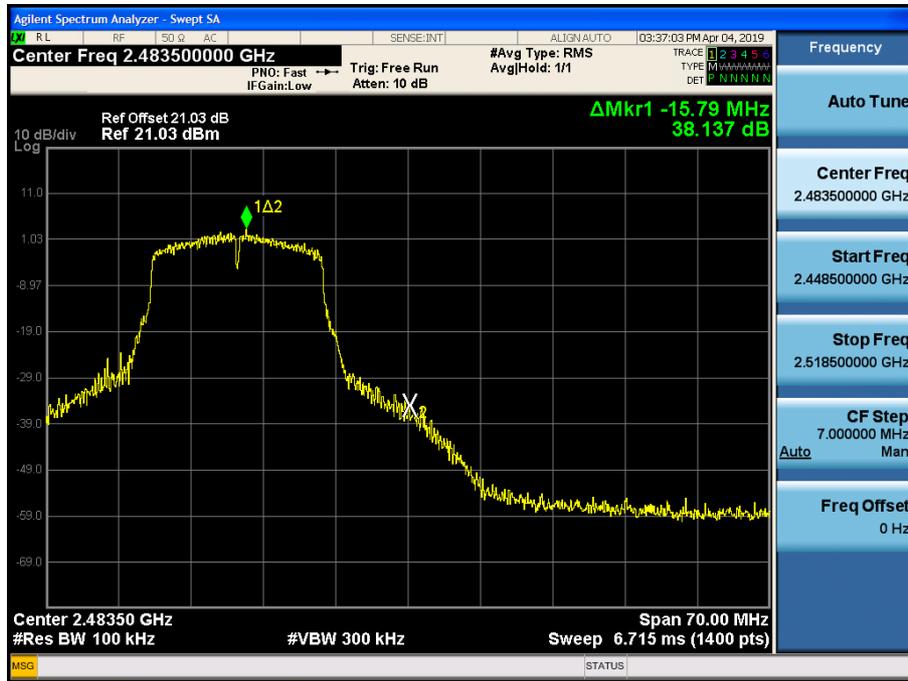


Band Edge (802.11g-CH13)

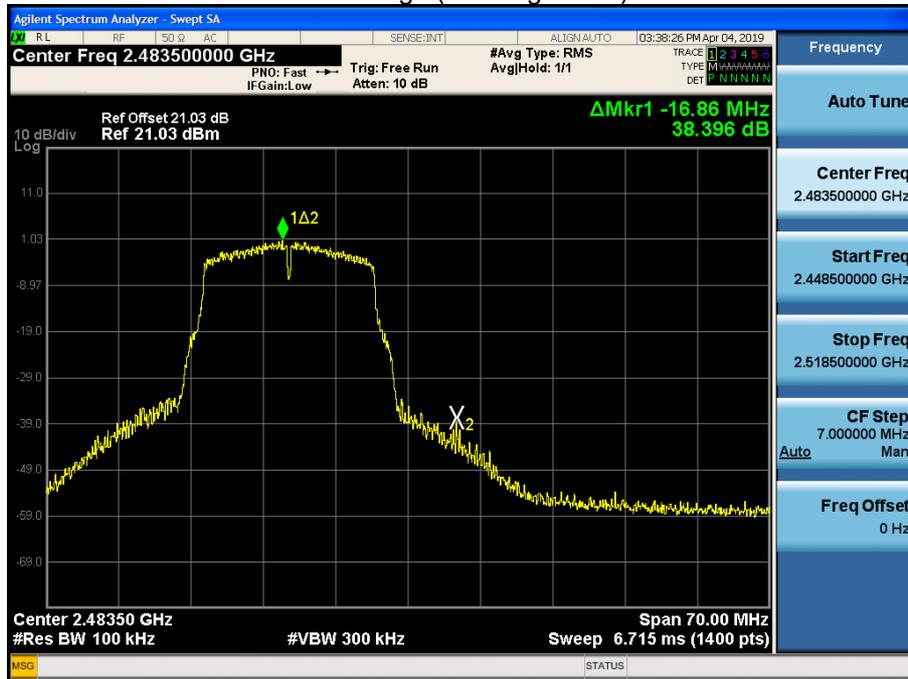


Band Edge (802.11n_HT20 -CH1)

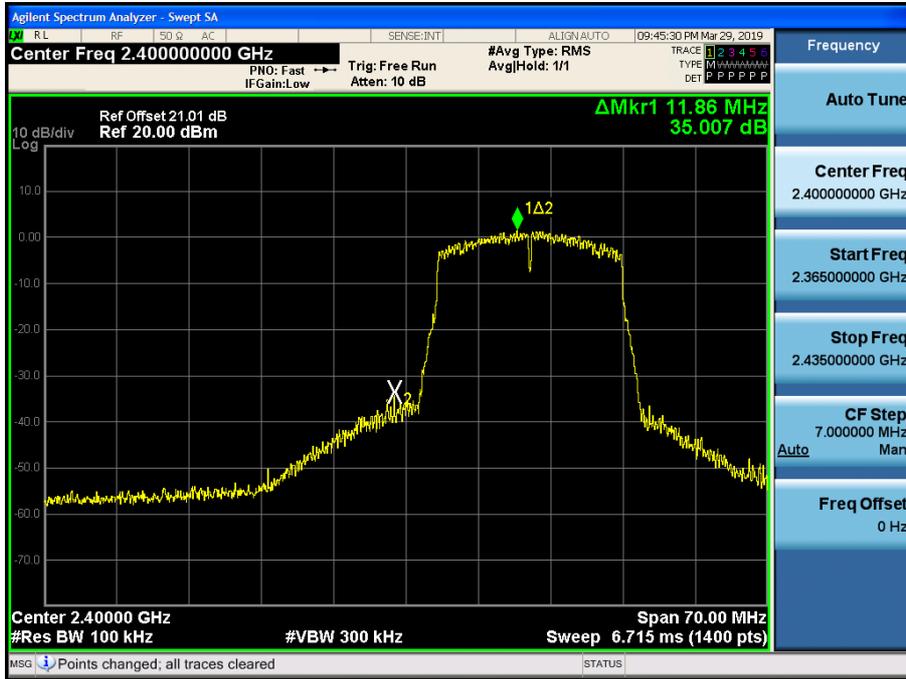


Band Edge (802.11n_HT20 -CH11)

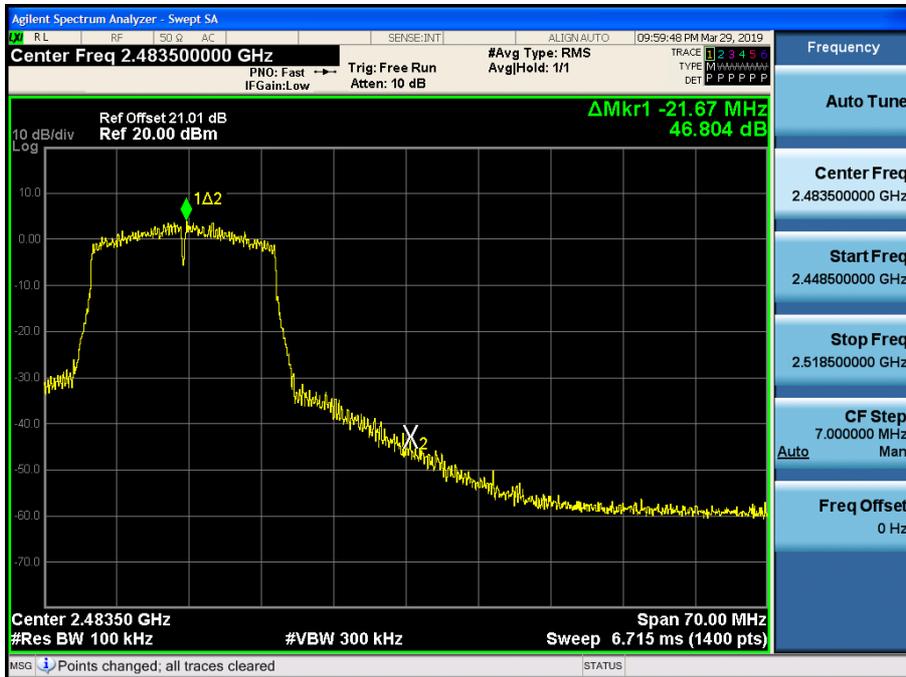


Band Edge (802.11n_HT20 -CH12)

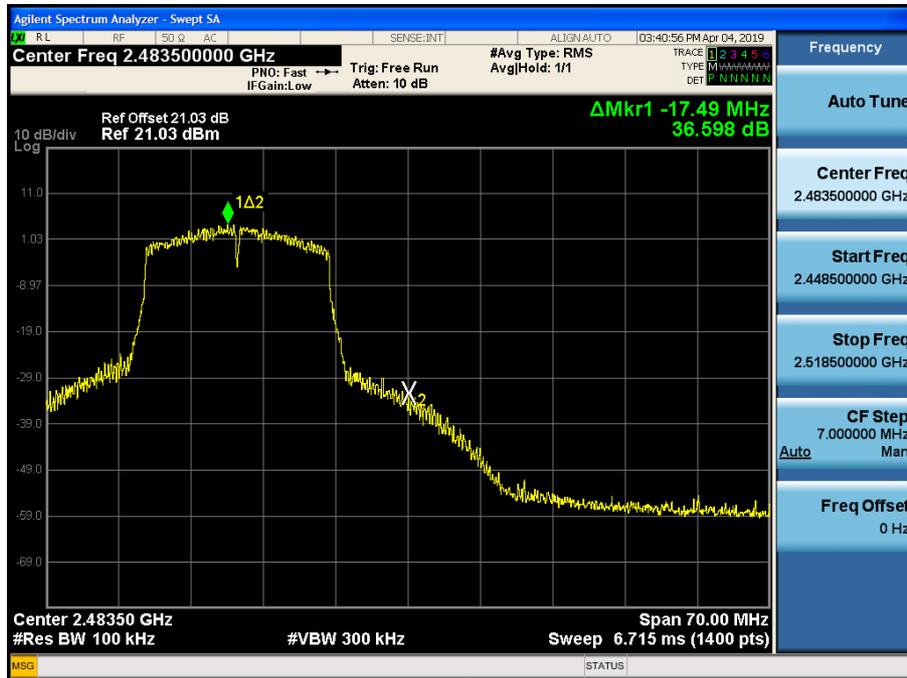


Band Edge (802.11n_HT20 -CH13)

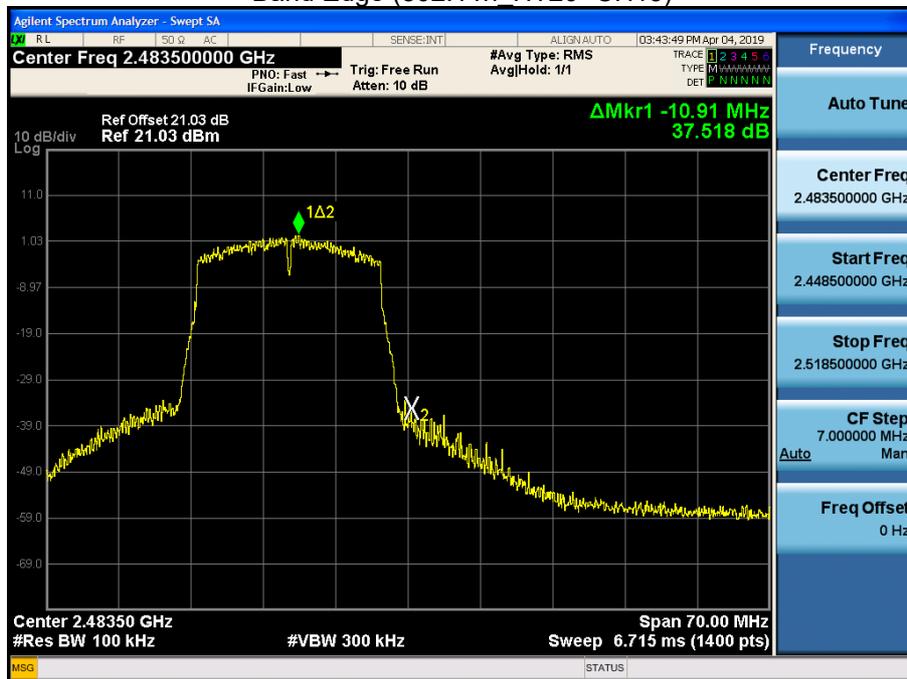

Band Edge (802.11n_HT40 -CH3)

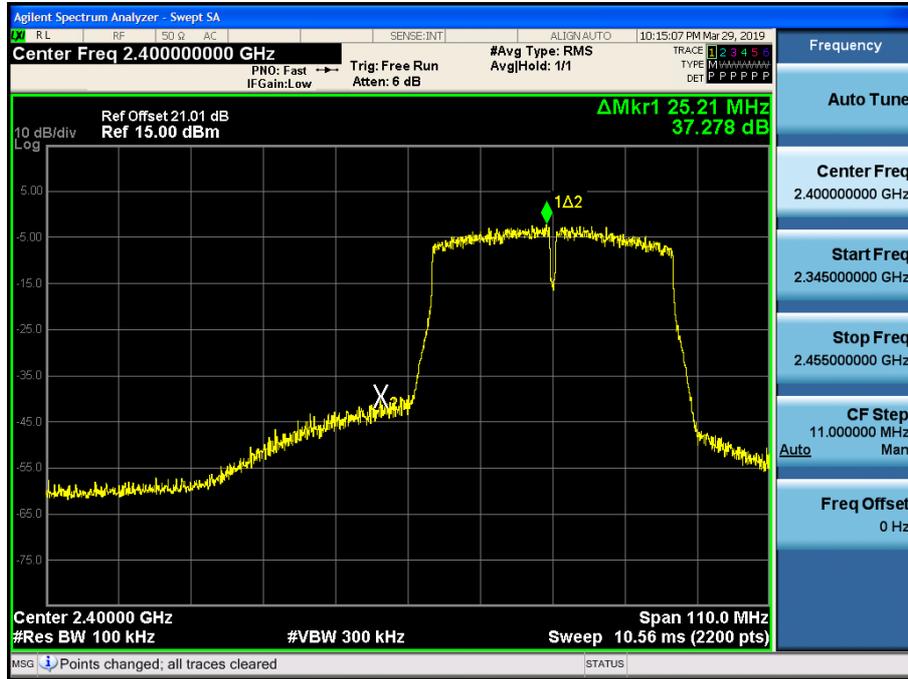


Band Edge (802.11n_HT40 -CH9)

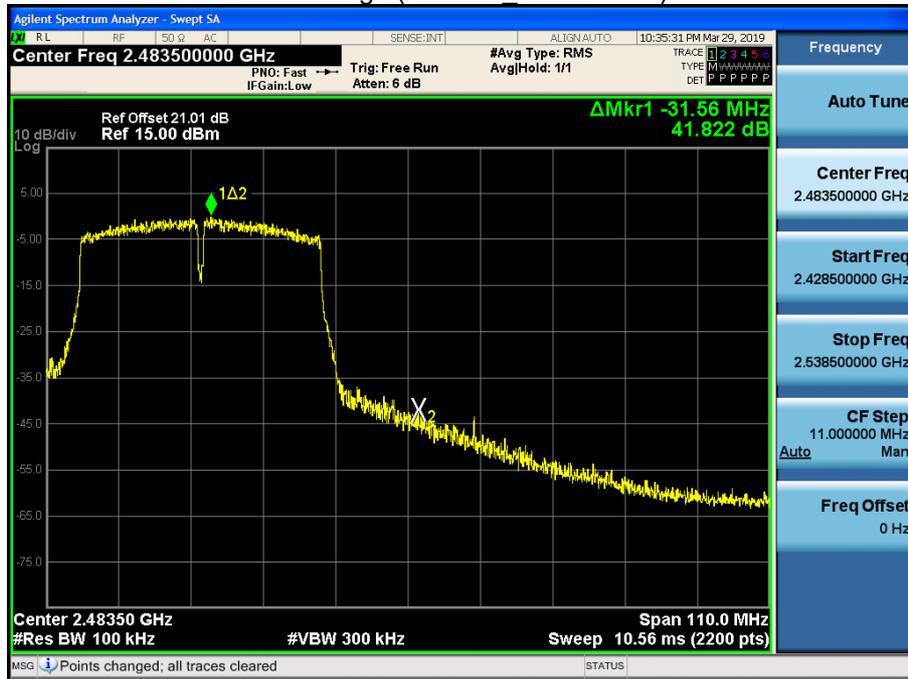

■ Test Plots(Conducted Spurious Emission)


30 MHz ~ 1 GHz

Conducted Spurious Emission (802.11n_HT40_Ch.6_MCS4)

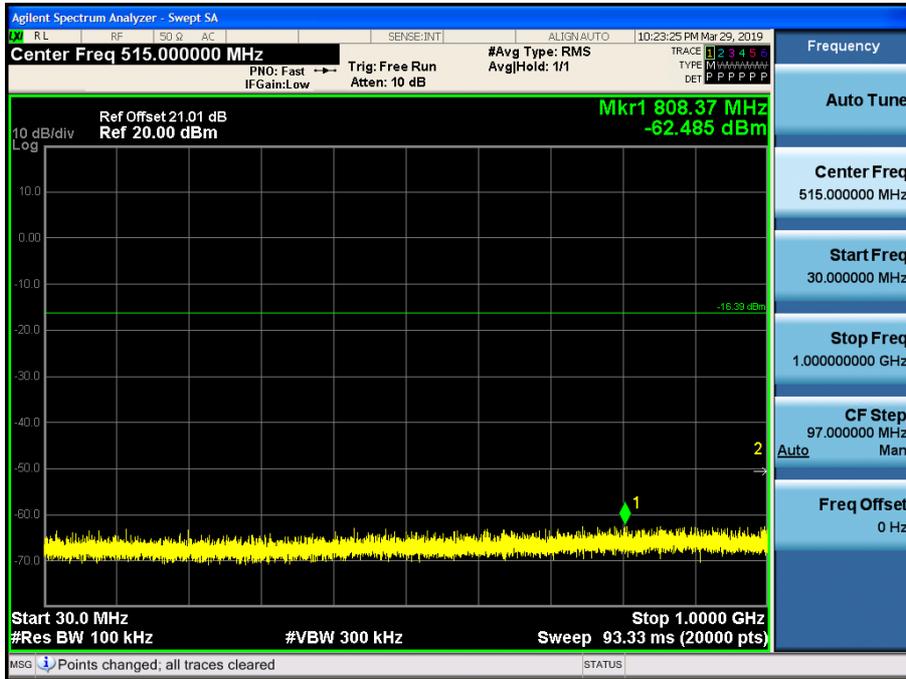


1 GHz ~ 3 GHz

Conducted Spurious Emission (802.11n_HT40_Ch.6_MCS4)

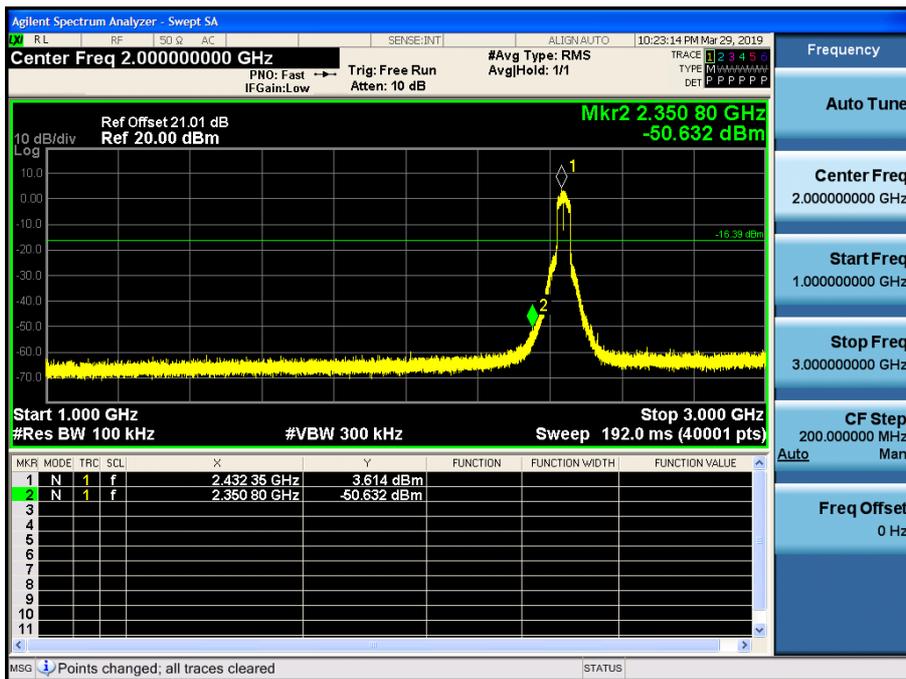


3 GHz ~ 5 GHz

Conducted Spurious Emission (802.11n_HT40_Ch.6_MCS4)

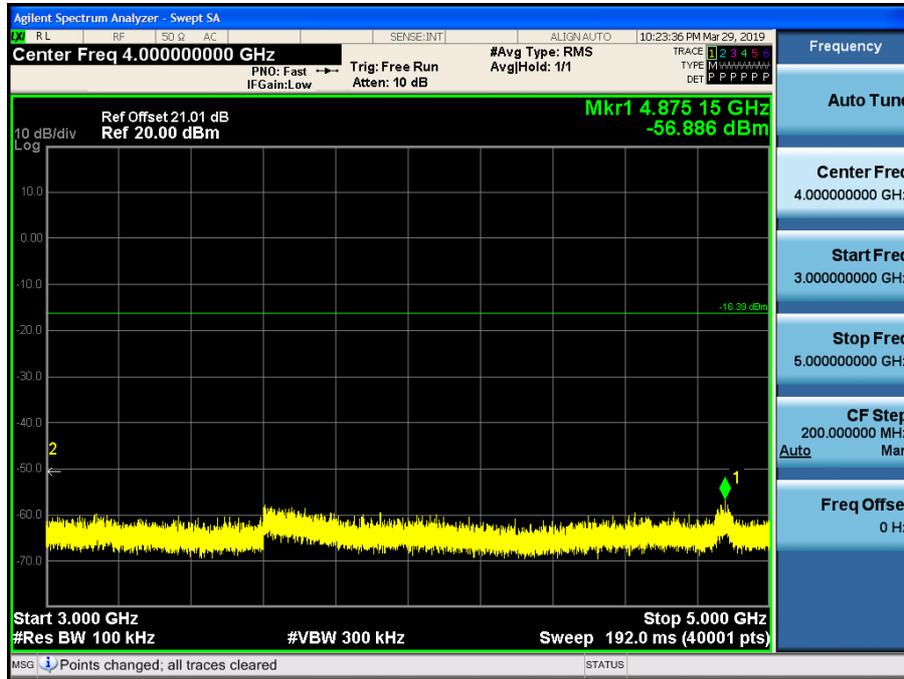


5 GHz ~ 7 GHz

Conducted Spurious Emission (802.11n_HT40_Ch.6_MCS4)

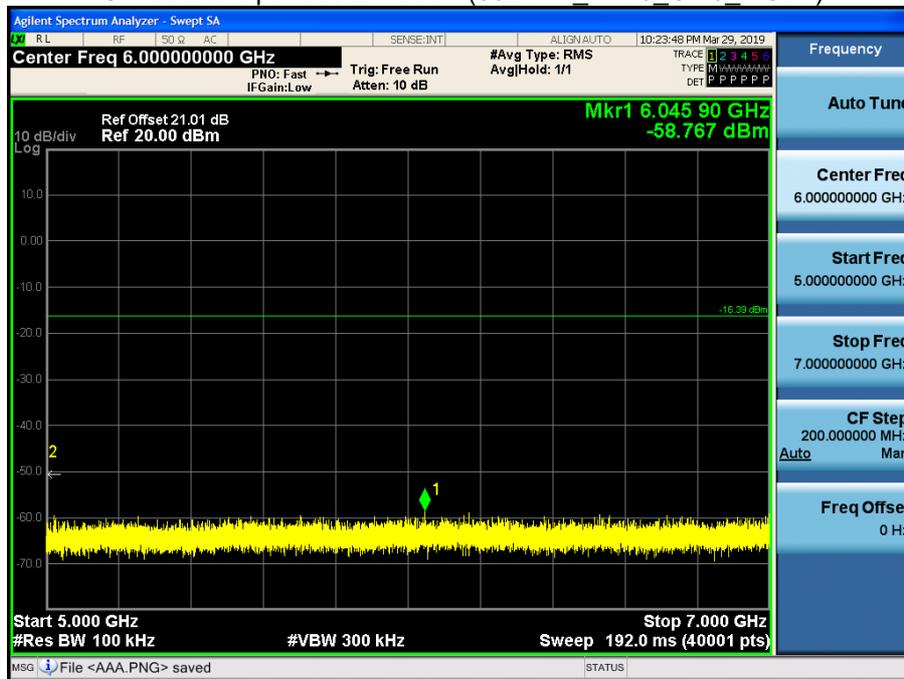


7 GHz ~ 9 GHz

Conducted Spurious Emission (802.11n_HT40_Ch.6_MCS4)

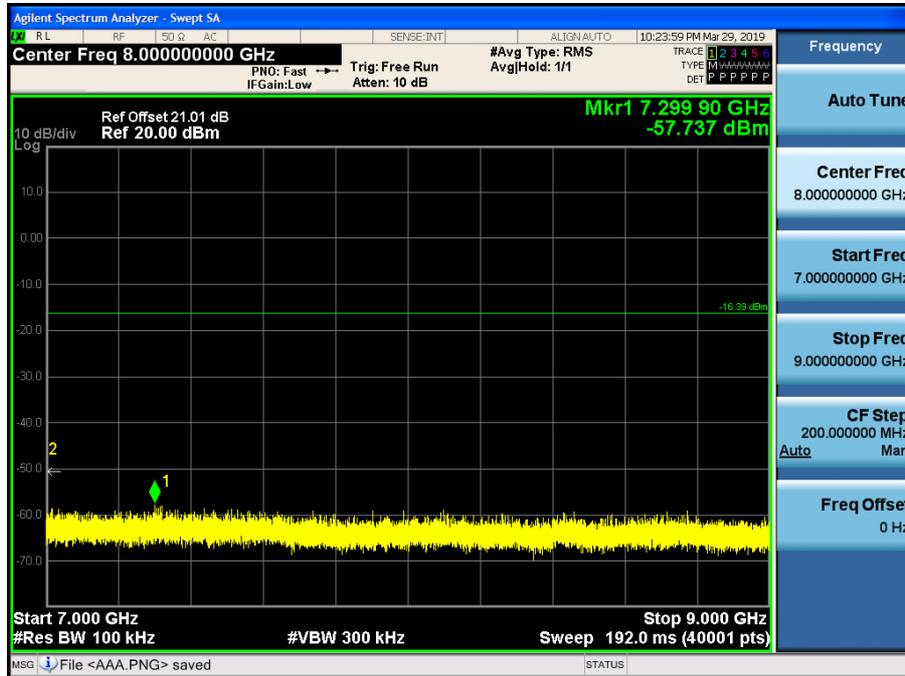


9 GHz ~ 11 GHz

Conducted Spurious Emission (802.11n_HT40_Ch.6_MCS4)

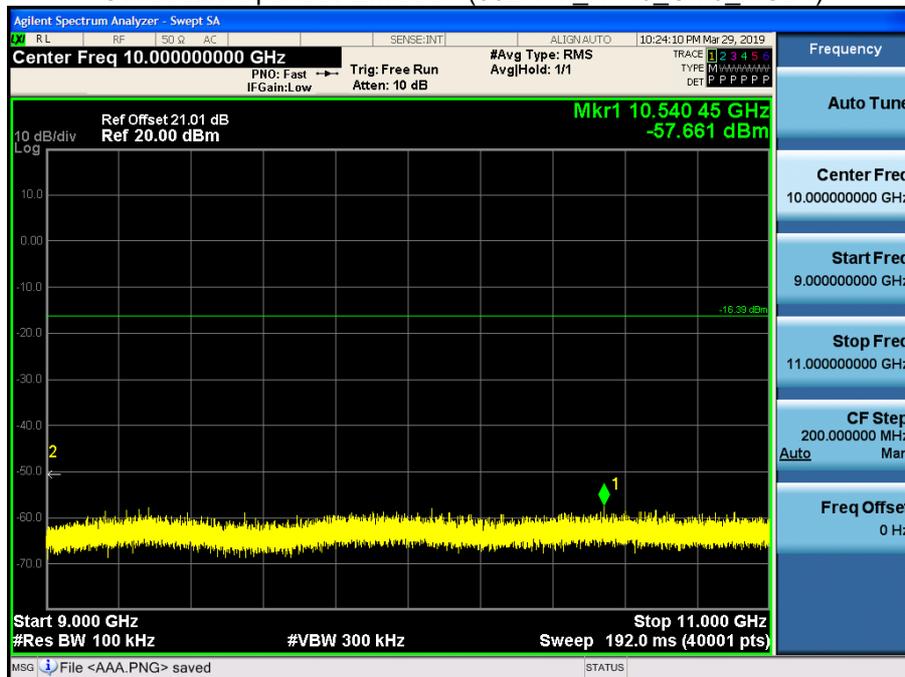


11 GHz ~ 13 GHz

Conducted Spurious Emission (802.11n_HT40_Ch.6_MCS4)

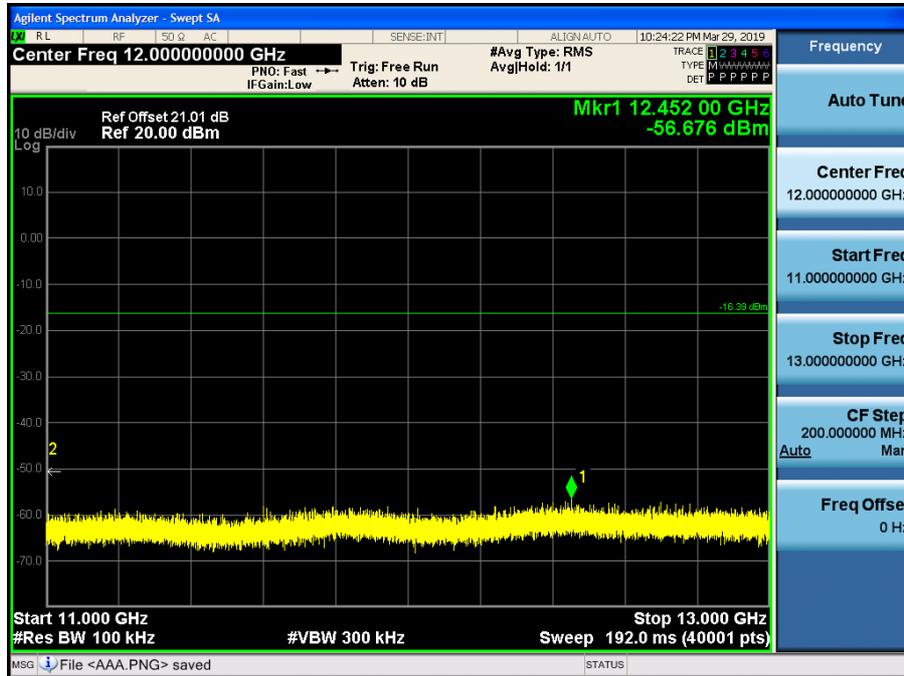


13 GHz ~ 15 GHz

Conducted Spurious Emission (802.11n_HT40_Ch.6_MCS4)

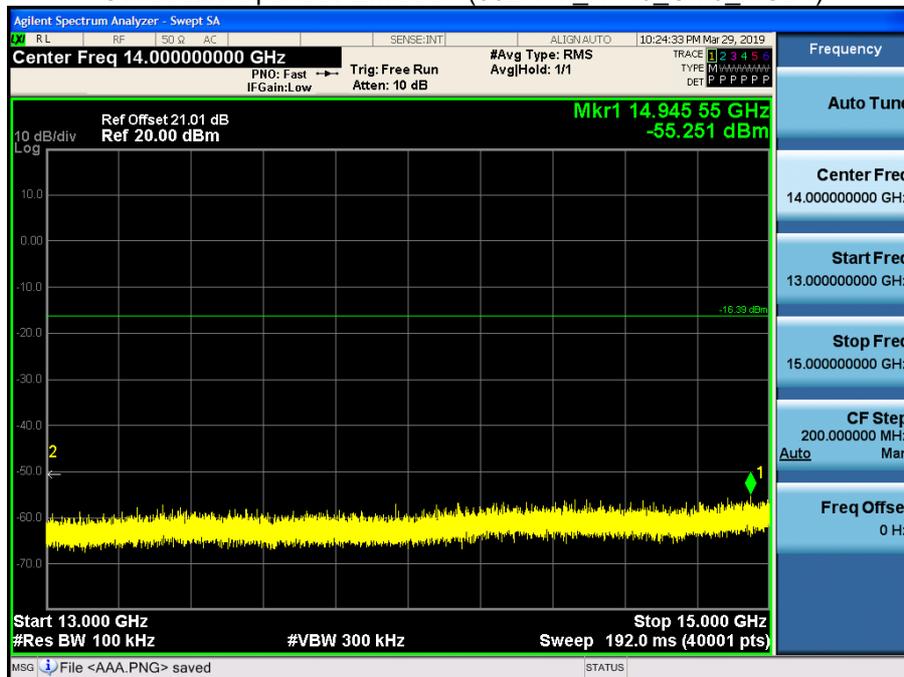


15 GHz ~ 17 GHz

Conducted Spurious Emission (802.11n_HT40_Ch.6_MCS4)

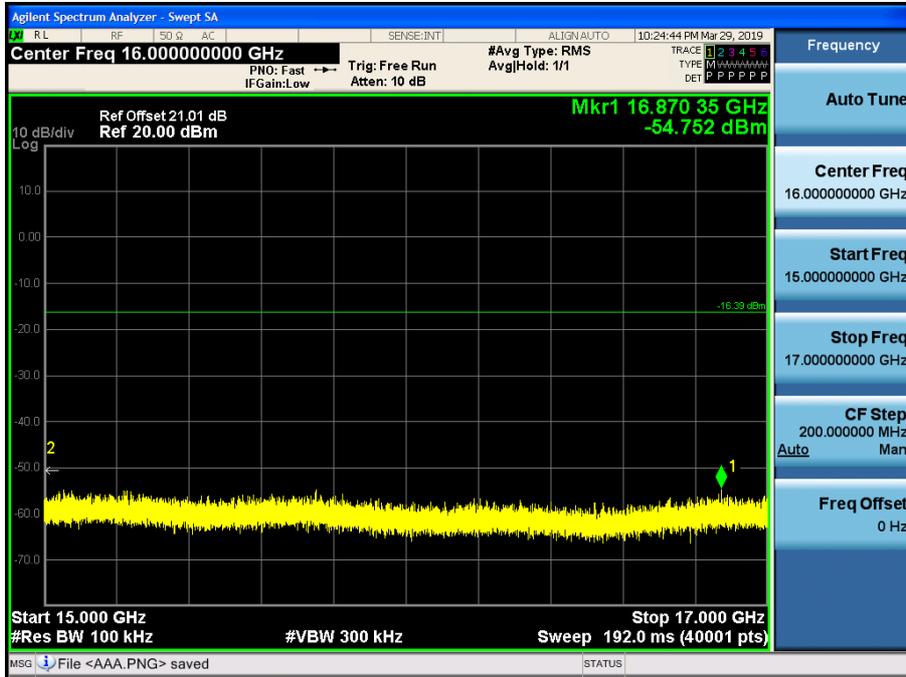


17 GHz ~ 19 GHz

Conducted Spurious Emission (802.11n HT40 Ch.6 MCS4)

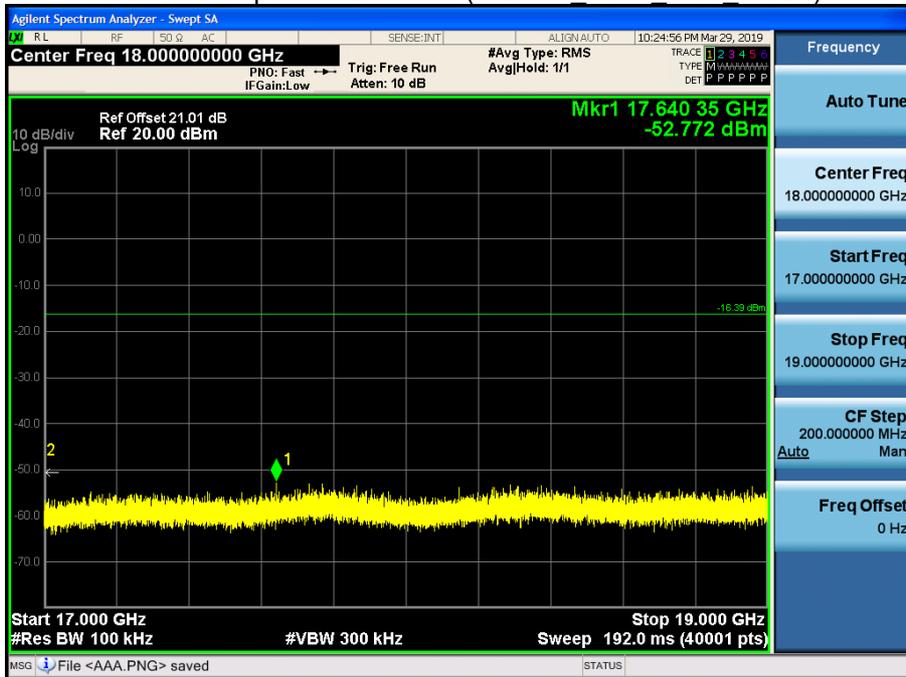


19 GHz ~ 21 GHz

Conducted Spurious Emission (802.11n HT40 Ch.6 MCS4)

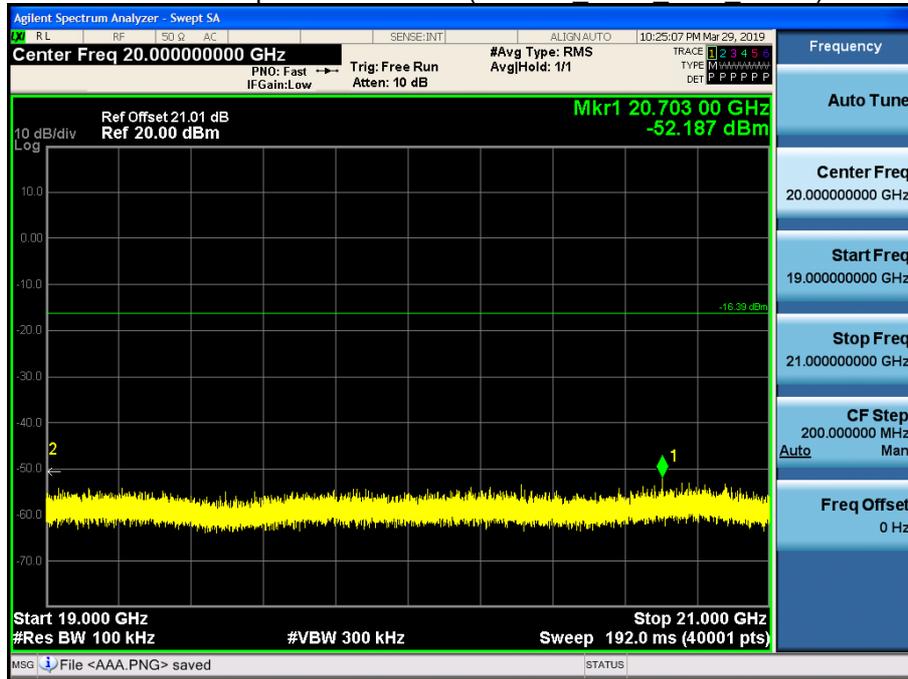

21 GHz ~ 23 GHz

Conducted Spurious Emission (802.11n_HT40_Ch.6_MCS4)

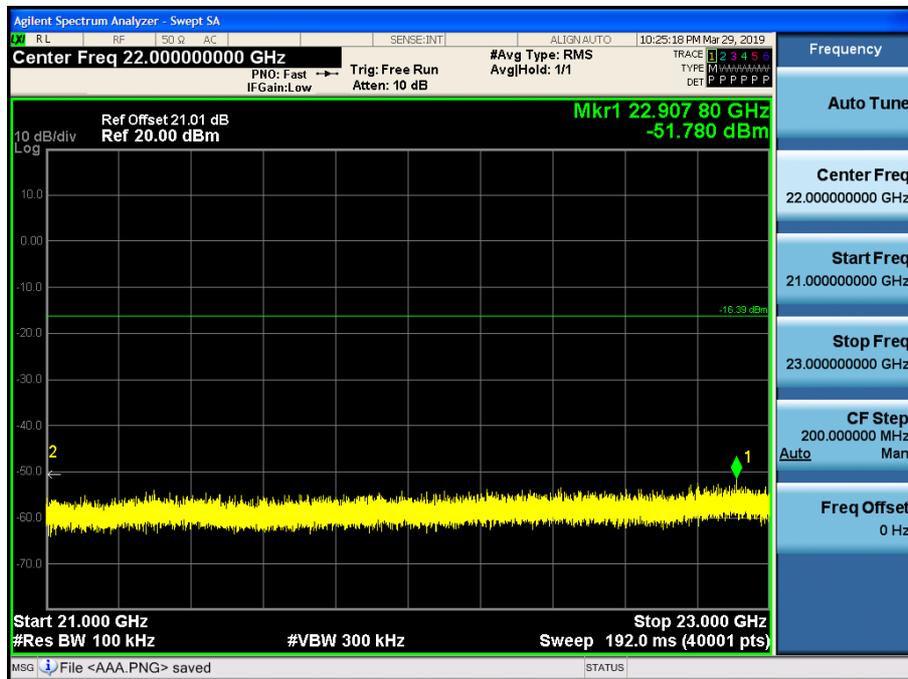

9.5 RADIATED SPURIOUS EMISSIONS

Frequency Range : 9 kHz – 30MHz

Frequency	Reading	Ant. factor	Cable loss	Ant. POL	Total	Limit	Margin
MHz	dBuV/m	dBm/m	dBm	(H/V)	dBuV/m	dBuV/m	dB
No Critical peaks found							

Note:

1. The reading of emissions are attenuated more than 20 dB below the permissible limits or the field strength is too small to be measured.
2. Distance extrapolation factor = $40 \cdot \log(\text{specific distance} / \text{test distance})$ (dB)
3. Limit line = specific Limits (dBuV) + Distance extrapolation factor
4. The test results for below 30 MHz is correlated to an open site.
The result on OFS is about 2 dB higher than semi-anechoic chamber(10 m chamber)

Frequency Range : Below 1 GHz

Frequency	Reading	Ant. factor	Cable loss	Ant. POL	Total	Limit	Margin
MHz	dBuV/m	dBm/m	dBm	(H/V)	dBuV/m	dBuV/m	dB
No Critical peaks found							

Note:

1. Radiated emissions measured in frequency range from 30 MHz to 1000 MHz were made with an instrument using Quasi peak detector mode.

[Olny MIMO]

Frequency Range : Above 1 GHz

Operation Mode: 802.11b
 Transfer Rate: 1 Mbps
 Operating Frequency 2412
 Channel No. 01 Ch

Frequency [MHz]	Reading [dBuV]	A.F.+C.L.-A.G+D.F. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
4824	48.39	2.74	V	51.13	73.98	22.85	PK
4824	43.54	2.74	V	46.28	53.98	7.70	AV
7236	47.88	8.72	V	56.60	73.98	17.38	PK
7236	39.76	8.72	V	48.48	53.98	5.50	AV
4824	48.49	2.74	H	51.23	73.98	22.75	PK
4824	43.75	2.74	H	46.49	53.98	7.49	AV
7236	48.00	8.72	H	56.72	73.98	17.26	PK
7236	39.84	8.72	H	48.56	53.98	5.42	AV

Operation Mode: 802.11g
 Transfer Rate: 6 Mbps
 Operating Frequency 2412
 Channel No. 01 Ch

Frequency [MHz]	Reading [dBuV]	Duty Cycle Factor [dB]	A.F.+C.L.-A.G+D.F. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
4824	56.05	-	2.74	V	58.79	73.98	15.19	PK
4824	45.13	-	2.74	V	47.87	53.98	6.11	AV
7236	55.13	-	8.72	V	63.85	73.98	10.13	PK
7236	38.96	-	8.72	V	47.68	53.98	6.30	AV
4824	57.20	-	2.74	H	59.94	73.98	14.04	PK
4824	45.35	-	2.74	H	48.09	53.98	5.89	AV
7236	56.00	-	8.72	H	64.72	73.98	9.26	PK
7236	39.72	-	8.72	H	48.44	53.98	5.54	AV

Operation Mode: 802.11n (HT20)
 Transfer MCS Index: 0
 Operating Frequency: 2412
 Channel No.: 01 Ch

Frequency [MHz]	Reading [dBuV]	Duty Cycle Factor [dB]	A.F.+C.L.-A.G+D.F. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
4824	53.22	-	2.74	V	55.96	73.98	18.02	PK
4824	41.05	-	2.74	V	43.79	53.98	10.19	AV
7236	56.24	-	8.72	V	64.96	73.98	9.02	PK
7236	39.82	-	8.72	V	48.54	53.98	5.44	AV
4824	53.62	-	2.74	H	56.36	73.98	17.62	PK
4824	41.62	-	2.74	H	44.36	53.98	9.62	AV
7236	56.85	-	8.72	H	65.57	73.98	8.41	PK
7236	39.89	-	8.72	H	48.61	53.98	5.37	AV

Operation Mode: 802.11n (HT40)
 Transfer MCS Index: 0
 Operating Frequency: 2422
 Channel No.: 03 Ch

Frequency [MHz]	Reading [dBuV]	Duty Cycle Factor [dB]	A.F.+C.L.-A.G+D.F. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
4844	50.11	-	3.20	V	53.31	73.98	20.67	PK
4844	38.69	-	3.20	V	41.89	53.98	12.09	AV
7266	41.73	-	8.64	V	50.37	73.98	23.61	PK
7266	30.74	-	8.64	V	39.38	53.98	14.60	AV
4844	50.25	-	3.20	H	53.45	73.98	20.53	PK
4844	39.12	-	3.20	H	42.32	53.98	11.66	AV
7266	41.82	-	8.64	H	50.46	73.98	23.52	PK
7266	30.99	-	8.64	H	39.63	53.98	14.35	AV

Operation Mode: 802.11b
 Transfer Rate: 1 Mbps
 Operating Frequency: 2437
 Channel No.: 06 Ch

Frequency [MHz]	Reading [dBuV]	A.F.+C.L.-A.G+D.F. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
4874	50.10	2.78	V	52.88	73.98	21.10	PK
4874	46.39	2.78	V	49.17	53.98	4.81	AV
7311	47.56	9.01	V	56.57	73.98	17.41	PK
7311	40.31	9.01	V	49.32	53.98	4.66	AV
4874	50.66	2.78	H	53.44	73.98	20.54	PK
4874	46.63	2.78	H	49.41	53.98	4.57	AV
7311	47.73	9.01	H	56.74	73.98	17.24	PK
7311	40.42	9.01	H	49.43	53.98	4.55	AV

Operation Mode: 802.11g
 Transfer Rate: 6 Mbps
 Operating Frequency: 2437
 Channel No.: 06 Ch

Frequency [MHz]	Reading [dBuV]	Duty Cycle Factor [dB]	A.F.+C.L.-A.G+D.F. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
4874	56.26	-	2.78	V	59.04	73.98	14.94	PK
4874	45.29	-	2.78	V	48.07	53.98	5.91	AV
7311	50.22	-	9.01	V	59.23	73.98	14.75	PK
7311	37.69	-	9.01	V	46.70	53.98	7.28	AV
4874	56.98	-	2.78	H	59.76	73.98	14.22	PK
4874	45.39	-	2.78	H	48.17	53.98	5.81	AV
7311	50.42	-	9.01	H	59.43	73.98	14.55	PK
7311	37.91	-	9.01	H	46.92	53.98	7.06	AV

Operation Mode: 802.11n (HT20)
 Transfer MCS Index: 0
 Operating Frequency: 2437
 Channel No.: 06 Ch

Frequency [MHz]	Reading [dBuV]	Duty Cycle Factor [dB]	A.F.+C.L.-A.G+D.F. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
4874	53.97	-	2.78	V	56.75	73.98	17.23	PK
4874	41.21	-	2.78	V	43.99	53.98	9.99	AV
7311	51.71	-	9.01	V	60.72	73.98	13.26	PK
7311	38.18	-	9.01	V	47.19	53.98	6.79	AV
4874	54.07	-	2.78	H	56.85	73.98	17.13	PK
4874	41.38	-	2.78	H	44.16	53.98	9.82	AV
7311	52.08	-	9.01	H	61.09	73.98	12.89	PK
7311	38.33	-	9.01	H	47.34	53.98	6.64	AV

Operation Mode: 802.11n (HT40)
 Transfer MCS Index: 0
 Operating Frequency: 2437
 Channel No.: 06 Ch

Frequency [MHz]	Reading [dBuV]	Duty Cycle Factor [dB]	A.F.+C.L.-A.G+D.F. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
4874	47.69	-	2.78	V	50.47	73.98	23.51	PK
4874	40.81	-	2.78	V	43.59	53.98	10.39	AV
7311	53.53	-	9.01	V	62.54	73.98	11.44	PK
7311	39.39	-	9.01	V	48.40	53.98	5.58	AV
4874	48.04	-	2.78	H	50.82	73.98	23.16	PK
4874	40.89	-	2.78	H	43.67	53.98	10.31	AV
7311	53.69	-	9.01	H	62.70	73.98	11.28	PK
7311	39.53	-	9.01	H	48.54	53.98	5.44	AV

Operation Mode: 802.11b
 Transfer Rate: 1 Mbps
 Operating Frequency 2462
 Channel No. 11 Ch

Frequency [MHz]	Reading [dBuV]	A.F.+C.L.-A.G+D.F. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
4924	48.92	2.43	V	51.35	73.98	22.63	PK
4924	46.21	2.43	V	48.64	53.98	5.34	AV
7386	47.30	9.44	V	56.74	73.98	17.24	PK
7386	39.04	9.44	V	48.48	53.98	5.50	AV
4924	49.21	2.43	H	51.64	73.98	22.34	PK
4924	46.32	2.43	H	48.75	53.98	5.23	AV
7386	47.31	9.44	H	56.75	73.98	17.23	PK
7386	39.12	9.44	H	48.56	53.98	5.42	AV

Operation Mode: 802.11g
 Transfer Rate: 6 Mbps
 Operating Frequency 2462
 Channel No. 11 Ch

Frequency [MHz]	Reading [dBuV]	Duty Cycle Factor [dB]	A.F.+C.L.-A.G+D.F. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
4924	58.43	-	2.43	V	60.86	73.98	13.12	PK
4924	46.58	-	2.43	V	49.01	53.98	4.97	AV
7386	44.96	-	9.44	V	54.40	73.98	19.58	PK
7386	32.28	-	9.44	V	41.72	53.98	12.26	AV
4924	58.57	-	2.43	H	61.00	73.98	12.98	PK
4924	46.61	-	2.43	H	49.04	53.98	4.94	AV
7386	45.13	-	9.44	H	54.57	73.98	19.41	PK
7386	32.59	-	9.44	H	42.03	53.98	11.95	AV

Operation Mode: 802.11n (HT20)
 Transfer Rate: 6.5 Mbps
 Operating Frequency: 2462
 Channel No.: 11 Ch

Frequency [MHz]	Reading [dBuV]	Duty Cycle Factor [dB]	A.F.+C.L.-A.G+D.F. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
4924	55.55	-	2.43	V	57.98	73.98	16.00	PK
4924	44.24	-	2.43	V	46.67	53.98	7.31	AV
7386	43.12	-	9.44	V	52.56	73.98	21.42	PK
7386	30.88	-	9.44	V	40.32	53.98	13.66	AV
4924	55.98	-	2.43	H	58.41	73.98	15.57	PK
4924	44.46	-	2.43	H	46.89	53.98	7.09	AV
7386	43.23	-	9.44	H	52.67	73.98	21.31	PK
7386	31.48	-	9.44	H	40.92	53.98	13.06	AV

Operation Mode: 802.11n (HT40)
 Transfer Rate: 6.5 Mbps
 Operating Frequency: 2452
 Channel No.: 9 Ch

Frequency [MHz]	Reading [dBuV]	Duty Cycle Factor [dB]	A.F.+C.L.-A.G+D.F. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
4904	52.96	-	2.56	V	55.52	73.98	18.46	PK
4904	41.54	-	2.56	V	44.10	53.98	9.88	AV
7356	43.12	-	9.69	V	52.81	73.98	21.17	PK
7356	32.05	-	9.69	V	41.74	53.98	12.24	AV
4904	53.01	-	2.56	H	55.57	73.98	18.41	PK
4904	41.65	-	2.56	H	44.21	53.98	9.77	AV
7356	43.33	-	9.69	H	53.02	73.98	20.96	PK
7356	32.19	-	9.69	H	41.88	53.98	12.10	AV

Operation Mode: 802.11b
 Transfer Rate: 1 Mbps
 Operating Frequency: 2467
 Channel No.: 12 Ch

Frequency [MHz]	Reading [dBuV]	A.F.+C.L.-A.G+D.F. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
4934	52.96	2.12	V	55.08	73.98	18.90	PK
4934	42.16	2.12	V	44.28	53.98	9.70	AV
7401	43.39	10.36	V	53.75	73.98	20.23	PK
7401	35.05	10.36	V	45.41	53.98	8.57	AV
4934	53.08	2.12	H	55.20	73.98	18.78	PK
4934	42.69	2.12	H	44.81	53.98	9.17	AV
7401	43.87	10.36	H	54.23	73.98	19.75	PK
7401	35.13	10.36	H	45.49	53.98	8.49	AV

Operation Mode: 802.11g
 Transfer Rate: 6 Mbps
 Operating Frequency: 2467
 Channel No.: 12 Ch

Frequency [MHz]	Reading [dBuV]	Duty Cycle Factor [dB]	A.F.+C.L.-A.G+D.F. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
4934	57.96	-	2.12	V	60.08	73.98	13.90	PK
4934	45.16	-	2.12	V	47.28	53.98	6.70	AV
7401	51.14	-	10.36	V	61.50	73.98	12.48	PK
7401	39.11	-	10.36	V	49.47	53.98	4.51	AV
4934	58.85	-	2.12	H	60.97	73.98	13.01	PK
4934	45.53	-	2.12	H	47.65	53.98	6.33	AV
7401	51.65	-	10.36	H	62.01	73.98	11.97	PK
7401	39.35	-	10.36	H	49.71	53.98	4.27	AV

Operation Mode: 802.11n (HT20)
 Transfer Rate: 6.5 Mbps
 Operating Frequency: 2467
 Channel No.: 12 Ch

Frequency [MHz]	Reading [dBuV]	Duty Cycle Factor [dB]	A.F.+C.L.-A.G+D.F. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
4934	57.86	-	2.12	V	59.98	73.98	14.00	PK
4934	45.78	-	2.12	V	47.90	53.98	6.08	AV
7401	53.10	-	10.36	V	63.46	73.98	10.52	PK
7401	39.14	-	10.36	V	49.50	53.98	4.48	AV
4934	58.00	-	2.12	H	60.12	73.98	13.86	PK
4934	46.08	-	2.12	H	48.20	53.98	5.78	AV
7401	53.13	-	10.36	H	63.49	73.98	10.49	PK
7401	39.21	-	10.36	H	49.57	53.98	4.41	AV

Operation Mode: 802.11b
 Transfer Rate: 1 Mbps
 Operating Frequency: 2472
 Channel No.: 13 Ch

Frequency [MHz]	Reading [dBuV]	A.F.+C.L.-A.G+D.F. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
4944	51.16	1.80	V	52.96	73.98	21.02	PK
4944	42.91	1.80	V	44.71	53.98	9.27	AV
7416	46.98	10.22	V	57.20	73.98	16.78	PK
7416	39.55	10.22	V	49.77	53.98	4.21	AV
4944	51.26	1.80	H	53.06	73.98	20.92	PK
4944	43.11	1.80	H	44.91	53.98	9.07	AV
7416	47.03	10.22	H	57.25	73.98	16.73	PK
7416	39.62	10.22	H	49.84	53.98	4.14	AV

Operation Mode: 802.11g
 Transfer Rate: 6 Mbps
 Operating Frequency: 2472
 Channel No.: 13 Ch


Frequency [MHz]	Reading [dBuV]	Duty Cycle Factor [dB]	A.F.+C.L.-A.G+D.F. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
4944	59.48	-	1.80	V	61.28	73.98	12.70	PK
4944	47.33	-	1.80	V	49.13	53.98	4.85	AV
7416	51.07	-	10.22	V	61.29	73.98	12.69	PK
7416	37.96	-	10.22	V	48.18	53.98	5.80	AV
4944	59.92	-	1.80	H	61.72	73.98	12.26	PK
4944	47.51	-	1.80	H	49.31	53.98	4.67	AV
7416	51.27	-	10.22	H	61.49	73.98	12.49	PK
7416	38.02	-	10.22	H	48.24	53.98	5.74	AV

Operation Mode: 802.11n (HT20)
 Transfer Rate: 6.5 Mbps
 Operating Frequency: 2472
 Channel No.: 13 Ch

Frequency [MHz]	Reading [dBuV]	Duty Cycle Factor [dB]	A.F.+C.L.-A.G+D.F. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
4944	56.68	-	1.80	V	58.48	73.98	15.50	PK
4944	45.17	-	1.80	V	46.97	53.98	7.01	AV
7416	48.57	-	10.22	V	58.79	73.98	15.19	PK
7416	35.07	-	10.22	V	45.29	53.98	8.69	AV
4944	57.28	-	1.80	H	59.08	73.98	14.90	PK
4944	45.31	-	1.80	H	47.11	53.98	6.87	AV
7416	49.05	-	10.22	H	59.27	73.98	14.71	PK
7416	35.24	-	10.22	H	45.46	53.98	8.52	AV


■ Test Plots

Radiated Spurious Emissions plot – Average Reading (802.11b, Ch.6 3rd Harmonic, X-H)

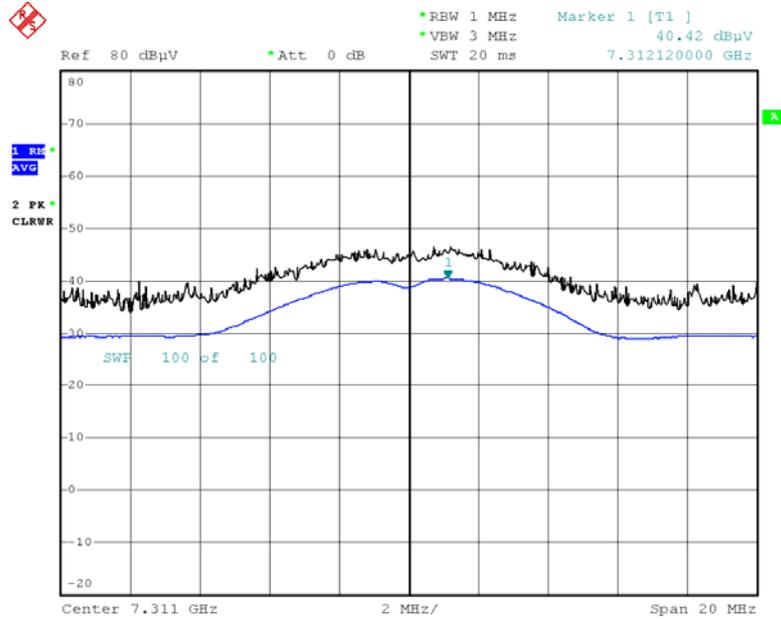

Date: 28.MAR.2019 05:43:56

Radiated Spurious Emissions plot – Peak Reading (802.11b, Ch.6 3rd Harmonic, X-H)

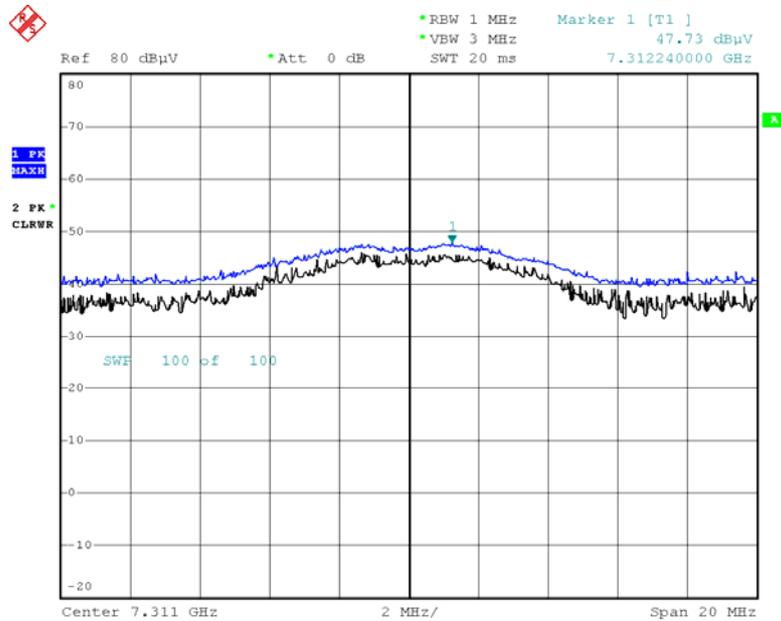

Date: 28.MAR.2019 05:45:16

Note:

Plot of worst case are only reported.

9.6 RADIATED RESTRICTED BAND EDGES

Operation Mode: 802.11b
 Transfer Rate: 1 Mbps
 Operating Frequency 2412 MHz, 2462 MHz
 Channel No. 01 Ch, 11 Ch

Frequency [MHz]	Reading [dBuV]	A.F.+C.L.+D.F. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
2390.0	49.35	0.22	H	49.57	73.98	24.41	PK
2390.0	43.62	0.22	H	43.84	53.98	10.14	AV
2390.0	49.12	0.22	V	49.34	73.98	24.64	PK
2390.0	43.39	0.22	V	43.61	53.98	10.37	AV
2483.5	46.17	0.65	H	46.82	73.98	27.16	PK
2483.5	38.25	0.65	H	38.90	53.98	15.08	AV
2483.5	46.08	0.65	V	46.73	73.98	27.25	PK
2483.5	37.96	0.65	V	38.61	53.98	15.37	AV

Operation Mode: 802.11b
 Transfer Rate: 1 Mbps
 Operating Frequency 2467 MHz, 2472 MHz
 Channel No. 12 Ch, 13 Ch

Channel	Frequency [MHz]	Reading [dBuV]	A.F.+C.L.+D.F. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
12	2483.5	46.20	0.65	H	46.85	73.98	27.13	PK
	2483.5	37.50	0.65	H	38.15	53.98	15.83	AV
	2483.5	45.99	0.65	V	46.64	73.98	27.34	PK
	2483.5	37.43	0.65	V	38.08	53.98	15.90	AV
	2390.0	48.81	0.65	H	49.46	73.98	24.52	PK
13	2390.0	40.86	0.65	H	41.51	53.98	12.47	AV
	2390.0	48.54	0.65	V	49.19	73.98	24.79	PK
	2390.0	40.72	0.65	V	41.37	53.98	12.61	AV

Operation Mode: 802.11g
 Transfer Rate: 6 Mbps
 Operating Frequency: 2412 MHz, 2462 MHz
 Channel No.: 01 Ch, 11 Ch

Frequency [MHz]	Reading [dBuV]	Duty Cycle Factor [dB]	A.F.+C.L.+D.F. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
2390.0	59.54	-	0.22	H	59.76	73.98	14.22	PK
2390.0	49.02	-	0.22	H	49.24	53.98	4.74	AV
2390.0	58.89	-	0.22	V	59.11	73.98	14.87	PK
2390.0	48.93	-	0.22	V	49.15	53.98	4.83	AV
2483.5	58.36	-	0.65	H	59.01	73.98	14.97	PK
2483.5	41.32	-	0.65	H	41.97	53.98	12.01	AV
2483.5	57.69	-	0.65	V	58.34	73.98	15.64	PK
2483.5	41.05	-	0.65	V	41.70	53.98	12.28	AV

Operation Mode: 802.11g
 Transfer Rate: 6 Mbps
 Operating Frequency: 2467 MHz, 2472 MHz
 Channel No.: 12 Ch, 13 Ch

Channel	Frequency [MHz]	Reading [dBuV]	Duty Cycle Factor [dB]	A.F.+C.L.+D.F. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
12	2483.5	59.83	-	0.65	H	60.48	73.98	13.50	PK
	2483.5	49.81	-	0.65	H	50.46	53.98	3.52	AV
	2483.5	59.68	-	0.65	V	60.33	73.98	13.65	PK
	2483.5	49.76	-	0.65	V	50.41	53.98	3.57	AV
13	2390.0	59.81	-	0.65	H	60.46	73.98	13.52	PK
	2390.0	49.19	-	0.65	H	49.84	53.98	4.14	AV
	2390.0	59.72	-	0.65	V	60.37	73.98	13.61	PK
	2390.0	49.05	-	0.65	V	49.70	53.98	4.28	AV

Operation Mode: 802.11n (HT20)
 Transfer MCS Index: 0
 Operating Frequency: 2412 MHz, 2462 MHz
 Channel No.: 01 Ch, 11 Ch

Frequency [MHz]	Reading [dBuV]	Duty Cycle Factor [dB]	A.F.+C.L.+D.F. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
2390.0	60.49	-	0.22	H	60.71	73.98	13.27	PK
2390.0	50.23	-	0.22	H	50.45	53.98	3.53	AV
2390.0	59.84	-	0.22	V	60.06	73.98	13.92	PK
2390.0	50.11	-	0.22	V	50.33	53.98	3.65	AV
2483.5	55.68	-	0.65	H	56.33	73.98	17.65	PK
2483.5	45.04	-	0.65	H	45.69	53.98	8.29	AV
2483.5	55.46	-	0.65	V	56.11	73.98	17.87	PK
2483.5	44.86	-	0.65	V	45.51	53.98	8.47	AV

Operation Mode: 802.11n (HT20)
 Transfer MCS Index: 0
 Operating Frequency: 2467 MHz, 2472 MHz
 Channel No.: 12 Ch, 13 Ch


Channel	Frequency [MHz]	Reading [dBuV]	Duty Cycle Factor [dB]	A.F.+C.L.+D.F. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
12	2483.5	59.55	-	0.65	H	60.20	73.98	13.78	PK
	2483.5	49.54	-	0.65	H	50.19	53.98	3.79	AV
	2483.5	59.18	-	0.65	V	59.83	73.98	14.15	PK
	2483.5	49.39	-	0.65	V	50.04	53.98	3.94	AV
13	2390.0	60.59	-	0.65	H	61.24	73.98	12.74	PK
	2390.0	49.39	-	0.65	H	50.04	53.98	3.94	AV
	2390.0	59.82	-	0.65	V	60.47	73.98	13.51	PK
	2390.0	49.10	-	0.65	V	49.75	53.98	4.23	AV

Operation Mode: 802.11n (HT40)
 Transfer MCS Index: 0
 Operating Frequency: 2422 MHz, 2452 MHz
 Channel No.: 03 Ch, 09 Ch

Frequency [MHz]	Reading [dBuV]	Duty Cycle Factor [dB]	A.F.+C.L.+D.F. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
2390.0	60.38	-	0.22	H	60.60	73.98	13.38	PK
2390.0	49.26	-	0.22	H	49.48	53.98	4.50	AV
2390.0	59.59	-	0.22	V	59.81	73.98	14.17	PK
2390.0	49.14	-	0.22	V	49.36	53.98	4.62	AV
2483.5	49.17	-	0.65	H	49.82	73.98	24.16	PK
2483.5	49.48	-	0.65	H	50.13	53.98	3.85	AV
2483.5	49.05	-	0.65	V	49.70	73.98	24.28	PK
2483.5	49.34	-	0.65	V	49.99	53.98	3.99	AV


■ Test Plots

Radiated Restricted Band Edges plot – Average Reading (802.11n_HT20, Ch.1)

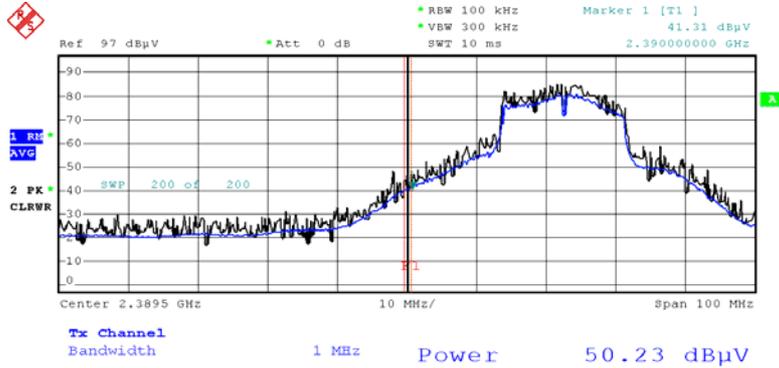


Date: 26.MAR.2019 12:07:33

Radiated Restricted Band Edges plot – Peak Reading (802.11n_HT20, Ch.1)

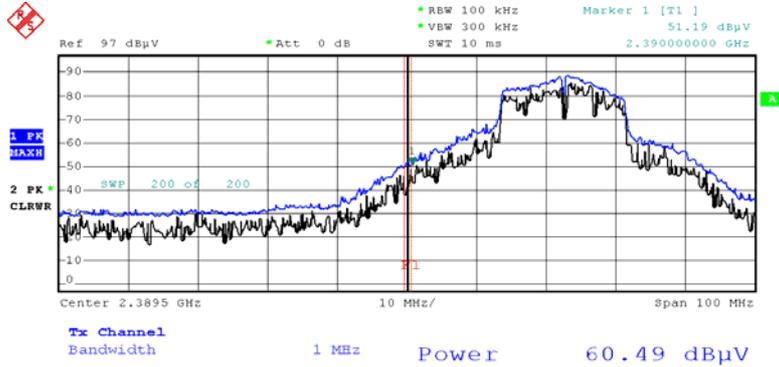


Date: 26.MAR.2019 12:08:29

Radiated Restricted Band Edges plot – Average Reading (802.11g, Ch.12)

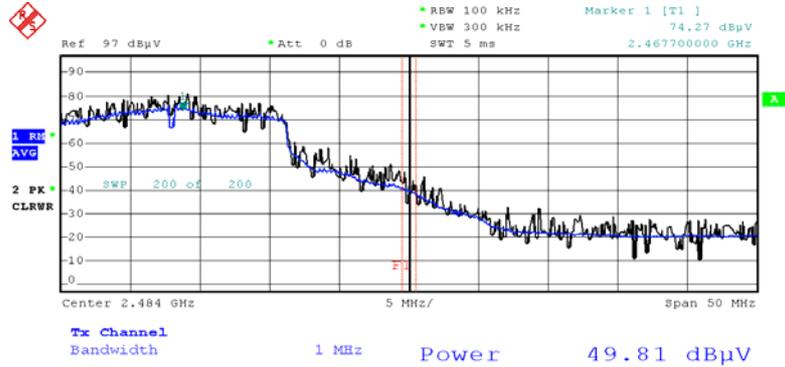

Date: 26.MAR.2019 13:05:32

Radiated Restricted Band Edges plot – Peak Reading (802.11g, Ch.12)

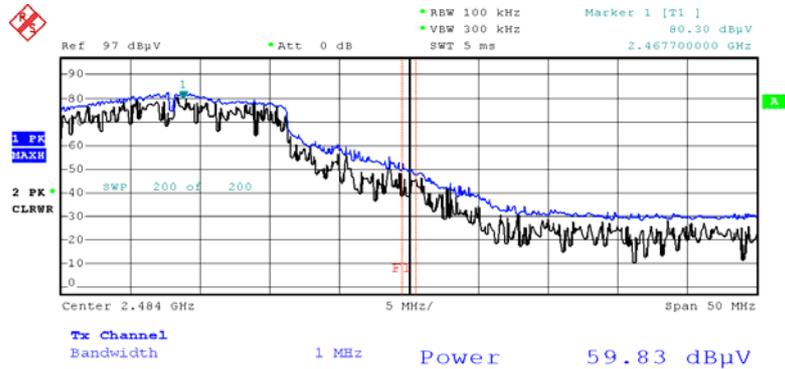

Date: 26.MAR.2019 13:07:45

Note:

Plot of worst case are only reported.

9.7 RECEIVER SPURIOUS EMISSIONS

Frequency Range : Below 1 GHz

Frequency	Reading	Ant. factor	Cable loss	Ant. POL	Total	Limit	Margin
MHz	dBuV/m	dBm/m	dBm	(H/V)	dBuV/m	dBuV/m	dB
No Critical peaks found							

Note:

1. Radiated emissions measured in frequency range from 30 MHz to 1000 MHz were made with an instrument using Quasi peak detector mode.

Frequency Range : Above 1 GHz

Frequency	Reading	Ant. factor	Cable loss	Ant. POL	Total	Limit	Margin
MHz	dBuV/m	dBm/m	dBm	(H/V)	dBuV/m	dBuV/m	dB
No Critical peaks found							

9.8 POWERLINE CONDUCTED EMISSIONS

Conducted Emissions (Line 1)

Test


1 / 2

HCT TEST Report

Common Information

EUT: LGSBWAC93
 Manufacturer: LG Innotek
 Test Site: SHIELD ROOM
 Operating Conditions: WLAN2.4G_L1

FCC CLASS B_Exten Cable

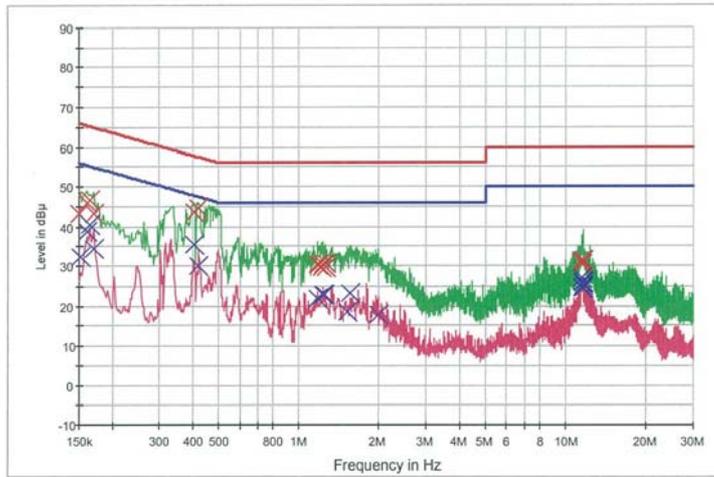

— FCC CLASS B_OP — FCC CLASS B_AV — Preview Result 1-PK+
 — Preview Result 2-AVG × Final Result 1-QPK × Final Result 2-CAV

Final Result 1

Frequency (MHz)	QuasiPeak (dBuV)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBuV)
0.150000	43.2	9.000	Off	L1	9.7	22.8	66.0
0.160000	46.0	9.000	Off	L1	9.7	19.4	65.5
0.164000	46.6	9.000	Off	L1	9.7	18.7	65.3
0.170000	43.4	9.000	Off	L1	9.7	21.6	65.0
0.404000	43.5	9.000	Off	L1	9.7	14.2	57.8
0.420000	44.5	9.000	Off	L1	9.7	12.9	57.4
1.176000	30.5	9.000	Off	L1	9.8	25.5	56.0
1.188000	30.4	9.000	Off	L1	9.8	25.6	56.0
1.214000	29.6	9.000	Off	L1	9.8	26.4	56.0
1.234000	30.3	9.000	Off	L1	9.8	25.7	56.0
1.254000	30.6	9.000	Off	L1	9.9	25.4	56.0
1.262000	29.6	9.000	Off	L1	9.9	26.4	56.0
11.434000	30.9	9.000	Off	L1	10.3	29.1	60.0
11.504000	30.5	9.000	Off	L1	10.3	29.5	60.0
11.518000	31.3	9.000	Off	L1	10.3	28.7	60.0
11.528000	31.5	9.000	Off	L1	10.3	28.5	60.0
11.550000	31.5	9.000	Off	L1	10.3	28.5	60.0
11.588000	31.4	9.000	Off	L1	10.3	28.6	60.0

2019-04-10

오전 9:53:22

Test

2 / 2

Final Result 2

Frequency (MHz)	CAverage (dBuV)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBuV)
0.152000	32.3	9.000	Off	L1	9.7	23.6	55.9
0.160000	38.8	9.000	Off	L1	9.7	16.6	55.5
0.164000	40.7	9.000	Off	L1	9.7	14.6	55.3
0.170000	34.5	9.000	Off	L1	9.7	20.5	55.0
0.406000	35.4	9.000	Off	L1	9.7	12.3	47.7
0.420000	30.1	9.000	Off	L1	9.7	17.3	47.4
1.174000	21.9	9.000	Off	L1	9.8	24.1	46.0
1.234000	22.7	9.000	Off	L1	9.8	23.3	46.0
1.244000	23.0	9.000	Off	L1	9.9	23.0	46.0
1.520000	18.5	9.000	Off	L1	9.9	27.5	46.0
1.554000	23.4	9.000	Off	L1	9.9	22.6	46.0
1.996000	17.8	9.000	Off	L1	9.8	28.2	46.0
11.480000	26.8	9.000	Off	L1	10.3	23.2	50.0
11.504000	24.5	9.000	Off	L1	10.3	25.5	50.0
11.532000	25.8	9.000	Off	L1	10.3	24.2	50.0
11.588000	25.2	9.000	Off	L1	10.3	24.8	50.0
11.600000	26.1	9.000	Off	L1	10.3	23.9	50.0
11.606000	24.7	9.000	Off	L1	10.3	25.3	50.0

2019-04-10

오전 9:53:22

Conducted Emissions (Line 2)

Test


1 / 2

HCT TEST Report

Common Information

EUT: LGSBWAC93
 Manufacturer: LG Innotek
 Test Site: SHIELD ROOM
 Operating Conditions: WLAN2.4G_N

FCC CLASS B_Exten Cable

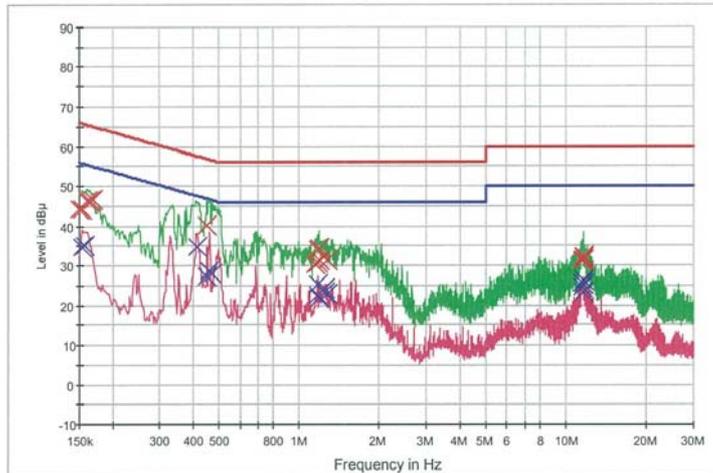

— FCC CLASS B_QP
 — FCC CLASS B_AV
 — Preview Result 1-PK+
— Preview Result 2-AVG
 x Final Result 1-QPK
 x Final Result 2-CAV

Final Result 1

Frequency (MHz)	QuasiPeak (dBuV)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBuV)
0.150000	44.3	9.000	Off	N	9.8	21.7	66.0
0.154000	44.4	9.000	Off	N	9.8	21.4	65.8
0.160000	46.1	9.000	Off	N	9.8	19.3	65.5
0.164000	46.4	9.000	Off	N	9.8	18.8	65.3
0.168000	46.6	9.000	Off	N	9.8	18.5	65.1
0.452000	40.1	9.000	Off	N	9.9	16.8	56.8
1.154000	30.2	9.000	Off	N	10.0	25.8	56.0
1.170000	34.0	9.000	Off	N	10.0	22.0	56.0
1.174000	30.8	9.000	Off	N	10.0	25.2	56.0
1.184000	34.6	9.000	Off	N	10.0	21.4	56.0
1.188000	31.2	9.000	Off	N	10.0	24.8	56.0
1.268000	31.2	9.000	Off	N	10.0	24.8	56.0
11.470000	30.9	9.000	Off	N	10.5	29.1	60.0
11.498000	31.4	9.000	Off	N	10.5	28.6	60.0
11.576000	31.4	9.000	Off	N	10.5	28.6	60.0
11.584000	31.9	9.000	Off	N	10.5	28.1	60.0
11.614000	32.3	9.000	Off	N	10.5	27.7	60.0
11.630000	31.4	9.000	Off	N	10.5	28.6	60.0

2019-04-10

오전 9:44:55

Test

2 / 2

Final Result 2

Frequency (MHz)	CAverage (dBuV)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBuV)
0.154000	34.7	9.000	Off	N	9.8	21.1	55.8
0.158000	35.2	9.000	Off	N	9.8	20.4	55.6
0.414000	34.9	9.000	Off	N	9.9	12.7	47.6
0.452000	27.4	9.000	Off	N	9.9	19.4	46.8
0.462000	28.5	9.000	Off	N	9.9	18.2	46.7
0.474000	28.1	9.000	Off	N	9.9	18.4	46.4
1.170000	22.4	9.000	Off	N	10.0	23.6	46.0
1.174000	25.4	9.000	Off	N	10.0	20.6	46.0
1.188000	22.0	9.000	Off	N	10.0	24.0	46.0
1.240000	24.3	9.000	Off	N	10.0	21.7	46.0
1.252000	23.2	9.000	Off	N	10.0	22.8	46.0
1.268000	22.8	9.000	Off	N	10.0	23.2	46.0
11.448000	25.5	9.000	Off	N	10.5	24.5	50.0
11.454000	24.6	9.000	Off	N	10.5	25.4	50.0
11.498000	25.5	9.000	Off	N	10.5	24.5	50.0
11.594000	25.3	9.000	Off	N	10.5	24.7	50.0
11.600000	26.4	9.000	Off	N	10.5	23.6	50.0
11.680000	23.2	9.000	Off	N	10.5	26.8	50.0

2019-04-10

오전 9:44:55

10. LIST OF TEST EQUIPMENT

Conducted Test

Manufacturer	Model / Equipment	Calibration Date	Calibration Interval	Serial No.
Rohde & Schwarz	ENV216 / LISN	12/12/2018	Annual	102245
Rohde & Schwarz	ESCI / Test Receiver	06/27/2018	Annual	100033
ESPAAC	SU-642 / Temperature Chamber	03/12/2019	Annual	0093008124
Agilent	N9020A / Signal Analyzer	06/08/2018	Annual	MY51110085
Agilent	N9030A / Signal Analyzer	11/20/2018	Annual	MY49431210
Agilent	N1911A / Power Meter	04/16/2018	Annual	MY45100523
Agilent	N1921A / Power Sensor	04/16/2018	Annual	MY52260025
Agilent	87300B / Directional Coupler	11/20/2018	Annual	3116A03621
Hewlett Packard	11667B / Power Splitter	06/07/2018	Annual	05001
Hewlett Packard	E3632A / DC Power Supply	06/26/2018	Annual	KR75303960
Agilent	8493C / Attenuator(10 dB)	07/10/2018	Annual	07560
Rohde & Schwarz	EMC32 / Software	N/A	N/A	N/A
HCT CO., LTD.	FCC WLAN&BT&BLE Conducted Test Software v3.0	N/A	N/A	N/A
Rohde & Schwarz	CBT / Bluetooth Tester	05/17/2018	Annual	100422

Note:

1. Equipment listed above that calibrated during the testing period was set for test after the calibration.
2. Equipment listed above that has a calibration due date during the testing period, the testing is completed before equipment expiration date.

Radiated Test

Manufacturer	Model / Equipment	Calibration Date	Calibration Interval	Serial No.
Innco system	CO3000 / Controller(Antenna mast)	N/A	N/A	CO3000-4p
Innco system	MA4640/800-XP-EP / Antenna Position Tower	N/A	N/A	N/A
Emco	2090 / Controller	N/A	N/A	060520
Ets	Turn Table	N/A	N/A	N/A
Rohde & Schwarz	Loop Antenna	08/23/2018	Biennial	1513-175
Schwarzbeck	VULB 9160 / Hybrid Antenna	08/09/2018	Biennial	3368
Schwarzbeck	BBHA 9120D / Horn Antenna	11/21/2017	Biennial	9120D-1191
Schwarzbeck	BBHA9170 / Horn Antenna(15 GHz ~ 40 GHz)	12/04/2017	Biennial	BBHA9170541
Rohde & Schwarz	FSP(9 kHz ~ 30 GHz) / Spectrum Analyzer	09/19/2018	Annual	836650/016
Rohde & Schwarz	FSV40-N / Spectrum Analyzer	09/19/2018	Annual	101068-SZ
Wainwright Instruments	WHKX10-2700-3000-18000-40SS / High Pass Filter	01/03/2019	Annual	4
Wainwright Instruments	WHKX8-6090-7000-18000-40SS / High Pass Filter	01/03/2019	Annual	5
Wainwright Instruments	WRCJV2400/2483.5-2370/2520-60/12SS / Band Reject Filter	06/29/2018	Annual	2
Wainwright Instruments	WRCJV5100/5850-40/50-8EEK / Band Reject Filter	01/03/2019	Annual	2
Api tech.	18B-03 / Attenuator (3 dB)	06/07/2018	Annual	2
WEINSCHL	56-10 / Attenuator(10 dB)	10/10/2018	Annual	72316
CERNEX	CBLU1183540B-01/Broadband Bench Top LNA	01/03/2019	Annual	28549
CERNEX	CBL06185030 / Broadband Low Noise Amplifier	01/03/2019	Annual	24615
CERNEX	CBL18265035 / Power Amplifier	01/03/2019	Annual	22966
CERNEX	CBL26405040 / Power Amplifier	06/29/2018	Annual	25956
TESCOM	TC-3000C / Bluetooth Tester	03/26/2019	Annual	3000C000276

Note:

1. Equipment listed above that calibrated during the testing period was set for test after the calibration.
2. Equipment listed above that has a calibration due date during the testing period, the testing is completed before equipment expiration date.

11. ANNEX A_ TEST SETUP PHOTO

Please refer to test setup photo file no. as follows;

No.	Description
1	HCT-RF-1904-FI005-P