

TEST REPORT

FCC/IC UNII Test for LGSBWAC95

APPLICANT
LG Electronics Inc.

REPORT NO.
HCT-RF-2006-FI004-R1

DATE OF ISSUE
8 July 2020

Tested by
Jin Gwan Lee



Technical Manager
Jong Seok Lee



Accredited by KOLAS, Republic of KOREA

HCT CO., LTD.

Soo Chan Lee
SooChan Lee / CEO

HCT CO., LTD.

74, Seoicheon-ro 578beon-gil, Majang-myeon, Icheon-si, Gyeonggi-do, 17383 KOREA
Tel. +82 31 634 6300 F ax. +82 31 645 6401



HCT Co., Ltd.

74, Seoicheon-ro 578beon-gil, Majang-myeon, Icheon-si, Gyeonggi-do, 17383 KOREA
Tel. +82 31 634 6300 Fax. +82 31 645 6401



TEST REPORT

FCC/IC UNII Test
for LGSBWAC95

REPORT NO.
HCT-RF-2006-FI004-R1

DATE OF ISSUE
July 08, 2020

Additional Model
-

Applicant **LG Electronics Inc.**
222, LG-ro, Jinwi-myeon, Pyeongtaek-si, Gyeonggi-do, 451-713, Korea

Eut Type RF Module
Model Name LGSBWAC95

FCC ID BEJLGSBWAC95
IC 2703H-LGSBWAC95

Modulation type GFSK

FCC Classification Unlicensed National Information Infrastructure(NII)

FCC Rule Part(s) Part 15.407

IC Rule Part(s) RSS-247 Issue 2 (February 2017)
RSS-Gen Issue 5_Amendment 1 (March 2019)

The result shown in this test report refer only to the sample(s) tested unless otherwise stated.

This test results were applied only to the test methods required by the standard.

REVISION HISTORY

The revision history for this test report is shown in table.

Revision No.	Date of Issue	Description
0	July 01, 2020	Initial Release
1	July 08, 2020	Typo correction (35 Page)

Engineering Statement:

The measurements shown in this report were made in accordance with the procedures indicated, and the emissions from this equipment were found to be within the limits applicable. I assume full responsibility for the accuracy and completeness of these measurements, and for the qualifications of all persons taking them. It is further stated that upon the basis of the measurements made, the equipment tested is capable of operation in accordance with the requirements of the FCC / IC Rules under normal use and maintenance.

This laboratory is not accredited for the test results marked *.

The above Test Report is the accredited test result by KOLAS(Korea Laboratory Accreditation Scheme) / A2LA(American Association for Laboratory Accreditation), which signed the ILAC-MRA.(HCT Accreditation No.: KT197)

* The report shall not be reproduced except in full(only partly) without approval of the laboratory.

CONTENTS

1. GENERAL INFORMATION	5
EUT DESCRIPTION	5
ANTENNA CONFIGURATIONS	6
2. MAXIMUM OUTPUT POWER	7
3. TEST METHODOLOGY	8
EUT CONFIGURATION	8
EUT EXERCISE	8
GENERAL TEST PROCEDURES	8
DESCRIPTION OF TEST MODES	9
4. INSTRUMENT CALIBRATION	9
5. FACILITIES AND ACCREDITATIONS	9
5.1 FACILITIES	9
5.2 EQUIPMENT	9
6. ANTENNA REQUIREMENTS	10
7. MEASUREMENT UNCERTAINTY	10
8. DESCRIPTION OF TESTS	11
9. SUMMARY OF TEST RESULTS	34
10. TEST RESULT	36
10.1 26DB BANDWIDTH & 99 % BANDWIDTH	36
10.2 6DB BANDWIDTH	54
10.3 OUTPUT POWER MEASUREMENT	78
10.4 POWER SPECTRAL DENSITY	143
10.5 FREQUENCY STABILITY.	160
10.5.1 80MHz BW	160
10.6 STRADDLE CHANNEL	192
10.6.1 26dB Bandwidth	192
10.6.2 6dB Bandwidth	198
10.6.3 Output Power	204
10.6.4 Power Spectral Density	210
10.7 RADIATED SPURIOUS EMISSIONS	216
10.8 RADIATED RESTRICTED BAND EDGE	250
10.9 RECEIVER SPURIOUS EMISSIONS	268
10.10 POWERLINE CONDUCTED EMISSIONS	269
11. LIST OF TEST EQUIPMENT	273
12. ANNEX A_ TEST SETUP PHOTO	275

1. GENERAL INFORMATION

EUT DESCRIPTION

Model	LGSBWAC95	
Additional Model	-	
EUT Type	RF Module	
Power Supply	DC 3.30 V	
Modulation Type	OFDM : 802.11a, 802.11n, 802.11ac	
Frequency Range (MHz)	U-NII-1	20MHz BW : 5180 - 5240 40MHz BW : 5190 - 5230 80MHz BW : 5210
	U-NII-2A	20MHz BW : 5260 - 5320 40MHz BW : 5270 - 5310 80MHz BW : 5290
	U-NII-2C	20MHz BW : 5500 - 5720 40MHz BW : 5510 - 5710 80MHz BW : 5530 - 5690
	U-NII-3	20MHz BW : 5745 - 5825 40MHz BW : 5755 - 5795 80MHz BW : 5775
Antenna type	Metal press Ant	
Antenna Peak Gain	Ant.1: 0.05 dBi(UNII 1), 0.98 dBi(UNII 2A)/ 1.41 dBi(UNII 2C)/ 1.44 dBi(UNII 3) Ant.2: 1.42 dBi(UNII 1), 1.45 dBi(UNII 2A)/ 1.37 dBi(UNII 2C)/ 1.42 dBi(UNII 3)	
Straddle channel	Supported	
TDWR Band	Not Supported	
Dynamic Frequency Selection	Slave without radar detection	
Date(s) of Tests	May 25, 2020 ~ June 22, 2020	
PMN (Product Marketing Number)	LGSBWAC95	
HVIN (Hardware Version Identification Number)	ETWCFMBC01	
FVIN (Firmware Version Identification Number)	MT7668_V1.0	
HMN (Host Marketing Name)	N/A	
EUT serial numbers	ETWCFMBC01-01, ETWCFMBC01-02, ETWCFMBC01-03, ETWCFMBC01-04	

ANTENNA CONFIGURATIONS

1. The device employs MIMO technology. Below are the possible configurations

Configurations	SISO		SDM	CDD
	Ant1	Ant2	Ant1 + Ant2	Ant1 + Ant2
802.11a	O	O	X	O
802.11n(HT20)	O	O	O	O
802.11n(HT40)	O	O	O	O
802.11ac(VHT20)	O	O	O	O
802.11ac(VHT40)	O	O	O	O
802.11ac(VHT80)	O	O	O	O

Note:

1. O = Support, X = Not Support
2. SISO = Single Input Single Output
3. SDM = Spatial Diversity Multiplexing
4. CDD = Cyclic Delay Diversity

2. Directional Gain Calculation

According to KDB 662911 D01 Multiple Transmitter Output v02r01

Directional gain = $10 \cdot \log[(10^{G1/20} + 10^{G2/20} + \dots + 10^{GN/20})^2 / N]$ dBi

Band	Ant Gain (dBi)		Directional Gain = $10 \cdot \log[(10^{G1/20} + 10^{G2/20} + \dots + 10^{GN/20})^2 / N]$ dBi
UNII 1	Ant1(Aux)	0.05	3.77
	Ant2(Main)	1.42	
UNII 2A	Ant1(Aux)	0.98	4.23
	Ant2(Main)	1.45	
UNII 2C	Ant1(Aux)	1.41	4.40
	Ant2(Main)	1.37	
UNII 3	Ant1(Aux)	1.44	4.44
	Ant2(Main)	1.42	

2. MAXIMUM OUTPUT POWER

The transmitter has a maximum total conducted average output power as follows:

Band	Mode	SISO				MIMO	
		Ant1 Power		Ant2 Power		Ant 1 + Ant 2 Power	
		(dBm)	(W)	(dBm)	(W)	(dBm)	(W)
UNII1	802.11a	13.74	0.024	12.05	0.016	15.97	0.040
	802.11n (HT20)	13.56	0.023	12.04	0.016	15.86	0.039
	802.11n (HT40)	16.15	0.041	14.27	0.027	18.30	0.068
	802.11ac (VHT20)	13.85	0.024	12.14	0.016	16.09	0.041
	802.11ac (VHT40)	16.85	0.048	15.54	0.036	19.23	0.084
	802.11ac (VHT80)	11.68	0.015	10.35	0.011	14.07	0.026
UNII2A	802.11a	16.41	0.044	14.96	0.031	18.76	0.075
	802.11n (HT20)	16.59	0.046	15.68	0.037	19.17	0.083
	802.11n (HT40)	16.29	0.043	14.44	0.028	18.41	0.069
	802.11ac (VHT20)	15.84	0.038	14.75	0.030	18.33	0.068
	802.11ac (VHT40)	15.73	0.037	14.57	0.029	18.20	0.066
	802.11ac (VHT80)	9.80	0.010	8.05	0.006	12.02	0.016
UNII2C	802.11a	15.12	0.033	14.69	0.029	17.92	0.062
	802.11n (HT20)	15.78	0.038	15.29	0.034	18.54	0.072
	802.11n (HT40)	15.63	0.037	15.43	0.035	18.53	0.071
	802.11ac (VHT20)	15.80	0.038	15.42	0.035	18.46	0.070
	802.11ac (VHT40)	15.23	0.033	15.02	0.032	18.09	0.064
	802.11ac (VHT80)	16.47	0.044	16.33	0.043	19.40	0.087
UNII3	802.11a	16.76	0.047	16.66	0.046	19.61	0.091
	802.11n (HT20)	16.64	0.046	16.06	0.040	19.36	0.086
	802.11n (HT40)	18.50	0.071	18.42	0.069	21.39	0.138
	802.11ac (VHT20)	16.43	0.044	16.10	0.041	19.24	0.084
	802.11ac (VHT40)	18.33	0.068	18.24	0.067	21.29	0.135
	802.11ac (VHT80)	18.82	0.076	18.31	0.068	21.58	0.144

3. TEST METHODOLOGY

The measurement procedure described in FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01 dated December 14, 2017 entitled “Guidelines for Compliance Testing of Unlicensed National Information Infrastructure (U-NII) Devices Part15, Subpart E” and ANSI C63.10 (Version : 2013) ‘the American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices’ were used in the measurement.

EUT CONFIGURATION

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner that intends to maximize its emission characteristics in a continuous normal application.

EUT EXERCISE

The EUT was operated in the engineering mode to fix the Tx frequency that was for the purpose of the measurements. According to its specifications, the EUT must comply with the requirements of the Section 15.207, 15.209 and 15.407 under the FCC Rules Part 15 Subpart E. / RSS-Gen issue 5, RSS-247 issue 2.

GENERAL TEST PROCEDURES

Conducted Emissions

The EUT is placed on the turntable, which is 0.8 m above ground plane. According to the requirements in Section 6.2 of ANSI C63.10. (Version :2013) Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30MHz using CISPR Quasi-peak and average detector modes.

Radiated Emissions

The EUT is placed on a turn table, which is 0.8 m above ground plane below 1GHz. Above 1GHz with 1.5m using absorbers between the EUT and receive antenna. The turntable shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3 m away from the receiving antenna, which varied from 1 m to 4 m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the max. emission, the relative positions of this hand-held transmitter (EUT) was rotated through three orthogonal axes according to the requirements in Section 6.6.5 of ANSI C63.10. (Version: 2013)

DESCRIPTION OF TEST MODES

The EUT has been tested under operating condition. Test program used to control the EUT for staying in continuous transmitting and receiving mode is programmed.

4. INSTRUMENT CALIBRATION

The measuring equipment, which was utilized in performing the tests documented herein, has been calibrated in accordance with the manufacturer's recommendations for utilizing calibration equipment's, which is traceable to recognized national standards.

Especially, all antenna for measurement is calibrated in accordance with the requirements of C63.5 (Version : 2017).

5. FACILITIES AND ACCREDITATIONS

5.1 FACILITIES

The SAC(Semi-Anechoic Chamber) and conducted measurement facility used to collect the radiated data are located at the 74, Seoicheon-ro 578beon-gil, Majang-myeon, Icheon-si, Gyeonggi-do, 17383, Rep. of KOREA.

The site is constructed in conformance with the requirements of ANSI C63.4. (Version :2014) and CISPR Publication 22.

Detailed description of test facility was submitted to the Commission and accepted dated April 02, 2018 (Registration Number: KR0032).

For ISED, test facility was accepted dated February 14, 2019 (CAB identifier: KR0032).

5.2 EQUIPMENT

Radiated emissions are measured with one or more of the following types of Linearly polarized antennas: tuned dipole, bi-conical, log periodic, bi-log, and/or ridged waveguide, horn. Spectrum analyzers with pre-selectors and quasi-peak detectors are used to perform radiated measurements. Conducted emissions are measured with Line Impedance Stabilization Networks and EMI Test Receivers. Calibrated wideband preamplifiers, coaxial cables, and coaxial attenuators are also used for making measurements.

All receiving equipment conforms to CISPR Publication 16-1, "Radio Interference Measuring Apparatus and Measurement Methods."

6. ANTENNA REQUIREMENTS

According to FCC 47 CFR § 15.203, § 15.407 / RSS-Gen (Issue 5) Section 8:

“An intentional radiator antenna shall be designed to ensure that no antenna other than that furnished by the responsible party can be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.”

- (1) The antennas of this E.U.T are permanently attached.
- (2) The E.U.T Complies with the requirement of § 15.203, § 15.407

7. MEASUREMENT UNCERTAINTY

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI C63.10-2013.

All measurement uncertainty values are shown with a coverage factor of $k=2$ to indicate a 95 % level of confidence.


The measurement data shown herein meets or exceeds the U_{CISPR} measurement uncertainty values specified in CISPR 16-4-2 and, thus, can be compared directly to specified limits to determine compliance

Parameter	Expanded Uncertainty (\pm dB)
Conducted Disturbance (150 kHz ~ 30 MHz)	1.82
Radiated Disturbance (9 kHz ~ 30 MHz)	3.40
Radiated Disturbance (30 MHz ~ 1 GHz)	4.80
Radiated Disturbance (1 GHz ~ 18 GHz)	5.70
Radiated Disturbance (18 GHz ~ 40 GHz)	5.05

8. DESCRIPTION OF TESTS

8.1. Duty Cycle

Test Configuration

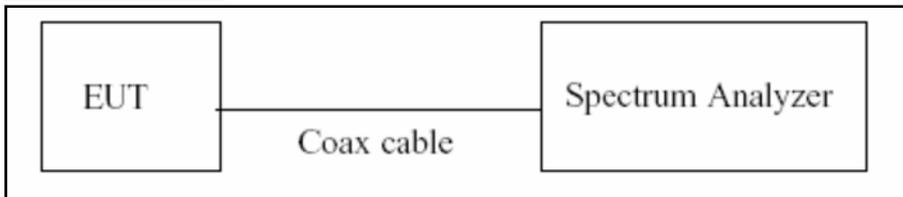

Test Procedure

The transmitter output is connected to the Spectrum Analyzer.

We tested according to Procedure B.2 in KDB 789033 D02 v02r01.


1. RBW = 8 MHz (the largest available value)
2. VBW = 8 MHz (\geq RBW)
3. SPAN = 0 Hz
4. Detector = Peak
5. Number of points in sweep > 100
6. Trace mode = Clear write
7. Measure T_{total} and T_{on}
8. Calculate Duty Cycle = T_{on} / T_{total} and Duty Cycle Factor = $10\log(1/\text{Duty Cycle})$

8.2. 6dB Bandwidth & 26dB Bandwidth & 99 % Bandwidth

Limit

Within the 5.725-5.85 GHz band, the minimum 6 dB bandwidth of U-NII devices shall be at least 500 kHz.

Test Configuration

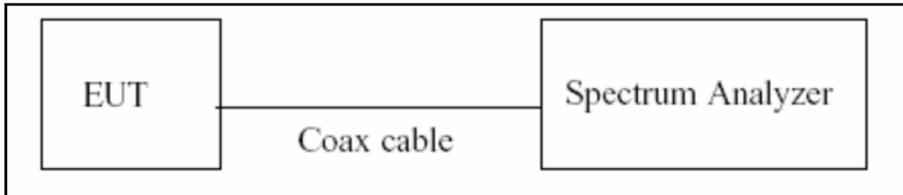

Test Procedure(26dB Bandwidth)

The transmitter output is connected to the Spectrum Analyzer.

We tested according to Procedure C.1 in KDB 789033 D02 v02r01.

1. RBW = approximately 1 % of the emission bandwidth
2. VBW > RBW
3. Detector = Peak
4. Trace mode = max hold
5. Measure the maximum width of the emission that is 26 dB down from the maximum of the emission. Compare this with the RBW setting of the analyzer. Readjust RBW and repeat measurement as needed until the RBW/EBW ratio is approximately 1 %.

Test Procedure (6dB Bandwidth)

The transmitter output is connected to the Spectrum Analyzer.

We tested according to Procedure C.2 in KDB 789033 D02 v02r01.

1. RBW = 100 kHz
2. VBW \geq 3 x RBW
3. Detector = Peak
4. Trace mode = max hold
5. Allow the trace to stabilize
6. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points(upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

Note:

1. We tested X dB bandwidth using the automatic bandwidth measurement capability of a spectrum analyzer.

2. DFS test channels should be defined. So, We performed the OBW test to prove that no part of the fundamental emissions of any channels belong to UNII1 and UNII3 band for DFS.
3. The 26 dB bandwidth is used to determine the conducted power limits.

Test Procedure (99 % Bandwidth for IC)

The transmitter output is connected to the spectrum analyzer.

RBW = 1% ~ 5% of the occupied bandwidth

VBW \cong 3 x RBW

Detector = Peak

Trace mode = max hold

Sweep = auto couple

Allow the trace to stabilize

Note : We tested OBW using the automatic bandwidth measurement capability of a spectrum analyzer.


8.3. Output Power Measurement

Limit


Band	Limit
UNII 1	- Master : Not exceed 1 W(=30dBm) - Slave : Not exceed 250 mW(=23.98 dBm)
UNII 2A, 2C	Not exceed the lesser of 250 mW or 11 dBm + 10 log B, (where B is the 26 dB emission bandwidth in megahertz.)
UNII 3	Not exceed 1 W(=30dBm)

Test Configuration

Power Meter

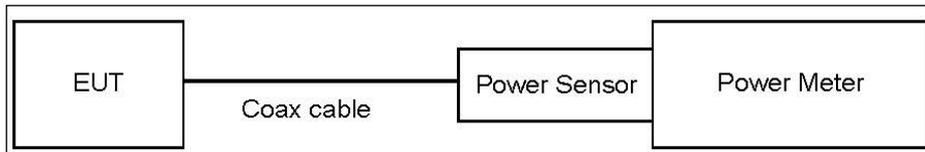

Spectrum Analyzer(Only Straddle Channel)

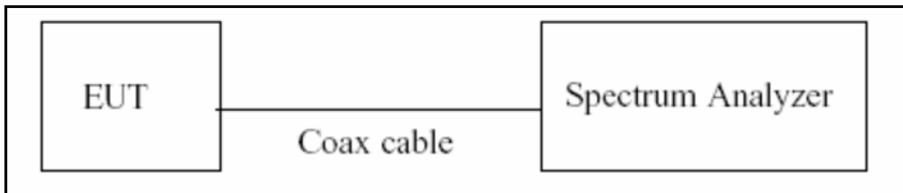

Test Procedure(Power Meter)

We tested according to Procedure E.3.a in KDB 789033 D02 v02r01.

1. Measure the duty cycle.
2. Measure the average power of the transmitter. This measurement is an average over both the on and off periods of the transmitter.
3. Add $10 \log (1/x)$, where x is the duty cycle, to the measured power in order to compute the average power during the actual transmission times.

Test Procedure(Spectrum Analyzer)

The transmitter output is connected to the Spectrum Analyzer.

We use the spectrum analyzer's integrated band power measurement function.

We tested according to Procedure E.2.d) in KDB 789033 D02 v02r01.

1. Measure the duty cycle.
2. Set span to encompass the 26 dB EBW of the signal.
3. RBW = 1 MHz.
4. VBW \geq 3 MHz.
5. Number of points in sweep \geq 2 x span/RBW.
6. Sweep time = auto.
7. Detector = RMS.
8. Do not use sweep triggering. Allow the sweep to “free run”.
9. Trace average at least 100 traces in power averaging(RMS) mode
10. Integrated bandwidth = OBW
11. Add $10\log(1/x)$, where x is the duty cycle, to the measured power in order to compute the average power during the actual transmission times.

Sample Calculation

Total Power(dBm) = Reading Value(dBm) + ATT loss(dB) + Cable loss(dB) + Duty Cycle Factor(dB)

Note

1. Spectrum reading values are not plot data.

The power results in plot is already including the actual values of loss for the attenuator and cable combination.

2. Spectrum offset = Attenuator loss(20 dB) + Cable loss

3. Actual value of loss for the attenuator and cable combination is below table.

Band	Loss(dB)
UNII 1	22.00
UNII 2A	22.00
UNII 2C	22.00
UNII 3	22.00

(Actual value of loss for the attenuator and cable combination)

Limit & Ant Gain Calculation (FCC&IC)


Operating Mode	Band	Mode	Operating Ant.	Ant. Gain (dBi)	E.I.R.P Limit (dBm)	Conducted Limit (dBm)
SISO	UNII 1	802.11a/n/ac	Ant 1(Aux)	0.05	22.21	23.98
			Ant 2(Main)	1.42	22.25	23.98
	UNII 2A		Ant 1(Aux)	0.98	29.24	23.24
			Ant 2(Main)	1.45	29.24	23.24
	UNII 2C		Ant 1(Aux)	1.41	29.26	23.26
			Ant 2(Main)	1.37	29.24	23.24
	UNII 3		Ant 1(Aux)	1.44	N/A	30.00
			Ant 2(Main)	1.42	N/A	30.00
MIMO	UNII 1	802.11a/n/ac	Ant 1(Aux) & Ant 2(Main)	3.77	22.21	23.98
	UNII 2A			4.23	29.24	23.24
	UNII 2C			4.40	29.24	23.24
	UNII 3			4.44	N/A	30.00

8.4. Power Spectral Density

Limit

Band	Limit
UNII 1	11 dBm/MHz
UNII 2A, 2C	11 dBm/MHz
UNII 3	30 dBm/500 kHz

Test Configuration

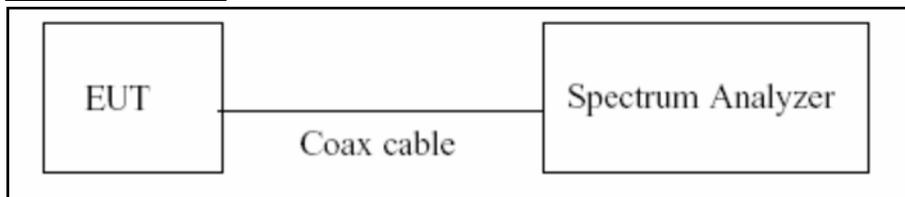

Test Procedure

We tested according to Procedure F in KDB 789033 D02 v02r01.

1. Set span to encompass the entire emission bandwidth(EBW) of the signal.
2. RBW = 1 MHz(510 kHz for UNII 3)
3. VBW \geq 3 MHz
4. Number of points in sweep \geq 2 x span/RBW.
5. Sweep time = auto.
6. Detector = RMS(i.e., power averaging), if available. Otherwise, use sample detector mode.
7. Do not use sweep triggering. Allow the sweep to “free run”.
8. Trace average at least 100 traces in power averaging(RMS) mode
9. Use the peak search function on the spectrum analyzer to find the peak of the spectrum.
10. If Method SA-2 was used, add $10 \log(1/x)$, where x is the duty cycle, to the peak of the spectrum.

Sample Calculation

Total PSD(dBm) = Reading Value(dBm) + ATT loss(dB) + Cable loss(dB) + Duty Cycle Factor(dB)

Note

1. Spectrum reading values are not plot data.

The PSD results in plot is already including the actual values of loss for the attenuator and cable combination.

2. Spectrum offset = Attenuator loss(20 dB) + Cable loss

3. Actual value of loss for the attenuator and cable combination is below table.

Band	Loss(dB)
UNII 1	22.00
UNII 2A	22.00
UNII 2C	22.00
UNII 3	22.00


(Actual value of loss for the attenuator and cable combination)

8.5. Frequency Stability

Limit

Maintained within the band

Test Configuration

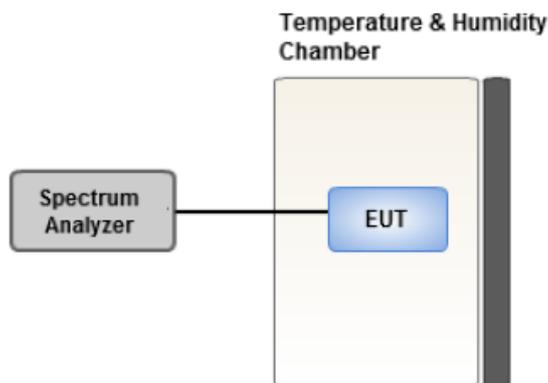

Test Procedure

1. The EUT was placed inside an environmental chamber as the temperature in the chamber was varied between -30 °C and 50 °C.
2. The temperature was incremented by 10 °C intervals and the unit was allowed to stabilize at each temperature before each measurement. The center frequency of the transmitting channel was evaluated at each temperature and the frequency deviation from the channel's center frequency was recorded.
3. The primary supply voltage is varied from 85% to 115% of the nominal value for non hand-carried battery and AC powered equipment. For hand-carried, battery-powered equipment, primary supply voltage is reduced to the battery operating end point which shall be specified by the manufacturer.
4. While maintaining a constant temperature inside the environmental chamber, turn the EUT ON and record the operating frequency at startup, and at 2 minutes, 5 minutes, and 10 minutes after the EUT is energized. Four measurements in total are made.

8.6. AC Power line Conducted Emissions

Limit

For an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies, within the band 150 kHz to 30 MHz, shall not exceed the limits in the following table, as measured using a 50 μ H/50 ohms line impedance stabilization network (LISN).

Frequency Range (MHz)	Limits (dB μ V)	
	Quasi-peak	Average
0.15 to 0.50	66 to 56*	56 to 46*
0.50 to 5	56	46
5 to 30	60	50
5 to 30	60	50

^(a)Decreases with the logarithm of the frequency.

Compliance with this provision shall be based on the measurement of the radio frequency voltage between each power line (LINE and NEUTRAL) and ground at the power terminals.

Test Configuration

See test photographs attached in Annex A for the actual connections between EUT and support equipment.

Test Procedure

1. The EUT is placed on a wooden table 80 cm above the reference ground plane.
2. The EUT is connected via LISN to a test power supply.
3. The measurement results are obtained as described below:
4. Detectors : Quasi Peak and Average Detector.

Sample Calculation

Quasi-peak(Final Result) = Reading Value + Correction Factor

8.7. Radiated Test

Limit

1. UNII 1: All emissions outside of the 5.15-5.35 GHz band shall not exceed an EIRP of -27 dBm/MHz.

2. UNII 2A, 2C: All emissions outside of the 5.47-5.725 GHz band shall not exceed an EIRP of -27 dBm/MHz.

3. UNII 3: All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.

4. All out of band emissions appearing in a restricted band as specified in Section 15.205 of the Title 47 CFR must not exceed the limits shown in Section 15.209.

FCC

Frequency (MHz)	Field Strength (uV/m)	Measurement Distance (m)
0.009 – 0.490	$2400/F(\text{kHz})$	300
0.490 – 1.705	$24000/F(\text{kHz})$	30
1.705 – 30	30	30

IC


Frequency (MHz)	Field Strength (uA/m)	Measurement Distance (m)
0.009 – 0.490	$6.37/F(\text{kHz})$	300
0.490 – 1.705	$63.7/F(\text{kHz})$	30
1.705 – 30	0.08	30

FCC&IC


Frequency (MHz)	Field Strength ($\mu\text{V}/\text{m}$)	Measurement Distance (m)
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

Test Configuration


Below 30 MHz

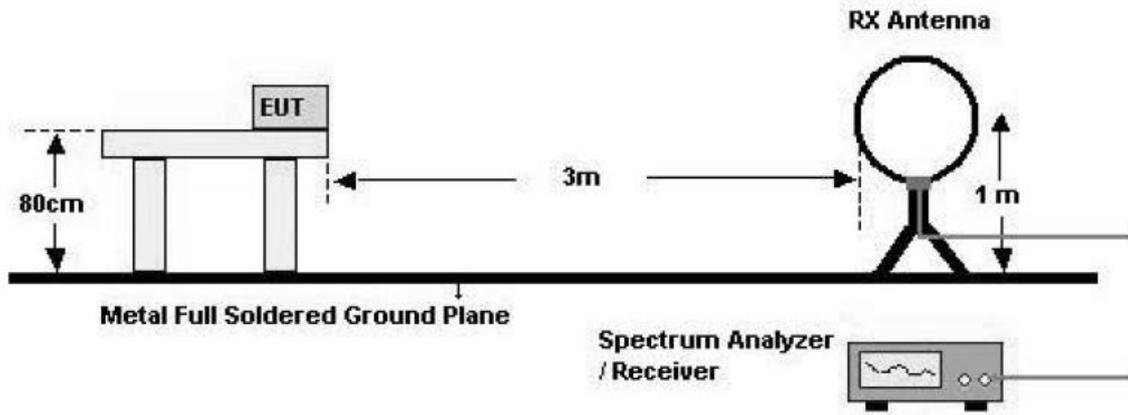

30 MHz - 1 GHz

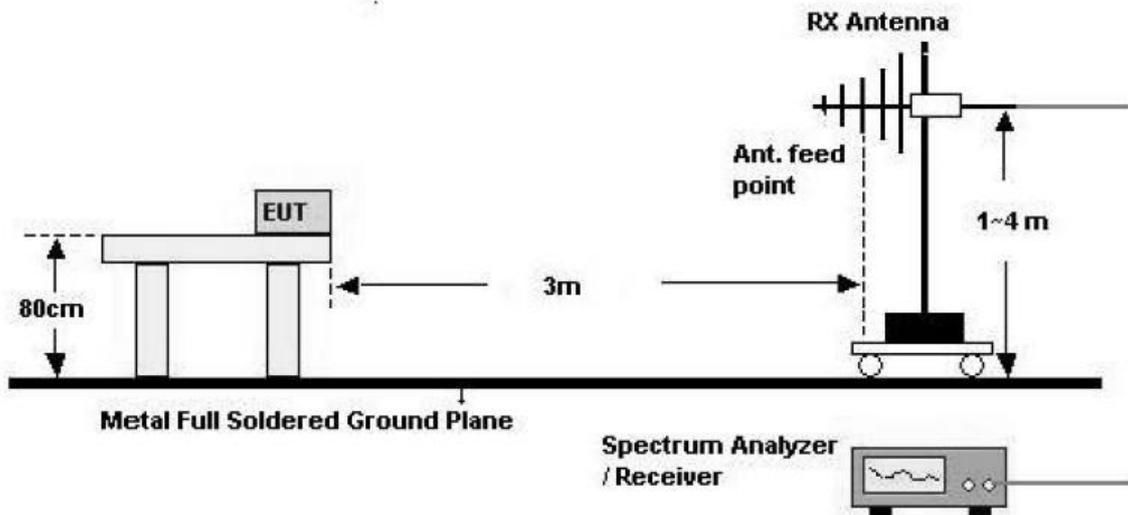

Above 1 GHz

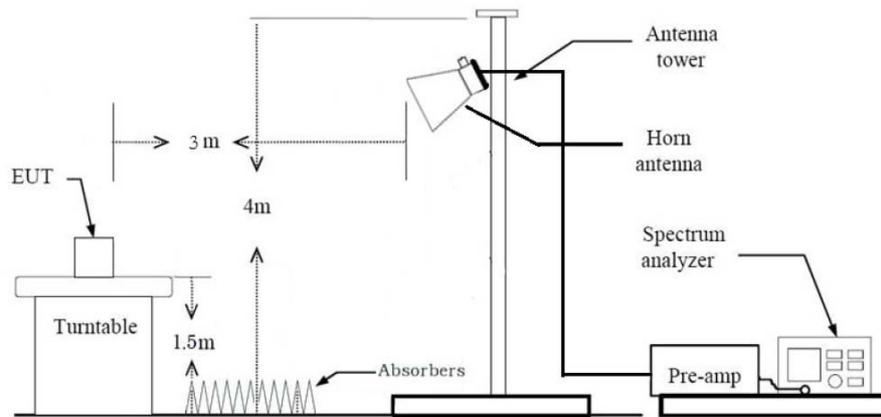

Test Procedure of Radiated spurious emissions(Below 30 MHz)

1. The EUT was placed on a non-conductive table located on semi-anechoic chamber.
2. The loop antenna was placed at a location 3m from the EUT
3. The EUT is placed on a turntable, which is 0.8m above ground plane.
4. .We have done x, y, z planes in EUT and horizontal and vertical polarization and Parallel to the ground plane in detecting antenna.
5. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
6. Distance Correction Factor(0.009 MHz – 0.490 MHz) = $40\log(3\text{ m}/300\text{ m}) = - 80\text{ dB}$
Measurement Distance : 3 m
7. Distance Correction Factor(0.490 MHz – 30 MHz) = $40\log(3\text{ m}/30\text{ m}) = - 40\text{ dB}$
Measurement Distance : 3 m
8. Spectrum Setting
 - Frequency Range = 9 kHz ~ 30 MHz
 - Detector = Peak
 - Trace = Maxhold
 - RBW = 9 kHz
 - VBW $\geq 3 \times$ RBW
9. Total = Reading Value + Antenna Factor(A.F) + Cable Loss(C.L) + Distance Factor(D.F)
10. Measurement value only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.

KDB 414788 OFS and Chamber Correlation Justification

Base on FCC 15.31 (f) (2): measurements may be performed at a distance closer than that specified in the regulations; however, an attempt should be made to avoid making measurements in the near field.

OFS and chamber correlation testing had been performed and chamber measured test result is the worst case test result.

Test Procedure of Radiated spurious emissions(Below 1GHz)

1. The EUT was placed on a non-conductive table located on semi-anechoic chamber.
2. The EUT is placed on a turntable, which is 0.8m above ground plane.
3. The Hybrid antenna was placed at a location 3m from the EUT, which is varied from 1m to 4m to find out the highest emissions.
4. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
5. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.

6. Spectrum Setting

(1) Measurement Type(Peak):

- Measured Frequency Range : 30 MHz – 1 GHz
- Detector = Peak
- Trace = Maxhold
- RBW = 100 kHz
- VBW \geq 3 x RBW

(2) Measurement Type(Quasi-peak):

- Measured Frequency Range : 30 MHz – 1 GHz
- Detector = Quasi-Peak
- RBW = 120 kHz

※In general, (1) is used mainly

7. Total = Reading Value + Antenna Factor(A.F) + Cable Loss(C.L)
8. Measurement value only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.

Test Procedure of Radiated spurious emissions (Above 1 GHz)

1. The EUT is placed on a turntable, which is 1.5 m above ground plane.
2. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
3. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
4. EUT is set 3 m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emissions.
5. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
6. Each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
7. The unit was tested with its standard battery.

8. Spectrum Setting

(1) Measurement Type (Peak, G.5 in KDB 789033 v02r01):

- RBW = 1 MHz
- VBW \geq 3 MHz
- Detector = Peak
- Sweep Time = auto
- Trace mode = max hold
- Allow sweeps to continue until the trace stabilizes.

Note that if the transmission is not continuous, the time required for the trace to stabilize will increase by a factor of approximately $1/x$, where x is the duty cycle.

(2) Measurement Type (Average, G.6.c in KDB 789033 v02r01):

- RBW = 1 MHz
- VBW \geq 3 MHz
- The analyzer is set to linear detector mode.
- Averaging type = power (*i.e.*, RMS)
- Sweep time = auto.
- Trace mode = average (at least 100 traces).
- If a specific emission is demonstrated to be continuous (100% duty cycle) rather than turning on and off with the transmit cycle, no duty cycle correction is required for that emission.

9. Measurement value only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor
10. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency
11. Distance extrapolation factor = $20\log(\text{test distance} / \text{specific distance})$ (dB)
12. Total = Reading Value + Antenna Factor(A.F) + Cable Loss(C.L) - Amp Gain(G) + Distance Factor(D.F)

Test Procedure of Radiated Restricted Band Edge

1. The EUT is placed on a turntable, which is 1.5 m above ground plane.
2. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
3. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
4. EUT is set 3 m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emissions.
5. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
6. Each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
7. The unit was tested with its standard battery.
8. Spectrum Setting
 - (1) Measurement Type(Peak, G.5 in KDB 789033 v02r01):
 - RBW = 1 MHz
 - VBW \geq 3 MHz
 - Detector = Peak
 - Sweep Time = auto
 - Trace mode = max hold
 - Allow sweeps to continue until the trace stabilizes.
Note that if the transmission is not continuous, the time required for the trace to stabilize will increase by a factor of approximately $1/x$, where x is the duty cycle.
 - (2) Measurement Type (Average, G.6.c in KDB 789033 v02r01):
 - RBW = 1 MHz
 - VBW \geq 3 MHz
 - The analyzer is set to linear detector mode.
 - Averaging type = power (*i.e.*, RMS)
 - Sweep time = auto.
 - Trace mode = average (at least 100 traces).
 - If a specific emission is demonstrated to be continuous (100% duty cycle) rather than turning on and off with the transmit cycle, no duty cycle correction is required for that emission.
9. Measured Frequency Range :
 - 4500MHz ~ 5150MHz

- 5350MHz ~ 5460MHz
- 5460MHz ~ 5470MHz
- (75 MHz or more below the 5725MHz) ~ 5725MHz
- 5850MHz ~ (75 MHz or more above the 5850MHz)

10. Distance extrapolation factor = $20\log(\text{test distance} / \text{specific distance})$ (dB)

11. Total = Reading Value + Antenna Factor(A.F) + Cable Loss(C.L) - Amp Gain(G) + Attenuator
+ Distance Factor(D.F)

8.8. Receiver Spurious Emissions

Limit


Frequency (MHz)	Field Strength (uV/m)	Measurement Distance (m)
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

Note:

Measurements for compliance with the limits in table may be performed at distances other than 3 metres.

Test Configuration

30 MHz - 1 GHz

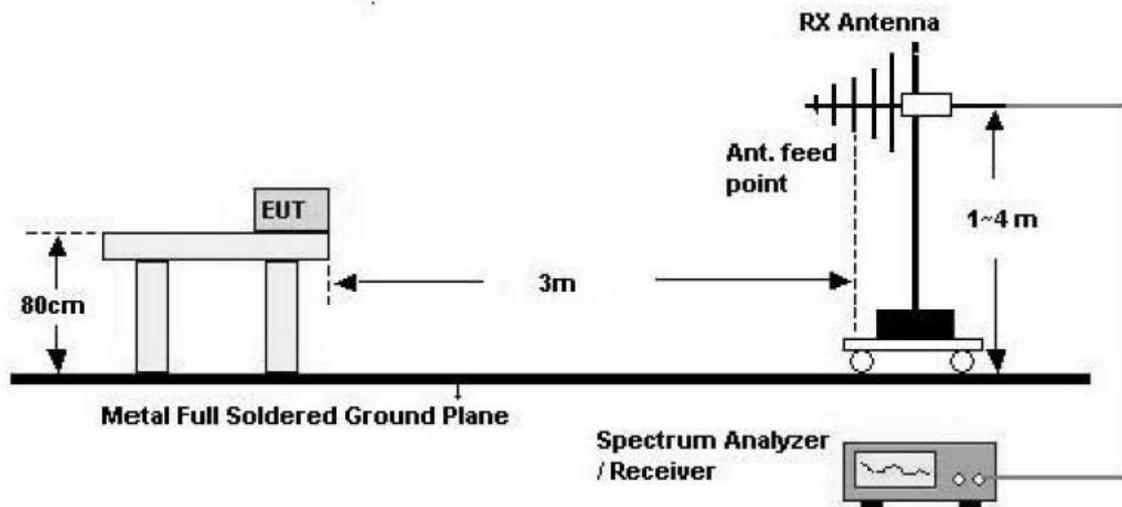

Test Procedure of Receiver Spurious Emissions (Below 1GHz)

1. The EUT was placed on a non-conductive table located on semi-anechoic chamber.
2. The EUT is placed on a turntable, which is 0.8m above ground plane.
3. The Hybrid antenna was placed at a location 3m from the EUT, which is varied from 1m to 4m to find out the highest emissions.
4. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
5. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.

6. Spectrum Setting

(1) Measurement Type(Peak):


- Measured Frequency Range : 30 MHz – 1 GHz
- Detector = Peak
- Trace = Maxhold
- RBW = 100 kHz
- VBW $\geq 3 \times$ RBW

(2) Measurement Type(Quasi-peak):

- Measured Frequency Range : 30 MHz – 1 GHz
- Detector = Quasi-Peak
- RBW = 120 kHz

7. Total = Reading Value + Antenna Factor(A.F) + Cable Loss(C.L)

Above 1 GHz

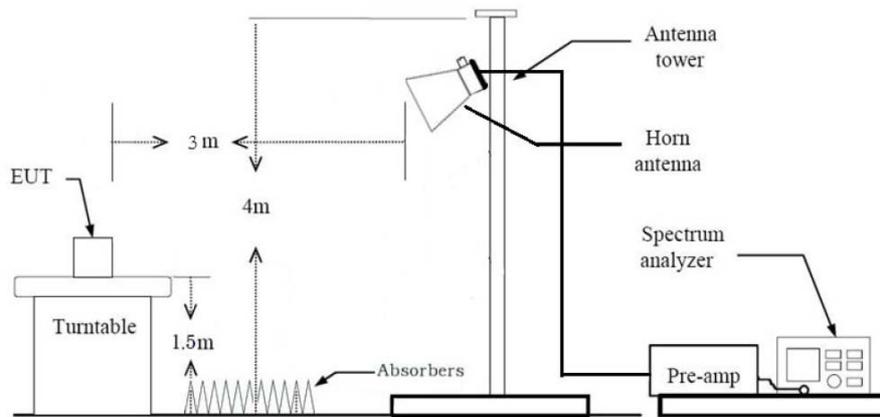

Test Procedure of Radiated spurious emissions (Above 1 GHz)

1. The EUT is placed on a turntable, which is 1.5 m above ground plane.
2. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
3. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
4. EUT is set 3 m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emissions.
5. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
6. Each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
7. The unit was tested with its standard battery.
8. Spectrum Setting
 - (1) Measurement Type(Peak):
 - Measured Frequency Range : 1 GHz – 25 GHz
 - Detector = Peak
 - Trace = Maxhold
 - RBW = 1 MHz
 - VBW $\geq 3 \times$ RBW
 - (2) Measurement Type(Average):
 - We performed using a reduced video BW method was done with the analyzer in linear mode
 - Measured Frequency Range : 1 GHz – 25 GHz
 - Detector = Peak
 - Trace = Maxhold
 - RBW = 1 MHz
 - VBW $\geq 1/\tau$ Hz, where τ = pulse width in seconds

The actual setting value of VBW = 1 kHz

9. Measurement value only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
10. Distance extrapolation factor = $20\log(\text{test distance} / \text{specific distance})$ (dB)
11. Total = Reading Value + Antenna Factor(A.F) + Cable Loss(C.L) - Amp Gain(G) + Distance Factor(D.F)

8.9. Worst case configuration and mode

Radiated test

1. All modes of operation were investigated and the worst case configuration results are reported.
2. All configurations of antenna were investigated and the worst case configuration results are reported.
 - Mode : Ant1(SISO), Ant2(SISO), Ant1+Ant2(CDD,SDM)
 - Worstcase : Ant1+Ant2(CDD)
3. EUT Axis
 - Radiated Spurious Emissions : Y
 - Radiated Restricted Band Edge : X
4. All datarate of operation were investigated and the worst case datarate results are reported
 - 802.11a : 6Mbps
 - 802.11n : MCS0
 - 802.11ac : MCS0
5. All position of loop antenna were investigated and the test result is a no critical peak found at all positions.
 - Position : Horizontal, Vertical, Parallel to the ground plane

AC Power line Conducted Emissions

1. All modes of operation were investigated and the worst case configuration results are reported.
 - Mode : Stand alone + Notebook

Conducted test

1. All datarate of operation were investigated and the worst case datarate results are reported.
2. SISO & MIMO were tested and the all case results are reported.
 - Mode : Ant1(SISO), Ant2(SISO), Ant1+Ant2(CDD)

9. SUMMARY OF TEST RESULTS

FCC

Test Description	FCC Part Section(s)	Test Limit	Test Condition	Test Result
26dB Bandwidth	§ 15.407 (for Power Measurement)	N/A	Conducted	PASS
6 dB Bandwidth	§ 15.407(e)	>500 kHz (5725-5850 MHz)		PASS
Maximum Conducted Output Power	§ 15.407(a)(1)	< 250 mW(5150-5250 MHz) < 250 mW or 11+10 log log ₁₀ (BW) dBm (5250-5350 MHz) < 250 mW or 11+10 log log ₁₀ (BW) dBm (5470-5725 MHz) <1 W(5725-5850 MHz)		PASS
Peak Power Spectral Density	§ 15.407(a)(1),(5)	<11 dBm/ MHz (5150-5250 MHz) <11 dBm/ MHz (5250-5350 MHz) <11 dBm/ MHz (5470-5725 MHz) <30 dBm/500 kHz(5725-5850 MHz)		PASS
Frequency Stability	§ 15.407(g) § 2.1055	Maintained within the band		PASS
AC Conducted Emissions 150 kHz-30 MHz	15.207	<FCC 15.207 limits		PASS
Undesirable Emissions	§ 15.407(b)	<-27 dBm/MHz EIRP (UNII1, 2A, 2C) cf. Section 8.7 (UNII 3)		PASS
General Field Strength Limits(Restricted Bands and Radiated Emission Limits)	15.205, 15.407(b)(5), (6)	Emissions in restricted bands must meet the radiated limits detailed in 15.209	Radiated	PASS

IC

Test Description	IC Part Section(s)	Test Limit	Test Condition	Test Result
99% Bandwidth	RSS-GEN, 6.7	N/A	CONDUCTED	PASS
6 dB Bandwidth	RSS-247, 6.2.4.1	> 500 kHz (5725~5850 MHz)		PASS
Maximum Conducted Output Power,	RSS-247, 6.2	< 250 mW or $11+10 \log_{10}$ (BW) dBm (5470-5600, 5650-5725 MHz) Whichever power is less		PASS
	RSS-247, 6.2.4.1	<1 W (5725-5850 MHz)		
Maximum e.i.r.p	RSS-247, 6.2	< 200 mW or $10+10 \log_{10}$ (BW) dBm (5150-5250 MHz) < 1 W or $17+10 \log_{10}$ (BW) dBm (5250-5350 MHz) < 1 W or $17+10 \log_{10}$ (BW) dBm (5470-5725 MHz) Whichever power is less		PASS
Power Spectral Density	RSS-247 6.2	<10 dBm/ MHz(e.i.r.p.) (5150-5250 MHz) <11 dBm/MHz(Conducted) (5250-5350 MHz, 5470-5600 MHz, 5650-5725 MHz)		PASS
	RSS-247, 6.2.4.1	<30 dBm/500 kHz(Conducted) (5725-5850 MHz)		
Frequency Stability	RSS-GEN 8.11	should be kept within at least the central 80% of its permitted operating frequency band in order to minimize the possibility of out-of-band operation.		PASS
AC Conducted Emissions 150 kHz-30 MHz	RSS-GEN, 8.8	RSS-GEN section 8.8 table 4		PASS
Undesirable Emissions	RSS-247, 6.2.1.2	26 dBc at 5250~5350 MHz (5150~5350 MHz)	PASS	
	RSS-247, 6.2	<-27 dBm/ MHz EIRP (5150-5350 MHz, 5470-5725 MHz)	PASS	
	RSS-247, 6.2.4.2	cf. Section 9.8.1 (UNII 3)		
General Field Strength Limits(Restricted Bands and Radiated Emission Limits)	RSS-Gen, 8.9 RSS-Gen, 8.10	RSS-Gen section 8.9 table 5, 6 section 8.10 table 7	RADIATED	PASS
Receiver Spurious Emissions	RSS-GEN, 5 RSS-GEN, 7.3	RSS-GEN section 7.3 table 3	PASS	

10. TEST RESULT

10.1 26DB BANDWIDTH & 99 % BANDWIDTH

[ANT1]

802.11a Mode		26dB Bandwidth [MHz]	99% bandwidth [MHz]
Frequency [MHz]	Channel No.		
5180	36	19.80	16.447
5200	40	19.93	16.493
5240	48	19.58	16.395
5260	52	19.82	16.435
5300	60	19.98	16.433
5320	64	19.90	16.450
5500	100	20.34	16.494
5580	116	19.86	16.467
5720	144	19.95	16.487
5745	149	19.98	16.554
5785	157	20.02	16.483
5825	165	20.13	16.535

802.11n(HT20) Mode		26dB Bandwidth [MHz]	99% bandwidth [MHz]
Frequency [MHz]	Channel No.		
5180	36	20.13	17.614
5200	40	20.26	17.564
5240	48	20.15	17.592
5260	52	20.03	17.568
5300	60	20.12	17.582
5320	64	20.30	17.590
5500	100	20.28	17.615
5580	116	20.13	17.597
5720	144	20.26	17.625
5745	149	20.17	17.639
5785	157	20.85	17.677
5825	165	20.09	17.654

802.11n(HT40) Mode		26dB Bandwidth [MHz]	99% bandwidth [MHz]
Frequency [MHz]	Channel No.		
5190	38	40.52	36.179
5230	46	40.50	36.174
5270	54	40.46	36.146
5310	62	40.35	36.155
5510	102	40.43	36.114
5550	110	40.63	36.221
5710	142	40.46	36.235
5755	151	41.63	36.246
5795	159	67.28	36.592

802.11ac(VHT20) Mode		26dB Bandwidth [MHz]	99% bandwidth [MHz]
Frequency [MHz]	Channel No.		
5180	36	20.34	17.590
5200	40	20.24	17.582
5240	48	20.03	17.577
5260	52	20.20	17.582
5300	60	20.04	17.598
5320	64	20.06	17.604
5500	100	20.10	17.592
5580	116	20.16	17.578
5720	144	20.05	17.609
5745	149	20.02	17.606
5785	157	20.37	17.669
5825	165	20.30	17.638

802.11ac(VHT40) Mode		26dB Bandwidth [MHz]	99% bandwidth [MHz]
Frequency [MHz]	Channel No.		
5190	38	40.29	36.153
5230	46	40.25	36.151
5270	54	40.77	36.115
5310	62	40.47	36.068
5510	102	40.45	36.097
5550	110	40.69	36.234
5710	142	40.99	36.142
5755	151	40.77	36.282
5795	159	68.24	36.652

802.11ac(VHT80) Mode		26dB Bandwidth [MHz]	99% bandwidth [MHz]
Frequency [MHz]	Channel No.		
5210	42	80.77	75.710
5290	58	80.93	75.653
5530	106	81.15	75.713
5690	138	86.91	75.726
5775	155	114.73	75.972

[ANT2]

802.11a Mode		26dB Bandwidth [MHz]	99% bandwidth [MHz]
Frequency [MHz]	Channel No.		
5180	36	19.82	16.437
5200	40	19.68	16.445
5240	48	19.74	16.481
5260	52	19.62	16.447
5300	60	20.04	16.420
5320	64	20.00	16.478
5500	100	19.93	16.470
5580	116	19.82	16.418
5720	144	19.94	16.500
5745	149	19.91	16.454
5785	157	19.79	16.471
5825	165	20.00	16.475

802.11n(HT20) Mode		26dB Bandwidth [MHz]	99% bandwidth [MHz]
Frequency [MHz]	Channel No.		
5180	36	20.06	17.568
5200	40	20.07	17.579
5240	48	20.11	17.576
5260	52	20.12	17.586
5300	60	20.11	17.594
5320	64	20.23	17.611
5500	100	20.35	17.646
5580	116	20.13	17.635
5720	144	20.20	17.621
5745	149	20.00	17.607
5785	157	20.17	17.611
5825	165	20.22	17.628

802.11n(HT40) Mode		26dB Bandwidth [MHz]	99% bandwidth [MHz]
Frequency [MHz]	Channel No.		
5190	38	40.66	36.129
5230	46	40.19	36.181
5270	54	40.23	36.139
5310	62	40.74	36.109
5510	102	40.50	36.089
5550	110	40.37	36.165
5710	142	40.35	36.181
5755	151	40.65	36.187
5795	159	48.57	36.406

802.11ac(VHT20) Mode		26dB Bandwidth [MHz]	99% bandwidth [MHz]
Frequency [MHz]	Channel No.		
5180	36	20.11	17.580
5200	40	20.17	17.565
5240	48	20.24	17.581
5260	52	20.17	17.575
5300	60	20.03	17.568
5320	64	19.95	17.598
5500	100	20.16	17.613
5580	116	20.25	17.607
5720	144	20.21	17.610
5745	149	20.60	17.611
5785	157	20.35	17.599
5825	165	20.39	17.609

802.11ac(VHT40) Mode		26dB Bandwidth [MHz]	99% bandwidth [MHz]
Frequency [MHz]	Channel No.		
5190	38	40.57	36.145
5230	46	41.07	36.210
5270	54	40.50	36.218
5310	62	40.27	36.103
5510	102	40.51	36.096
5550	110	40.53	36.098
5710	142	40.53	36.169
5755	151	40.72	36.222
5795	159	53.76	36.425


802.11ac(VHT80) Mode		26dB Bandwidth [MHz]	99% bandwidth [MHz]
Frequency [MHz]	Channel No.		
5210	42	80.97	75.688
5290	58	81.35	75.765
5530	106	81.46	75.701
5690	138	83.27	75.732
5775	155	112.77	75.967

[ANT1]

▣ Test Plots(802.11a)

Note:


In order to simplify the report, attached plots were only the most wide channel.

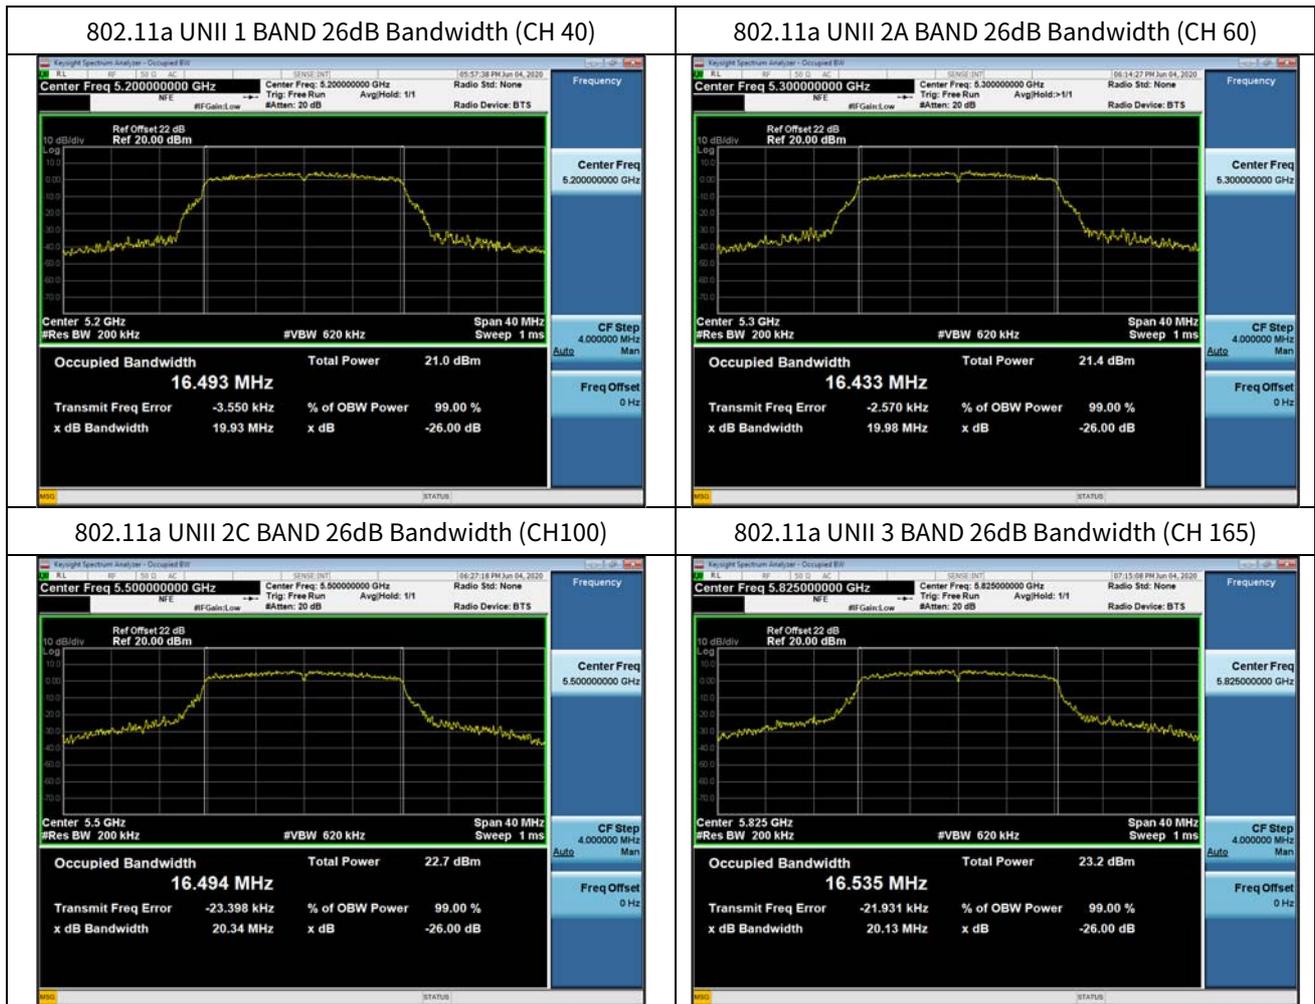

▣ Test Plots(802.11n(HT20))

Note:

In order to simplify the report, attached plots were only the most wide channel.

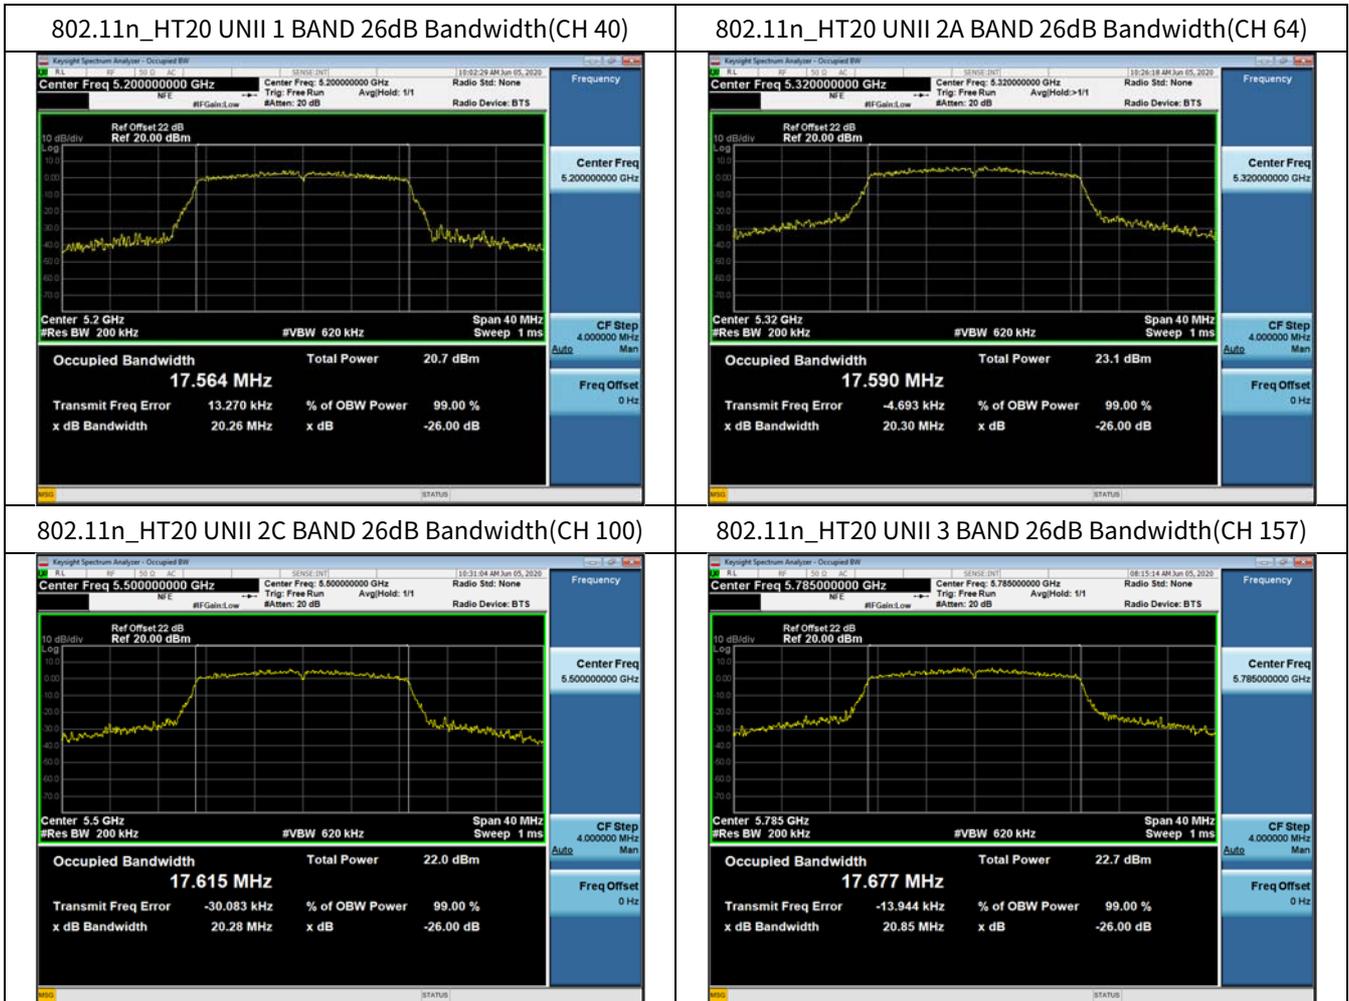

▣ Test Plots(802.11n(HT40))

Note:

In order to simplify the report, attached plots were only the most wide channel.



▣ Test Plots(802.11ac(VHT20))

Note:


In order to simplify the report, attached plots were only the most wide channel.



▣ Test Plots(802.11ac(VHT40))

Note:


In order to simplify the report, attached plots were only the most wide channel.

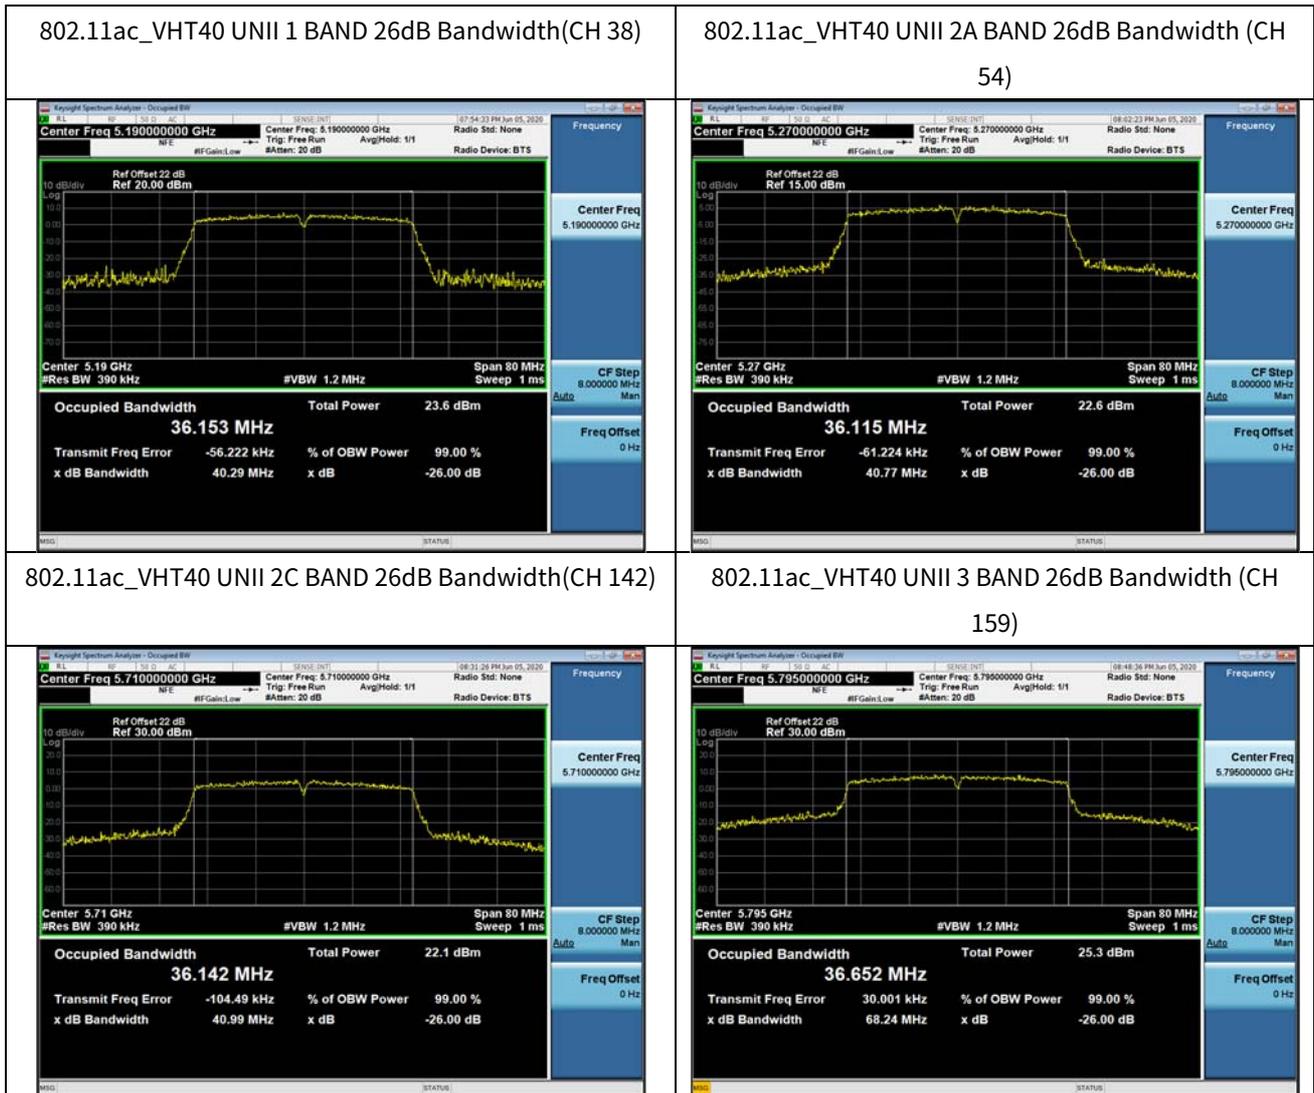

▣ Test Plots(802.11ac(VHT80))

Note:

In order to simplify the report, attached plots were only the most wide channel.

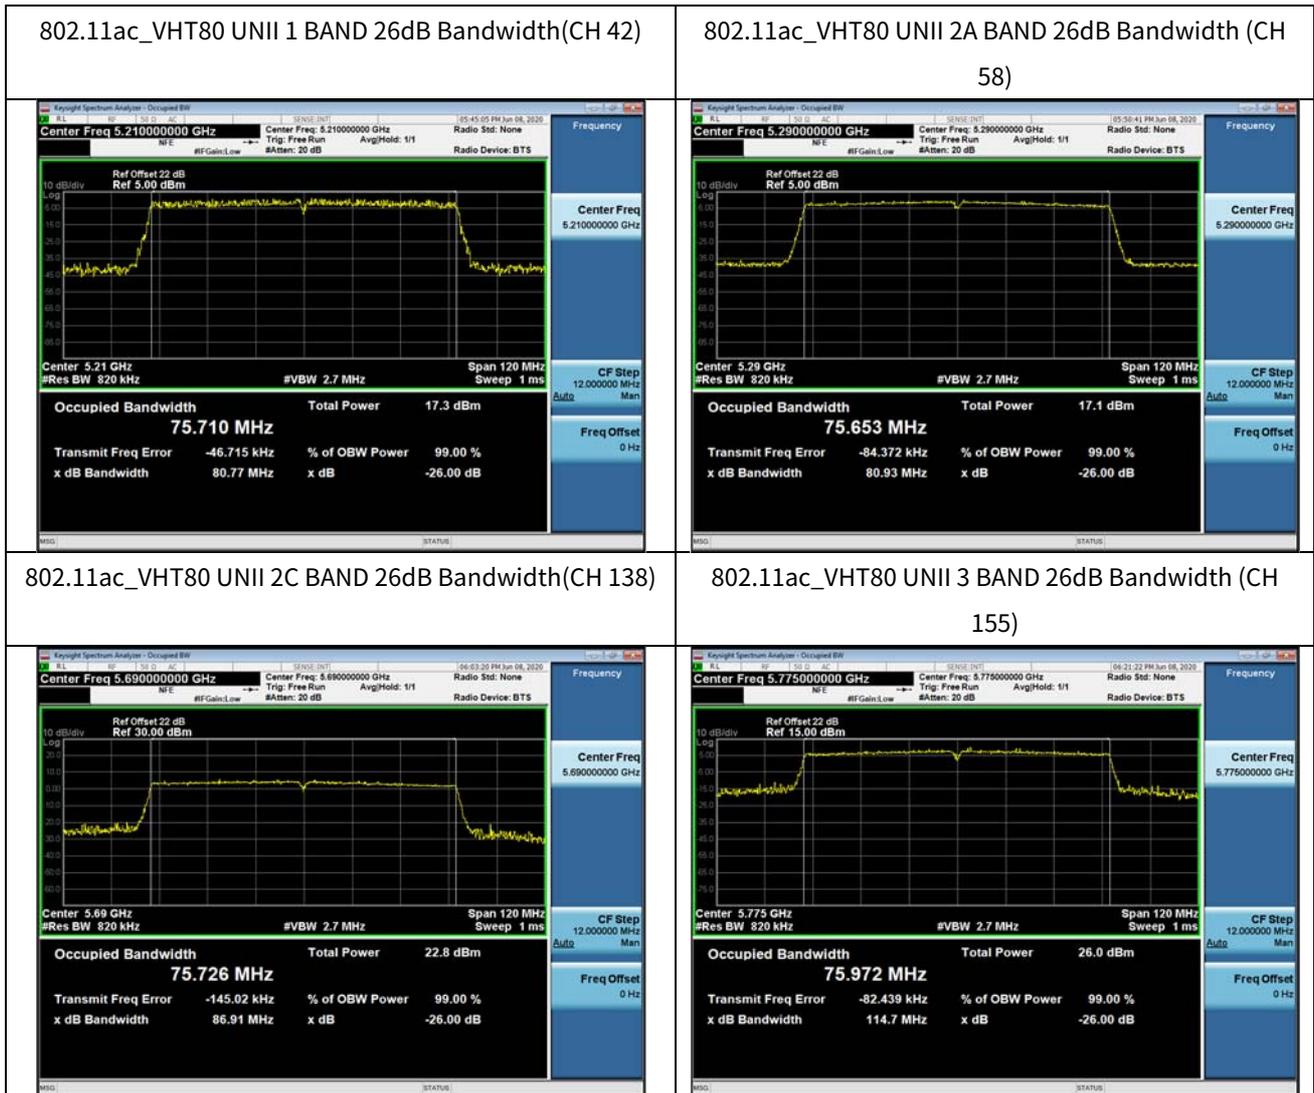


[ANT2]

▣ Test Plots(802.11a)

Note:

In order to simplify the report, attached plots were only the most wide channel.

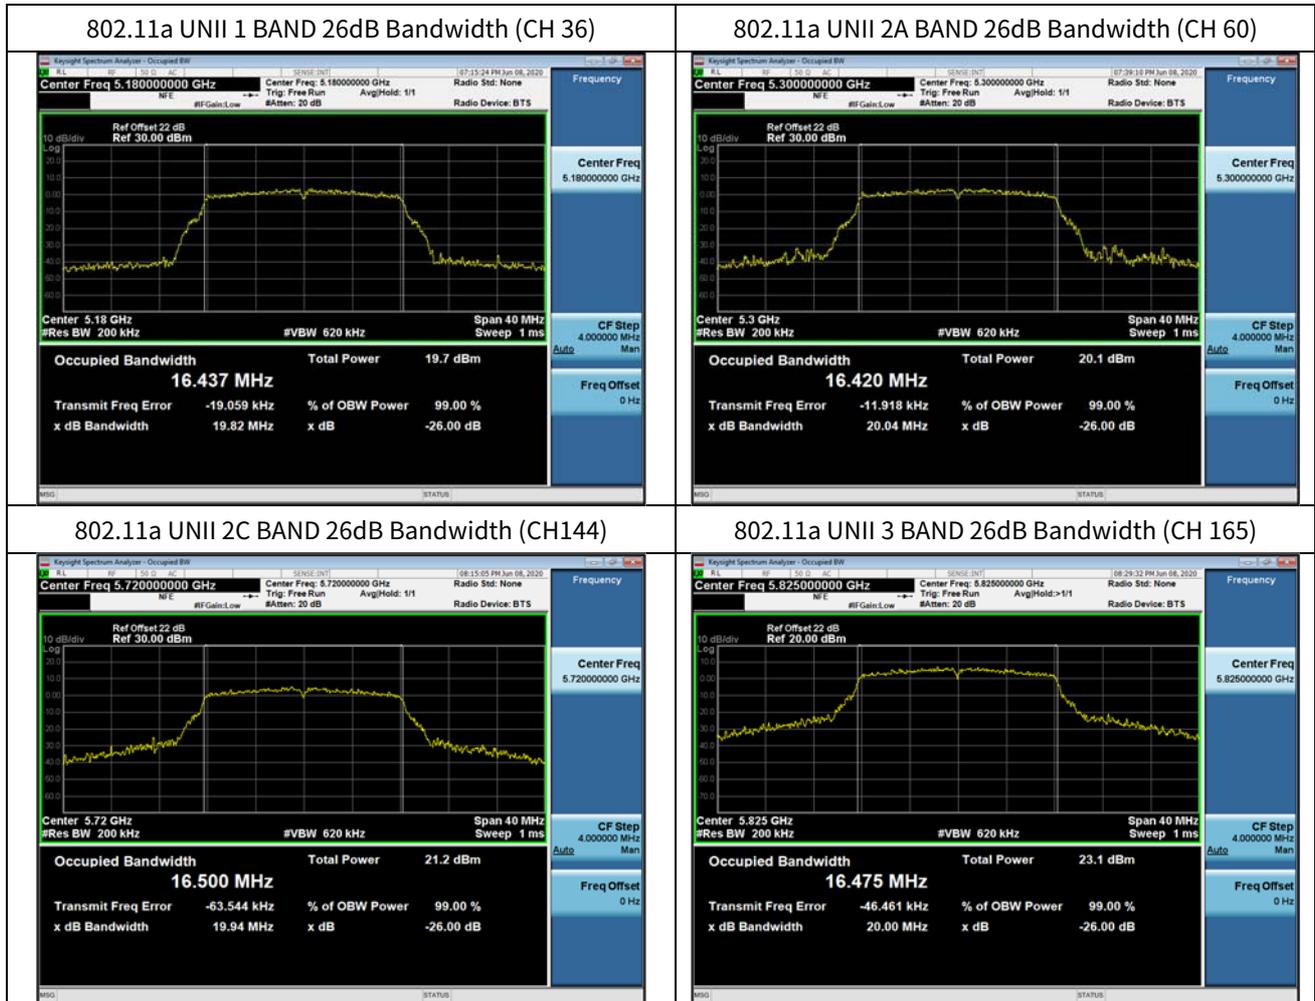

▣ Test Plots(802.11n(HT20))

Note:


In order to simplify the report, attached plots were only the most wide channel.



▣ Test Plots(802.11n(HT40))

Note:


In order to simplify the report, attached plots were only the most wide channel.

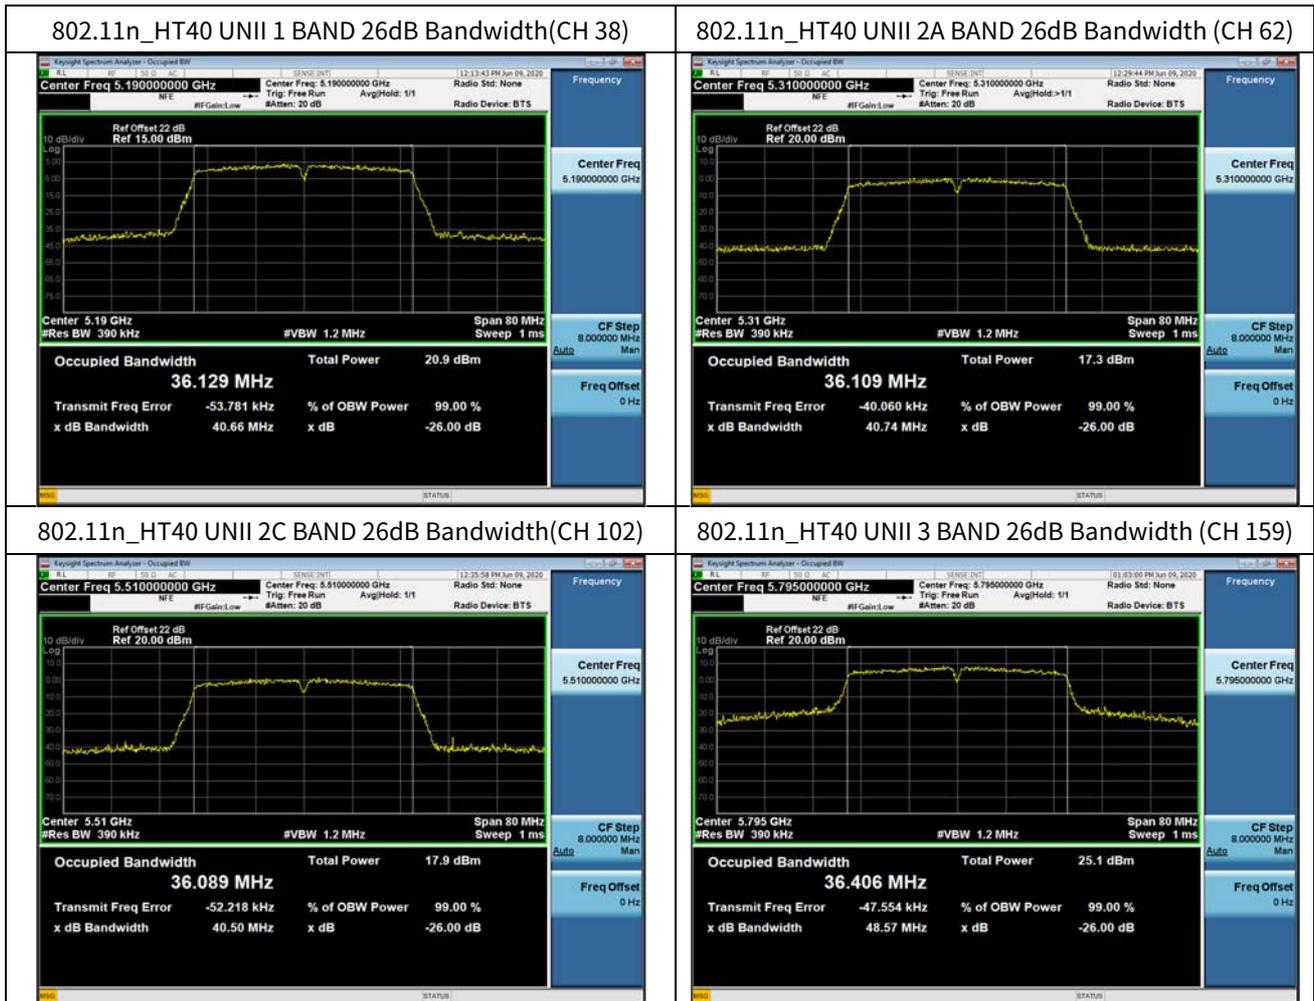

▣ Test Plots(802.11ac(VHT20))

Note:


In order to simplify the report, attached plots were only the most wide channel.

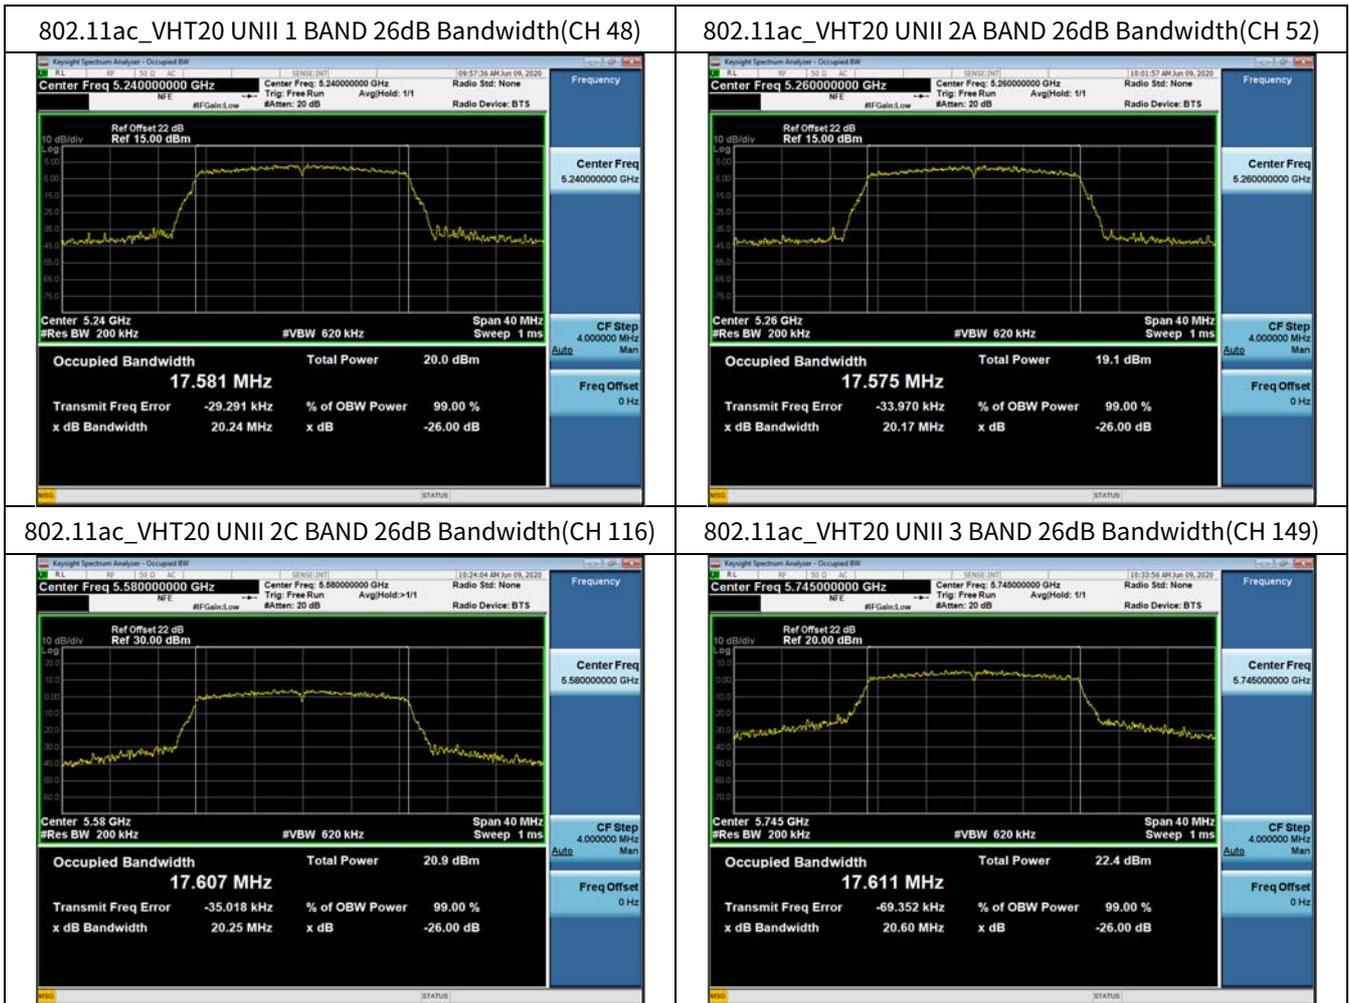

▣ Test Plots(802.11ac(VHT40))

Note:


In order to simplify the report, attached plots were only the most wide channel.

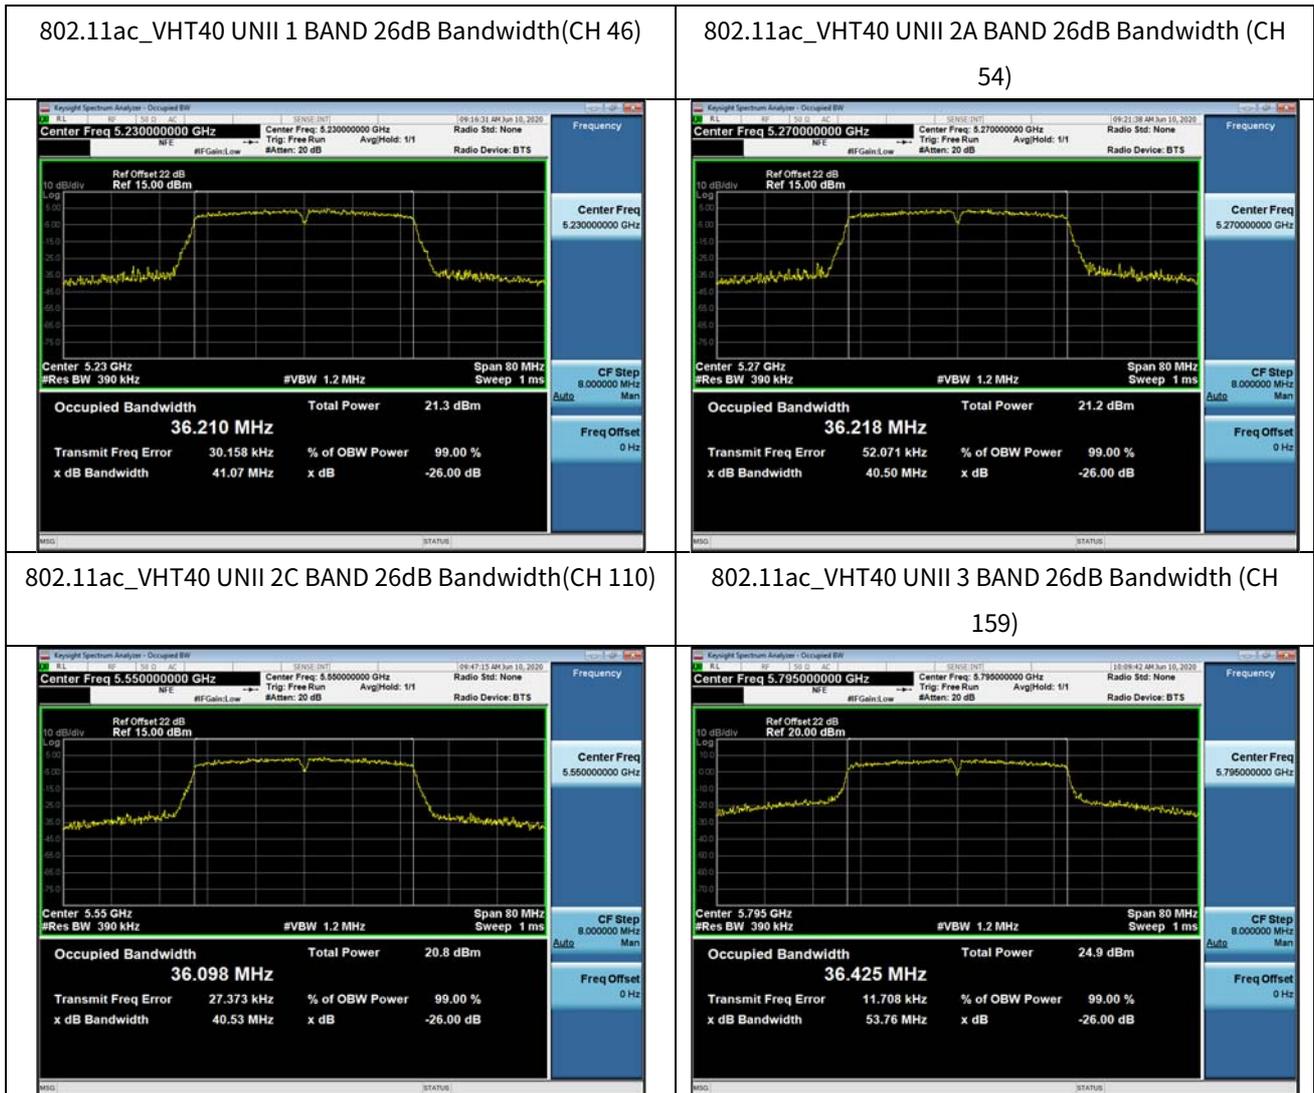

▣ Test Plots(802.11ac(VHT80))

Note:

In order to simplify the report, attached plots were only the most wide channel.

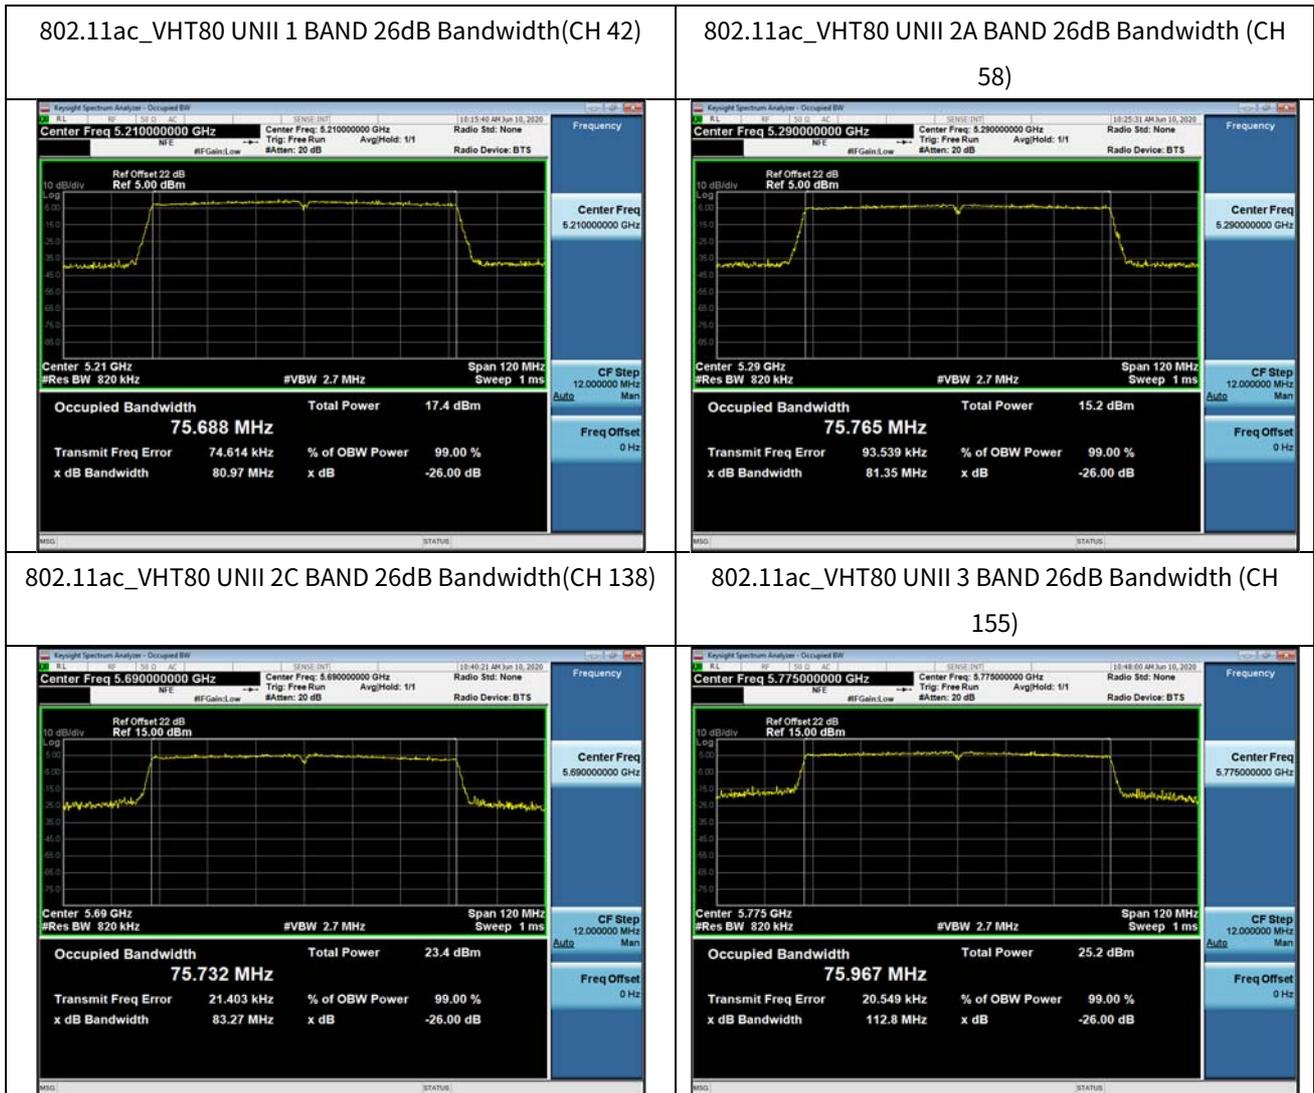

10.2 6DB BANDWIDTH

[ANT1]

802.11a Mode		Measured Bandwidth [MHz]	Limit [MHz]	Pass / Fail
Frequency [MHz]	Channel No.			
5745	149	16.38	> 0.5	Pass
5785	157	16.38	> 0.5	Pass
5825	165	16.39	> 0.5	Pass

802.11n(HT20) Mode		Measured Bandwidth [MHz]	Limit [MHz]	Pass / Fail
Frequency [MHz]	Channel No.			
5745	149	17.37	> 0.5	Pass
5785	157	17.57	> 0.5	Pass
5825	165	17.60	> 0.5	Pass

802.11n(HT40) Mode		Measured Bandwidth [MHz]	Limit [MHz]	Pass / Fail
Frequency [MHz]	Channel No.			
5755	151	36.44	> 0.5	Pass
5795	159	36.43	> 0.5	Pass

802.11ac(VHT20) Mode		Measured Bandwidth [MHz]	Limit [MHz]	Pass / Fail
Frequency [MHz]	Channel No.			
5745	149	17.62	> 0.5	Pass
5785	157	17.61	> 0.5	Pass
5825	165	17.46	> 0.5	Pass

802.11ac(VHT40) Mode		Measured Bandwidth [MHz]	Limit [MHz]	Pass / Fail
Frequency [MHz]	Channel No.			
5755	151	36.47	> 0.5	Pass
5795	159	36.49	> 0.5	Pass

802.11ac(VHT80) Mode		Measured Bandwidth [MHz]	Limit [MHz]	Pass / Fail
Frequency [MHz]	Channel No.			
5775	155	76.58	> 0.5	Pass

[ANT2]

802.11a Mode		Measured Bandwidth [MHz]	Limit [MHz]	Pass / Fail
Frequency [MHz]	Channel No.			
5745	149	16.36	> 0.5	Pass
5785	157	16.39	> 0.5	Pass
5825	165	16.36	> 0.5	Pass

802.11n(HT20) Mode		Measured Bandwidth [MHz]	Limit [MHz]	Pass / Fail
Frequency [MHz]	Channel No.			
5745	149	17.62	> 0.5	Pass
5785	157	17.58	> 0.5	Pass
5825	165	17.59	> 0.5	Pass

802.11n(HT40) Mode		Measured Bandwidth [MHz]	Limit [MHz]	Pass / Fail
Frequency [MHz]	Channel No.			
5755	151	36.48	> 0.5	Pass
5795	159	36.42	> 0.5	Pass

802.11ac(VHT20) Mode		Measured Bandwidth [MHz]	Limit [MHz]	Pass / Fail
Frequency [MHz]	Channel No.			
5745	149	17.62	> 0.5	Pass
5785	157	17.61	> 0.5	Pass
5825	165	17.62	> 0.5	Pass


802.11ac(VHT40) Mode		Measured Bandwidth [MHz]	Limit [MHz]	Pass / Fail
Frequency [MHz]	Channel No.			
5755	151	36.49	> 0.5	Pass
5795	159	36.47	> 0.5	Pass

802.11ac(VHT80) Mode		Measured Bandwidth [MHz]	Limit [MHz]	Pass / Fail
Frequency [MHz]	Channel No.			
5775	155	76.59	> 0.5	Pass

[ANT1]

 Test Plots


Note: In order to simplify the report, attached plots were only the most narrow channel.

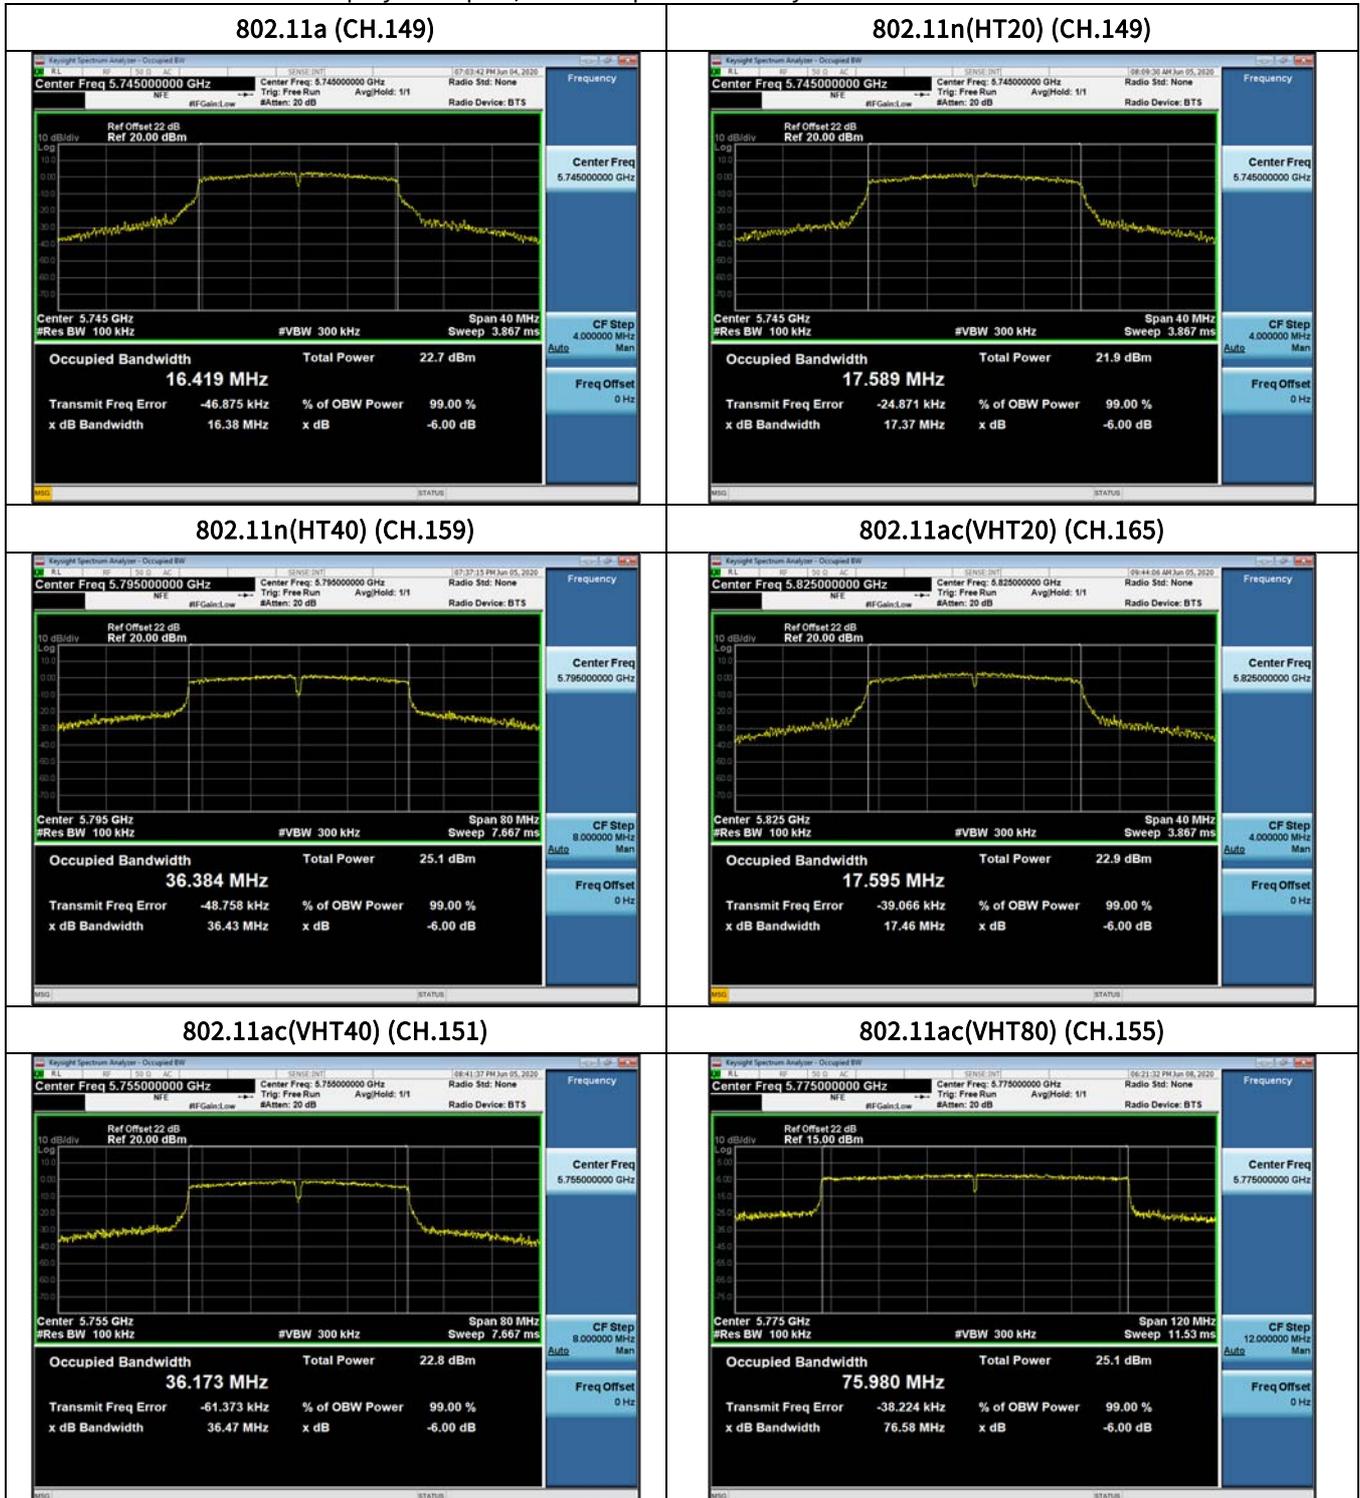

[ANT2]

 Test Plots

Note: In order to simplify the report, attached plots were only the most narrow channel.

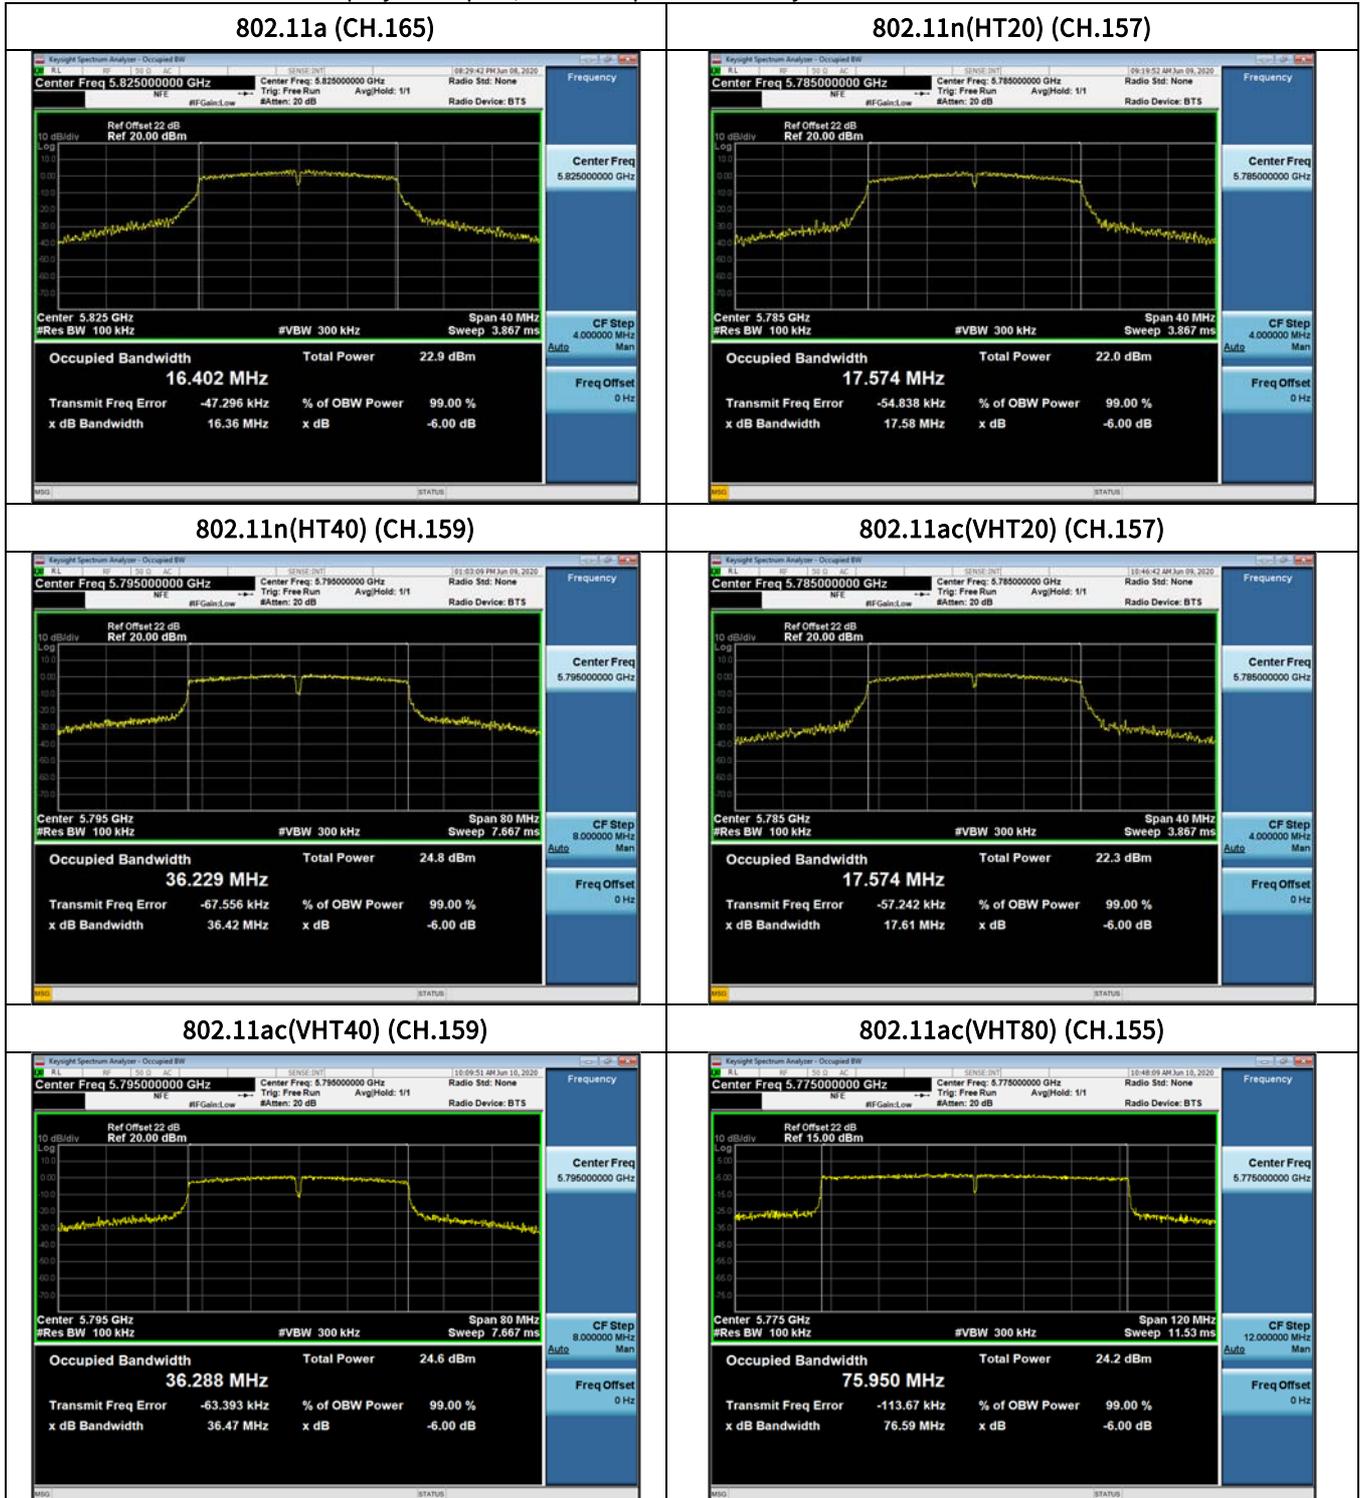

99 % Bandwidth measurement(IC)

[ANT1]

802.11a Mode		Measured Bandwidth [MHz]
Frequency [MHz]	Channel No.	
5180	36	16.694
5200	40	16.725
5240	48	16.632
5260	52	16.807
5300	60	16.737
5320	64	16.847
5500	100	16.818
5580	116	16.845
5720	144	16.848
5745	149	16.844
5785	157	16.837
5825	165	16.820

802.11n(HT20) Mode		Measured Bandwidth [MHz]
Frequency [MHz]	Channel No.	
5180	36	17.776
5200	40	17.752
5240	48	17.784
5260	52	17.767
5300	60	17.748
5320	64	17.820
5500	100	17.764
5580	116	17.763
5720	144	17.887
5745	149	17.797
5785	157	17.842
5825	165	17.889

802.11n(HT40) Mode		Measured Bandwidth [MHz]
Frequency [MHz]	Channel No.	
5190	38	36.442
5230	46	36.427
5270	54	36.442
5310	62	36.319
5510	102	36.461
5550	110	36.369
5710	142	36.440
5755	151	36.569
5795	159	37.115

802.11ac(VHT20) Mode		Measured Bandwidth [MHz]
Frequency [MHz]	Channel No.	
5180	36	17.796
5200	40	17.769
5240	48	17.763
5260	52	17.837
5300	60	17.720
5320	64	17.776
5500	100	17.777
5580	116	17.768
5720	144	17.810
5745	149	17.825
5785	157	17.833
5825	165	17.798

802.11ac(VHT40) Mode		Measured Bandwidth [MHz]
Frequency [MHz]	Channel No.	
5190	38	36.412
5230	46	36.424
5270	54	36.444
5310	62	36.368
5510	102	36.416
5550	110	36.375
5710	142	36.561
5755	151	36.555
5795	159	37.065

802.11ac(VHT80) Mode		Measured Bandwidth [MHz]
Frequency [MHz]	Channel No.	
5210	42	75.831
5290	58	75.776
5530	106	75.831
5690	138	75.836
5775	155	76.194

[ANT2]

802.11a Mode		Measured Bandwidth [MHz]
Frequency [MHz]	Channel No.	
5180	36	16.780
5200	40	16.770
5240	48	16.800
5260	52	16.763
5300	60	16.802
5320	64	16.773
5500	100	16.785
5580	116	16.765
5720	144	16.821
5745	149	16.854
5785	157	16.853
5825	165	16.813

802.11n(HT20) Mode		Measured Bandwidth [MHz]
Frequency [MHz]	Channel No.	
5180	36	17.754
5200	40	17.779
5240	48	17.743
5260	52	17.759
5300	60	17.803
5320	64	17.834
5500	100	17.844
5580	116	17.781
5720	144	17.839
5745	149	17.766
5785	157	17.797
5825	165	17.784

802.11n(HT40) Mode		Measured Bandwidth [MHz]
Frequency [MHz]	Channel No.	
5190	38	36.374
5230	46	36.424
5270	54	36.353
5310	62	36.365
5510	102	36.421
5550	110	36.421
5710	142	36.418
5755	151	36.585
5795	159	36.704

802.11ac(VHT20) Mode		Measured Bandwidth [MHz]
Frequency [MHz]	Channel No.	
5180	36	17.776
5200	40	17.788
5240	48	17.806
5260	52	17.777
5300	60	17.728
5320	64	17.809
5500	100	17.808
5580	116	17.749
5720	144	17.850
5745	149	17.851
5785	157	17.789
5825	165	17.881

802.11ac(VHT40) Mode		Measured Bandwidth [MHz]
Frequency [MHz]	Channel No.	
5190	38	36.312
5230	46	36.385
5270	54	36.494
5310	62	36.406
5510	102	36.429
5550	110	36.418
5710	142	36.438
5755	151	36.586
5795	159	36.901


802.11ac(VHT80) Mode		Measured Bandwidth [MHz]
Frequency [MHz]	Channel No.	
5210	42	75.887
5290	58	75.728
5530	106	75.775
5690	138	75.870
5775	155	76.062

▣ Test Plots(802.11a)

[ANT1]

Note:


In order to simplify the report, attached plots were only the most narrow channel.

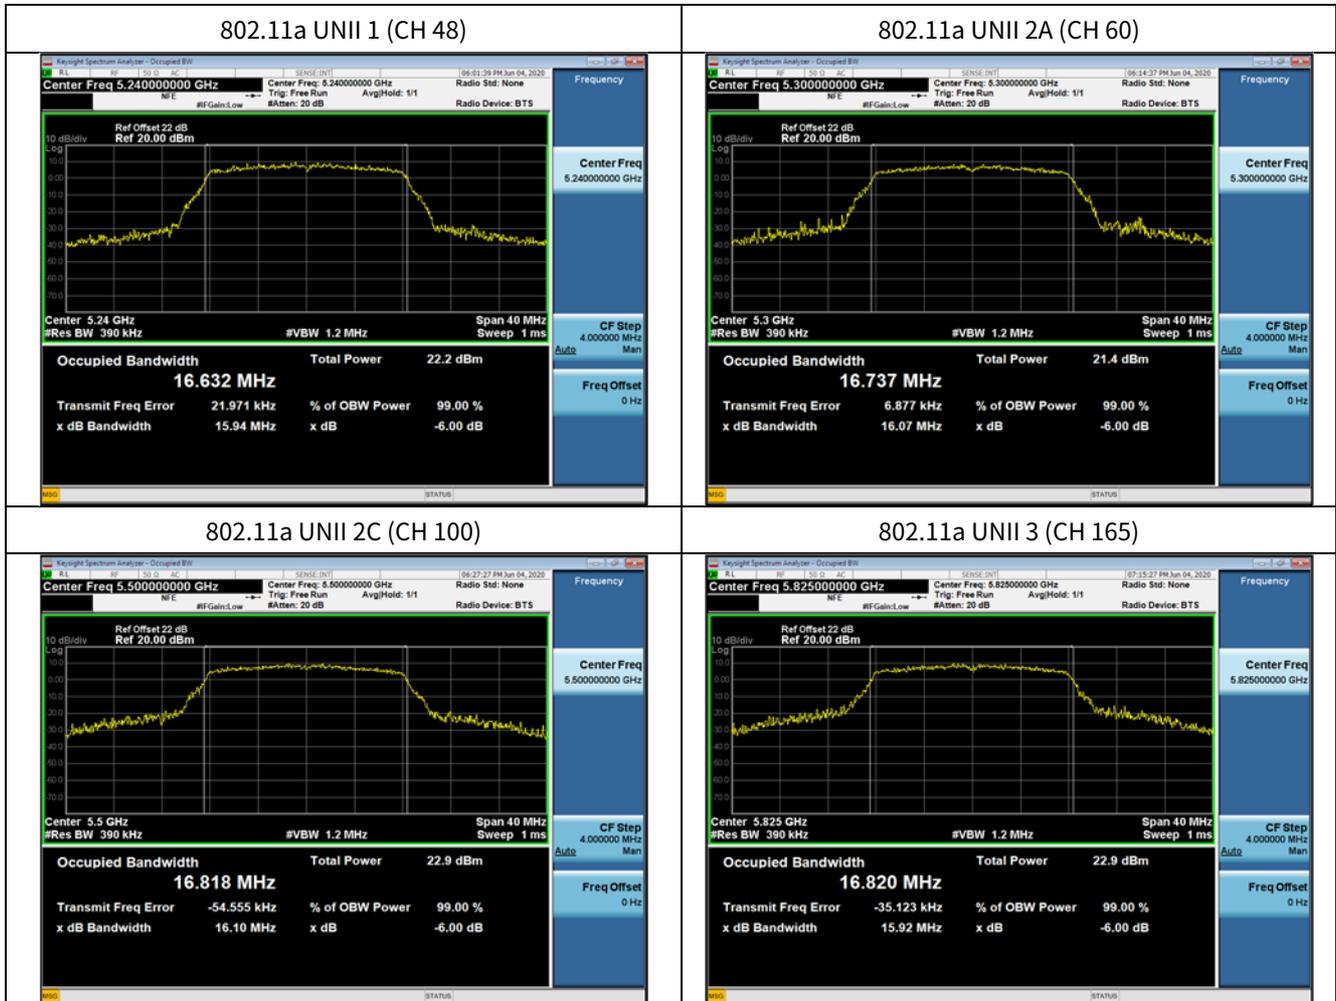

▣ Test Plots(802.11n(HT20))

Note:


In order to simplify the report, attached plots were only the most narrow channel.

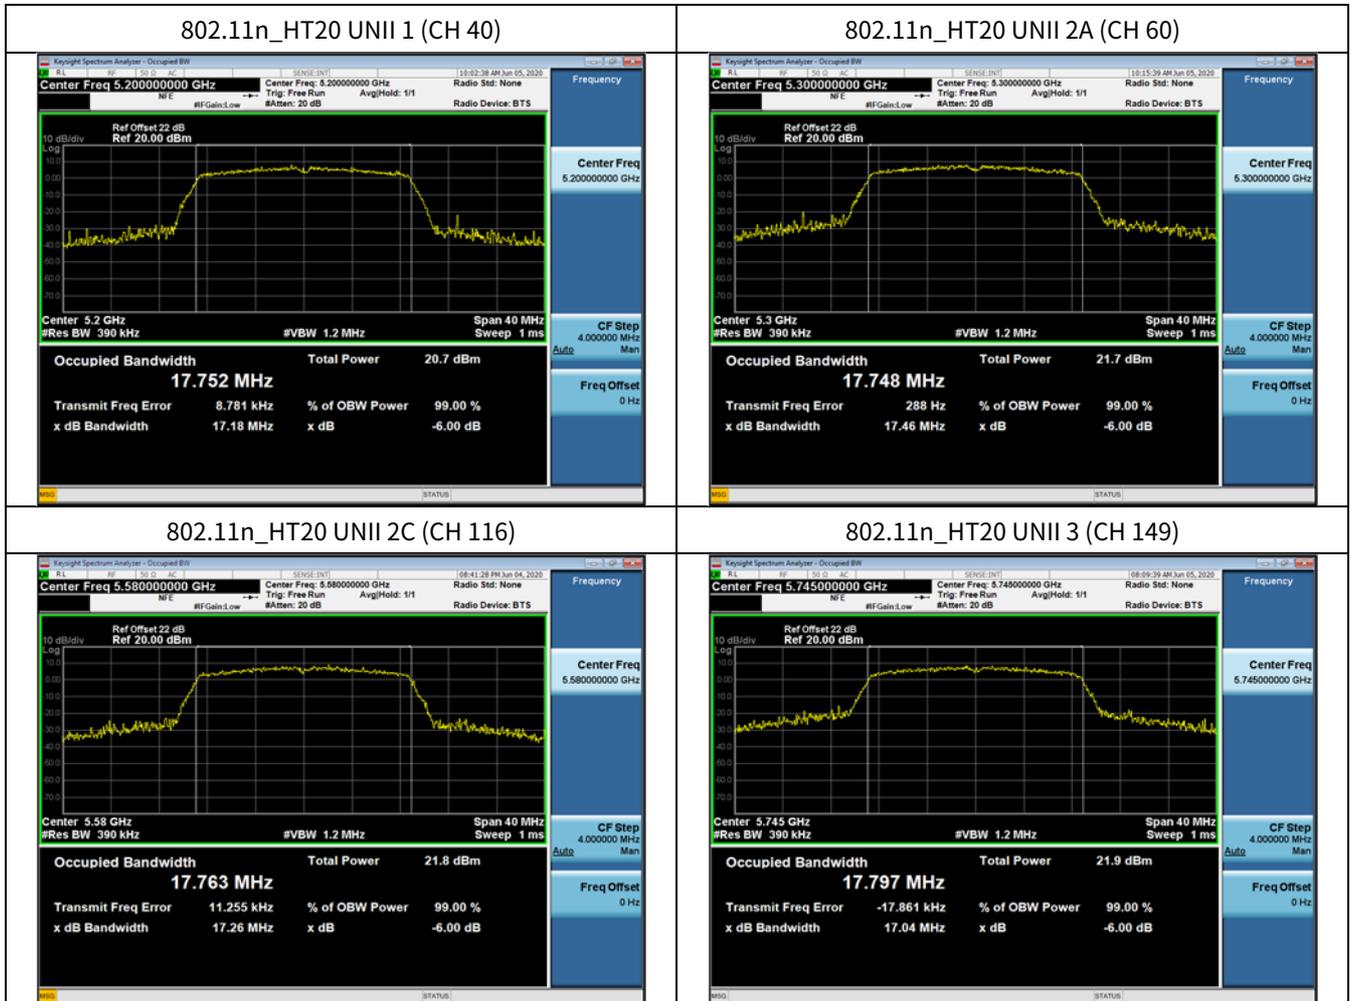

▣ Test Plots(802.11n(HT40))

Note:


In order to simplify the report, attached plots were only the most narrow channel.

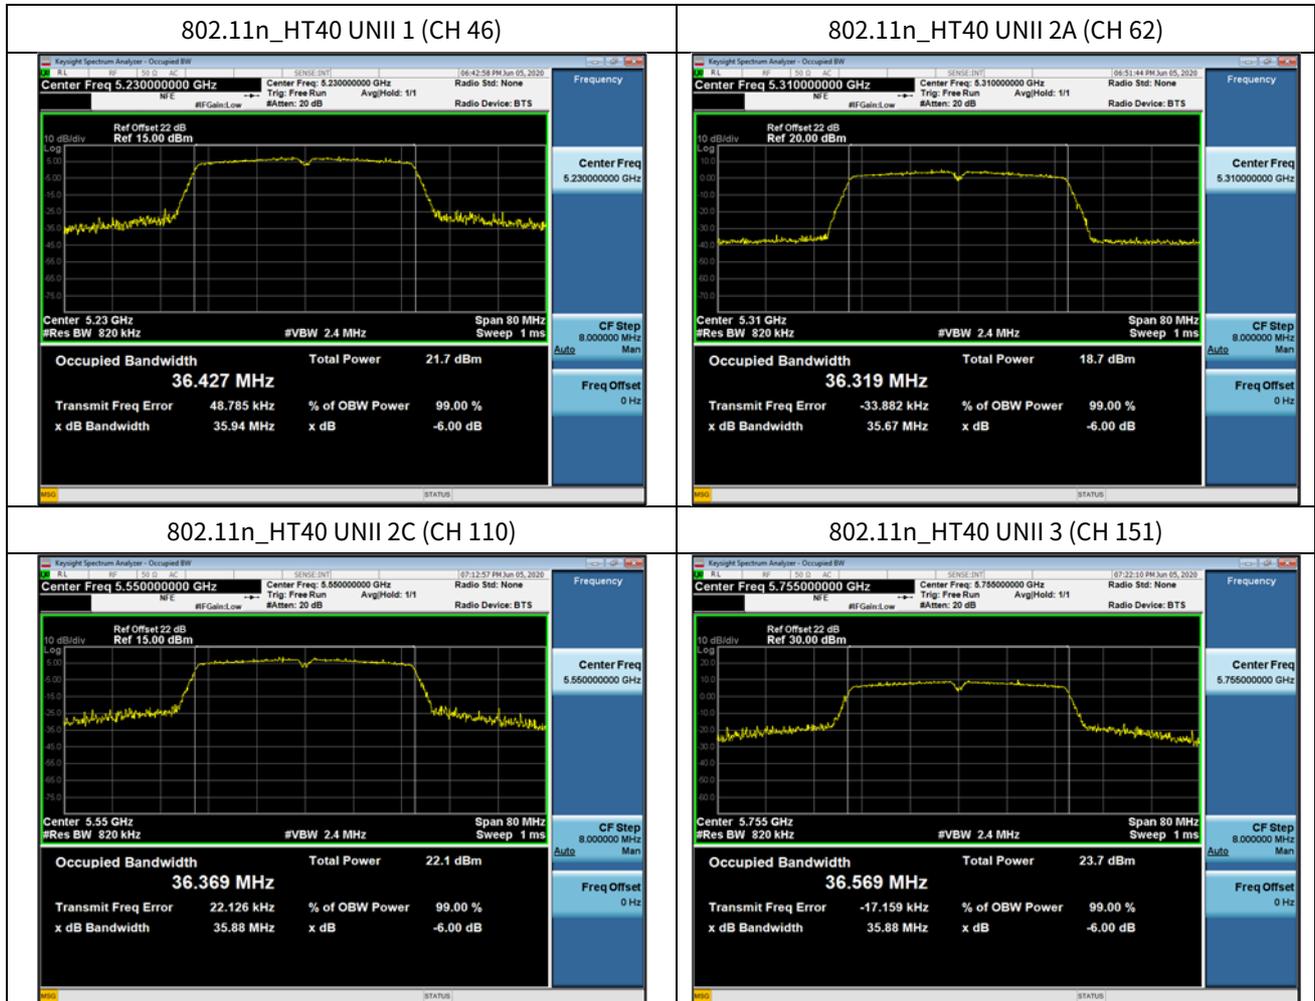

Test Plots(802.11ac(VHT20))

Note:


In order to simplify the report, attached plots were only the most narrow channel.

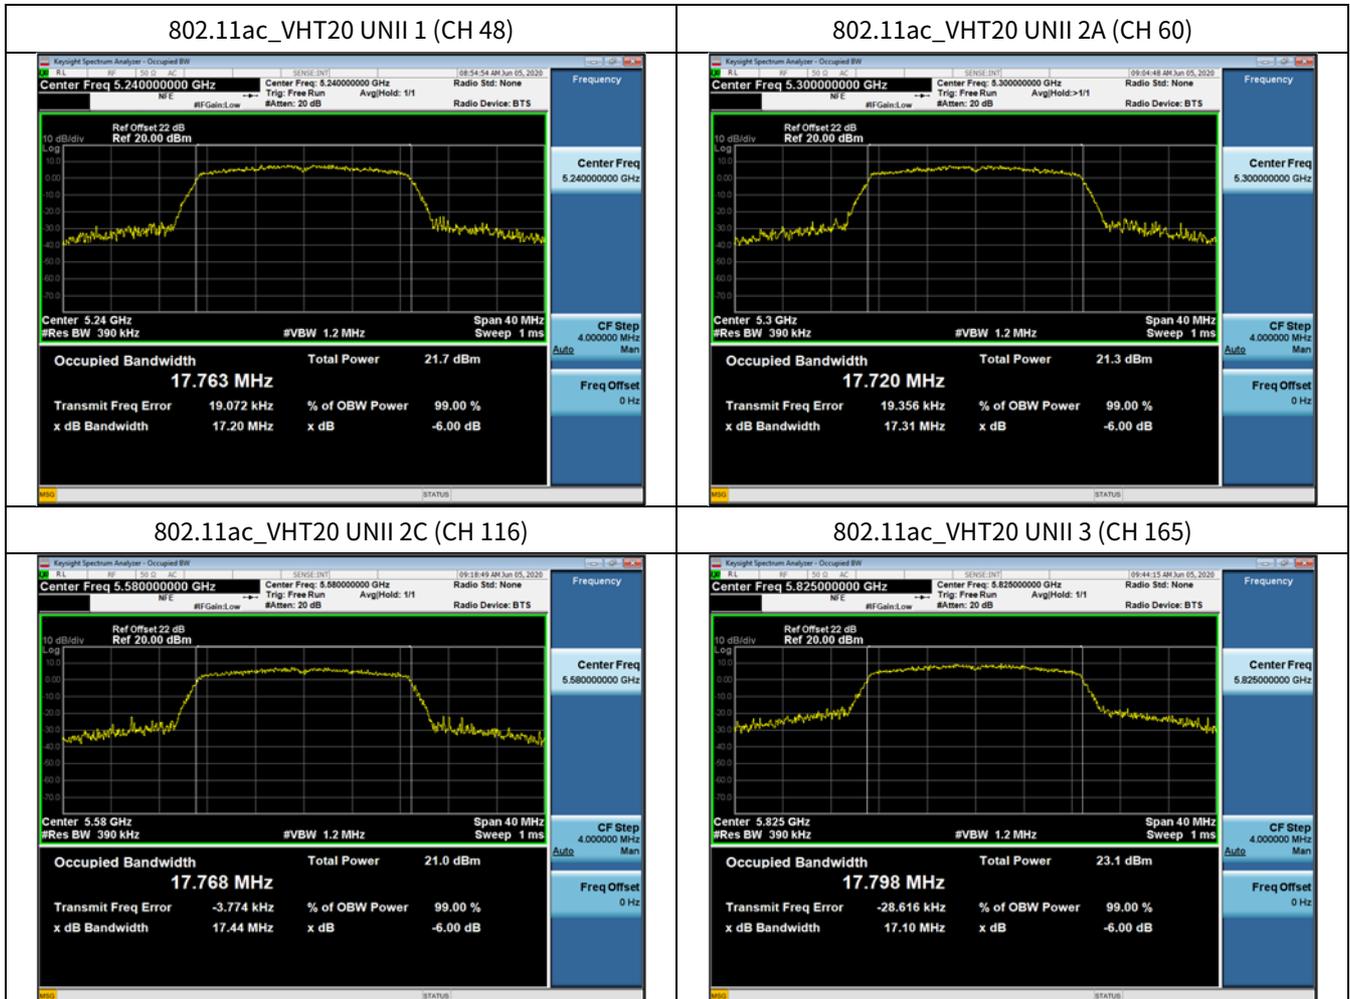

▣ Test Plots(802.11ac(VHT40))

Note:


In order to simplify the report, attached plots were only the most narrow channel.

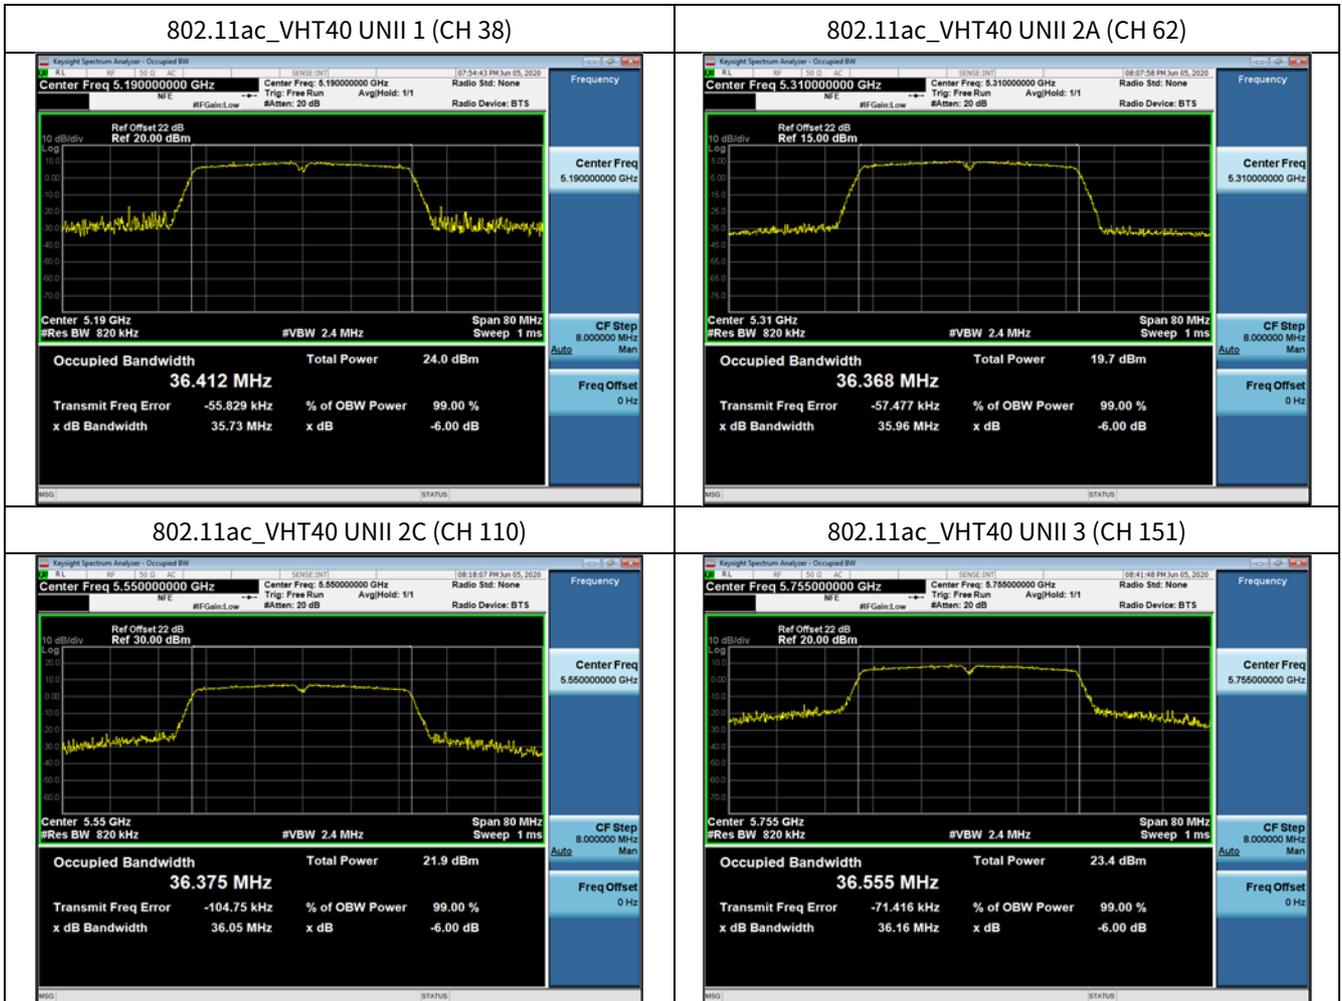

▣ Test Plots(802.11ac(VHT80))

Note:


In order to simplify the report, attached plots were only the most narrow channel.

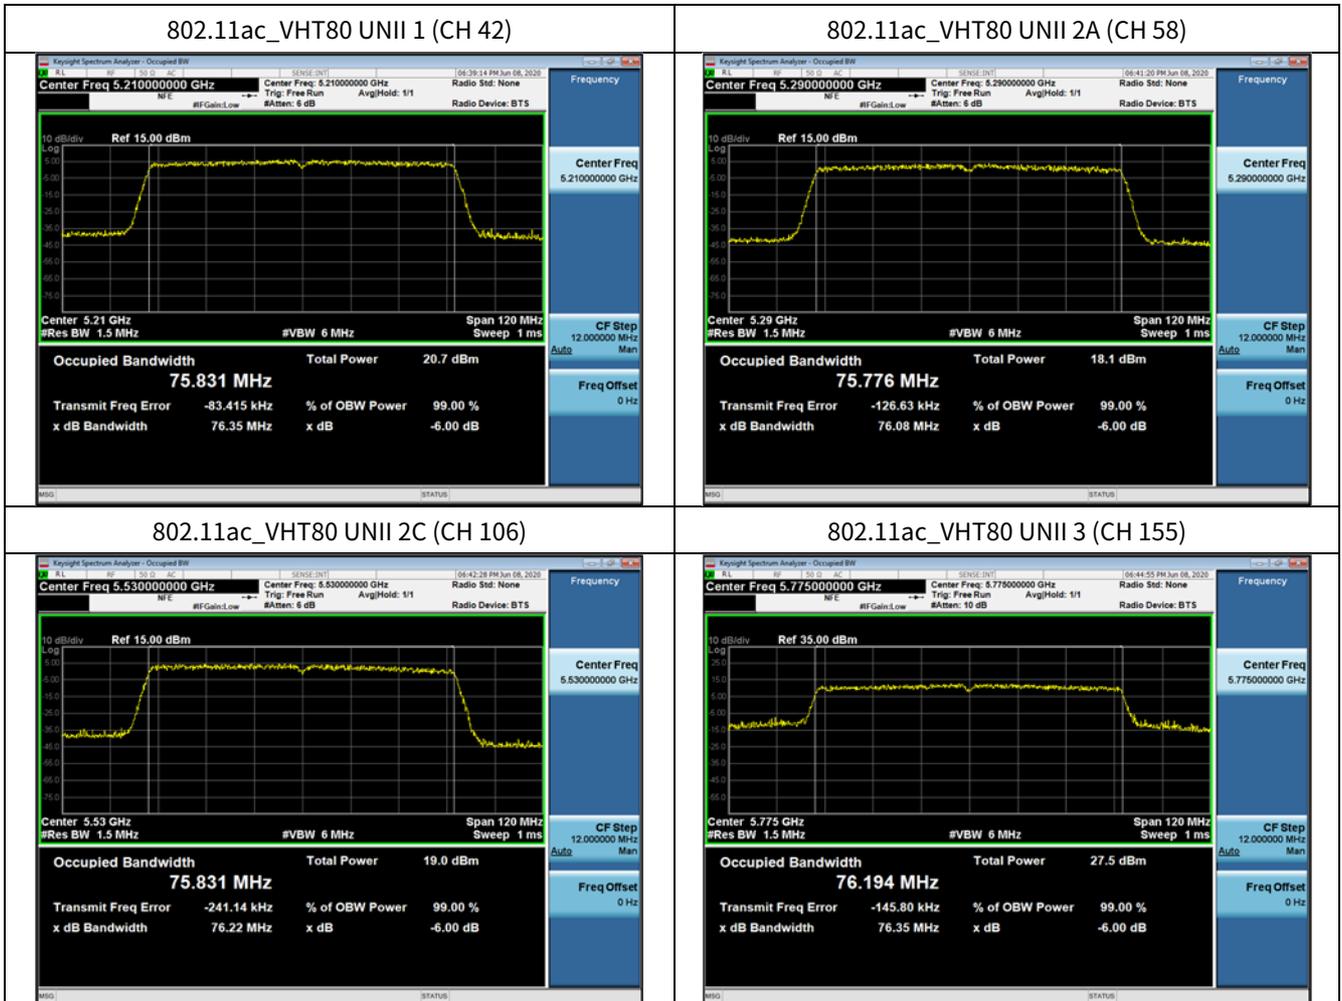

[ANT2]

Note:

In order to simplify the report, attached plots were only the most narrow channel.

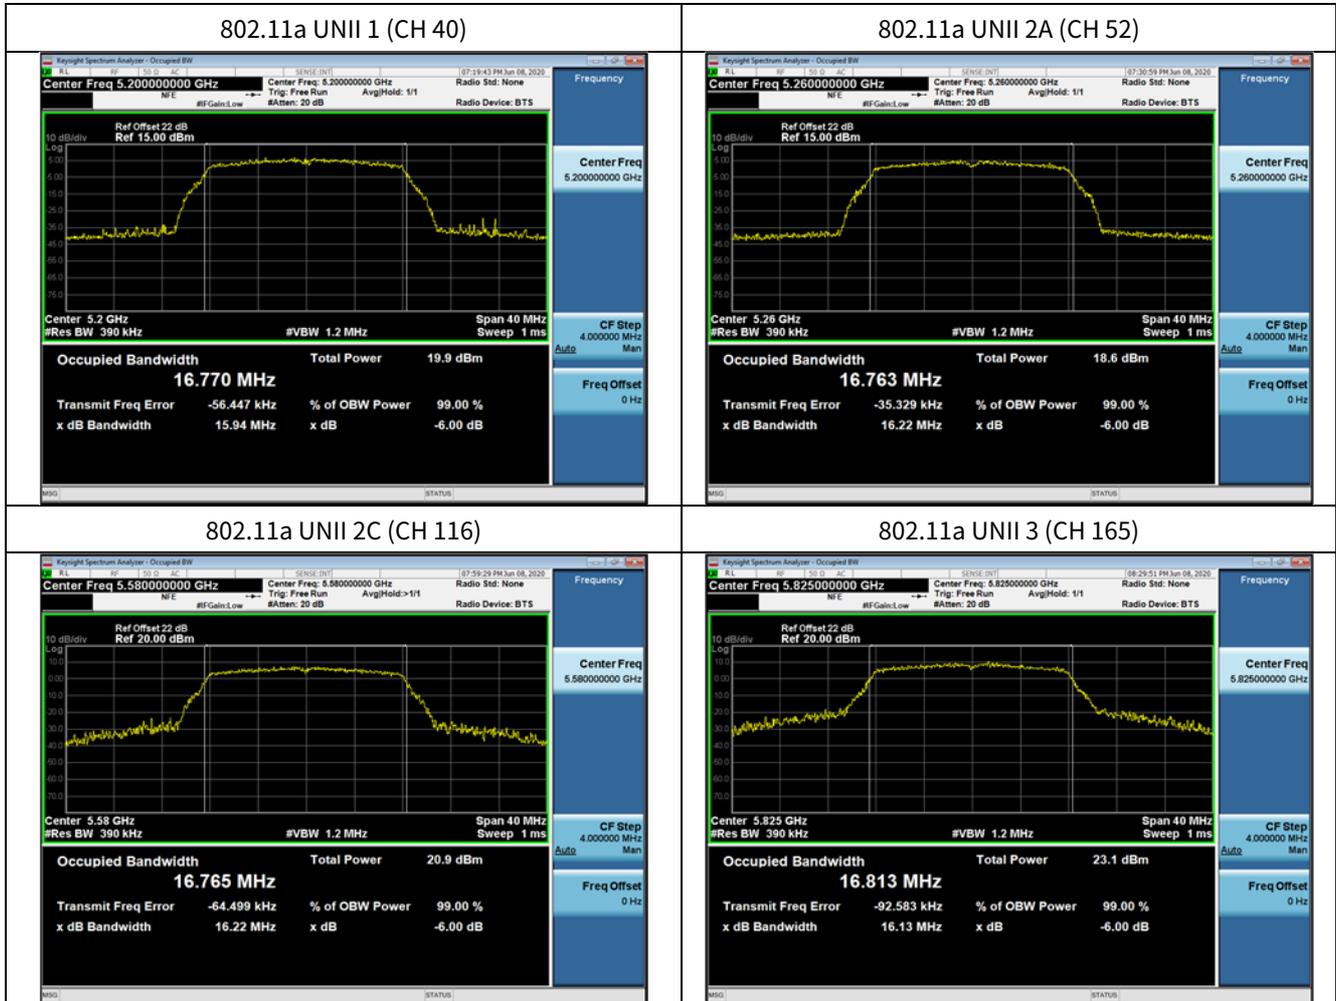

▣ Test Plots(802.11n(HT20))

Note:

In order to simplify the report, attached plots were only the most narrow channel.

