

FCC EVALUATION REPORT FOR CERTIFICATION

Manufacturer : LG Electronics Inc.

Date of Issue : April 30, 2008

642, Jinpyung-Dong, Gumi-Si

Test Report No. : GETEC-E3-08-015

Gyeongsangbuk-Do, 730-360, Korea

Test Site : Gumi College EMC Center
(Registration No.: 100749)

Attn: Mr. Sang-Wook Lee, Chief research engineer

FCC ID.: BEJM4712CG

Applicant.: LG Electronics Inc.

Rule Part(s)	: FCC Part 15 Subpart B
Equipment Class	: Class B computing device peripheral (JBP)
EUT Type	: LCD Monitor
Type of Authority	: Certification
Model No.	: M4712CG
Trade name	: LG

This equipment has been shown to be in compliance with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in ANSI C63.4-2003 / Canadian standard ICES-003

I attest to the accuracy of data. All measurements reported herein were performed by me or were made under my supervision and are correct to the vest of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.

Tested by,

Reviewed by,



Jae-Hoon Jeong, Senior Engineer
GUMI College EMC center



Tae-Sig Park, Technical Manager
GUMI College EMC center

CONTENTS

1. GENERAL INFORMATION	3
2. INTRODUCTION	4
3. PRODUCT INFORMATION	5
3.1 DESCRIPTION OF EUT.....	5
3.2 SUPPORT EQUIPMENT / CABLES USED	6
3.3 MODIFICATION ITEM(S).....	7
4. DESCRIPTION OF TESTS.....	8
4.1 TEST CONDITION.....	8
4.2 CONDUCTED EMISSION	9
4.3 RADIATED EMISSION.....	10
5. CONDUCTED EMISSION.....	11
5.1 OPERATING ENVIRONMENT	11
5.2 TEST SET-UP.....	11
5.3 MEASUREMENT UNCERTAINTY	11
5.4 LIMIT	12
5.5 TEST EQUIPMENT USED	12
5.6 TEST DATA FOR POWER LINE CONDUCTED EMISSION	13
6. RADIATED EMISSION	17
6.1 OPERATING ENVIRONMENT	17
6.2 TEST SET-UP.....	17
6.3 MEASUREMENT UNCERTAINTY	17
6.4 LIMIT	18
6.5 TEST EQUIPMENT USED	18
6.6 TEST DATA FOR RADIATED EMISSION	19
7. SAMPLE CALCULATIONS.....	22
7.1 EXAMPLE 1 :	22
7.2 EXAMPLE 2 :	22
8. RECOMMENDATION & CONCLUSION.....	23
APPENDIX A – ATTESTATION STATEMENT	
APPENDIX B – PLOTS OF CONDUCTED EMISSIONS	
APPENDIX C – ID SAMPLE LABEL & LOCATION	
APPENDIX D – BLOCK DIAGRAM	
APPENDIX E – TEST SET-UP PHOTOGRAPHS	
APPENDIX F – EXTERNAL PHOTOGRAPHS	
APPENDIX G –INTERNAL PHOTOGRAPHS	
APPENDIX H – USER’S MANUAL	

Scope: Measurement and determination of electromagnetic emissions (EME) of radio frequency devices including intentional and / or unintentional radiators for compliance with technical rules and regulations of the Federal Communications Commission.

1. General Information

Applicant: LG Electronics Inc.

Applicant Address: 642, Jinpyung-Dong, Gumi-Si, Gyeongsangbuk-do, Korea

Manufacturer: LG Electronics Inc.

Manufacturer Address: 642, Jinpyung-Dong, Gumi-Si, Gyeongsangbuk-do, Korea

Contact Person: Mr. Sang -Wook Lee, Chief research engineer

Tel No.: +82-54-470-5430

- **FCC ID** BEJM4712CG
- **EUT Type** LCD Monitor
- **Model No.** M4712CG
- **Trade Name** LG
- **Serial No.** Proto type
- **Rule Part(s)** FCC Part 15 Subpart B
- **Type of Authority** Certification
- **Test Procedure(s)** ANSI C63.4 (2003) / Canadian standard ICES-003
- **Dates of Test** April 15 ~ 17, 2008
- **Place of Test** **Gumi College EMC Center** (FCC Registration No.: 100749)
407, Bugok-Dong, Gumi-si, Gyeongsangbuk-Do, Korea
- **Test Report No.** GETEC-E3-08-015
- **Dates of Issue** April 30, 2008

2. Introduction

The measurement procedure described in American National Standard for Methods of Measurement of Radio-Nose Emissions From Low-Voltage Electrical and Electronic Equipment in the Range of 9kHz to 40GHz (ASNI C63.4-2003) was used in determining radiated and conducted emissions emanating from **LG Electronics Inc. LCD Monitor (Model No.: M4712CG)**

These measurement tests were conducted at **Gumi College EMC Center**. The site address is 407, Bugok-Dong, Gumi-si, Gyeongsangbuk-Do, Korea This test site is one of the highest point of Gumi 1 college at about 200 kilometers away from Seoul city and 40 kilometers away from Daege city. It is located in the valley surrounded by mountains in all directions where ambient radio signal conditions are quiet and a favorable area to measure the radio frequency interference on open field test site for the computing and ISM devices manufactures. The detailed description of the measurement facility was found to be in compliance with the requirements of §2.948 according to ANSI C63.4 on October 19, 1992



Fig 1. The map above shows the Gumi College in vicinity area.

3. Product Information

3.1 Description of EUT

The Equipment Under Test (EUT) is the **LG Electronics Inc. LCD Monitor (Model No.: M4712CG) FCC ID.: BEJM4712CG**

Power	Rated Voltage	AC 100-240V ~ 50/60Hz 3.0A
	Power Consumption	On Mode : 300W Typ. Sleep Mode : ≤ 3W (RGB) / 4W(HDMI/DVI) Off Mode : ≤ 1W
Dimensions & Weight		
	<p>Width x Height x Depth</p> <p>[1] 111.71 cm (43.98 inches) x 75.54 cm (29.74 inches) x 31.93 cm (12.57 inches)</p> <p>[2] 111.71 cm (43.98 inches) x 66.09 cm (26.02 inches) x 11.86 cm (4.67 inches)</p> <p>[3] 111.71 cm (43.98 inches) x 75.54 cm (29.74 inches) x 31.93 cm (12.57 inches)</p> <p>[4] 111.71 cm (43.98 inches) x 66.09 cm (26.02 inches) x 11.86 cm (4.67 inches)</p>	
	Net	
	[1] 26.76 kg (58.99 lbs)	[2] 23.54 kg (51.90 lbs)
	[3] 27.54 kg (60.71 lbs)	[4] 24.32 kg (53.62 lbs)
Video Signal	Max. Resolution	RGB : 1600 X 1200 @60Hz HDMI/DVI : 1920 X 1080 @60Hz – It may not be supported depending on the OS or video card type.
	Recommended Resolution	RGB : WSXGA 1360 X 768 @60Hz HDMI/DVI : WSXGA 1360 X 768 @60Hz – It may not be supported depending on the OS or video card type.
	Horizontal Frequency	RGB : 30 - 83 kHz HDMI/DVI : 30 - 83 kHz
	Vertical Frequency	RGB : 56 - 75 Hz HDMI/DVI : 56 - 60 Hz
	Synchronization Type	Separate/Composite/Digital
Input Connector	15-pin D-Sub type, HDMI (digital), S-Video, Composite Video, Component, RS-232C	

3.2 Support Equipment / Cables used

3.2.1 Used Support Equipment

Description	Manufacturer	Model No.	S/N & FCC ID
PC	COMPAQ	PD1075	S/N: 7041JC8F0245 FCC ID: DoC
Video card	ATI	ATI Radeon VE	S/N: 6001833 FCC ID: DoC
Printer	Hewlett Packard	970CXI	S/N: MY9B01F1FG FCC ID: DoC
Serial Mouse	LOGITECH	M-S69	S/N: 334684-108 FCC ID: JNZ211443
Key-board	COMPAQ	166516-AD6	S/N: B13BBOR391006D FCC ID: DoC
Joystick	Microsoft	X05-92626	S/N: 9262600296169 FCC ID: DoC
DVD player	LG Electronics Inc	LC-954	S/N: 3850R-Z674K FCC ID: DoC
Monitor	DIBOSS	LT-15S5MF	S/N: D060403100019-C FCC ID: DoC

See "Appendix E – Test Setup Photographs" for actual system test set-up

3.2.2 Used Cable(s)

Cable No.	Condition	Description
Power cable	Connected to the EUT	1.8m unshielded
Video (D-sub) in cable	Connected to the EUT and PC	1.8m shielded with two ferrite cores
Video (HDMI) cable	Connected to the EUT and PC	1.8m shielded
PC sound cable	Connected to the EUT and PC	1.8m shielded
Component cable	Connected to the EUT and DVD player	3.0m shielded
AV in cable	Connected to the EUT and DVD player	3.0m shielded
S-VHS cable	Connected to the EUT and DVD player	1.8m shielded
AV out cable	Connected to the EUT and Monitor	3.0m shielded
Video (D-sub) out cable	Connected to the EUT and Monitor	1.8m shielded with two ferrite cores

3.3 Modification Item(s)

- None

4. Description of tests

4.1 Test Condition

The EUT was installed, arranged and operated in a manner that is most representative of equipment as typically used. The measurements were carried out while varying operating modes and cable positions within typically arrangement to determine maximum emission level.

The representative and worst test mode(s) were noted in the test report.

- Test Voltage / Frequency : AC 120V / 60Hz
- Test Mode(s)
 - . Monitor mode
 - . Radiated emission: 1600*1200/ 60Hz (Analog), 1920*1080/60Hz (HDMI)
 - . Conducted emission: 1600*1200/ 60Hz (Analog), 1920*1080/60Hz (HDMI)
1024*768/ 60Hz (Analog), 800*600/ 60Hz (Analog)
- Operating test pattern
 - . "H" character scrolling mode (Font size: 10)
 - . Black background white character
 - . Brightness and contrast was adjusted as maximum level
 - . 1 kHz sound tone with winamp player

4.2 Conducted Emission

The Line conducted emission test facility is inside a 4×8×2.5 meter shielded enclosure. The EUT was placed on a non-conducting 1.0 by 1.5 meter table, which is 0.8 meters in height and 0.4 meters away from the vertical wall of the shielded enclosure. The EUT is powered from the Rohde & Schwarz LISN (ESH2-Z5) and the support equipment is powered from the Rohde & Schwarz LISN (ESH3-Z5). Powers to the LISN are filtered by high-current high insertion loss power line filter. Sufficient time for EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition. The RF output of the LISN was connected to the EMI test receiver (Rohde & Schwarz, ESCS30). The EMI test receiver was scanned from 150 kHz to 30MHz with 20msec sweep time to determine the frequency producing the maximum EME from the EUT. The frequency producing the maximum level was re-examined using Quasi-Peak mode of the EMI test receiver. The bandwidth of Quasi-peak mode was set to 9 kHz. Each emission was maximized consistent with typical applications by varying the configuration of the test sample. Interface cables were connected to the available interface ports of the test unit. The effect of varying the position of cables was investigated to find the configuration that produces maximum diagram emission. Excess cable lengths were bundled at center with 30 – 40 centi-meters. Each EME reported was calibrated using the R/S signal generator

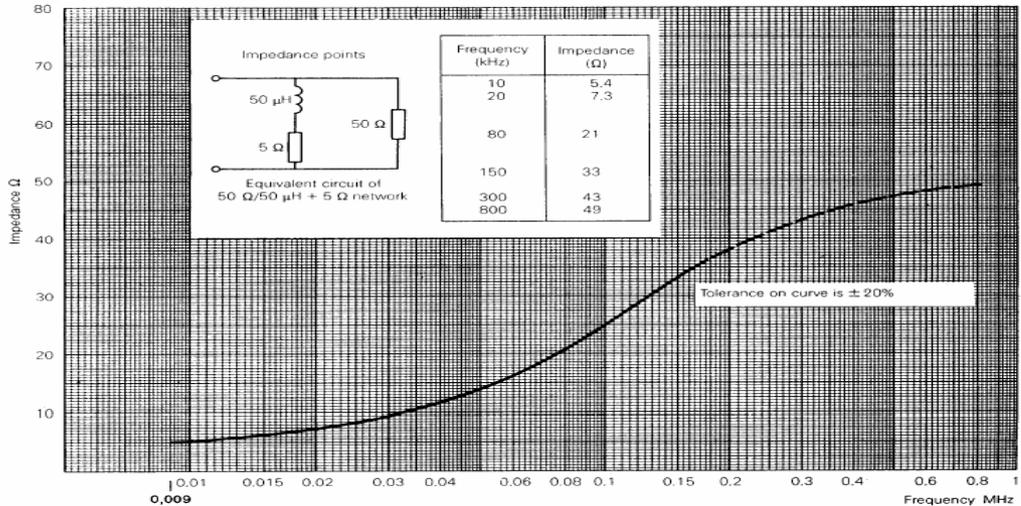


Fig 2. Impedance of LISN

4.3 Radiated Emission

Preliminary measurements were conducted 3m semi anechoic chamber using broadband antennas to determine the frequency producing the maximum EME. Appropriate precaution was taken to ensure that all EME from the EUT were maximized and investigated. The technology configuration, mode of operation and turntable azimuth with respect to antenna was note for each frequency found.

The spectrum was scanned from 30 to 1000MHz using bicornical log antenna (Schwarzbeck, VULB9160). Above 1GHz, horn antenna (Schwarzbeck, BBHA9120D) was used.

Final measurements were made outdoors at 3m/10m-test range.

Sufficient time for the EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition.

Each frequency found during pre-scan measurements was re-examined and investigated using EMI test receiver. The detector function was set to CISPR quasi-peak mode average mode and the bandwidth of the receiver was set to 120 kHz or 1MHz depending on the frequency or type of signal.

The EUT, support equipment and interconnecting cables were reconfigured to the setup producing the maximum emission for the frequency and were placed on top of a 0.8m high non-metallic 1.0×1.5 meter table.

The turntable containing the test sample was rotated; the antenna height was varied 1 to 4 meter and stopped at the azimuth or height producing the maximum emission.

Each EME reported was calibrated using the R/S signal generator

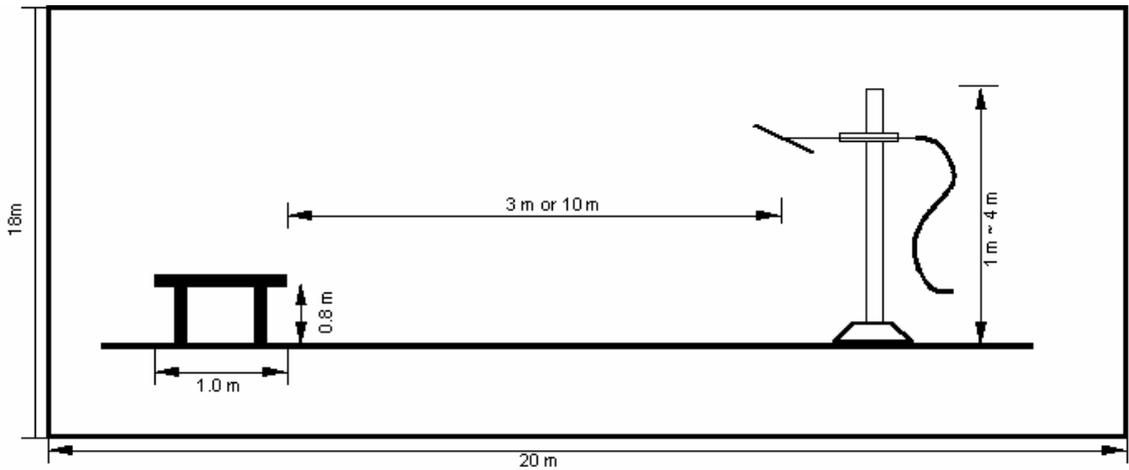


Fig 3. Dimensions of Open Site Test Area

5. Conducted Emission

5.1 Operating environment

Temperature : 21 °C
Relative humidity : 45 %

5.2 Test set-up

The conducted emission measurements were performed in the shielded room.

The EUT was placed on wooden table, 0.8m heights above the floor, 0.4m from the reference ground plane (GRP) wall and 0.8m from AMN.

AMN is bonded on horizontal reference ground plane.

The ground plane, which was electrically bonded to the shield room, ground system and all power lines entering the shield room, were filtered.

5.3 Measurement uncertainty

The measurement uncertainty was calculated in accordance with ISO “Guide to the expression of uncertainty in measurement”.

The measurement uncertainty was given with a confidence of 95%.

Contribution	Probability Distribution	Uncertainty (±dB)	
		Power Port	Communication port
Receiver specification	Rectangular	0.50	0.50
LISN coupling specification	Rectangular	1.50	
ISN coupling specification	Rectangular		1.50
Mismatch	U-shaped		
LISN VRC : $\Gamma_{l=}$ 0.20		0.05	0.05
ISN VRC : $\Gamma_{l=}$ 0.20		-0.05	-0.05
ATT VRC(IN) : $\Gamma_{g=}$ 0.03			
Uncertainty limits $20\log(1 \pm \Gamma_{l=} \Gamma_{g=})$			
Mismatch	U-shaped		
Receiver VRC : $\Gamma_{l=}$ 0.09		0.09	0.09
ATT VRC : $\Gamma_{g=}$ 0.11		-0.09	-0.09
Uncertainty limits $20\log(1 \pm \Gamma_{l=} \Gamma_{g=})$			
System repeatability	Std Deviation	0.55	0.55
Cable and input attenuator calibration	Normal (k=2)	0.08	0.08
Repeatability of EUT			
Combined standard uncertainty $U_c(y)$	Normal	1.07	1.07
		-1.07	-1.07
Extended uncertainty U	Normal (k=2)	2.15	2.15
		-2.15	-2.15

5.4 Limit

RFI Conducted	FCC Limit(dB) Class B	
Freq. Range	Quasi-Peak	Average
150kHz – 0.5MHz	66 – 56*	56 – 46*
0.5MHz – 5MHz	56	46
5MHz – 30MHz	60	50

*Limits decreases linearly with the logarithm of frequency.

5.5 Test equipment used

	Model Number	Manufacturer	Description	Serial Number	Due to calibration
■ -	ESCS30	Rohde & Schwarz	EMI test receiver	839809/003	12. 14. 2008
■ -	ESH3-Z5	Rohde & Schwarz	Artificial mains network	838979/020	12. 13. 2008
■ -	ESH2-Z5	Rohde & Schwarz	Artificial mains network	829991/009	12. 13. 2008

5.6 Test data for power line conducted emission

- Test Date : April 16, 2008
- Resolution bandwidth : 9 kHz
- Frequency range : 0.15MHz ~ 30MHz

◆ Test resolution: 1600*1200/60Hz (Analog)

Frequency (MHz)	Insertion Loss	Cable Loss	Pol.	Quasi-Peak[dBuV]			Average[dBuV]			Margin[dBuV]	
				Limit	Reading	Result	Limit	Reading	Result	Quasi	Average
0.234	0.12	-0.21	L1	62.31	39.4	39.31	52.31	36.6	36.51	23.00	15.80
0.306	0.13	-0.17	L1	60.08	42.7	42.66	50.08	41.2	41.16	17.42	8.92
0.402	0.12	-0.12	N	57.81	40.6	40.60	47.81	39.3	39.30	17.22	8.52
0.530	0.12	-0.19	N	56.00	38.0	37.93	46.00	37.8	37.73	18.07	8.27
0.710	0.14	-0.23	L1	56.00	31.7	31.61	46.00	29.1	29.01	24.39	16.99
0.810	0.13	-0.23	N	56.00	31.0	30.90	46.00	30.3	30.20	25.10	15.80
0.914	0.13	-0.23	N	56.00	27.8	27.70	46.00	25.9	25.80	28.30	20.20
1.518	0.11	-0.28	N	56.00	22.8	22.63	46.00	16.5	16.33	33.37	29.67
8.594	0.09	0.00	N	60.00	25.9	25.99	50.00	24.5	24.59	34.01	25.41
14.150	0.09	0.11	N	60.00	34.9	35.10	50.00	28.9	29.10	24.90	20.90
19.130	0.09	0.00	N	60.00	31.6	31.69	50.00	27.0	27.09	28.31	22.91
24.022	0.92	0.00	L1	60.00	26.3	27.22	50.00	22.9	23.82	32.78	26.18

*Comment : Pol : L1 (Live), N(Neut)
 Insertion Loss : Insertion Loss of LISN
 Cable Loss : Cable Loss + Pulse Limiter Insertion loss value

◆ Test resolution: 1920*1080/60Hz (HDMI)

Frequency (MHz)	Insertion Loss	Cable Loss	Pol.	Quasi-Peak[dBuV]			Average[dBuV]			Margin[dBuV]	
				Limit	Reading	Result	Limit	Reading	Result	Quasi	Average
0.210	0.12	-0.22	L1	63.21	38.8	38.70	53.21	38.5	38.40	24.51	14.81
0.302	0.11	-0.17	N	60.19	37.8	37.74	50.19	23.1	23.04	22.45	27.15
0.414	0.12	-0.13	N	57.57	39.4	39.39	47.57	38.6	38.59	18.18	8.98
0.518	0.12	-0.18	N	56.00	40.1	40.04	46.00	40.0	39.94	15.96	6.06
0.726	0.13	-0.23	N	56.00	42.4	42.30	46.00	31.5	31.40	13.70	14.60
0.934	0.14	-0.23	L1	56.00	26.6	26.51	46.00	25.6	25.51	29.49	20.49
1.042	0.13	-0.23	N	56.00	28.1	27.99	46.00	27.0	26.89	28.01	19.11
8.930	0.23	0.00	L1	60.00	31.2	31.43	50.00	25.2	25.43	28.57	24.57
13.650	0.38	0.10	L1	60.00	32.7	33.18	50.00	27.4	27.88	26.83	22.13
18.234	0.09	0.00	N	60.00	32.7	32.79	50.00	28.0	28.09	27.21	21.91
24.018	0.09	0.00	N	60.00	31.5	31.59	50.00	29.6	29.69	28.41	20.31
25.230	0.09	0.07	N	60.00	23.5	23.66	50.00	19.5	19.66	36.34	30.34

*Comment : Pol : L1 (Live), N(Neut)

Insertion Loss : Insertion Loss of LISN

Cable Loss : Cable Loss + Pulse Limiter Insertion loss value

◆ Test resolution: 1024*768/60Hz (Analog)

Frequency (MHz)	Insertion Loss	Cable Loss	Pol.	Quasi-Peak[dBuV]			Average[dBuV]			Margin[dBuV]	
				Limit	Reading	Result	Limit	Reading	Result	Quasi	Average
0.234	0.12	-0.21	L1	62.31	39.6	39.51	52.31	36.8	36.71	22.80	15.60
0.302	0.13	-0.17	L1	60.19	41.9	41.85	50.19	38.7	38.65	18.33	11.53
0.402	0.12	-0.12	N	57.81	41.3	41.30	47.81	36.9	36.90	16.52	10.92
0.526	0.12	-0.19	N	56.00	38.2	38.13	46.00	38.0	37.93	17.87	8.07
0.806	0.14	-0.23	L1	56.00	29.1	29.01	46.00	27.6	27.51	26.99	18.49
0.906	0.13	-0.23	N	56.00	27.1	27.00	46.00	23.7	23.60	29.00	22.40
1.110	0.13	-0.24	N	56.00	20.1	19.99	46.00	15.4	15.29	36.01	30.71
1.806	0.15	-0.30	L1	56.00	22.6	22.45	46.00	18.5	18.35	33.55	27.65
8.514	0.09	0.00	N	60.00	25.9	25.99	50.00	24.1	24.19	34.01	25.81
8.934	0.09	0.00	N	60.00	30.5	30.59	50.00	25.0	25.09	29.41	24.91
14.662	0.09	0.08	N	60.00	33.2	33.37	50.00	27.9	28.07	26.63	21.93
17.874	0.63	0.00	L1	60.00	29.2	29.83	50.00	23.6	24.23	30.17	25.77

*Comment : Pol : L1 (Live), N(Neut)
Insertion Loss : Insertion Loss of LISN
Cable Loss : Cable Loss + Pulse Limiter Insertion loss value

◆ Test resolution: 800*600/60Hz (Analog)

Frequency (MHz)	Insertion Loss	Cable Loss	Pol.	Quasi-Peak[dBuV]			Average[dBuV]			Margin[dBuV]	
				Limit	Reading	Result	Limit	Reading	Result	Quasi	Average
0.210	0.12	-0.22	L1	63.21	38.9	38.80	53.21	38.6	38.50	24.41	14.71
0.302	0.13	-0.17	L1	60.19	41.4	41.35	50.19	38.9	38.85	18.83	11.33
0.406	0.12	-0.12	N	57.73	40.8	40.79	47.73	38.7	38.69	16.94	9.04
0.530	0.12	-0.19	N	56.00	38.0	37.93	46.00	37.8	37.73	18.07	8.27
0.610	0.13	-0.23	N	56.00	34.0	33.90	46.00	33.1	33.00	22.10	13.00
0.710	0.13	-0.23	N	56.00	33.2	33.10	46.00	29.1	29.00	22.90	17.00
0.918	0.13	-0.23	N	56.00	28.0	27.90	46.00	24.5	24.40	28.10	21.60
1.022	0.13	-0.23	N	56.00	26.9	26.80	46.00	24.5	24.40	29.20	21.60
1.526	0.11	-0.28	N	56.00	22.7	22.53	46.00	18.0	17.83	33.47	28.17
8.682	0.23	0.00	L1	60.00	28.7	28.93	50.00	24.0	24.23	31.07	25.77
9.074	0.09	0.00	N	60.00	28.8	28.89	50.00	25.1	25.19	31.11	24.81
14.662	0.09	0.08	N	60.00	33.8	33.97	50.00	29.1	29.27	26.03	20.73
18.882	0.70	0.00	L1	60.00	28.0	28.70	50.00	23.0	23.70	31.30	26.30

*Comment : Pol : L1 (Live), N(Neut)

Insertion Loss : Insertion Loss of LISN

Cable Loss : Cable Loss + Pulse Limiter Insertion loss value

6. Radiated Emission

6.1 Operating environment

Temperature : 17 °C
Relative humidity : 41 %

6.2 Test set-up

A preliminary scan with peak mode was performed in the semi anechoic chamber and found frequency for open area test site.

The formal radiated emission was measured at 3m/10m-distance open area test site.

The EUT was placed on a non-conductive turntable approximately 0.8 meters above the ground plane.

The turntable with EUT was rotated 360°, and the antenna was varied in height between 1.0 and 4.0 meters in order to determine the maximum emission levels.

This procedure was performed for both horizontal and vertical polarization of the receiving antenna.

6.3 Measurement uncertainty

The measurement uncertainty was calculated in accordance with ISO “Guide to the expression of uncertainty in measurement”.

The measurement uncertainty was given with a confidence of 95%.

Contribution	Probability Distribution	Uncertainty (dB)			
		Biconical Ant.		Log-periodic Ant.	
		3m	10m	3m	10m
Ambient signal					
Antenna factor calibration	Normal (k=2)	0.50	0.50	0.50	0.50
Receiver specification	Rectangular	0.50	0.50	0.50	0.50
Antenna directivity	Rectangular	0.25	0.00	1.50	0.25
Antenna phase center variation	Rectangular	0.00	0.00	1.00	0.20
Antenna factor frequency interpolation	Rectangular	0.25	0.25	0.25	0.25
Measure distance variation	Rectangular	0.60	0.40	0.60	0.40
Site imperfections	Rectangular	-2.00	-2.40	2.50	2.40
Mismatch Receiver VRC : $\Gamma_l = 0.09$ Antenna VRC : $\Gamma_g = 0.43$ (Bi) 0.23 (Lp) Uncertainty limits $20\log(1 \pm \Gamma_l \Gamma_g)$	U-shaped	0.33 -0.35	0.33 -0.35	0.18 -0.18	0.18 -0.18
System repeatability	Std Deviation	0.82	0.82	0.79	0.79
Cable loss calibration	Normal (k=2)	0.09	0.09	0.09	0.09
Combined standard uncertainty $U_c(y)$	Normal	1.54 -1.54	1.70 -1.70	2.03 -2.03	1.68 -1.68
Extended uncertainty U	Normal (k=2)	3.09 -3.09	3.39 -3.40	4.05 -4.05	3.36 -3.36

6.4 Limit

Frequency (MHz)	FCC Limit @ 3m. dB μ V/m	CISPR Limit @ 10m. dB μ V/m
30 – 88	40.0	30.0
88 – 216	43.5	30.0
216 – 230	46.0	30.0
230 – 960	46.0	37.0
960 – 1000	54.0	37.0
> 1000	54.0	No Specified limit

6.5 Test equipment used


Model Number	Manufacturer	Description	Serial Number	Due to Calibration
■ - ESI	Rohde & Schwarz	EMI test receiver	830482/010	12. 14. 2008
■ - ESCS30	Rohde & Schwarz	EMI test receiver	839809/003	12. 14. 2008
■ - HK116	Rohde & Schwarz	Biconical ANT	826861/018	12. 11. 2009
■ - HL223	Rohde & Schwarz	Log-periodic antenna	829228/011	12. 11. 2009
■ - HD100	HD GmbH	Position Controller	100/692/01	N/A
■ - DS415S	HD GmbH	Turntable	415/657/01	N/A
■ - MA240	HD GmbH	Antenna Mast	240/565/01	N/A
■ - BBHA9120D	Schwarzbeck	Horn ANT	207	12. 26. 2009
■ - AFS44-00101800-25-10P-44	MITEQ	Preamplifier	1258943	N/A

6.6 Test data for radiated emission

- Test Date : April 15, 2008
- Resolution bandwidth : 120 kHz / 1MHz
- Frequency range : 30MHz ~ 2000MHz
- Measurement distance : 3m/10m

◆ Operating Condition: 1600*1200/60Hz (Analog)
 Detector mode: Quasi- peak detector mode

Frequency (MHz)	Measurement Level				Limit (dBuV/m)	Margin (dBuV/m)	Positioning System		
	Reading	Antenna	Cable	Test Result			Pol. (H/V)	Height (cm)	Angle (deg)
	Value(dBuV)	Factor(dB)	Loss(dB)	(dBuV/m)					
35.71	4.9	11.98	1.80	18.7	30.0	11.4	V	101	177
58.06	3.4	8.32	2.08	13.8	30.0	16.2	V	105	165
94.55	9.9	9.47	2.65	22.0	30.0	8.0	H	375	250
134.98	10.9	11.72	3.16	25.8	30.0	4.2	V	112	52
314.45	1.9	13.34	5.24	20.5	37.0	16.5	V	129	180
497.12	9.2	17.17	6.59	33.0	37.0	4.0	V	100	163
706.05	0.3	20.89	7.94	29.1	37.0	7.9	V	188	152
896.54	0.4	22.58	9.08	32.1	37.0	4.9	V	100	250

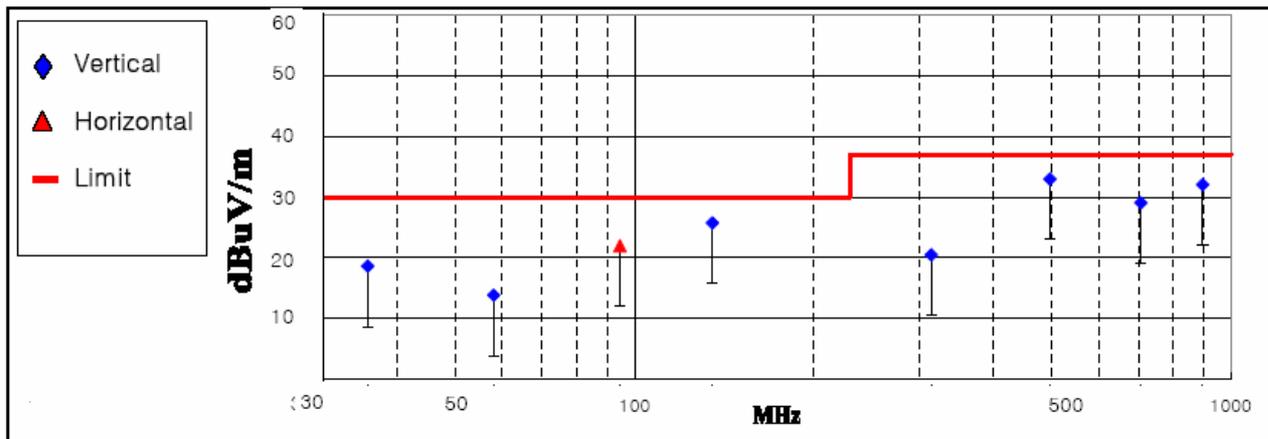


< Fig 4. Radiated emission result (30MHz ~ 1000MHz)>

◆ Operating Condition: 1920*1080/60Hz (HDMI)

Detector mode: Quasi- peak detector mode


Frequency (MHz)	Measurement Level				Limit (dBuV/m)	Margin (dBuV/m)	Positioning System		
	Reading	Antenna	Cable	Test Result			Pol. (H/V)	Height (cm)	Angle (deg)
	Value(dBuV)	Factor(dB)	Loss(dB)	(dBuV/m)					
35.92	4.3	11.93	1.80	18.1	30.0	12.0	V	110	201
61.85	3.7	7.99	2.12	13.8	30.0	16.2	V	105	152
108.01	8.9	10.41	2.78	22.1	30.0	7.9	V	100	82
134.79	4.7	11.71	3.16	19.6	30.0	10.4	V	115	43
196.01	0.2	13.85	3.84	17.9	30.0	12.1	H	302	242
312.75	4.9	13.29	5.23	23.4	37.0	13.6	V	113	190
497.12	3.0	17.17	6.59	26.7	37.0	10.3	V	100	163
679.66	0.2	20.50	7.75	28.4	37.0	8.6	V	188	199
899.35	0.2	22.55	9.10	31.9	37.0	5.1	V	100	180

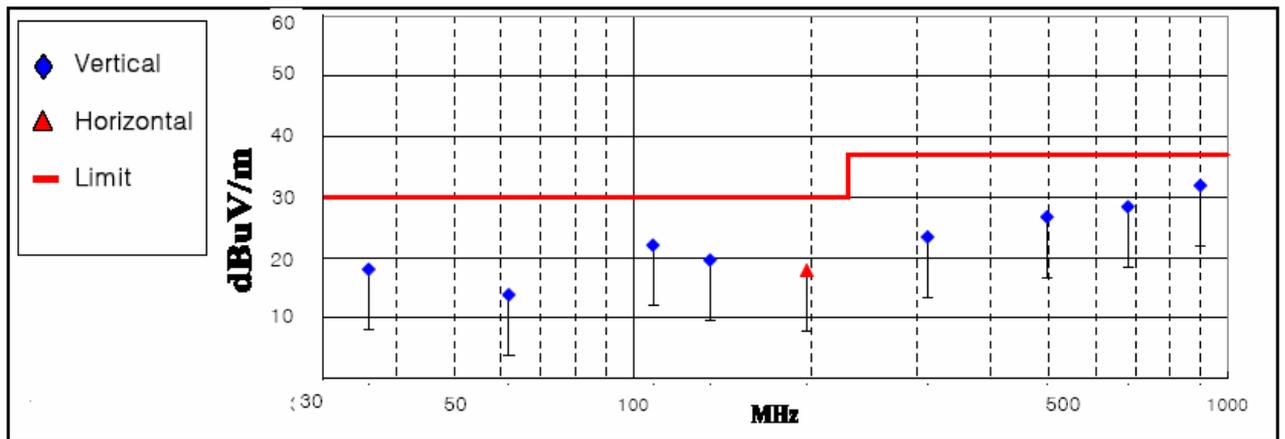

< Fig 5. Radiated emission result (30MHz ~ 1000MHz)>

- ◆ Operating Condition: 1600*1200/60Hz (Analog)
- Detector mode: Peak detector mode / Average detector mode

Frequency (MHz)	Measurement Level						Limit (dBuV/m)		Margin (dBuV/m)		Positioning System		
	Reading Value (dBuV/m)		AF (dB)	AMP / CL (dB)	Test Result (dBuV/m)		Peak	Average	Peak	Average	Pol. (H/V)	Height (cm)	Angle (deg)
	Peak	Average			Peak	Average							
1072.02	73.2	50.6	25.0	-40.9	57.3	34.7	74.0	54.0	16.7	19.3	V	105	177
1148.82	71.2	50.0	25.1	-40.9	55.4	34.2	74.0	54.0	18.6	19.8	V	110	190
1595.62	79.1	58.3	25.8	-39.3	65.6	44.8	74.0	54.0	8.4	9.2	V	122	140
1824.42	56.9	47.0	26.1	-38.8	44.2	34.3	74.0	54.0	29.8	19.7	H	302	180

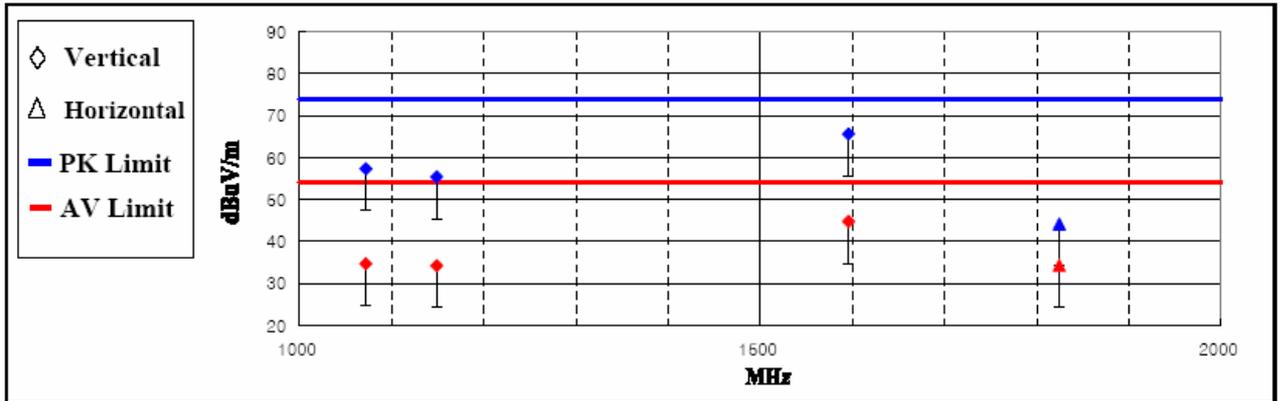


*Comment :AMP/CL : Cable loss + AMP gain

< Fig 6. Radiated emission result (1000MHz ~ 2000MHz)>

- ◆ Operating Condition: 1920*1080/60Hz (HDMI)
- Detector mode: Peak detector mode / Average detector mode

Frequency (MHz)	Measurement Level						Limit (dBuV/m)		Margin (dBuV/m)		Positioning System		
	Reading Value (dBuV/m)		AF (dB)	AMP / CL (dB)	Test Result (dBuV/m)		Peak	Average	Peak	Average	Pol. (H/V)	Height (cm)	Angle (deg)
	Peak	Average			Peak	Average							
1138.02	70.4	50.7	25.1	-40.8	54.7	35.0	74.0	54.0	19.3	19.0	V	112	160
1296.03	63.6	53.6	25.4	-40.1	48.9	38.9	74.0	54.0	25.1	15.1	V	188	192
1556.03	70.9	52.5	25.8	-39.6	57.1	38.7	74.0	54.0	16.9	15.3	V	107	150
1836.01	64.9	48.5	26.1	-38.8	52.1	35.7	74.0	54.0	21.9	18.3	V	100	177

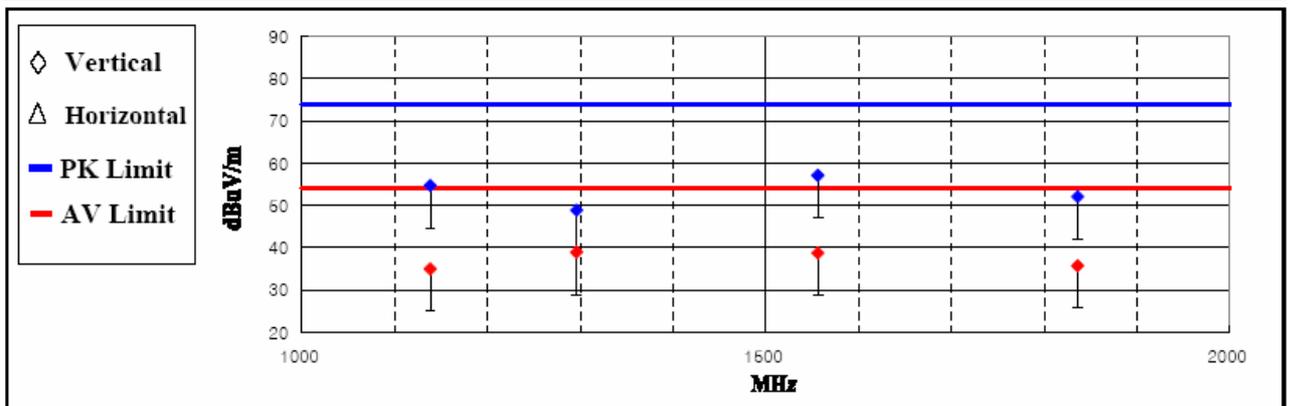

*Comment :AMP/CL : Cable loss + AMP gain

< Fig 7. Radiated emission result (1000MHz ~ 2000MHz)>

7. Sample Calculations

$$\begin{aligned} \text{dB}\mu\text{V} &= 20 \text{ Log}_{10}(\mu\text{V}/\text{m}) \\ \text{dB}\mu\text{V} &= \text{dBm} + 107 \\ \mu\text{V} &= 10^{(\text{dB}\mu\text{V}/20)} \end{aligned}$$

7.1 Example 1 :

■ 20.3 MHz

Class B Limit	= 250 μV	= 48 $\text{dB}\mu\text{V}$
Reading	= - 67.8 dBm (Calibrated level)	
Convert to $\text{dB}\mu\text{V}$	= - 67.8 $\text{dBm} + 107$	= 39.2 $\text{dB}\mu\text{V}$
$10^{(39.2\text{dB}\mu\text{V}/20)}$	= 91.2 μV	
Margin	= 39.2 – 48	= -8.8
	= 8.8 dB below Limit	

7.2 Example 2 :

■ 66.7 MHz

Class B Limit	= 100 $\mu\text{V}/\text{m}$	= 40.0 $\text{dB}\mu\text{V}/\text{m}$
Reading	= - 76.0 dBm (Calibrated level)	
Convert to $\text{dB}\mu\text{V}/\text{m}$	= - 76.8 $\text{dBm} + 107$	= 31.0 $\text{dB}\mu\text{V}/\text{m}$
Antenna Factor + Cable Loss	= 5.8 dB	
Total	= 36.8 $\text{dB}\mu\text{V}/\text{m}$	
Margin	= 36.8 – 40.0	= -3.2
	= 3.2 dB below Limit	

8. Recommendation & conclusion

The data collected shows that the **LG Electronics Inc. LCD Monitor (Model No.: M4712CG)** was complies with § 15.107 and 15.109 of the FCC Rules.