

客戶名稱 : **LG 17Z90Q**
CUSTOMER

Document No.: _____
Approval Sheet Rev.: A0
Spec. Rev. : A0

<h1>承認書</h1>
<h2>APPROVAL SHEET</h2>

產品品名/Product Model No. : WA-P-LELE-04-011

客戶料號/Customer No. : EAA65976901

發行日期/ Issue Date : 2021/08/30

承認日期/ Approved Date : _____

Approved by customer: (signing or stamping here)



蘇州市相城區黃埭鎮潘陽工業園區中心大道5號

350 苗栗縣竹南鎮公義里11鄰科義街11號
電話：037-585-555
傳真：037-585-511

No.5,zhongxin Road, PanYang industrial Park,HuangDai town,XiangCheng district ,Suzhou City

No. 11, Ke-Yi St., Chunan, Miaoli 350, Taiwan, R.O.C.
Tel. : +886-37-585-555
Fax : +886-37-585-511

WA-P-LELE-04-011 Specification

1. Explanation of part number :

WA - P - LELE - 04 - 011
 (1) (2) (3) (4) (5)

(1) Product Type : Wireless Antenna

(2) PCB: PCB

(3) Frequency : 2400~2500MHz&5100~5800MHz&5925~7125MHz

(4) Coaxial Cable Type : With ϕ 0.81 Main Black / AUX Gray

(5) Suffix : 011

2. Storage Condition:

Temperature -40 to +70°C
 Humidity 20 to 65 %RH

3. Operating Condition:

Temperature -40 to +70°C
 Humidity 10 to 85 %RH

4. Electrical Specification :

Those specifications were specially defined for LG 17Z90Q WIFI model, and all characteristics were measured under the model's handset testing jig .

4-1. Frequency Band:

Frequency Band	MHz
WIFI BT	2400~2500 & 5100~5800 & 5925~7125

UNLESS OTHER SPECIFIED TOLERANCES ON :

X=± X.X=± X.XX=±

ANGLES=± HOLEDIA=±



佳邦科技股份有限公司
 INPAQ TECHNOLOGY CO., LTD.

SCALE : UNIT : mm

DRAWN BY: 张涛 CHECKED BY: 张涛

DESIGNED BY : 胡志清 APPROVED BY : 徐克文

THIS DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF INPAQ TECHNOLOGY CO.,LTD.AND SHALL NOT BE REPRODUCED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS OR DEVICES WITHOUT PERMISSION

TITLE : WA-P-LELE-04-011 Specification	DOCUMENT NO.	PAGE REV.
		P2

4-2. Impedance

50 ohm nominal

4-3. Matching circuit

None

4-4. VSWR

4-4.1 Measuring Method

- 1.A 50Ω coaxial cable is connected to the antenna. Then this cable is connected to a network analyzer to measure the VSWR
- 2.Keeping this jig away from metal at least 20cm

4-4.2 Measurement frequency points and VSWR value

VSWR	Frequency (Unit MHz)	Spec	1
Main Antenna	2400	≤3.5	1.3
	2500	≤3.5	2.1
	5150	≤4.0	2.4
	7125	≤4.0	2.6
	Judgement		ok
Aux Antenna	2400	≤3.5	2.0
	2500	≤3.5	1.6
	5150	≤4.5	2.6
	7125	≤4.5	2.3
	Judgement		ok

UNLESS OTHER SPECIFIED TOLERANCES ON :

X=± X.X=± X.XX=±

ANGLES=± HOLEDIA=±

SCALE : UNIT : mm

DRAWN BY: 张涛 CHECKED BY: 张涛

DESIGNED BY : 胡志清 APPROVED BY : 徐克文

TITLE : WA-P-LELE-04-011 Specification



佳邦科技股份有限公司
INPAQ TECHNOLOGY CO., LTD.

THIS DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF INPAQ TECHNOLOGY CO.,LTD.AND SHALL NOT BE REPRODUCED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS OR DEVICES WITHOUT PERMISSION

DOCUMENT
NO.


PAGE REV.
P2

4-5. Efficiency and Gain

4-5.1 Measure method

1. Using a low loss coaxial cable to link a standard handset jig
2. Fixed this handset jig on chamber's rotator plane
3. Linking jig into network analyzer port and using a probing horn antenna to collect data.
4. Using another standard gain horn antenna to calibrated those data

4-5.2 Chamber definition

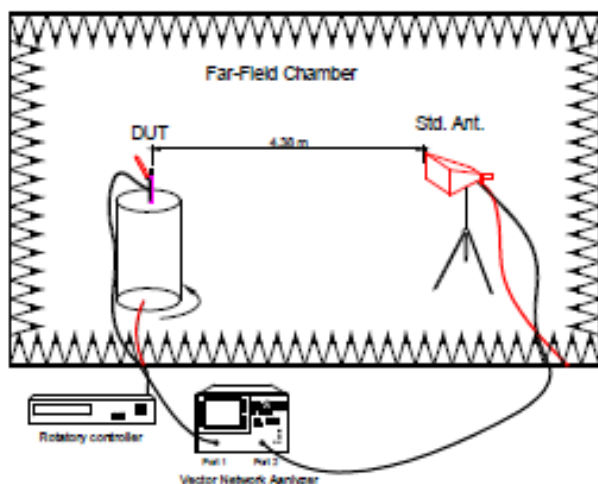

1. An anechoic chamber (8mx4mx3.5m) which satisfied far-field condition was applied to avoid multi-path effect
2. The quiet room region is 40cmx40cmx40cm at the center of rotator
3. The distance between DUT and standard antenna is 4.38 m
4. Probing antenna (9120D horn antenna) and standard gain horn antenna (BBHA9120 LPF 700MHz ~6GHz)

UNLESS OTHER SPECIFIED TOLERANCES ON :

X=± X.X=± X.XX=±

ANGLES=± HOLEDIA=±

SCALE : UNIT : mm

DRAWN BY: 张涛 CHECKED BY: 张涛

DESIGNED BY: 胡志清 APPROVED BY: 徐克文

TITLE : WA-P-LELE-04-011 Specification



佳邦科技股份有限公司
INPAQ TECHNOLOGY CO., LTD.

THIS DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF INPAQ TECHNOLOGY CO.,LTD.AND SHALL NOT BE REPRODUCED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS OR DEVICES WITHOUT PERMISSION

DOCUMENT
NO.

PAGE REV.
P2

4-5.3 Efficiency and Gain

Antenna gain is marked (dBi) and is based on STANDARD HORN antenna. The data shows Peak Gain and Average Gain.

4-5-3-1 Electrical specification

Frequency (MHz)	Average Efficiency (%)
2400~2500	>30
5100~5825	>30

4-5.3-2 Efficiency and Gain Test Data

Frequency(MHz)	Main Antenna-1		
	Peak Gain (dBi)	Efficiency (dBi)	Efficiency(%)
2400	2.2	-5.0	31.3
2450	3.0	-4.7	33.7
2500	2.7	-5.1	31.1
5150	4.1	-4.2	38.3
5400	4.0	-4.1	39.0
5850	3.7	-4.1	38.9
5925	3.5	-4.3	37.0
6525	2.7	-4.6	34.6
7125	2.5	-4.8	33.2

Frequency(MHz)	AUX Antenna-1		
	Peak Gain (dBi)	Efficiency (dBi)	Efficiency(%)
2400	1.1	-4.8	32.8
2450	1.6	-4.6	34.8
2500	1.5	-4.7	33.7
5150	3.8	-5.0	31.7
5400	3.7	-4.7	34.1
5850	3.3	-4.7	33.7
5925	3.2	-4.9	32.4
6525	2.5	-4.9	32.6
7125	2.1	-5.2	30.4

UNLESS OTHER SPECIFIED TOLERANCES ON :

X=± X.X=± X.XX=±

ANGLES=± HOLEDIA=±



佳邦科技股份有限公司
INPAQ TECHNOLOGY CO., LTD.

SCALE : UNIT : mm

DRAWN BY: 张涛 CHECKED BY: 张涛

DESIGNED BY : 胡志清 APPROVED BY : 徐克文

THIS DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF INPAQ TECHNOLOGY CO.,LTD.AND SHALL NOT BE REPRODUCED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS OR DEVICES WITHOUT PERMISSION


TITLE : WA-P-LELE-04-011 Specification

DOCUMENT
NO.


PAGE REV.
P2

4-5.3-3 Antenna 3D Radiation Pattern

WA-P-LELE-04-011 Antenna 3D Pattern

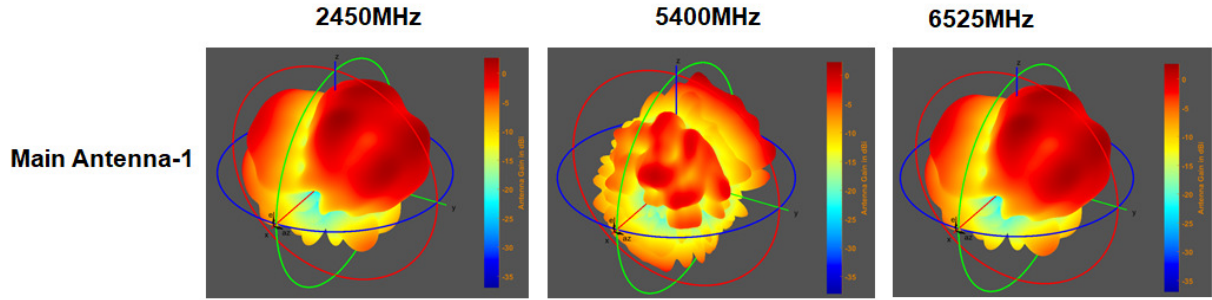

WA-P-LELE-04-011 Antenna 3D Pattern

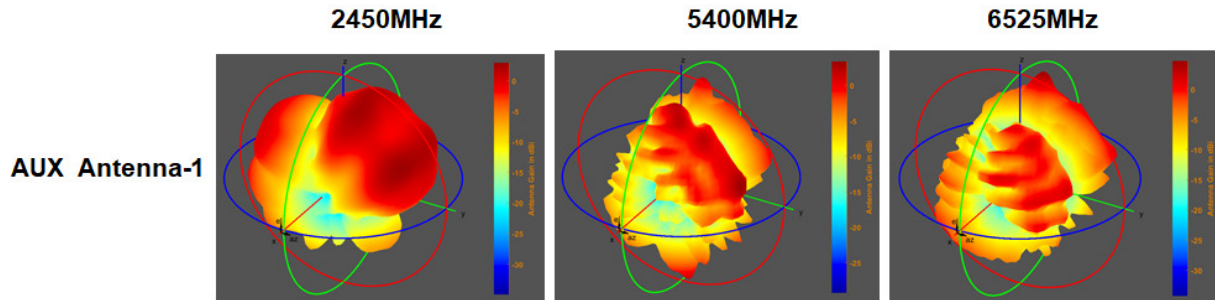

UNLESS OTHER SPECIFIED TOLERANCES ON :

X=± X.X=± X.XX=±

ANGLES=± HOLEDIA=±



佳邦科技股份有限公司
INPAQ TECHNOLOGY CO., LTD.

SCALE : UNIT : mm

DRAWN BY: 张涛 CHECKED BY: 张涛

DESIGNED BY: 胡志清 APPROVED BY: 徐克文

THIS DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF INPAQ TECHNOLOGY CO.,LTD.AND SHALL NOT BE REPRODUCED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS OR DEVICES WITHOUT PERMISSION

TITLE : WA-P-LELE-04-011 Specification

DOCUMENT NO.

PAGE REV.
P2