

EVALUATION REPORT

for Certification of Conformity

FCC Part 18

Applicant: LG Electronics USA, Inc.
111 Sylvan Avenue North Building
Englewood Cliffs New Jersey United States 07632,
Attn: Heejae Cho / Director

Date of Issue: Oct 04, 2023
Order Number: GETEC-C1-23-558
Test Report Number: GETEC-E3-23-062
Test Site: GUMI UNIVERSITY EMC CENTER
CAB Designation Number: KR0033

FCC ID. : BEJQ40141HA
Applicant: LG Electronics USA, Inc.

Rule Part(s) : FCC Part 18
Test Method : FCC/OET MP-5
EUT Type : HOUSEHOLD COOKTOP
Equipment Class : Part 18 Consumer Device(8CC)
Type of Authority : Certification
Model Name : CBIH3013BE
Trade Mark : LG

This equipment has been shown to be in compliance with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in FCC/OET MP-5 (1986)

I attest to the accuracy of data. All measurements reported herein were performed by me or were made under my supervision and are correct to the vest of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.

Tested by,



Tak Dong Kim, Associate Engineer
GUMI UNIVERSITY EMC CENTER

Reviewed by,



Hyoung-Seop Kim, Technical Manager
GUMI UNIVERSITY EMC CENTER



Revision list

Test Report No.	Issue Date	Description
GETEC-E3-23-062	Oct. 04, 2023	First Approval Test Report

※ This test report is not related to the accredited test result by ISO/IEC 17025 and KOLAS





CONTENTS

1. GENERAL INFORMATION	4
2. INTRODUCTION	5
3. PRODUCT INFORMATION	6
3.1 DESCRIPTION OF EUT.....	6
3.2 SUPPORT EQUIPMENT / CABLES USED	7
3.3 MODIFICATION ITEM(S).....	7
4. DESCRIPTION OF TESTS.....	8
4.1 TEST CONDITION.....	8
5. SUMMARY OF TEST RESULTS	8
6. CONDUCTED EMISSION.....	9
6.1 OPERATING ENVIRONMENT	10
6.2 TEST SET-UP	10
6.3 MEASUREMENT UNCERTAINTY.....	10
6.4 LIMIT	11
6.5 TEST EQUIPMENT USED.....	11
6.6 TEST DATA FOR CONDUCTED EMISSION	11
7. RADIATED EMISSION	20
7.1 OPERATING ENVIRONMENT	20
7.2 TEST SET-UP	20
7.3 MEASUREMENT UNCERTAINTY.....	22
7.4 LIMIT	23
7.5 TEST EQUIPMENT USED.....	23
7.6 TEST DATA FOR RADIATED EMISSION.....	24
8. SAMPLE CALCULATIONS.....	28
8.1 EXAMPLE 1 :	28
8.2 EXAMPLE 2 :	28
9. RECOMMENDATION & CONCLUSION.....	28
APPENDIX A – ATTESTATION STATEMENT	
APPENDIX B – LABEL LOCATION	
APPENDIX C – BLOCK DIAGRAM	
APPENDIX D – SCHEMATIC DIAGRAM	
APPENDIX E – TEST SETUP PHOTOGRAPH	
APPENDIX F – EXTERNAL PHOTOGRAPH	
APPENDIX G – INTERNAL PHOTOGRAPH	
APPENDIX H – USER’S MANUAL	
APPENDIX I – OPERATIONAL DESCRIPTION	
APPENDIX J – RF EXPOSURE EVALUATION	





Scope: Measurement and determination of electromagnetic emissions (EME) of radio frequency devices including intentional and / or unintentional radiators for compliance with technical rules and regulations of the Federal Communications Commission.

1. General Information

Applicant: LG Electronics USA, Inc.

**Applicant Address: 111 Sylvan Avenue North Building
Englewood Cliffs New Jersey United States 07632**

Manufacturer: LG Electronics Inc.

**Manufacturer Address: 170, Sungsanpaechong-ro, Seongsan-gu, Changwon-si,
Gyeongsangnam-do, 51533, Korea**

Contact Person: Heejae Cho / Director

Telephone Number: 201-266-2215

- **FCC ID.** BEJQ40141HA
- **EUT Type** HOUSEHOLD COOKTOP
- **Model Name** CBIH3013BE
- **Rule Part(s)** FCC Part 18
- **Test Method** FCC/OET MP-5
- **Type of Authority** Certification
- **Test Procedure(s)** FCC/OET MP-5
- **Dates of Test** Sep 11, 2023 ~ Sep 13, 2023
- **Place of Test** **GUMI UNIVERSITY EMC CENTER**
(FCC Test Firm Registration Number: 269701)
37 Yaeun-ro, Gumi-si, Gyeongsangbuk-do, 39213, Republic of Korea.
- **Test Report Number** GETEC-E3-23-062
- **Dates of Issue** Oct 04, 2023





2. Introduction

The measurement procedure described in American National Standard for Methods of Measurement of Radio-Nose Emissions From Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz (ANSI C63.4-2014) was used in determining radiated and conducted emissions emanating from **HOUSEHOLD COOKTOP (Model name: CBIH3013BE)**.

These measurement tests were conducted at **GUMI UNIVERSITY EMC CENTER**

The site address is 37 Yaeun-ro, Gumi-si, Gyeongsangbuk-do, 39213, Republic of Korea.

This test site is one of the highest point of Gumi UNIVERSITY at about 200 km away from Seoul city and 40 km away from Daegu city. It is located in the valley surrounded by mountains in all directions where ambient radio signal conditions are quiet and a favorable area to measure the radio frequency interference on open field test site for the computing and ISM devices manufactures. The detailed description of the measurement facility was found to be in compliance with the requirements of §2.948 according to ANSI C63.4 (2014)

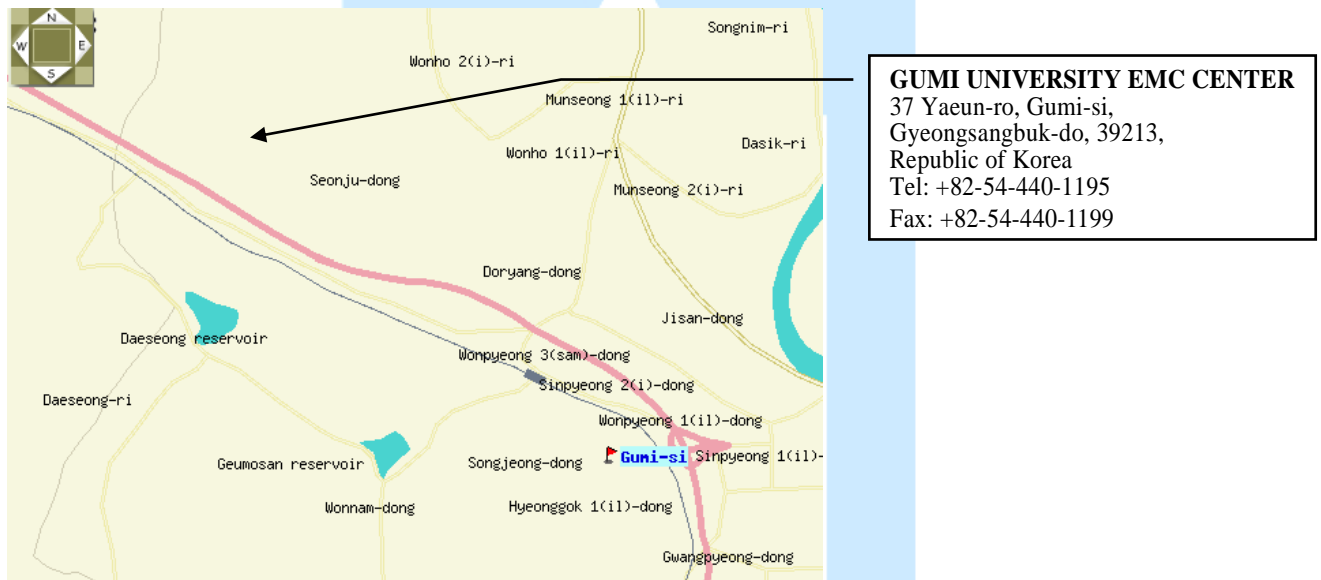


Fig 1. The map above shows the GUMI UNIVERSITY in vicinity area.



3. Product Information

3.1 Description of EUT

The Equipment under Test (EUT) is the **LG Electronics USA, Inc.**
HOUSEHOLD COOKTOP (Model Name: CBIH3013BE)
FCC ID.: BEJQ40141HA.

Models		CBIH3013BE
Description		Induction Cooktop
Electrical Specifications	Connection voltage	240/208 VAC 60 Hz., 29.6 A / 27.9 A
	Maximum connected power load	7100 W / 5806 W
Cooktop Dimensions		30 3/4" (781 mm) (W) × 3 9/16" (91 mm) (H) × 21" (534 mm) (D)
Countertop Cutout Dimensions		Standard Installation 28 1/2" (724 mm) (W) × 5 5/8" (142 mm) (H) × 19 5/8" (498 mm) (D)

Wireless LAN Module Specifications

Frequency Range	2412 MHz - 2462 MHz
Output Power (Max)	< 30 dBm

CBIH3013BE* Cooking Zones Technical Specifications

Position	Size	Power (Level 9 / Boost)
Front Left Element	7 3/16" (185 mm)	1717 / 2617 W (208 V) 2100 / 3200 W (240 V)
Front Right Element	6 1/2" (165 mm)	1063 / 1472 W (208 V) 1300 / 1800 W (240 V)
Rear Left Element	6 1/2" (165 mm)	1063 / 1472 W (208 V) 1300 / 1800 W (240 V)
Center Element	9 15/16" (253 mm)	1963 / 3517 W (208 V) 2400 / 4300 W (240 V)



3.2 Support Equipment / Cables used

3.3.1 Used Support Equipment

Description	Manufacturer	Model Name	S/N & FCC ID.
None	-	-	S/N: - FCC ID.: -

See "Appendix E – Test Setup Photographs" for actual system test set-up

3.3.2 System configuration

Description	Manufacturer	Model Name	S/N & FCC ID.
WLAN module	LG Electronics	LCWB-001	S/N: -. FCC ID.: BEJ-LCWB001

3.3.3 Used Cable(s)

Cable Name	Condition	Description
Power cable	Connected to the EUT and AC power	1.80 m Unshielded.

3.3 Modification Item(s)

-. None



4. Description of tests

4.1 Test Condition

The EUT was installed, arranged and operated in a manner that is most representative of equipment as typically used. The measurements were carried out while varying operating modes and cable positions within typically arrangement to determine maximum emission level.

The representative and worst test mode(s) were noted in the test report.

- Test Voltage / Frequency: AC 208V / 240 V, 60 Hz
- Operating condition during the test(s) :
 This device has been tested in the configurations of Induction mode with WLAN module operating.
Induction mode: This device has been operated (boost mode) with an enameled steel vessel filled with tap water up to 80 % of its maximum capacity.

Cooking element "1"= left front hob , "2"= left rear hob, "3"= Center hob, "4"= right hob
 Cooking vessels
 "1"= 210 mm
 "2", "4"= 180 mm
 "3"= 300 mm

4.2 General Test Procedures

Conducted Emissions

The EUT is placed on the turntable, which is 0.8 m above ground plane. According to the requirements in Section 13.1.4.1 of ANSI C63.4 (2014) Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30MHz using CISPR Quasi-peak and average detector modes.

Radiated Emissions

The EUT is placed on a turn table, which is 0.8 m above ground plane. The turntable shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3 m away from the receiving antenna, which Fixed at 2 m above the ground plane to find out the highest emission.

And also, each emission was to be maximized by the table was turned from 0 degrees to 360 degrees. In order to find out the max emission, the relative positions of this hand-held transmitter (EUT) was rotated through three orthogonal axes according to the requirements in Section 13.1.4.1 of ANSI C63.4 (2014).

5. Summary of Test Results

FCC Part Section(s)	Test Description	Test Result
§18.305	Radiated Emission	Pass
§18.307	Conducted Emission	Pass





6. Conducted Emission

-Test Description

The Line conducted emission test facility is inside a 4 m × 8 m × 2.5 m shielded enclosure. (FCC Test Firm Registration No.: 269701)

The EUT was placed on a non-conducting 1.0 m by 1.5 m table, which is 0.8 m in height and 0.4 m away from the vertical wall of the shielded enclosure.

The EUT is powered from the Rohde & Schwarz LISN (ENV216) and the support equipment is powered from the Rohde & Schwarz LISN (ENV216). Powers to the LISN are filtered by high-current high insertion loss power line filter.

Sufficient time for EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition.

The RF output of the LISN was connected to the EMI test receiver (Rohde & Schwarz, ESCI).

Exploratory measurements were conducted to identify the highest emission by operating the EUT in a range of typical modes of operation, cable positions, system configuration and arrangement.

Based on exploratory measurements, the final measurements were conducted at the worst test conditions.

Exploratory measurements were scanned using Peak mode of EMI Test receiver from 150 kHz to 30 MHz with 20 ms sweep time. The final measurements were measured with Quasi-Peak and Average mode.

The bandwidth of EMI Test Receiver was set to 9 kHz. Interface cables were connected to the available interface ports of the test unit. Excess cable lengths were bundled at center with 30 cm ~ 40 cm.

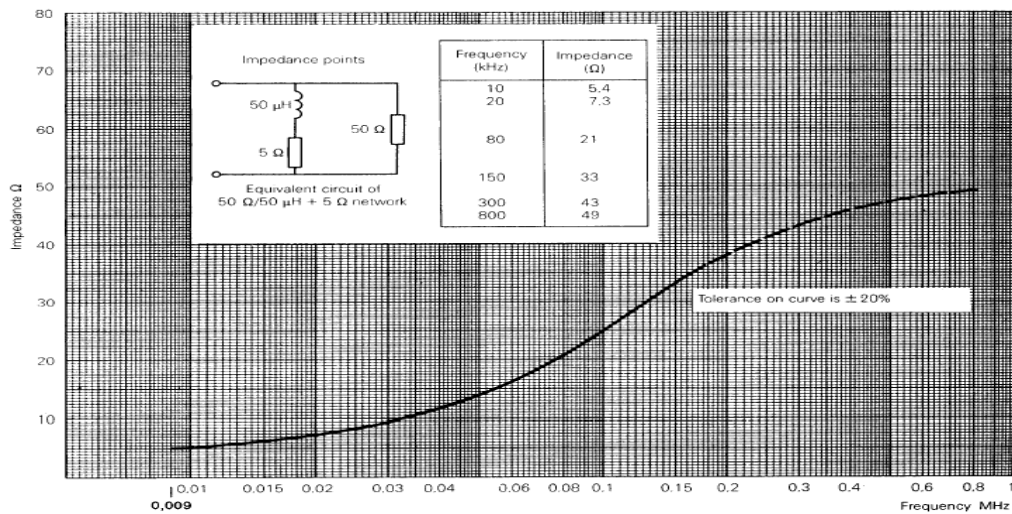


Fig 2. Impedance of LISN



6.1 Operating Environment

Temperature : 24.9 °C
 Relative Humidity : 54.8 %
 Air Pressure : 100.6 kPa

6.2 Test Set-up

The conducted emission measurements were performed in the shielded room.

The EUT was placed on wooden table, 0.8 m heights above the floor, 0.4 m from the reference ground plane (GRP) wall and 0.8 m from AMN & ISN.

AMN is bonded on horizontal reference ground plane.

The ground plane, which was electrically bonded to the shield room, ground system and all power lines entering the shield room, were filtered.

6.3 Measurement Uncertainty

The measurement uncertainty was calculated in accordance with ISO “Guide to the expression of uncertainty in measurement.”

The measurement uncertainty was given with a confidence of 95 %.

Test Items	Uncertainty	Remark
Conducted emission (9 kHz ~ 150 kHz)	3.69 dB	Confidence level of approximately 95 % ($k = 2$)
Conducted emission (150 kHz ~ 30 MHz)	3.32 dB	Confidence level of approximately 95 % ($k = 2$)

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2.

The listed uncertainties are the worst case uncertainty for the entire range of measurement. please note that the uncertainty values are provided for informational purposes only are not used in determining the PASS/FAIL results





6.4 Limit

RFI Conducted	FCC Limit(dB μ V/m)	
	Quasi-Peak	Average
0.009 MHz ~ 0.05 MHz	110	-
0.05 MHz ~ 0.15 MHz	90 ~ 80*	-
0.15 MHz ~ 0.5 MHz	66 ~ 56*	56 ~ 46*
0.5 MHz ~ 5 MHz	56	46
5 MHz ~ 30 MHz	60	50
*Limits decreases linearly with the logarithm of frequency.		

6.5 Test Equipment used

Model Name	Manufacturer	Description	Serial Number	Calibration Date
■ - ESCI	Rohde & Schwarz	EMI Test Receiver	100237	Apr. 05, 2023
■ - ENV216	Rohde & Schwarz	LISN	100173	Apr. 05, 2023
□ - ENV216	Rohde & Schwarz	LISN	100172	Apr. 05, 2023
□ - ESH2-Z5	Rohde & Schwarz	LISN	829991/009	Apr. 06, 2023
□ - VTSD 9561-D	SCHWARZBECK	Pulse Limiter	32	Apr. 06, 2023
■ - EMC 32	Rohde & Schwarz	Software	Ver.8.53	N/A


6.6 Test data for Conducted Emission

- Test Date : Sep 11, 2023 ~ Sep 12, 2023
- Resolution Bandwidth : 200 Hz (9 kHz ~ 0.15 MHz) / 9 kHz (0.15 MHz ~ 30 MHz)
- Frequency Range : 9 kHz ~ 30 MHz
- Line : L1: Live, N: Neutral
- Comment : None





- Operating condition: Induction mode with WLAN
- AC 208 V / 60 Hz**
Cooking element #1

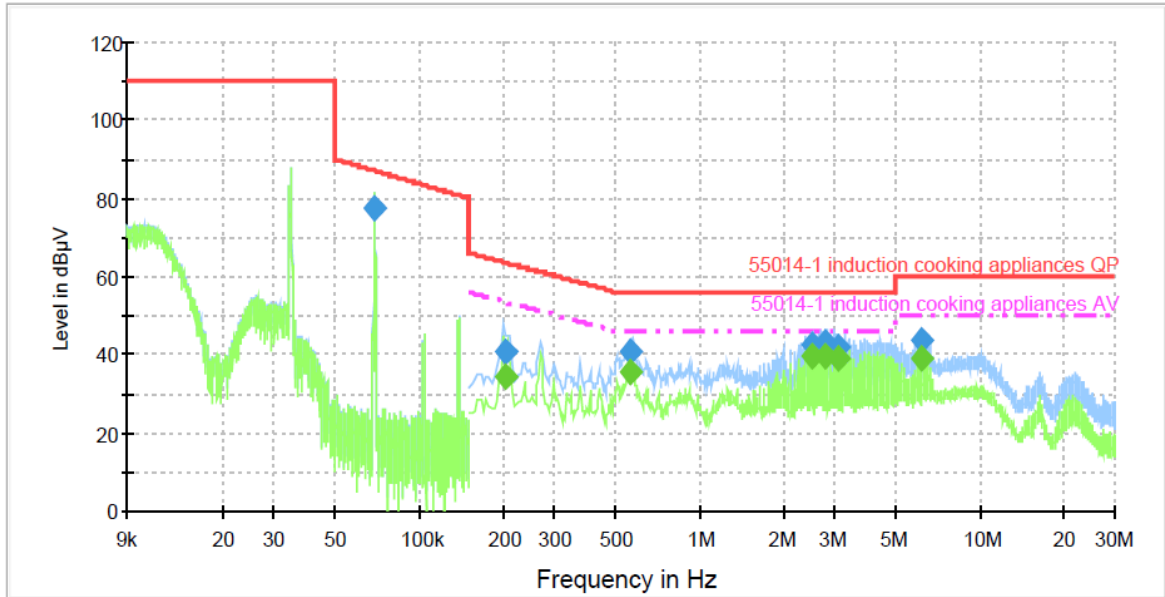

— 55014-1 induction cooking appliances QP - - - 55014-1 induction cooking appliances AV
— Preview Result 1-PK+ — Preview Result 2-AVG
◆ Final Result 1-QPK ◆ Final Result 2-CAV

Final Result 1

Frequency (MHz)	QuasiPeak (dBµV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)	Comment
0.068154	77.7	1000.0	0.200	Off	N	9.6	9.5	87.2	
0.203006	40.7	1000.0	9.000	Off	L1	9.6	22.8	63.5	
0.567862	40.7	1000.0	9.000	Off	N	9.6	15.3	56.0	
2.497188	42.7	1000.0	9.000	Off	L1	9.6	13.3	56.0	
2.801031	43.0	1000.0	9.000	Off	N	9.7	13.0	56.0	
3.104306	42.1	1000.0	9.000	Off	N	9.7	13.9	56.0	
6.204706	43.6	1000.0	9.000	Off	N	9.7	16.4	60.0	


Final Result 2

Frequency (MHz)	CAverage (dBµV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)	Comment
0.203006	34.6	1000.0	9.000	Off	L1	9.6	18.9	53.5	
0.567862	35.3	1000.0	9.000	Off	N	9.6	10.7	46.0	
2.497188	39.6	1000.0	9.000	Off	L1	9.6	6.4	46.0	
2.801031	39.8	1000.0	9.000	Off	N	9.7	6.2	46.0	
3.104306	39.3	1000.0	9.000	Off	N	9.7	6.7	46.0	
6.204706	39.1	1000.0	9.000	Off	N	9.7	10.9	50.0	





Cooking element #2

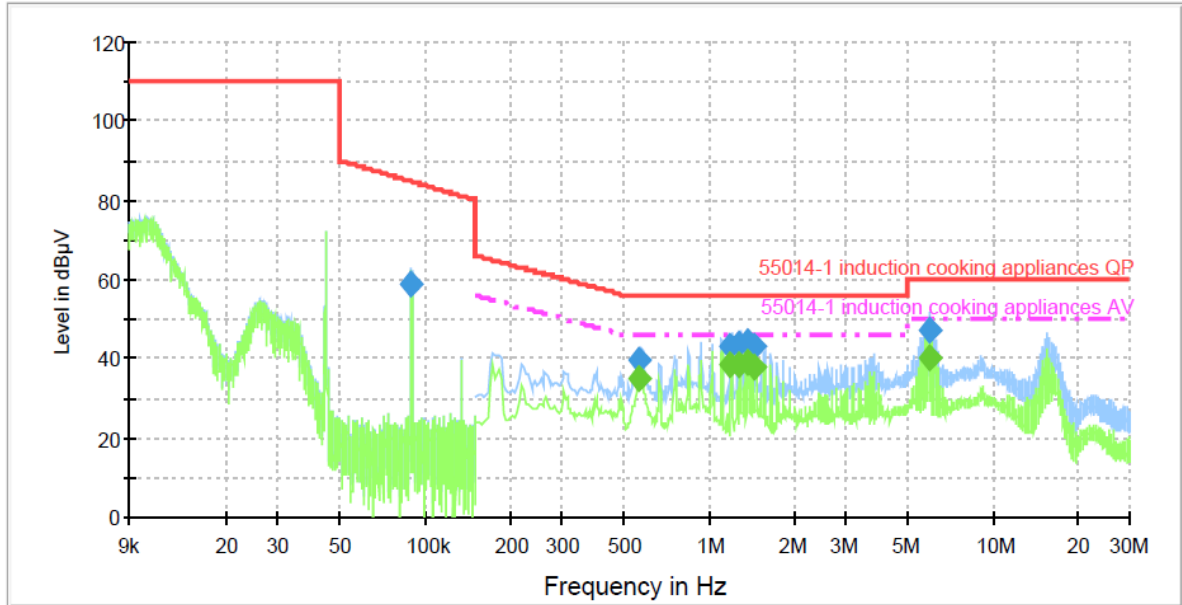

- 55014-1 induction cooking appliances QP
- - - 55014-1 induction cooking appliances AV
- Preview Result 1-PK+
- Preview Result 2-AVG
- ◆ Final Result 1-QPK
- ◆ Final Result 2-CAV

Final Result 1

Frequency (MHz)	QuasiPeak (dBµV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)	Comment
0.089113	59.1	1000.0	0.200	Off	N	9.6	25.6	84.7	
0.567862	39.6	1000.0	9.000	Off	N	9.6	16.4	56.0	
1.182981	43.0	1000.0	9.000	Off	L1	9.6	13.0	56.0	
1.264800	43.7	1000.0	9.000	Off	L1	9.6	12.3	56.0	
1.354619	44.3	1000.0	9.000	Off	L1	9.6	11.7	56.0	
1.440169	42.9	1000.0	9.000	Off	L1	9.6	13.1	56.0	
5.928862	47.0	1000.0	9.000	Off	N	9.7	13.0	60.0	


Final Result 2

Frequency (MHz)	CAverage (dBµV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)	Comment
0.567862	34.8	1000.0	9.000	Off	N	9.6	11.2	46.0	
1.182981	38.2	1000.0	9.000	Off	L1	9.6	7.8	46.0	
1.264800	38.6	1000.0	9.000	Off	L1	9.6	7.4	46.0	
1.354619	39.0	1000.0	9.000	Off	L1	9.6	7.0	46.0	
1.440169	37.8	1000.0	9.000	Off	L1	9.6	8.2	46.0	
5.928862	40.3	1000.0	9.000	Off	N	9.7	9.7	50.0	





Cooking element #3

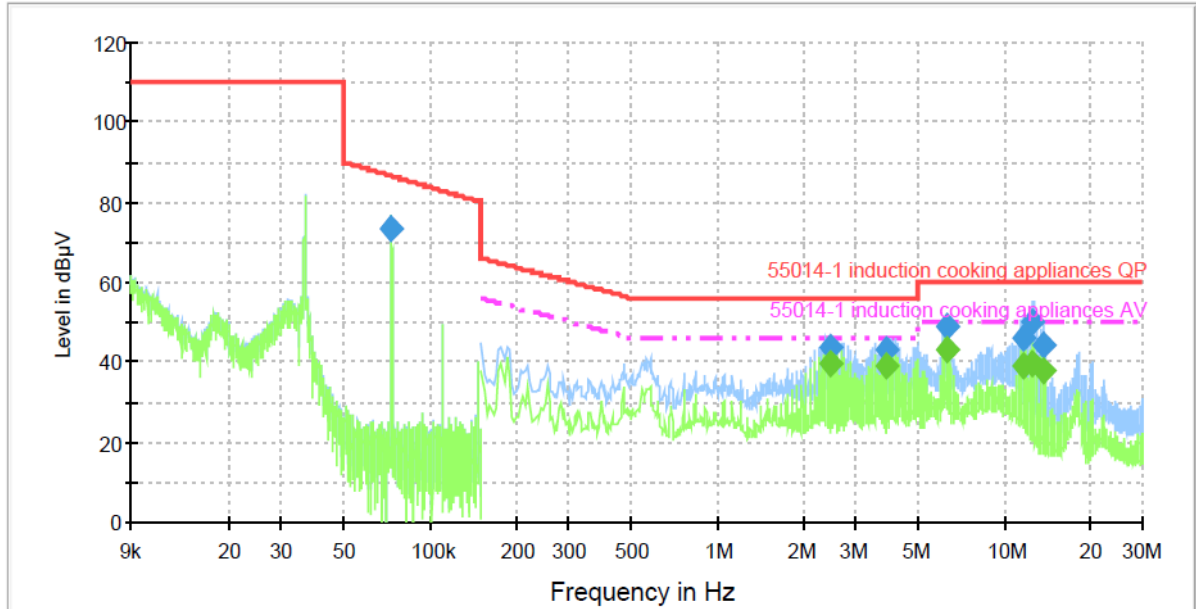

- 55014-1 induction cooking appliances QP
- - - 55014-1 induction cooking appliances AV
- Preview Result 1-PK+
- Preview Result 2-AVG
- ◆ Final Result 1-QPK
- ◆ Final Result 2-CAV

Final Result 1

Frequency (MHz)	QuasiPeak (dBµV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)	Comment
0.072737	73.5	1000.0	0.200	Off	L1	9.6	13.1	86.6	
2.467875	43.8	1000.0	9.000	Off	N	9.6	12.2	56.0	
3.848438	43.0	1000.0	9.000	Off	N	9.7	13.0	56.0	
6.275600	48.8	1000.0	9.000	Off	L1	9.7	11.2	60.0	
11.625675	46.3	1000.0	9.000	Off	N	9.8	13.7	60.0	
12.452162	50.3	1000.0	9.000	Off	N	9.8	9.7	60.0	
13.517956	44.0	1000.0	9.000	Off	N	9.8	16.0	60.0	


Final Result 2

Frequency (MHz)	CAverage (dBµV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)	Comment
2.467875	39.6	1000.0	9.000	Off	N	9.6	6.4	46.0	
3.848438	39.0	1000.0	9.000	Off	N	9.7	7.0	46.0	
6.275600	43.1	1000.0	9.000	Off	L1	9.7	6.9	50.0	
11.625675	38.9	1000.0	9.000	Off	N	9.8	11.1	50.0	
12.452162	39.4	1000.0	9.000	Off	N	9.8	10.6	50.0	
13.517956	37.8	1000.0	9.000	Off	N	9.8	12.2	50.0	





Cooking element #4

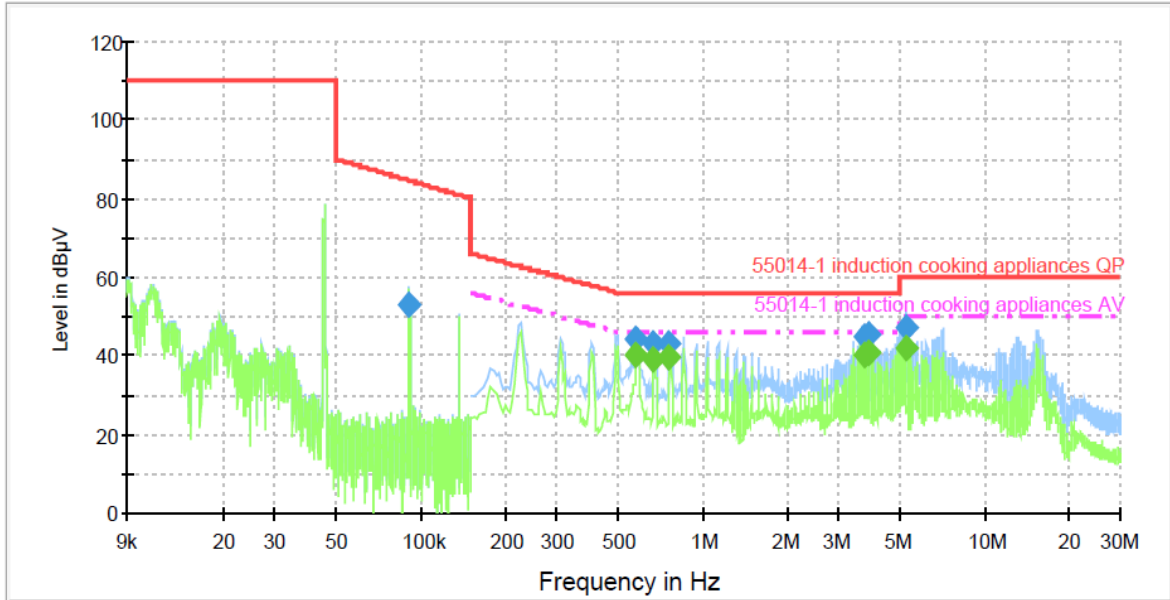

- 55014-1 induction cooking appliances QP
- - - 55014-1 induction cooking appliances AV
- Preview Result 1-PK+
- Preview Result 2-AVG
- ◆ Final Result 1-QPK
- ◆ Final Result 2-CAV

Final Result 1

Frequency (MHz)	QuasiPeak (dBµV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)	Comment
0.090406	52.9	1000.0	0.200	Off	L1	9.6	31.7	84.6	
0.575325	44.4	1000.0	9.000	Off	L1	9.6	11.6	56.0	
0.660606	43.1	1000.0	9.000	Off	N	9.6	13.0	56.0	
0.750156	43.2	1000.0	9.000	Off	N	9.6	12.8	56.0	
3.703994	44.8	1000.0	9.000	Off	N	9.7	11.2	56.0	
3.894288	45.4	1000.0	9.000	Off	L1	9.7	10.6	56.0	
5.213806	47.2	1000.0	9.000	Off	L1	9.7	12.8	60.0	


Final Result 2

Frequency (MHz)	CAverage (dBµV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)	Comment
0.575325	40.3	1000.0	9.000	Off	L1	9.6	5.7	46.0	
0.660606	39.2	1000.0	9.000	Off	N	9.6	6.8	46.0	
0.750156	39.5	1000.0	9.000	Off	N	9.6	6.5	46.0	
3.703994	40.4	1000.0	9.000	Off	N	9.7	5.6	46.0	
3.894288	40.8	1000.0	9.000	Off	L1	9.7	5.2	46.0	
5.213806	42.0	1000.0	9.000	Off	L1	9.7	8.0	50.0	





AC 240 V / 60 Hz
Cooking element #1

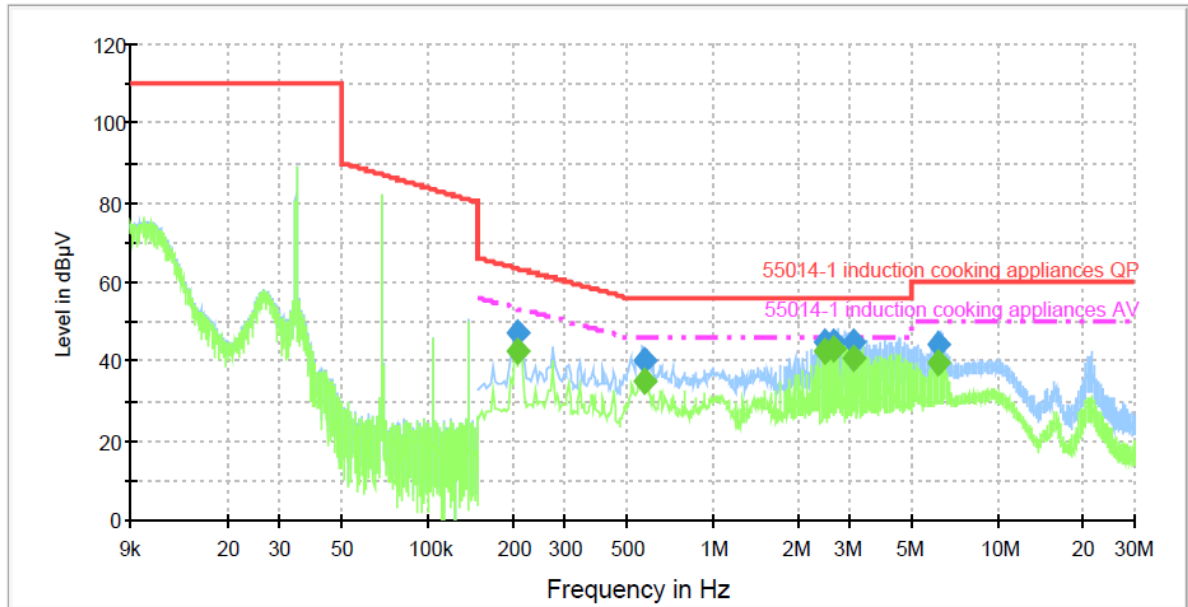

— 55014-1 induction cooking appliances QP - - - 55014-1 induction cooking appliances AV
— Preview Result 1-PK+ — Preview Result 2-AVG
◆ Final Result 1-QPK ◆ Final Result 2-CAV

Final Result 1

Frequency (MHz)	QuasiPeak (dBµV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)	Comment
0.206738	47.2	1000.0	9.000	Off	N	9.6	16.1	63.3	
0.572669	40.1	1000.0	9.000	Off	N	9.6	15.9	56.0	
2.450531	44.9	1000.0	9.000	Off	N	9.6	11.1	56.0	
2.659481	45.1	1000.0	9.000	Off	N	9.7	10.9	56.0	
3.109650	44.8	1000.0	9.000	Off	N	9.7	11.2	56.0	
6.181781	44.0	1000.0	9.000	Off	L1	9.7	16.0	60.0	


Final Result 2

Frequency (MHz)	CAverage (dBµV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)	Comment
0.206738	42.7	1000.0	9.000	Off	N	9.6	10.6	53.3	
0.572669	35.1	1000.0	9.000	Off	N	9.6	10.9	46.0	
2.450531	42.6	1000.0	9.000	Off	N	9.6	3.4	46.0	
2.659481	42.9	1000.0	9.000	Off	N	9.7	3.1	46.0	
3.109650	40.8	1000.0	9.000	Off	N	9.7	5.2	46.0	
6.181781	39.6	1000.0	9.000	Off	L1	9.7	10.4	50.0	





Cooking element #2

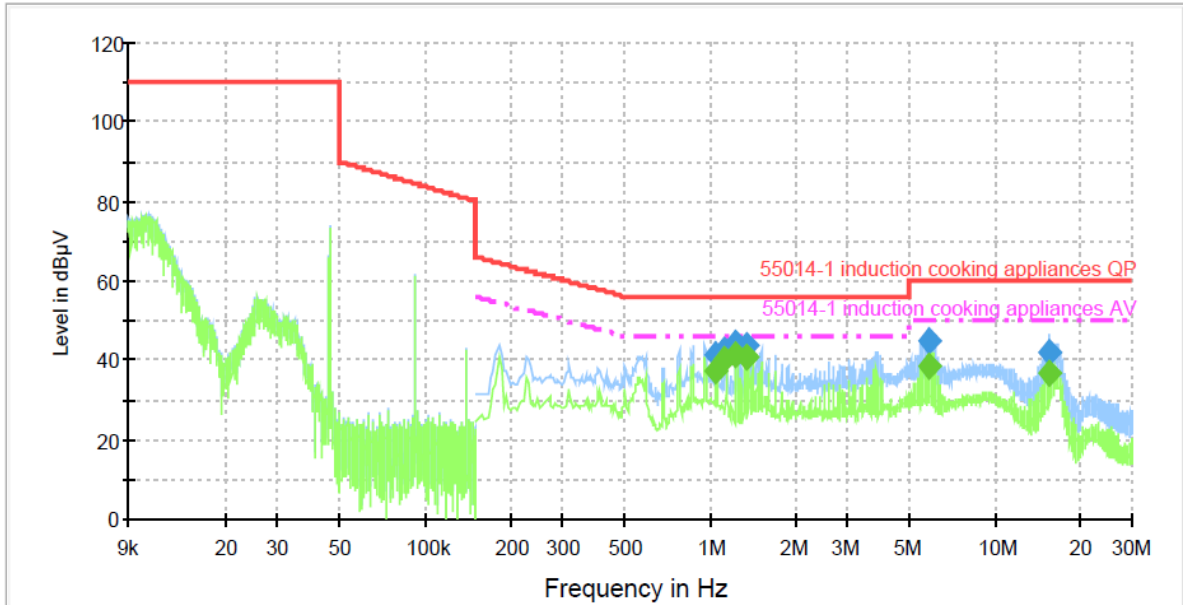

- 55014-1 induction cooking appliances QP
- Preview Result 1-PK+
- Preview Result 2-AVG
- - - 55014-1 induction cooking appliances AV
- ◆ Final Result 1-QPK
- ◆ Final Result 2-CAV

Final Result 1

Frequency (MHz)	QuasiPeak (dBµV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)	Comment
1.038000	41.1	1000.0	9.000	Off	L1	9.6	14.9	56.0	
1.123819	42.7	1000.0	9.000	Off	L1	9.6	13.3	56.0	
1.228831	44.4	1000.0	9.000	Off	L1	9.6	11.6	56.0	
1.330381	43.8	1000.0	9.000	Off	N	9.6	12.2	56.0	
5.817462	44.8	1000.0	9.000	Off	N	9.7	15.2	60.0	
15.404656	42.0	1000.0	9.000	Off	L1	9.8	18.0	60.0	


Final Result 2

Frequency (MHz)	CAverage (dBµV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)	Comment
1.038000	37.3	1000.0	9.000	Off	L1	9.6	8.7	46.0	
1.123819	40.4	1000.0	9.000	Off	L1	9.6	5.6	46.0	
1.228831	41.6	1000.0	9.000	Off	L1	9.6	4.4	46.0	
1.330381	40.8	1000.0	9.000	Off	N	9.6	5.2	46.0	
5.817462	38.5	1000.0	9.000	Off	N	9.7	11.5	50.0	
15.404656	36.6	1000.0	9.000	Off	L1	9.8	13.4	50.0	





Cooking element #3

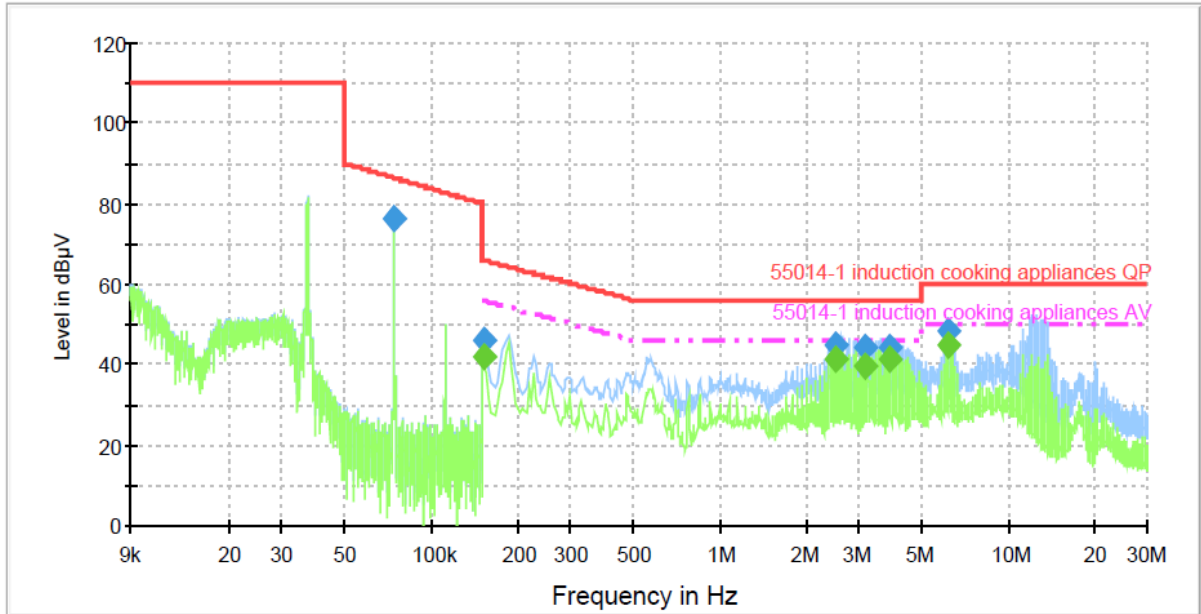

- 55014-1 induction cooking appliances QP
- - - 55014-1 induction cooking appliances AV
- Preview Result 1-PK+
- Preview Result 2-AVG
- ◆ Final Result 1-QPK
- ◆ Final Result 2-CAV

Final Result 1

Frequency (MHz)	QuasiPeak (dBµV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)	Comment
0.073954	76.3	1000.0	0.200	Off	L1	9.6	10.1	86.4	
0.152081	46.3	1000.0	9.000	Off	L1	9.6	19.6	65.9	
2.488919	44.6	1000.0	9.000	Off	L1	9.6	11.4	56.0	
3.153350	44.0	1000.0	9.000	Off	L1	9.7	12.0	56.0	
3.868706	44.3	1000.0	9.000	Off	N	9.7	11.7	56.0	
6.111425	48.2	1000.0	9.000	Off	L1	9.7	11.8	60.0	


Final Result 2

Frequency (MHz)	CAverage (dBµV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)	Comment
0.152081	41.7	1000.0	9.000	Off	L1	9.6	14.2	55.9	
2.488919	41.6	1000.0	9.000	Off	L1	9.6	4.4	46.0	
3.153350	39.7	1000.0	9.000	Off	L1	9.7	6.3	46.0	
3.868706	41.2	1000.0	9.000	Off	N	9.7	4.8	46.0	
6.111425	45.1	1000.0	9.000	Off	L1	9.7	4.9	50.0	





Cooking element #4

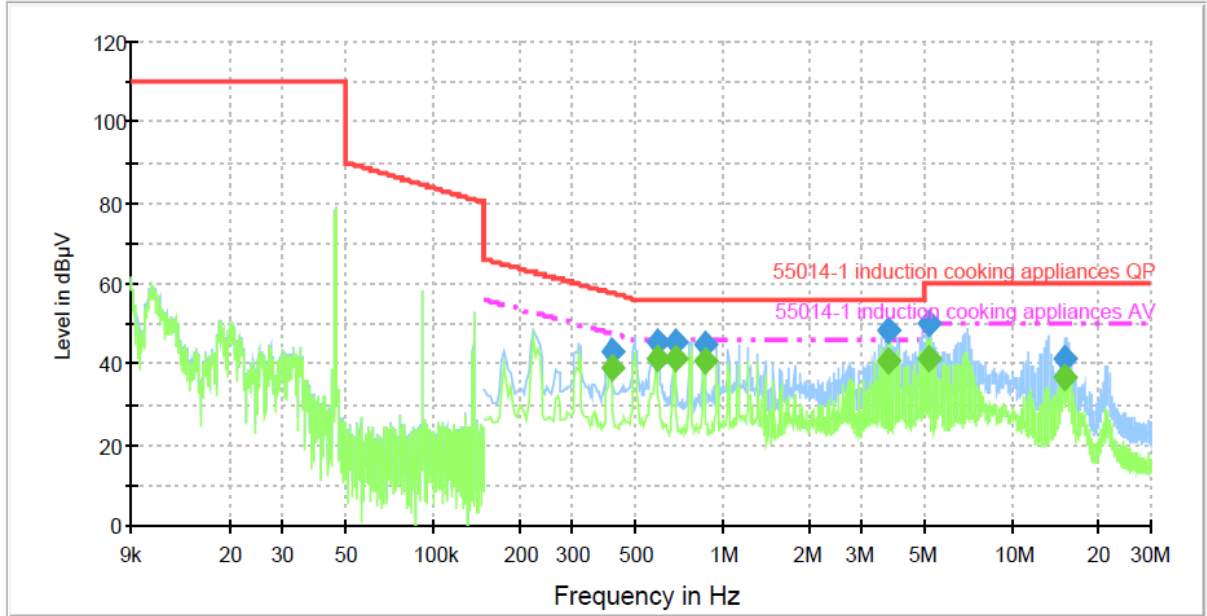

- 55014-1 induction cooking appliances QP
- - - 55014-1 induction cooking appliances AV
- Preview Result 1-PK+
- Preview Result 2-AVG
- ◆ Final Result 1-QPK
- ◆ Final Result 2-CAV

Final Result 1

Frequency (MHz)	QuasiPeak (dBµV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)	Comment
0.415956	43.1	1000.0	9.000	Off	L1	9.6	14.4	57.5	
0.594788	45.5	1000.0	9.000	Off	N	9.6	10.5	56.0	
0.688606	45.2	1000.0	9.000	Off	L1	9.6	10.8	56.0	
0.863438	44.7	1000.0	9.000	Off	N	9.6	11.3	56.0	
3.721306	48.4	1000.0	9.000	Off	N	9.7	7.6	56.0	
5.172762	50.1	1000.0	9.000	Off	N	9.7	9.9	60.0	
15.206631	41.7	1000.0	9.000	Off	N	9.9	18.4	60.0	

Final Result 2

Frequency (MHz)	CAverage (dBµV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)	Comment
0.415956	39.1	1000.0	9.000	Off	L1	9.6	8.4	47.5	
0.594788	41.6	1000.0	9.000	Off	N	9.6	4.4	46.0	
0.688606	41.3	1000.0	9.000	Off	L1	9.6	4.7	46.0	
0.863438	40.7	1000.0	9.000	Off	N	9.6	5.3	46.0	
3.721306	40.6	1000.0	9.000	Off	N	9.7	5.4	46.0	
5.172762	41.5	1000.0	9.000	Off	N	9.7	8.5	50.0	
15.206631	36.5	1000.0	9.000	Off	N	9.9	13.5	50.0	





7. Radiated Emission

7.1 Operating Environment

Temperature : 23.6 °C
Relative Humidity : 48.5 %
Air Pressure : 100.6 kPa

7.2 Test Set-up

The Radiated emission measurements were conducted at the worst test conditions.

The measurements of below 1 GHz were made at 3 m Semi Anechoic Chamber or 10 m Semi Anechoic Chamber (FCC Test Firm Registration No.: 269701) that complies with CISPR 16 / ANSI C63.4.

The frequency range of 9 kHz to 30 MHz, The EUT was placed on a non-conductive turntable approximately 0.8 m above the ground plane. The turntable with EUT was rotated 360° and the receive antenna was fixed 2.0 m on the ground plane.

The frequency range of 30 MHz to 1 000 MHz, The EUT was placed on a non-conductive turntable approximately 0.8 m above the ground plane. The turntable with EUT was rotated 360° and adjusting the receive antenna height from 1.0 m to 4.0 m. All frequencies were investigated in both horizontal and vertical antenna polarity.

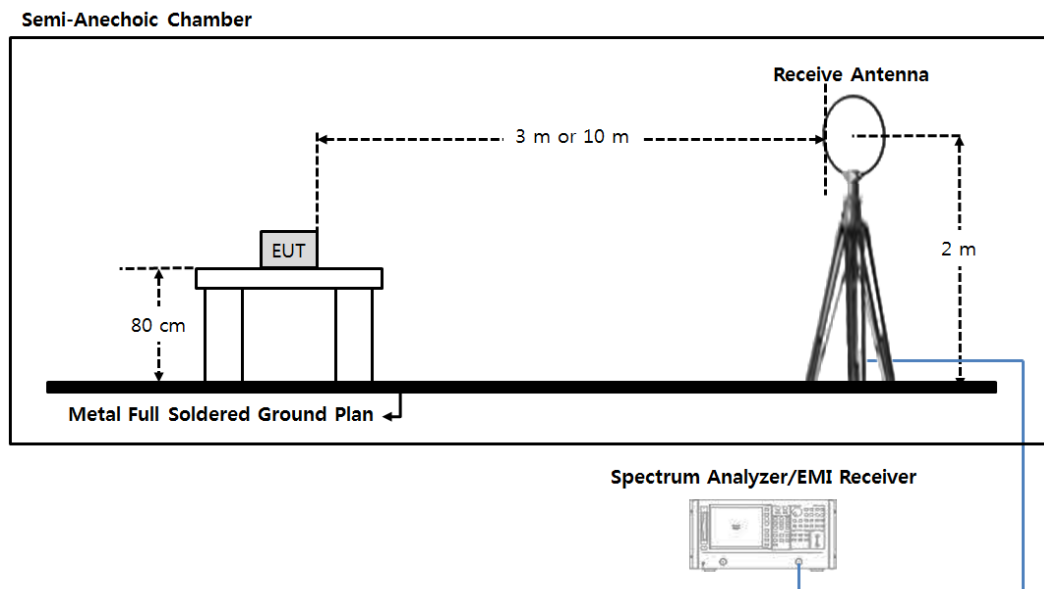


Fig 3. Configurations of Radiated emission test (9 kHz to 30 MHz)

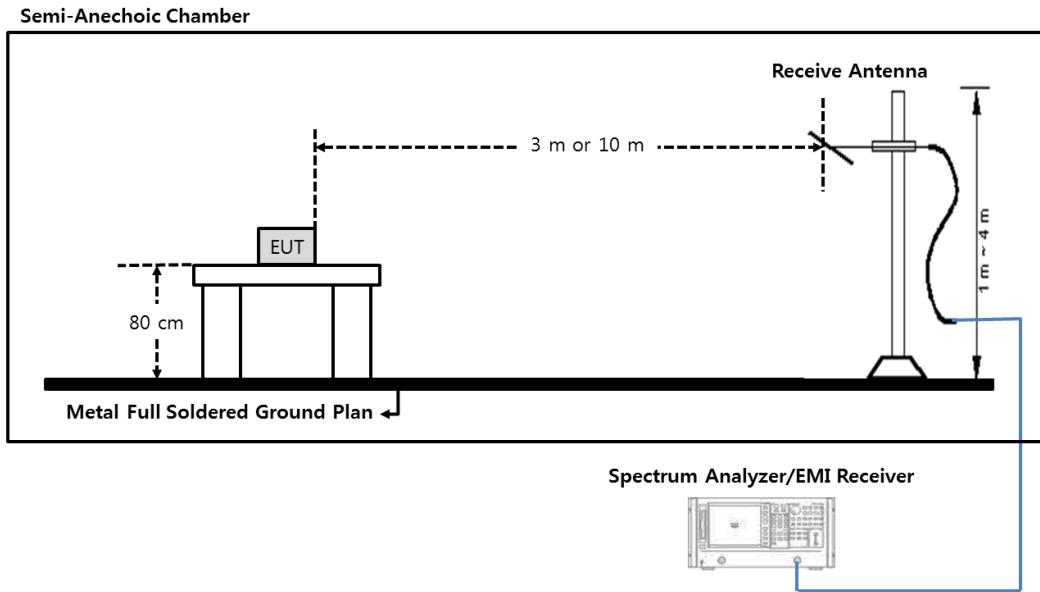


Fig 4. Configurations of Radiated emission test (30 MHz to 1 000 MHz)





7.3 Measurement Uncertainty

The measurement uncertainty was calculated in accordance with ISO “Guide to the expression of uncertainty in measurement”.

The measurement uncertainty was given with a confidence of 95 %.

Test Items(10 m Anechoic Chamber)	Uncertainty	Remark
Radiated emission (30 MHz ~ 300 MHz, 10 m, Vertical)	4.77 dB	Confidence level of approximately 95 % ($k = 2$)
Radiated emission (30 MHz ~ 300 MHz, 10 m, Horizontal)	4.79 dB	Confidence level of approximately 95 % ($k = 2$)
Radiated emission (300 MHz ~ 1 000 MHz, 10 m, Vertical)	4.91 dB	Confidence level of approximately 95 % ($k = 2$)
Radiated emission (300 MHz ~ 1 000 MHz, 10 m, Horizontal)	4.90 dB	Confidence level of approximately 95 % ($k = 2$)
Radiated emission (1 000 MHz ~ 6 000 MHz, 3 m)	4.63 dB	Confidence level of approximately 95 % ($k = 2$)
Test items (3 m Anechoic Chamber)	Uncertainty	Remark
Radiated emission (30 MHz ~ 300 MHz, 3 m, Vertical)	4.90 dB	Confidence level of approximately 95 % ($k = 2$)
Radiated emission (30 MHz ~ 300 MHz, 3 m, Horizontal)	4.79 dB	Confidence level of approximately 95 % ($k = 2$)
Radiated emission (300 MHz ~ 1 000 MHz, 3 m, Vertical)	6.23 dB	Confidence level of approximately 95 % ($k = 2$)
Radiated emission (300 MHz ~ 1 000 MHz, 3 m, Horizontal)	5.16 dB	Confidence level of approximately 95 % ($k = 2$)
Radiated emission (1 GHz ~ 6 GHz, 3 m)	4.56 dB	Confidence level of approximately 95 % ($k = 2$)
Radiated emission (6 GHz ~ 18 GHz, 3 m)	4.88 dB	Confidence level of approximately 95 % ($k = 2$)
Radiated emission (18 GHz ~ 26 GHz, 3 m)	5.16 dB	Confidence level of approximately 95 % ($k = 2$)

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2.

The listed uncertainties are the worst case uncertainty for the entire range of measurement. please note that the uncertainty values are provided for informational purposes only are not used in determining the PASS/FAIL results





7.4 Limit

Equipment	Operating frequency	RF Power generated by equipment (watts)	Field strength limit (uV/m)	Distance (meters)
Any type unless otherwise specified (miscellaneous)	Any ISM frequency	Below 500 500 or more	25 $25 \times \text{SQRT}(\text{power}/500)$	300 ¹ 300
	Any non-ISM frequency	Below 500 500 or more	15 $15 \times \text{SQRT}(\text{power}/500)$	300 ¹ 300
Industrial heaters and RF stabilized arc welders	On or below 5,725 MHz	Any	10 ⁽²⁾	1,600 ⁽²⁾
	Above 5,725 MHz	Any		
Medical diathermy	Any ISM frequency	Any	25	300
	Any non-ISM frequency	Any	15	300
Ultrasonic	Below 490 kHz	Below 500 500 or more	$2,400/\text{F}(\text{kHz})$ $2,400/\text{F}(\text{kHz}) \times \text{SQRT}(\text{power}/500)$	300 ³ 300
	490 to 1,600 kHz	Any	$24,000/\text{F}(\text{kHz})$	30
	Above 1,600 kHz	Any	15	30
Induction cooking ranges	Below 90 kHz	Any	1,500	⁴ 30
	On or above 90 kHz	Any	300	⁴ 30

Note.

- 1) Field strength may not exceed 10 μV/m at 1600 meters. Consumer equipment operating below 1000 MHz is not permitted the increase in field strength otherwise permitted here for power over 500 watts.
- 2) Reduced to the greatest extent possible.
- 3) Field strength may not exceed 10 μV/m at 1600 meters. Consumer equipment is not permitted the increase in field strength otherwise permitted here for over 500 watts.
- 4) Induction cooking ranges manufactured prior to February 1, 1980, shall be subject to the field strength limits for miscellaneous ISM equipment.

7.5 Test Equipment used

Model Name	Manufacturer	Description	Serial Number	Calibration Date
■ - ESR7	Rohde & Schwarz	EMI Test Receiver	101382	Apr. 05, 2023
■ - HFH2-Z2	Rohde & Schwarz	Loop ANT	100041	Apr. 15, 2022
■ - CO3000	Innco system GmbH	Position Controller	CO3000/779/330 50314/L	N/A
■ - DT3000	Innco system GmbH	Turntable	1280314	N/A
□ - MA4000-EP	Innco system GmbH	Antenna Mast	4420314	N/A
□ - MA4640-XP-ET	Innco system GmbH	Antenna Mast	MA4640/558	N/A
□ - EMC 32	Rohde & Schwarz	Software	Ver.10.40.10	N/A

All test equipment used is calibrated on a regular basis.





7.6 Test data for Radiated Emission

- Test Date : Sep 13, 2023
- Measurement Distance : 10 m
- Note : frequency range to be scanned up to 30 MHz, because the frequency band in which the EUT operates less than 1.705 MHz

- Measurement setting

Frequency range	9 kHz ~ 150 kHz	0.15 MHz ~ 30 MHz
Detector mode	Average	Average
Resolution bandwidth	200 Hz	9 kHz

- Measurement Data: Induction mode with WLAN
 [208V , 60 Hz]

Cooking Element #1

Note.2	Frequency [MHz]	Detector mode	ANT Pol	Reading [dBuV] at 10 m	D.C.F	Field Strength [dBuV/m] at 30 m	Limits [dBuV/m]		Margin [dB]
							10 m	30 m	
S	0.034	Average	H	72.00	19.08	52.92	82.6	63.52	10.6
F	0.068	Average	H	53.02	19.08	33.94			29.58
S	0.102	Average	H	52.18	19.08	33.10			30.42
S	0.135	Average	H	35.12	19.08	16.04			47.48
S	0.150	Average	H	44.51	19.08	25.43			38.09
S	0.215	Average	H	36.92	19.08	17.84			45.68

Cooking Element #2

Note.2	Frequency [MHz]	Detector mode	ANT Pol	Reading [dBuV] At 10 m	D.C.F	Field Strength [dBuV/m] At 30 m	Limits [dBuV/m]		Margin [dB]
							10 M	30 m	
F	0.021	Average	H	52.30	19.08	33.22	82.6	63.52	30.30
S	0.045	Average	H	70.89	19.08	51.81			11.71
S	0.090	Average	H	43.22	19.08	24.14			39.38
S	0.135	Average	H	51.26	19.08	32.18			31.34
S	0.215	Average	H	41.99	19.08	22.91			40.61
S	0.301	Average	H	37.13	19.08	18.05			45.47





Cooking Element #3

Note.2	Frequency [MHz]	Detector mode	ANT Pol	Reading [dBuV] At 10 m	D.C.F	Field Strength [dBuV/m] At 30 m	Limits [dBuV/m]		Margin [dB]
							10 m	30 m	
F	0.036	Average	H	74.44	19.08	55.36	82.6	63.52	8.16
S	0.073	Average	V	43.59	19.08	24.51			39.01
S	0.109	Average	H	48.28	19.08	29.20			34.32
S	0.146	Average	V	32.48	19.08	13.40			50.12
S	0.172	Average	H	41.14	19.08	22.06			41.46
S	0.258	Average	H	36.57	19.08	17.49			46.03

Cooking Element #4

Note.2	Frequency [MHz]	Detector mode	ANT Pol	Reading [dBuV] At 10 m	D.C.F	Field Strength [dBuV/m] At 30 m	Limits [dBuV/m]		Margin [dB]
							10 m	30 m	
S	0.021	Average	H	52.55	19.08	33.47	82.6	63.52	30.05
F	0.045	Average	H	70.13	19.08	51.05			12.47
S	0.066	Average	H	37.52	19.08	18.44			45.08
S	0.135	Average	H	55.79	19.08	36.71			26.81
S	0.215	Average	V	45.41	19.08	26.33			37.19
S	0.258	Average	H	45.03	19.08	25.95			37.57





[240V , 60 Hz]

Cooking Element #1

Note.2	Frequency [MHz]	Detector mode	ANT Pol	Reading [dBuV] at 10 m	D.C.F	Field Strength [dBuV/m] at 30 m	Limits [dBuV/m]		Margin [dB]
							10 m	30 m	
S	0.021	Average	V	51.47	19.08	32.39	82.6	63.52	31.13
F	0.035	Average	V	71.27	19.08	52.19			11.33
S	0.070	Average	V	52.75	19.08	33.67			29.85
S	0.105	Average	V	55.80	19.08	36.72			26.80
S	0.172	Average	H	48.60	19.08	29.52			34.00
S	0.258	Average	H	39.81	19.08	20.73			42.79

Cooking Element #2

Note.2	Frequency [MHz]	Detector mode	ANT Pol	Reading [dBuV] at 10 m	D.C.F	Field Strength [dBuV/m] at 30 m	Limits [dBuV/m]		Margin [dB]
							10 m	30 m	
S	0.021	Average	H	51.50	19.08	32.42	82.6	63.52	31.10
F	0.046	Average	H	72.01	19.08	52.93			10.59
S	0.091	Average	H	43.17	19.08	24.09			39.43
S	0.137	Average	H	55.11	19.08	36.03			27.49
S	0.215	Average	V	43.93	19.08	24.85			38.67
S	0.301	Average	V	37.18	19.08	18.10			45.42

Cooking Element #3

Note.2	Frequency [MHz]	Detector mode	ANT Pol	Reading [dBuV] At 10 m	D.C.F	Field Strength [dBuV/m] At 30 m	Limits [dBuV/m]		Margin [dB]
							10 m	30 m	
S	0.021	Average	H	52.03	19.08	32.95	82.6	63.52	30.57
F	0.038	Average	H	75.43	19.08	56.35			7.17
S	0.076	Average	V	42.35	19.08	23.27			40.25
S	0.113	Average	H	48.84	19.08	29.76			33.76
S	0.172	Average	V	40.46	19.08	21.38			42.14
S	0.215	Average	V	37.49	19.08	18.41			45.11





Cooking Element #4

Note.2	Frequency [MHz]	Detector mode	ANT Pol	Reading [dBuV] At 10 m	D.C.F	Field Strength [dBuV/m] At 30 m	Limits [dBuV/m]		Margin [dB]
							10 m	30 m	
S	0.021	Average	H	52.40	19.08	33.32	82.6	63.52	30.2
F	0.047	Average	H	65.94	19.08	46.86			16.66
S	0.066	Average	H	37.23	19.08	18.15			45.37
S	0.139	Average	V	48.17	19.08	29.09			34.43
S	0.172	Average	H	41.40	19.08	22.32			41.20
S	0.258	Average	H	40.82	19.08	21.74			41.78

Note.1 The worst case data were reported

And no other spurious and harmonic emissions were reported greater than listed emission above table

Note.2 “F”=Fundamental / “S”=Spurious / “*” = Noise Floor

Note.3 All measurements were recorded using a spectrum analyzer employing a Average detector for below 30 MHz

Note.4 Distance Correction Factor (D.C.F.)

For 30 m: $40\log(30/10) = 19.08$ dB

Note.5 Sample calculation

Field Strength = Reading – D.C.F

Margin = Limit – Field Strength

Where, D.C.F = Distance Correction Factor

Note.6 “V1”= Vertical and perpendicular to the centerline / “V2”=vertical and parallel to the centerline

“H” = horizontal (parallel to the ground)

Note.7 Cooking element “1”= left front hob ,”2”= left rear hob, “3”= Center hob, “4”= right hob




8. Sample Calculations

$$\begin{aligned} \text{dB}\mu\text{V} &= 20 \text{ Log}_{10}(\mu\text{V}/\text{m}) \\ \text{dB}\mu\text{V} &= \text{dBm} + 107 \\ \mu\text{V} &= 10^{(\text{dB}\mu\text{V}/20)} \end{aligned}$$

8.1 Example 1 :

■ 20.3 MHz

Class B Limit	= 250 μV = 48 dBμV
Reading	= 39.2 dBμV
$10^{(39.2\text{dB}\mu\text{V}/20)}$	= 91.2 μV
Margin	= 48 dBμV - 39.2 dBμV = 8.8 dB

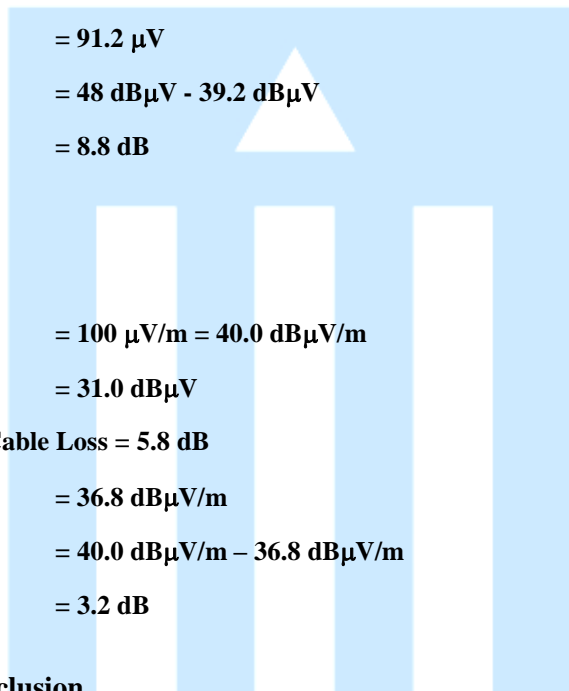

8.2 Example 2 :

■ 66.7 MHz

Class B Limit	= 100 $\mu\text{V}/\text{m}$ = 40.0 dB$\mu\text{V}/\text{m}$
Reading	= 31.0 dBμV
Antenna Factor + Cable Loss	= 5.8 dB
Total	= 36.8 dB$\mu\text{V}/\text{m}$
Margin	= 40.0 dB$\mu\text{V}/\text{m}$ - 36.8 dB$\mu\text{V}/\text{m}$ = 3.2 dB

9. Recommendation & Conclusion

The data collected shows that the **HOUSEHOLD COOKTOP (Model Name: CBIH3013BE)** was complies with § 18.305 and 18.307 of the FCC Rules.

- The end -

