

TEST REPORT

of

FCC Part 22 Subpart H and Part 27 Subpart C
RSS-132 Issue 3, RSS-199 Issue 3 and RSS-Gen Issue 5

FCC ID: BEJTA4HEBW
IC Certification: 2703H-TA4HEBW

Equipment Under Test : Car Telematics
Model Name : TA4HEB-W
Variant Model Name : TA4LEN-W
Applicant : LG Electronics USA
Manufacturer : LG Electronics USA
Date of Receipt : 2018.08.01
Date of Test(s) : 2018.08.02 ~ 2018.11.15
Date of Issue : 2019.02.19

In the configuration tested, the EUT complied with the standards specified above.

Tested By:



Nancy Park

Date:

2019.02.19

Technical
Manager:



Harim Lee

Date:

2019.02.19

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company. This test report does not assure KOLAS accreditation.

TABLE OF CONTENTS

	Page
1. General Information -----	3
2. RF Radiated Output Power & Spurious Radiated Emission -----	7
3. Conducted Output Power -----	35
4. Occupied Bandwidth 99 % -----	39
5. Peak-Average Ratio -----	82
6. Spurious Emissions at Antenna Terminal -----	105
7. Band Edge -----	133
8. Frequency Stability -----	162

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company. This test report does not assure KOLAS accreditation.

1. General information

1.1. Testing laboratory

SGS Korea Co., Ltd. (Gunpo Laboratory)

- Wireless Div. 2FL, 10-2, LS-ro 182beon-gil, Gunpo-si, Gyeonggi-do, Korea, 15807
- Designation number: KR0150

All SGS services are rendered in accordance with the applicable SGS conditions of service available on request and accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx>.

Phone No. : +82 31 688 0901

Fax No. : +82 31 688 0921

1.2. Details of applicant

Applicant : LG Electronics USA

Address : 1000 Sylvan Avenue, Englewood Cliffs, New Jersey, United States, 07632

Contact Person : Han, Kyung-su

Phone No. : +2 201 472 2623

1.3. Details of manufacturer

Company : LG Electronics Inc.

Address : 10, Magokjungang 10-ro, Gangseo-gu, Seoul, Korea, 07796

1.4. Description of EUT

Kind of Product	Car Telematics
Model Name	TA4HEB-W
Variant Model Name	TA4LEN-W
Power Supply	DC 12 V
Rated Power	GSM 850: 32 dBm GSM 1 900: 30 dBm WCDMA 5: 23 dBm LTE Band 5, 7, 26: 23 dBm
Frequency Range	GSM 850: 824 MHz ~ 849 MHz GSM 1 900: 1 850 MHz ~ 1 910 MHz WCDMA 5: 824 MHz ~ 849 MHz LTE Band 5: 824 MHz ~ 849 MHz LTE Band 7: 2 500 MHz ~ 2 570 MHz LTE Band 26: 824 MHz ~ 849 MHz
Emission Designator	GSM 850: 241KGXW (Voice) / 244KG7W (EDGE) GSM 1900: 242KGXW (Voice) / 240KG7W (EDGE) WCDMA 5: 4M15F9W LTE Band 5 (1.4 MHz): 1M10G7D (QPSK) / 1M10W7D (16QAM) LTE Band 5 (3 MHz): 2M70G7D (QPSK) / 2M69W7D (16QAM) LTE Band 5 (5 MHz): 4M53G7D (QPSK) / 4M52W7D (16QAM) LTE Band 5 (10 MHz): 8M94G7D (QPSK) / 8M97W7D (16QAM) LTE Band 7 (5 MHz): 4M52G7D (QPSK) / 4M52W7D (16QAM) LTE Band 7 (10 MHz): 8M97G7D (QPSK) / 8M97W7D (16QAM) LTE Band 7 (15 MHz): 13M5G7D (QPSK) / 13M5W7D (16QAM) LTE Band 7 (20 MHz): 18M0G7D (QPSK) / 17M9W7D (16QAM) LTE Band 26 (1.4 MHz): 1M10G7D (QPSK) / 1M10W7D (16QAM) LTE Band 26 (3 MHz): 2M69G7D (QPSK) / 2M69W7D (16QAM) LTE Band 26 (5 MHz): 4M52G7D (QPSK) / 4M52W7D (16QAM) LTE Band 26 (10 MHz): 8M94G7D (QPSK) / 8M97W7D (16QAM) LTE Band 26 (15 MHz): 13M5G7D (QPSK) / 13M5W7D (16QAM)

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company. This test report does not assure KOLAS accreditation.

1.5. Test equipment list

Equipment	Manufacturer	Model	S/N	Cal. Date	Cal. Interval	Cal. Due
Signal Generator	Agilent	E8257D	MY51501169	Jul. 03, 2018	Annual	Jul. 03, 2019
Spectrum Analyzer	R&S	FSV30	100955	Mar. 12, 2018	Annual	Mar. 12, 2019
Mobile Test Unit	R&S	CMW500	144035	Feb. 22, 2018	Annual	Feb. 22, 2019
Power Meter	Anritsu	ML2495A	1223004	Jun. 12, 2018	Annual	Jun. 12, 2019
Power Sensor	Anritsu	MA2411B	1207272	Jun. 12, 2018	Annual	Jun. 12, 2019
Directional Coupler	KRYTAR	152613	140972	Jun. 14, 2018	Annual	Jun. 14, 2019
Temperature Chamber	ESPEC CORP.	PL-1J	15000793	Jun. 14, 2018	Annual	Jun. 14, 2019
High Pass Filter	Wainwright Instrument GmbH	WHKX10-900-1000-18000-40SS	7	Mar. 21, 2018	Annual	Mar. 21, 2019
High Pass Filter	Wainwright Instrument GmbH	WHK3.0/18G-10SS	344	May 27, 2018	Annual	May 27, 2019
DC Power Supply	Agilent	U8002A	MY50060028	Mar. 15, 2018	Annual	Mar. 15, 2019
Preamplifier	H.P.	8447F	2944A03909	Aug. 07, 2018	Annual	Aug. 07, 2019
Preamplifier	R&S	SCU 18	10117	Aug. 07, 2018	Annual	Aug. 07, 2019
Preamplifier	MITEQ Inc.	JS44-18004000-35-8P	1546891	May 13, 2018	Annual	May 13, 2019
Test Receiver	R&S	ESU26	100109	Feb. 07, 2018	Annual	Feb. 07, 2019
Bilog Antenna	SCHWARZBECK MESSELEKTRONIK	VULB9163	01126	Mar. 26, 2018	Biennial	Mar. 26, 2020
Horn Antenna	R&S	HF906	100326	Feb. 14, 2018	Biennial	Feb. 14, 2020
Horn Antenna	SCHWARZBECK MESSELEKTRONIK	BBHA9170	BBHA9170223	Sep. 10, 2018	Biennial	Sep. 10, 2020
Antenna Master	Innco systems GmbH	MM4000	N/A	N.C.R.	N/A	N.C.R.
Turn Table	Innco systems GmbH	DS 1200S	N/A	N.C.R.	N/A	N.C.R.
Controller	Innco systems GmbH	CONTROLLER CO3000-4P	CO3000/963/383 30516/L	N.C.R.	N/A	N.C.R.
Anechoic Chamber	SY Corporation	L x W x H (9.6 m x 6.4 m x 6.4 m)	N/A	N.C.R.	N/A	N.C.R.

► Support equipment

Description	Manufacturer	Model	Serial Number
N/A	-	-	-

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company. This test report does not assure KOLAS accreditation.

1.6. Summary of test results

The EUT has been tested according to the following specifications:

APPLIED STANDARD: FCC Part 2, 22 and 27 IC part RSS-132 Issue 3, RSS-199 Issue 3 and RSS-Gen Issue 5			
Section in FCC part	Section in IC part	Test Item	Result
§2.1046 §22.913(a)(5) §27.50(h)(2)	RSS-132 Issue 3 5.4 RSS-199 Issue 3 4.4	RF Radiated Output Power	Complied
§2.1053 §22.917(a) §27.53(m)(4)	RSS-132 Issue 3 5.5 RSS-199 Issue 3 4.5	Spurious Radiated Emission	Complied
§2.1046	RSS-Gen Issue 5 6.12	Conducted Output Power	Complied
§2.1049	RSS-Gen Issue 5 6.7	Occupied Bandwidth	Complied
§22.913(d) §27.50(d)(5)	RSS-132 Issue 3 5.4 RSS-199 Issue 3 4.4	Peak-Average Ratio	Complied
§2.1051 §22.917(a) §27.53(m)(4)	RSS-132 Issue 3 5.5 RSS-199 Issue 3 4.5	Spurious Emission at Antenna Terminal	Complied
§22.917(a) §27.53(m)(4)	RSS-132 Issue 3 5.5 RSS-199 Issue 3 4.5	Band Edge	Complied
§2.1055 §22.355 §27.54	RSS-Gen Issue 5 6.11 RSS-132 Issue 3 5.3 RSS-199 Issue 3 4.3	Frequency Stability	Complied

1.7. Test report revision

Revision	Report number	Date of Issue	Description
0	F690501/RF-RTL013187	2018.11.29	Initial
1	F690501/RF-RTL013187-1	2019.02.19	Corrected GSM850 rated power

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company. This test report does not assure KOLAS accreditation.

1.8. Sample calculation for offset

Where relevant, the following sample calculation is provided:

1.8.1. Conducted test

Offset value (dB) = Directional Coupler (dB) + Cable loss (dB)

1.8.2. Radiation test

E.R.P. & E.I.R.P. = [S.G level + Amp.] (dB m) - Cable loss (dB) + Ant. gain (dB d/dB i)

1.9. Information of Variant Model

Model Name	Description
TA4HEB-W	Basic Model
TA4LEN-W	Variant model is the same RF module and circuit, except the as below part and function. - De-populated to Audio amp, DSP part - De-populated to BUB(Backup battery) part

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company. This test report does not assure KOLAS accreditation.

SGS Korea Co., Ltd. (Gunpo Laboratory) 4, LS-ro 182beon-gil, Gunpo-si, Gyeonggi-do, Korea, 15807 <http://www.sgsgroup.kr>

RTT5041-19(2017.07.10)(0)


Tel. +82 31 428 5700 / Fax. +82 31 427 2370

A4(210 mm x 297 mm)


2. RF radiated output power & spurious radiated emission

2.1. Test setup

The diagram below shows the test setup that is utilized to make the measurements for emission from 30 MHz to 1 GHz.

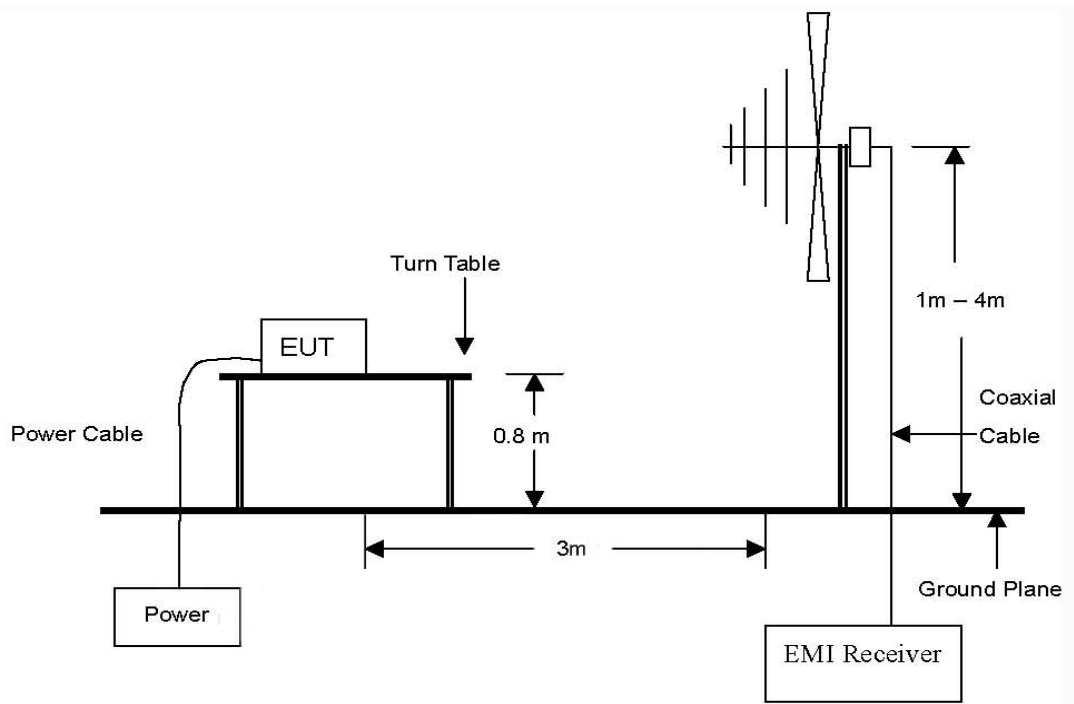


The diagram below shows the test setup that is utilized to make the measurements for emission from 1 GHz to 20 GHz.

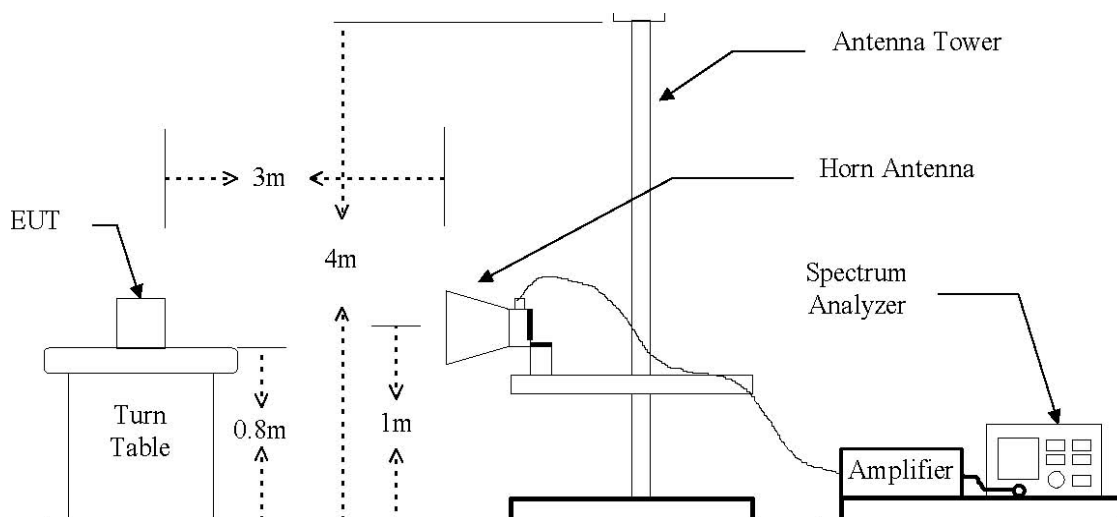

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company. This test report does not assure KOLAS accreditation.

The diagram below shows the test setup for substituted method.

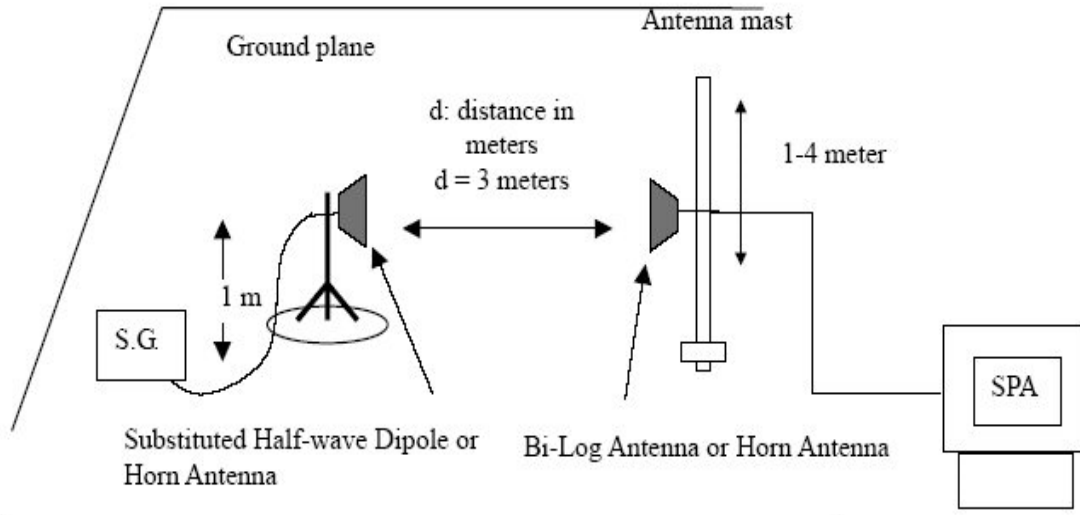

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company. This test report does not assure KOLAS accreditation.

2.2. Limit

2.2.1. Limit of radiated output power

FCC

- §22.913(a)(5), the ERP of mobile transmitters and auxiliary test transmitters must not exceed 7 watts.

- §27.50(h)(2), Mobile and other user stations. Mobile stations are limited to 2.0 watts EIRP. All user stations are limited to 2.0 watts transmitter output power.

IC

- RSS-132 Issue 3

5.4, the transmitter output power shall be measured in terms of average power.

The equivalent isotropically radiated power (e.i.r.p.) for mobile equipment shall not exceed 11.5 watts.

Refer to SRSP-503 for base station e.i.r.p. limits.

- RSS-199 Issue 3

4.4, the transmitter output power shall be measured in terms of average value.

For base station equipment, refer to SRSP-517 for the maximum permissible e.i.r.p.

For mobile subscriber equipment, the e.i.r.p. shall not exceed 2 W. For fixed subscriber equipment, the transmitter output power shall not exceed 2 W and the e.i.r.p. shall be limited to 40 W.

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company. This test report does not assure KOLAS accreditation.

SGS Korea Co., Ltd. (Gunpo Laboratory) 4, LS-ro 182beon-gil, Gunpo-si, Gyeonggi-do, Korea, 15807 <http://www.sgsgroup.kr>

RTT5041-19(2017.07.10)(0)

Tel. +82 31 428 5700 / Fax. +82 31 427 2370

A4(210 mm x 297 mm)

2.2.2. Limit of spurious radiated emission

FCC

- §22.917(a), the power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10\log(P)$ dB.

- §27.53(m)(4), For mobile digital stations, the attenuation factor shall be not less than $40 + 10\log_{10}(P)$ dB on all frequencies between the channel edge and 5 megahertz from the channel edge, $43 + 10\log_{10}(P)$ dB on all frequencies between 5 megahertz and X megahertz from the channel edge, and $55 + 10\log_{10}(P)$ dB on all frequencies more than X megahertz from the channel edge, where X is the greater of 6 megahertz or the actual emission bandwidth as defined in paragraph (m)(6) of this section. In addition, the attenuation factor shall not be less than $43 + 10\log_{10}(P)$ dB on all frequencies between 2 490.5 MHz and 2 496 MHz and $55 + 10\log_{10}(P)$ dB at or below 2 490.5 MHz. Mobile Satellite Service licensees operating on frequencies below 2 495 MHz may also submit a documented interference complaint against BRS licensees operating on channel BRS Channel 1 on the same terms and conditions as adjacent channel BRS or EBS licensees.

IC

- RSS-132 Issue 3

5.5, Mobile and base station equipment shall comply with the limits in (i) and (ii) below.

(i) In the first 1.0 MHz band immediately outside and adjacent to each of the sub-bands specified in Section 5.1, the power of emissions per any 1 % of the occupied bandwidth shall be attenuated (in dB) below the transmitter output power P (dB W) by at least $43 + 10\log_{10} p$ (watts).

(ii) After the first 1.0 MHz immediately outside and adjacent to each of the sub-bands, the power of emissions in any 100 kHz bandwidth shall be attenuated (in dB) below the transmitter output power P (dB W) by at least $43 + 10\log_{10} p$ (watts). If the measurement is performed using 1 % of the occupied bandwidth, power integration over 100 kHz is required.

- RSS-199 Issue 3

In the 1 MHz band immediately outside and adjacent to the channel edge, the unwanted emission power shall be measured with a resolution bandwidth of at least 1% of the occupied bandwidth for base station and fixed subscriber equipment, and 2% for mobile subscriber equipment. Beyond the 1 MHz band, a resolution bandwidth of 1 MHz shall be used. A narrower resolution bandwidth can be used, provided that the measured power is integrated over the full required measurement bandwidth of 1 MHz, or 1% or 2% of the occupied bandwidth, as applicable.

Equipment shall comply with the following unwanted emission limits:

- a. for base station and fixed subscriber equipment, the power of any unwanted emissions measured as above shall be attenuated (in dB) below the transmitter power, P (dB W), by at least $43 + 10\log_{10} p$
- b. for mobile subscriber equipment, the power of any unwanted emissions measured as above shall be attenuated (in dB) below the transmitter power, P (dB W), by at least:
 - i. $40 + 10\log_{10} p$ from the channel edges to 5 MHz away
 - ii. $43 + 10\log_{10} p$ between 5 MHz and X MHz from the channel edges, and
 - iii. $55 + 10\log_{10} p$ at X MHz and beyond from the channel edges

In addition, the attenuation shall not be less than $43 + 10\log_{10} p$ on all frequencies between 2 490.5 MHz and 2 496 MHz, and $55 + 10\log_{10} p$ at or below 2 490.5 MHz.

In (a) and (b), p is the transmitter power measured in watts and X is 6 MHz or the equipment occupied bandwidth, whichever is greater.

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company. This test report does not assure KOLAS accreditation.

2.3. Test procedure: Based on ANSI/TIA 603E: 2016

1. On a test site, the EUT shall be placed at 80 cm height on a turn table, and in the position close to normal use as declared by the applicant.
2. The test antenna shall be oriented initially for vertical polarization located 3 m from EUT to correspond to the fundamental frequency of the transmitter.
3. The output of the test antenna shall be connected to the measuring receiver and the peak detector is used for the measurement.
4. The maximized power level is recorded using the spectrum analyzer "Channel Power" function with the integration band set to the emissions occupied bandwidth, RBW = 1-5 % of the OBW (not to exceed 1 MHz), VBW ≥ 3 x RBW, Detector = power averaging (rms), sweep time = auto, trace average at least 100 traces in power averaging (rms) mode, per the guidelines of KDB Publication 971168 D01 v03r01.
5. Radiated spurious emissions measurement method was set as follows:
RBW = 100 kHz for emissions below 1 GHz and 1 MHz for emissions above 1 GHz, VBW ≥ 3 x RBW, Detector = Peak, trace mode = max hold, per the guidelines of KDB Publication 971168 D01 v03r01.
6. The transmitter shall be switched on, the measuring receiver shall be tuned to the frequency of the transmitter under test.
7. The test antenna shall be raised and lowered through the specified range of height until the maximum signal level is detected by the measuring receiver.
8. The transmitter shall be rotated through 360° in the horizontal plane, until the maximum signal level is detected by the measuring receiver.
9. The test antenna shall be raised and lowered again through the specified range of height until the maximum signal level is detected by the measuring receiver.
10. The maximum signal level detected by the measuring receiver shall be noted.
11. The EUT was replaced by half-wave dipole (1 GHz below) or horn antenna (1 GHz above) connected to a signal generator.
12. In necessary, the input attenuator setting on the measuring receiver shall be adjusted in order to increase the sensitivity of the measuring receiver.
13. The test antenna shall be raised and lowered through the specified range of height to ensure that the maximum signal is received.
14. The input signal to the substitution antenna shall be adjusted to the level that produces a level detected by the measuring receiver, which is equal to the level noted while the transmitter radiated power was measured, corrected for the change of input attenuator setting of the measuring receiver.
15. The input level to the substitution antenna shall be recorded as power level in dBm, corrected for any change of input attenuator setting of the measuring receiver.
16. The measurement shall be repeated with the test antenna and the substitution antenna orientated for horizontal polarization.

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company. This test report does not assure KOLAS accreditation.

2.4. Test result for RF radiated output power

Ambient temperature : (23 ± 1) °C
Relative humidity : 47 % R.H.

LTE band 5 (1.4 MHz - QPSK)

Frequency (MHz)	Ant. Pol. (H/V)	S.G level + Amp. (dB m)	Cable loss (dB)	Ant. gain (dB d)	E.R.P.	
					(dB m)	(mW)
824.70	H	30.34	3.26	-4.93	22.15	164.06
824.70	V	27.92	3.26	-4.93	19.73	93.97
836.50	H	29.76	3.45	-5.15	21.16	130.62
836.50	V	26.60	3.45	-5.15	18.00	63.10
848.30	H	27.92	3.52	-4.09	20.31	107.40
848.30	V	25.90	3.52	-4.09	18.29	67.45

* 1.4 BW 1RB size / 0 Offset for B5

LTE band 5 (1.4 MHz - 16QAM)

Frequency (MHz)	Ant. Pol. (H/V)	S.G level + Amp. (dB m)	Cable loss (dB)	Ant. gain (dB d)	E.R.P.	
					(dB m)	(mW)
824.70	H	29.67	3.26	-4.93	21.48	140.60
824.70	V	27.22	3.26	-4.93	19.03	79.98
836.50	H	29.08	3.45	-5.15	20.48	111.69
836.50	V	25.64	3.45	-5.15	17.04	50.58
848.30	H	27.03	3.52	-4.09	19.42	87.50
848.30	V	25.17	3.52	-4.09	17.56	57.02

* 1.4 BW 1RB size / 0 Offset for B5

LTE band 5 (3 MHz - QPSK)

Frequency (MHz)	Ant. Pol. (H/V)	S.G level + Amp. (dB m)	Cable loss (dB)	Ant. gain (dB d)	E.R.P.	
					(dB m)	(mW)
825.50	H	30.97	3.28	-5.05	22.64	183.65
825.50	V	28.43	3.28	-5.05	20.10	102.33
836.50	H	29.99	3.45	-5.15	21.39	137.72
836.50	V	27.77	3.45	-5.15	19.17	82.60
847.50	H	28.13	3.52	-4.16	20.45	110.92
847.50	V	26.88	3.52	-4.16	19.20	83.18

* 3 BW 1RB size / 0 Offset for B5

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company. This test report does not assure KOLAS accreditation.

LTE band 5 (3 MHz - 16QAM)

Frequency (MHz)	Ant. Pol. (H/V)	S.G level + Amp. (dB m)	Cable loss (dB)	Ant. gain (dB d)	E.R.P.	
					(dB m)	(mW)
825.50	H	29.94	3.28	-5.05	21.61	144.88
825.50	V	27.89	3.28	-5.05	19.56	90.36
836.50	H	28.98	3.45	-5.15	20.38	109.14
836.50	V	27.09	3.45	-5.15	18.49	70.63
847.50	H	27.48	3.52	-4.16	19.80	95.50
847.50	V	26.35	3.52	-4.16	18.67	73.62

* 3 BW 1RB size / 0 Offset for B5

LTE band 5 (5 MHz - QPSK)

Frequency (MHz)	Ant. Pol. (H/V)	S.G level + Amp. (dB m)	Cable loss (dB)	Ant. gain (dB d)	E.R.P.	
					(dB m)	(mW)
826.50	H	30.84	3.31	-5.20	22.33	171.00
826.50	V	28.75	3.31	-5.20	20.24	105.68
836.50	H	29.82	3.45	-5.15	21.22	132.43
836.50	V	27.55	3.45	-5.15	18.95	78.52
846.50	H	28.42	3.51	-4.25	20.66	116.41
846.50	V	26.70	3.51	-4.25	18.94	78.34

* 5 BW 1RB size / 0 Offset for B5

LTE band 5 (5 MHz - 16QAM)

Frequency (MHz)	Ant. Pol. (H/V)	S.G level + Amp. (dB m)	Cable loss (dB)	Ant. gain (dB d)	E.R.P.	
					(dB m)	(mW)
826.50	H	30.08	3.31	-5.20	21.57	143.55
826.50	V	27.92	3.31	-5.20	19.41	87.30
836.50	H	28.98	3.45	-5.15	20.38	109.14
836.50	V	26.90	3.45	-5.15	18.30	67.61
846.50	H	27.48	3.51	-4.25	19.72	93.76
846.50	V	26.07	3.51	-4.25	18.31	67.76

* 5 BW 1RB size / 0 Offset for B5

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company. This test report does not assure KOLAS accreditation.

LTE band 5 (10 MHz - QPSK)

Frequency (MHz)	Ant. Pol. (H/V)	S.G level + Amp. (dB m)	Cable loss (dB)	Ant. gain (dB d)	E.R.P.	
					(dB m)	(mW)
829.00	H	31.69	3.38	-5.58	22.73	187.50
829.00	V	29.60	3.38	-5.58	20.64	115.88
836.50	H	30.03	3.45	-5.15	21.43	139.00
836.50	V	27.68	3.45	-5.15	19.08	80.91
844.00	H	28.91	3.49	-4.48	20.94	124.17
844.00	V	26.68	3.49	-4.48	18.71	74.30

* 10 BW 1RB size / 0 Offset for B5

LTE band 5 (10 MHz - 16QAM)

Frequency (MHz)	Ant. Pol. (H/V)	S.G level + Amp. (dB m)	Cable loss (dB)	Ant. gain (dB d)	E.R.P.	
					(dB m)	(mW)
829.00	H	31.08	3.38	-5.58	22.12	162.93
829.00	V	28.98	3.38	-5.58	20.02	100.46
836.50	H	29.37	3.45	-5.15	20.77	119.40
836.50	V	27.00	3.45	-5.15	18.40	69.18
844.00	H	28.07	3.49	-4.48	20.10	102.33
844.00	V	25.94	3.49	-4.48	17.97	62.66

* 10 BW 1RB size / 0 Offset for B5

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company. This test report does not assure KOLAS accreditation.

LTE band 7 (5 MHz - QPSK)

Frequency (MHz)	Ant. Pol. (H/V)	S.G level + Amp. (dB m)	Cable loss (dB)	Ant. gain (dB i)	E.I.R.P.	
					(dB m)	(mW)
2 502.5	H	18.24	4.81	9.13	22.56	180.30
2 502.5	V	13.38	4.81	9.13	17.70	58.88
2 535.0	H	21.15	4.86	9.06	25.35	342.77
2 535.0	V	14.60	4.86	9.06	18.80	75.86
2 567.5	H	21.34	4.90	8.98	25.42	348.34
2 567.5	V	15.68	4.90	8.98	19.76	94.62

* 5 BW 1RB size / 0 Offset

LTE band 7 (5 MHz - 16QAM)

Frequency (MHz)	Ant. Pol. (H/V)	S.G level + Amp. (dB m)	Cable loss (dB)	Ant. gain (dB i)	E.I.R.P.	
					(dB m)	(mW)
2 502.5	H	17.37	4.81	9.13	21.69	147.57
2 502.5	V	12.65	4.81	9.13	16.97	49.77
2 535.0	H	20.22	4.86	9.06	24.42	276.69
2 535.0	V	13.48	4.86	9.06	17.68	58.61
2 567.5	H	20.41	4.90	8.98	24.49	281.19
2 567.5	V	14.66	4.90	8.98	18.74	74.82

* 5 BW 1RB size / 0 Offset

LTE band 7 (10 MHz - QPSK)

Frequency (MHz)	Ant. Pol. (H/V)	S.G level + Amp. (dB m)	Cable loss (dB)	Ant. gain (dB i)	E.I.R.P.	
					(dB m)	(mW)
2 505.0	H	18.55	4.82	9.13	22.86	193.20
2 505.0	V	13.56	4.82	9.13	17.87	61.24
2 535.0	H	20.90	4.86	9.06	25.10	323.59
2 535.0	V	14.37	4.86	9.06	18.57	71.94
2 565.0	H	21.09	4.90	8.99	25.18	329.61
2 565.0	V	15.46	4.90	8.99	19.55	90.16

* 10 BW 1RB size / 0 Offset

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company. This test report does not assure KOLAS accreditation.

LTE band 7 (10 MHz - 16QAM)

Frequency (MHz)	Ant. Pol. (H/V)	S.G level + Amp. (dB m)	Cable loss (dB)	Ant. gain (dB i)	E.I.R.P.	
					(dB m)	(mW)
2 505.0	H	17.66	4.82	9.13	21.97	157.40
2 505.0	V	12.54	4.82	9.13	16.85	48.42
2 535.0	H	19.93	4.86	9.06	24.13	258.82
2 535.0	V	13.37	4.86	9.06	17.57	57.15
2 565.0	H	20.16	4.90	8.99	24.25	266.07
2 565.0	V	14.92	4.90	8.99	19.01	79.62

* 10 BW 1RB size / 0 Offset

LTE band 7 (15 MHz - QPSK)

Frequency (MHz)	Ant. Pol. (H/V)	S.G level + Amp. (dB m)	Cable loss (dB)	Ant. gain (dB i)	E.I.R.P.	
					(dB m)	(mW)
2 507.5	H	18.95	4.82	9.12	23.25	211.35
2 507.5	V	14.34	4.82	9.12	18.64	73.11
2 535.0	H	21.46	4.86	9.06	25.66	368.13
2 535.0	V	14.94	4.86	9.06	19.14	82.04
2 562.5	H	21.86	4.90	9.00	25.96	394.46
2 562.5	V	16.92	4.90	9.00	21.02	126.47

* 15 BW 1RB size / 0 Offset

LTE band 7 (15 MHz - 16QAM)

Frequency (MHz)	Ant. Pol. (H/V)	S.G level + Amp. (dB m)	Cable loss (dB)	Ant. gain (dB i)	E.I.R.P.	
					(dB m)	(mW)
2 507.5	H	18.35	4.82	9.12	22.65	184.08
2 507.5	V	13.37	4.82	9.12	17.67	58.48
2 535.0	H	20.67	4.86	9.06	24.87	306.90
2 535.0	V	13.99	4.86	9.06	18.19	65.92
2 562.5	H	21.06	4.90	9.00	25.16	328.10
2 562.5	V	16.07	4.90	9.00	20.17	103.99

* 15 BW 1RB size / 0 Offset

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company. This test report does not assure KOLAS accreditation.

LTE band 7 (20 MHz - QPSK)

Frequency (MHz)	Ant. Pol. (H/V)	S.G level + Amp. (dB m)	Cable loss (dB)	Ant. gain (dB i)	E.I.R.P.	
					(dB m)	(mW)
2 510.0	H	19.50	4.82	9.12	23.80	239.88
2 510.0	V	14.89	4.82	9.12	19.19	82.99
2 535.0	H	22.17	4.86	9.06	26.37	433.51
2 535.0	V	15.74	4.86	9.06	19.94	98.63
2 560.0	H	22.68	4.89	9.00	26.79	477.53
2 560.0	V	17.38	4.89	9.00	21.49	140.93

* 20 BW 1RB size / 0 Offset

LTE band 7 (20 MHz - 16QAM)

Frequency (MHz)	Ant. Pol. (H/V)	S.G level + Amp. (dB m)	Cable loss (dB)	Ant. gain (dB i)	E.I.R.P.	
					(dB m)	(mW)
2 510.0	H	18.44	4.82	9.12	22.74	187.93
2 510.0	V	14.14	4.82	9.12	18.44	69.82
2 535.0	H	21.06	4.86	9.06	25.26	335.74
2 535.0	V	14.92	4.86	9.06	19.12	81.66
2 560.0	H	21.74	4.89	9.00	25.85	384.59
2 560.0	V	16.47	4.89	9.00	20.58	114.29

* 20 BW 1RB size / 0 Offset

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company. This test report does not assure KOLAS accreditation.

LTE band 26 (1.4 MHz - QPSK)

Frequency (MHz)	Ant. Pol. (H/V)	S.G level + Amp. (dB m)	Cable loss (dB)	Ant. gain (dB d)	E.R.P.	
					(dB m)	(mW)
824.70	H	27.49	3.26	-4.93	19.30	85.11
824.70	V	27.18	3.26	-4.93	18.99	79.25
836.50	H	26.93	3.45	-5.15	18.33	68.08
836.50	V	26.25	3.45	-5.15	17.65	58.21
848.30	H	25.74	3.52	-4.09	18.13	65.01
848.30	V	25.89	3.52	-4.09	18.28	67.30

* 1.4 BW 1RB size / 0 Offset for B26

LTE band 26 (1.4 MHz - 16QAM)

Frequency (MHz)	Ant. Pol. (H/V)	S.G level + Amp. (dB m)	Cable loss (dB)	Ant. gain (dB d)	E.R.P.	
					(dB m)	(mW)
824.70	H	26.39	3.26	-4.93	18.20	66.07
824.70	V	26.08	3.26	-4.93	17.89	61.52
836.50	H	25.69	3.45	-5.15	17.09	51.17
836.50	V	25.56	3.45	-5.15	16.96	49.66
848.30	H	24.93	3.52	-4.09	17.32	53.95
848.30	V	25.06	3.52	-4.09	17.45	55.59

* 1.4 BW 1RB size / 0 Offset for B26

LTE band 26 (3 MHz - QPSK)

Frequency (MHz)	Ant. Pol. (H/V)	S.G level + Amp. (dB m)	Cable loss (dB)	Ant. gain (dB d)	E.R.P.	
					(dB m)	(mW)
825.50	H	27.70	3.28	-5.05	19.37	86.50
825.50	V	27.64	3.28	-5.05	19.31	85.31
836.50	H	26.74	3.45	-5.15	18.14	65.16
836.50	V	26.08	3.45	-5.15	17.48	55.98
847.50	H	26.01	3.52	-4.16	18.33	68.08
847.50	V	25.68	3.52	-4.16	18.00	63.10

* 3 BW 1RB size / 0 Offset for B26

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company. This test report does not assure KOLAS accreditation.

LTE band 26 (3 MHz - 16QAM)

Frequency (MHz)	Ant. Pol. (H/V)	S.G level + Amp. (dB m)	Cable loss (dB)	Ant. gain (dB d)	E.R.P.	
					(dB m)	(mW)
825.50	H	26.64	3.28	-5.05	18.31	67.76
825.50	V	26.78	3.28	-5.05	18.45	69.98
836.50	H	25.79	3.45	-5.15	17.19	52.36
836.50	V	25.35	3.45	-5.15	16.75	47.32
847.50	H	25.26	3.52	-4.16	17.58	57.28
847.50	V	25.15	3.52	-4.16	17.47	55.85

* 3 BW 1RB size / 0 Offset for B26

LTE band 26 (5 MHz - QPSK)

Frequency (MHz)	Ant. Pol. (H/V)	S.G level + Amp. (dB m)	Cable loss (dB)	Ant. gain (dB d)	E.R.P.	
					(dB m)	(mW)
826.50	H	27.95	3.31	-5.20	19.44	87.90
826.50	V	27.85	3.31	-5.20	19.34	85.90
836.50	H	27.00	3.45	-5.15	18.40	69.18
836.50	V	26.01	3.45	-5.15	17.41	55.08
846.50	H	26.38	3.51	-4.25	18.62	72.78
846.50	V	25.72	3.51	-4.25	17.96	62.52

* 5 BW 1RB size / 0 Offset for B26

LTE band 26 (5 MHz - 16QAM)

Frequency (MHz)	Ant. Pol. (H/V)	S.G level + Amp. (dB m)	Cable loss (dB)	Ant. gain (dB d)	E.R.P.	
					(dB m)	(mW)
826.50	H	27.34	3.31	-5.20	18.83	76.38
826.50	V	27.12	3.31	-5.20	18.61	72.61
836.50	H	26.30	3.45	-5.15	17.70	58.88
836.50	V	25.08	3.45	-5.15	16.48	44.46
846.50	H	25.75	3.51	-4.25	17.99	62.95
846.50	V	24.59	3.51	-4.25	16.83	48.19

* 5 BW 1RB size / 0 Offset for B26

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company. This test report does not assure KOLAS accreditation.

LTE band 26 (10 MHz - QPSK)

Frequency (MHz)	Ant. Pol. (H/V)	S.G level + Amp. (dB m)	Cable loss (dB)	Ant. gain (dB d)	E.R.P.	
					(dB m)	(mW)
829.00	H	28.85	3.38	-5.58	19.89	97.50
829.00	V	28.66	3.38	-5.58	19.70	93.33
836.50	H	27.24	3.45	-5.15	18.64	73.11
836.50	V	26.15	3.45	-5.15	17.55	56.89
844.00	H	26.61	3.49	-4.48	18.64	73.11
844.00	V	25.57	3.49	-4.48	17.60	57.54

* 10 BW 1RB size / 0 Offset for B26

LTE band 26 (10 MHz - 16QAM)

Frequency (MHz)	Ant. Pol. (H/V)	S.G level + Amp. (dB m)	Cable loss (dB)	Ant. gain (dB d)	E.R.P.	
					(dB m)	(mW)
829.00	H	27.98	3.38	-5.58	19.02	79.80
829.00	V	27.70	3.38	-5.58	18.74	74.82
836.50	H	26.46	3.45	-5.15	17.86	61.09
836.50	V	25.25	3.45	-5.15	16.65	46.24
844.00	H	25.79	3.49	-4.48	17.82	60.53
844.00	V	24.46	3.49	-4.48	16.49	44.57

* 10 BW 1RB size / 0 Offset for B26

LTE band 26 (15 MHz - QPSK)

Frequency (MHz)	Ant. Pol. (H/V)	S.G level + Amp. (dB m)	Cable loss (dB)	Ant. gain (dB d)	E.R.P.	
					(dB m)	(mW)
831.50	H	29.20	3.42	-5.59	20.19	104.47
831.50	V	28.39	3.42	-5.59	19.38	86.70
841.50	H	26.72	3.48	-4.70	18.54	71.45
841.50	V	25.47	3.48	-4.70	17.29	53.58

* 15 BW 1RB size / 0 Offset for B26

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company. This test report does not assure KOLAS accreditation.

LTE band 26 (15 MHz - 16QAM)

Frequency (MHz)	Ant. Pol. (H/V)	S.G level + Amp. (dB m)	Cable loss (dB)	Ant. gain (dB d)	E.R.P.	
					(dB m)	(mW)
831.50	H	28.35	3.42	-5.59	19.34	85.90
831.50	V	27.97	3.42	-5.59	18.96	78.70
841.50	H	25.91	3.48	-4.70	17.73	59.29
841.50	V	24.76	3.48	-4.70	16.58	45.50

* 15 BW 1RB size / 0 Offset for B26

Remark;

1. E.R.P. & E.I.R.P. = [S.G level + Amp.] (dB m) - Cable loss (dB) + Ant. gain (dB d/dB i)
2. This device was tested under all bandwidths, RB configurations and modulations.
3. The data reported in the table above was measured in worst case.

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company. This test report does not assure KOLAS accreditation.

2.5. Spurious radiated emission

- Measured output Power: 22.15 dB m = 0.164 1 W
- Modulation Signal: LTE band 5 (1.4 MHz - QPSK)
- Distance: 3 meters
- Limit: $43 + 10 \log_{10}(W) = 35.15$ dB c

Frequency (MHz)	Ant. Pol. (H/V)	S.G level + Amp. (dB m)	Cable loss (dB)	Ant. gain (dB d)	E.R.P. (dB m)	Limit (dB m)	Margin (dB)
Low Channel (824.7 MHz)							
Below 1 000.00	-	-	-	-	Not detected	-	-
Above 1 000.00	-	-	-	-	Not detected	-	-
Middle Channel (836.5 MHz)							
2 508.82	H	-41.50	4.82	6.97	-39.35	-13.00	-26.35
2 508.82	V	-40.08	4.82	6.97	-37.93	-13.00	-24.93
High Channel (848.3 MHz)							
2 543.09	H	-40.23	4.87	6.89	-38.21	-13.00	-25.21
2 543.09	V	-37.27	4.87	6.89	-35.25	-13.00	-22.25

* 1.4 BW 1RB size / 0 Offset for B5

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company. This test report does not assure KOLAS accreditation.

SGS Korea Co., Ltd. (Gunpo Laboratory) 4, LS-ro 182beon-gil, Gunpo-si, Gyeonggi-do, Korea, 15807 <http://www.sgsgroup.kr>

RTT5041-19(2017.07.10)(0)

Tel. +82 31 428 5700 / Fax. +82 31 427 2370

A4(210 mm x 297 mm)

- Measured output Power: 22.64 dB m = 0.183 7 W
- Modulation Signal: LTE band 5 (3 MHz - QPSK)
- Distance: 3 meters
- Limit: $43 + 10 \log_{10}(W) = 35.64$ dB c

Frequency (MHz)	Ant. Pol. (H/V)	S.G level + Amp. (dB m)	Cable loss (dB)	Ant. gain (dB d)	E.R.P. (dB m)	Limit (dB m)	Margin (dB)
Low Channel (825.5 MHz)							
Below 1 000.00	-	-	-	-	Not detected	-	-
Above 1 000.00	-	-	-	-	Not detected	-	-
Middle Channel (836.5 MHz)							
2 505.01	H	-42.49	4.82	6.98	-40.33	-13.00	-27.33
2 508.82	V	-39.82	4.82	6.97	-37.67	-13.00	-24.67
High Channel (847.5 MHz)							
2 539.28	H	-40.93	4.86	6.90	-38.89	-13.00	-25.89
2 539.28	V	-38.34	4.86	6.90	-36.30	-13.00	-23.30

* 3 BW 1RB size / 0 Offset for B5

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company. This test report does not assure KOLAS accreditation.

SGS Korea Co., Ltd. (Gunpo Laboratory) 4, LS-ro 182beon-gil, Gunpo-si, Gyeonggi-do, Korea, 15807 <http://www.sgsgroup.kr>

RTT5041-19(2017.07.10)(0)

Tel. +82 31 428 5700 / Fax. +82 31 427 2370

A4(210 mm x 297 mm)

- Measured output Power: 22.33 dB m = 0.171 0 W
- Modulation Signal: LTE band 5 (5 MHz - QPSK)
- Distance: 3 meters
- Limit: $43 + 10 \log_{10}(W) = 35.33$ dB c

Frequency (MHz)	Ant. Pol. (H/V)	S.G level + Amp. (dB m)	Cable loss (dB)	Ant. gain (dB d)	E.R.P. (dB m)	Limit (dB m)	Margin (dB)
Low Channel (826.5 MHz)							
Below 1 000.00	-	-	-	-	Not detected	-	-
Above 1 000.00	-	-	-	-	Not detected	-	-
Middle Channel (836.5 MHz)							
2 505.01	H	-41.74	4.82	6.98	-39.58	-13.00	-26.58
2 505.01	V	-39.13	4.82	6.98	-36.97	-13.00	-23.97
High Channel (846.5 MHz)							
2 535.47	H	-42.43	4.86	6.91	-40.38	-13.00	-27.38
2 535.47	V	-38.15	4.86	6.91	-36.10	-13.00	-23.10

* 5 BW 1RB size / 0 Offset for B5

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company. This test report does not assure KOLAS accreditation.

SGS Korea Co., Ltd. (Gunpo Laboratory) 4, LS-ro 182beon-gil, Gunpo-si, Gyeonggi-do, Korea, 15807 <http://www.sgsgroup.kr>

RTT5041-19(2017.07.10)(0)

Tel. +82 31 428 5700 / Fax. +82 31 427 2370

A4(210 mm x 297 mm)

- Measured output Power: 22.73 dB m = 0.187 5 W
- Modulation Signal: LTE band 5 (10 MHz - QPSK)
- Distance: 3 meters
- Limit: $43 + 10 \log_{10}(W) = 35.73$ dB c

Frequency (MHz)	Ant. Pol. (H/V)	S.G level + Amp. (dB m)	Cable loss (dB)	Ant. gain (dB d)	E.R.P. (dB m)	Limit (dB m)	Margin (dB)
Low Channel (829.0 MHz)							
Below 1 000.00	-	-	-	-	Not detected	-	-
Above 1 000.00	-	-	-	-	Not detected	-	-
Middle Channel (836.5 MHz)							
2 497.39	H	-42.60	4.81	6.99	-40.42	-13.00	-27.42
2 497.39	V	-40.93	4.81	6.99	-38.75	-13.00	-25.75
High Channel (844.0 MHz)							
2 520.24	H	-41.04	4.84	6.94	-38.94	-13.00	-25.94
2 520.24	V	-39.30	4.84	6.94	-37.20	-13.00	-24.20

* 10 BW 1RB size / 0 Offset for B5

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company. This test report does not assure KOLAS accreditation.

SGS Korea Co., Ltd. (Gunpo Laboratory) 4, LS-ro 182beon-gil, Gunpo-si, Gyeonggi-do, Korea, 15807 <http://www.sgsgroup.kr>

RTT5041-19(2017.07.10)(0)

Tel. +82 31 428 5700 / Fax. +82 31 427 2370

A4(210 mm x 297 mm)

- Measured output Power: 25.42 dB m = 0.348 3 W
- Modulation Signal: LTE band 7 (5 MHz - QPSK)
- Distance: 3 meters
- Limit: $55 + 10 \log_{10}(W) = 50.42$ dB c

Frequency (MHz)	Ant. Pol. (H/V)	S.G level + Amp. (dB m)	Cable loss (dB)	Ant. gain (dB i)	E.I.R.P. (dB m)	Limit (dB m)	Margin (dB)
Low Channel (2 502.5 MHz)							
5 032.06	H	-53.17	7.47	10.02	-50.62	-25.00	-25.62
5 071.14	V	-44.30	7.51	10.22	-41.59	-25.00	-16.59
Middle Channel (2 535.0 MHz)							
5 071.14	H	-51.15	7.51	10.22	-48.44	-25.00	-23.44
5 071.14	V	-47.45	7.51	10.22	-44.74	-25.00	-19.74
High Channel (2 567.5 MHz)							
5 149.30	H	-52.67	7.65	10.49	-49.83	-25.00	-24.83
5 149.30	V	-48.96	7.65	10.49	-46.12	-25.00	-21.12
7 708.92	V	-48.67	8.87	11.65	-45.89	-25.00	-20.89

* 5 BW 1RB size / 0 Offset

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company. This test report does not assure KOLAS accreditation.

- Measured output Power: 25.18 dB m = 0.329 6 W
- Modulation Signal: LTE band 7 (10 MHz - QPSK)
- Distance: 3 meters
- Limit: $55 + 10 \log_{10}(W) = 50.18$ dB c

Frequency (MHz)	Ant. Pol. (H/V)	S.G level + Amp. (dB m)	Cable loss (dB)	Ant. gain (dB i)	E.I.R.P. (dB m)	Limit (dB m)	Margin (dB)
Low Channel (2 505.0 MHz)							
4 992.99	V	-50.46	7.43	9.85	-48.04	-25.00	-23.04
12 495.99	H	-47.05	12.09	14.48	-44.66	-25.00	-19.66
12 515.53	V	-47.01	12.12	14.48	-44.65	-25.00	-19.65
Middle Channel (2 535.0 MHz)							
5 051.60	H	-53.53	7.49	10.12	-50.90	-25.00	-25.90
5 071.14	V	-47.75	7.51	10.22	-45.04	-25.00	-20.04
High Channel (2 565.0 MHz)							
5 110.22	H	-54.23	7.56	10.40	-51.39	-25.00	-26.39
5 129.76	V	-51.35	7.61	10.44	-48.52	-25.00	-23.52
7 689.38	V	-50.65	8.87	11.65	-47.87	-25.00	-22.87

* 10 BW 1RB size / 0 Offset

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company. This test report does not assure KOLAS accreditation.

SGS Korea Co., Ltd. (Gunpo Laboratory) 4, LS-ro 182beon-gil, Gunpo-si, Gyeonggi-do, Korea, 15807 <http://www.sgsgroup.kr>

RTT5041-19(2017.07.10)(0)

Tel. +82 31 428 5700 / Fax. +82 31 427 2370

A4(210 mm x 297 mm)

- Measured output Power: 25.96 dB m = 0.394 5 W
- Modulation Signal: LTE band 7 (15 MHz - QPSK)
- Distance: 3 meters
- Limit: $55 + 10 \log_{10}(W) = 50.96$ dB c

Frequency (MHz)	Ant. Pol. (H/V)	S.G level + Amp. (dB m)	Cable loss (dB)	Ant. gain (dB i)	E.I.R.P. (dB m)	Limit (dB m)	Margin (dB)
Low Channel (2 507.5 MHz)							
5 012.53	V	-49.39	7.45	9.92	-46.92	-25.00	-21.92
7 493.99	V	-49.46	9.06	11.85	-46.67	-25.00	-21.67
12 515.53	H	-47.26	12.12	14.48	-44.90	-25.00	-19.90
12 515.53	V	-42.42	12.12	14.48	-40.06	-25.00	-15.06
Middle Channel (2 535.0 MHz)							
5 051.60	H	-53.71	7.49	10.12	-51.08	-25.00	-26.08
5 071.14	V	-48.99	7.51	10.22	-46.28	-25.00	-21.28
High Channel (2 562.5 MHz)							
5 110.22	V	-49.30	7.56	10.40	-46.46	-25.00	-21.46
5 129.76	H	-53.46	7.61	10.44	-50.63	-25.00	-25.63
12 359.22	H	-48.52	11.68	14.38	-45.82	-25.00	-20.82

* 15 BW 1RB size / 0 Offset

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company. This test report does not assure KOLAS accreditation.

- Measured output Power: 26.79 dB m = 0.477 5 W
- Modulation Signal: LTE band 7 (20 MHz - QPSK)
- Distance: 3 meters
- Limit: $55 + 10 \log_{10}(W) = 51.79$ dB c

Frequency (MHz)	Ant. Pol. (H/V)	S.G level + Amp. (dB m)	Cable loss (dB)	Ant. gain (dB i)	E.I.R.P. (dB m)	Limit (dB m)	Margin (dB)
Low Channel (2 510.0 MHz)							
5 032.06	V	-50.68	7.47	10.02	-48.13	-25.00	-23.13
7 493.99	V	-51.21	9.06	11.85	-48.42	-25.00	-23.42
12 515.53	H	-47.88	12.12	14.48	-45.52	-25.00	-20.52
12 515.53	V	-44.86	12.12	14.48	-42.50	-25.00	-17.50
Middle Channel (2 535.0 MHz)							
5 032.06	H	-53.24	7.47	10.02	-50.69	-25.00	-25.69
5 032.06	V	-49.37	7.47	10.02	-46.82	-25.00	-21.82
High Channel (2 560.0 MHz)							
5 090.68	V	-49.38	7.53	10.32	-46.59	-25.00	-21.59
5 110.22	H	-53.72	7.56	10.40	-50.88	-25.00	-25.88

* 20 BW 1RB size / 0 Offset

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company. This test report does not assure KOLAS accreditation.

SGS Korea Co., Ltd. (Gunpo Laboratory) 4, LS-ro 182beon-gil, Gunpo-si, Gyeonggi-do, Korea, 15807 <http://www.sgsgroup.kr>

RTT5041-19(2017.07.10)(0)

Tel. +82 31 428 5700 / Fax. +82 31 427 2370

A4(210 mm x 297 mm)

- Measured output Power: 19.30 dB m = 0.085 1 W
- Modulation Signal: LTE band 26 (1.4 MHz - QPSK)
- Distance: 3 meters
- Limit: $43 + 10 \log_{10}(W) = 32.30$ dB c

Frequency (MHz)	Ant. Pol. (H/V)	S.G level + Amp. (dB m)	Cable loss (dB)	Ant. gain (dB d)	E.R.P. (dB m)	Limit (dB m)	Margin (dB)
Low Channel (824.7 MHz)							
Below 1 000.00	-	-	-	-	Not detected	-	-
Above 1 000.00	-	-	-	-	Not detected	-	-
Middle Channel (836.5 MHz)							
2 508.82	H	-40.43	4.82	6.97	-38.28	-13.00	-25.28
2 508.82	V	-38.53	4.82	6.97	-36.38	-13.00	-23.38
High Channel (848.3 MHz)							
2 501.20	H	-41.98	4.81	6.99	-39.80	-13.00	-26.80
2 501.20	V	-34.29	4.81	6.99	-32.11	-13.00	-19.11
2 543.09	H	-40.23	4.87	6.89	-38.21	-13.00	-25.21
2 546.89	V	-37.07	4.88	6.88	-35.07	-13.00	-22.07

* 1.4 BW 1RB size / 0 Offset for B26

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company. This test report does not assure KOLAS accreditation.

- Measured output Power: 19.37 dB m = 0.086 5 W
- Modulation Signal: LTE band 26 (3 MHz - QPSK)
- Distance: 3 meters
- Limit: $43 + 10 \log_{10}(W) = 32.37$ dB c

Frequency (MHz)	Ant. Pol. (H/V)	S.G level + Amp. (dB m)	Cable loss (dB)	Ant. gain (dB d)	E.R.P. (dB m)	Limit (dB m)	Margin (dB)
Low Channel (825.5 MHz)							
Below 1 000.00	-	-	-	-	Not detected	-	-
Above 1 000.00	-	-	-	-	Not detected	-	-
Middle Channel (836.5 MHz)							
2 505.01	V	-38.62	4.82	6.98	-36.46	-13.00	-23.46
2 508.82	H	-41.11	4.82	6.97	-38.96	-13.00	-25.96
High Channel (847.5 MHz)							
2 505.01	H	-43.05	4.82	6.98	-40.89	-13.00	-27.89
2 539.28	H	-40.83	4.86	6.90	-38.79	-13.00	-25.79
2 539.28	V	-38.69	4.86	6.90	-36.65	-13.00	-23.65

* 3 BW 1RB size / 0 Offset for B26

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company. This test report does not assure KOLAS accreditation.

- Measured output Power: 19.44 dB m = 0.087 9 W
- Modulation Signal: LTE band 26 (5 MHz - QPSK)
- Distance: 3 meters
- Limit: $43 + 10 \log_{10}(W) = 32.44$ dB c

Frequency (MHz)	Ant. Pol. (H/V)	S.G level + Amp. (dB m)	Cable loss (dB)	Ant. gain (dB d)	E.R.P. (dB m)	Limit (dB m)	Margin (dB)
Low Channel (826.5 MHz)							
Below 1 000.00	-	-	-	-	Not detected	-	-
Above 1 000.00	-	-	-	-	Not detected	-	-
Middle Channel (836.5 MHz)							
2 505.01	H	-40.08	4.82	6.98	-37.92	-13.00	-24.92
2 505.01	V	-40.10	4.82	6.98	-37.94	-13.00	-24.94
High Channel (846.5 MHz)							
2 535.47	H	-41.83	4.86	6.91	-39.78	-13.00	-26.78
2 535.47	V	-40.12	4.86	6.91	-38.07	-13.00	-25.07

* 5 BW 1RB size / 0 Offset for B26

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company. This test report does not assure KOLAS accreditation.

SGS Korea Co., Ltd. (Gunpo Laboratory) 4, LS-ro 182beon-gil, Gunpo-si, Gyeonggi-do, Korea, 15807 <http://www.sgsgroup.kr>

RTT5041-19(2017.07.10)(0)

Tel. +82 31 428 5700 / Fax. +82 31 427 2370

A4(210 mm x 297 mm)

- Measured output Power: 19.89 dB m = 0.097 5 W
- Modulation Signal: LTE band 26 (10 MHz - QPSK)
- Distance: 3 meters
- Limit: $43 + 10 \log_{10}(W) = 32.89$ dB c

Frequency (MHz)	Ant. Pol. (H/V)	S.G level + Amp. (dB m)	Cable loss (dB)	Ant. gain (dB d)	E.R.P. (dB m)	Limit (dB m)	Margin (dB)
Low Channel (829.0 MHz)							
Below 1 000.00	-	-	-	-	Not detected	-	-
Above 1 000.00	-	-	-	-	Not detected	-	-
Middle Channel (836.5 MHz)							
2 497.39	H	-43.83	4.81	6.99	-41.65	-13.00	-28.65
2 497.39	V	-40.64	4.81	6.99	-38.46	-13.00	-25.46
High Channel (844.0 MHz)							
2 520.24	H	-41.83	4.84	6.94	-39.73	-13.00	-26.73
2 520.24	V	-39.36	4.84	6.94	-37.26	-13.00	-24.26

* 10 BW 1RB size / 0 Offset for B26

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company. This test report does not assure KOLAS accreditation.

SGS Korea Co., Ltd. (Gunpo Laboratory) 4, LS-ro 182beon-gil, Gunpo-si, Gyeonggi-do, Korea, 15807 <http://www.sgsgroup.kr>

RTT5041-19(2017.07.10)(0)

Tel. +82 31 428 5700 / Fax. +82 31 427 2370

A4(210 mm x 297 mm)

- Measured output Power: 20.19 dB m = 0.104 5 W
- Modulation Signal: LTE band 26 (15 MHz - QPSK)
- Distance: 3 meters
- Limit: $43 + 10 \log_{10}(W) = 33.19$ dB c

Frequency (MHz)	Ant. Pol. (H/V)	S.G level + Amp. (dB m)	Cable loss (dB)	Ant. gain (dB d)	E.R.P. (dB m)	Limit (dB m)	Margin (dB)
Low Channel (831.5 MHz)							
Below 1 000.00	-	-	-	-	Not detected	-	-
Above 1 000.00	-	-	-	-	Not detected	-	-
High Channel (841.5 MHz)							
2 505.01	H	-41.38	4.82	6.98	-39.22	-13.00	-26.22
2 505.01	V	-37.73	4.82	6.98	-35.57	-13.00	-22.57

* 15 BW 1RB size / 0 Offset for B26

Remark;

1. E.R.P. & E.I.R.P. = S.G level (dB m) - Cable loss (dB) + Ant. gain (dB d/dB i)
2. This device was tested under all bandwidths, RB configurations, and modulations.
3. The data reported in the table above was measured in worst case.

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company. This test report does not assure KOLAS accreditation.

3. Conducted Output Power


3.1. Limit

CFR 47, Section FCC §2.1046 and IC RSS-Gen Issue 5 6.12.

3.2. Test Procedure

Output power shall be measured at the RF output terminals for all configurations.

1. The RF output of the transmitter was connected to the input of the mobile test unit in order to establish communication with the EUT.
2. The EUT was set up for the max. output power with pseudo random data modulation by using mobile test unit parameters.
3. The measurement performed using a wideband RF power meter.
4. This EUT was tested under all configurations and the highest power was investigated and reported.

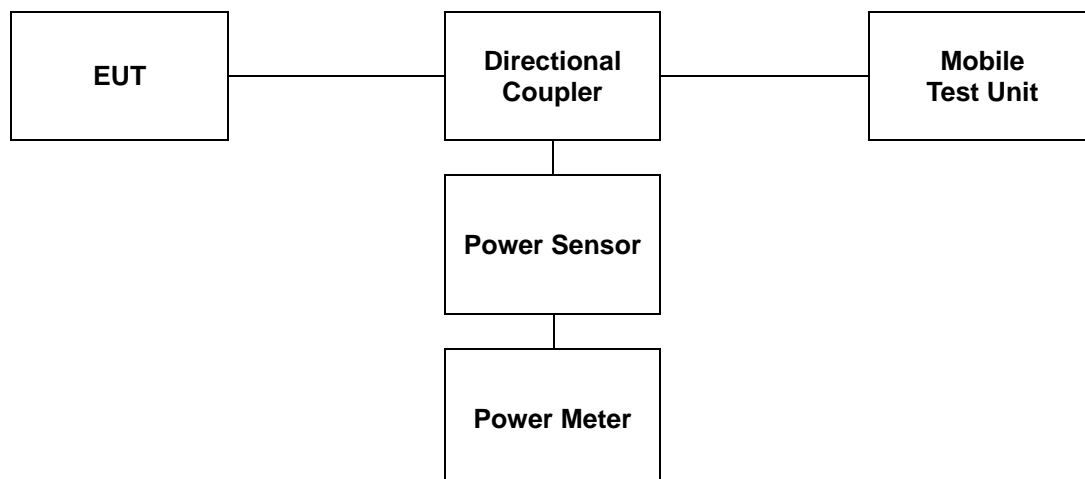

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company. This test report does not assure KOLAS accreditation.

3.3. Test Result

Ambient temperature : (23 ± 1) °C

Relative humidity : 47 % R.H.

Band	Bandwidth (MHz)	RB Size	RB Offset	QPSK			16QAM		
				20407	20525	20643	20407	20525	20643
				824.7	836.5	848.3	824.7	836.5	848.3
5	1.4	1	0	22.28	22.17	22.39	21.51	21.31	21.41
		1	3	22.33	22.22	22.46	21.54	21.34	21.68
		1	5	22.35	22.11	22.40	21.43	21.27	21.41
		3	0	22.34	22.19	22.41	21.47	21.27	21.53
		3	2	22.35	22.22	22.43	21.45	21.29	21.57
		3	3	22.36	22.25	22.44	21.43	21.31	21.61
		6	0	21.35	21.13	21.45	20.41	20.19	20.51
	Bandwidth (MHz)	RB Size	RB Offset	20415	20525	20635	20415	20525	20635
				825.5	836.5	847.5	825.5	836.5	847.5
	3	1	0	22.17	22.03	22.48	21.33	21.28	21.61
		1	8	22.20	22.16	22.46	21.29	21.34	21.62
		1	14	22.21	22.04	22.38	21.38	21.28	21.55
		8	0	21.23	21.14	21.52	20.25	20.17	20.58
		8	4	21.26	21.15	21.53	20.27	20.16	20.56
		8	7	21.29	21.16	21.55	20.29	20.15	20.55
		15	0	21.25	21.18	21.55	20.27	20.16	20.54
	Bandwidth (MHz)	RB Size	RB Offset	20425	20525	20625	20425	20525	20625
				826.5	836.5	846.5	826.5	836.5	846.5
	5	1	0	22.15	22.07	22.44	21.20	21.15	21.65
		1	12	22.33	22.34	22.62	21.42	21.41	21.77
		1	24	22.09	22.13	22.39	21.23	21.26	21.55
		12	0	21.24	21.15	21.55	20.24	20.16	20.47
		12	7	21.24	21.18	21.52	20.24	20.17	20.45
		12	13	21.23	21.20	21.48	20.23	20.19	20.42
		25	0	21.19	21.21	21.53	20.24	20.18	20.50
	Bandwidth (MHz)	RB Size	RB Offset	20450	20525	20600	20450	20525	20600
				829.0	836.5	844.0	829.0	836.5	844.0
	10	1	0	22.29	22.02	22.32	21.42	21.16	21.45
		1	25	22.34	22.18	22.47	21.46	21.34	21.59
		1	49	22.19	22.01	22.30	21.36	21.14	21.43
		25	0	21.46	21.20	21.47	20.40	20.20	20.41
		25	12	21.42	21.19	21.51	20.36	20.19	20.46
		25	25	21.37	21.18	21.55	20.33	20.18	20.50
		50	0	21.49	21.17	21.49	20.42	20.12	20.41

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company. This test report does not assure KOLAS accreditation.

LTE Band	Bandwidth (MHz)	RB Size	RB Offset	QPSK			16QAM		
				20775	21100	21425	20775	21100	21425
				2 502.5	2 535.0	2 567.5	2 502.5	2 535.0	2 567.5
7	5	1	0	22.47	22.15	22.60	21.61	21.17	21.75
		1	12	22.61	22.19	22.60	21.76	21.24	21.76
		1	24	22.48	22.05	22.45	21.59	21.17	21.64
		12	0	21.44	21.06	21.52	20.43	20.09	20.50
		12	7	21.47	21.03	21.48	20.45	20.07	20.46
		12	13	21.50	21.01	21.44	20.47	20.04	20.42
		25	0	21.48	21.01	21.48	20.50	20.04	20.46
	Bandwidth (MHz)	RB Size	RB Offset	20800	21100	21400	20800	21100	21400
	10	1	0	22.54	22.18	22.61	21.65	21.31	21.73
		1	25	22.52	22.04	22.38	21.65	21.18	21.47
		1	49	22.46	22.02	22.23	21.62	21.08	21.44
		25	0	21.61	21.13	21.54	20.54	20.12	20.49
		25	12	21.55	21.08	21.51	20.44	20.07	20.45
		25	25	21.49	21.03	21.47	20.34	20.01	20.40
		50	0	21.55	21.07	21.49	20.50	20.05	20.45
	Bandwidth (MHz)	RB Size	RB Offset	20825	21100	21375	20825	21100	21375
	15	1	0	23.00	22.72	23.03	22.32	21.84	22.14
		1	37	22.52	22.04	22.36	21.59	21.18	21.41
		1	74	22.78	22.47	22.73	22.02	21.59	21.83
		36	0	21.59	21.30	21.53	20.72	20.31	20.49
		36	20	21.52	21.24	21.53	20.64	20.23	20.47
		36	39	21.45	21.18	21.52	20.57	20.16	20.46
		75	0	21.53	21.22	21.45	20.70	20.21	20.43
	Bandwidth (MHz)	RB Size	RB Offset	20850	21100	21350	20850	21100	21350
	20	1	0	23.39	23.23	23.41	22.47	22.32	22.61
		1	50	22.22	22.04	22.27	21.28	21.15	21.48
		1	99	23.02	22.69	23.05	22.04	21.84	22.24
		50	0	21.75	21.52	21.77	20.69	20.49	20.69
		50	25	21.62	21.41	21.68	20.60	20.39	20.61
		50	50	21.49	21.30	21.60	20.50	20.28	20.54
		100	0	21.66	21.40	21.65	20.62	20.38	20.59

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company. This test report does not assure KOLAS accreditation.

Band	Bandwidth (MHz)	RB Size	RB Offset	QPSK			16QAM		
				26797	26915	27033	26797	26915	27033
				824.7	836.5	848.3	824.7	836.5	848.3
26	1.4	1	0	21.93	21.88	21.75	21.10	21.12	20.92
		1	3	22.02	21.89	21.82	21.13	21.05	20.92
		1	5	21.91	21.86	21.79	21.08	21.04	20.81
		3	0	22.00	21.90	21.80	21.05	21.06	20.90
		3	2	22.01	21.95	21.81	21.09	21.07	20.93
		3	3	22.03	22.00	21.81	21.04	21.10	20.96
		6	0	21.05	20.94	20.84	20.11	20.02	19.98
	Bandwidth (MHz)	RB Size	RB Offset	26805	26915	27025	26805	26915	27025
				825.5	836.5	847.5	825.5	836.5	847.5
	3	1	0	21.96	21.80	21.84	21.04	20.99	21.01
		1	8	21.98	21.81	21.88	21.18	20.98	21.06
		1	14	21.95	21.84	21.81	21.09	20.95	20.91
		8	0	21.10	20.97	21.89	20.11	19.98	19.95
		8	4	21.05	20.96	21.87	20.06	20.01	19.93
		8	7	20.98	20.96	21.85	20.01	20.00	19.91
		15	0	21.01	20.95	20.88	20.02	19.98	19.92
	Bandwidth (MHz)	RB Size	RB Offset	26815	26915	27015	26815	26915	27015
				826.5	836.5	846.5	826.5	836.5	846.5
	5	1	0	22.00	21.96	21.93	21.20	21.08	21.18
		1	12	22.15	22.01	22.02	21.33	21.14	21.13
		1	24	22.01	21.87	21.96	21.18	20.98	21.15
		12	0	21.23	21.02	21.01	20.23	20.01	20.03
		12	7	21.18	21.03	21.00	20.15	20.00	20.05
		12	13	21.16	20.99	21.00	20.06	20.03	20.06
		25	0	21.16	21.04	21.03	20.14	20.10	20.05
	Bandwidth (MHz)	RB Size	RB Offset	26840	26915	26990	26840	26915	26990
				829.0	836.5	844.0	829.0	836.5	844.0
	10	1	0	21.90	21.92	21.82	21.11	21.05	20.97
		1	25	22.03	21.94	21.95	21.20	21.06	21.18
		1	49	21.92	21.84	21.80	21.14	21.03	20.96
		25	0	21.13	21.06	21.09	20.12	20.07	20.08
		25	12	21.10	21.03	21.05	20.14	20.03	20.03
		25	25	21.15	21.04	21.02	20.16	20.05	20.05
		50	0	21.14	21.10	21.10	20.08	20.11	20.07
	Bandwidth (MHz)	RB Size	RB Offset	26865	-	26965	26865	-	26965
				831.5	-	841.5	831.5	-	841.5
	15	1	0	22.33	-	22.28	21.51	-	21.38
		1	37	22.07	-	21.98	21.27	-	21.11
		1	74	22.31	-	22.16	21.47	-	21.18
		36	0	21.26	-	21.22	20.26	-	20.20
		36	20	21.20	-	21.16	20.20	-	20.16
		36	39	21.18	-	21.18	20.18	-	20.15
		75	0	21.17	-	21.29	20.09	-	20.27

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company. This test report does not assure KOLAS accreditation.

4. Occupied Bandwidth 99 %

4.1. Limit

CFR 47, Section FCC §2.1049 and IC RSS-Gen Issue 5 6.7.

4.2. Test Procedure

FCC

The test follows section 4.2 of FCC KDB Publication 971168 D01 v03r01.

- a. The spectrum analyzer center frequency is set to the nominal EUT channel center frequency. The frequency span for the spectrum analyzer shall be set wide enough to capture all modulation. products including the emission skirts (typically a span of $1.5 \times \text{OBW}$ is sufficient).
- b. The nominal IF filter 3 dB bandwidth (RBW) shall be in the range of 1 % to 5 % of the anticipated OBW, and the VBW shall be set $\geq 3 \times \text{RBW}$.
- c. Set the reference level of the instrument as required to prevent the signal amplitude from exceeding the maximum spectrum analyzer input mixer level for linear operation. See guidance provided in 4.2.3.
- d. Set the detection mode to peak, and the trace mode to max-hold.
- e. If the instrument does not have a 99 % OBW function, recover the trace data points and sum directly in linear power terms. Place the recovered amplitude data points, beginning at the lowest frequency, in a running sum until 0.5 % of the total is reached. Record that frequency as the lower OBW frequency. Repeat the process until 99.5 % of the total is reached and record that frequency as the upper OBW frequency. The 99 % power OBW can be determined by computing the difference these two frequencies.
- f. The OBW shall be reported and plot(s) of the measuring instrument display shall be provided with the test report. The frequency and amplitude axis and scale shall be clearly labeled. Tabular data can be reported in addition to the plot(s).

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company. This test report does not assure KOLAS accreditation.


IC

The following conditions shall be observed for measuring the occupied bandwidth and x dB bandwidth:

- The transmitter shall be operated at its maximum carrier power measured under normal test conditions.
- The span of the spectrum analyzer shall be set large enough to capture all products of the modulation process, including the emission skirts, around the carrier frequency, but small enough to avoid having other emissions (e.g. on adjacent channels) within the span.
- The detector of the spectrum analyzer shall be set to "Sample". However, a peak, or peak hold, may be used in place of the sampling detector since this usually produces a wider bandwidth than the actual bandwidth (worst-case measurement). Use of a peak hold (or "Max Hold") may be necessary to determine the occupied / x dB bandwidth if the device is not transmitting continuously.
- The resolution bandwidth (RBW) shall be in the range of 1% to 5% of the actual occupied / x dB bandwidth and the video bandwidth (VBW) shall not be smaller than three times the RBW value. Video averaging is not permitted.

Note: It may be necessary to repeat the measurement a few times until the RBW and VBW are in compliance with the above requirement.

For the 99% emission bandwidth, the trace data points are recovered and directly summed in linear power level terms. The recovered amplitude data points, beginning at the lowest frequency, are placed in a running sum until 0.5% of the total is reached, and that frequency recorded. The process is repeated for the highest frequency data points (starting at the highest frequency, at the right side of the span, and going down in frequency). This frequency is then recorded. The difference between the two recorded frequencies is the occupied bandwidth (or the 99% emission bandwidth).

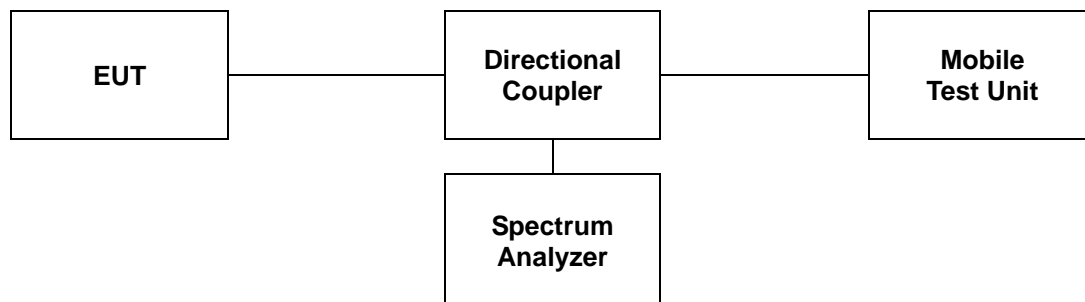

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company. This test report does not assure KOLAS accreditation.

4.3 Test Results

Ambient temperature : (23 ± 1) °C
Relative humidity : 47 % R.H.

Band	Mode	Frequency (MHz)	Occupied Bandwidth (MHz)
5 (1.4 MHz)	QPSK	824.7	1.098
		836.5	1.103
		848.3	1.098
5 (1.4 MHz)	16QAM	824.7	1.098
		836.5	1.103
		848.3	1.103
5 (3 MHz)	QPSK	825.5	2.700
		836.5	2.692
		847.5	2.683
5 (3 MHz)	16QAM	825.5	2.692
		836.5	2.692
		847.5	2.692
5 (5 MHz)	QPSK	826.5	4.515
		836.5	4.530
		846.5	4.501
5 (5 MHz)	16QAM	826.5	4.515
		836.5	4.515
		846.5	4.486
5 (10 MHz)	QPSK	829.0	8.944
		836.5	8.944
		844.0	8.915
5 (10 MHz)	16QAM	829.0	8.944
		836.5	8.973
		844.0	8.915

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company. This test report does not assure KOLAS accreditation.

Band	Mode	Frequency (MHz)	Occupied Bandwidth (MHz)
7 (5 MHz)	QPSK	2 502.5	4.501
		2 535.0	4.515
		2 567.5	4.515
7 (5 MHz)	16QAM	2 502.5	4.501
		2 535.0	4.501
		2 567.5	4.515
7 (10 MHz)	QPSK	2 505.0	8.944
		2 535.0	8.973
		2 565.0	8.973
7 (10 MHz)	16QAM	2 505.0	8.944
		2 535.0	8.973
		2 565.0	8.915
7 (15 MHz)	QPSK	2 507.5	13.502
		2 535.0	13.502
		2 562.5	13.459
7 (15 MHz)	16QAM	2 507.5	13.502
		2 535.0	13.502
		2 562.5	13.502
7 (20 MHz)	QPSK	2 510.0	18.003
		2 535.0	17.945
		2 560.0	17.945
7 (20 MHz)	16QAM	2 510.0	17.887
		2 535.0	17.945
		2 560.0	17.945


The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company. This test report does not assure KOLAS accreditation.

Band	Mode	Frequency (MHz)	Occupied Bandwidth (MHz)
26 (1.4 MHz)	QPSK	824.7	1.094
		836.5	1.094
		848.3	1.098
26 (1.4 MHz)	16QAM	824.7	1.098
		836.5	1.103
		848.3	1.094
26 (3 MHz)	QPSK	825.5	2.692
		836.5	2.692
		847.5	2.692
26 (3 MHz)	16QAM	825.5	2.692
		836.5	2.692
		847.5	2.692
26 (5 MHz)	QPSK	826.5	4.501
		836.5	4.515
		846.5	4.515
26 (5 MHz)	16QAM	826.5	4.501
		836.5	4.515
		846.5	4.501
26 (10 MHz)	QPSK	829.0	8.915
		836.5	8.944
		844.0	8.944
26 (10 MHz)	16QAM	829.0	8.944
		836.5	8.973
		844.0	8.973
26 (15 MHz)	QPSK	831.5	13.502
		841.5	13.502
26 (15 MHz)	16QAM	831.5	13.502
		841.5	13.502


The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company. This test report does not assure KOLAS accreditation.

LTE band 5 (1.4 MHz - QPSK)

Low Channel

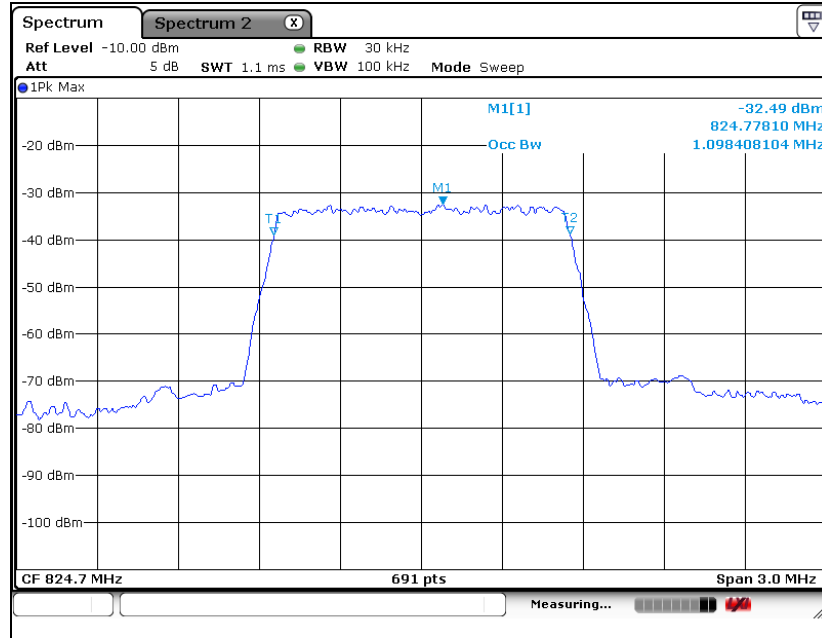


Middle Channel

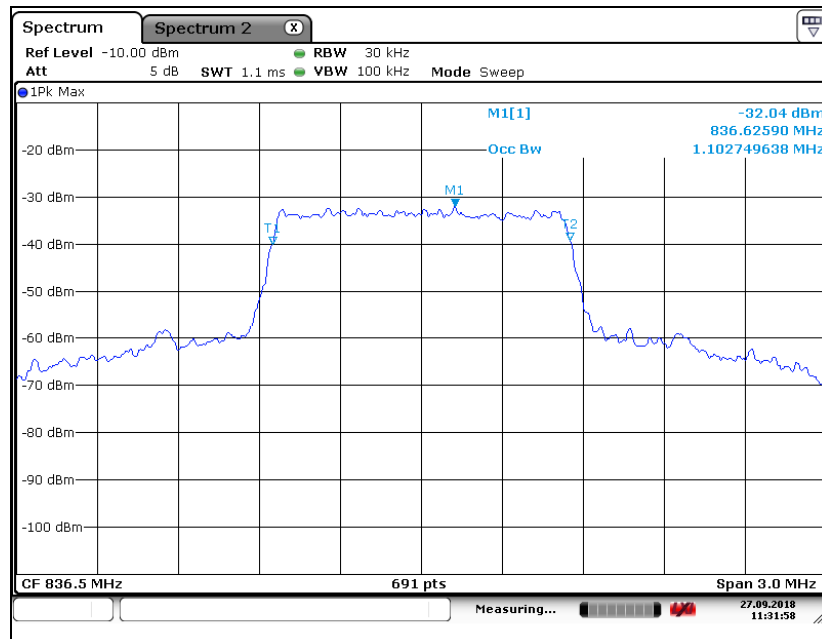


The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company. This test report does not assure KOLAS accreditation.

High Channel

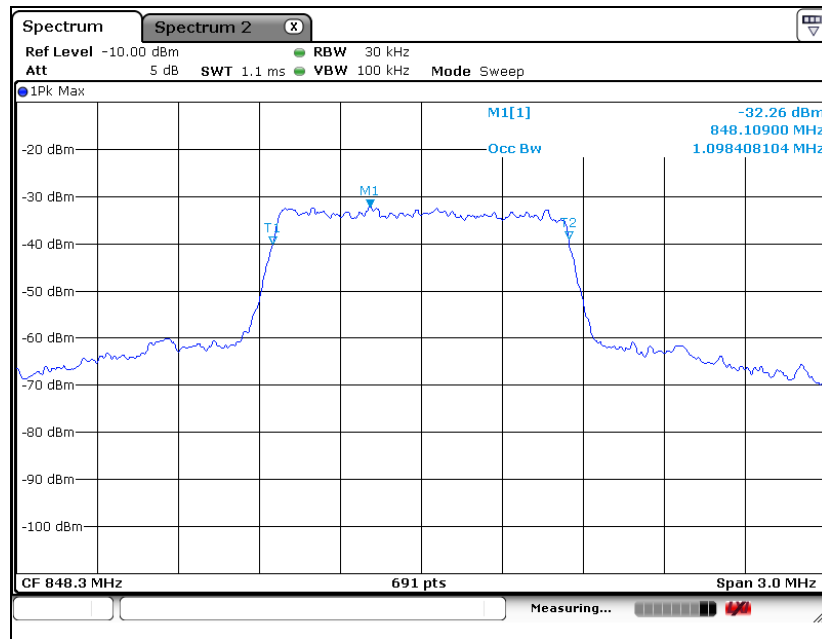


LTE band 5 (1.4 MHz - 16QAM)

Low Channel

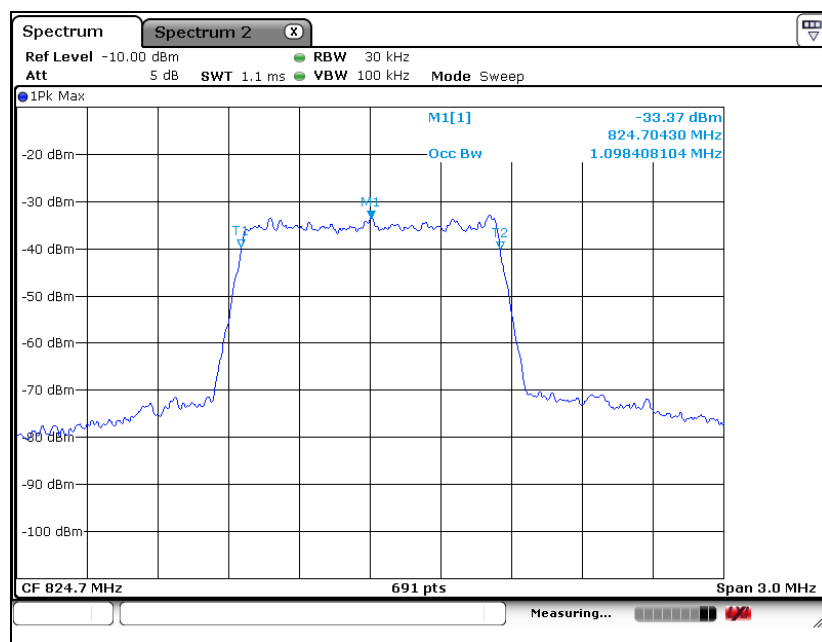


The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company. This test report does not assure KOLAS accreditation.

Middle Channel

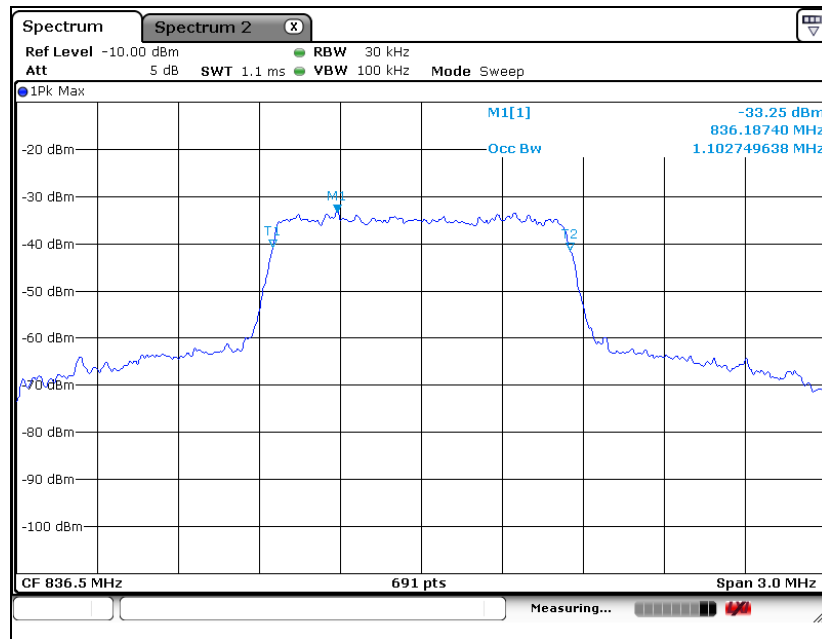


High Channel

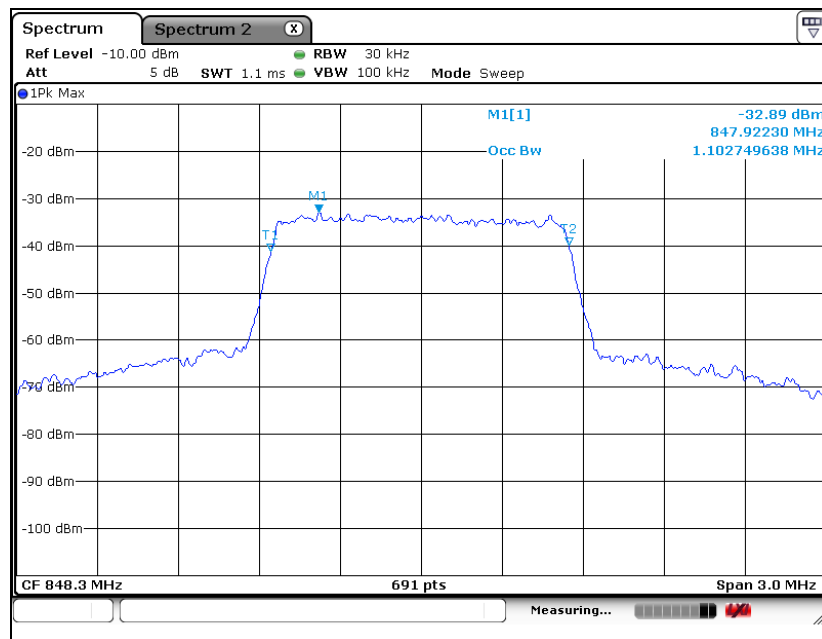


The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company. This test report does not assure KOLAS accreditation.

LTE band 5 (3 MHz - QPSK)

Low Channel

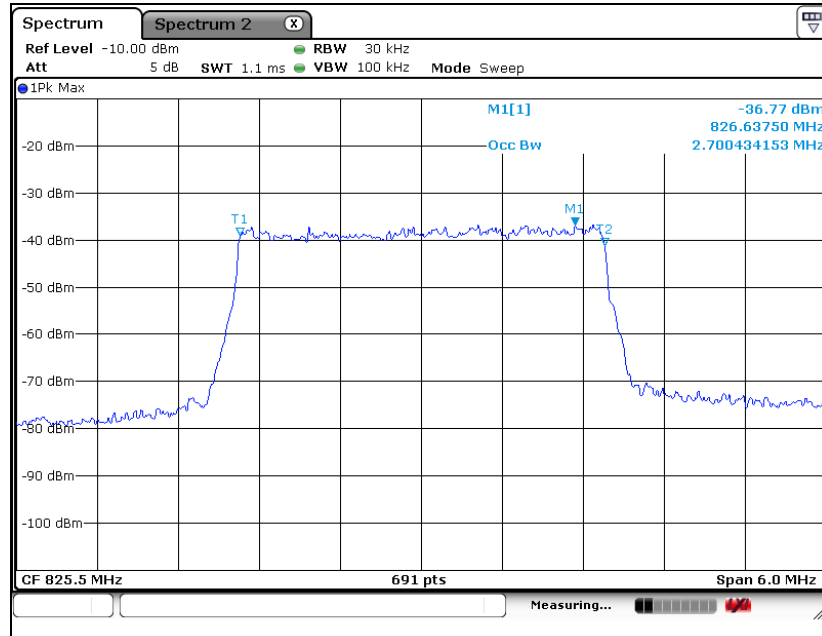


Middle Channel

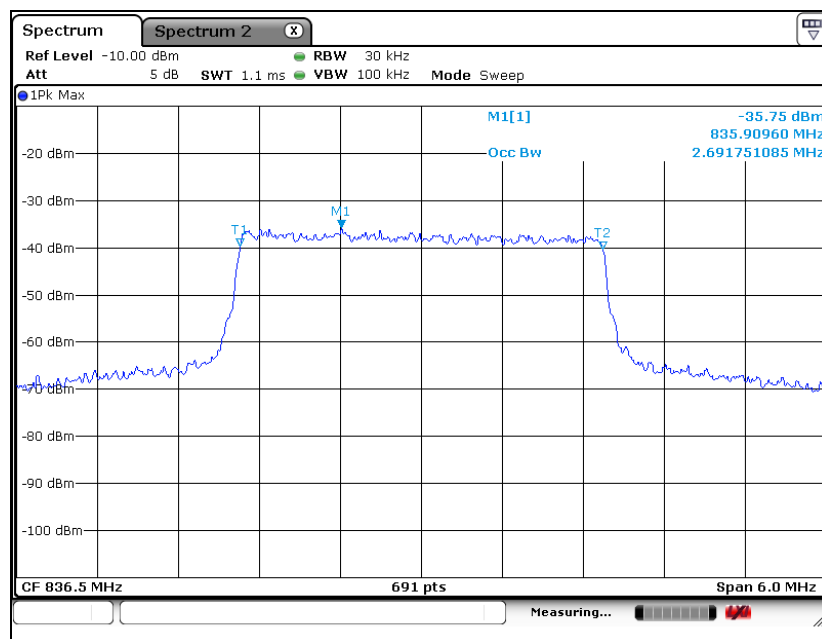


The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company. This test report does not assure KOLAS accreditation.

High Channel

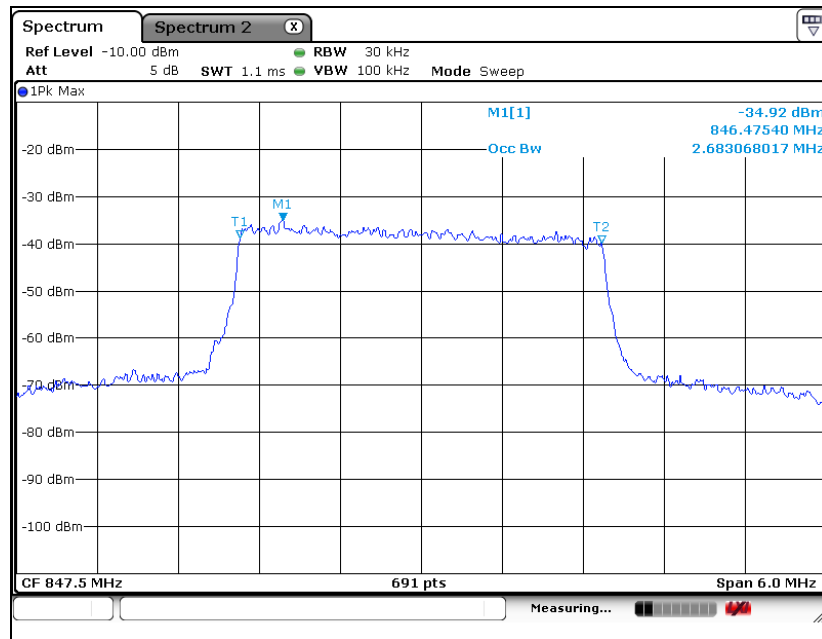


LTE band 5 (3 MHz - 16QAM)

Low Channel

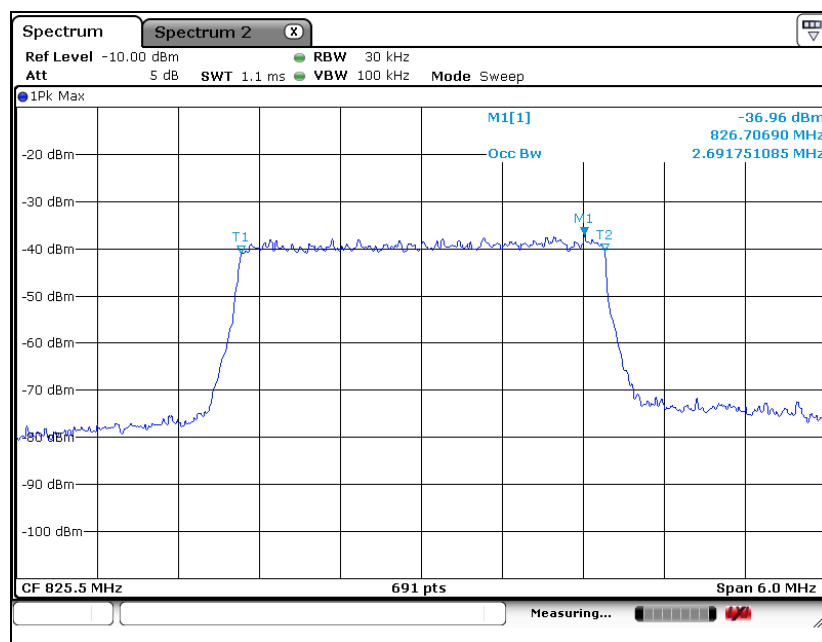


The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company. This test report does not assure KOLAS accreditation.

Middle Channel

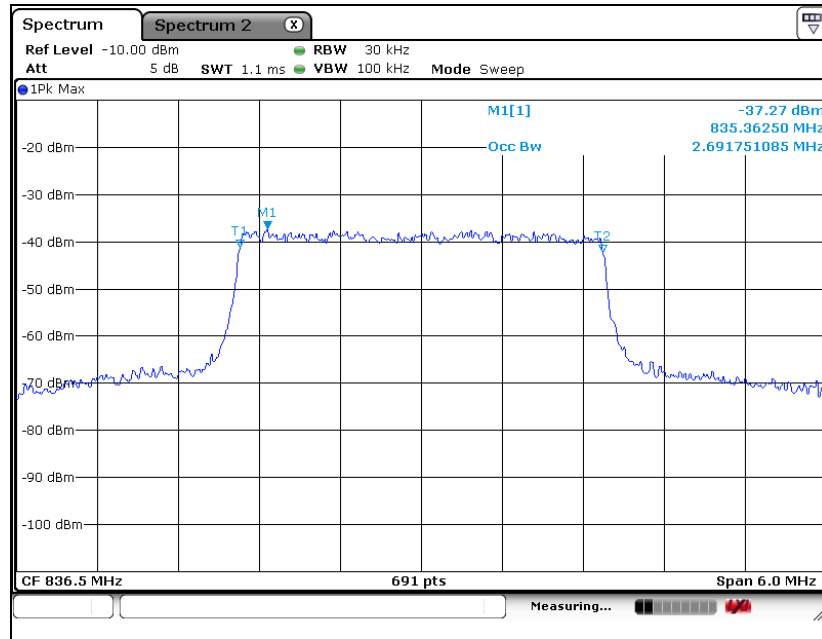


High Channel

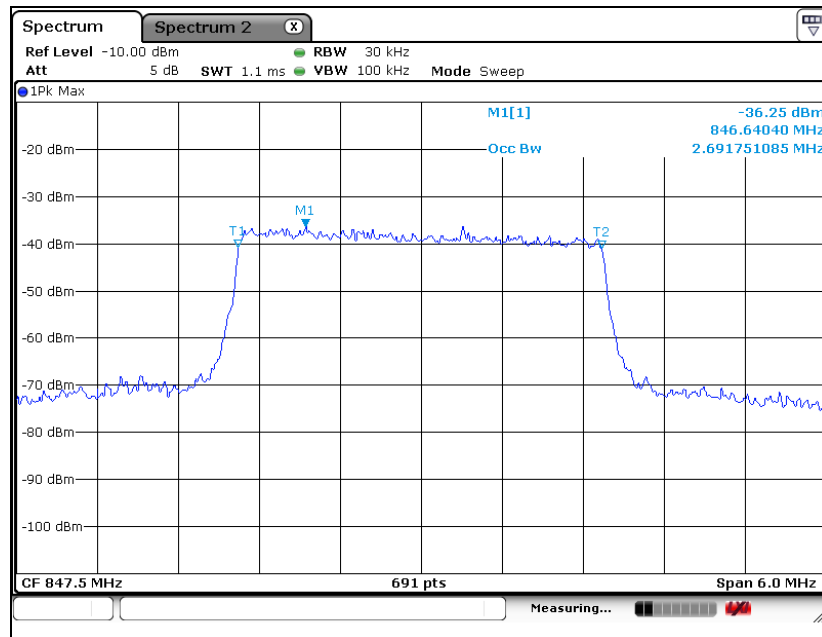


The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company. This test report does not assure KOLAS accreditation.

LTE band 5 (5 MHz - QPSK)

Low Channel

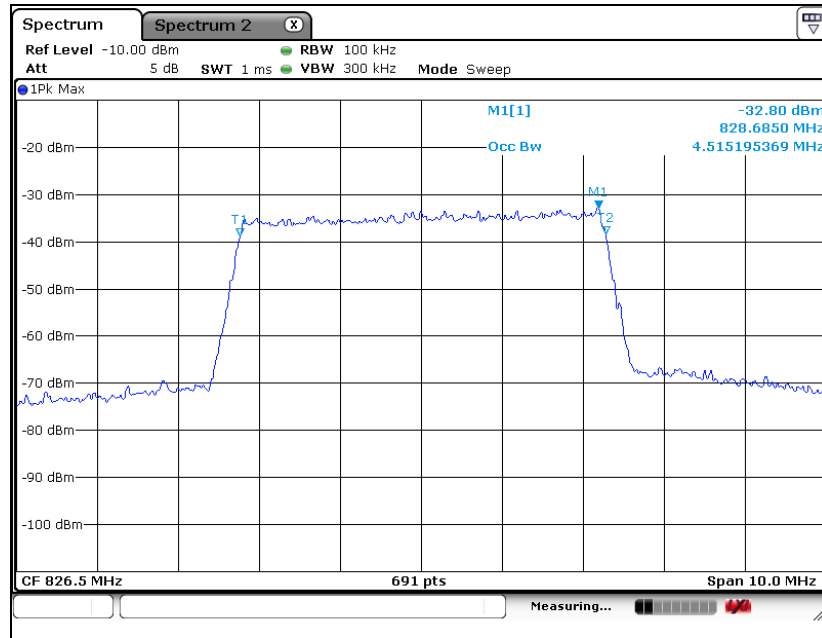


Middle Channel

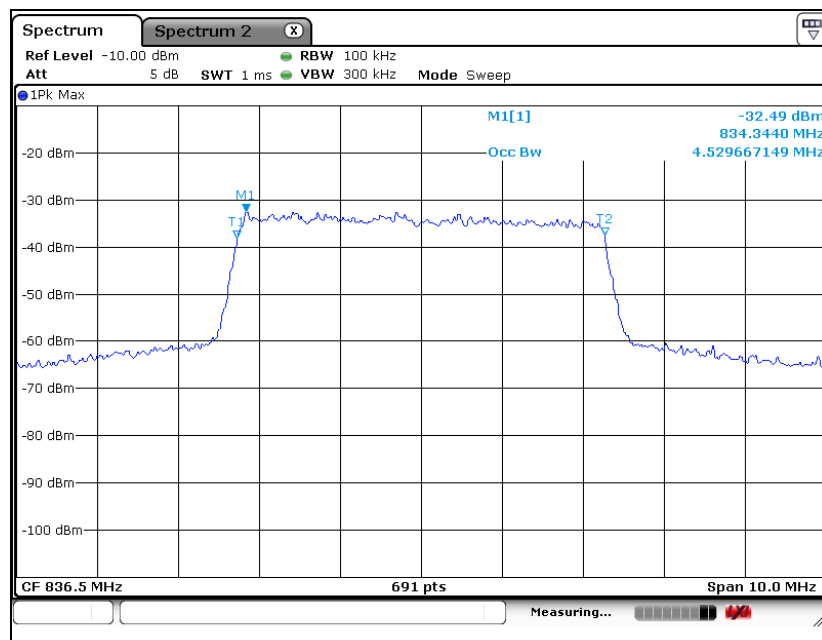


The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company. This test report does not assure KOLAS accreditation.

High Channel

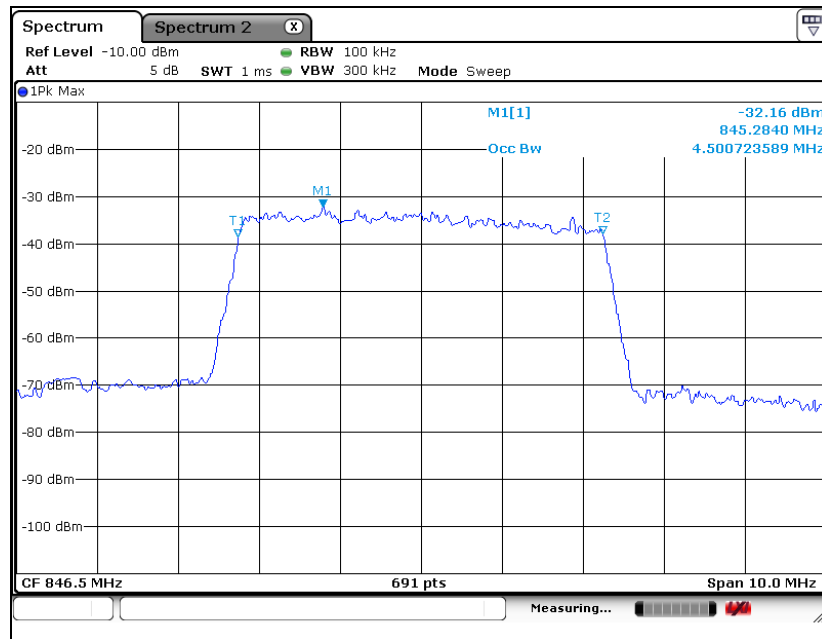


LTE band 5 (5 MHz - 16QAM)

Low Channel

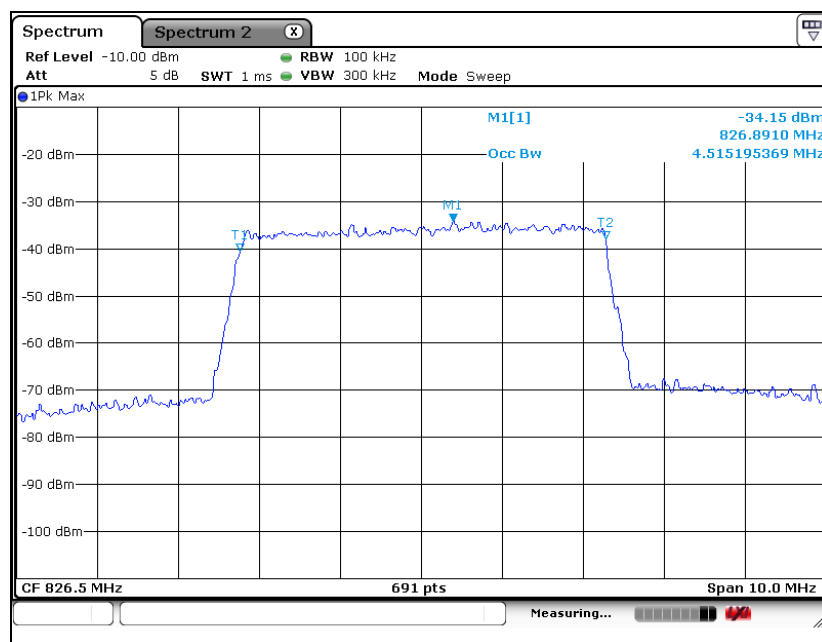


The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company. This test report does not assure KOLAS accreditation.

Middle Channel

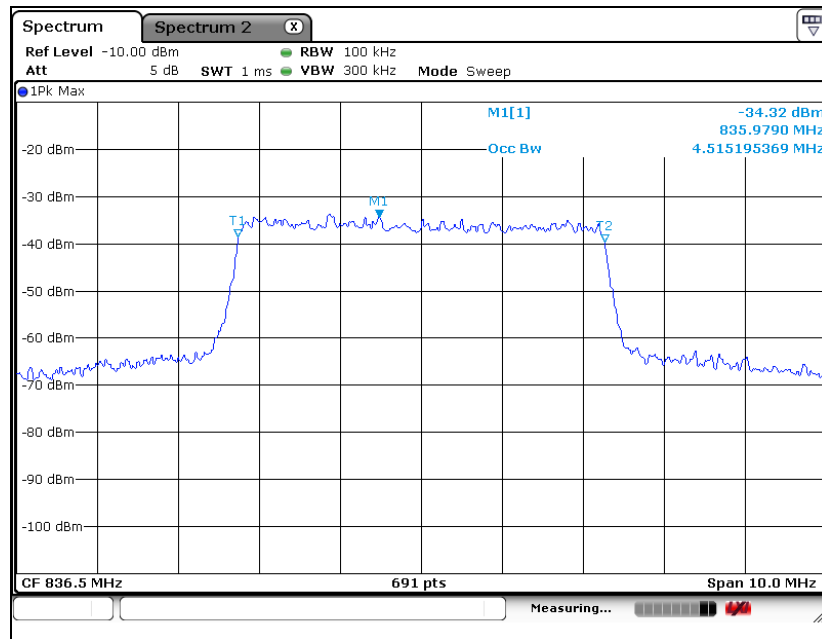


High Channel

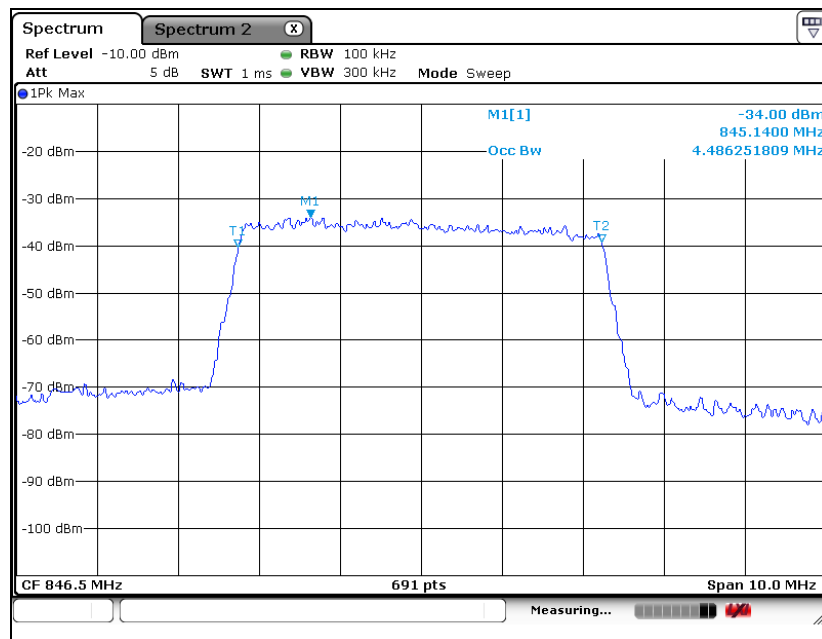


The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company. This test report does not assure KOLAS accreditation.

High Channel

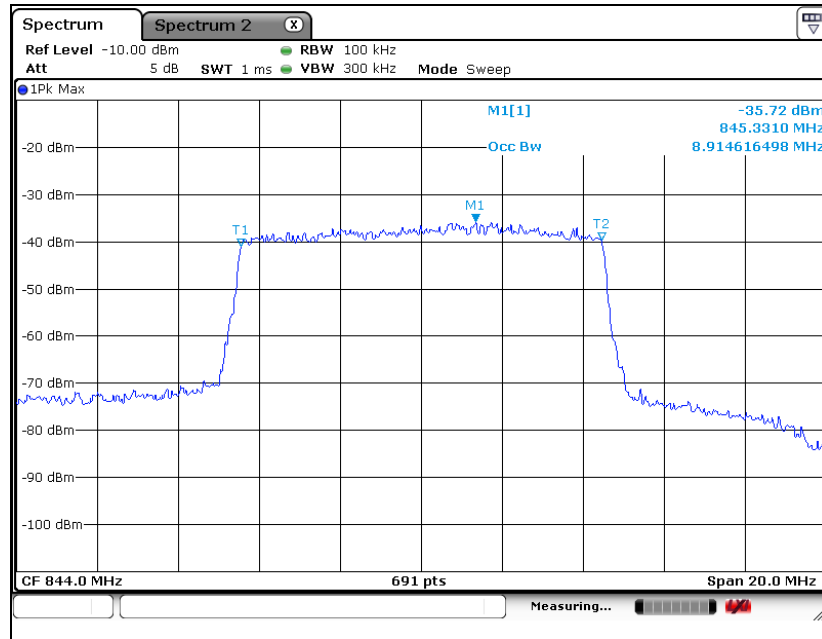


LTE band 5 (10 MHz - 16QAM)

Low Channel

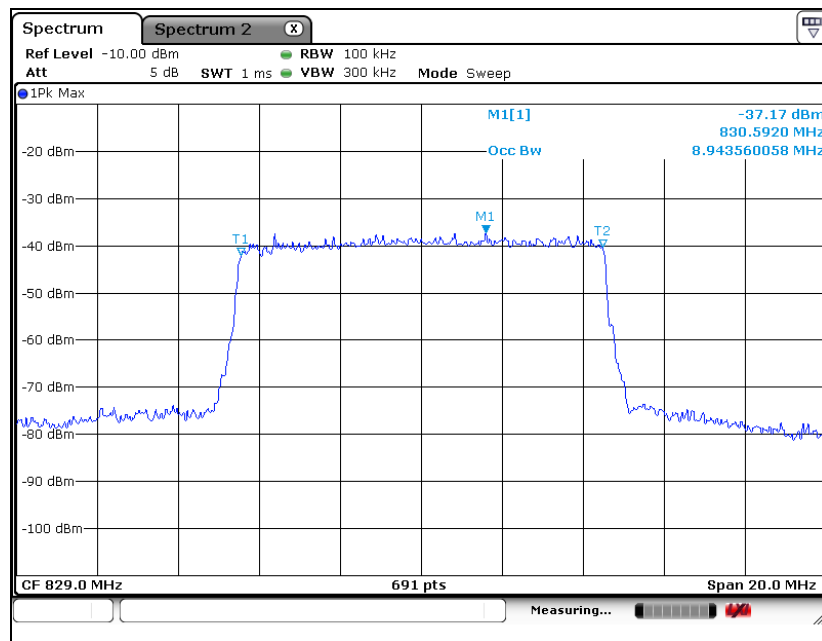


The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company. This test report does not assure KOLAS accreditation.

Middle Channel

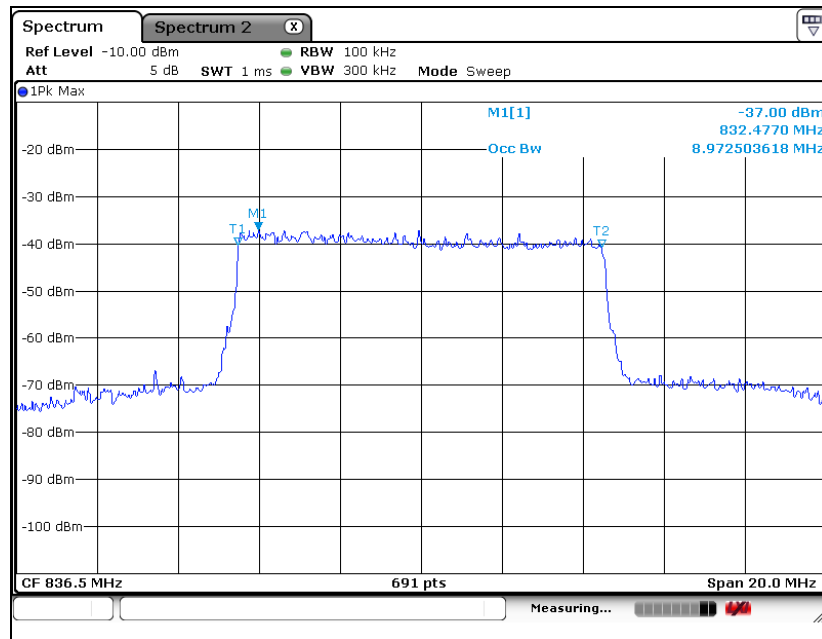


High Channel

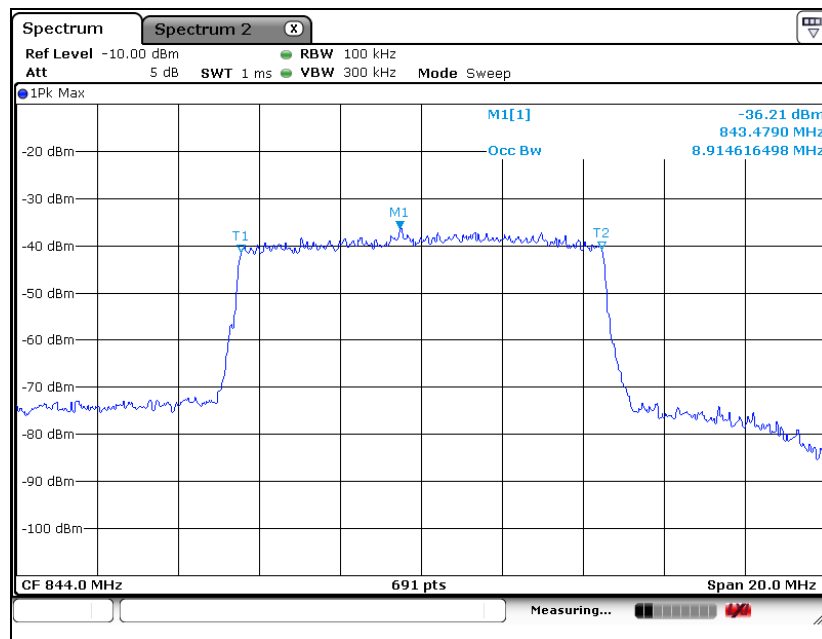


The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company. This test report does not assure KOLAS accreditation.

LTE band 7 (5 MHz - QPSK)

Low Channel

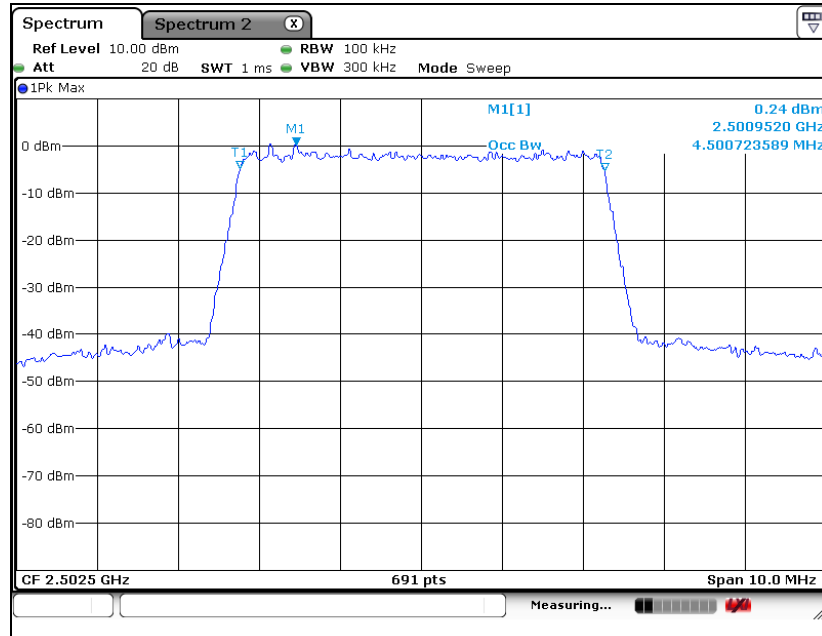


Middle Channel

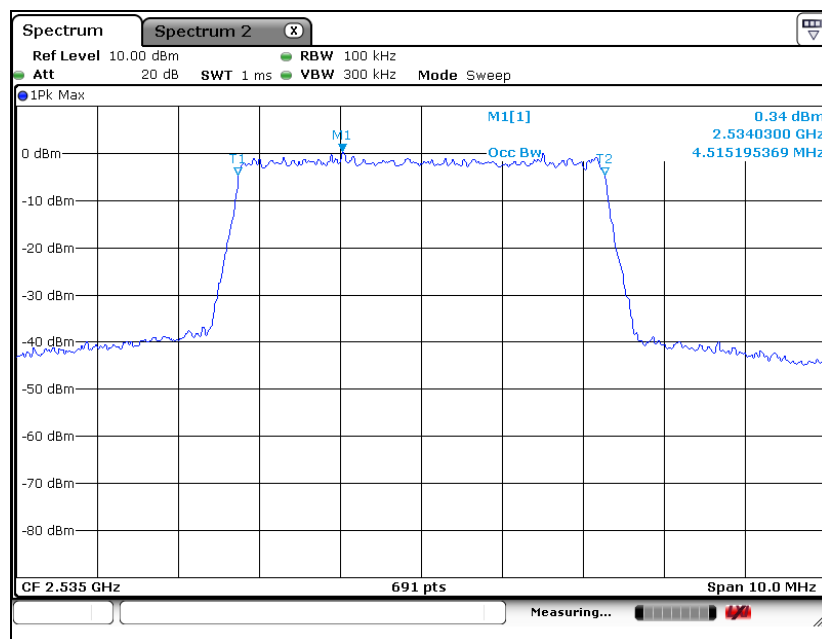


The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company. This test report does not assure KOLAS accreditation.

High Channel

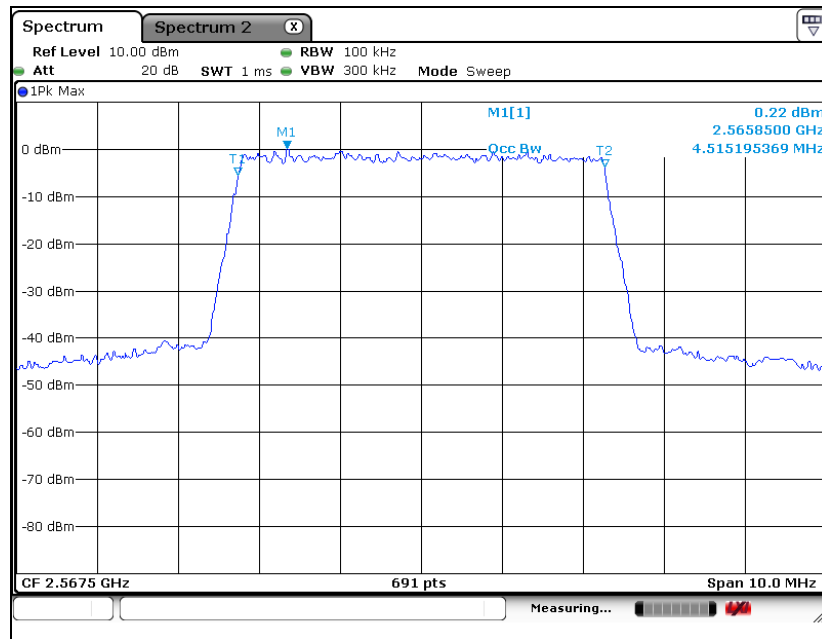


LTE band 7 (5 MHz - 16QAM)

Low Channel

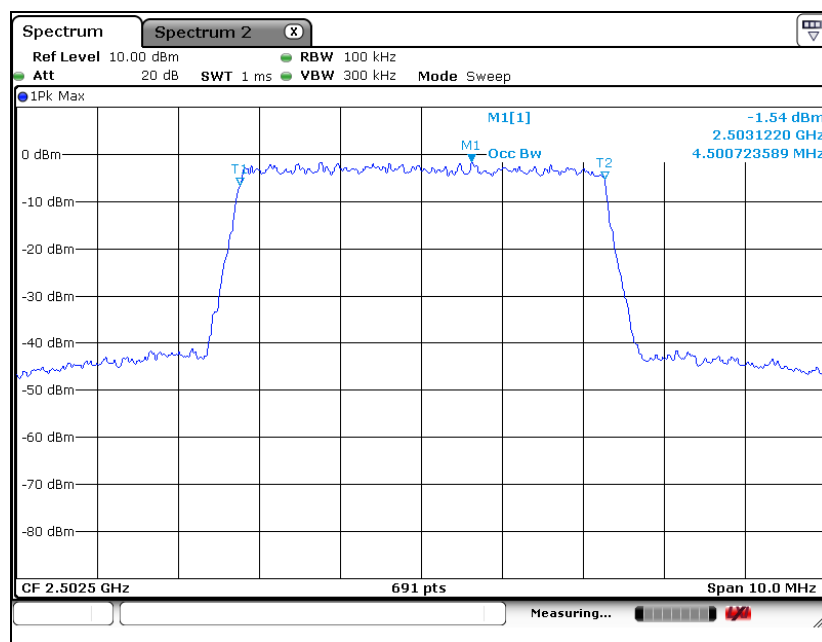


The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company. This test report does not assure KOLAS accreditation.

Middle Channel

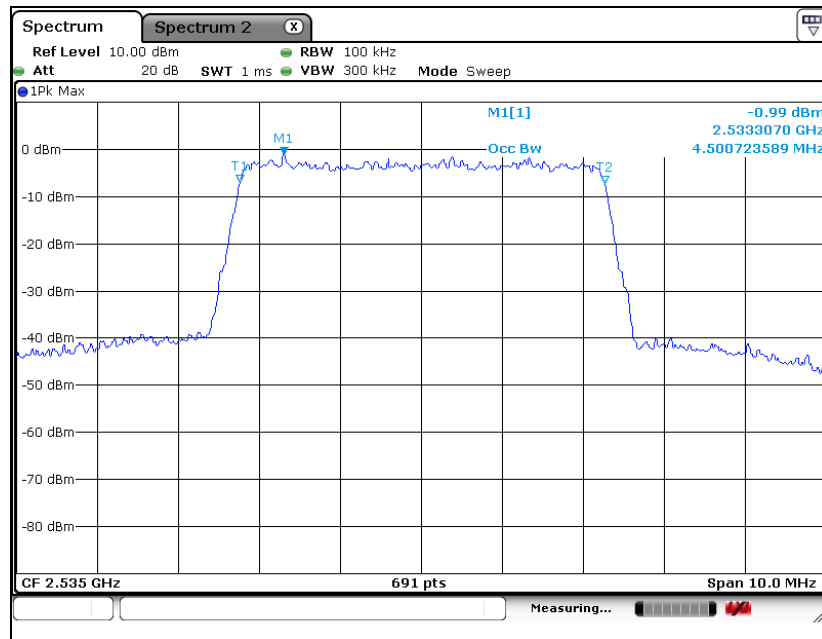


High Channel

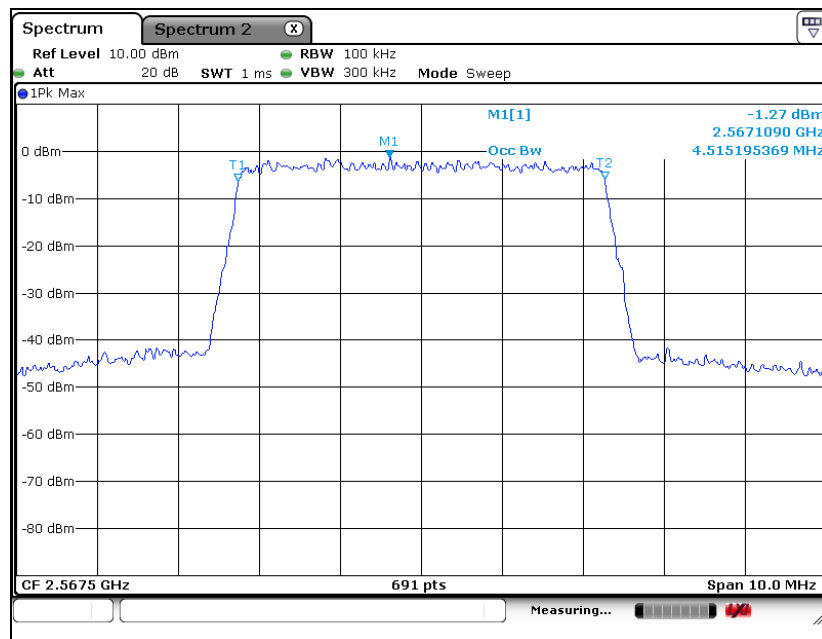


The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company. This test report does not assure KOLAS accreditation.

LTE band 7 (10 MHz - QPSK)

Low Channel

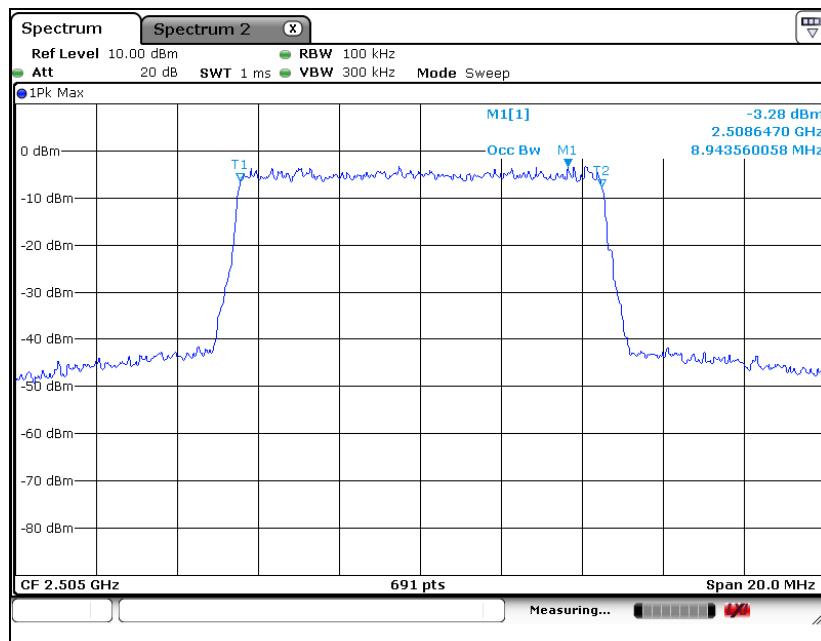


Middle Channel

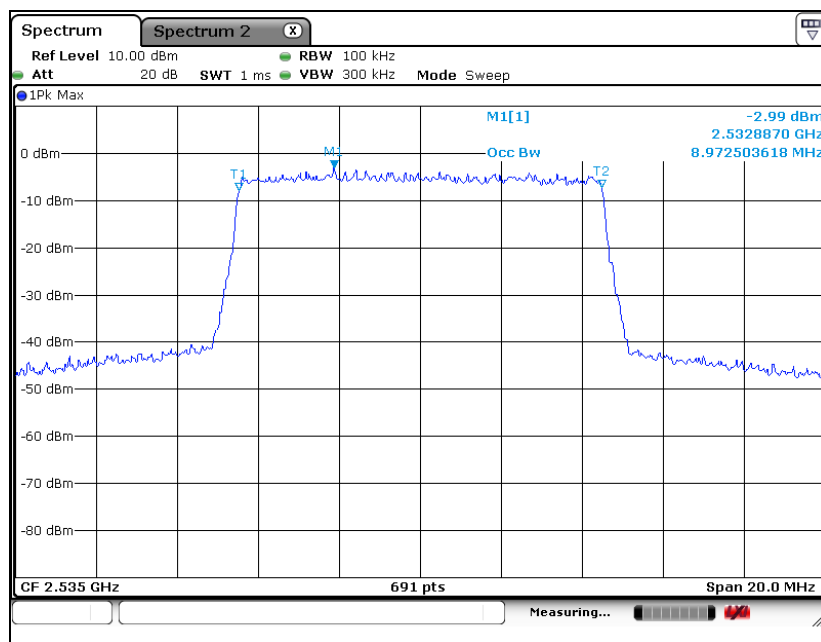


The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company. This test report does not assure KOLAS accreditation.

High Channel

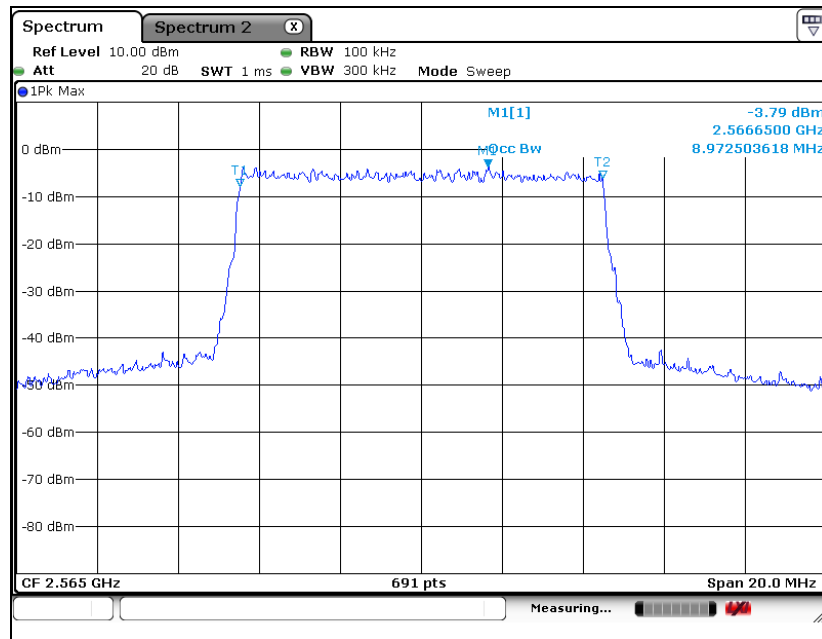


LTE band 7 (10 MHz - 16QAM)

Low Channel

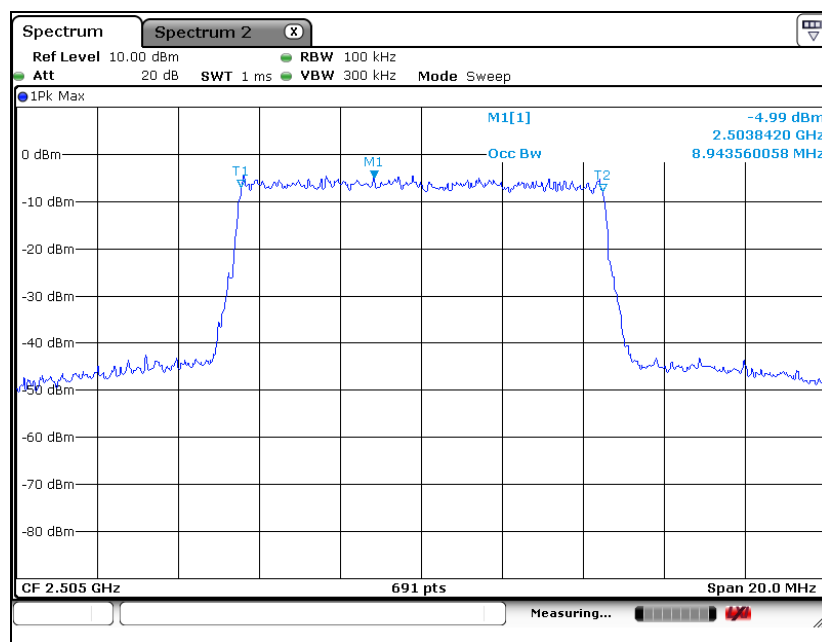


The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company. This test report does not assure KOLAS accreditation.

Middle Channel

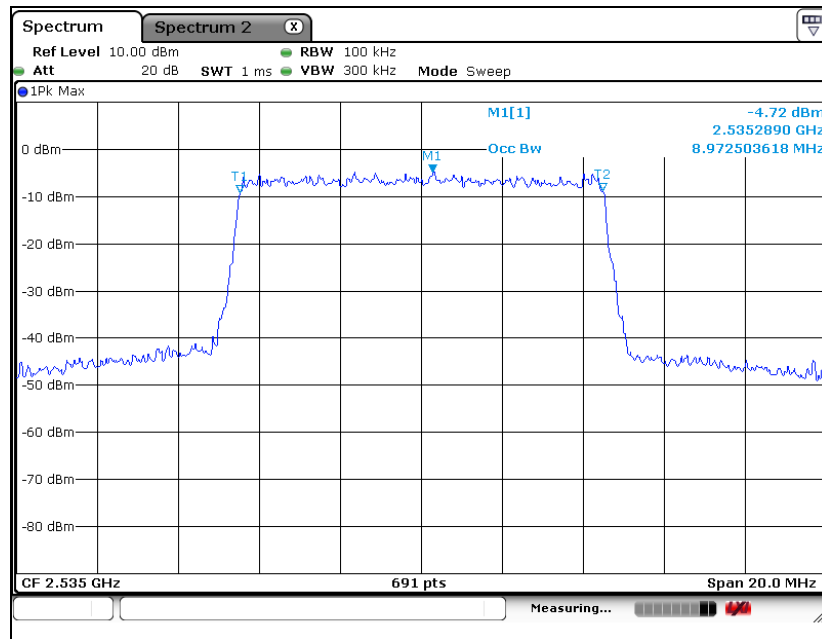


High Channel

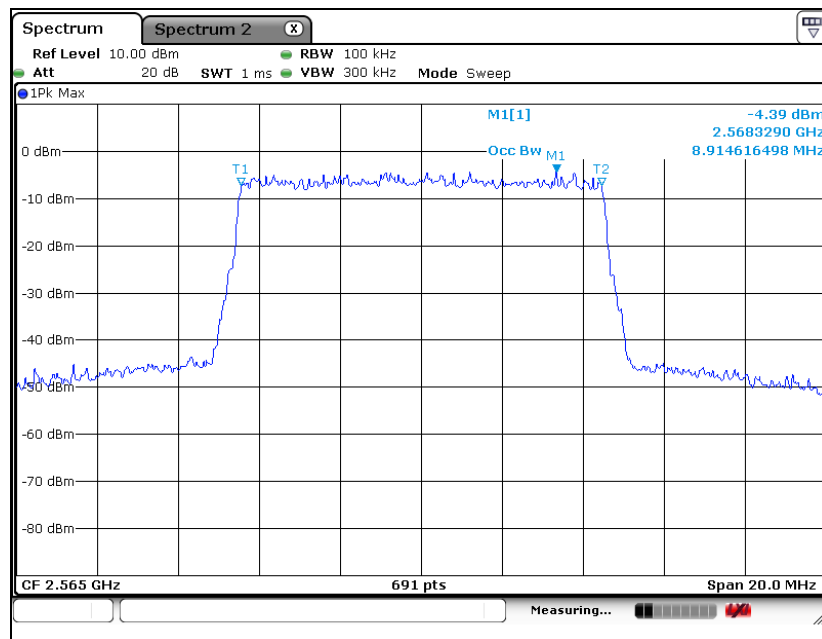


The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company. This test report does not assure KOLAS accreditation.

LTE band 7 (15 MHz - QPSK)

Low Channel

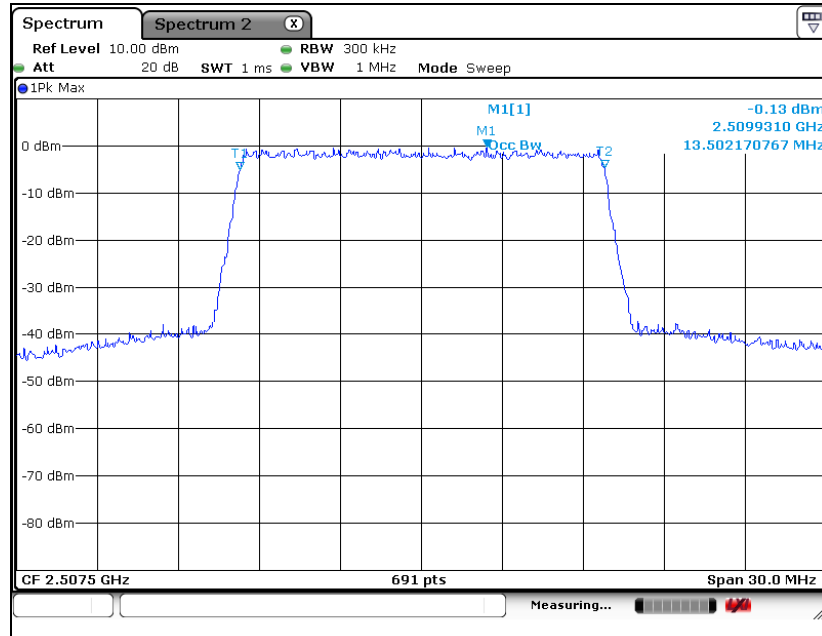


Middle Channel

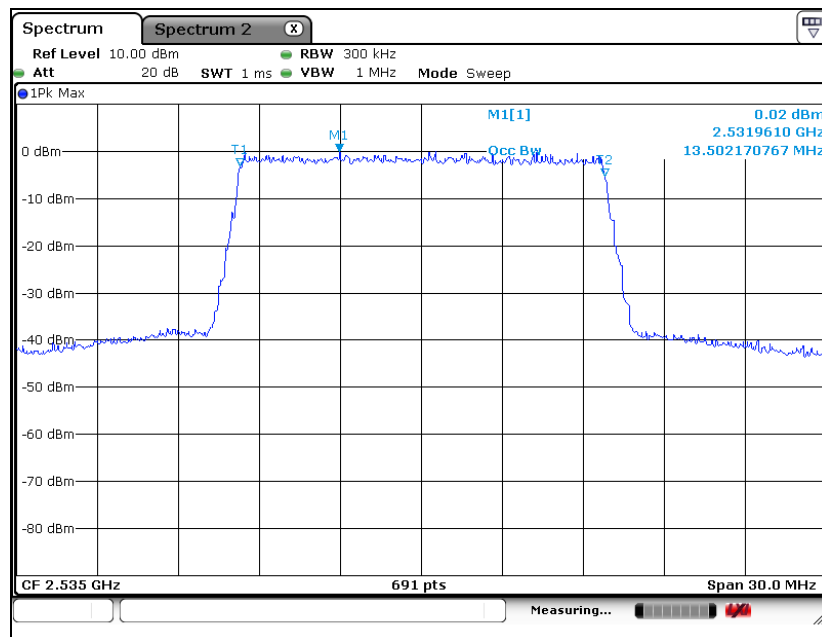


The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company. This test report does not assure KOLAS accreditation.

High Channel

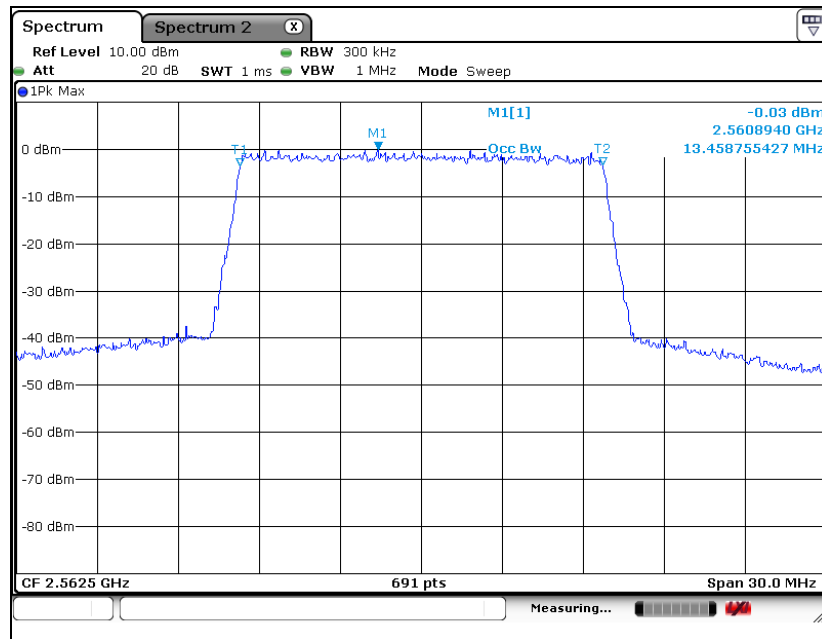


LTE band 7 (15 MHz - 16QAM)

Low Channel

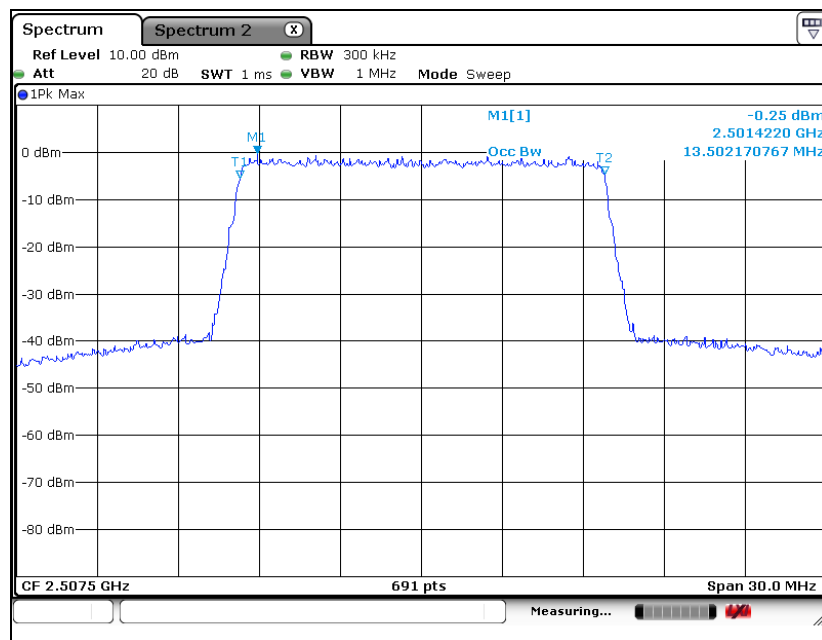


The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company. This test report does not assure KOLAS accreditation.

Middle Channel

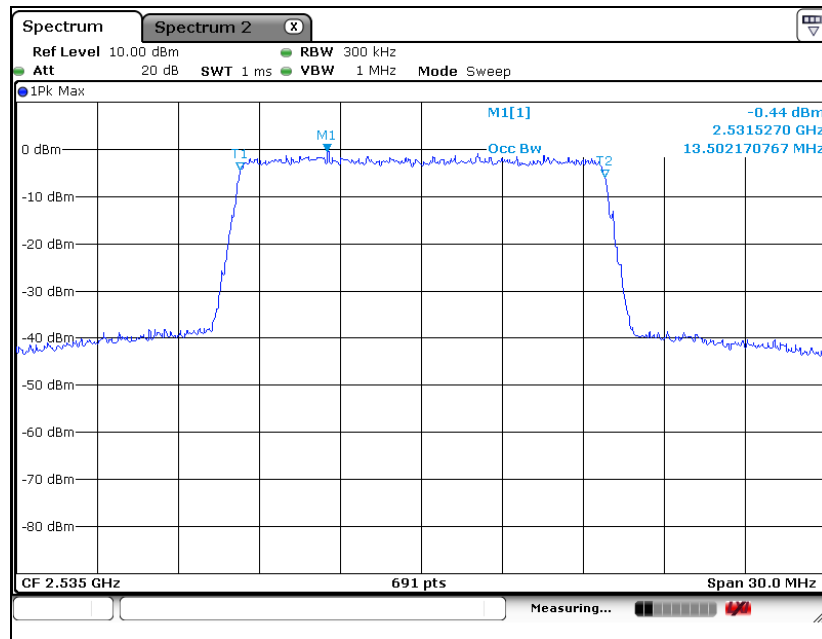


High Channel

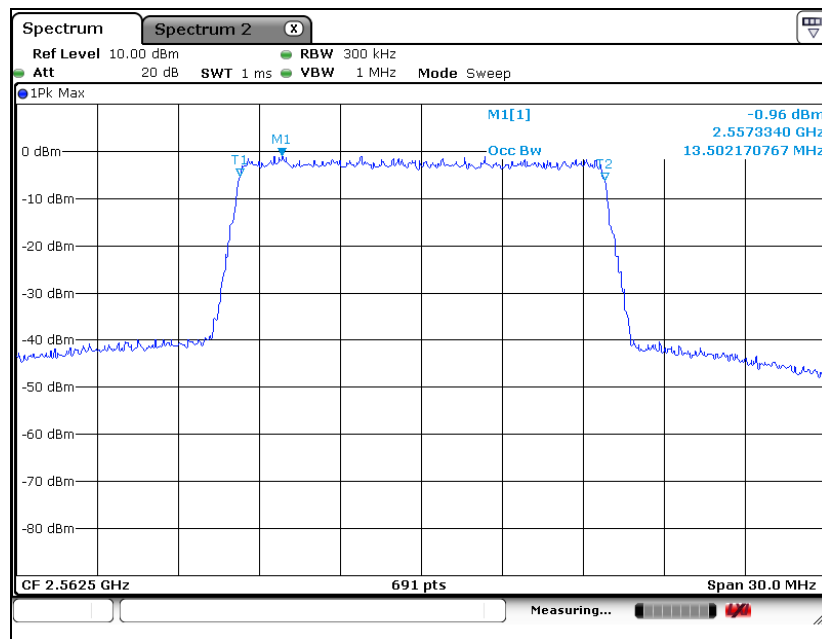


The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company. This test report does not assure KOLAS accreditation.

LTE band 7 (20 MHz - QPSK)

Low Channel

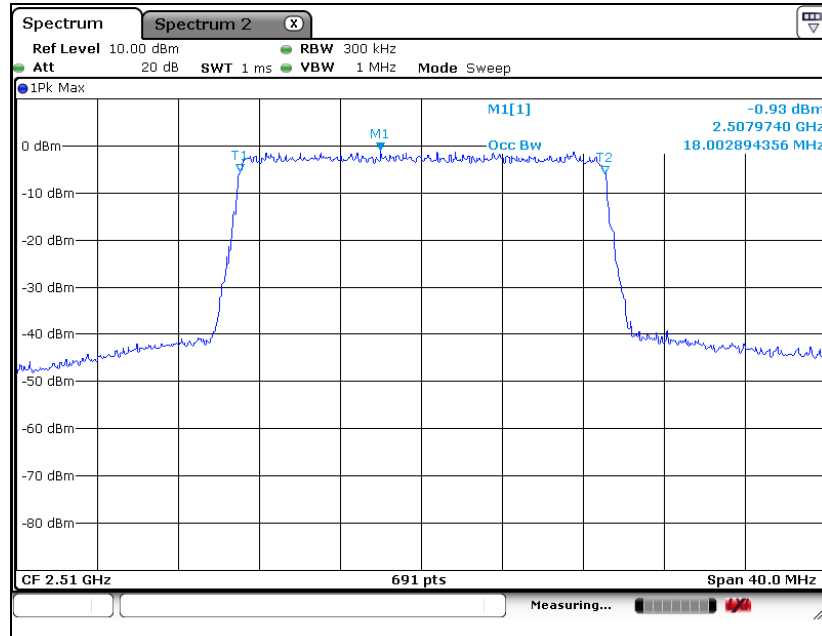


Middle Channel

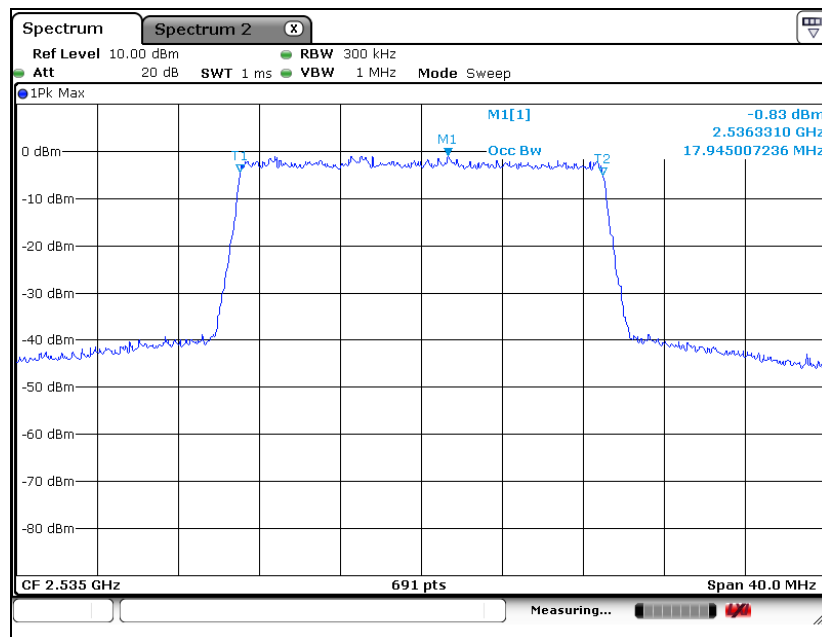


The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company. This test report does not assure KOLAS accreditation.

High Channel

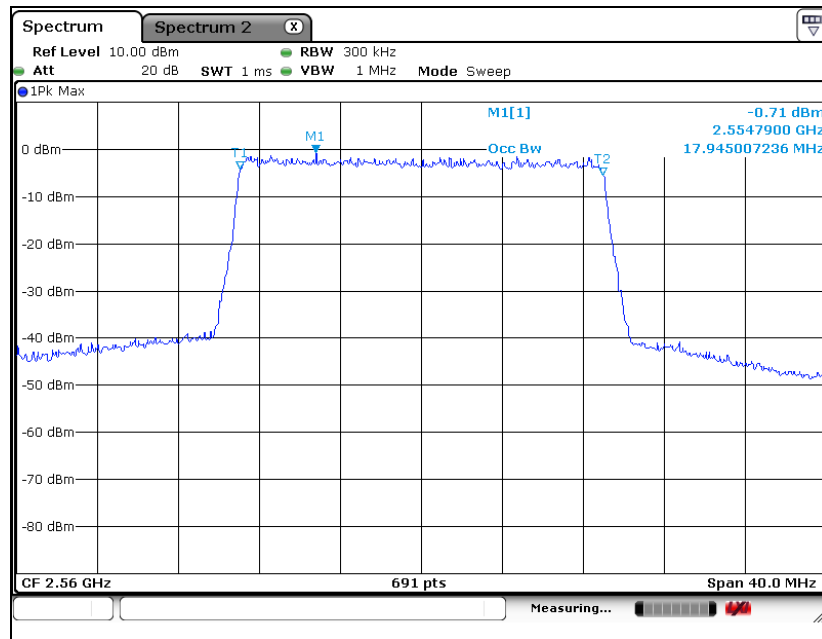


LTE band 7 (20 MHz - 16QAM)

Low Channel

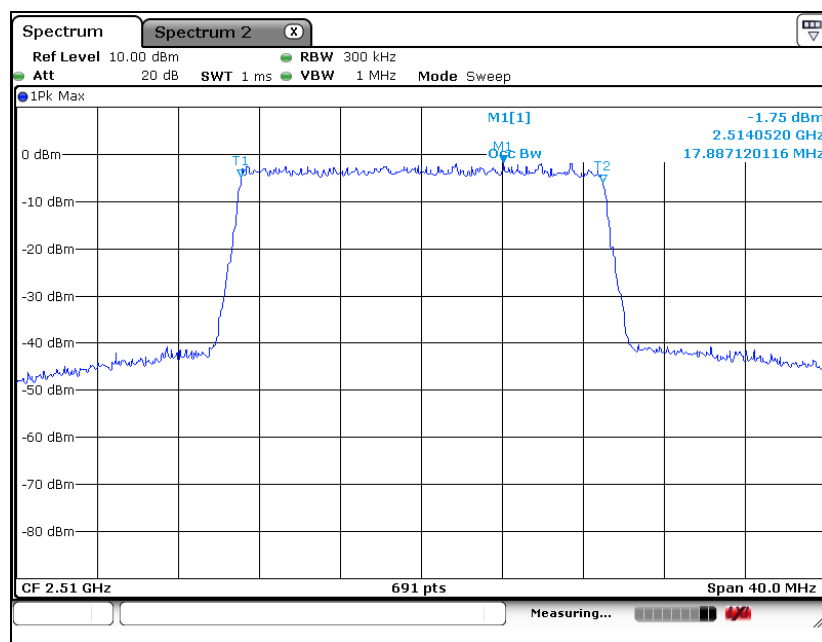


The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company. This test report does not assure KOLAS accreditation.

Middle Channel

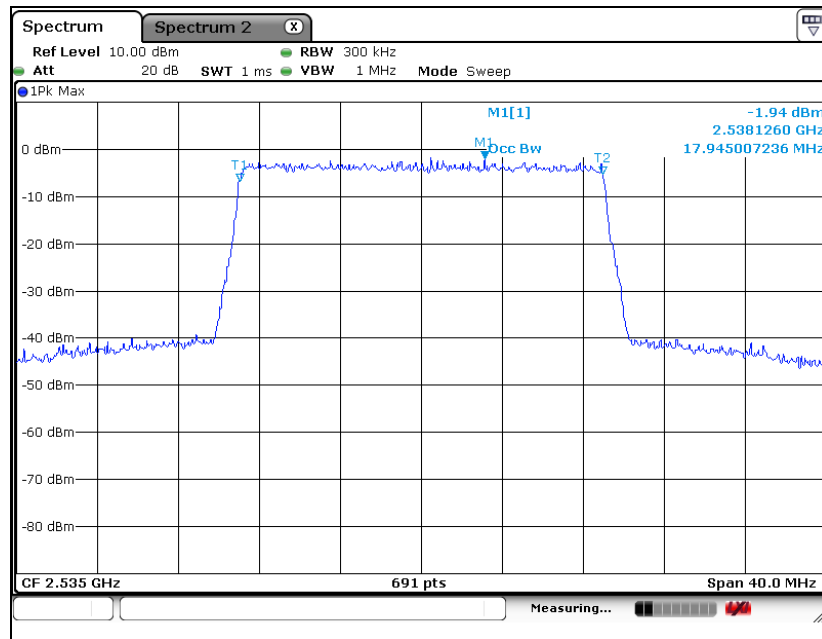


High Channel

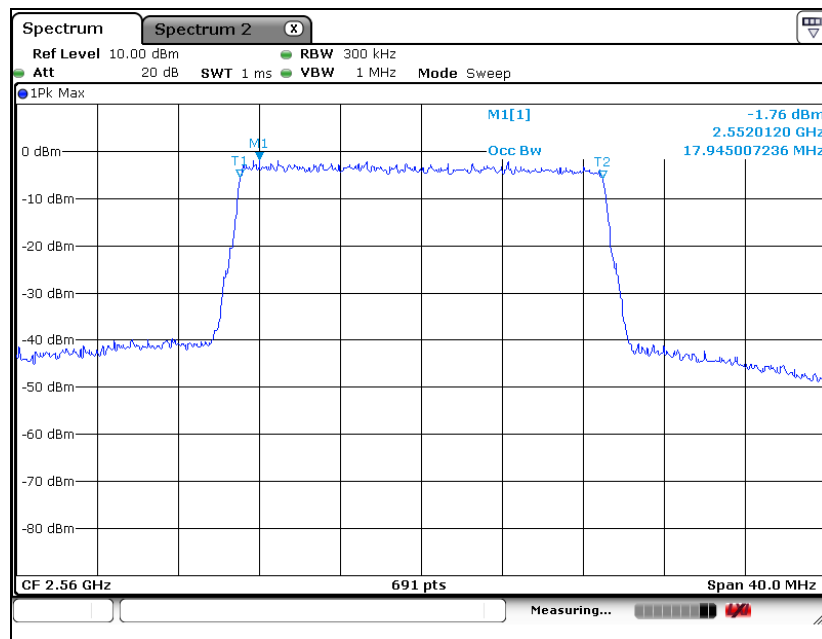


The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company. This test report does not assure KOLAS accreditation.

LTE band 26 (1.4 MHz - QPSK)

Low Channel

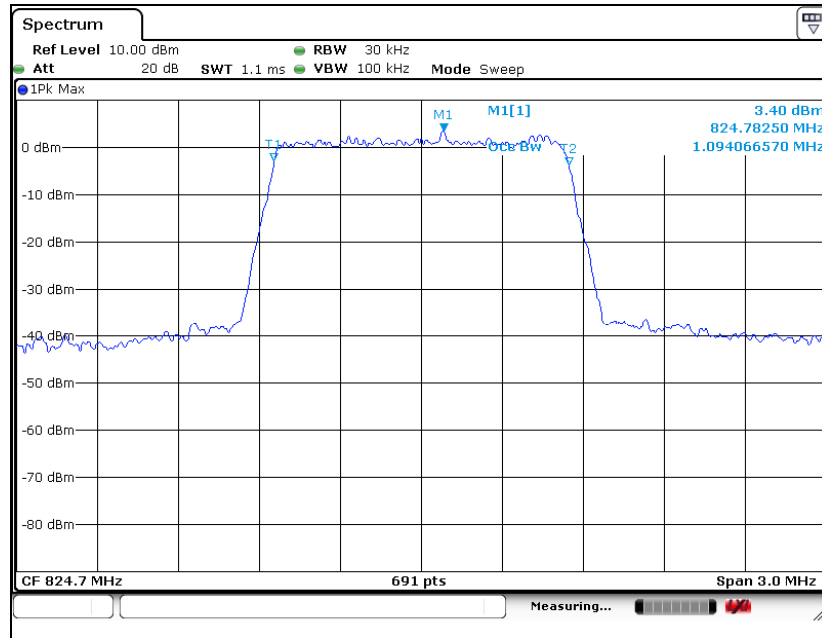


Middle Channel

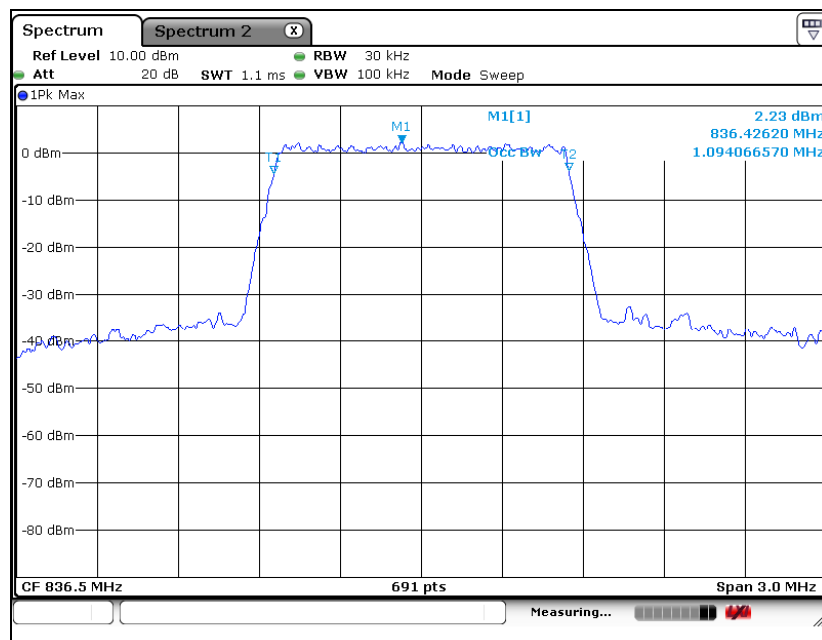


The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company. This test report does not assure KOLAS accreditation.

High Channel

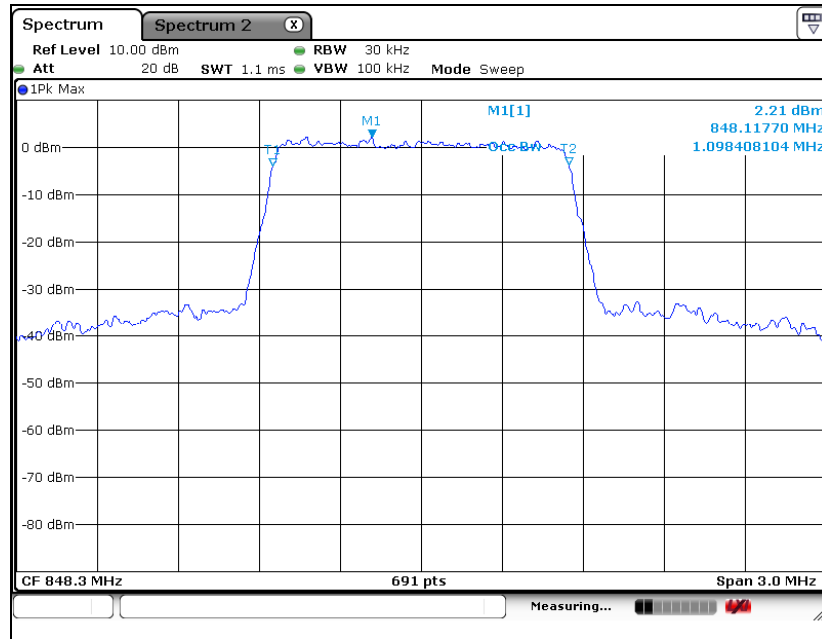


LTE band 26 (1.4 MHz - 16QAM)

Low Channel

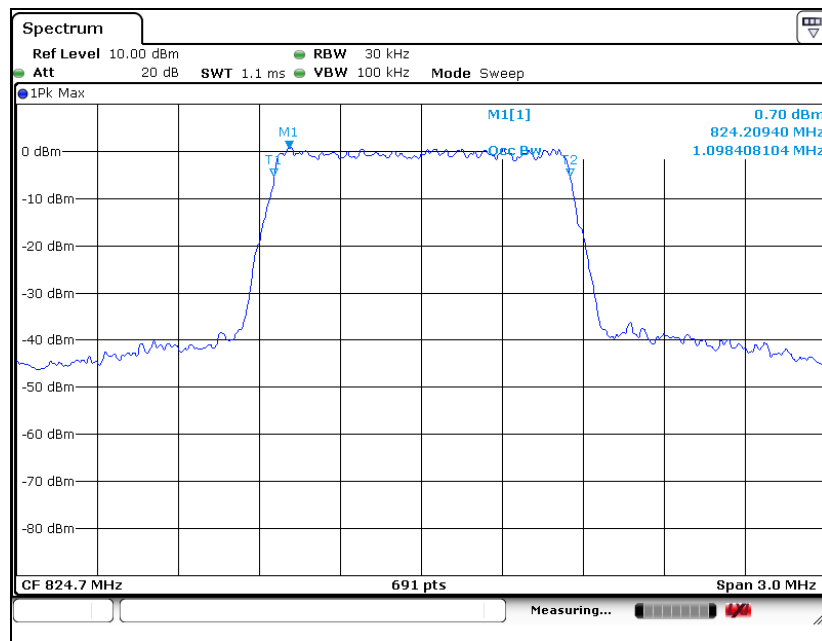


The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company. This test report does not assure KOLAS accreditation.

Middle Channel

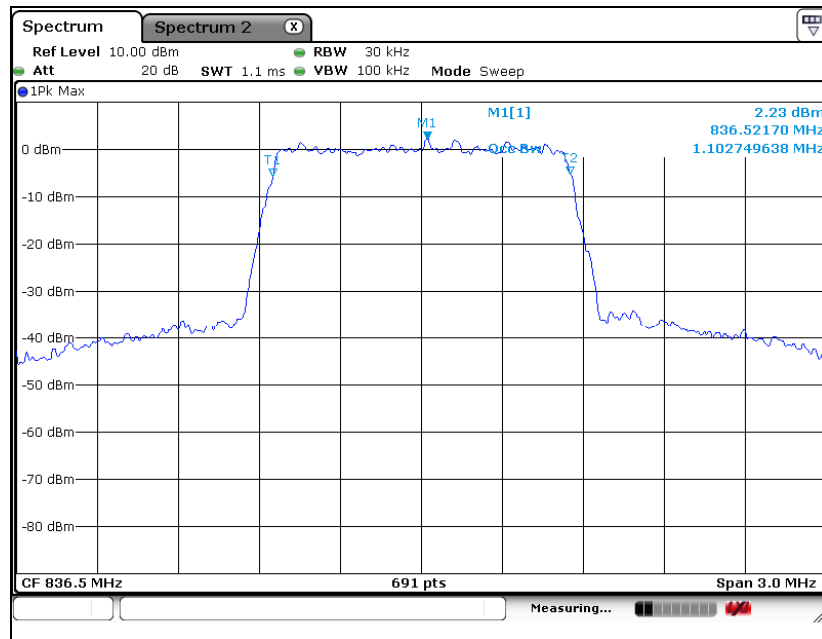


High Channel

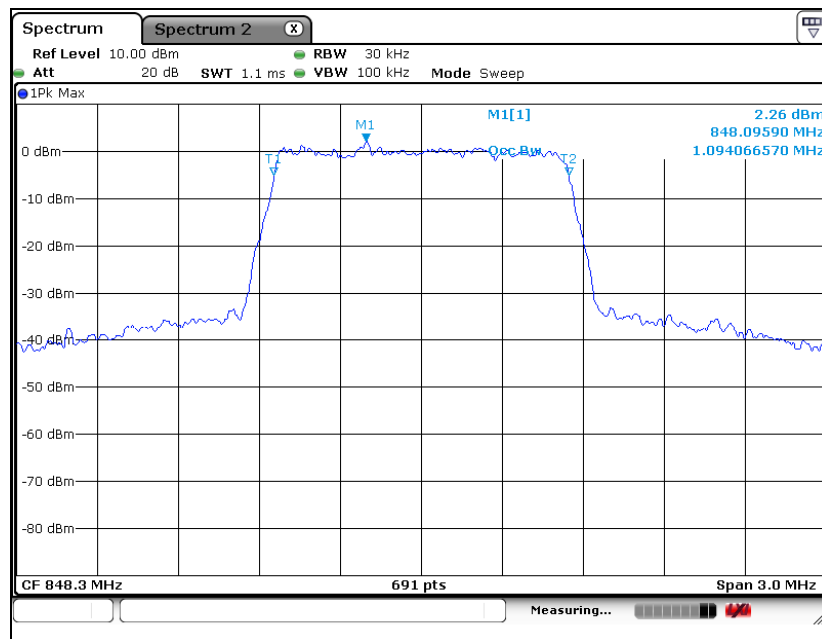


The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company. This test report does not assure KOLAS accreditation.

LTE band 26 (3 MHz - QPSK)

Low Channel

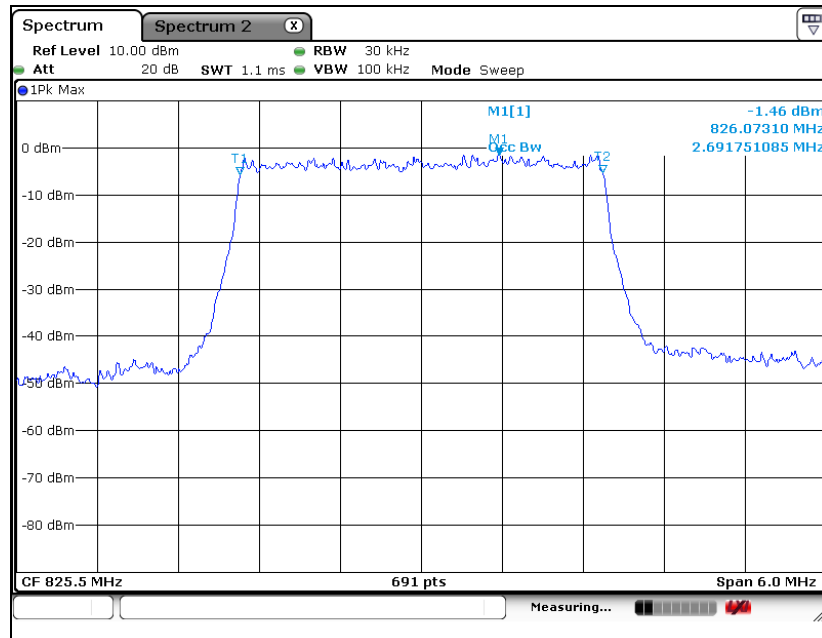


Middle Channel

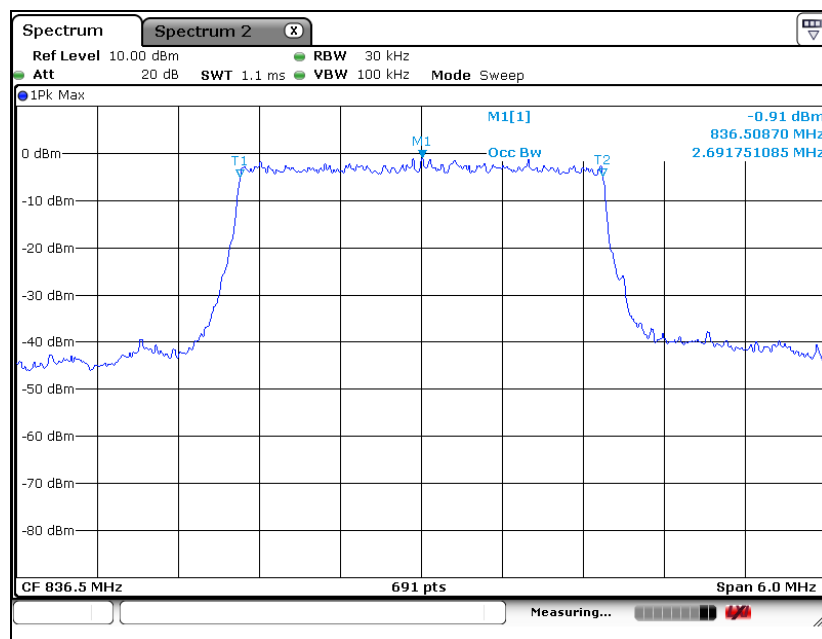


The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company. This test report does not assure KOLAS accreditation.

High Channel

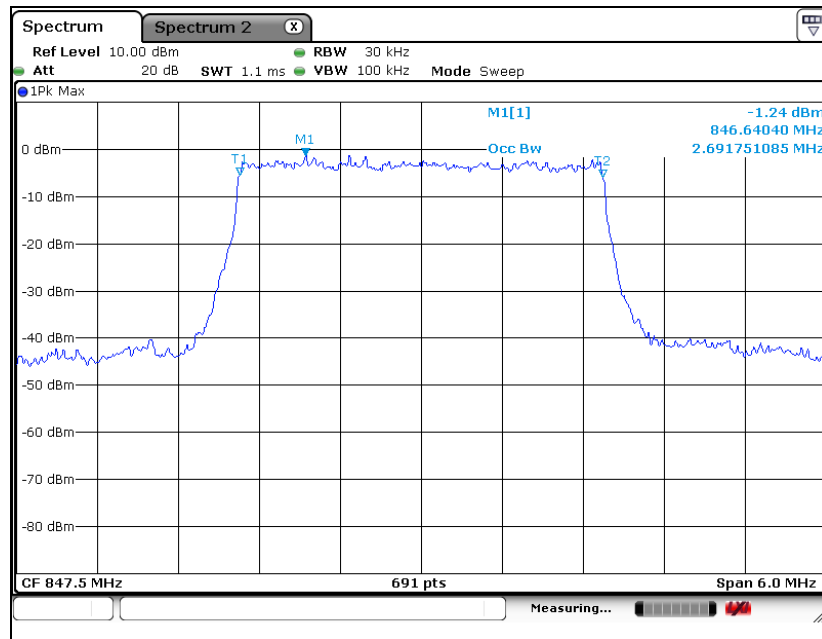


LTE band 26 (3 MHz - 16QAM)

Low Channel

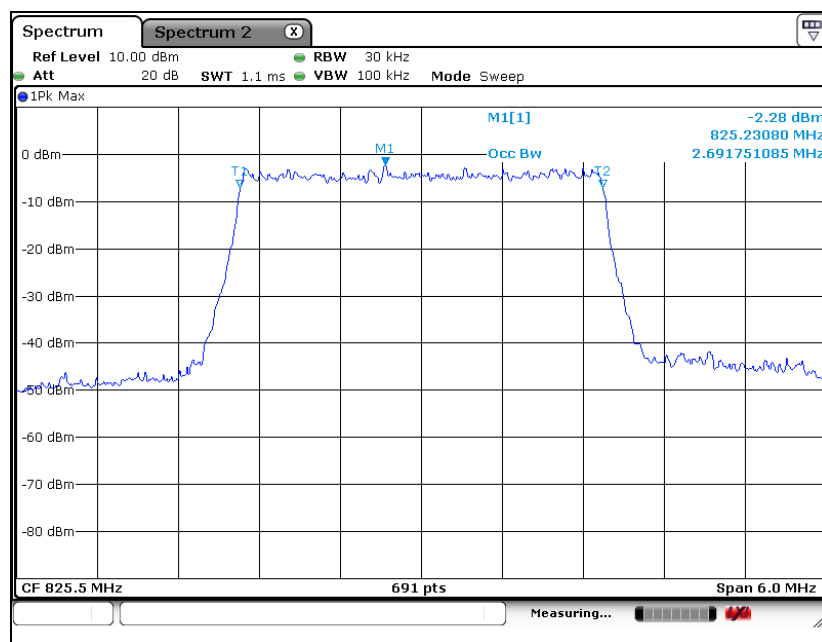


The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company. This test report does not assure KOLAS accreditation.

Middle Channel

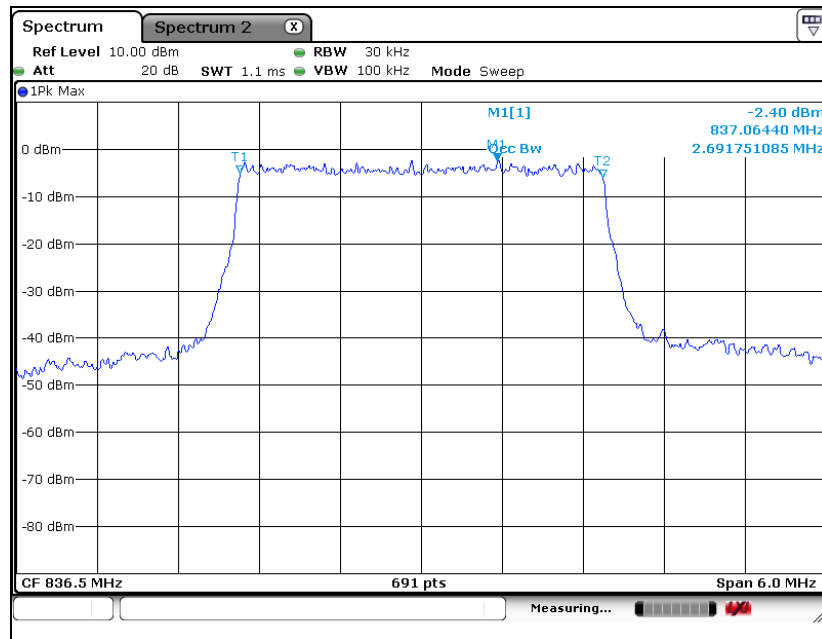


High Channel

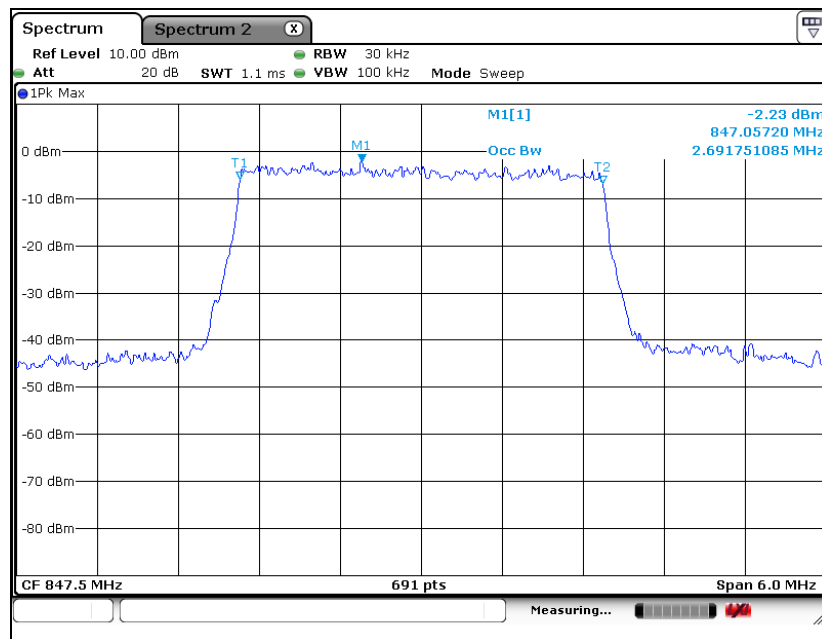


The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company. This test report does not assure KOLAS accreditation.

LTE band 26 (5 MHz - QPSK)

Low Channel

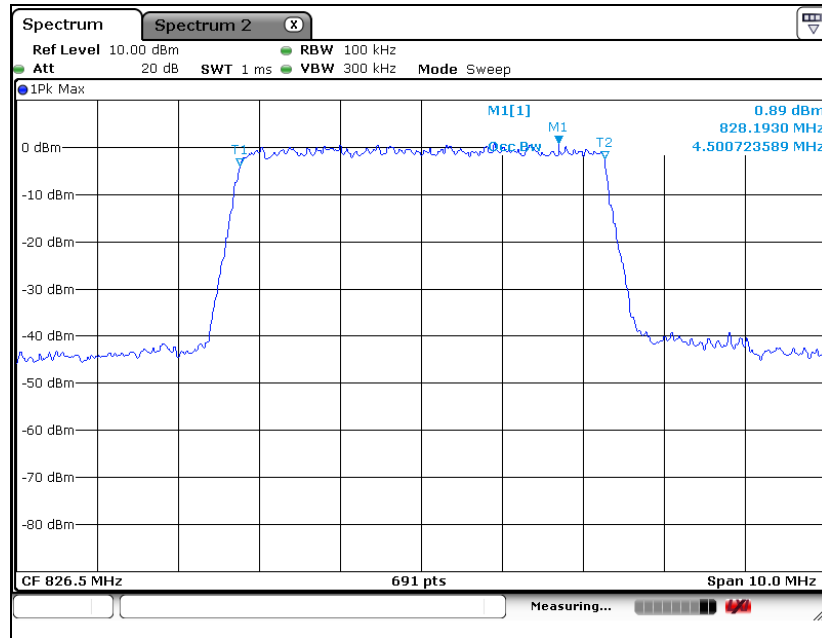


Middle Channel

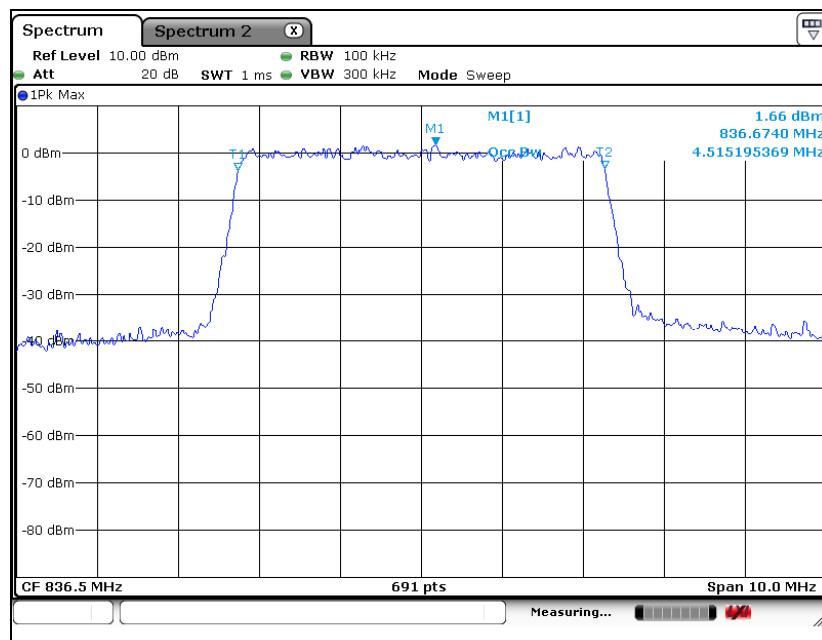


The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company. This test report does not assure KOLAS accreditation.

High Channel

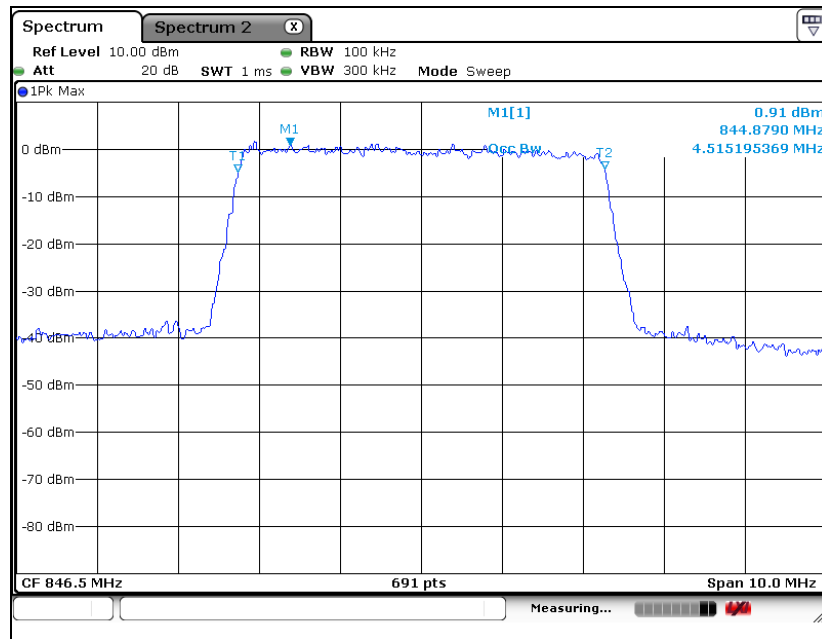


LTE band 26 (5 MHz - 16QAM)

Low Channel

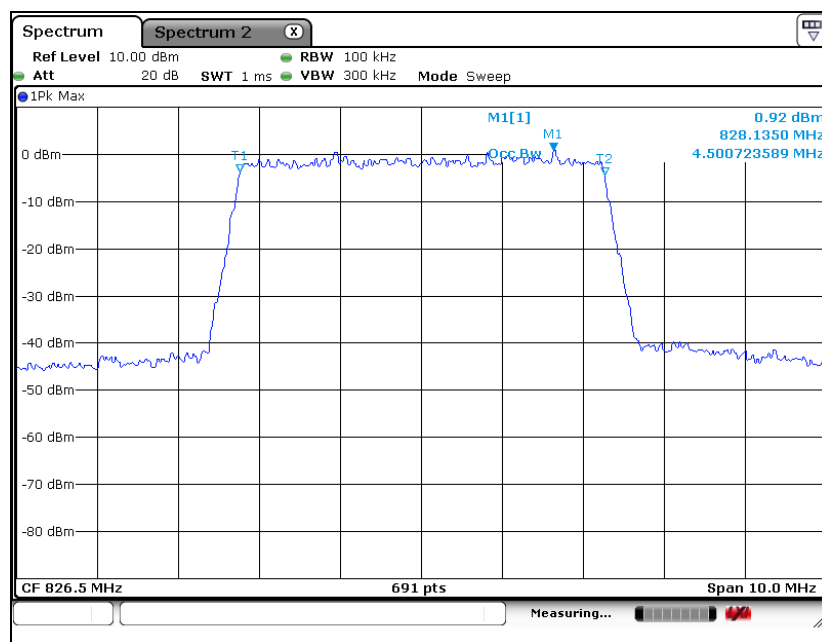


The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company. This test report does not assure KOLAS accreditation.

Middle Channel

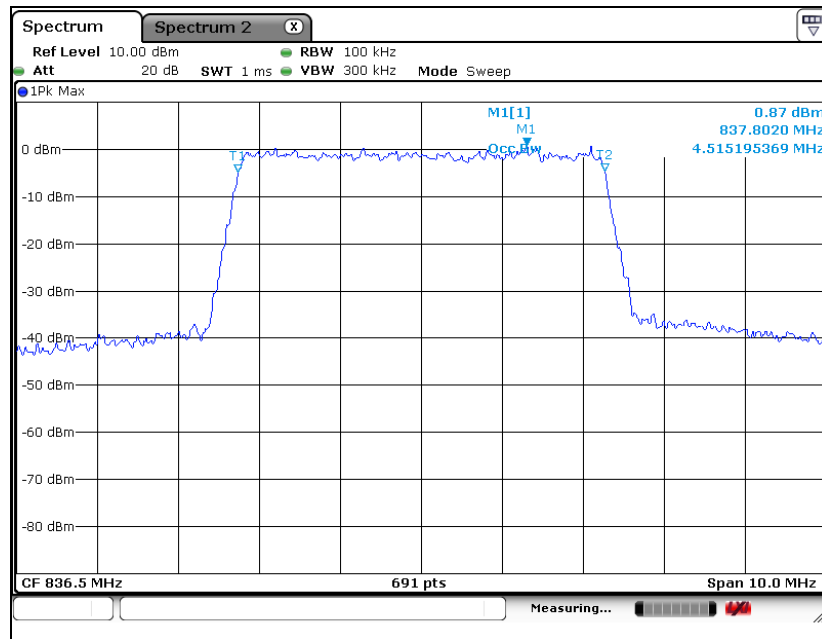


High Channel

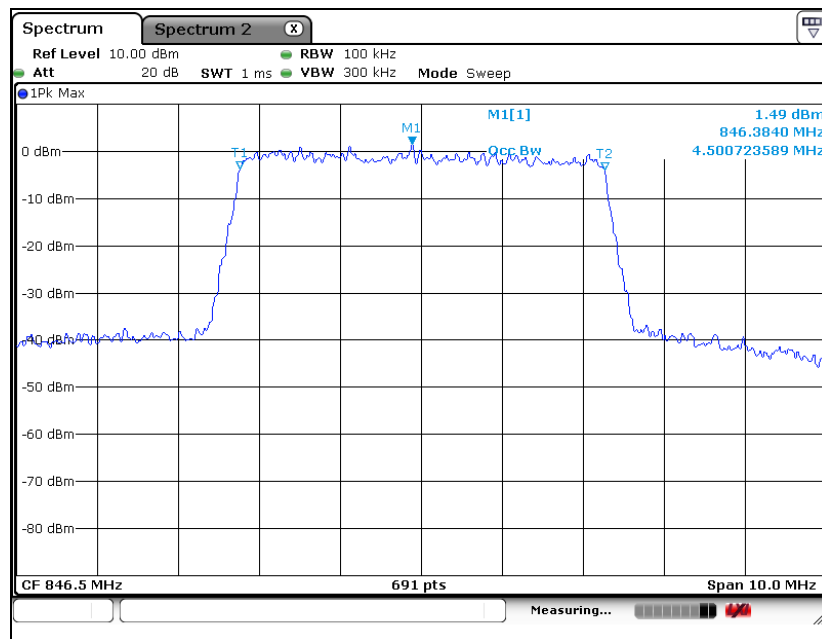


The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company. This test report does not assure KOLAS accreditation.

LTE band 26 (10 MHz - QPSK)

Low Channel

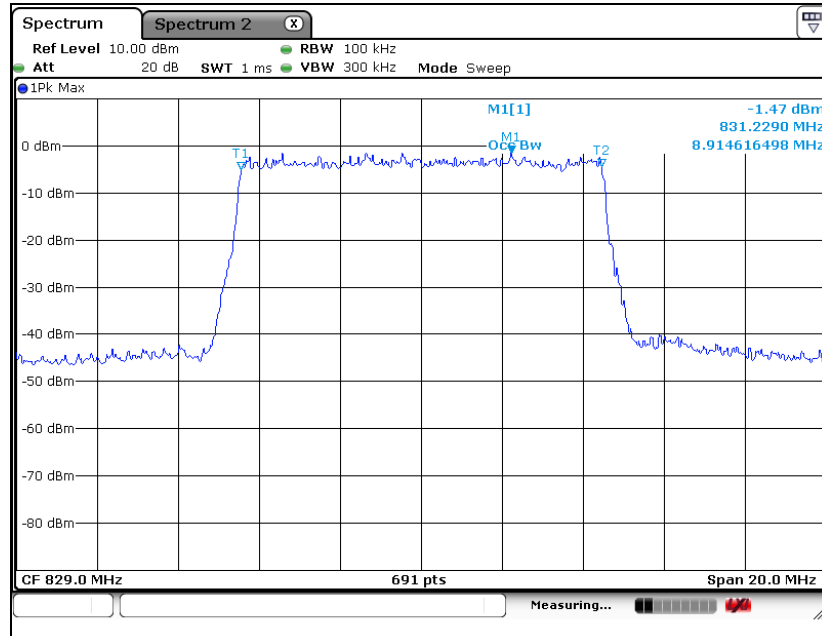


Middle Channel

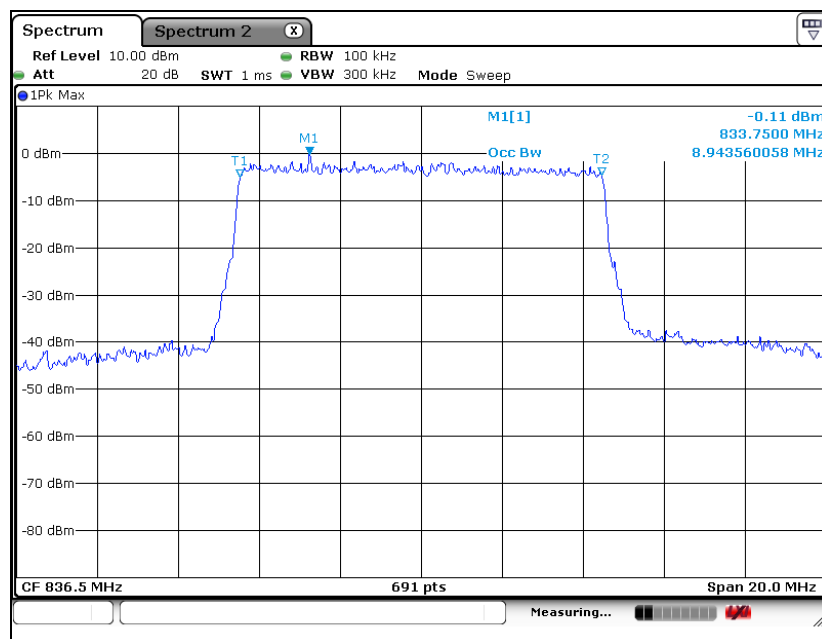


The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company. This test report does not assure KOLAS accreditation.

High Channel

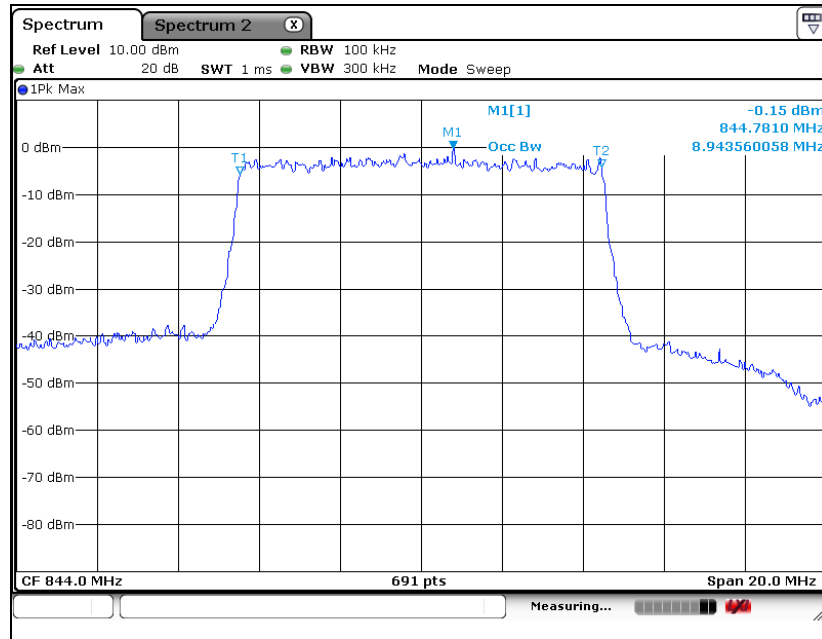


LTE band 26 (10 MHz - 16QAM)

Low Channel

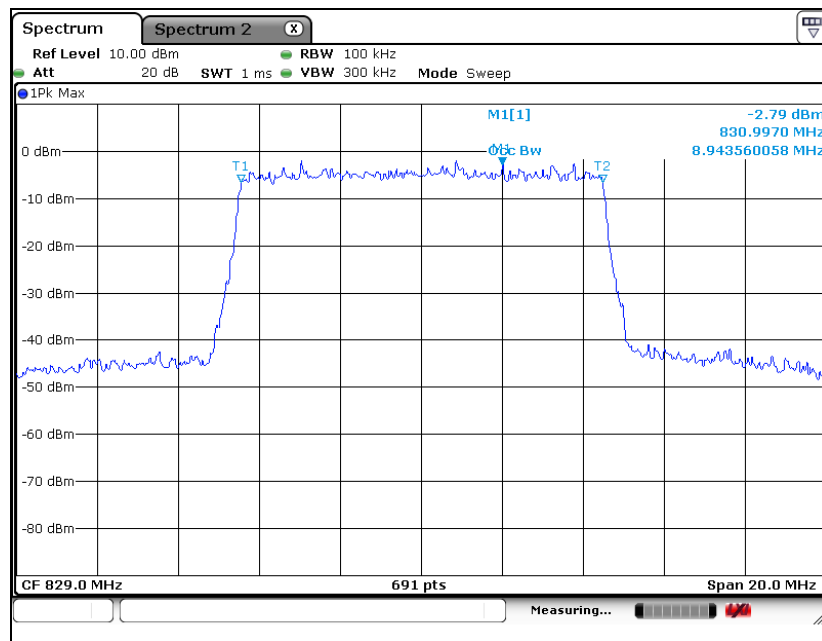


The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company. This test report does not assure KOLAS accreditation.

Middle Channel

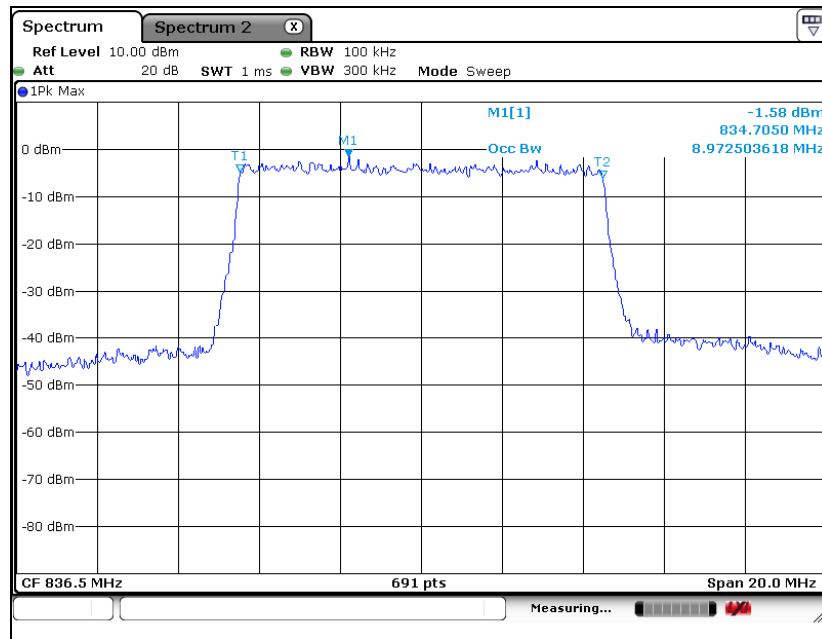


High Channel

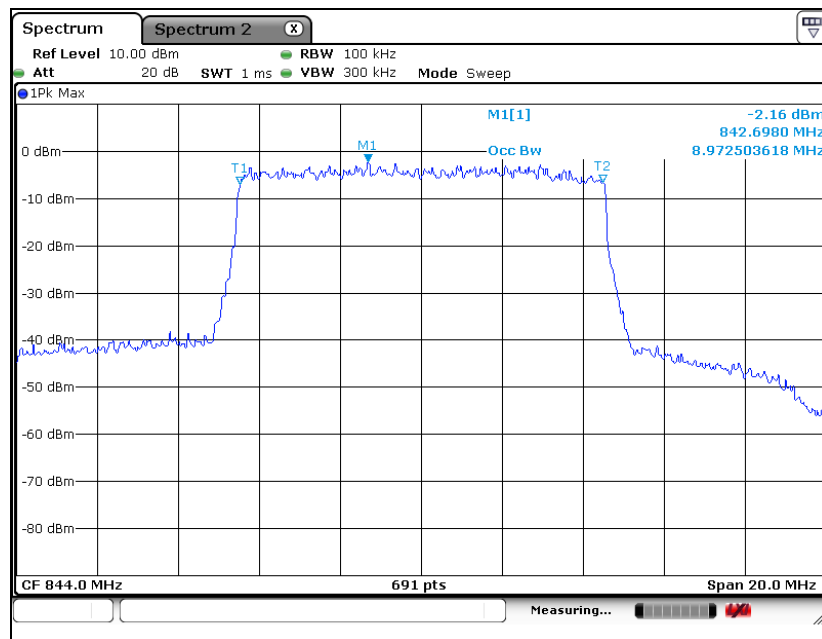


The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company. This test report does not assure KOLAS accreditation.

LTE band 26 (15 MHz - QPSK)

Low Channel

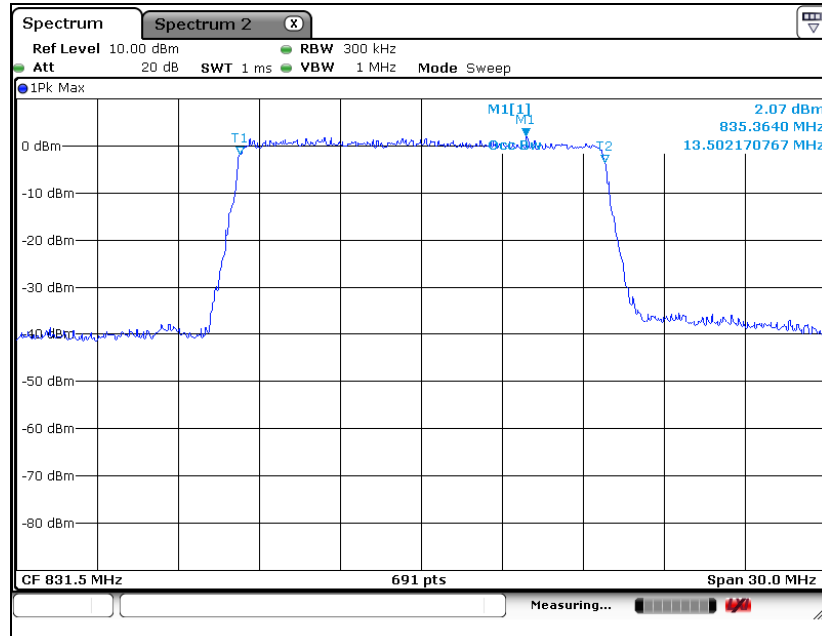


High Channel

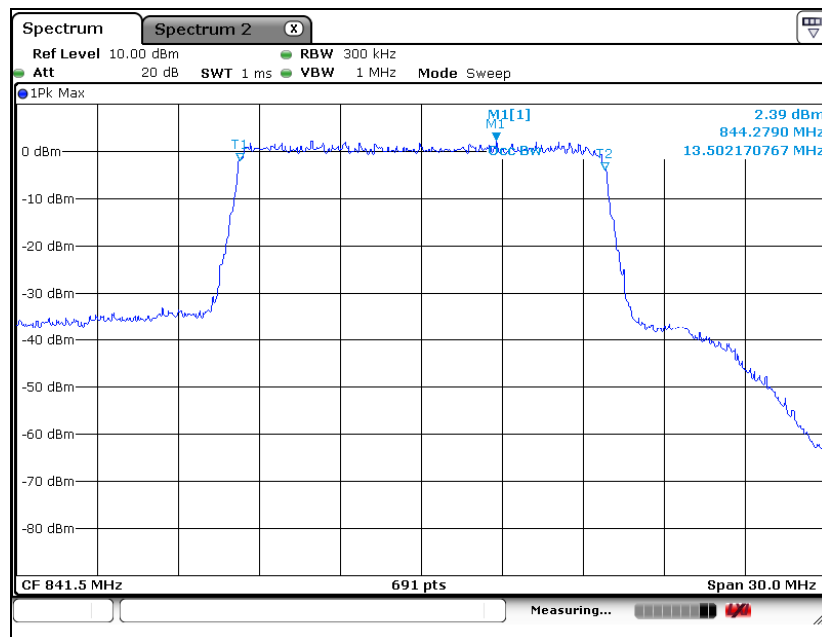


The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company. This test report does not assure KOLAS accreditation.

LTE band 26 (15 MHz - 16QAM)

Low Channel

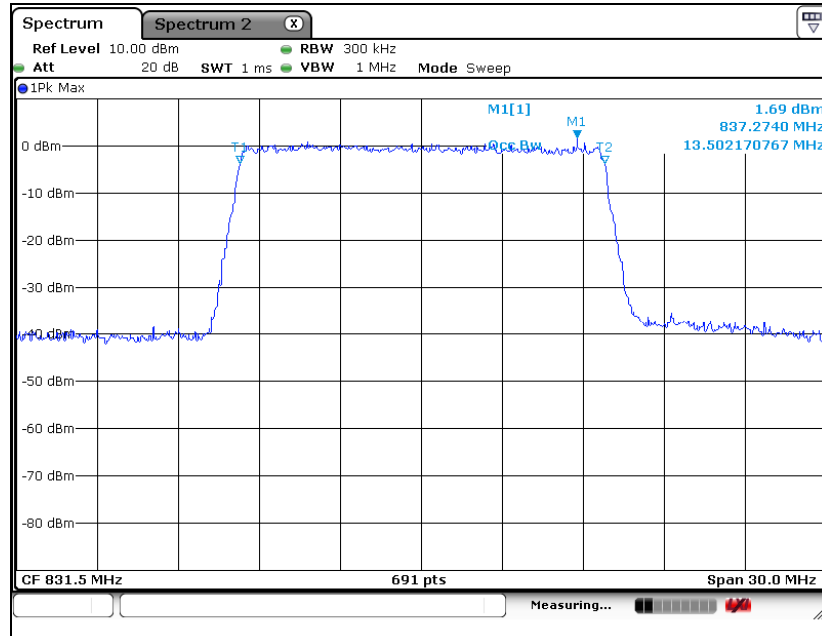

High Channel

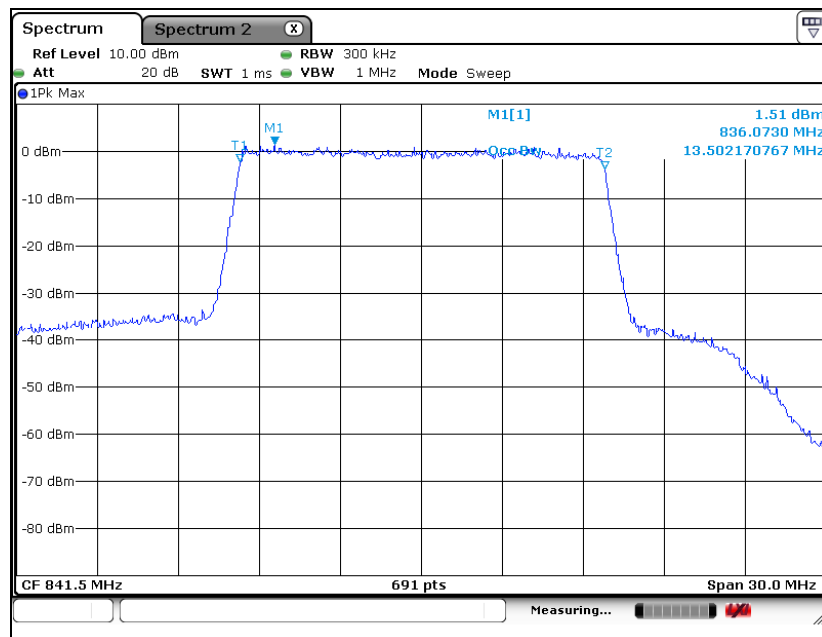

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company. This test report does not assure KOLAS accreditation.

5. Peak-Average Ratio

5.1. Limit

FCC

- §22.913(d) Measurement of the ERP of Cellular base transmitters and repeaters must be made using an average power measurement technique. The peak-to-average ratio (PAR) of the transmission must not exceed 13 dB.

- §27.50(d)(5), power measurements for transmissions by stations authorized under this section may be made either in accordance with a Commission-approved average power technique or in compliance with paragraph (d)(6) of this section. In measuring transmissions in this band using an average power technique, the peak-to-average ratio (PAR) of the transmission may not exceed 13 dB.

IC

- RSS-132 Issue 3

5.4, the peak-to-average power ratio (PAPR) of the transmitter shall not exceed 13 dB for more than 0.1 % of the time using a signal corresponding to the highest PAPR during periods of continuous transmission.

- RSS-199 Issue 3

4.4, the peak-to-average power ratio (PAPR) of the transmitter shall not exceed 13 dB for more than 0.1% of the time and shall use a signal corresponding to the highest PAPR during periods of continuous transmission.


The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company. This test report does not assure KOLAS accreditation.

5.2. Test Procedure

The test follows section 5.7.2 of FCC KDB Publication 971168 D01 v03r01.

See instrumentation-specific application literature for further guidance regarding use of the CCDF capability. The following guidelines are offered for performing a CCDF measurement.

- a. Set resolution/measurement bandwidth \geq OBW or specified reference bandwidth.
- b. Set the number of counts to a value that stabilizes the measured CCDF curve.
- c. Set the measurement interval as follows:
 - 1) For continuous transmissions, set to greater of $[10 \times (\text{number of points in sweep}) \times (\text{transmission symbol period})]$ or 1 ms.
 - 2) For burst transmissions, employ an external trigger that is synchronized with the EUT burst timing sequence, or use the internal burst trigger with a trigger level that allows the burst to stabilize. Set the measurement interval to a time that is less than or equal to the burst duration.
 - 3) If there are several carriers in a single antenna port, the peak power shall be determined for each individual carrier (by disabling the other carriers while measuring the required carrier) and the total peak power calculated from the sum of the individual carrier peak powers.
- d. Record the maximum PAPR level associated with a probability of 0.1 %.
- e. The peak power level is calculated from the sum of the PAPR value from step d) to the measured average power.

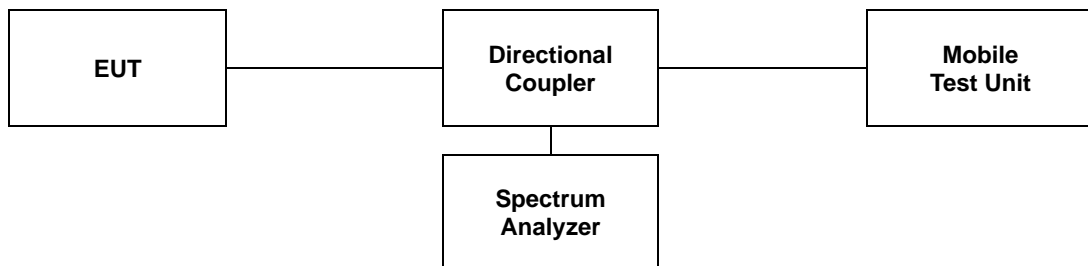

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company. This test report does not assure KOLAS accreditation.

5.3 Test Results

Ambient temperature : (23 ± 1) °C
Relative humidity : 47 % R.H.

Band	Mode	Frequency (MHz)	PAR (dB)
5 (1.4 MHz)	QPSK	824.7	5.07
		836.5	4.67
		848.3	4.38
5 (3 MHz)	QPSK	825.5	4.78
		836.5	4.58
		847.5	4.38
5 (5 MHz)	QPSK	826.5	4.84
		836.5	4.72
		846.5	4.61
5 (10 MHz)	QPSK	829.0	4.78
		836.5	4.61
		844.0	4.72

LTE Band	Mode	Frequency (MHz)	PAR (dB)
7 (5 MHz)	QPSK	2 502.5	4.99
		2 535.0	5.01
		2 567.5	5.10
7 (10 MHz)	QPSK	2 505.0	4.81
		2 535.0	4.93
		2 565.0	4.87
7 (15 MHz)	QPSK	2 507.5	5.16
		2 535.0	5.33
		2 562.5	5.33
7 (20 MHz)	QPSK	2 510.0	4.90
		2 535.0	5.04
		2 560.0	5.07


The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company. This test report does not assure KOLAS accreditation.

Band	Mode	Frequency (MHz)	PAR (dB)
26 (1.4 MHz)	QPSK	824.7	4.87
		836.5	4.43
		848.3	4.55
26 (3 MHz)	QPSK	825.5	4.67
		836.5	4.38
		847.5	4.32
26 (5 MHz)	QPSK	826.5	4.64
		836.5	4.41
		846.5	4.52
26 (10 MHz)	QPSK	829.0	4.58
		836.5	4.46
		844.0	4.58
26 (15 MHz)	QPSK	831.5	4.81
		841.5	4.93


The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company. This test report does not assure KOLAS accreditation.

LTE band 5 (1.4 MHz - QPSK)

Low Channel

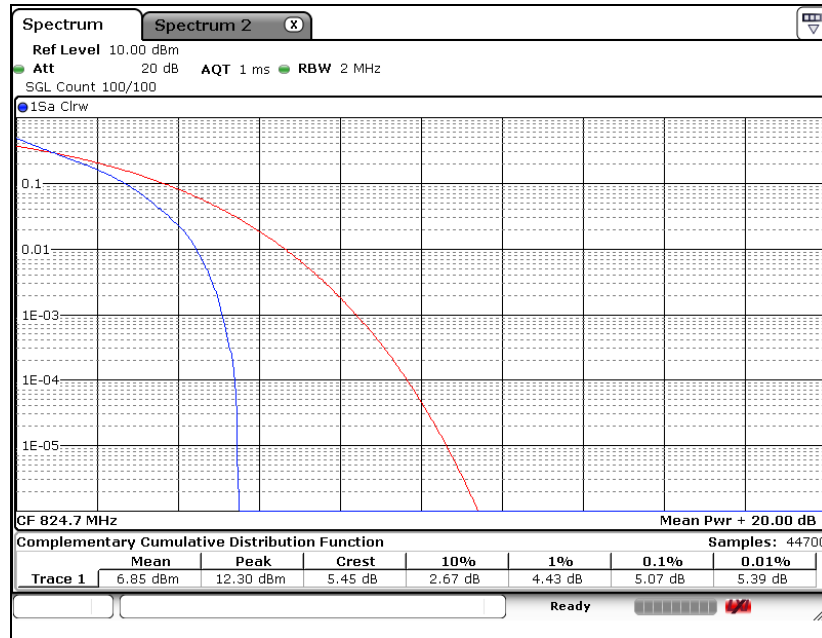


Middle Channel

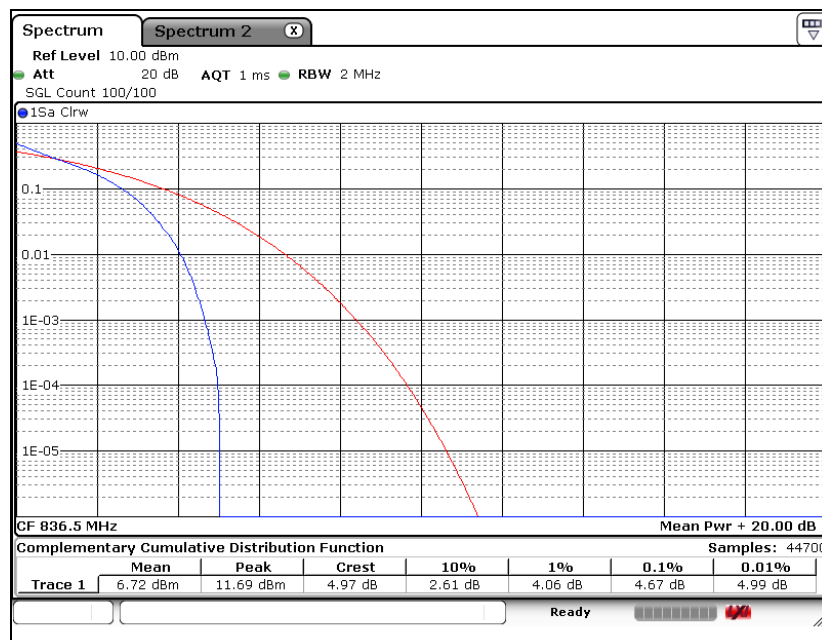


The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company. This test report does not assure KOLAS accreditation.

High Channel

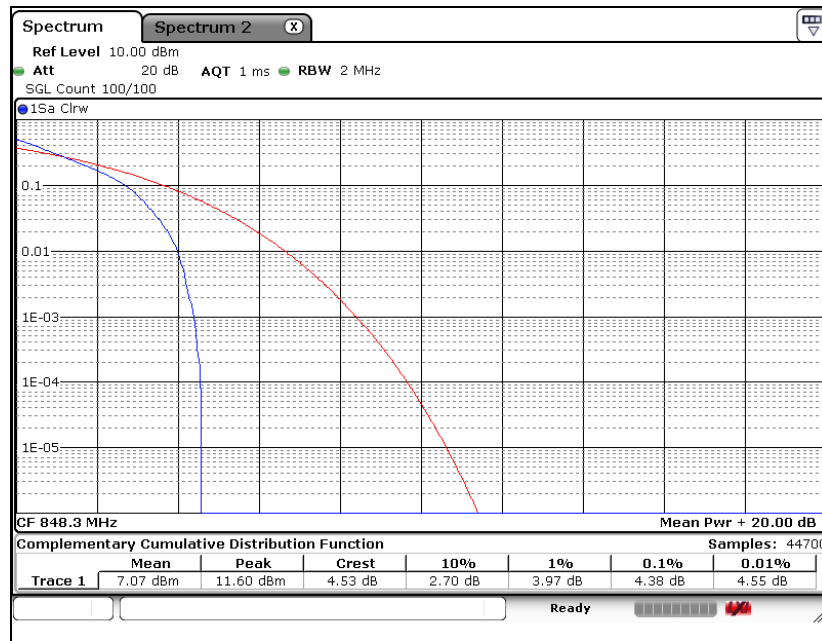


LTE band 5 (3 MHz - QPSK)

Low Channel

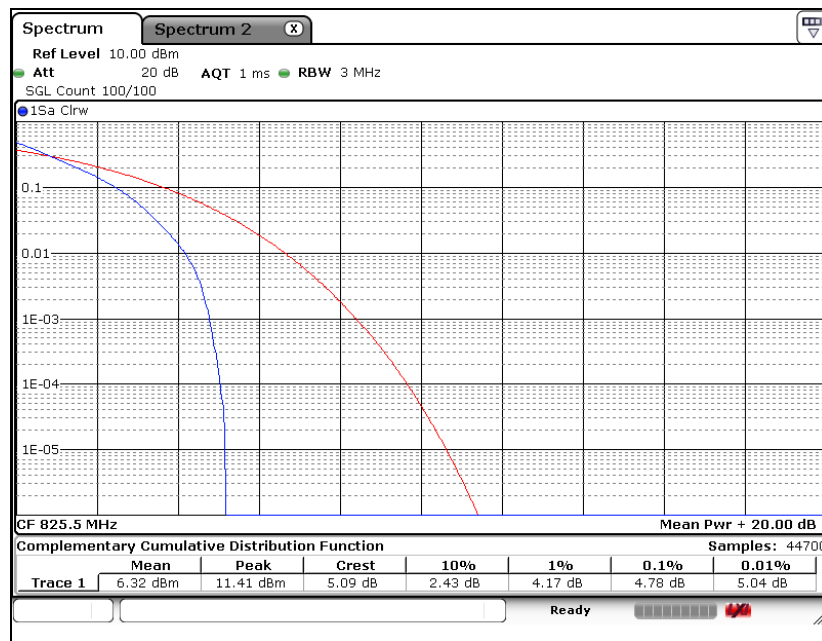


The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company. This test report does not assure KOLAS accreditation.

Middle Channel

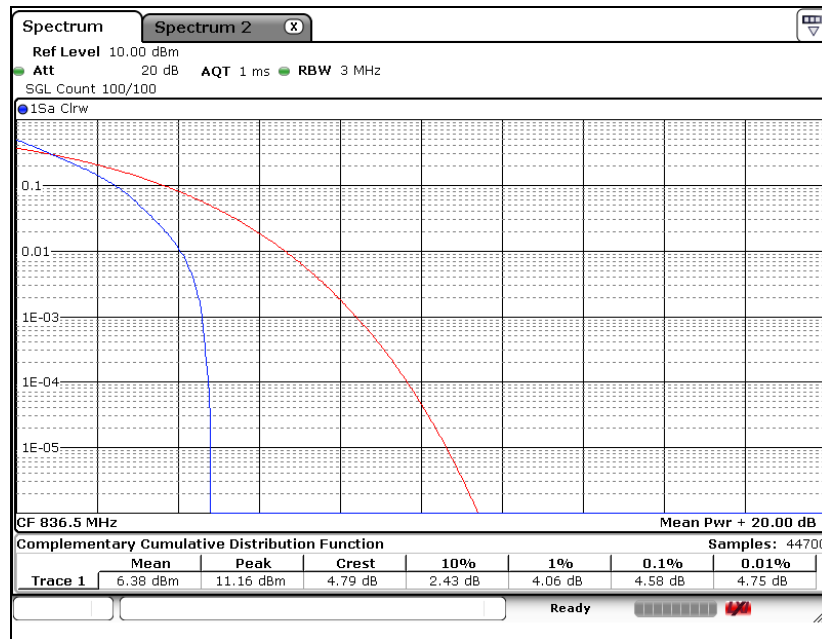


High Channel

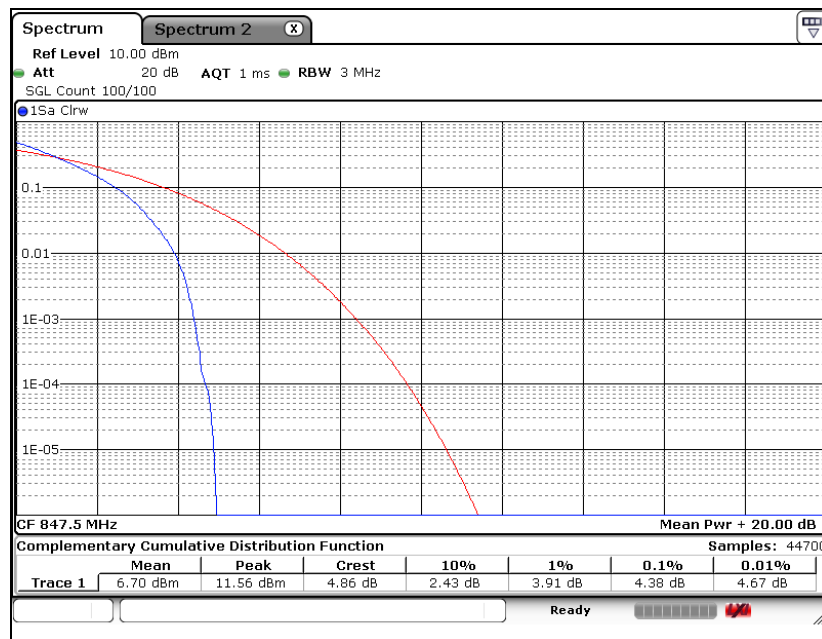


The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company. This test report does not assure KOLAS accreditation.

LTE band 5 (5 MHz - QPSK)

Low Channel

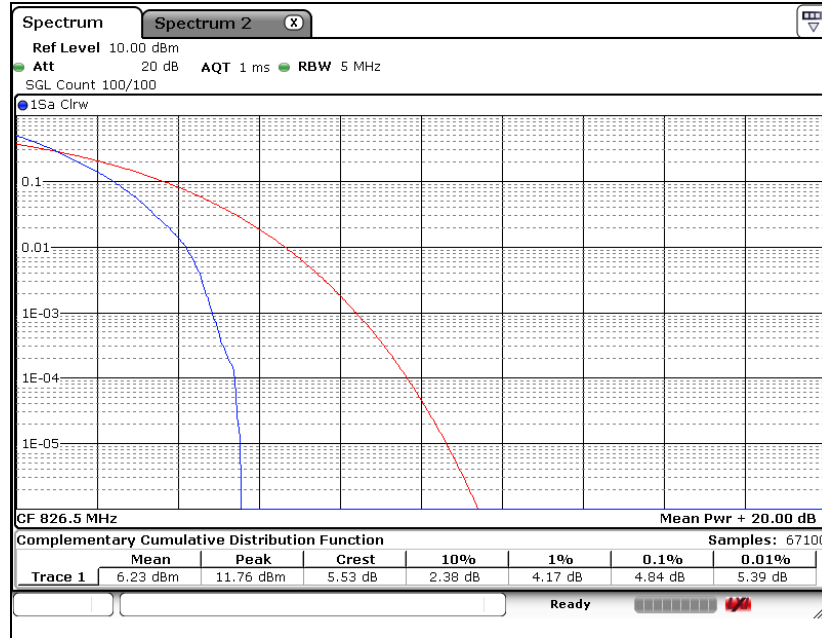


Middle Channel

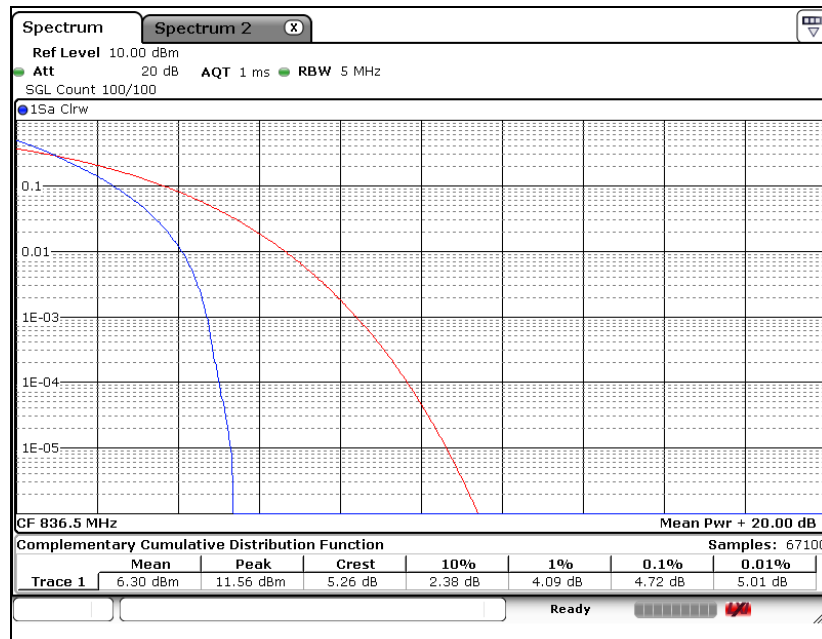


The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company. This test report does not assure KOLAS accreditation.

High Channel

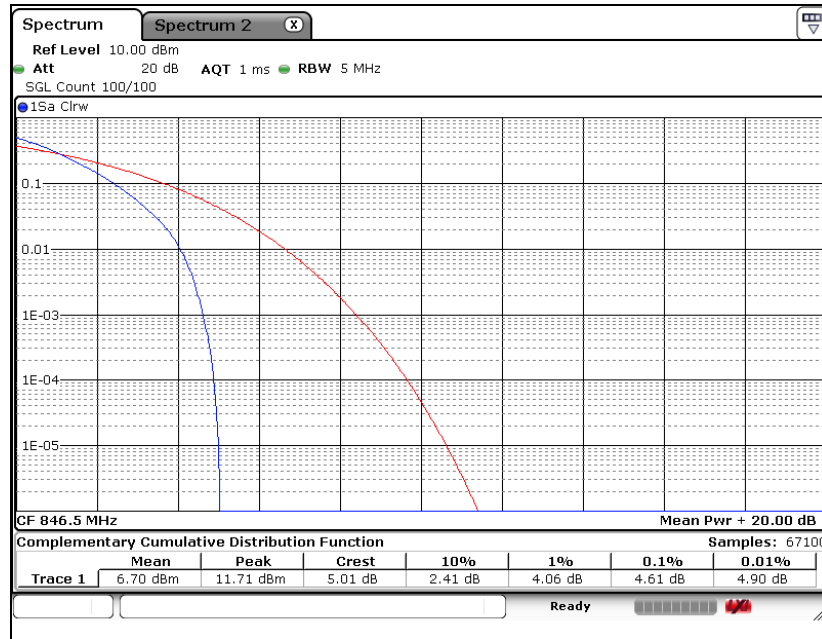


LTE band 5 (10 MHz - QPSK)

Low Channel

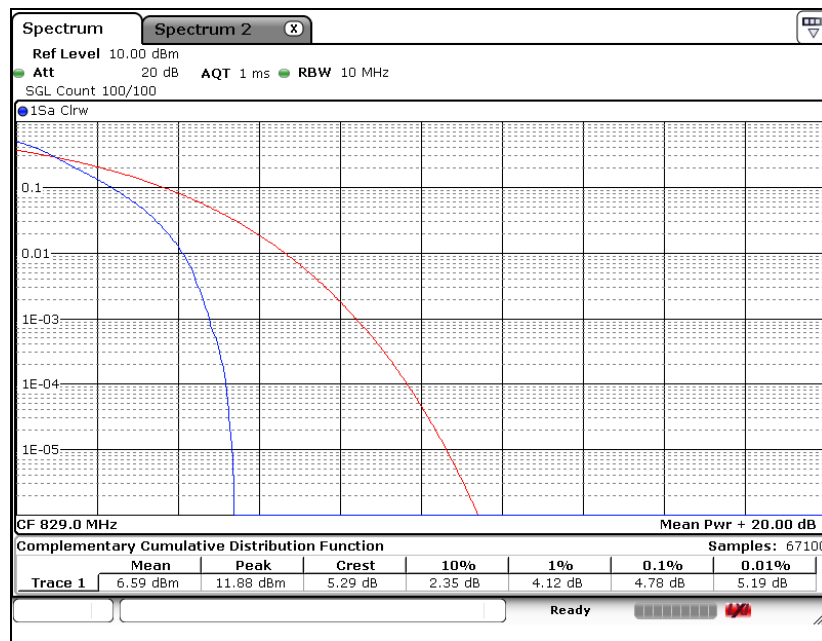


The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company. This test report does not assure KOLAS accreditation.

Middle Channel

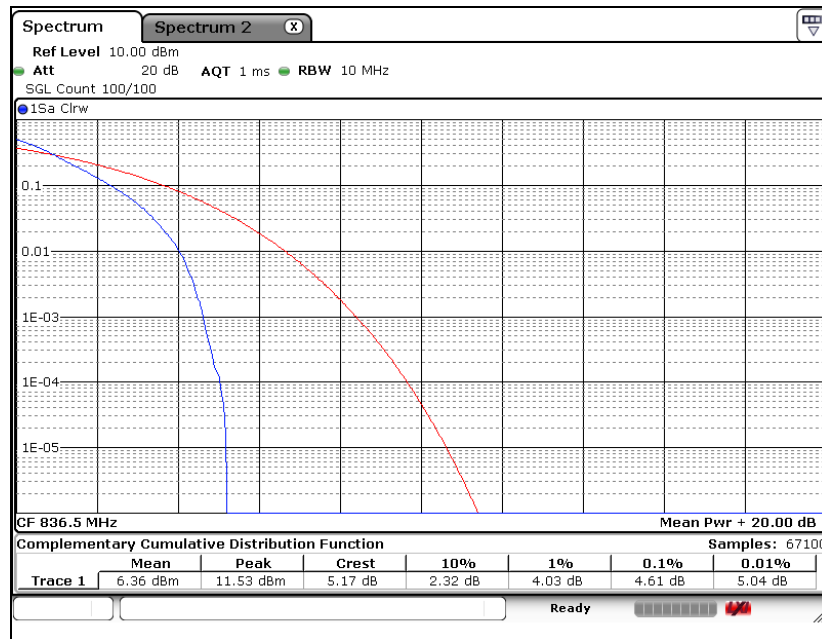


High Channel

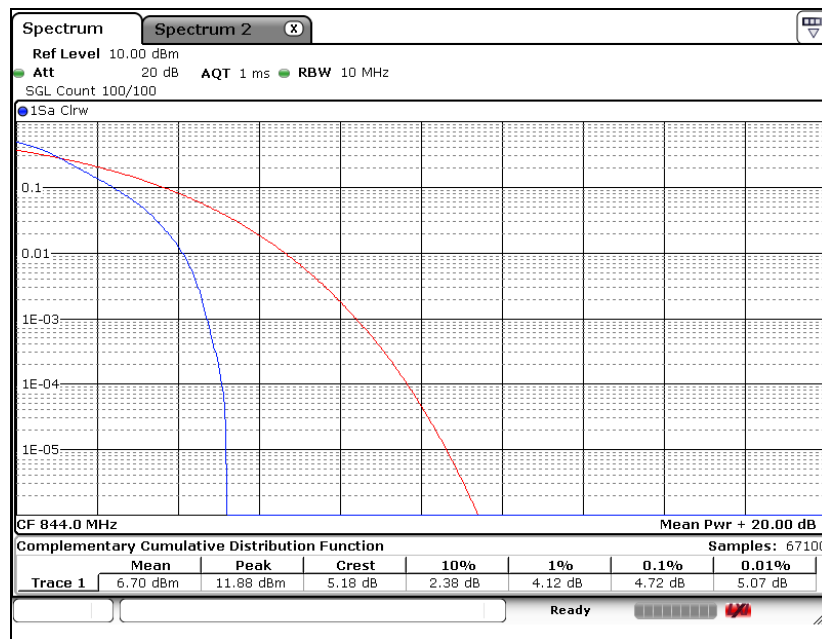


The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company. This test report does not assure KOLAS accreditation.

LTE band 7 (5 MHz - QPSK)

Low Channel

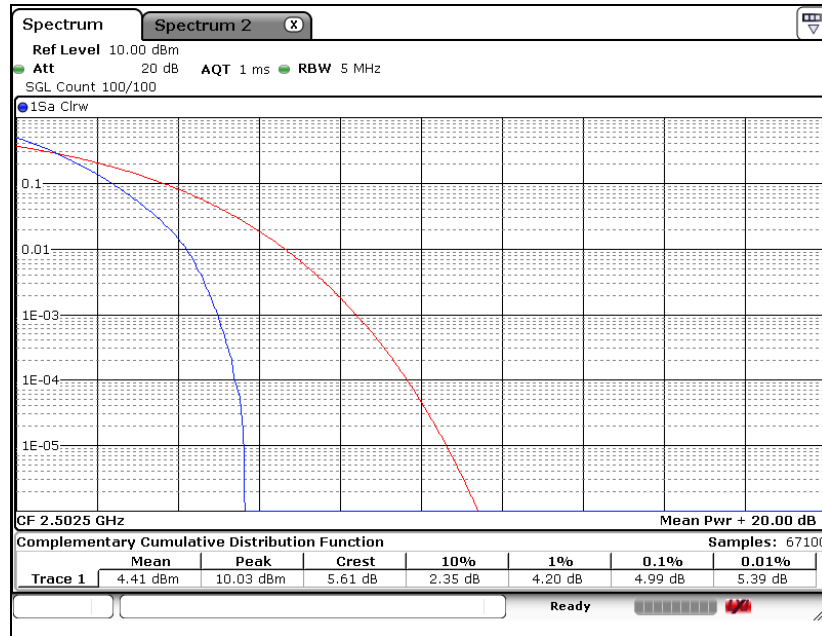


Middle Channel

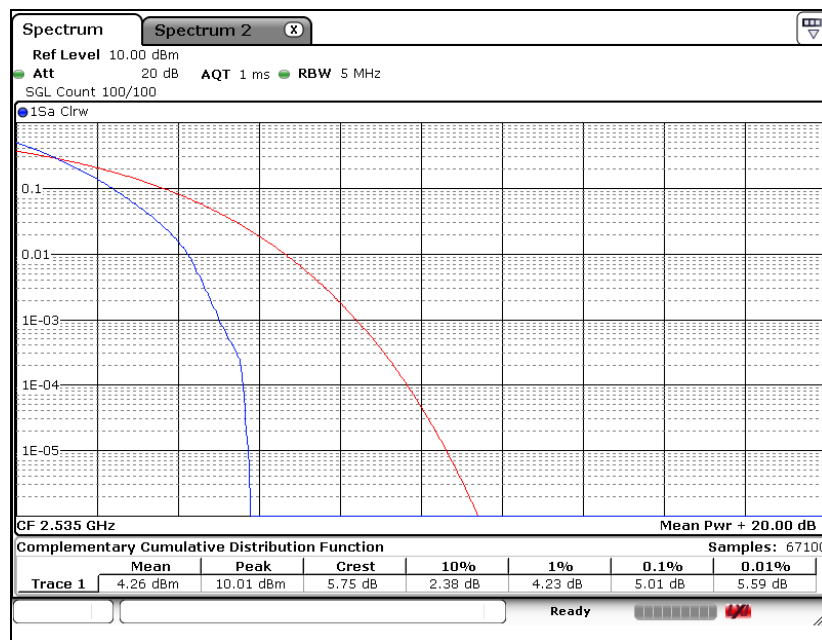


The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company. This test report does not assure KOLAS accreditation.

High Channel

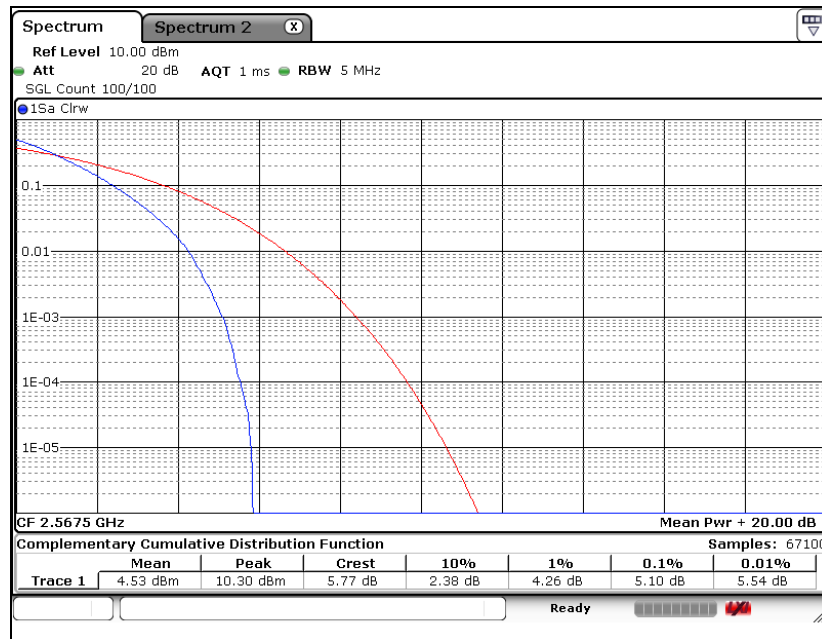


LTE band 7 (10 MHz - QPSK)

Low Channel

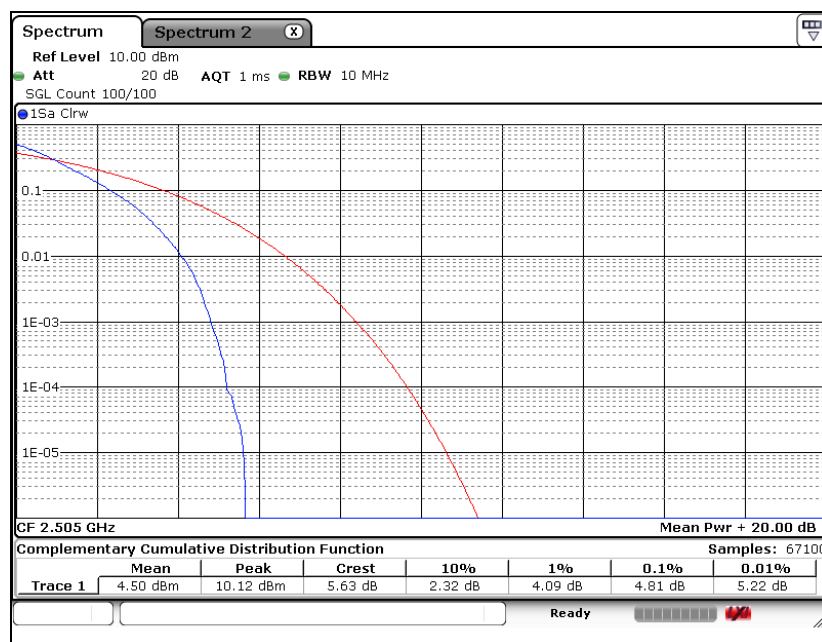


The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company. This test report does not assure KOLAS accreditation.

Middle Channel

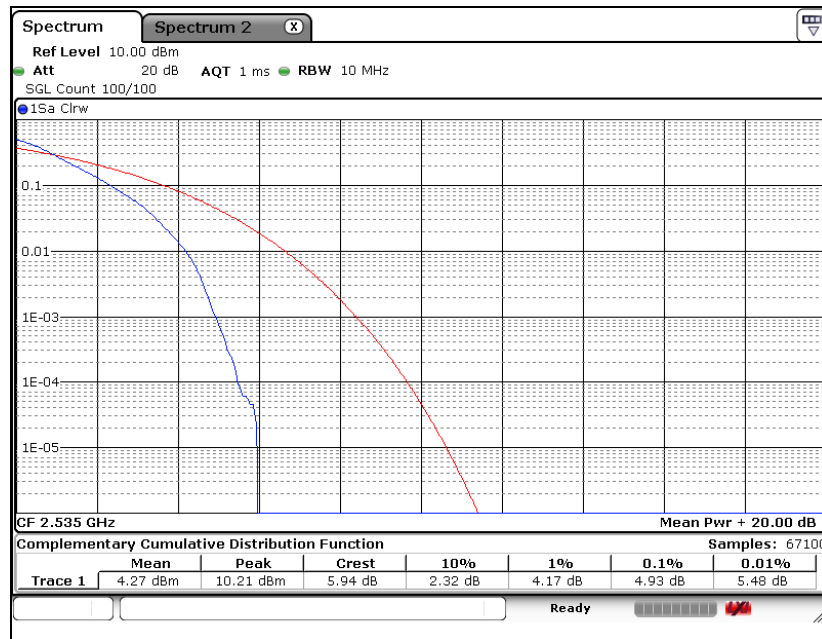


High Channel

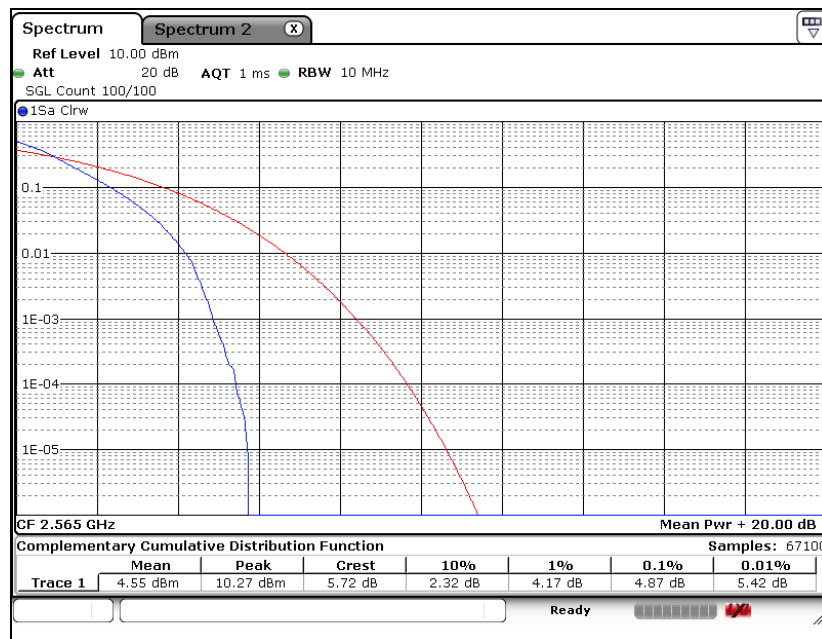


The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company. This test report does not assure KOLAS accreditation.

LTE band 7 (15 MHz - QPSK)

Low Channel

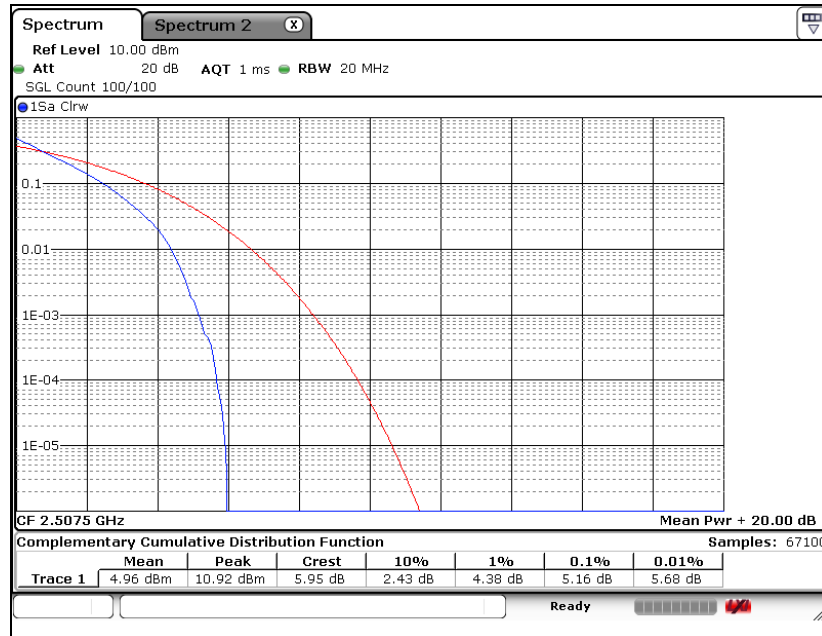


Middle Channel

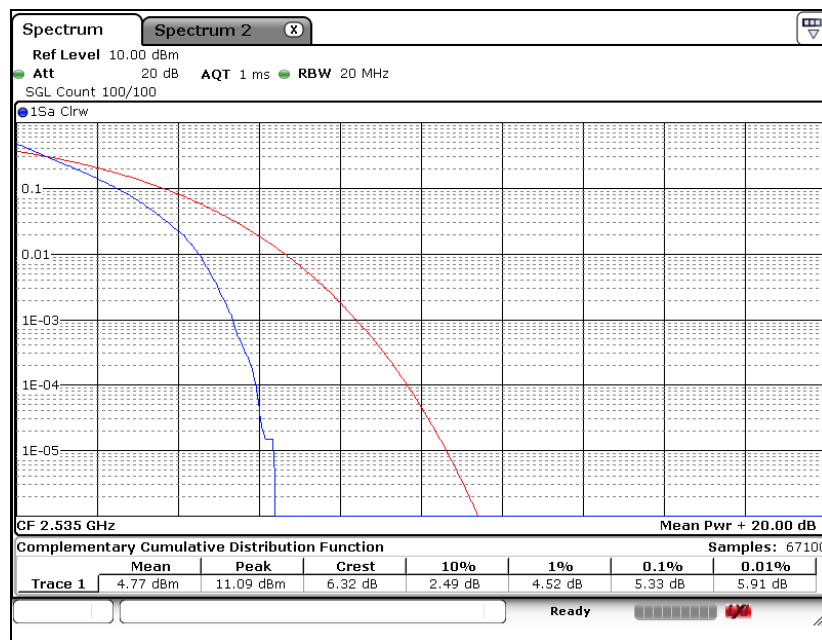


The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company. This test report does not assure KOLAS accreditation.

High Channel

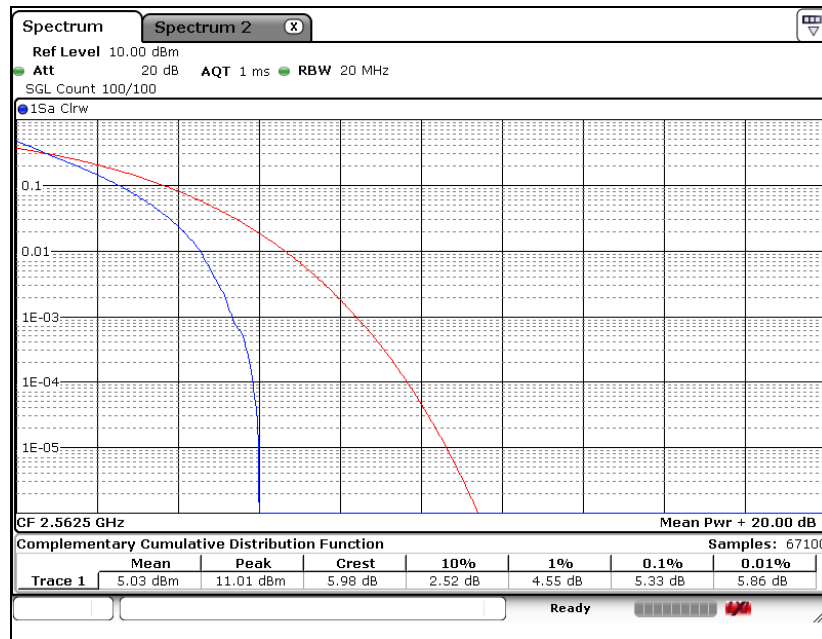


LTE band 7 (20 MHz - QPSK)

Low Channel

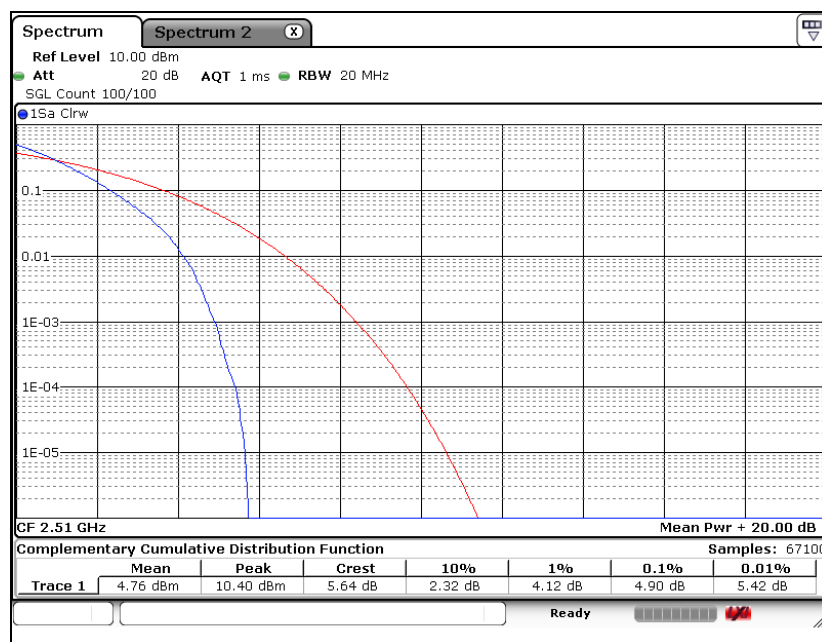


The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company. This test report does not assure KOLAS accreditation.

Middle Channel

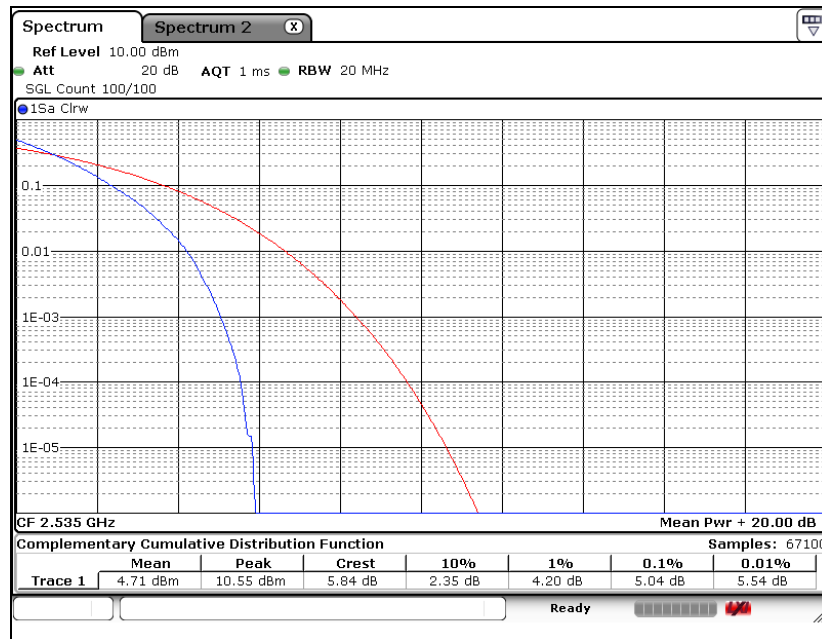


High Channel

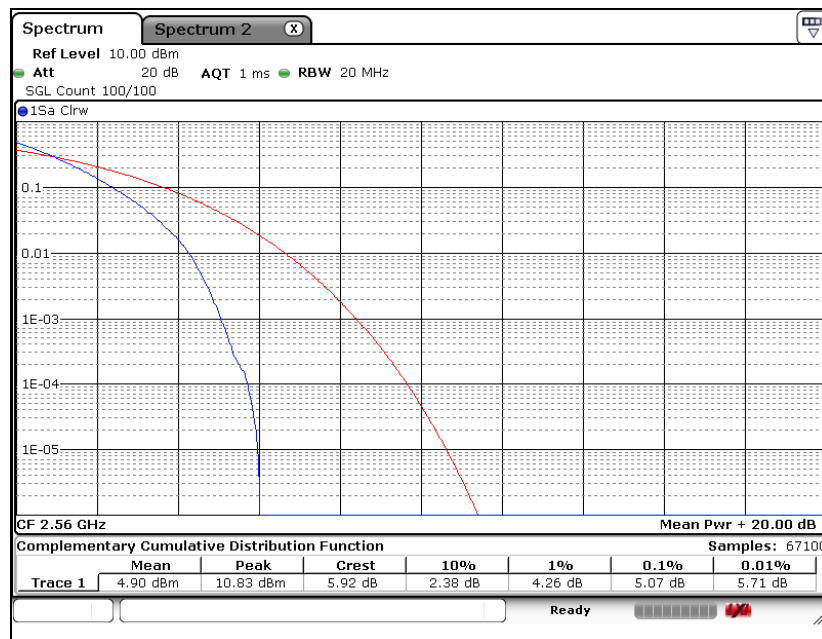


The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company. This test report does not assure KOLAS accreditation.

LTE band 26 (1.4 MHz - QPSK)

Low Channel

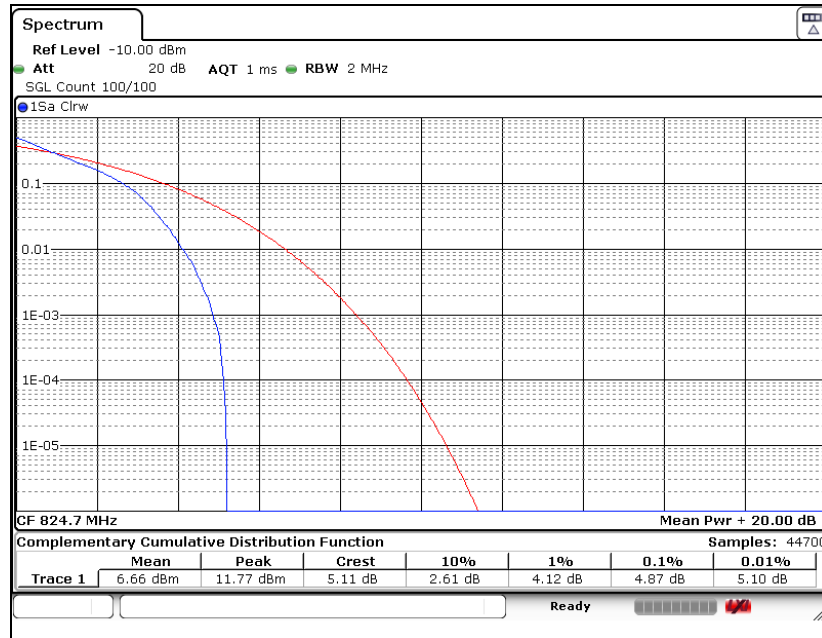


Middle Channel

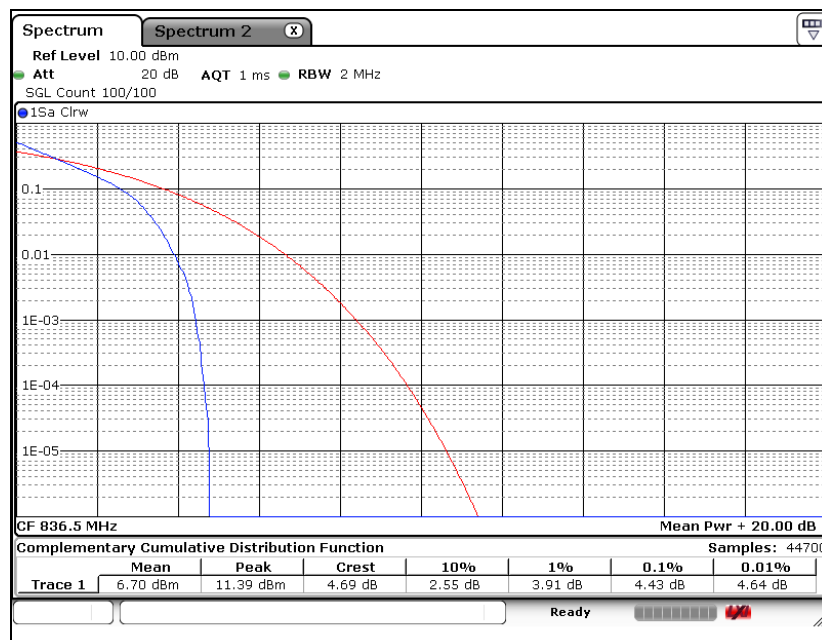


The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company. This test report does not assure KOLAS accreditation.

High Channel

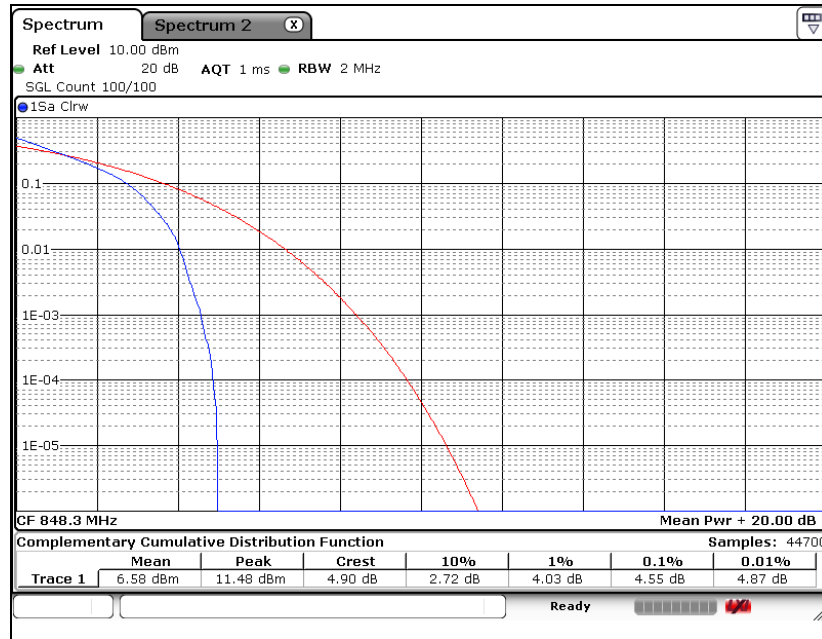


LTE band 26 (3 MHz - QPSK)

Low Channel

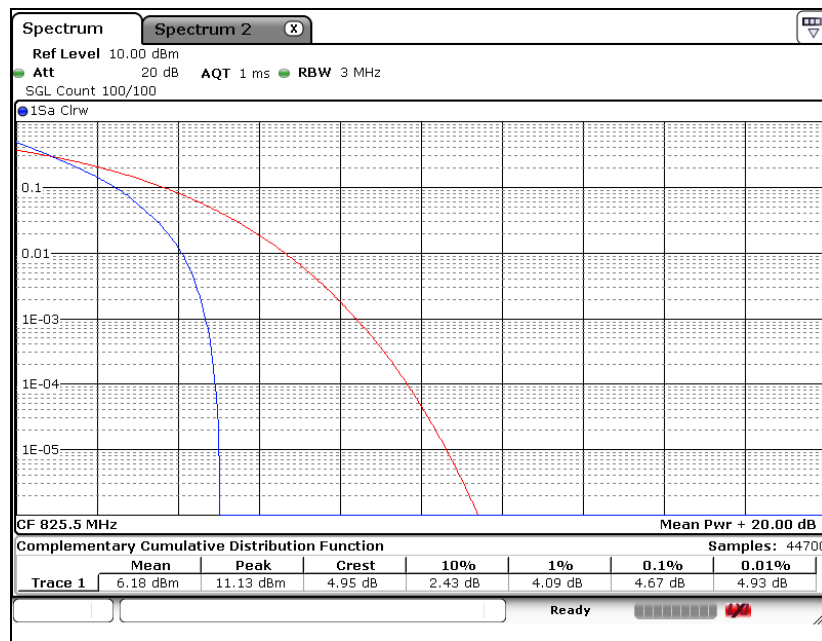


The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company. This test report does not assure KOLAS accreditation.

Middle Channel

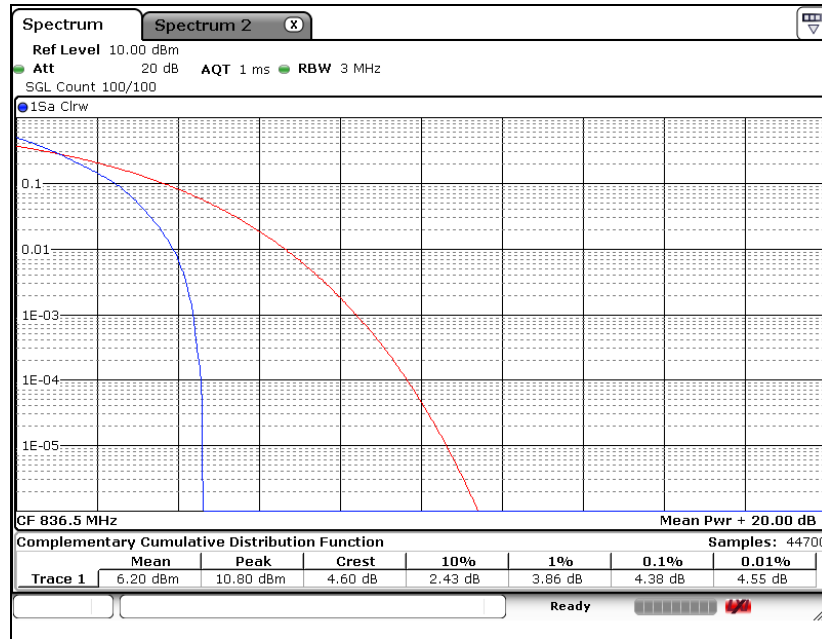


High Channel

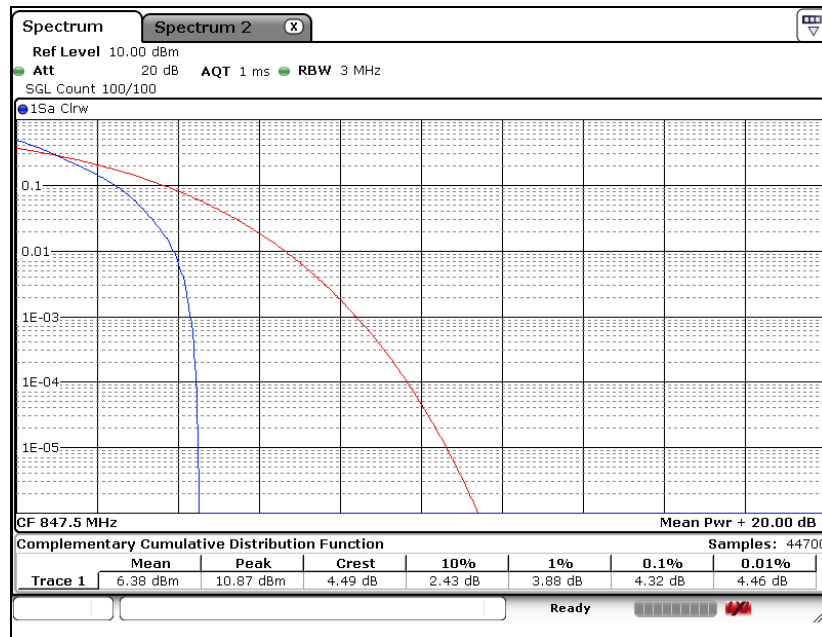


The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company. This test report does not assure KOLAS accreditation.

LTE band 26 (5 MHz - QPSK)

Low Channel

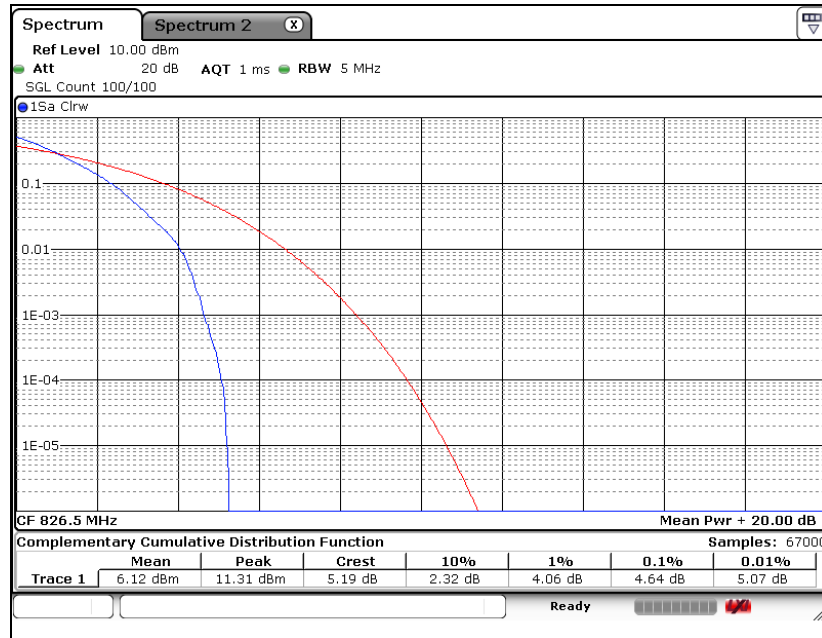


Middle Channel

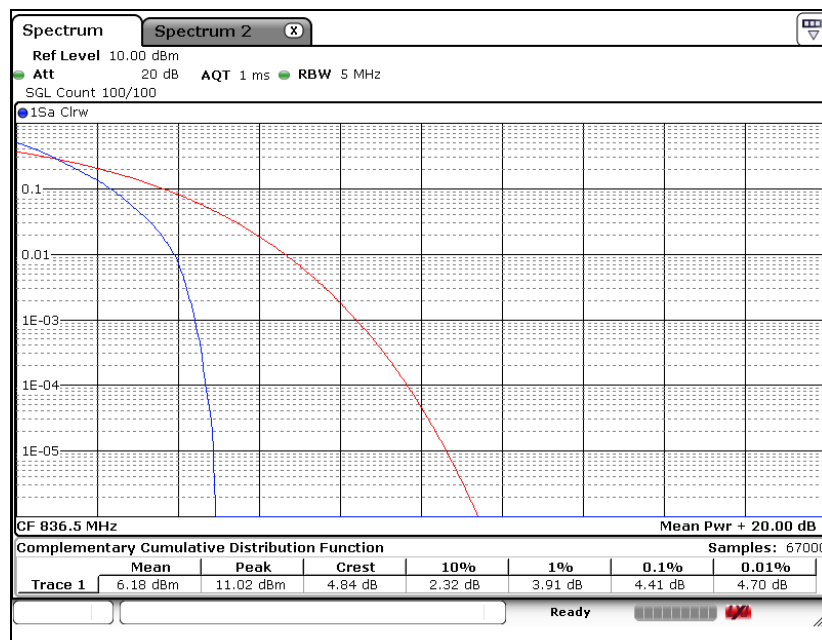


The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company. This test report does not assure KOLAS accreditation.

High Channel

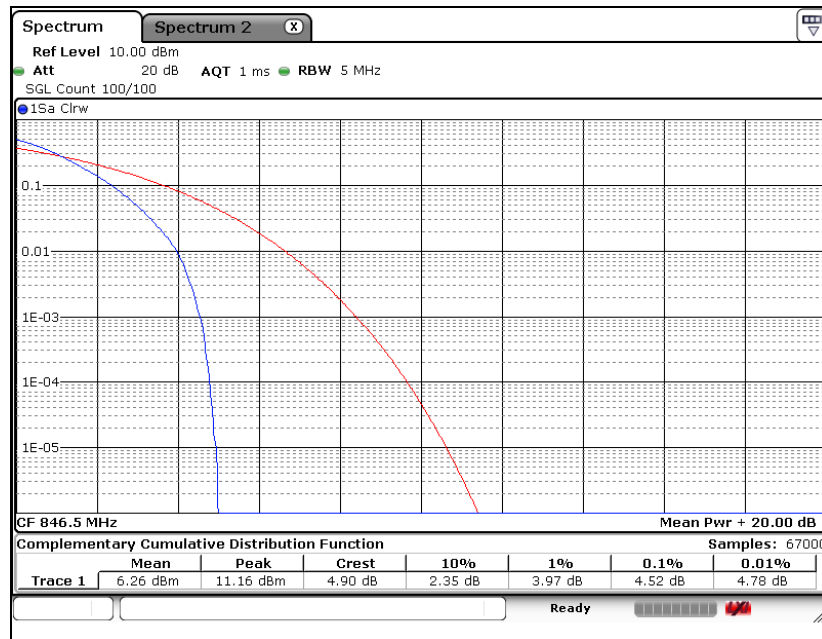


LTE band 26 (10 MHz - QPSK)

Low Channel

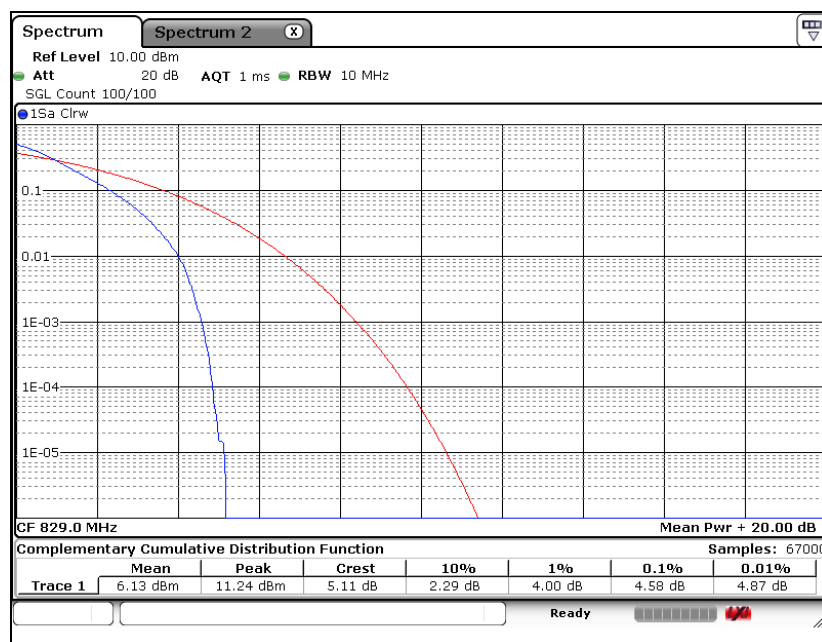


The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company. This test report does not assure KOLAS accreditation.

Middle Channel

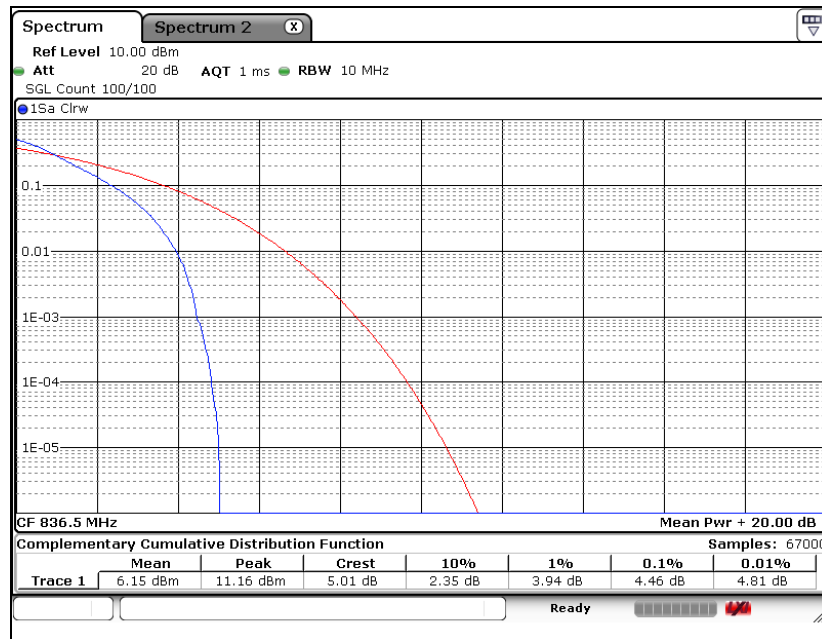


High Channel

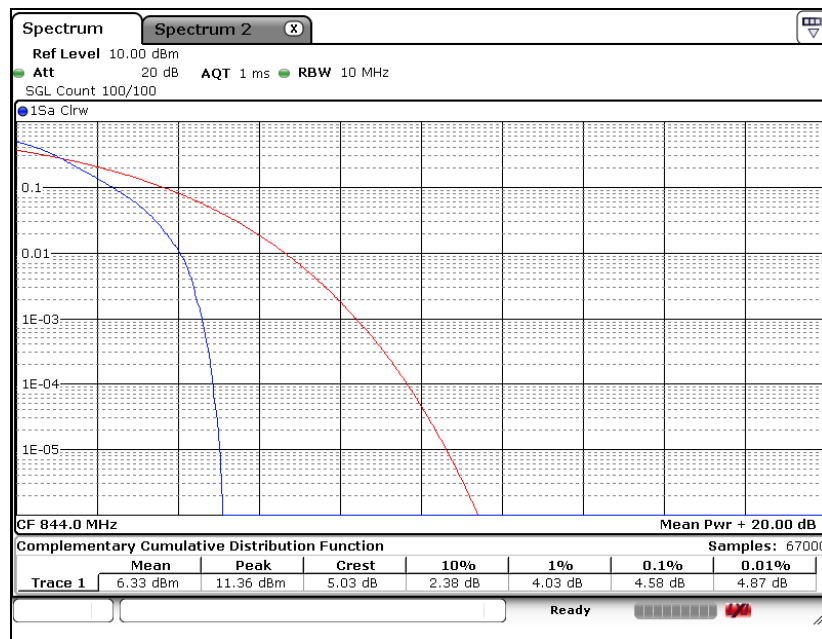


The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company. This test report does not assure KOLAS accreditation.

LTE band 26 (15 MHz - QPSK)

Low Channel

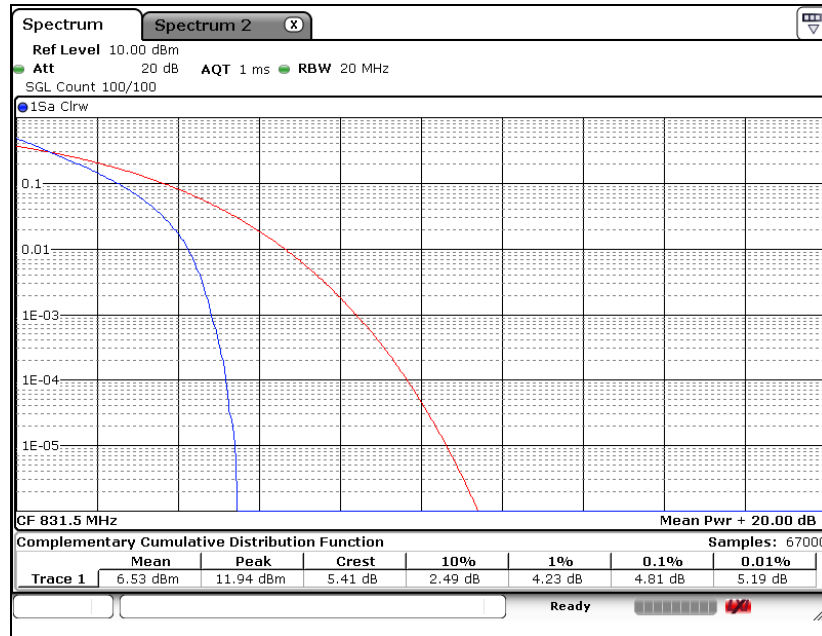

High Channel

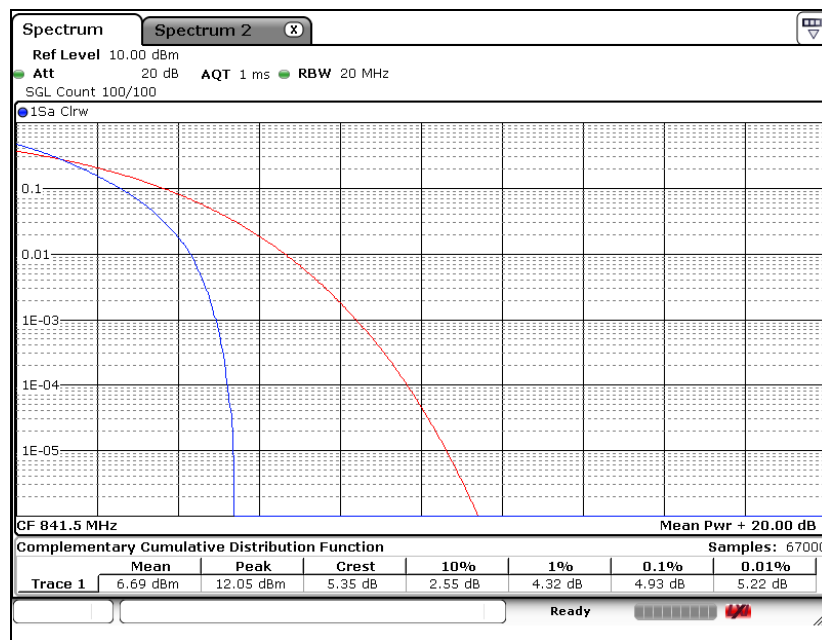

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company. This test report does not assure KOLAS accreditation.

6. Spurious Emissions at Antenna Terminal

6.1. Limit

FCC

- §22.917(a), the power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10\log(P)$ dB.

- §27.53(m)(4), For mobile digital stations, the attenuation factor shall be not less than $40 + 10\log_{10}(P)$ dB on all frequencies between the channel edge and 5 megahertz from the channel edge, $43 + 10\log_{10}(P)$ dB on all frequencies between 5 megahertz and X megahertz from the channel edge, and $55 + 10\log_{10}(P)$ dB on all frequencies more than X megahertz from the channel edge, where X is the greater of 6 megahertz or the actual emission bandwidth as defined in paragraph (m)(6) of this section. In addition, the attenuation factor shall not be less than $43 + 10\log_{10}(P)$ dB on all frequencies between 2 490.5 MHz and 2 496 MHz and $55 + 10\log_{10}(P)$ dB at or below 2 490.5 MHz. Mobile Satellite Service licensees operating on frequencies below 2 495 MHz may also submit a documented interference complaint against BRS licensees operating on channel BRS Channel 1 on the same terms and conditions as adjacent channel BRS or EBS licensees

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company. This test report does not assure KOLAS accreditation.

SGS Korea Co., Ltd. (Gunpo Laboratory) 4, LS-ro 182beon-gil, Gunpo-si, Gyeonggi-do, Korea, 15807 <http://www.sgsgroup.kr>

RTT5041-19(2017.07.10)(0)

Tel. +82 31 428 5700 / Fax. +82 31 427 2370

A4(210 mm x 297 mm)

IC

- RSS-132 Issue 3

5.5, Mobile and base station equipment shall comply with the limits in (i) and (ii) below.

(i) In the first 1.0 MHz band immediately outside and adjacent to each of the sub-bands specified in Section 5.1, the power of emissions per any 1 % of the occupied bandwidth shall be attenuated (in dB) below the transmitter output power P (dB W) by at least $43 + 10 \log_{10} p$ (watts).

(ii) After the first 1.0 MHz immediately outside and adjacent to each of the sub-bands, the power of emissions in any 100 kHz bandwidth shall be attenuated (in dB) below the transmitter output power P (dB W) by at least $43 + 10 \log_{10} p$ (watts). If the measurement is performed using 1 % of the occupied bandwidth, power integration over 100 kHz is required.

- RSS-199 Issue 3

In the 1 MHz band immediately outside and adjacent to the channel edge, the unwanted emission power shall be measured with a resolution bandwidth of at least 1% of the occupied bandwidth for base station and fixed subscriber equipment, and 2% for mobile subscriber equipment. Beyond the 1 MHz band, a resolution bandwidth of 1 MHz shall be used. A narrower resolution bandwidth can be used, provided that the measured power is integrated over the full required measurement bandwidth of 1 MHz, or 1% or 2% of the occupied bandwidth, as applicable.

Equipment shall comply with the following unwanted emission limits:

- a. for base station and fixed subscriber equipment, the power of any unwanted emissions measured as above shall be attenuated (in dB) below the transmitter power, P (dB W), by at least $43 + 10 \log_{10} p$
- b. for mobile subscriber equipment, the power of any unwanted emissions measured as above shall be attenuated (in dB) below the transmitter power, P (dB W), by at least:
 - i. $40 + 10 \log_{10} p$ from the channel edges to 5 MHz away
 - ii. $43 + 10 \log_{10} p$ between 5 MHz and X MHz from the channel edges, and
 - iii. $55 + 10 \log_{10} p$ at X MHz and beyond from the channel edges

In addition, the attenuation shall not be less than $43 + 10 \log_{10} p$ on all frequencies between 2 490.5 MHz and 2 496 MHz, and $55 + 10 \log_{10} p$ at or below 2 490.5 MHz.


In (a) and (b), p is the transmitter power measured in watts and X is 6 MHz or the equipment occupied bandwidth, whichever is greater.

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company. This test report does not assure KOLAS accreditation.

6.2. Test Procedure

The test follows section 6 of FCC KDB Publication 971168 D01 v03r01.

1. Start frequency was set to 30 MHz and stop frequency was set to at least 10* the fundamental frequency.
2. Detector = Peak.
3. Trace mode = Max hold.
4. Sweep time = Auto couple.
5. The trace was allowed to stabilize.
6. Please see notes below for RBW and VBW settings.
7. For plots showing conducted spurious emissions from 30 MHz to 26 GHz, all path loss of wide frequency range was investigated and compensated to spectrum analyzer as correction factor.

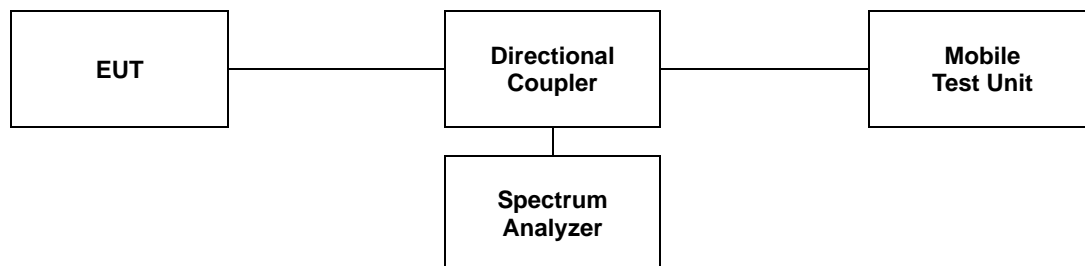

Note;

Compliance with the applicable limits is based on the use of measurement instrumentation employing a resolution bandwidth of 100 kHz or greater for frequencies less than 1 GHz and frequencies greater than 1 GHz. However, in the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed. The emission bandwidth is defined as the width of the signal between two point, one below the carrier center frequency and one above the carrier center frequency, outside of which all emission are attenuated at least 26 dB below the transmitter power.


The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company. This test report does not assure KOLAS accreditation.

6.3. Test Results


Ambient temperature : (23 ± 1) °C
Relative humidity : 47 % R.H.

LTE band 5 (1.4 MHz - QPSK)

Low Channel

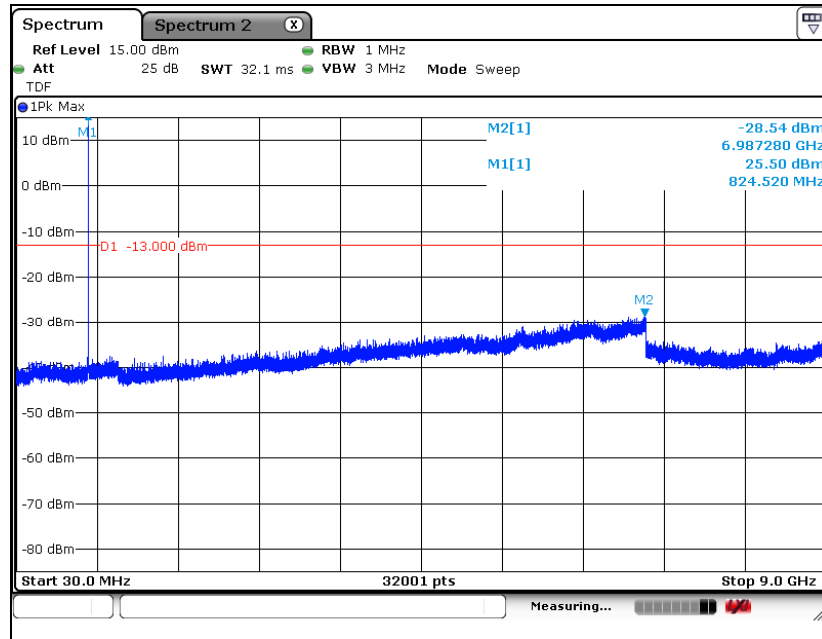


Middle Channel

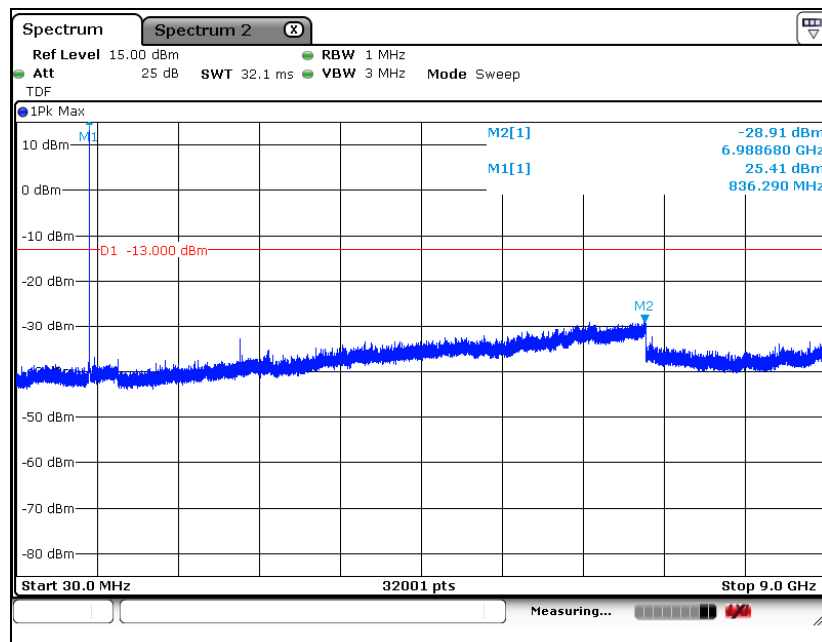


The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company. This test report does not assure KOLAS accreditation.

Middle Channel

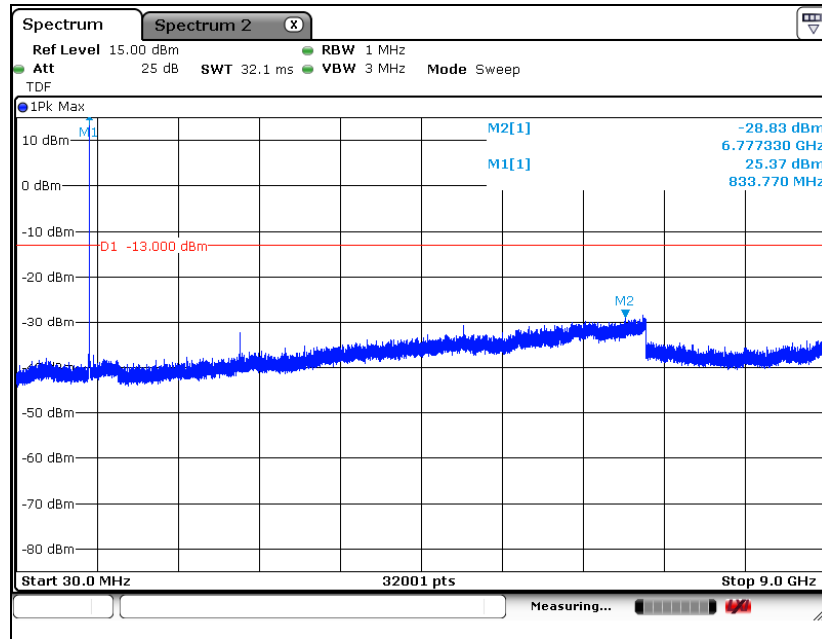


High Channel

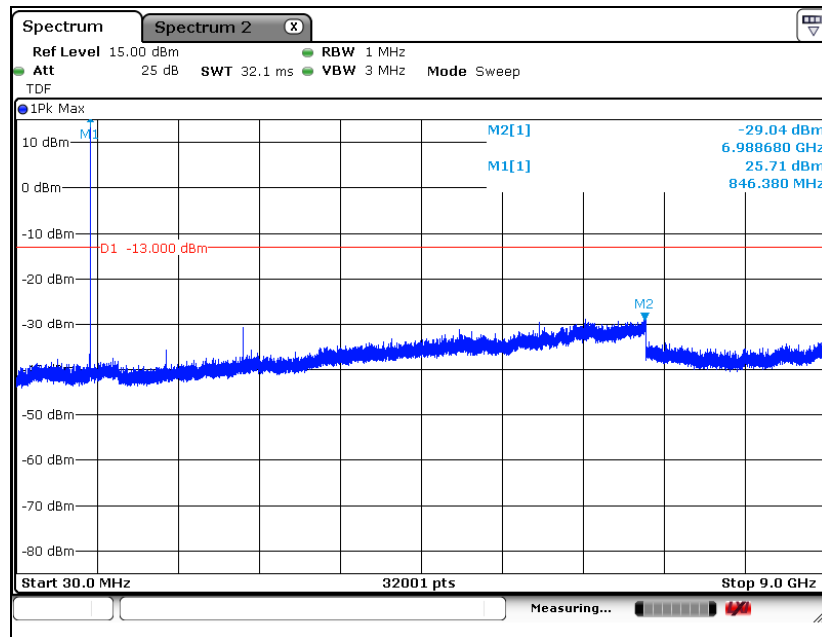


The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company. This test report does not assure KOLAS accreditation.

LTE band 5 (5 MHz - QPSK)

Low Channel

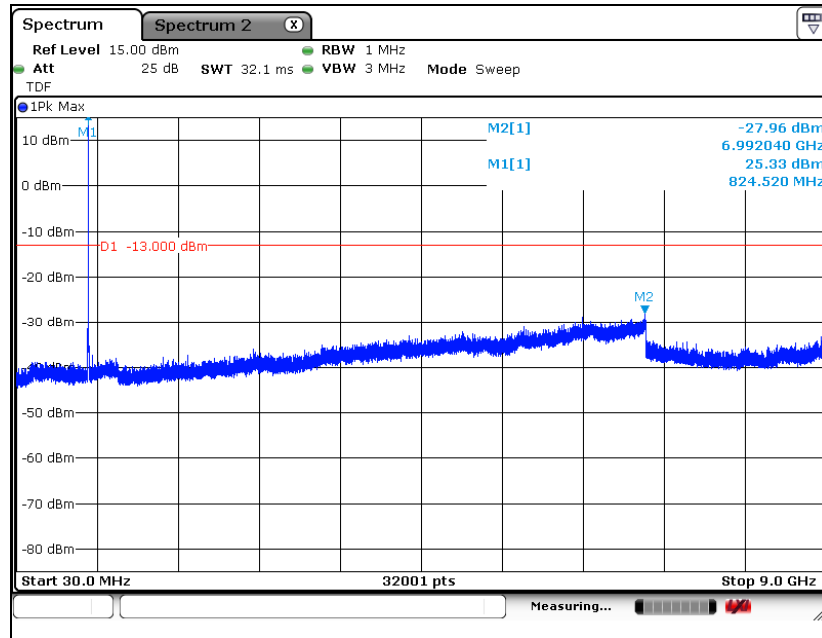


Middle Channel

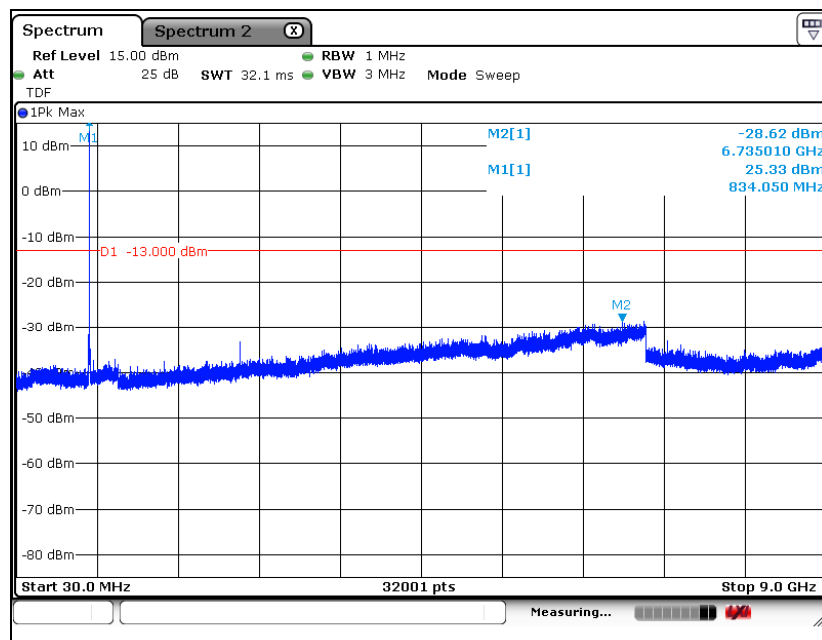


The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company. This test report does not assure KOLAS accreditation.

High Channel

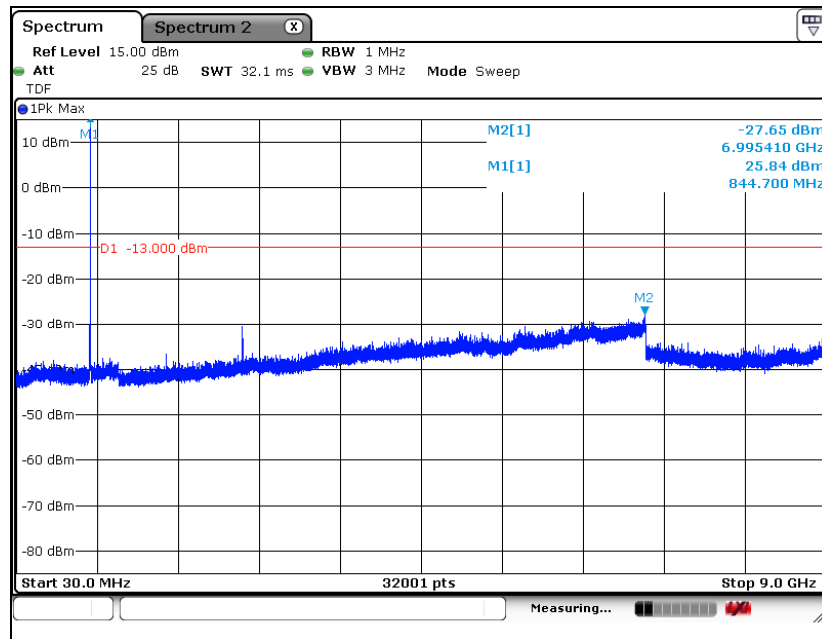


LTE band 5 (10 MHz - QPSK)

Low Channel

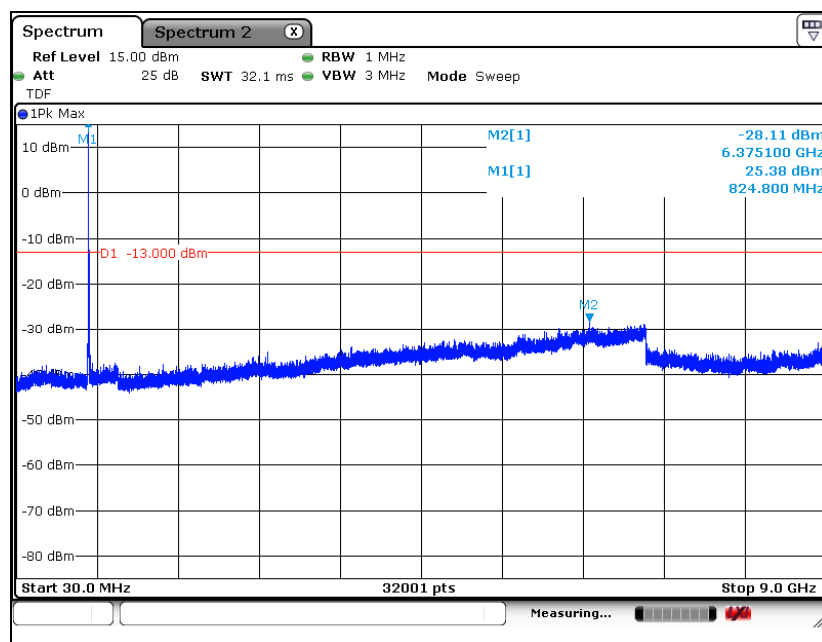


The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company. This test report does not assure KOLAS accreditation.

Middle Channel

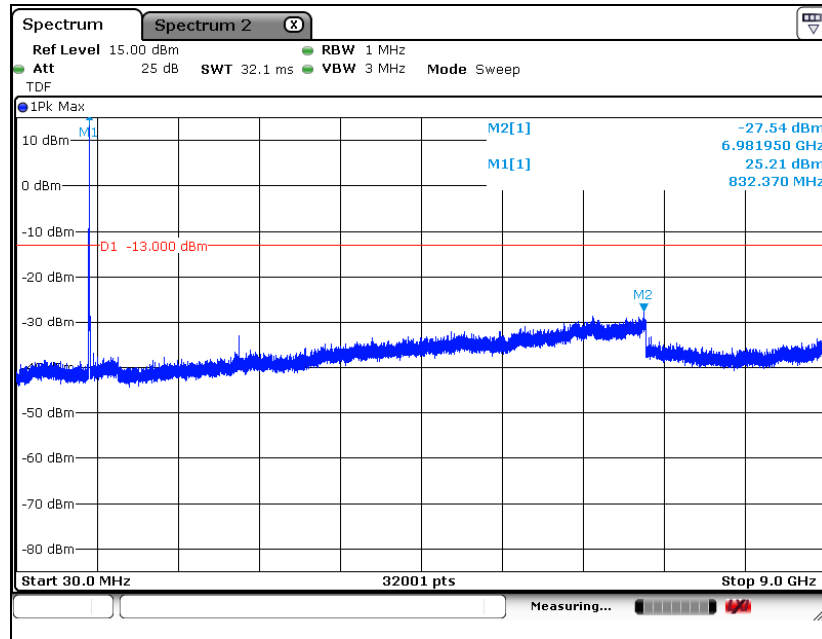


High Channel

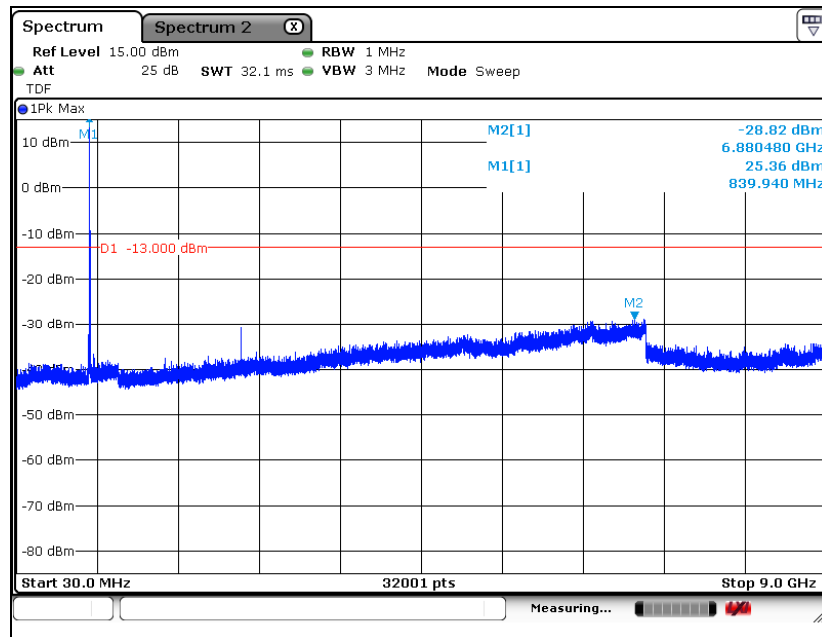

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company. This test report does not assure KOLAS accreditation.


LTE band 7 (5 MHz - QPSK)

Low Channel

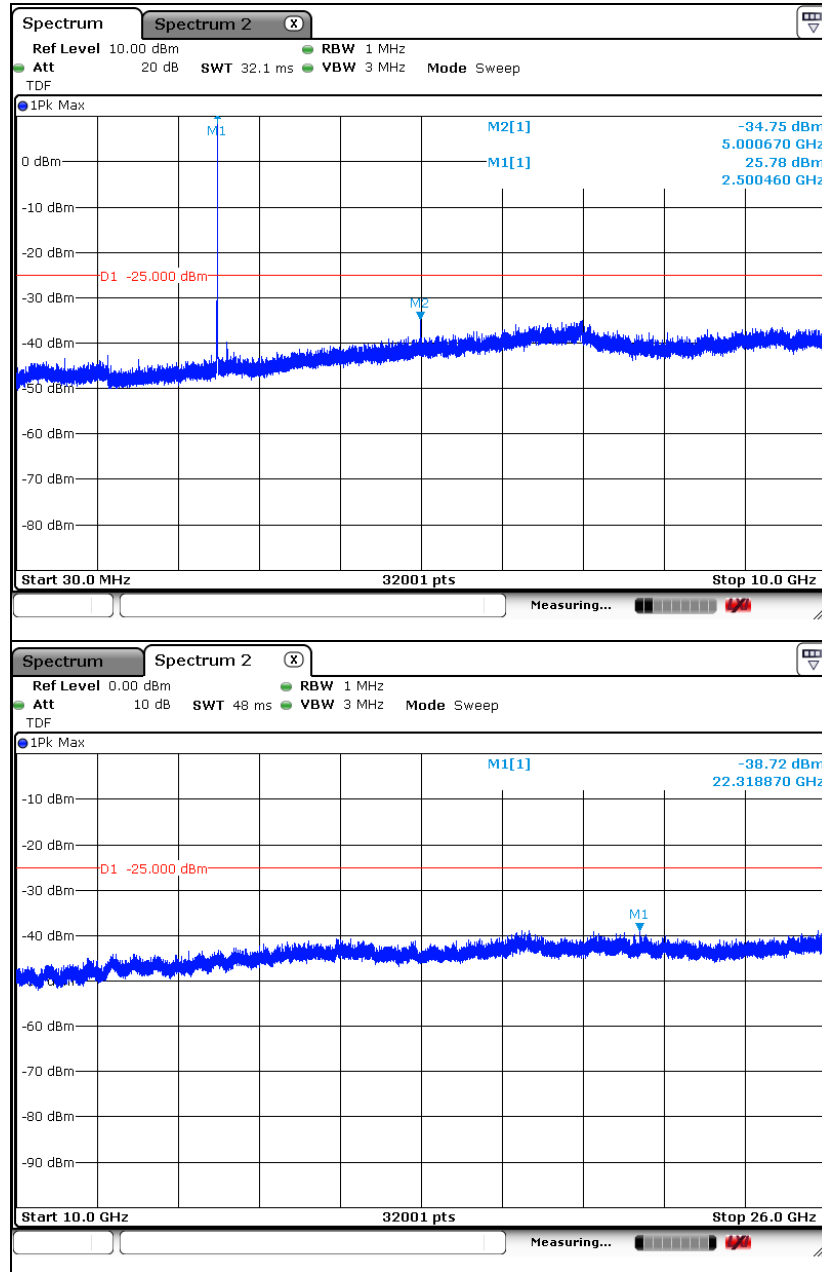


The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company. This test report does not assure KOLAS accreditation.

Middle Channel

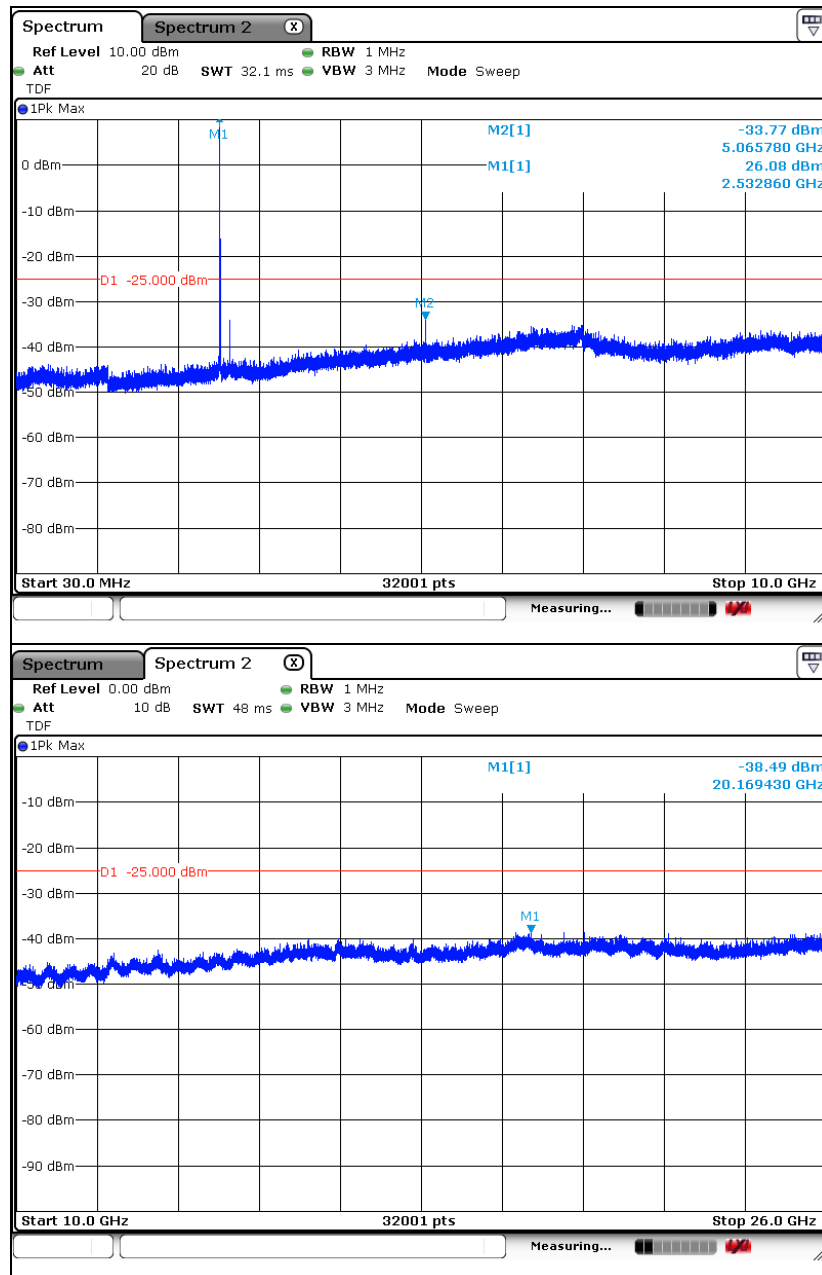

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company. This test report does not assure KOLAS accreditation.


High Channel

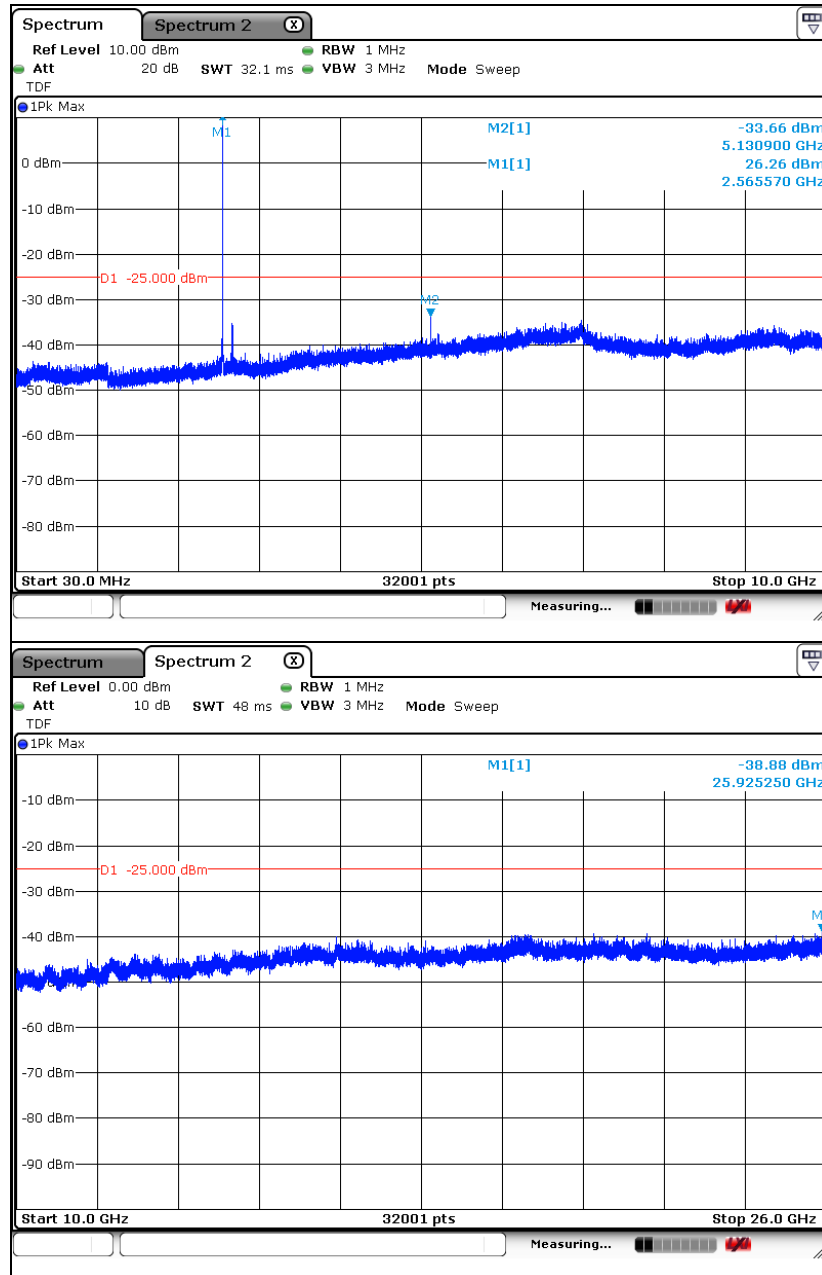

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company. This test report does not assure KOLAS accreditation.


LTE band 7 (10 MHz - QPSK)

Low Channel

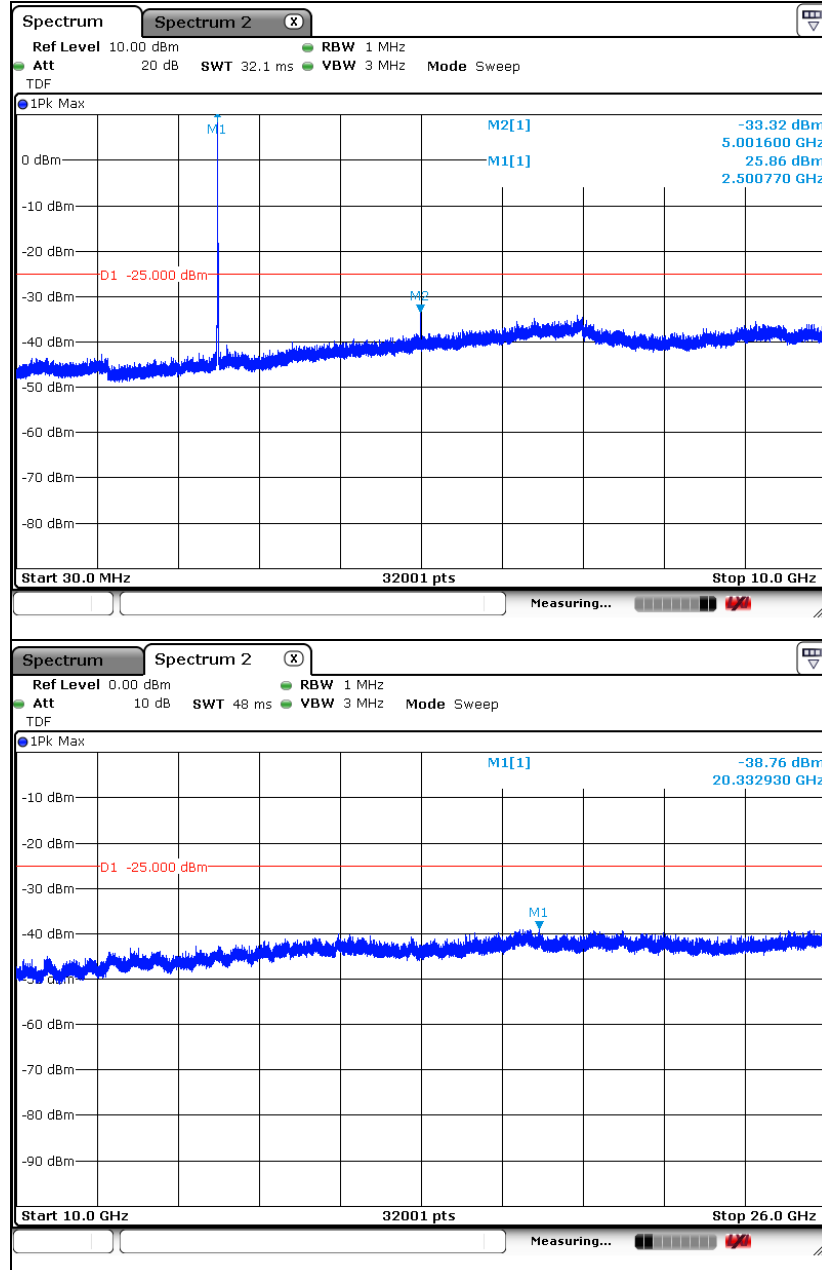


The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company. This test report does not assure KOLAS accreditation.

Middle Channel

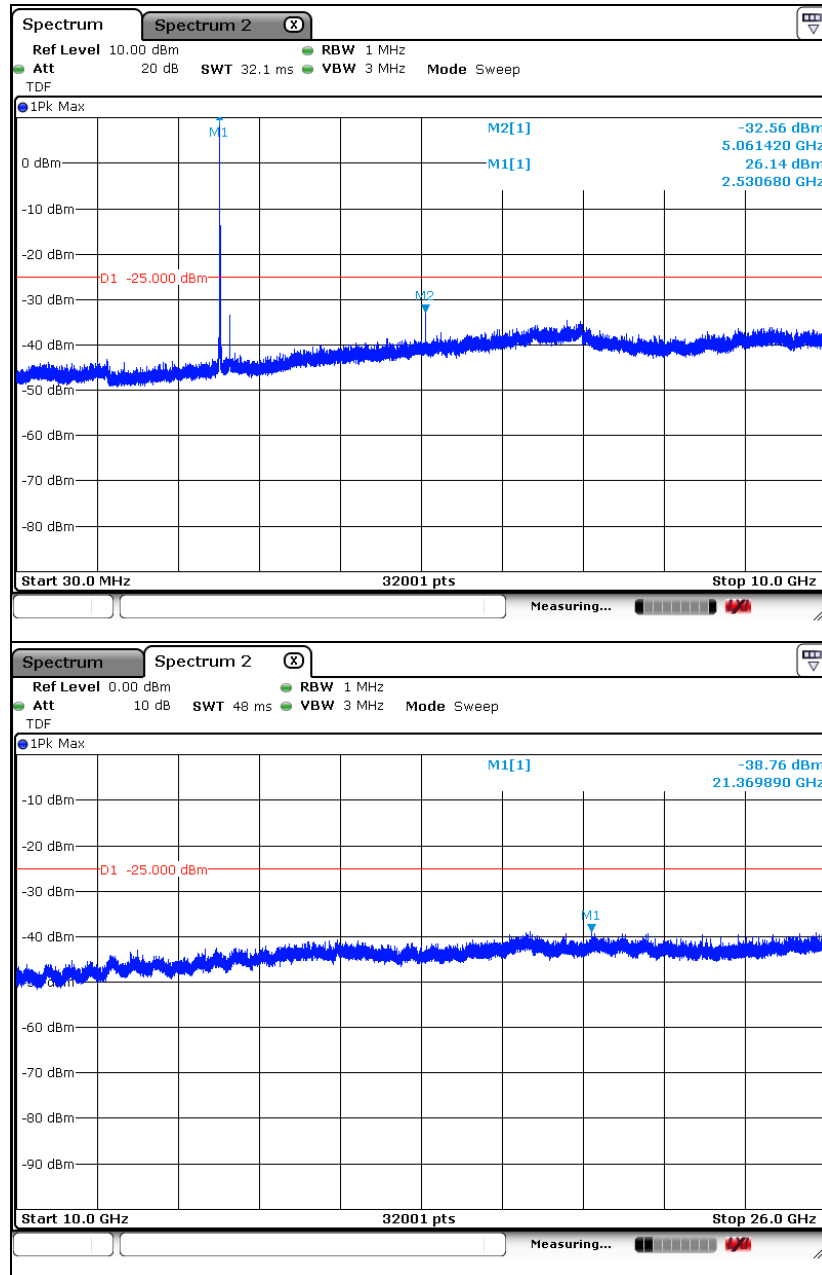

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company. This test report does not assure KOLAS accreditation.


High Channel

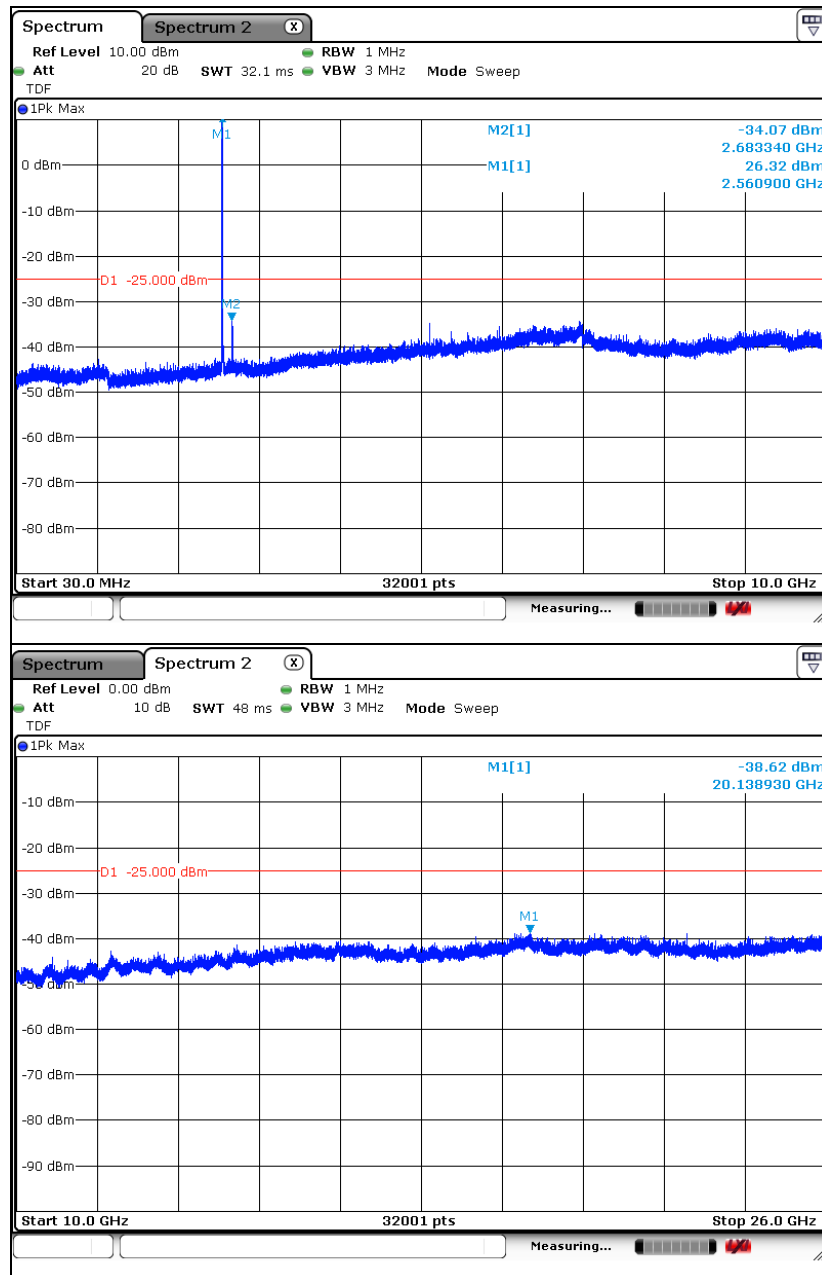

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company. This test report does not assure KOLAS accreditation.


LTE band 7 (15 MHz - QPSK)

Low Channel

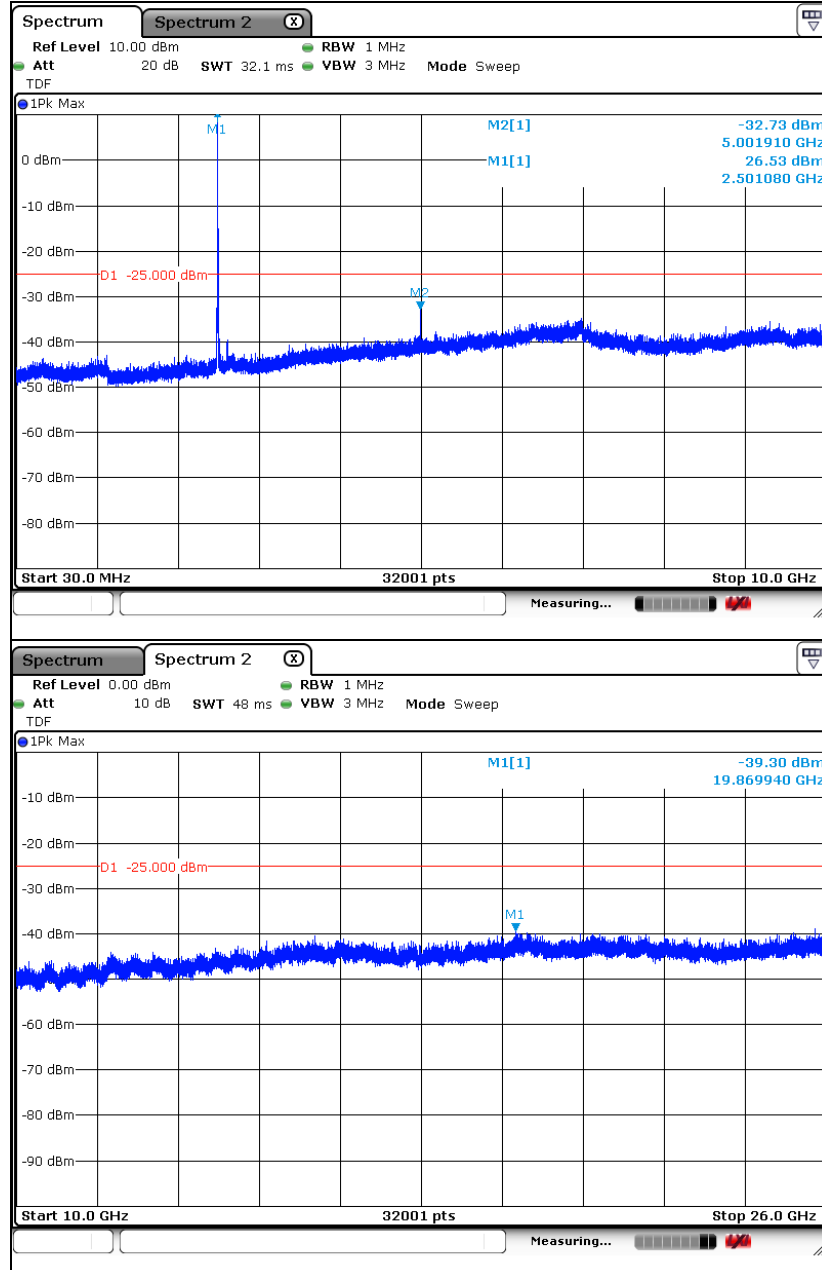

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company. This test report does not assure KOLAS accreditation.


Middle Channel

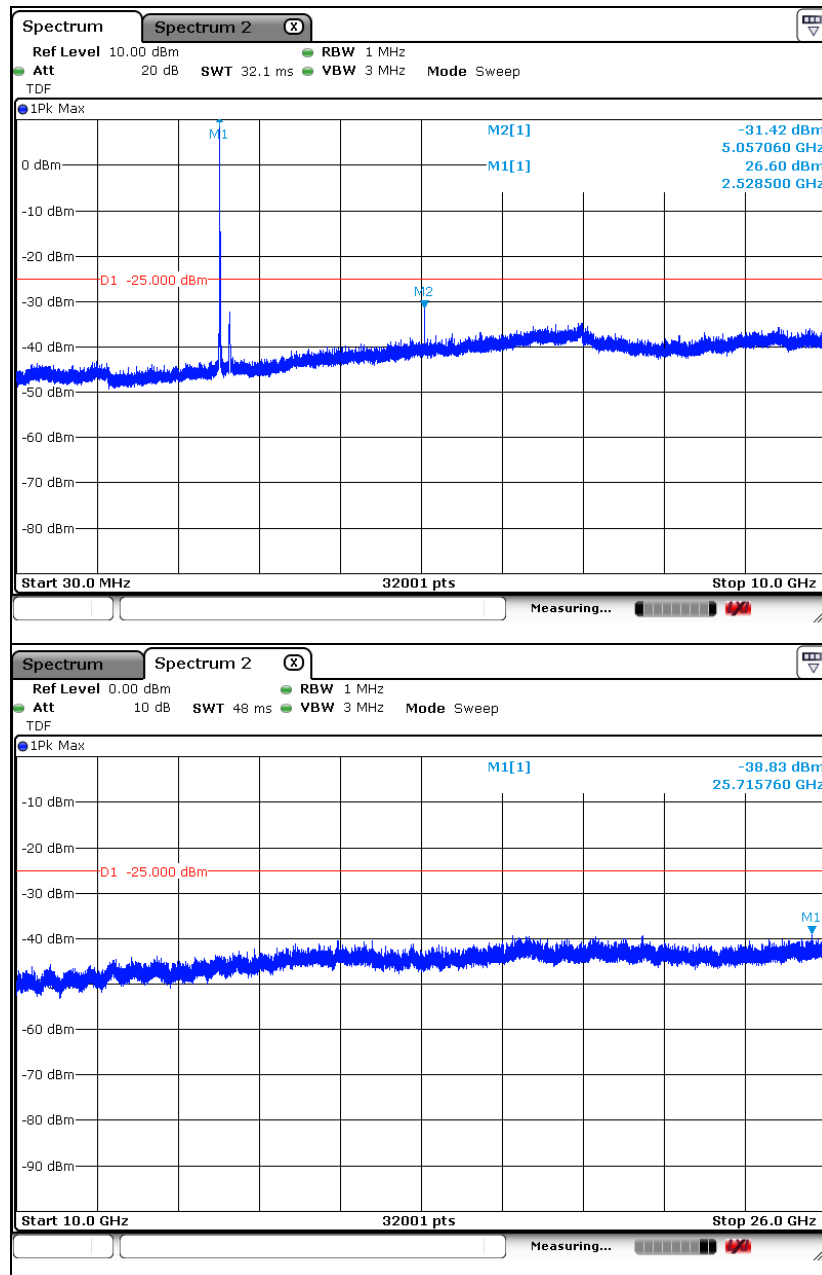

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company. This test report does not assure KOLAS accreditation.


LTE band 7 (20 MHz - QPSK)

Low Channel

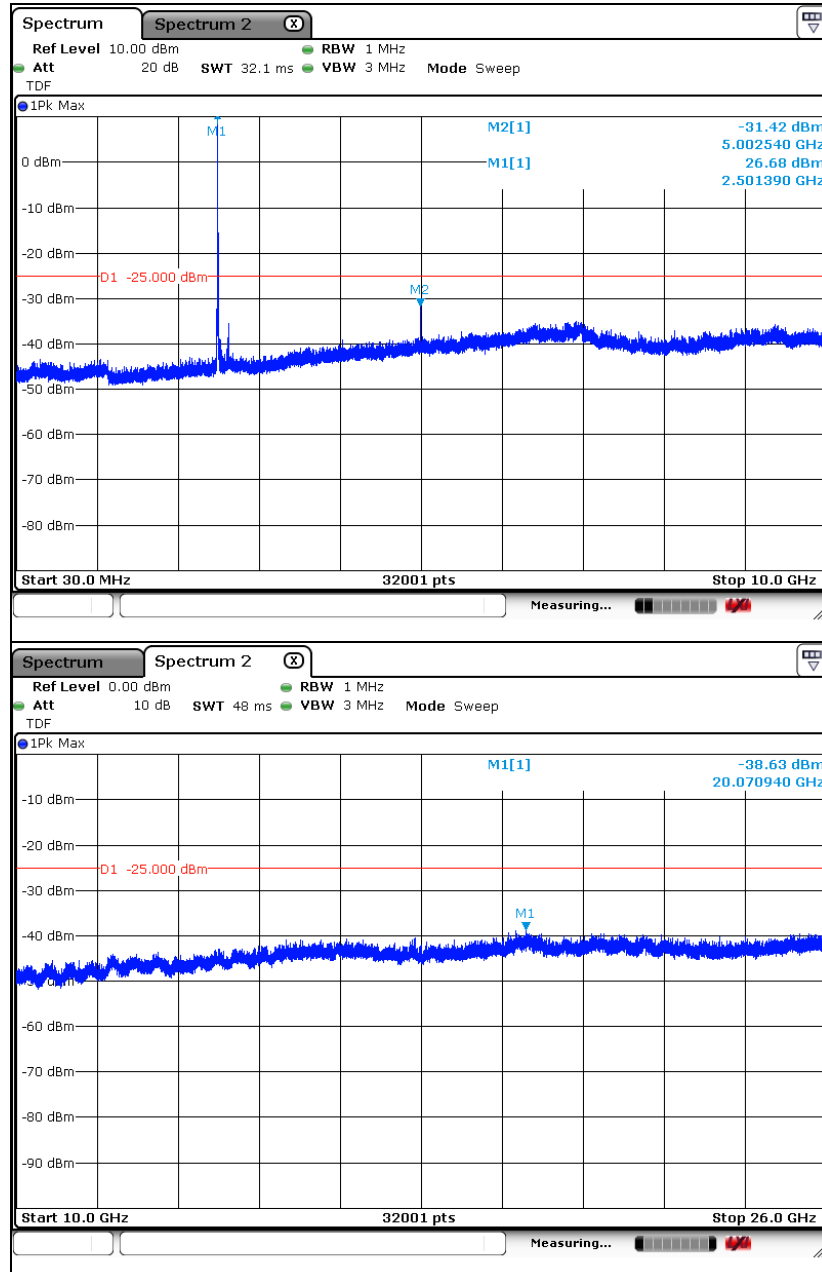


The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company. This test report does not assure KOLAS accreditation.

Middle Channel

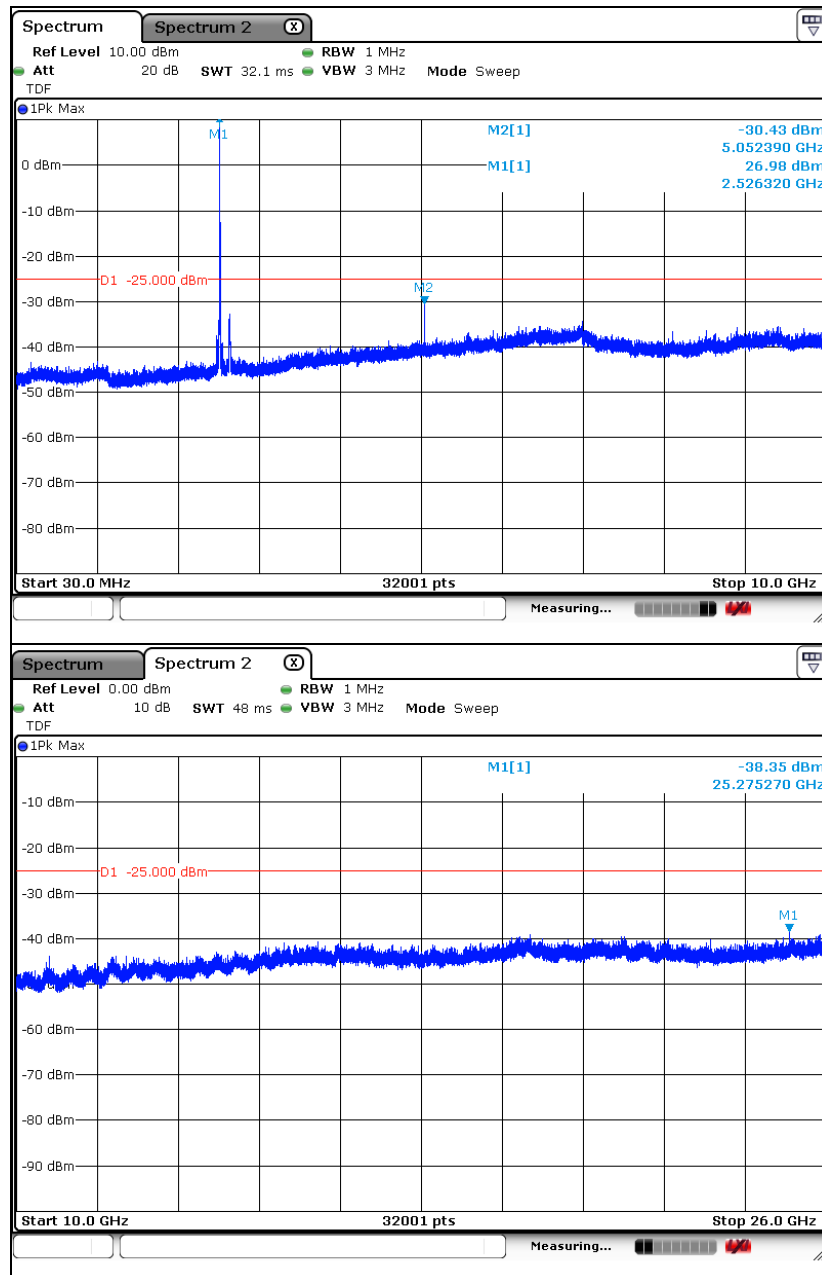

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company. This test report does not assure KOLAS accreditation.


High Channel

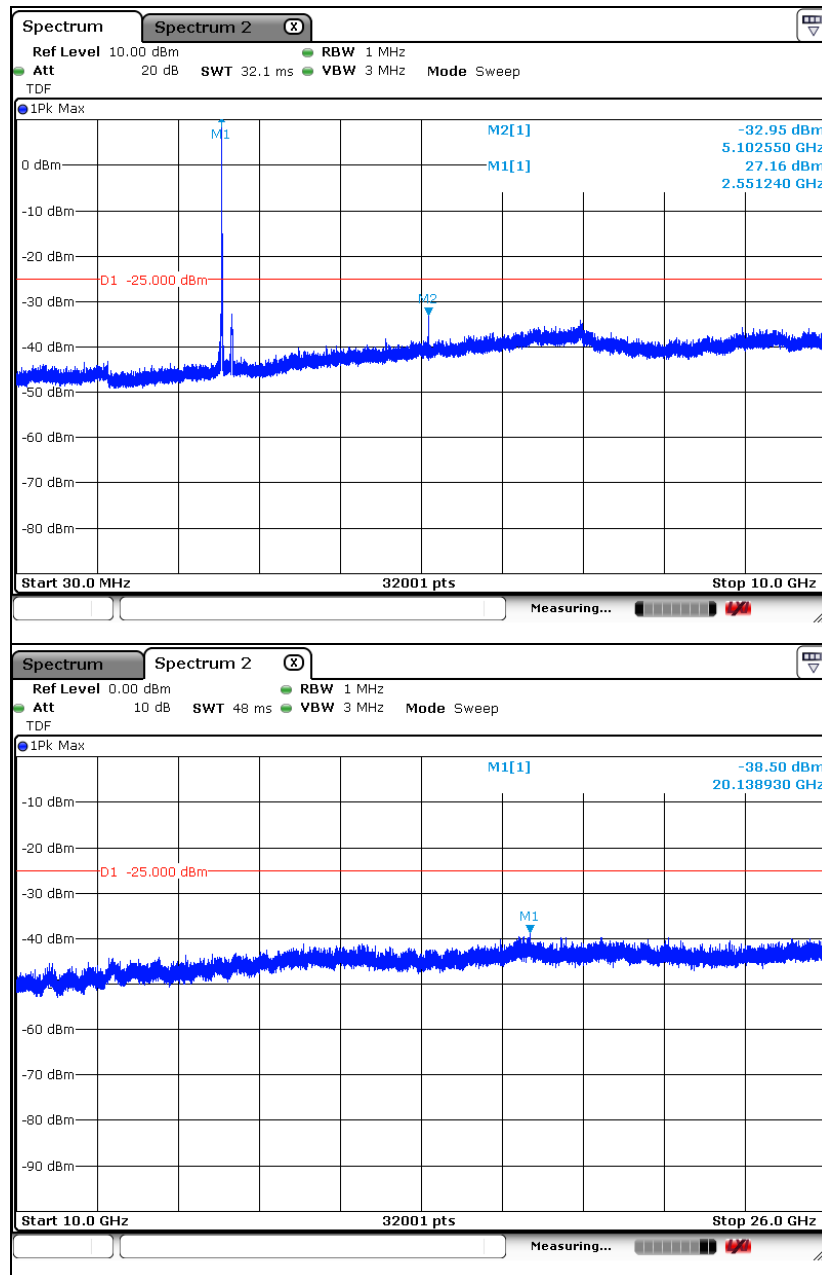


The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company. This test report does not assure KOLAS accreditation.

LTE band 26 (1.4 MHz - QPSK)

Low Channel

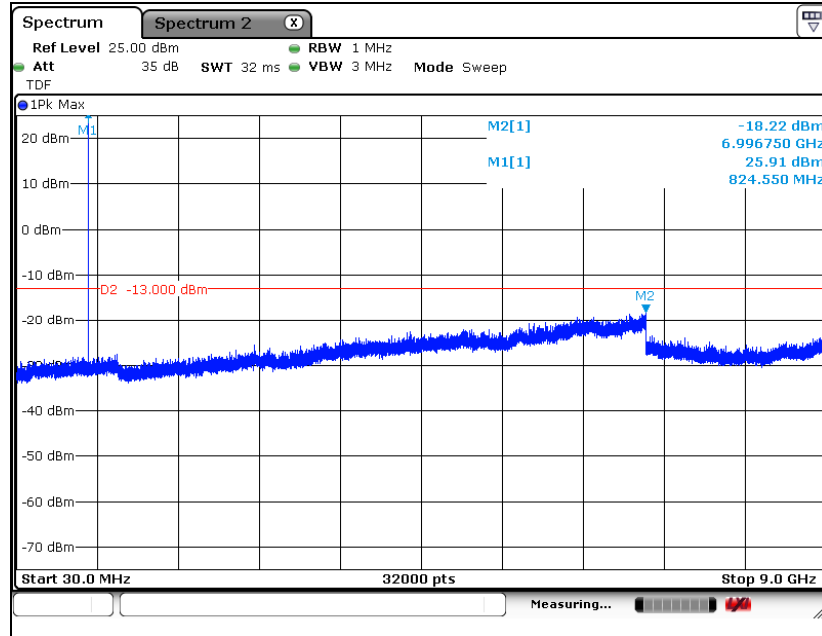


Middle Channel

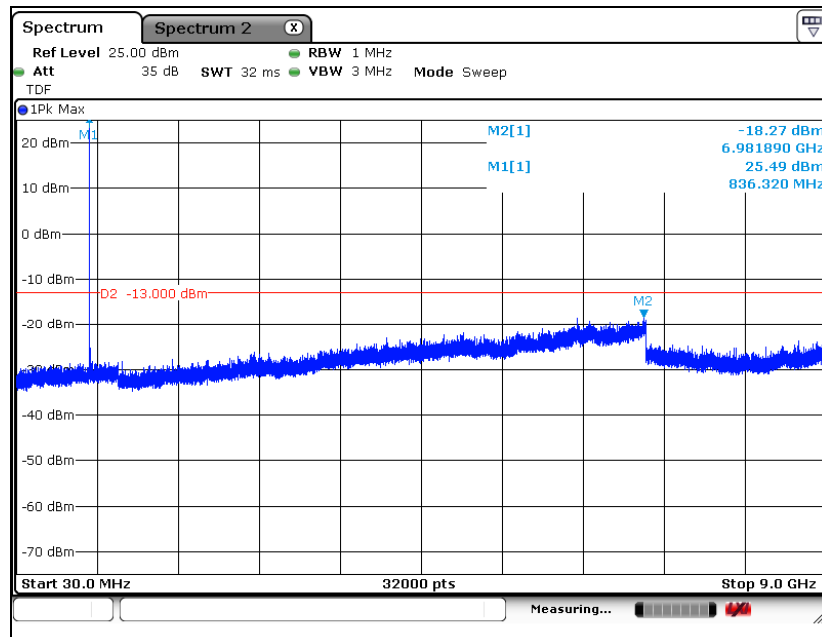


The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company. This test report does not assure KOLAS accreditation.

High Channel

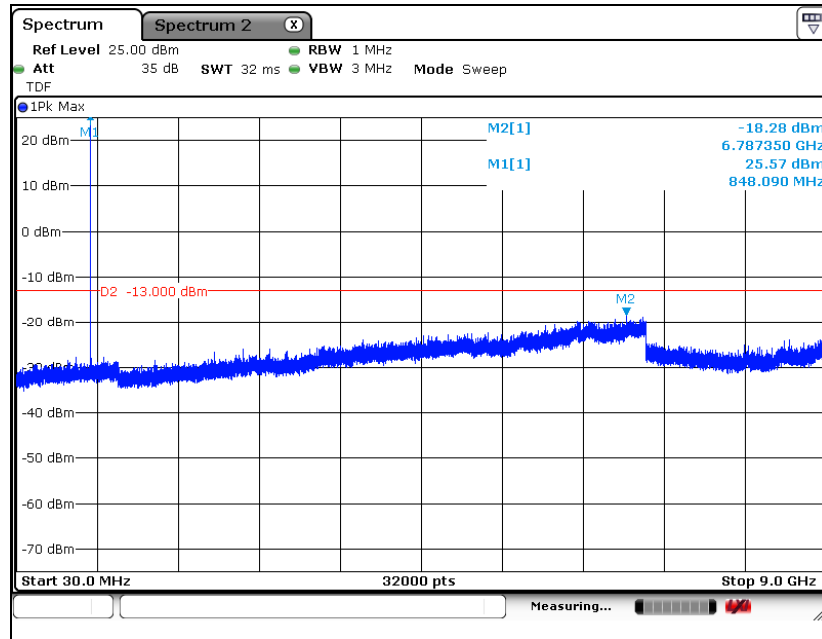


LTE band 26 (3 MHz - QPSK)

Low Channel

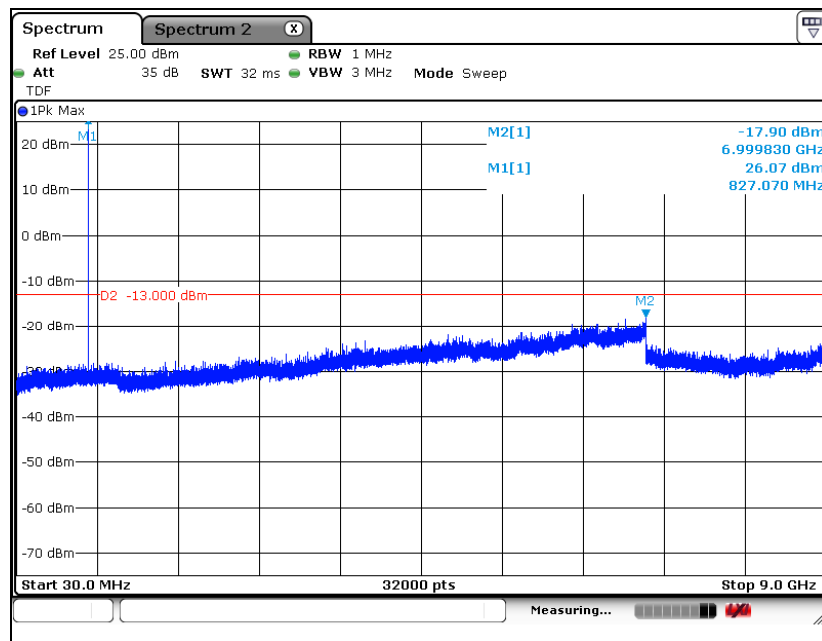


The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company. This test report does not assure KOLAS accreditation.

Middle Channel

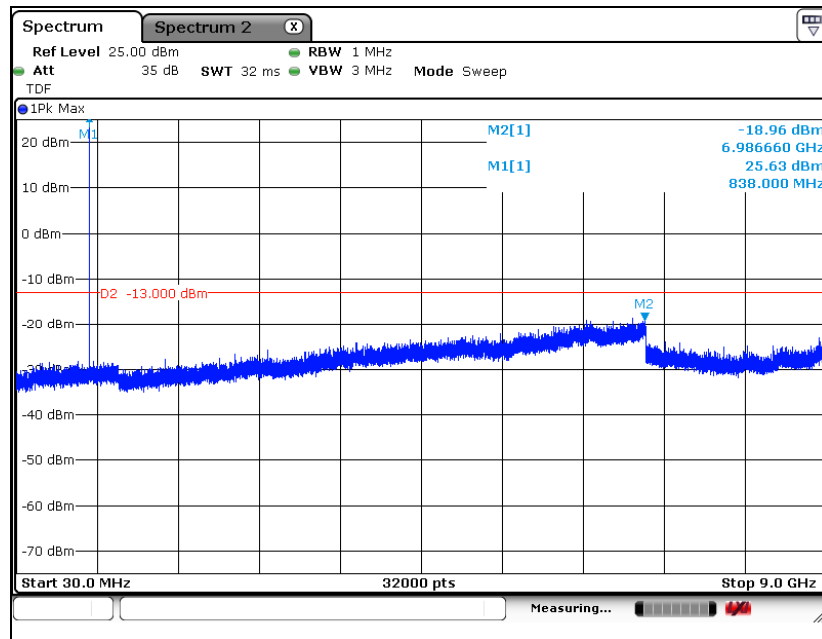


High Channel

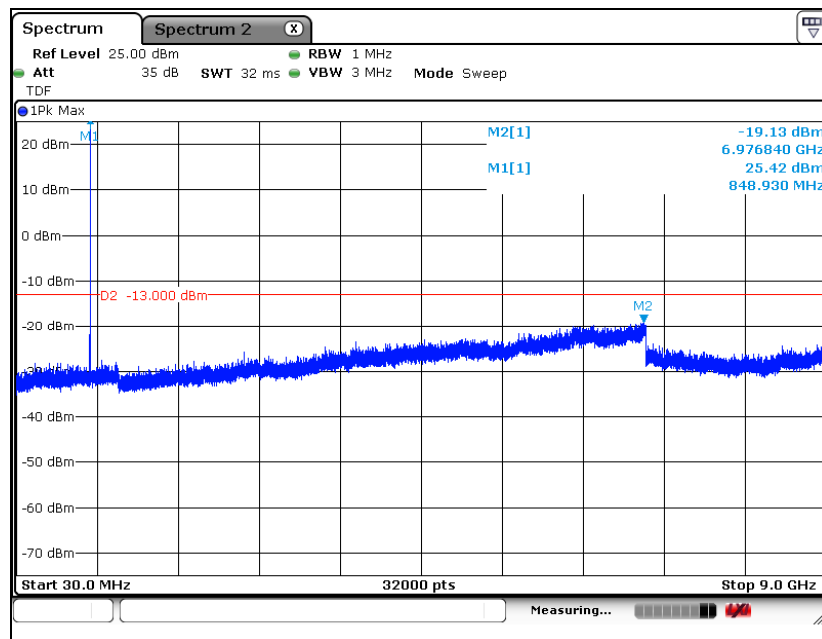


The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company. This test report does not assure KOLAS accreditation.

LTE band 26 (5 MHz - QPSK)

Low Channel

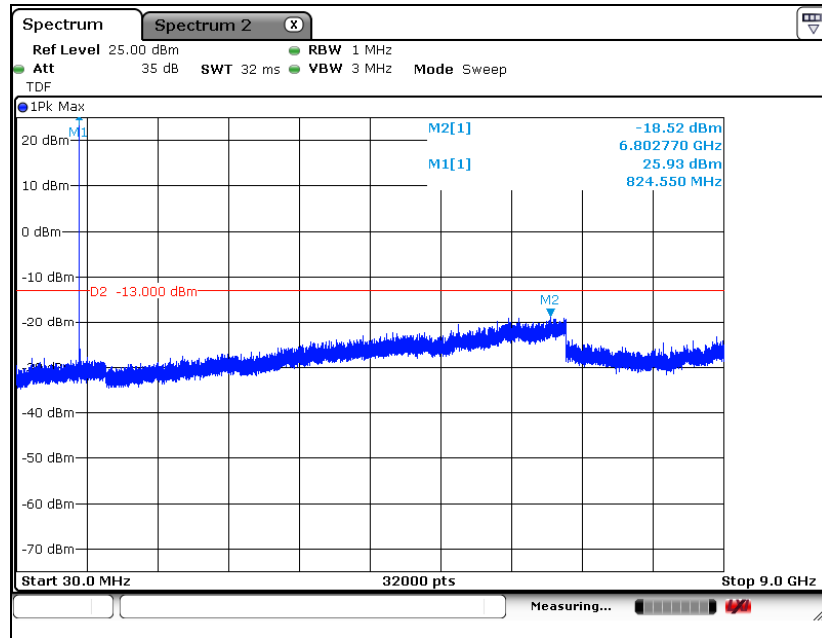


Middle Channel

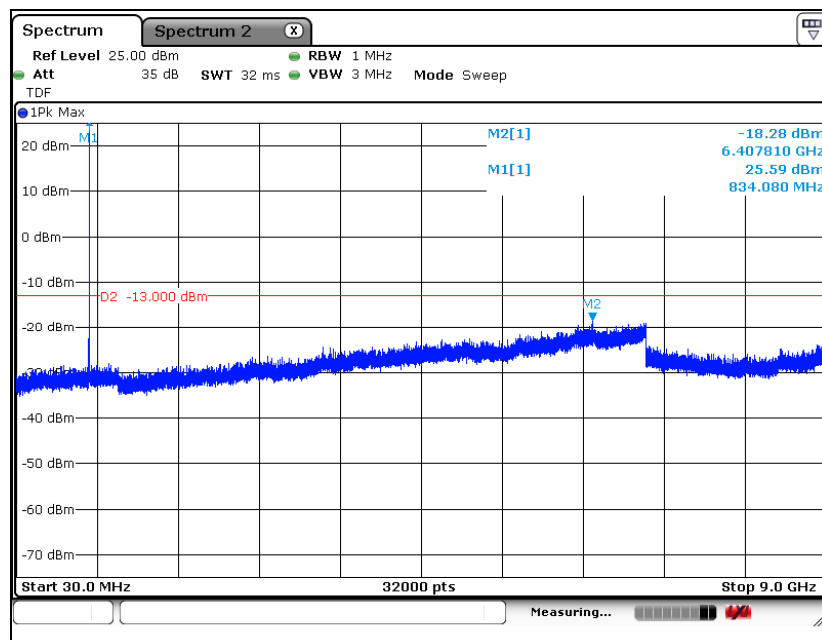


The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company. This test report does not assure KOLAS accreditation.

High Channel

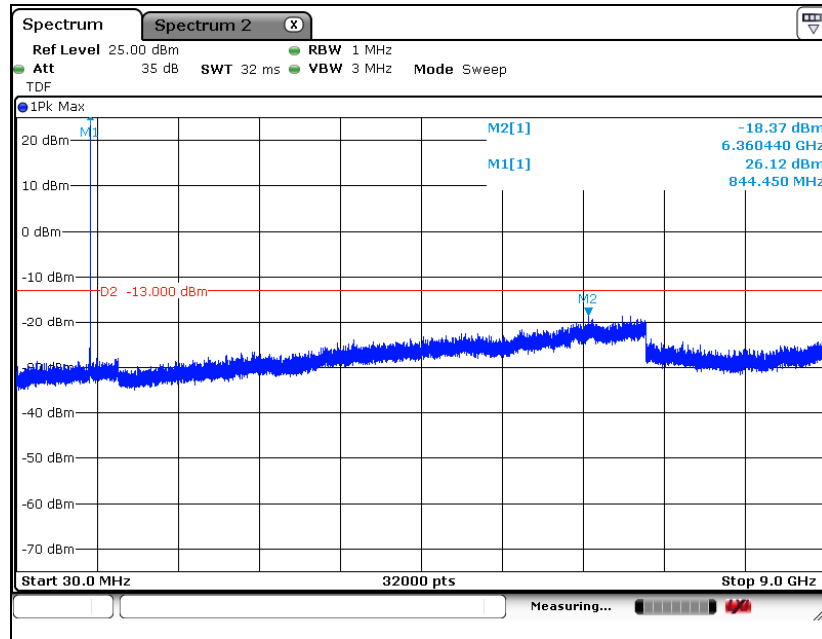


LTE band 26 (10 MHz - QPSK)

Low Channel

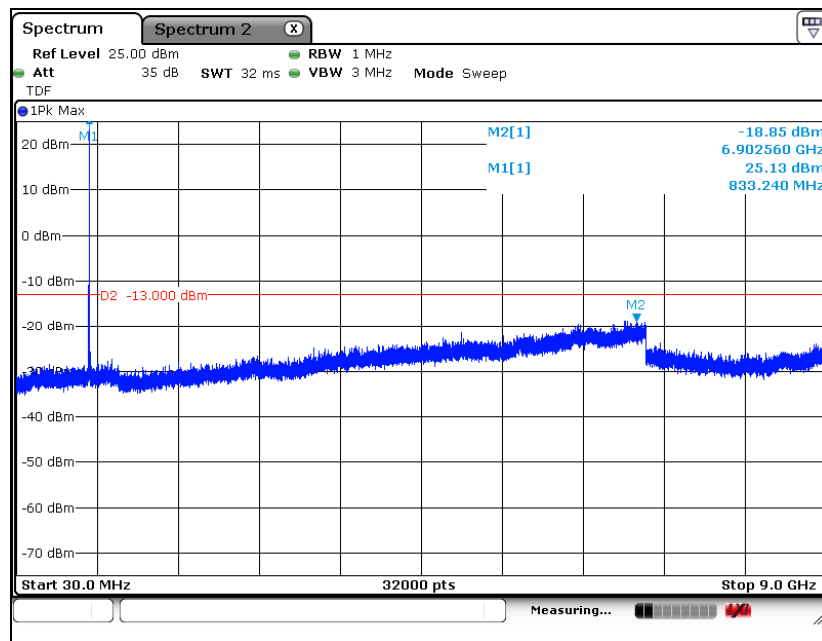


The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company. This test report does not assure KOLAS accreditation.

Middle Channel

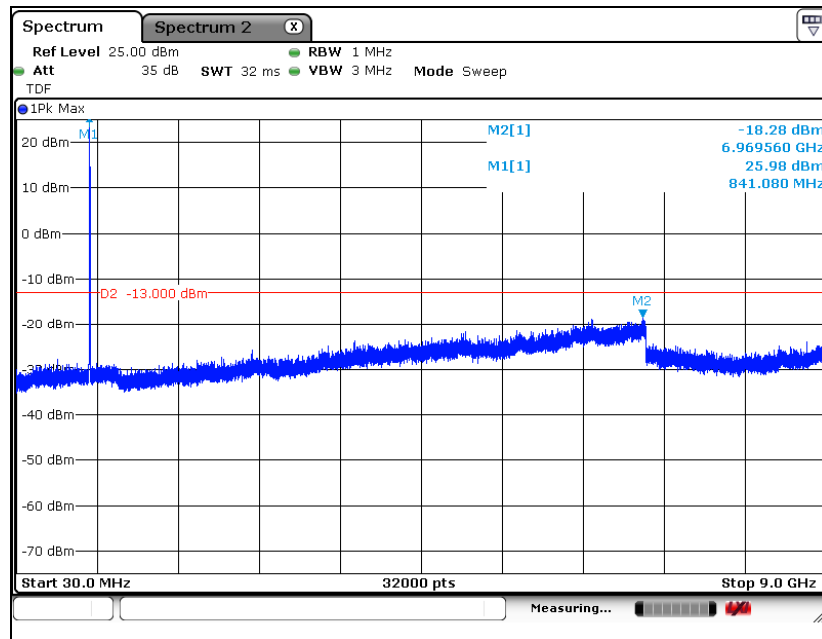


High Channel

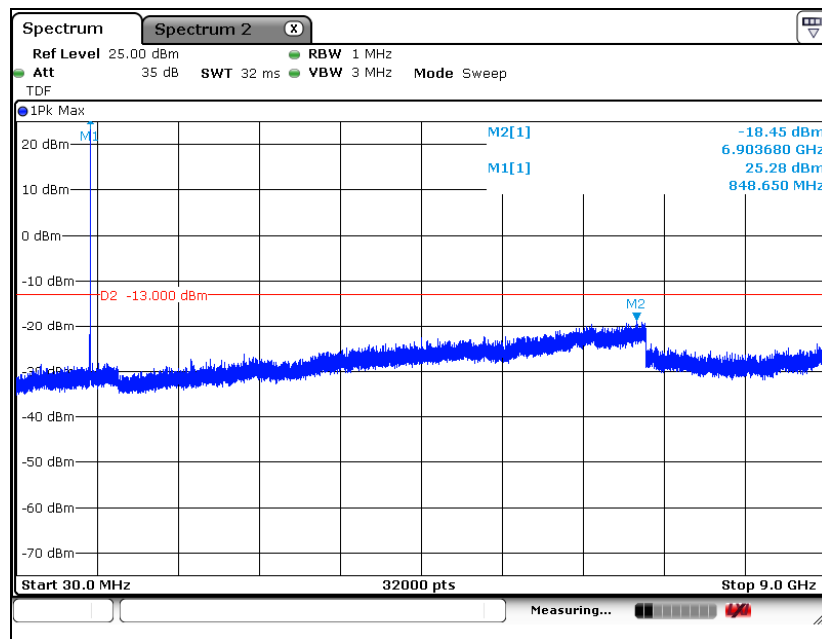


The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company. This test report does not assure KOLAS accreditation.

LTE band 26 (15 MHz - QPSK)

Low Channel

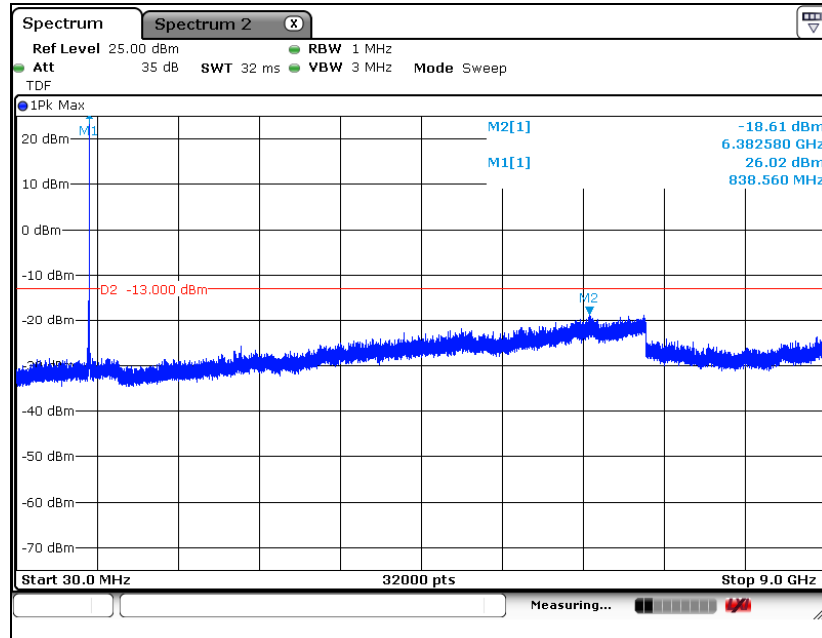

High Channel

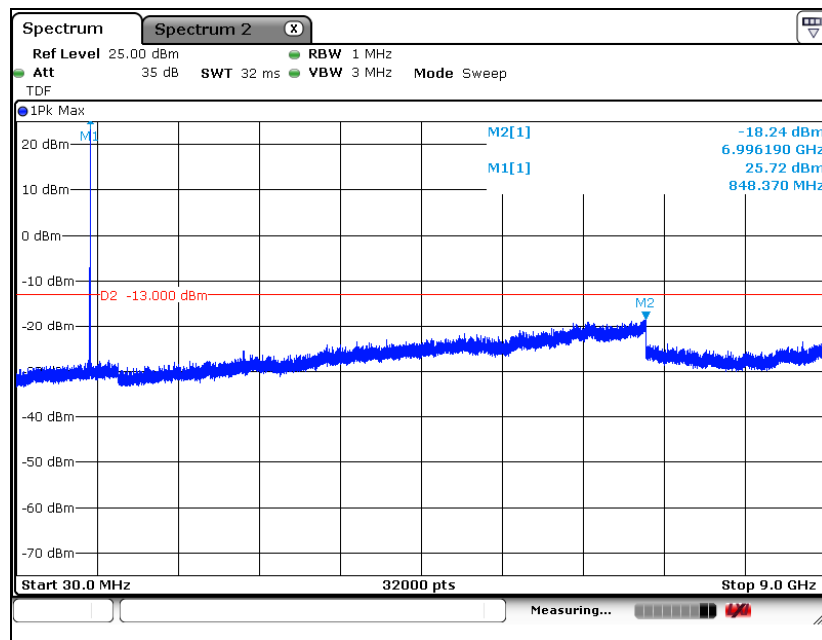

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company. This test report does not assure KOLAS accreditation.

7. Band Edge

7.1. Limit

FCC

- §22.917(a), the power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10\log(P)$ dB.

- §27.53(m)(4), For mobile digital stations, the attenuation factor shall be not less than $40 + 10\log_{10}(P)$ dB on all frequencies between the channel edge and 5 megahertz from the channel edge, $43 + 10\log_{10}(P)$ dB on all frequencies between 5 megahertz and X megahertz from the channel edge, and $55 + 10\log_{10}(P)$ dB on all frequencies more than X megahertz from the channel edge, where X is the greater of 6 megahertz or the actual emission bandwidth as defined in paragraph (m)(6) of this section. In addition, the attenuation factor shall not be less than $43 + 10\log_{10}(P)$ dB on all frequencies between 2 490.5 MHz and 2 496 MHz and $55 + 10\log_{10}(P)$ dB at or below 2 490.5 MHz. Mobile Satellite Service licensees operating on frequencies below 2 495 MHz may also submit a documented interference complaint against BRS licensees operating on channel BRS Channel 1 on the same terms and conditions as adjacent channel BRS or EBS licensees.

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company. This test report does not assure KOLAS accreditation.

IC

- RSS-132 Issue 3

5.5, Mobile and base station equipment shall comply with the limits in (i) and (ii) below.

(i) In the first 1.0 MHz band immediately outside and adjacent to each of the sub-bands specified in Section 5.1, the power of emissions per any 1 % of the occupied bandwidth shall be attenuated (in dB) below the transmitter output power P (dB W) by at least $43 + 10 \log_{10} p$ (watts).

(ii) After the first 1.0 MHz immediately outside and adjacent to each of the sub-bands, the power of emissions in any 100 kHz bandwidth shall be attenuated (in dB) below the transmitter output power P (dB W) by at least $43 + 10 \log_{10} p$ (watts). If the measurement is performed using 1 % of the occupied bandwidth, power integration over 100 kHz is required.

- RSS-199 Issue 3

In the 1 MHz band immediately outside and adjacent to the channel edge, the unwanted emission power shall be measured with a resolution bandwidth of at least 1% of the occupied bandwidth for base station and fixed subscriber equipment, and 2% for mobile subscriber equipment. Beyond the 1 MHz band, a resolution bandwidth of 1 MHz shall be used. A narrower resolution bandwidth can be used, provided that the measured power is integrated over the full required measurement bandwidth of 1 MHz, or 1% or 2% of the occupied bandwidth, as applicable.

Equipment shall comply with the following unwanted emission limits:

- a. for base station and fixed subscriber equipment, the power of any unwanted emissions measured as above shall be attenuated (in dB) below the transmitter power, P (dB W), by at least $43 + 10 \log_{10} p$
- b. for mobile subscriber equipment, the power of any unwanted emissions measured as above shall be attenuated (in dB) below the transmitter power, P (dB W), by at least:
 - i. $40 + 10 \log_{10} p$ from the channel edges to 5 MHz away
 - ii. $43 + 10 \log_{10} p$ between 5 MHz and X MHz from the channel edges, and
 - iii. $55 + 10 \log_{10} p$ at X MHz and beyond from the channel edges

In addition, the attenuation shall not be less than $43 + 10 \log_{10} p$ on all frequencies between 2 490.5 MHz and 2 496 MHz, and $55 + 10 \log_{10} p$ at or below 2 490.5 MHz.


In (a) and (b), p is the transmitter power measured in watts and X is 6 MHz or the equipment occupied bandwidth, whichever is greater.

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company. This test report does not assure KOLAS accreditation.

7.2. Test Procedure

The test follows section 6.0 of FCC KDB Publication 971168 D01 v03r01.

- a. Span was set large enough so as to capture all out of band emissions near the band edge.
- b. RBW $\geq 1\%$ of OBW
- c. VBW $\geq 3 \times$ RBW.
- d. Detector = RMS.
- e. Trace mode = Average.
- f. Sweep time = Auto.
- g. The trace was allowed to stabilize.
- h. All path loss of frequency range was investigated and compensated to spectrum analyzer as TDF function.

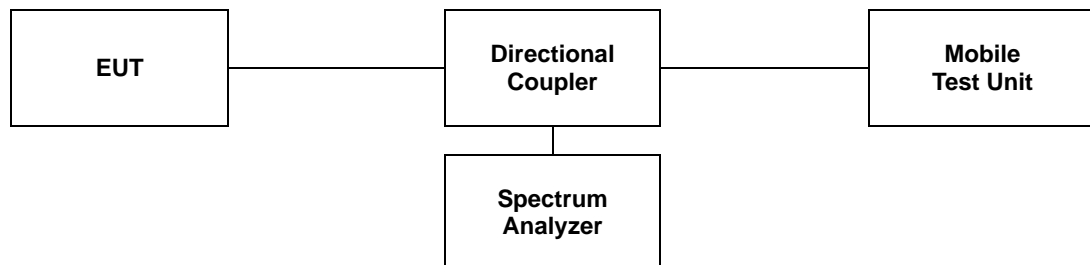


The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company. This test report does not assure KOLAS accreditation.

7.3. Test Results

Ambient temperature : (23 ± 1) °C
Relative humidity : 47 % R.H.


LTE band 5 (1.4 MHz - QPSK_RB 6)

Low Channel

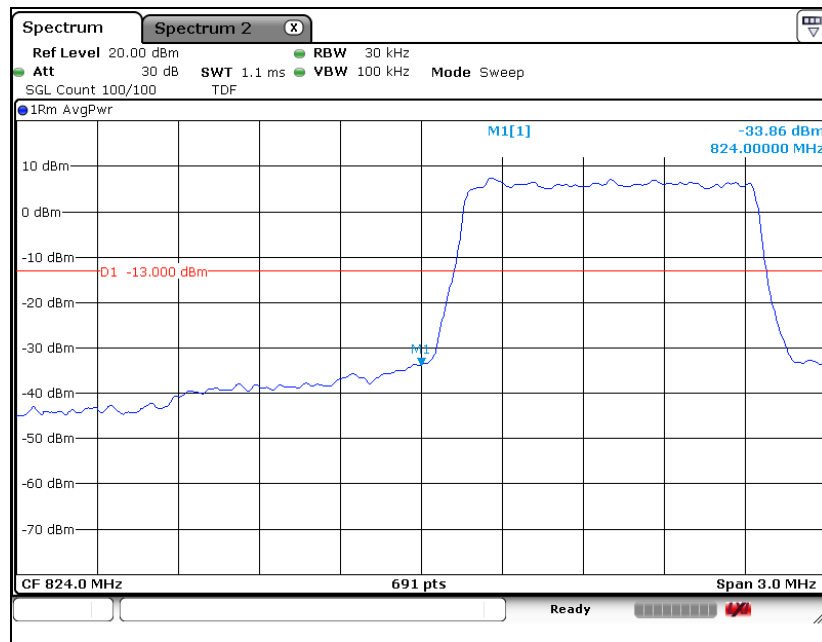

LTE band 5 (1.4 MHz - QPSK_RB 1)


Low Channel

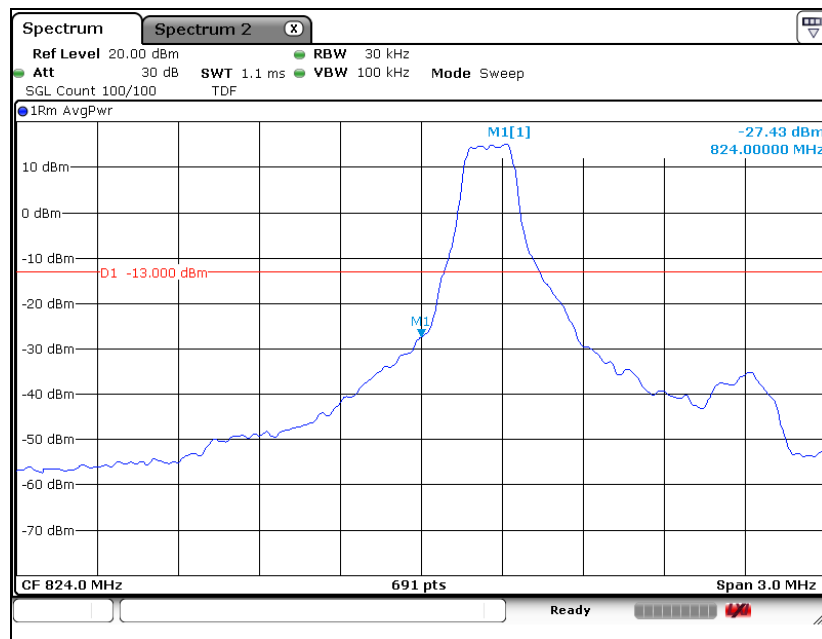

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company. This test report does not assure KOLAS accreditation.


LTE band 5 (1.4 MHz - QPSK_RB 6)

High Channel

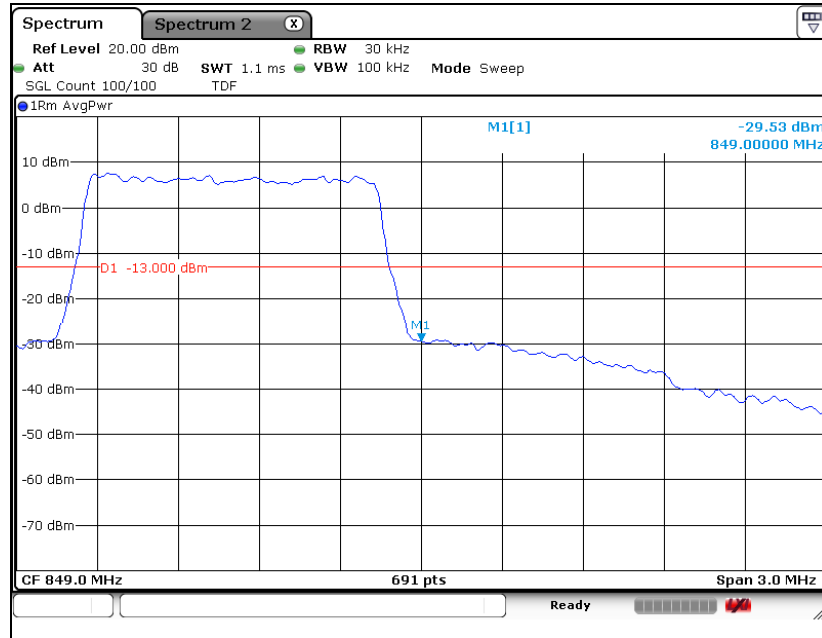

LTE band 5 (1.4 MHz - QPSK_RB 1)


High Channel

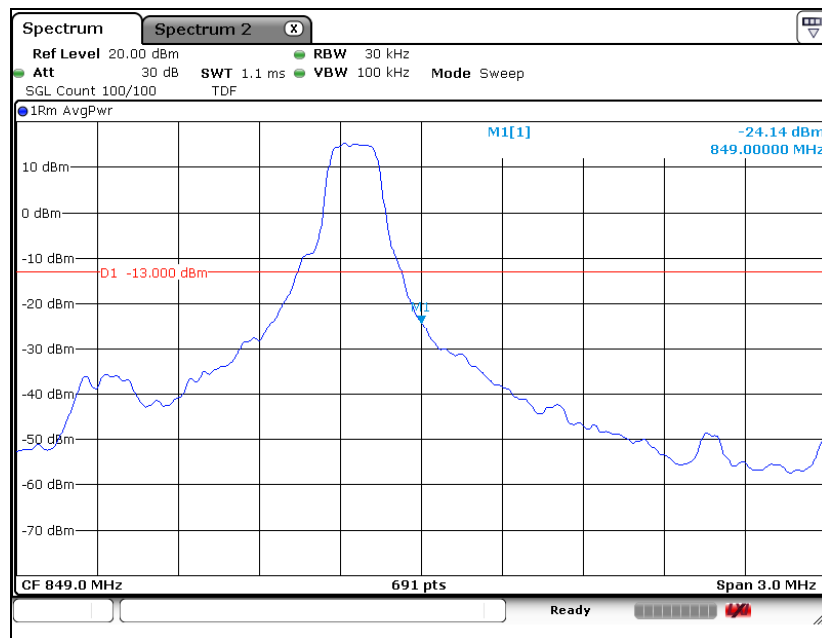

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company. This test report does not assure KOLAS accreditation.


LTE band 5 (3 MHz - QPSK_RB 15)

Low Channel

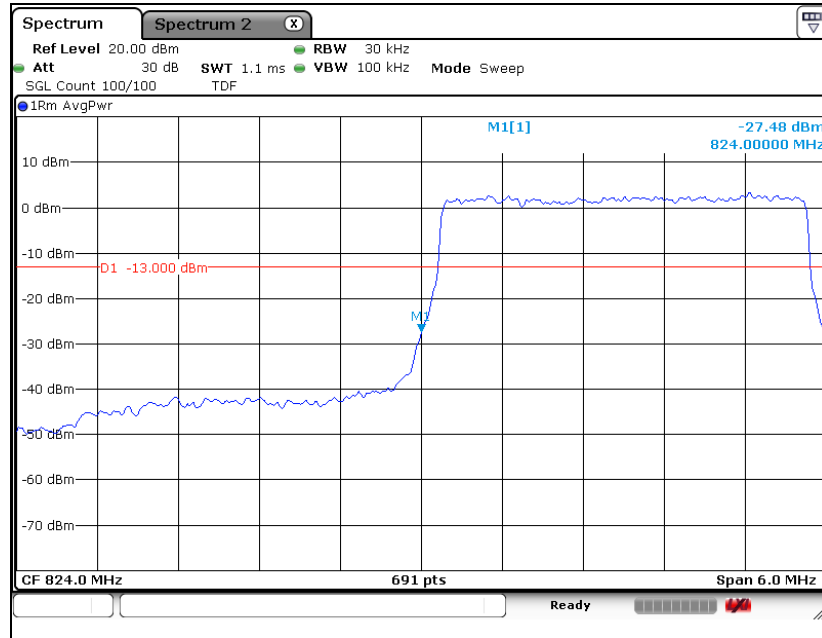

LTE band 5 (3 MHz - QPSK_RB 1)


Low Channel

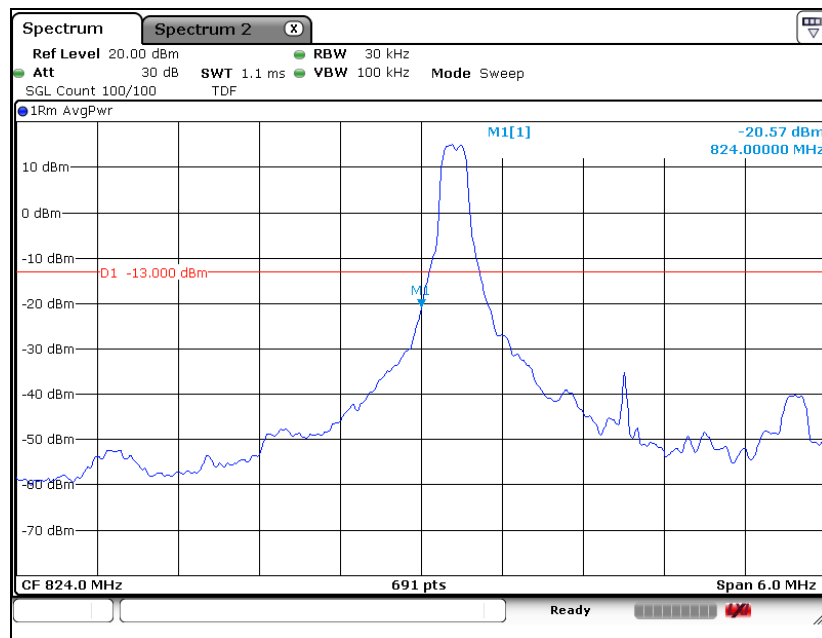

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company. This test report does not assure KOLAS accreditation.

LTE band 5 (3 MHz - QPSK_RB 15)

High Channel

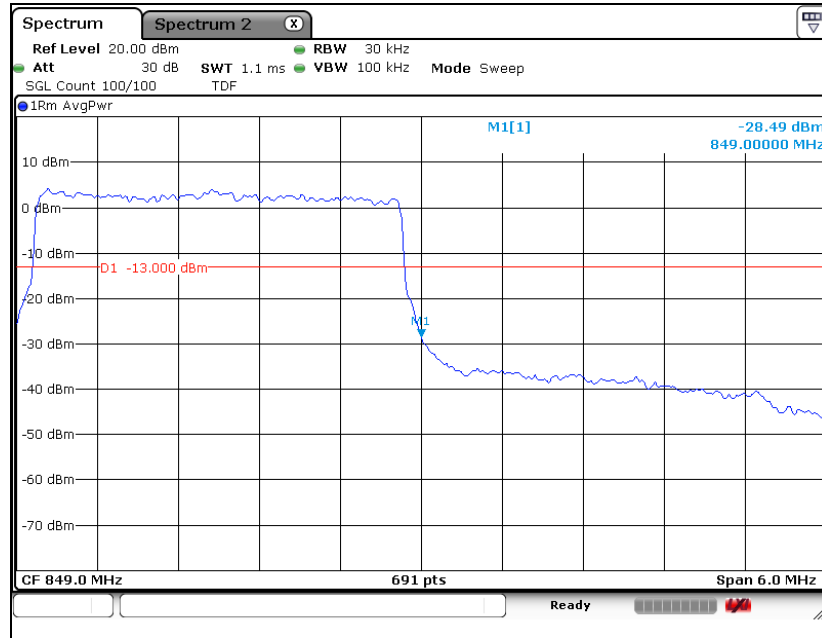

LTE band 5 (3 MHz - QPSK_RB 1)


High Channel



The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company. This test report does not assure KOLAS accreditation.


LTE band 5 (5 MHz - QPSK_RB 25)

Low Channel

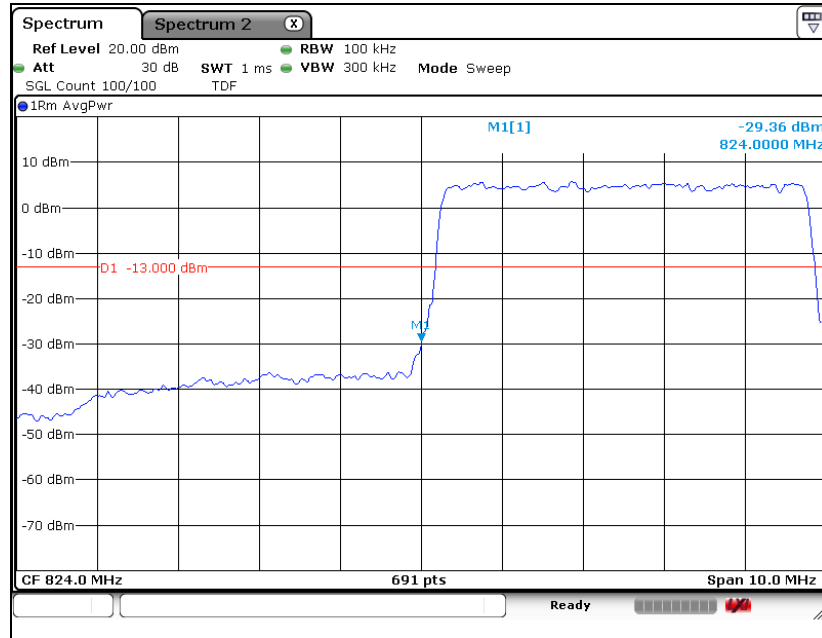

LTE band 5 (5 MHz - QPSK_RB 1)


Low Channel

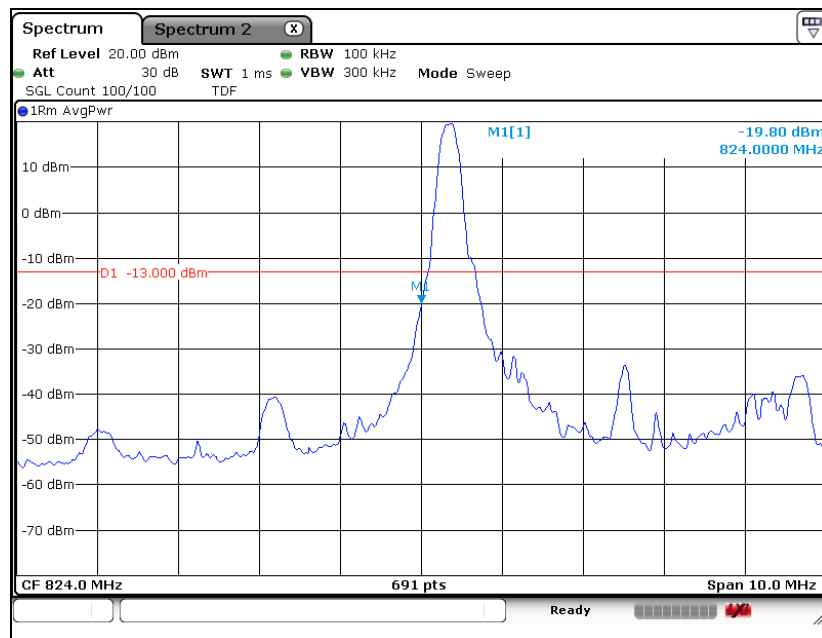

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company. This test report does not assure KOLAS accreditation.


LTE band 5 (5 MHz - QPSK_RB 25)

High Channel

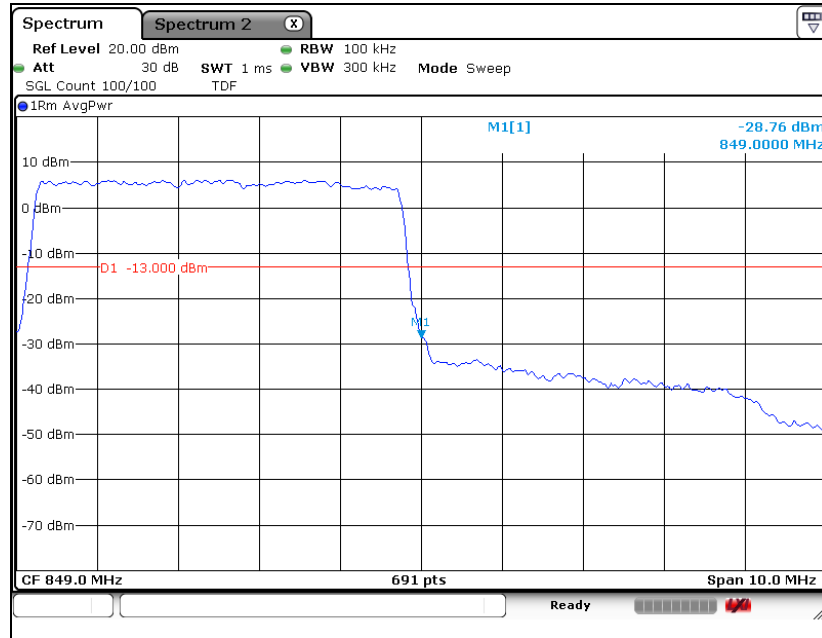

LTE band 5 (5 MHz - QPSK_RB 1)


High Channel

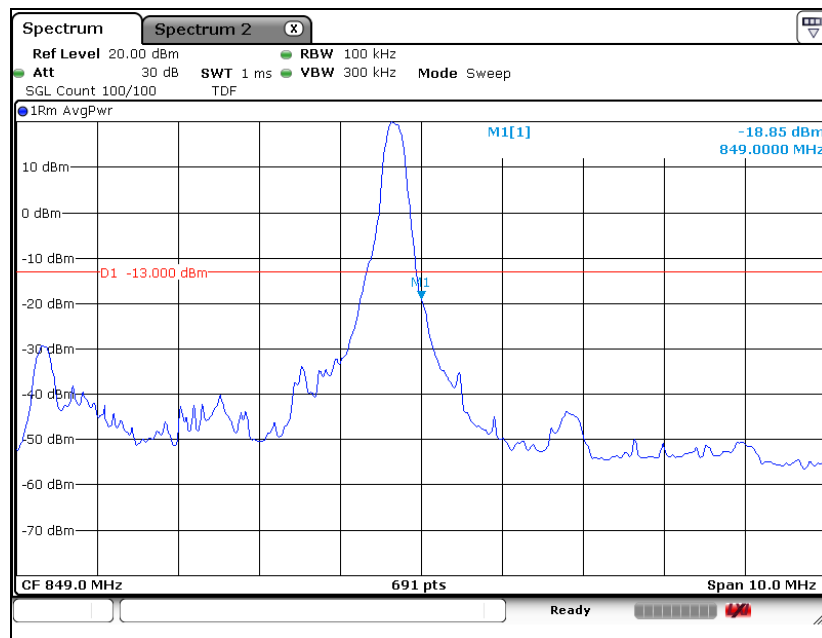

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company. This test report does not assure KOLAS accreditation.


LTE band 5 (10 MHz - QPSK_RB 50)

Low Channel

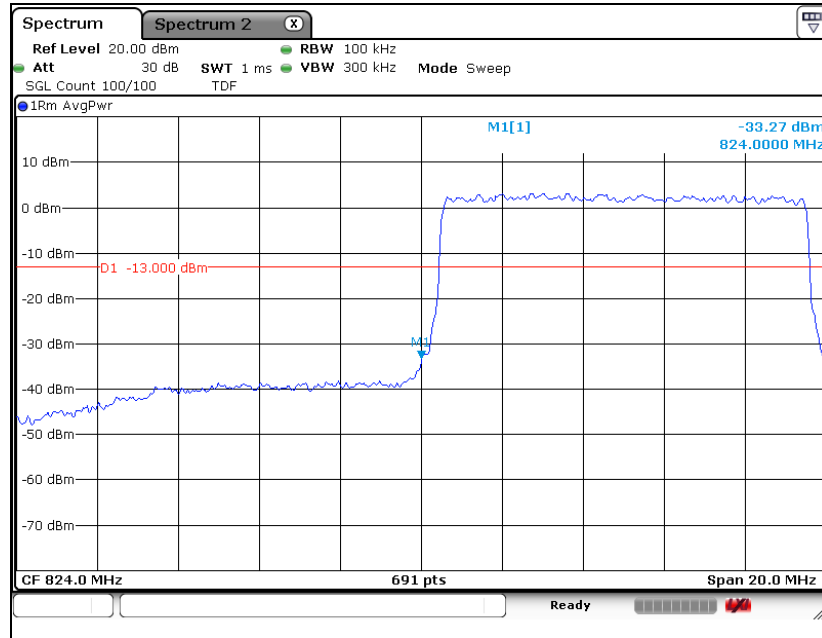

LTE band 5 (10 MHz - QPSK_RB 1)


Low Channel

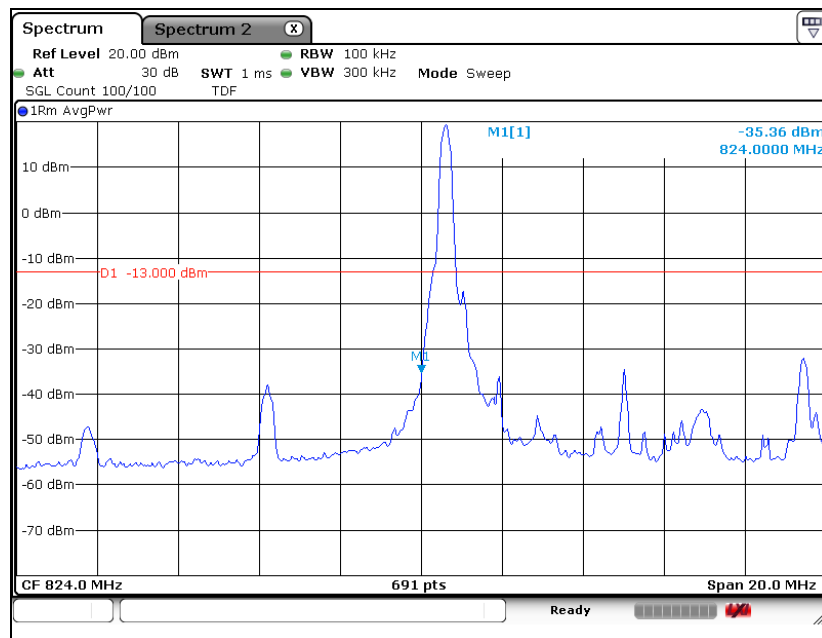

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company. This test report does not assure KOLAS accreditation.


LTE band 5 (10 MHz - QPSK_RB 50)

High Channel

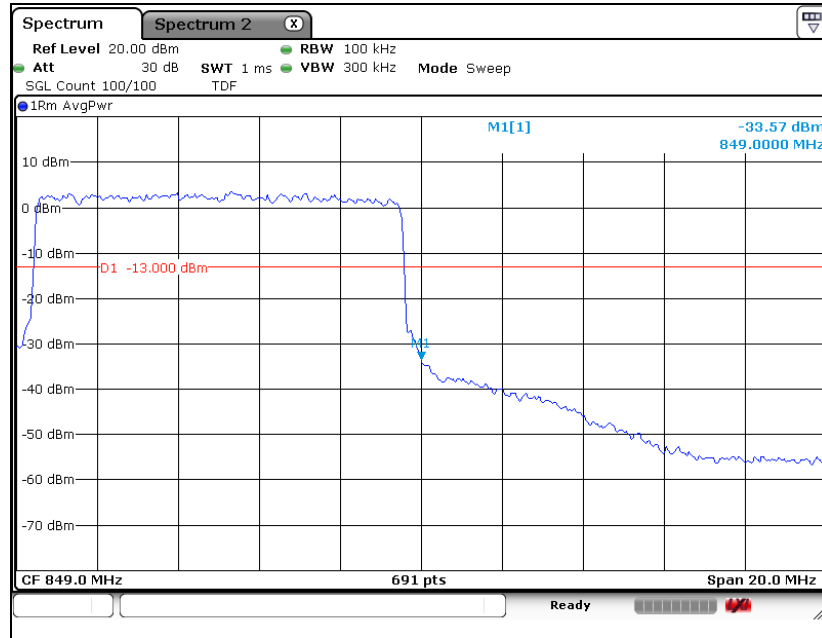

LTE band 5 (10 MHz - QPSK_RB 1)


High Channel

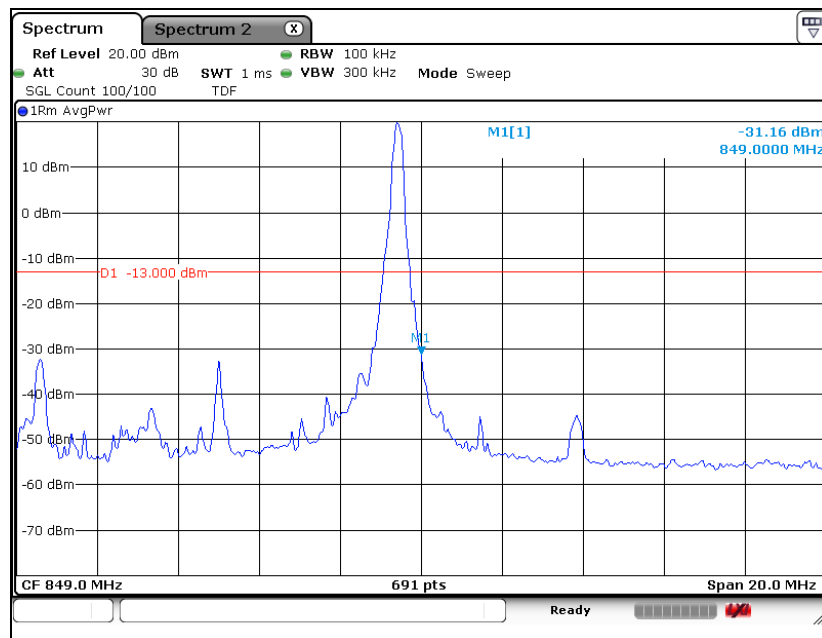

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company. This test report does not assure KOLAS accreditation.


LTE band 7 (5 MHz - QPSK_RB 25)

Low Channel

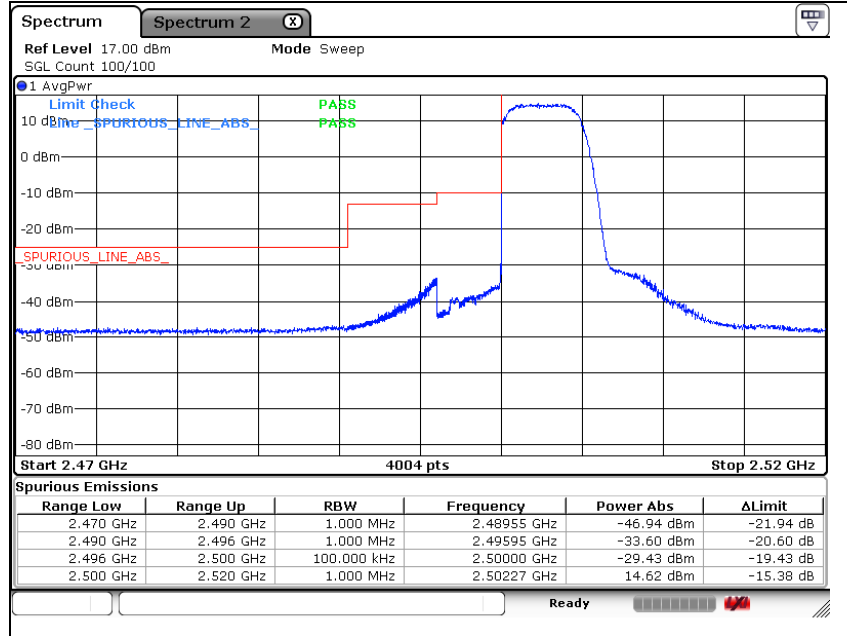

LTE band 7 (5 MHz - QPSK_RB 1)


Low Channel

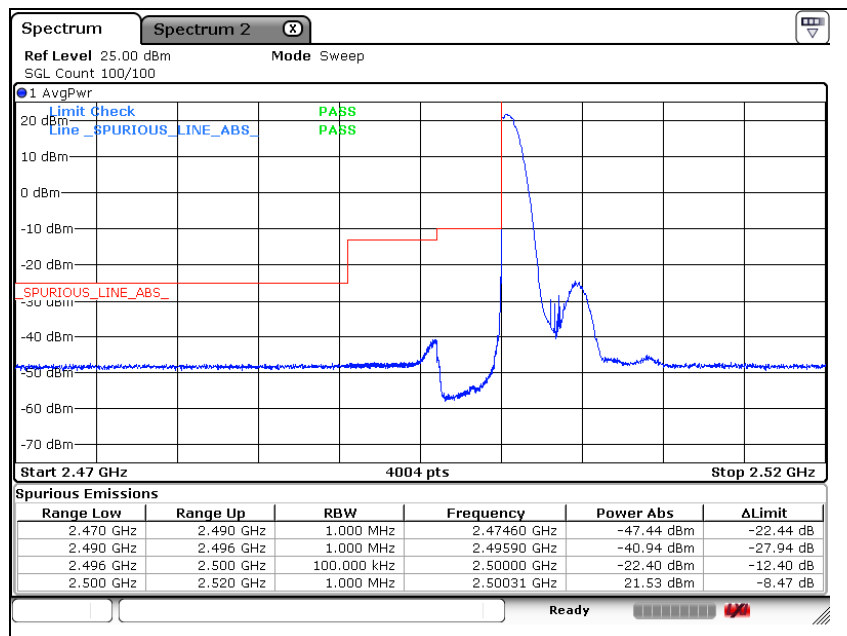

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company. This test report does not assure KOLAS accreditation.


LTE band 7 (5 MHz - QPSK_RB 25)

High Channel

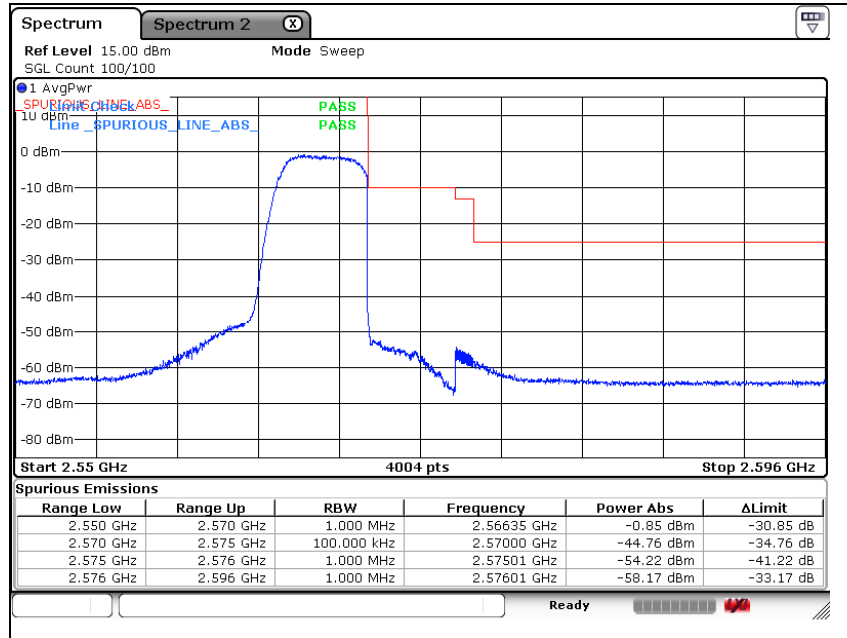

LTE band 7 (5 MHz - QPSK_RB 1)


High Channel

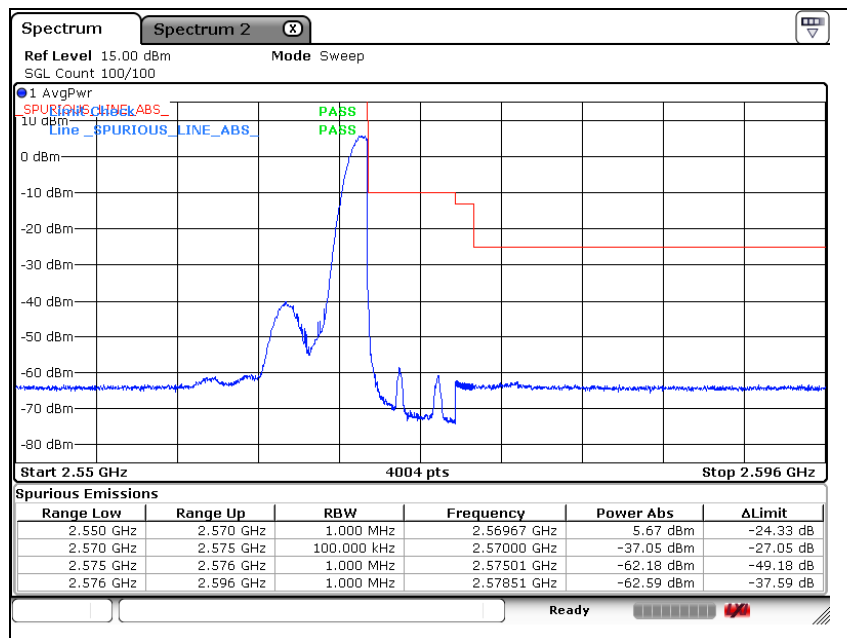

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company. This test report does not assure KOLAS accreditation.


LTE band 7 (10 MHz - QPSK_RB 50)

Low Channel

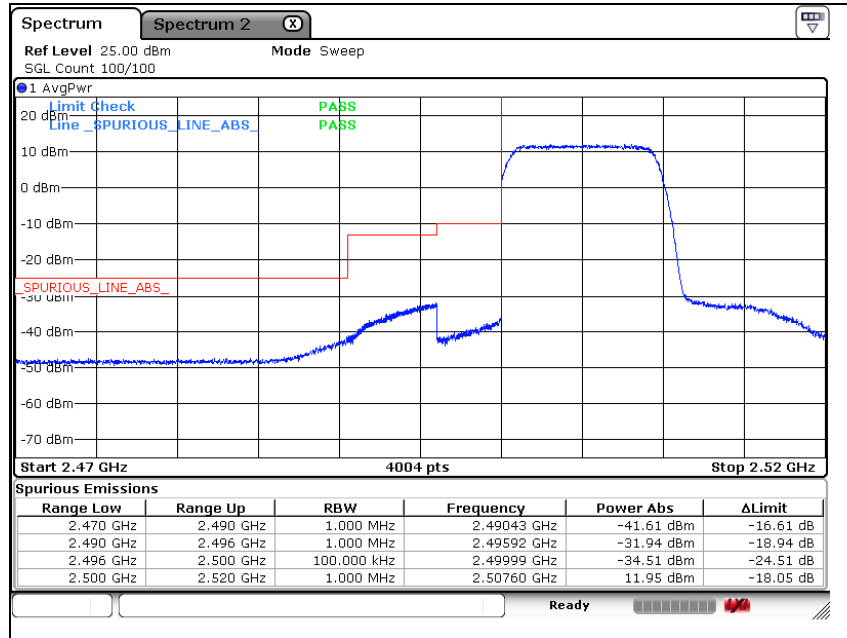

LTE band 7 (10 MHz - QPSK_RB 1)


Low Channel

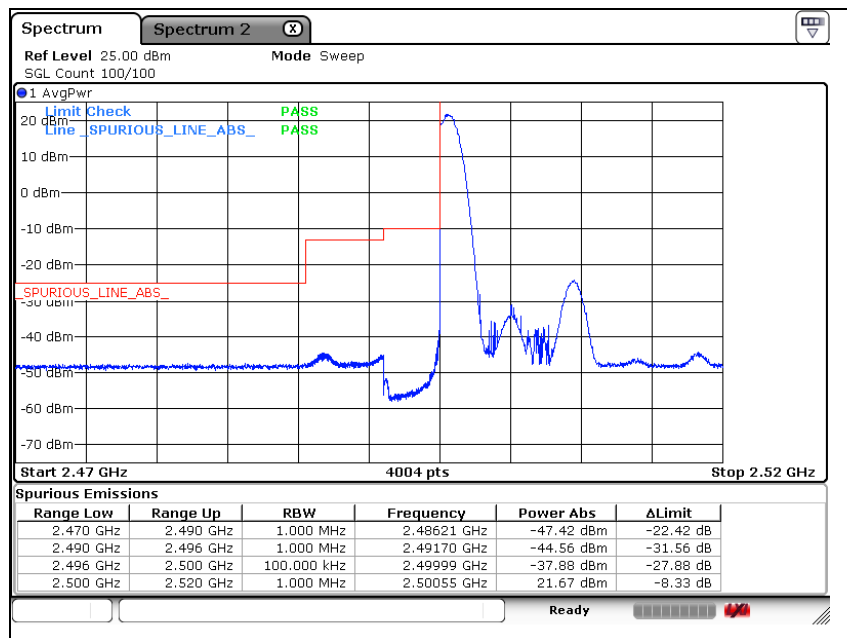

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company. This test report does not assure KOLAS accreditation.


LTE band 7 (10 MHz - QPSK_RB 50)

High Channel

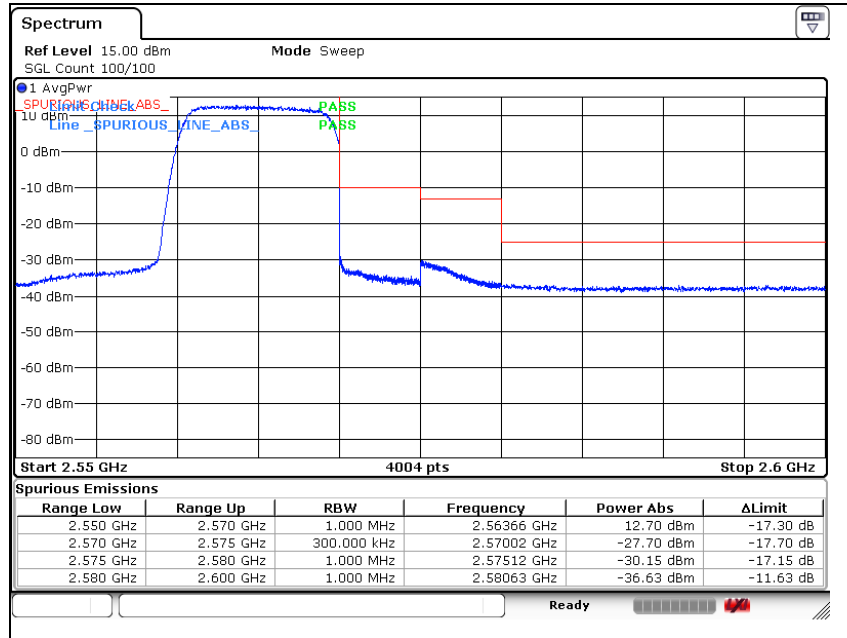

LTE band 7 (10 MHz - QPSK_RB 1)


High Channel

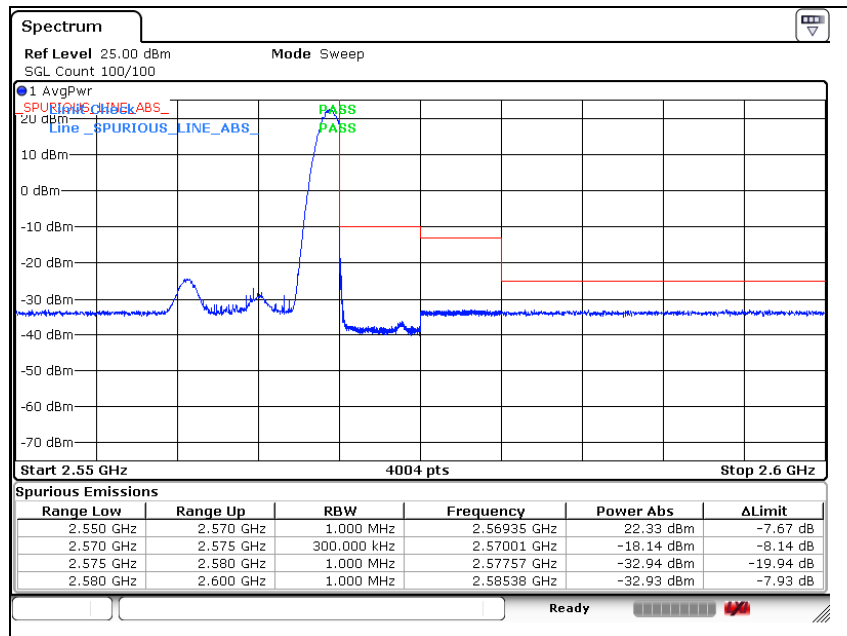

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company. This test report does not assure KOLAS accreditation.


LTE band 7 (15 MHz - QPSK_RB 75)

Low Channel

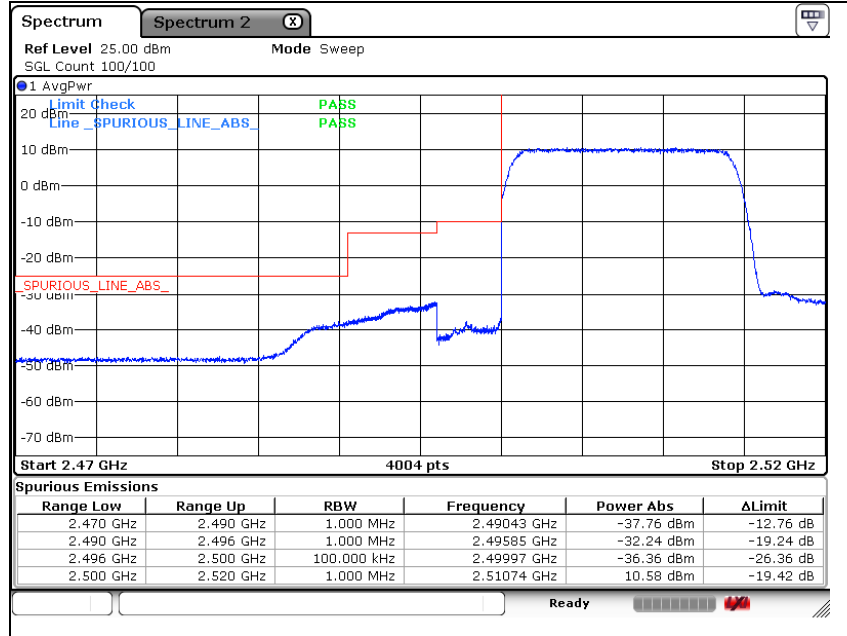

LTE band 7 (15 MHz - QPSK_RB 1)


Low Channel

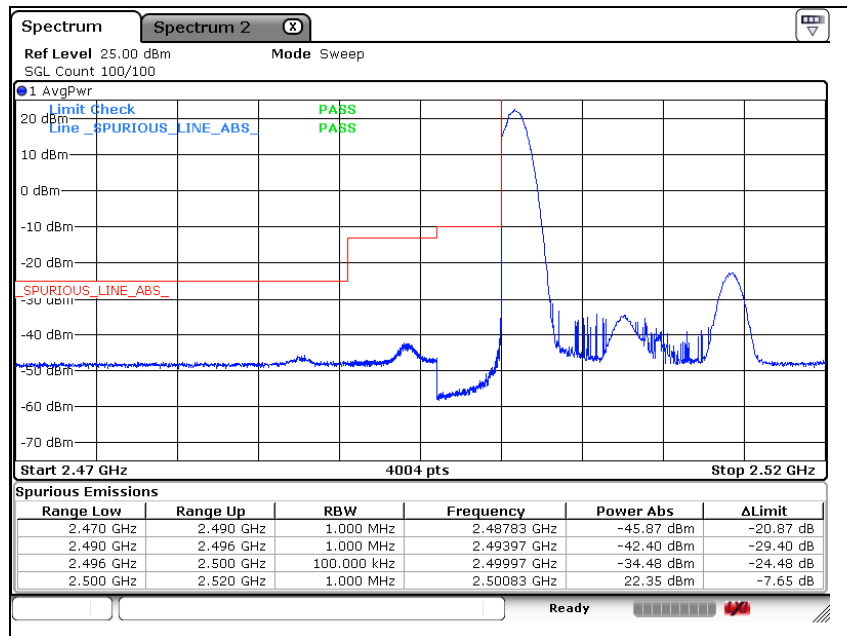

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company. This test report does not assure KOLAS accreditation.


LTE band 7 (15 MHz - QPSK_RB 75)

High Channel

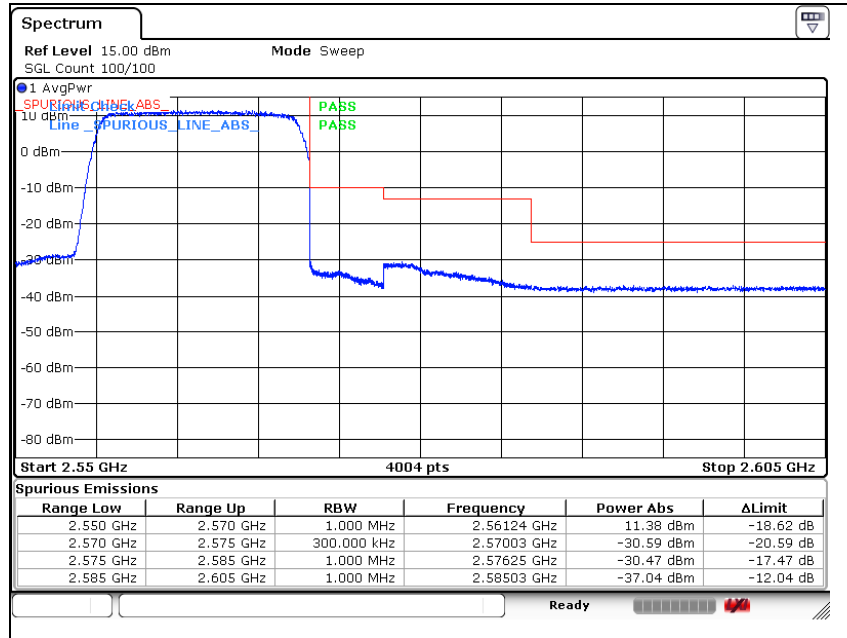

LTE band 7 (15 MHz - QPSK_RB 1)


High Channel

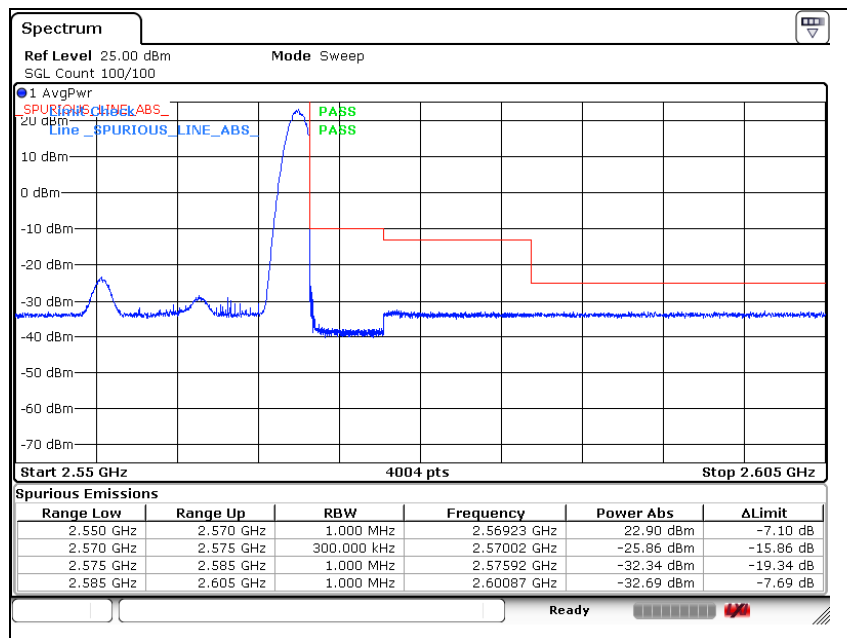

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company. This test report does not assure KOLAS accreditation.


LTE band 7 (20 MHz - QPSK_RB 100)

Low Channel

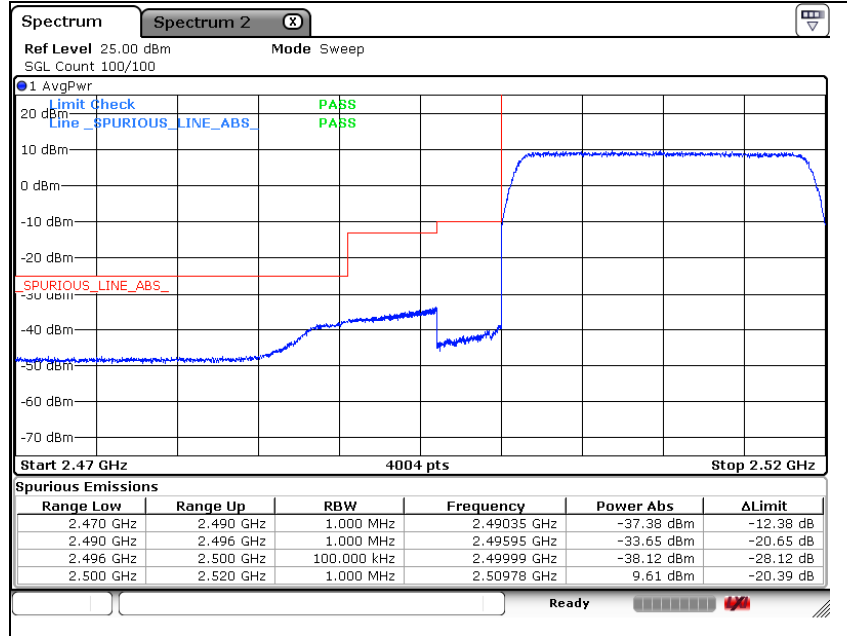

LTE band 7 (20 MHz - QPSK_RB 1)


Low Channel

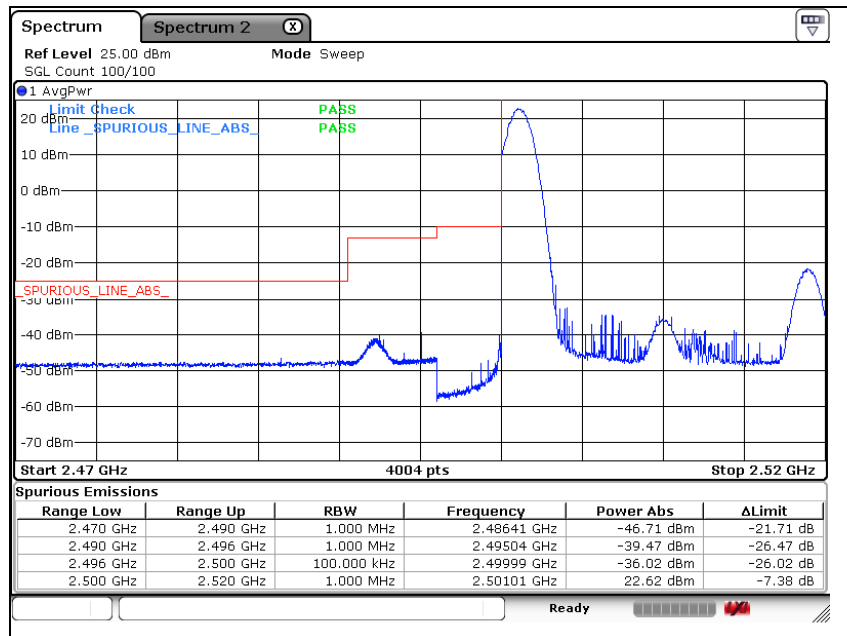

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company. This test report does not assure KOLAS accreditation.


LTE band 7 (20 MHz - QPSK_RB 100)

High Channel

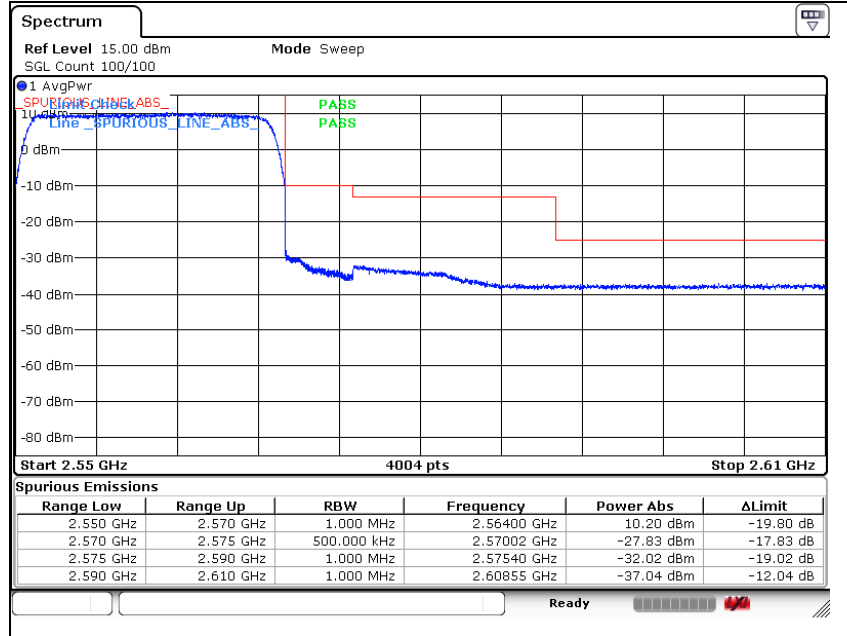

LTE band 7 (20 MHz - QPSK_RB 1)


High Channel

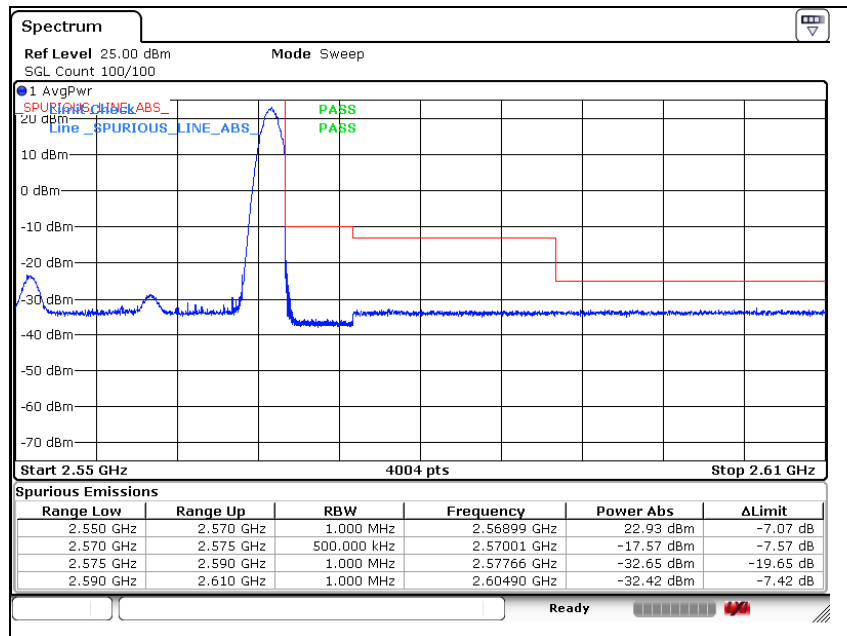

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company. This test report does not assure KOLAS accreditation.


LTE band 26 (1.4 MHz - QPSK_RB 6)

Low Channel

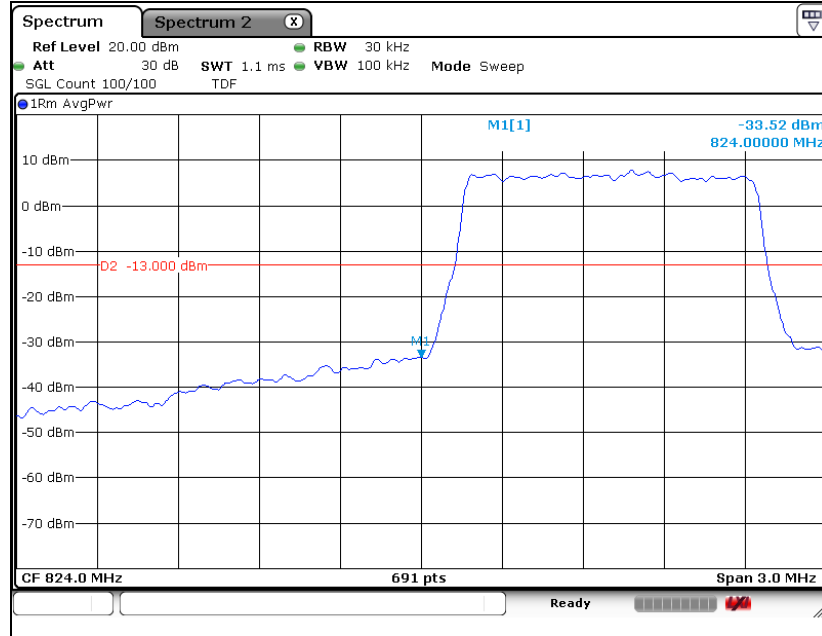

LTE band 26 (1.4 MHz - QPSK_RB 1)


Low Channel

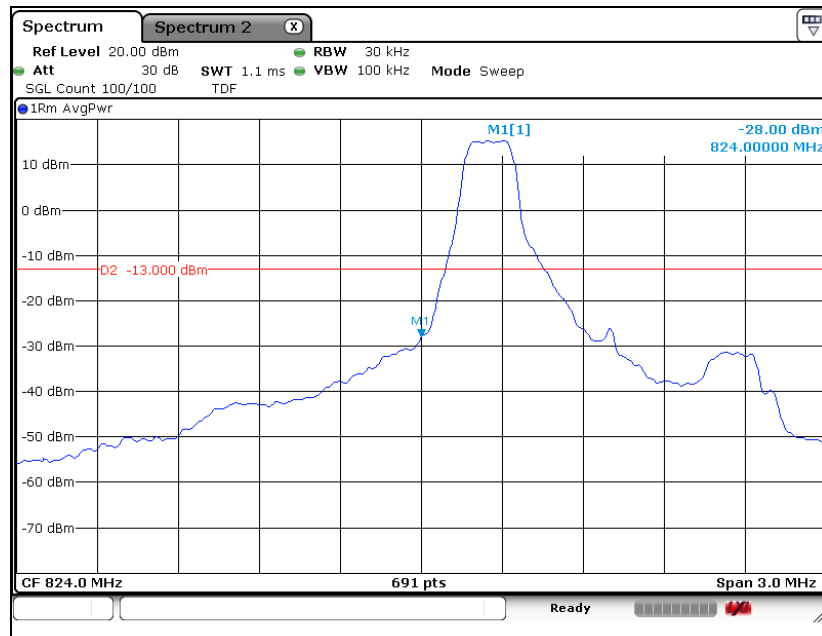

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company. This test report does not assure KOLAS accreditation.

LTE band 26 (1.4 MHz - QPSK_RB 6)

High Channel

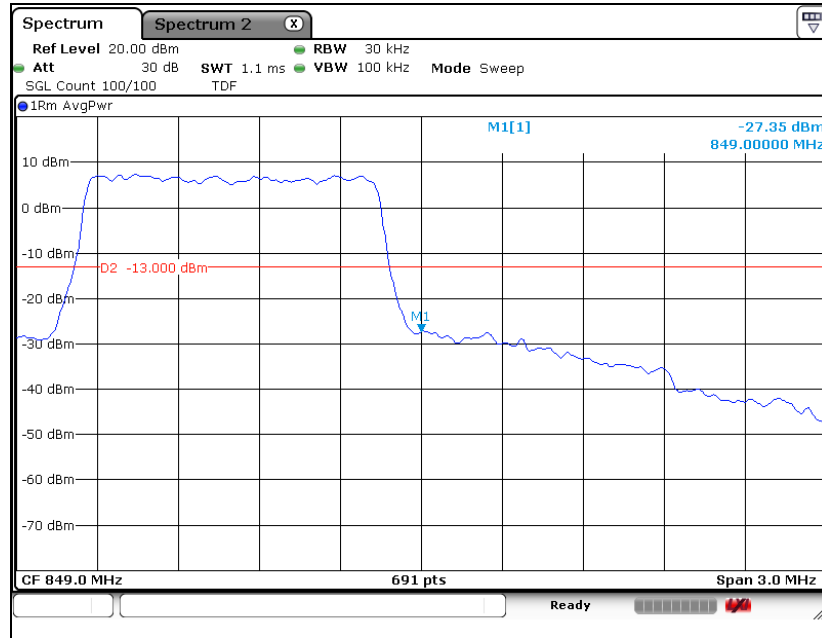

LTE band 26 (1.4 MHz - QPSK_RB 1)


High Channel



The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company. This test report does not assure KOLAS accreditation.


LTE band 26 (3 MHz - QPSK_RB 15)

Low Channel

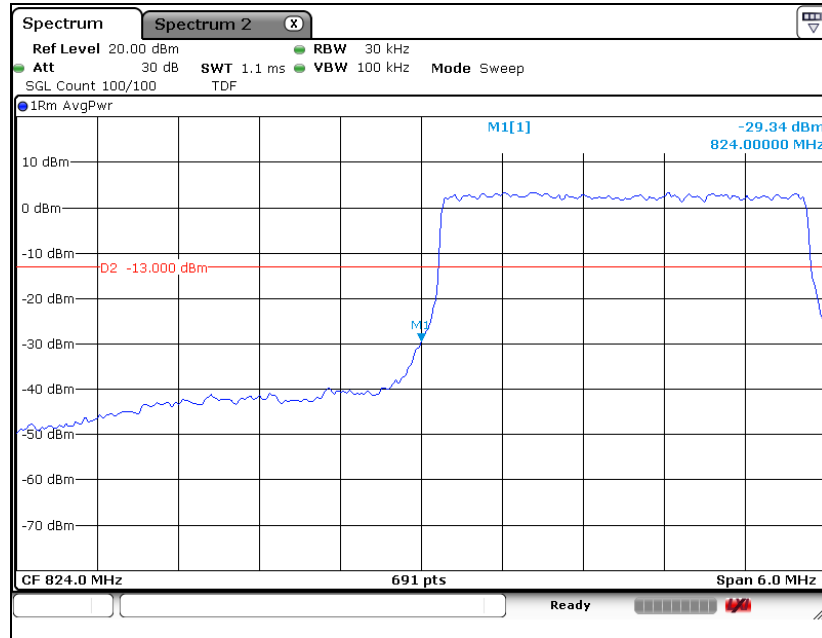

LTE band 26 (3 MHz - QPSK_RB 1)


Low Channel

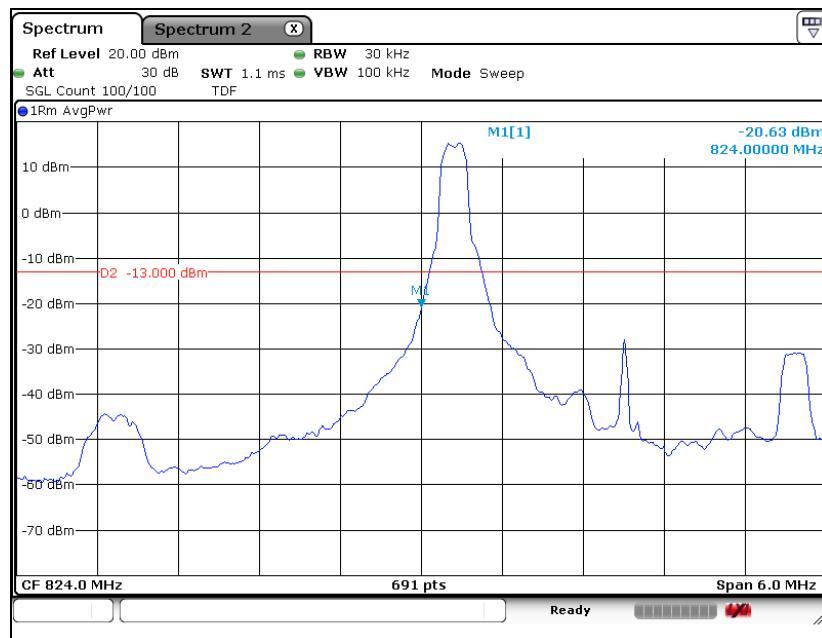

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company. This test report does not assure KOLAS accreditation.


LTE band 26 (3 MHz - QPSK_RB 15)

High Channel

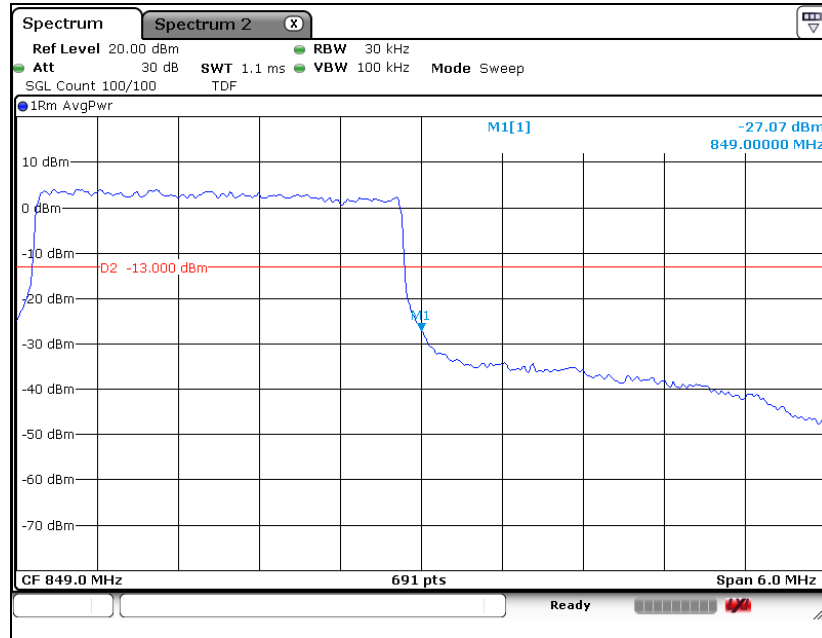

LTE band 26 (3 MHz - QPSK_RB 1)


High Channel

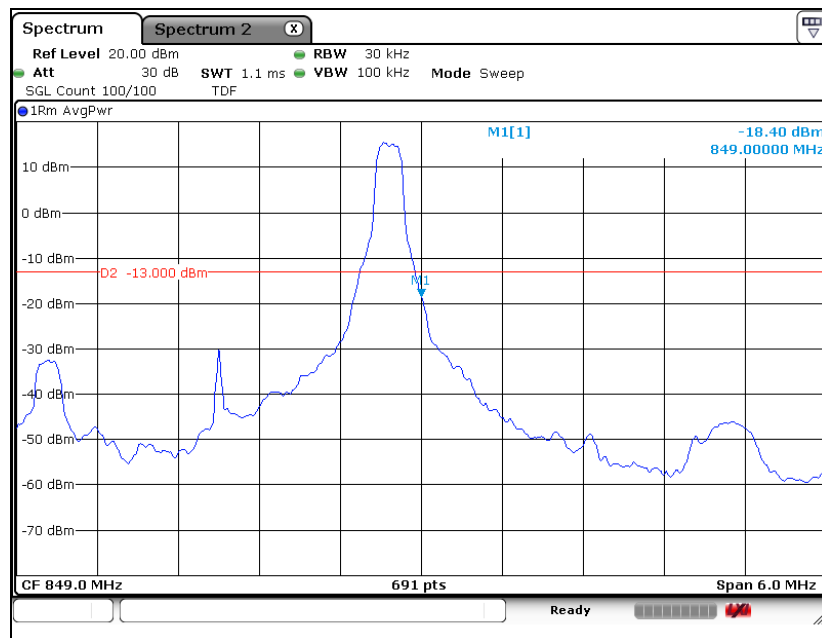

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company. This test report does not assure KOLAS accreditation.


LTE band 26 (5 MHz - QPSK_RB 25)

Low Channel

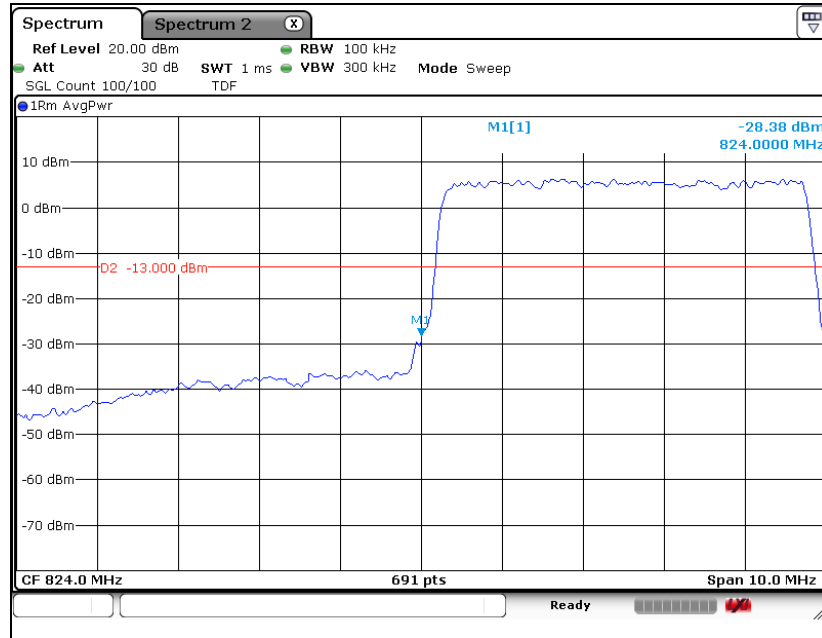

LTE band 26 (5 MHz - QPSK_RB 1)


Low Channel

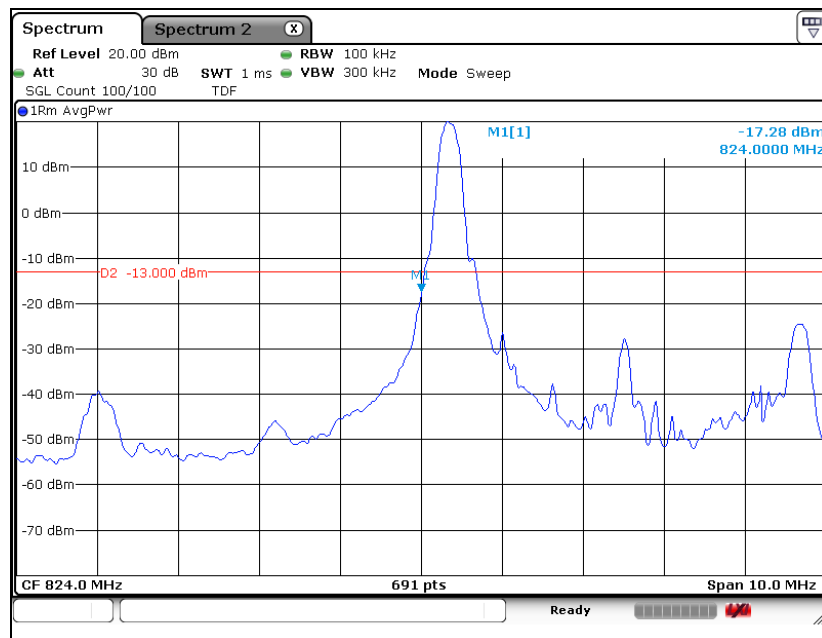

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company. This test report does not assure KOLAS accreditation.


LTE band 26 (5 MHz - QPSK_RB 25)

High Channel

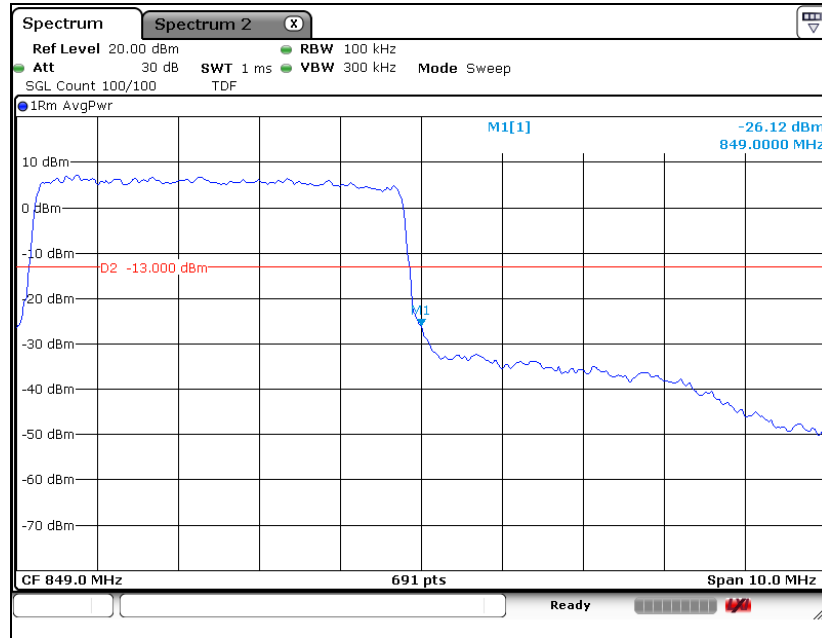

LTE band 26 (5 MHz - QPSK_RB 1)


High Channel

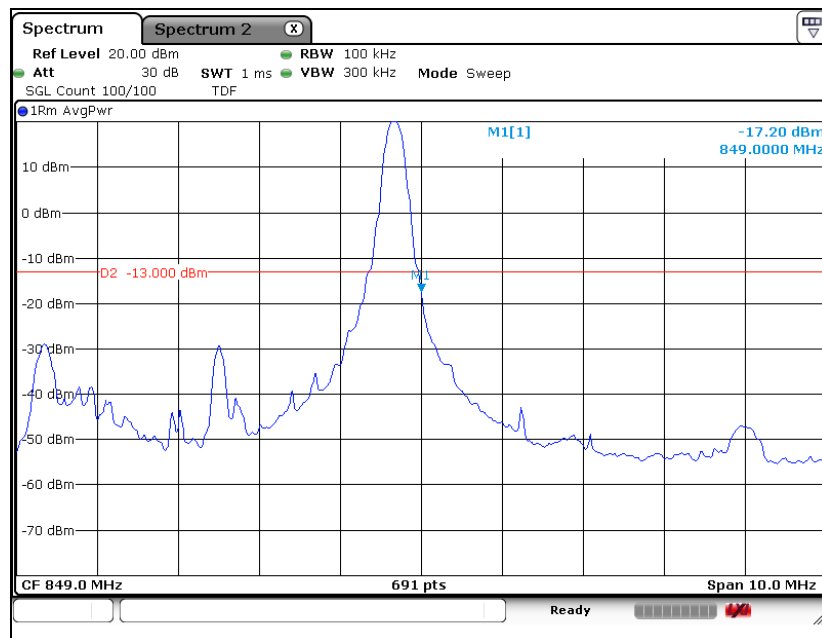

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company. This test report does not assure KOLAS accreditation.


LTE band 26 (10 MHz - QPSK_RB 50)

Low Channel

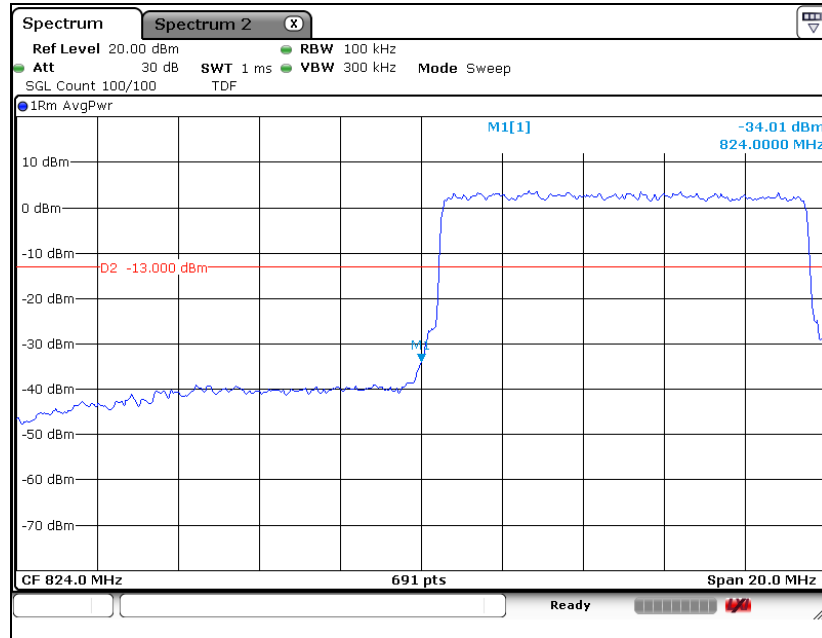

LTE band 26 (10 MHz - QPSK_RB 1)


Low Channel

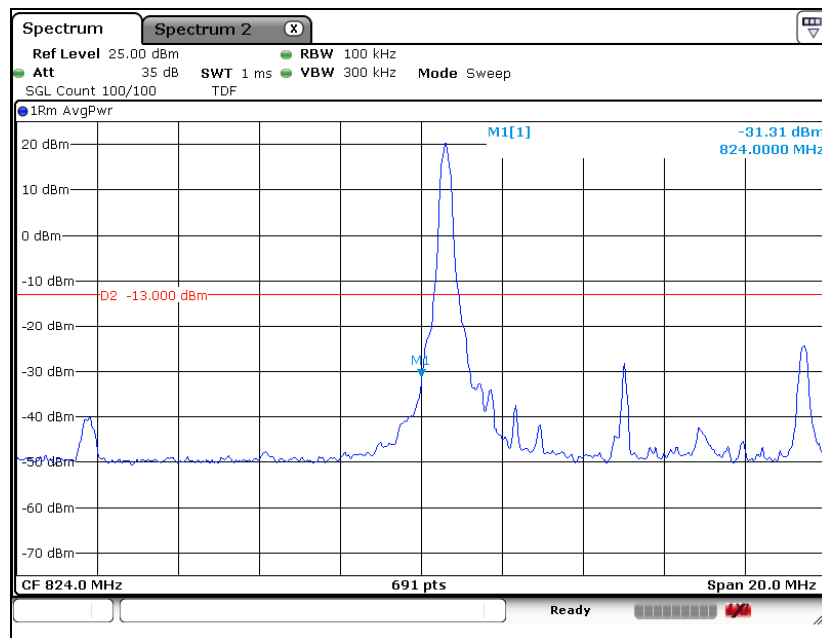

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company. This test report does not assure KOLAS accreditation.


LTE band 26 (10 MHz - QPSK_RB 50)

High Channel

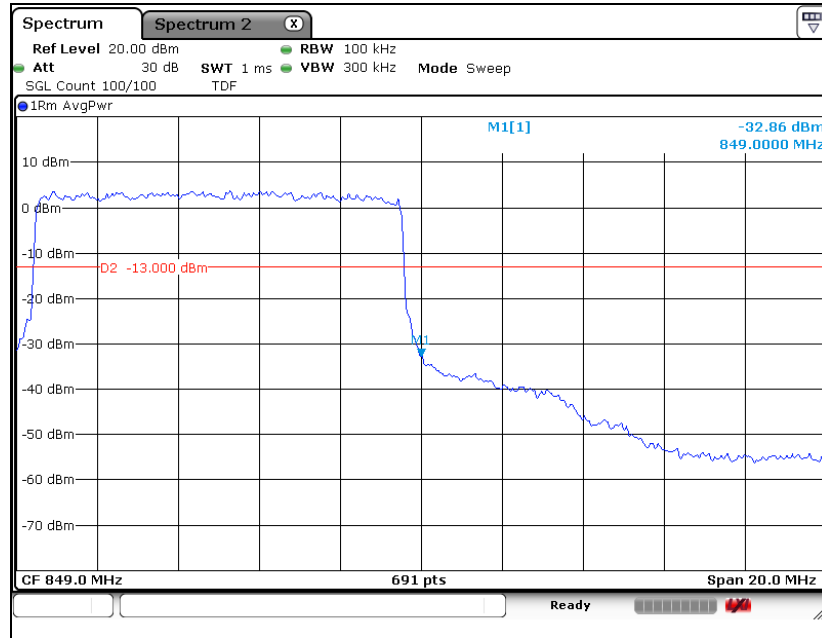

LTE band 26 (10 MHz - QPSK_RB 1)


High Channel

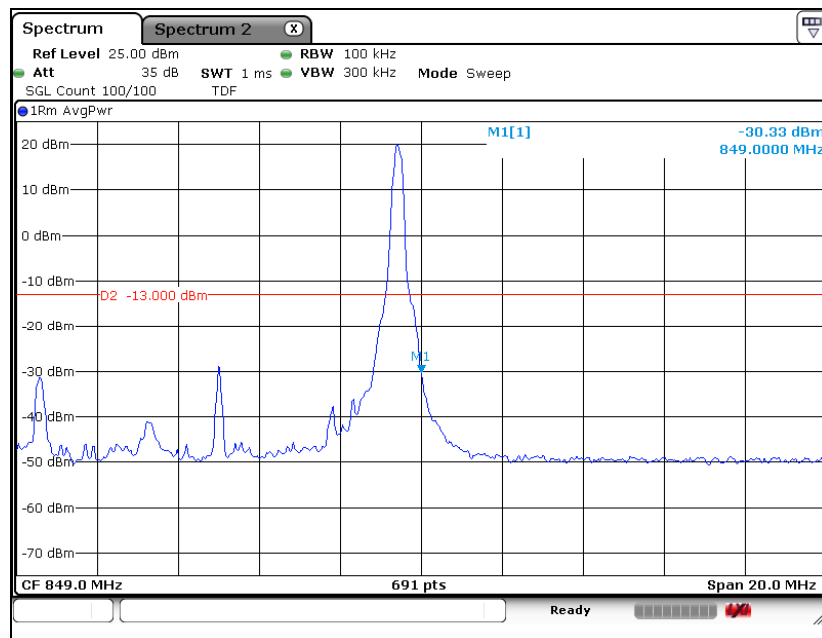

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company. This test report does not assure KOLAS accreditation.


LTE band 26 (15 MHz - QPSK_RB 75)

Low Channel

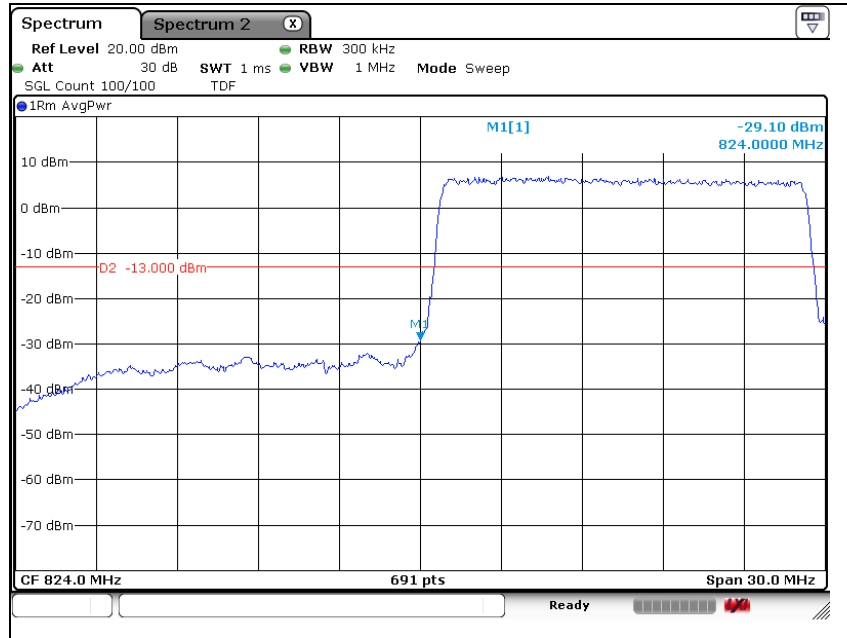

LTE band 26 (15 MHz - QPSK_RB 1)


Low Channel

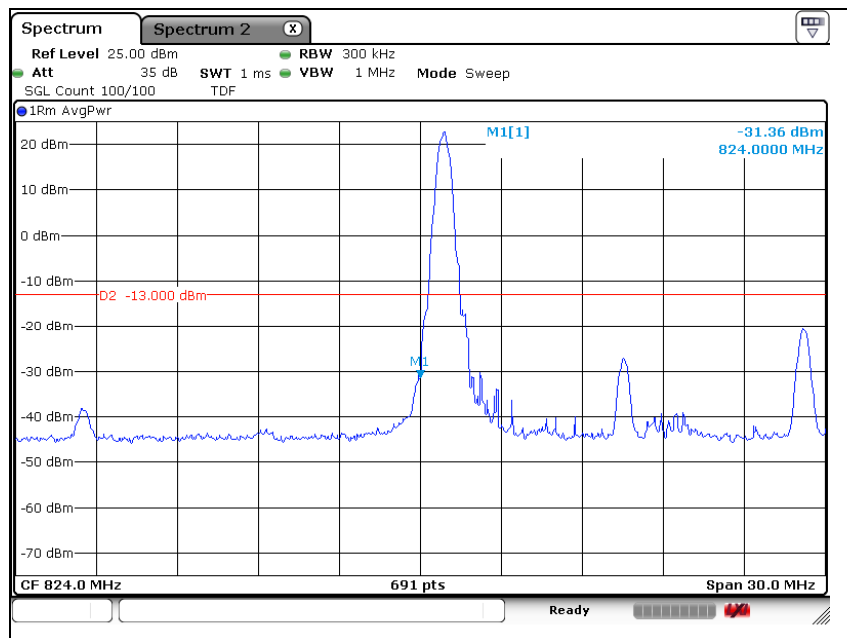

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company. This test report does not assure KOLAS accreditation.


LTE band 26 (15 MHz - QPSK_RB 75)

High Channel

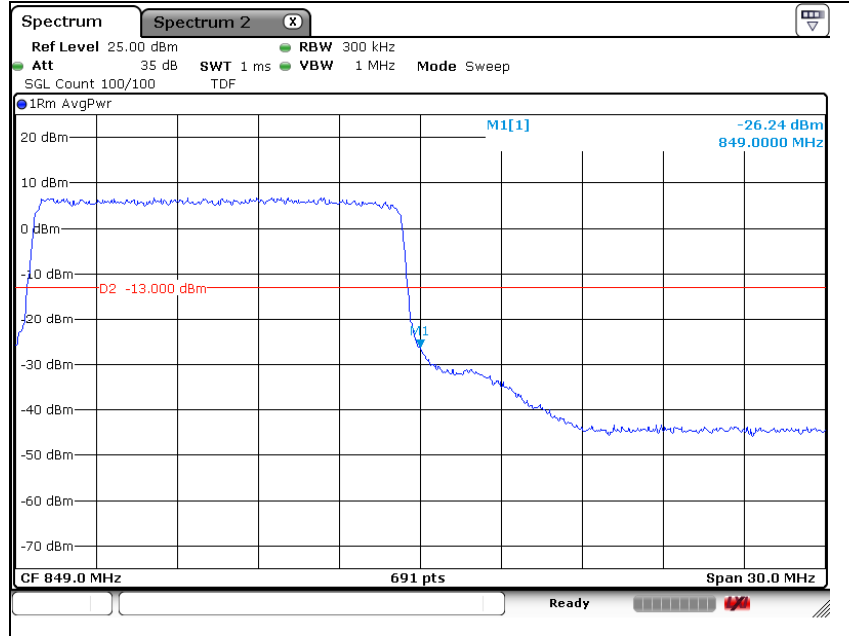

LTE band 26 (15 MHz - QPSK_RB 1)

High Channel

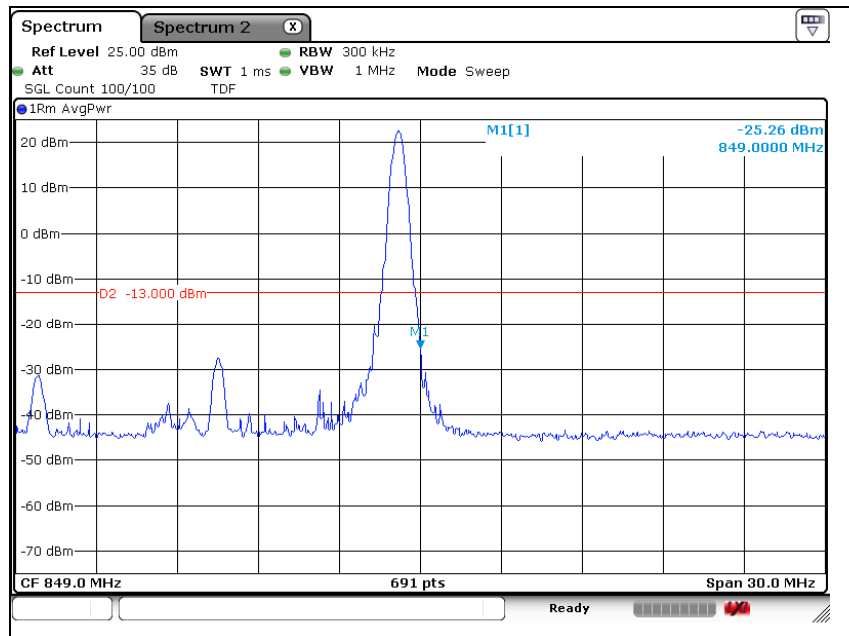

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company. This test report does not assure KOLAS accreditation.

8. Frequency Stability

8.1. Limit

FCC

- §2.1055 (a), The frequency stability shall be measured with variation of ambient temperature as follows:

- (1) From -30° to $+50^{\circ}$ centigrade for all equipment except that specified in paragraphs (a)(2) and (3) of this section.
- (2) From -20° to $+50^{\circ}$ centigrade for equipment to be licensed for use in the Maritime Services under part 80 of this chapter, except for Class A, B, and S Emergency Position Indicating Radiobeacons (EPIRBS), and equipment to be licensed for use above 952 MHz at operational fixed stations in all services, stations in the Local Television Transmission Service and Point-to-Point Microwave Radio Service under part 21 of this chapter, equipment licensed for use aboard aircraft in the Aviation Services under part 87 of this chapter, and equipment authorized for use in the Family Radio Service under part 95 of this chapter.
- (3) From 0° to $+50^{\circ}$ centigrade for equipment to be licensed for use in the Radio Broadcast Services under part 73 of this chapter.

- §2.1055 (d), The frequency stability shall be measured with variation of primary supply voltage as follows:

- (1) Vary primary supply voltage from 85 to 115 percent of the nominal value for other than hand carried battery equipment.
- (2) For hand carried, battery powered equipment, reduce primary supply voltage to the battery operating end point which shall be specified by the manufacturer.
- (3) The supply voltage shall be measured at the input to the cable normally provided with the equipment, or at the power supply terminals if cables are not normally provided. Effects on frequency of transmitter keying (except for broadcast transmitters) and any heating element cycling at the nominal supply voltage and at each extreme also shall be shown.

- §22.355, the carrier frequency of each transmitter in the Public Mobile Services must be maintained within the tolerances given in Table of this section.

For Mobile devices operating in the 824 to 849 MHz band at a power level less than or equal to 3 Watts, the limit specified in Table C-1 is ± 2.5 ppm.

- §27.54, the frequency stability shall be sufficient to ensure that the fundamental emissions stay within the authorized bands of operation.

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company. This test report does not assure KOLAS accreditation.

IC

- RSS-132 Issue 3

5.3, the carrier frequency shall not depart from the reference frequency in excess of ± 2.5 ppm for mobile stations and ± 1.5 ppm for base stations.

- RSS-199 Issue 3

5.3, the transmitter frequency stability limit shall be determined as follows:


- a. the frequency offset shall be measured according to the procedure described in RSS-Gen and recorded
- b. using a resolution bandwidth equal to that permitted within the 1 MHz band immediately outside the channel edge, as found in section 4.5, reference points will be selected at the unwanted emission limits, which comply with the attenuation specified in section 4.5 for the type of device under test, on the emission mask of the lowest and highest channels. The frequency at these points shall be recorded as f_L and f_H respectively

The applicant shall ensure compliance with frequency stability requirements by showing that f_L minus the frequency offset and f_H plus the frequency offset is within the frequency range in which the equipment is designed to operate.

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company. This test report does not assure KOLAS accreditation.

8.2. Test Procedure

1. Frequency Stability vs. Temperature: The equipment under test was connected to an external DC power supply and the RF output was connected to a Mobile Test Unit via feed-through attenuators.
2. The EUT was placed inside the temperature chamber.
3. After the temperature stabilized for approximately 20 minutes, the frequency output was recorded from Mobile Test Unit.

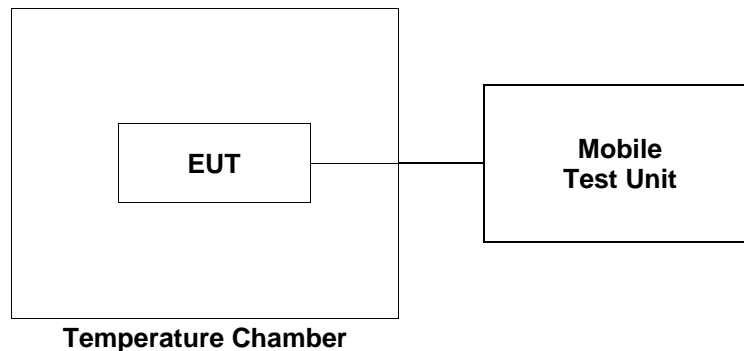

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company. This test report does not assure KOLAS accreditation.

8.3. Test Results

Ambient temperature : (23 ± 1) °C
Relative humidity : 47 % R.H.

LTE band 5 at middle channel

Reference Frequency: 836.5 MHz			
Frequency Stability versus Temperature			
Environment Temperature (°C)	Power Supplied (V _{dc})	Frequency Measure with Time Elapse	
		Frequency Error (Hz)	ppm
50	12.0	4	0.004 8
40		3	0.003 6
30		2	0.002 4
23		1	0.001 2
10		0	0.000 0
0		1	0.001 2
-10		-1	-0.001 2
-20		-2	-0.002 4
-30		-2	-0.002 4
Frequency Stability versus Power Supply			
Environment Temperature (°C)	Power Supplied (V _{dc})	Frequency Measure with Time Elapse	
		Frequency Error (Hz)	ppm
23	13.8	1	0.001 2
	10.2	2	0.002 4

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company. This test report does not assure KOLAS accreditation.

LTE band 7 at middle channel

Reference Frequency: 2 535.0 MHz			
Frequency Stability versus Temperature			
Environment Temperature (℃)	Power Supplied (V _{dc})	Frequency Measure with Time Elapse	
		Frequency Error (Hz)	ppm
50	12.0	5	0.002 0
40		3	0.001 2
30		1	0.000 4
23		2	0.000 8
10		2	0.000 8
0		2	0.000 8
-10		2	0.000 8
-20		-2	-0.000 8
-30		5	0.002 0
Frequency Stability versus Power Supply			
Environment Temperature (℃)	Power Supplied (V _{dc})	Frequency Measure with Time Elapse	
		Frequency Error (Hz)	ppm
23	13.8	2	0.000 8
	10.2	1	0.000 4

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company. This test report does not assure KOLAS accreditation.

LTE band 26 at middle channel

Reference Frequency: 836.5 MHz			
Frequency Stability versus Temperature			
Environment Temperature (°C)	Power Supplied (V _{dc})	Frequency Measure with Time Elapse	
		Frequency Error (Hz)	ppm
50	12.0	2	0.002 4
40		3	0.003 6
30		2	0.002 4
23		1	0.001 2
10		-1	-0.001 2
0		1	0.001 2
-10		1	0.001 2
-20		-1	-0.001 2
-30		-1	-0.001 2
Frequency Stability versus Power Supply			
Environment Temperature (°C)	Power Supplied (V _{dc})	Frequency Measure with Time Elapse	
		Frequency Error (Hz)	ppm
23	13.8	2	0.002 4
	10.2	2	0.002 4

- End of the Test Report -

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company. This test report does not assure KOLAS accreditation.