

FCC DTS REPORT

FCC Certification

Applicant Name:
LG Electronics Inc.**Address:**
222, LG-ro, Jinwi-myeon, Pyeongtaek-si, 451-713
Gyeonggi-do, South Korea**Date of Issue:**

January 14, 2016

Test Site/Location:

HCT CO., LTD., 74,Seoicheon-ro 578beon-gil,Majang-myeon,Icheon-si, Gyeonggi-do, 17383, Rep. of KOREA

Report No.: HCT-R-1601-F040**HCT FRN:** 0005866421**IC Recognition No.:** 5944A-5**FCC ID** : BEJTL3LNB**APPLICANT** : LG Electronics Inc.**FCC Model(s):** TL3LNB**EUT Type:** Car Telematics Device**Max. RF Output Power:**

Mode	Ant.0(SISO)	Ant.1(SISO)	Ant.0 & 1 (MIMO)
802.11b	17.72 dBm	16.43 dBm	20.13 dBm
802.11g	23.66 dBm	22.96 dBm	26.33 dBm
802.11n_20 MHz BW	23.19 dBm	22.54 dBm	25.89 dBm
802.11n_40 MHz BW	20.22 dBm	18.95 dBm	22.64 dBm

Frequency Range: 2412 MHz - 2462 MHz (2.4 GHz Band)

2422 MHz - 2452 MHz (2.4 GHz Band)_40 MHz BW

Modulation type: CCK/DSSS/OFDM**FCC Classification:** Digital Transmission System(DTS)**FCC Rule Part(s):** Part 15.247

Engineering Statement:

The measurements shown in this report were made in accordance with the procedures indicated, and the emissions from this equipment were found to be within the limits applicable. I assume full responsibility for the accuracy and completeness of these measurements, and for the qualifications of all persons taking them.

HCT CO., LTD. Certifies that no party to this application has subject to a denial of Federal benefits that includes FCC benefits pursuant to section 5301 of the Anti-Drug Abuse Act of 1998,21 U.S. C.853(a)

**Report prepared by**
: Kyung Soo Kang
Test Engineer of RF Team**Approved by**
: Sang Jun Lee
Manager of RF Team

This report only responds to the tested sample and may not be reproduced, except in full, without written approval of the HCT Co., Ltd.

Version

TEST REPORT NO.	DATE	DESCRIPTION
HCT-R-1601-F040	January 14, 2015	- First Approval Report

Table of Contents

- 1. GENERAL INFORMATION 4
- 2. EUT DESCRIPTION 4
- 3. TEST METHODOLOGY 6
 - 3.1 EUT CONFIGURATION 6
 - 3.2 EUT EXERCISE 6
 - 3.3 GENERAL TEST PROCEDURES 6
 - 3.4 DESCRIPTION OF TEST MODES 6
- 4. INSTRUMENT CALIBRATION..... 7
- 5. FACILITIES AND ACCREDITATIONS 7
 - 5.1 FACILITIES 7
 - 5.2 EQUIPMENT 7
- 6. ANTENNA REQUIREMENTS 8
- 7. SUMMARY TEST OF RESULTS 9
- 8. TEST RESULT 10
 - 8.1 DUTY CYCLE..... 10
 - 8.2 6dB BANDWIDTH..... 12
 - 8.3 OUTPUT POWER (802.11b/g/n)..... 19
 - 8.4 POWER SPECTRAL DENSITY (802.11b/g/n)..... 48
 - 8.5 OUT OF BAND EMISSIONS AT THE BAND EDGE/ CONDUCTED SPURIOUS EMISSIONS 56
 - 8.6 RADIATED MEASUREMENT..... 81
 - 8.6.1 RADIATED SPURIOUS EMISSIONS..... 81
 - 8.6.2 RADIATED RESTRICTED BAND EDGES 100
 - 8.7 POWERLINE CONDUCTED EMISSIONS 107
- 9. LIST OF TEST EQUIPMENT 108
 - 9.1 LIST OF TEST EQUIPMENT(Conducted Test) 108
 - 9.2 LIST OF TEST EQUIPMENT(Radiated Test)..... 109

1. GENERAL INFORMATION

Applicant: LG Electronics, Inc
Address: 222, LG-ro, Jinwi-myeon, Pyeongtaek-si, 451-713 Gyeonggi-do, South Korea
FCC ID: BEJTL3LNB
EUT Type: Car Telematics Device
Model name(s): TL3LNB
Date(s) of Tests: October 28, 2015 ~ January 14, 2016
Place of Tests: HCT Co., Ltd.
 74, Seoicheon-ro 578beon-gil, Majang-myeon, Icheon-si, Gyeonggi-do, Korea
 (IC Recognition No. : 5944A-5)

2. EUT DESCRIPTION

FCC Model Name	TL3LNB	
EUT Type	Car Telematics Device	
Power Supply	DC 12.0 V	
Frequency Range	TX: 2412 MHz ~ 2462 MHz, 2422 MHz - 2452 MHz_40 MHz BW RX: 2412 MHz ~ 2462 MHz, 2422 MHz - 2452 MHz_40 MHz BW	
Max. RF Output Power	Ant.0	Wi-Fi 802.11b (17.72 dBm) / Wi-Fi 802.11g (23.66dBm) / Wi-Fi 802.11n_20 MHz (23.19 dBm) / Wi-Fi 802.11n_40 MHz (20.22 dBm)
	Ant.1	Wi-Fi 802.11b (16.43dBm) / Wi-Fi 802.11g (22.96 dBm) / Wi-Fi 802.11n_20 MHz (22.54 dBm) / Wi-Fi 802.11n_40 MHz (18.95 dBm)
	Ant.0 & 1	Wi-Fi 802.11b (20.13 dBm) / Wi-Fi 802.11g (26.33dBm) / Wi-Fi 802.11n_20 MHz (25.89 dBm) / Wi-Fi 802.11n_40 MHz (22.64 dBm)
Modulation Type	DSSS/CCK(802.11b), OFDM(802.11g, 802.11n)	
Antenna Specification	Manufacturer: AMOTECH Antenna type: INTERNAL ANTENNA Peak Gain : cf. Section 6	

2.1 EUT OPERATING MODE

▣ Operating mode

Mode	Operating Mode	Operating Ant.
802.11b/g/n	SISO	Ant 0
		Ant 1
802.11b/g/n	MIMO	Ant 0 & 1

Note : In case of radiation test, we have done all test case. Worst case is MIMO(CDD) for 802.11b/g/n_HT20 mode and MIMO(SDM) for 802.11n_HT40. So, we attached the result of MIMO for 802.11b/g/n mode.

3. TEST METHODOLOGY

FCC KDB 558074 D01 DTS Meas Guidance v03r03 dated June 09, 2015 entitled “Guidance for Performing Compliance Measurements on Digital Transmission Systems(DTS) and the measurement procedure described in the American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices (ANSI C63.10-2013) Operating Under §15.247” were used in the measurement.

3.1 EUT CONFIGURATION

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner that intends to maximize its emission characteristics in a continuous normal application.

3.2 EUT EXERCISE

The EUT was operated in the engineering mode to fix the Tx frequency that was for the purpose of the measurements. According to its specifications, the EUT must comply with the requirements of the Section 15.207, 15.209 and 15.247 under the FCC Rules Part 15 Subpart C.

3.3 GENERAL TEST PROCEDURES

Conducted Emissions

The EUT is placed on the turntable, which is 0.8 m above ground plane. According to the requirements in Section 6.2 of ANSI C63.10. (Version :2013) Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30MHz using CISPR Quasi-peak and average detector modes.

Radiated Emissions

The EUT is placed on a turn table, which is 0.8 m above ground plane below 1GHz. Above 1GHz with 1.5m using absorbers between the EUT and receive antenna. The turntable shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3 m away from the receiving antenna, which varied from 1 m to 4 m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the max. emission, the relative positions of this hand-held transmitter (EUT) was rotated through three orthogonal axes according to the requirements in Section 8 of ANSI C63.10. (Version: 2013)

Conducted Antenna Terminal

See Section from 9.1 to 9.2.(KDB 558074)

3.4 DESCRIPTION OF TEST MODES

The EUT has been tested under operating condition. Test program used to control the EUT for staying in continuous transmitting and receiving mode is programmed.

Channel low, mid and high with highest data rate (worst case) is chosen for full testing.

4. INSTRUMENT CALIBRATION

The measuring equipment, which was utilized in performing the tests documented herein, has been calibrated in accordance with the manufacturer's recommendations for utilizing calibration equipments, which is traceable to recognized national standards.

All equipments(spectrum, antenna, accessory, etc.) for measurement is calibrated in accordance with the requirements of C63.5 (Version: 2006).

5. FACILITIES AND ACCREDITATIONS

5.1 FACILITIES

The SAC(Semi-Anechoic Chamber) and conducted measurement facility used to collect the radiated data are located at the 74, Seoicheon-ro 578beon-gil, Majang-myeon, Icheon-si, Gyeonggi-do, Korea. The site is constructed in conformance with the requirements of ANSI C63.4. (Version :2014) and CISPR Publication 22. Detailed description of test facility was submitted to the Commission and accepted dated July 07, 2015 (Registration Number: 90661)

5.2 EQUIPMENT

Radiated emissions are measured with one or more of the following types of Linearly polarized antennas: tuned dipole, bi-conical, log periodic, bi-log, and/or ridged waveguide, horn. Spectrum analyzers with pre-selectors and quasi-peak detectors are used to perform radiated measurements. Conducted emissions are measured with Line Impedance Stabilization Networks and EMI Test Receivers. Calibrated wideband preamplifiers, coaxial cables, and coaxial attenuators are also used for making measurements.

All receiving equipment conforms to CISPR Publication 16-1, "Radio Interference Measuring Apparatus and Measurement Methods."

6. ANTENNA REQUIREMENTS

According to FCC 47 CFR §15.203:

“An intentional radiator antenna shall be designed to ensure that no antenna other than that furnished by the responsible party can be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.”

* The antennas of this E.U.T are permanently attached.

*The E.U.T Complies with the requirement of §15.203

▣ Directional Gain Calculations

- If any transmit signals are correlated with each other(802.11b/g/n_HT20),

$$\text{Directional gain} = 10 \cdot \log[(10^{G1/20} + 10^{G2/20} + \dots + 10^{GN/20})^2 / N] \text{ dBi}$$

- If all transmit signals are completely uncorrelated with each other(802.11n_HT40)

$$\text{Directional gain} = 10 \cdot \log[(10^{G1/10} + 10^{G2/10} + \dots + 10^{GN/10}) / N] \text{ dBi}$$

▣ Antenna Gain

2.4 GHz Band

Antenna Gain	802.11b/g/n	Ant 0	2.14 dBi
		Ant 1	3.78 dBi
Directional Antenna Gain	802.11b/g/n_HT20	Ant 0 & 1	6.01 dBi
Directional Antenna Gain	802.11n_HT40	Ant 0 & 1	3.04 dBi

7. SUMMARY TEST OF RESULTS

Test Description	FCC Part Section(s)	Test Limit	Test Condition	Test Result
6 dB Bandwidth	§15.247(a)(2)	> 500 kHz	CONDUCTED	PASS
Conducted Maximum Peak Output Power	§15.247(b)(3)	< 1 Watt		PASS
Power Spectral Density	§15.247(e)	< 8 dBm / 3 kHz Band		PASS
Band Edge(Out of Band Emissions)	§15.247(d)	Conducted > 20 dBc		PASS
AC Power line Conducted Emissions	§15.207	cf. Section 8.7		PASS
Radiated Spurious Emissions	§15.205, 15.209	cf. Section 8.6.1	RADIATED	PASS
Radiated Restricted Band Edge	§15.247(d), 15.205, 15.209	cf. Section 8.6.2		PASS

8. TEST RESULT


8.1 DUTY CYCLE

■ TEST PROCEDURE

According to KDB 558074)6)b), issued 06/09/2015)

The zero-span mode on a spectrum analyzer or EMI receiver if the response time and spacing between bins on the sweep are sufficient to permit accurate measurements of the on and off times of the transmitted signal. Set the center frequency of the instrument to the center frequency of the transmission. Set $RBW \geq OBW$ if possible; otherwise, set RBW to the largest available value. Set $VBW \geq RBW$. Set detector = peak or average. The zero-span measurement method shall not be used unless both RBW and VBW are $> 50/T$ and the number of sweep points across duration T exceeds 100. (For example, if VBW and/or RBW are limited to 3 MHz, then the zero-span method of measuring duty cycle shall not be used if $T \leq 16.7$ microseconds.)

■ TEST CONFIGURATION

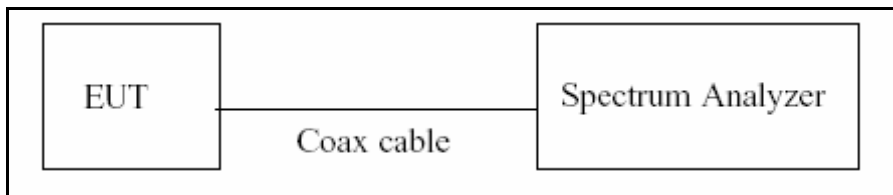

■ TEST PROCEDURE

The transmitter output is connected to the Spectrum Analyzer. We tested according to the zero-span measurement method, 6.0)b) in KDB 558074(issued 06/09/2015)

The largest available value of RBW is 8 MHz and VBW is 50 MHz. The zero-span method of measuring duty cycle shall not be used if $T \leq 6.25$ microseconds. ($50/6.25 = 8$)

The zero-span method was used because all measured T data are > 6.25 microseconds and both RBW and VBW are $> 50/T$.

1. RBW = 8 MHz (the largest available value)
2. VBW = 8 MHz (\geq RBW)
3. SPAN = 0 Hz
4. Detector = Peak
5. Number of points in sweep > 100
6. Trace mode = Clear write
7. Measure T_{total} and T_{on}
8. Calculate Duty Cycle = T_{on} / T_{total} and Duty Cycle Factor = $10 \cdot \log(1/\text{Duty Cycle})$

■ Duty Cycle Factor

Mode	Data Rate	T _{on} (ms)	T _{total} (ms)	Duty Cycle	Duty Cycle Factor (dB)
b	1 Mbps	12.350	12.450	0.99196787	0.035
	2 Mbps	6.180	6.280	0.98407643	0.070
	5.5 Mbps	2.300	2.400	0.95833333	0.185
	11 Mbps	1.200	1.300	0.92307692	0.348
g	6 Mbs	2.040	2.150	0.94883721	0.228
	9 Mbs	1.370	1.480	0.92567568	0.335
	12 Mbs	1.040	1.140	0.91228070	0.399
	18 Mbs	0.695	0.790	0.87974684	0.556
	24 Mbs	0.525	0.625	0.84000000	0.757
	36 Mbs	0.360	0.458	0.78602620	1.046
	48 Mbs	0.276	0.382	0.72251309	1.412
n_20 MHz BW	MCS 0	1.906	2.011	0.94778717	0.233
	MCS 1	0.971	1.085	0.89493088	0.482
	MCS 2	0.660	0.759	0.86956522	0.607
	MCS 3	0.504	0.600	0.84000000	0.757
	MCS 4	0.348	0.447	0.77852349	1.087
	MCS 5	0.273	0.381	0.71653543	1.448
	MCS 6	0.246	0.342	0.71929825	1.431
	MCS 7	0.225	0.321	0.70093458	1.543
n_40 MHz BW	MCS 0	0.942	1.038	0.90751445	0.421
	MCS 1	0.489	0.594	0.82323232	0.845
	MCS 2	0.339	0.444	0.76351351	1.172
	MCS 3	0.264	0.360	0.73333333	1.347
	MCS 4	0.186	0.285	0.65263158	1.853
	MCS 5	0.153	0.249	0.61445783	2.115
	MCS 6	0.141	0.237	0.59493671	2.255
	MCS 7	0.127	0.225	0.56444444	2.484

Note : Duty Cycle Factor = 10*log(1/Duty Cycle). where, Duty Cycle = T_{on} / T_{total}


8.2 6dB BANDWIDTH

Test Requirements and limit, §15.247(a)(2)

The bandwidth at 6dB down from the highest in-band spectral density is measured with a spectrum analyzer connected to the receive antenna while the EUT is operating in transmission mode at the appropriate frequencies.

The minimum permissible 6dB bandwidth is 500 kHz.

■ TEST CONFIGURATION



■ TEST PROCEDURE

The transmitter output is connected to the Spectrum Analyzer.

The Spectrum Analyzer is set to (Procedure 8.1 in KDB 558074, issued 06/09/2015)

RBW = 100 kHz

VBW \geq 3 x RBW

Detector = Peak

Trace mode = max hold

Sweep = auto couple

Allow the trace to stabilize

Note : We tested 6 dB bandwidth using the automatic bandwidth measurement capability of a spectrum analyzer. X dB is set 6 dB.

■ TEST RESULTS_Ant.0

Conducted 6dB Bandwidth Measurements for 802.11b

802.11b Mode		Measured Bandwidth [MHz]	Minimum Bandwidth [MHz]	Pass / Fail
Frequency [MHz]	Channel No.			
2412	1	7.628	0.500	Pass
2437	6	8.100	0.500	Pass
2462	11	8.584	0.500	Pass

Conducted 6dB Bandwidth Measurements for 802.11g

802.11g Mode		Measured Bandwidth [MHz]	Minimum Bandwidth [MHz]	Pass / Fail
Frequency [MHz]	Channel No.			
2412	1	15.382	0.500	Pass
2437	6	15.547	0.500	Pass
2462	11	15.462	0.500	Pass

Conducted 6dB Bandwidth Measurements for 802.11n_20 MHz BW

802.11n Mode		Measured Bandwidth [MHz]	Minimum Bandwidth [MHz]	Pass / Fail
Frequency [MHz]	Channel No.			
2412	1	15.931	0.500	Pass
2437	6	15.655	0.500	Pass
2462	11	15.716	0.500	Pass


Conducted 6dB Bandwidth Measurements for 802.11n_40 MHz BW

802.11n Mode		Measured Bandwidth [MHz]	Minimum Bandwidth [MHz]	Pass / Fail
Frequency [MHz]	Channel No.			
2422	3	35.098	0.500	Pass
2437	6	35.167	0.500	Pass
2452	9	31.372	0.500	Pass


Note : In order to simplify the report, attached plots were only the most wide 6 dB BW channel.

▣ RESULT PLOTS


6dB Bandwidth plot (802.11b-CH 11)

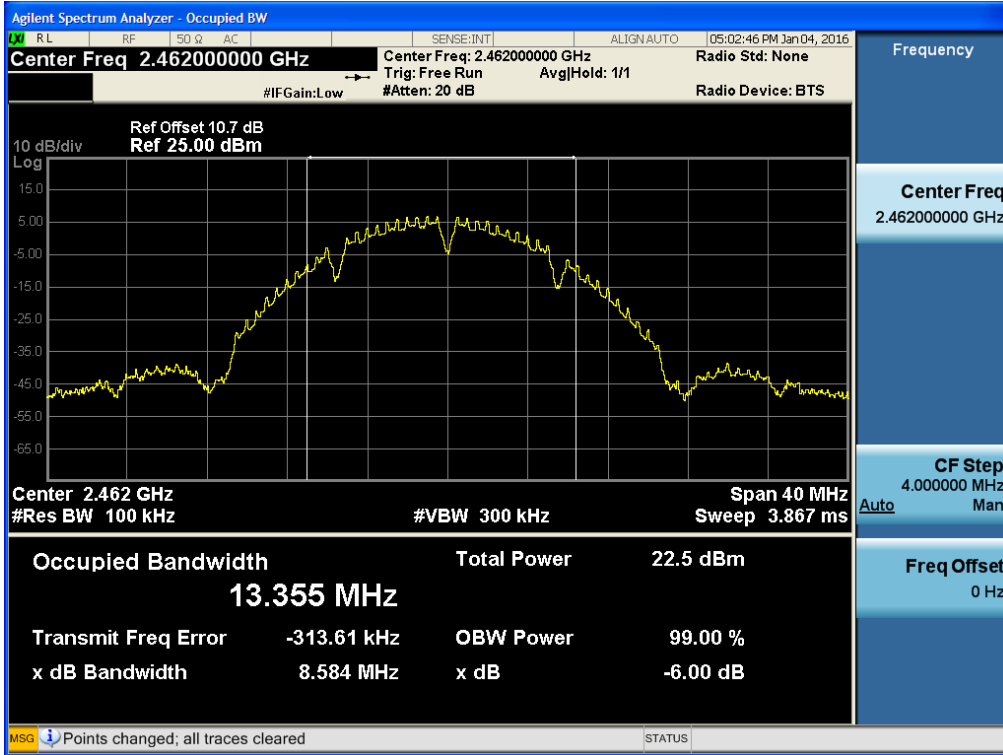


6dB Bandwidth plot (802.11g-CH 6)

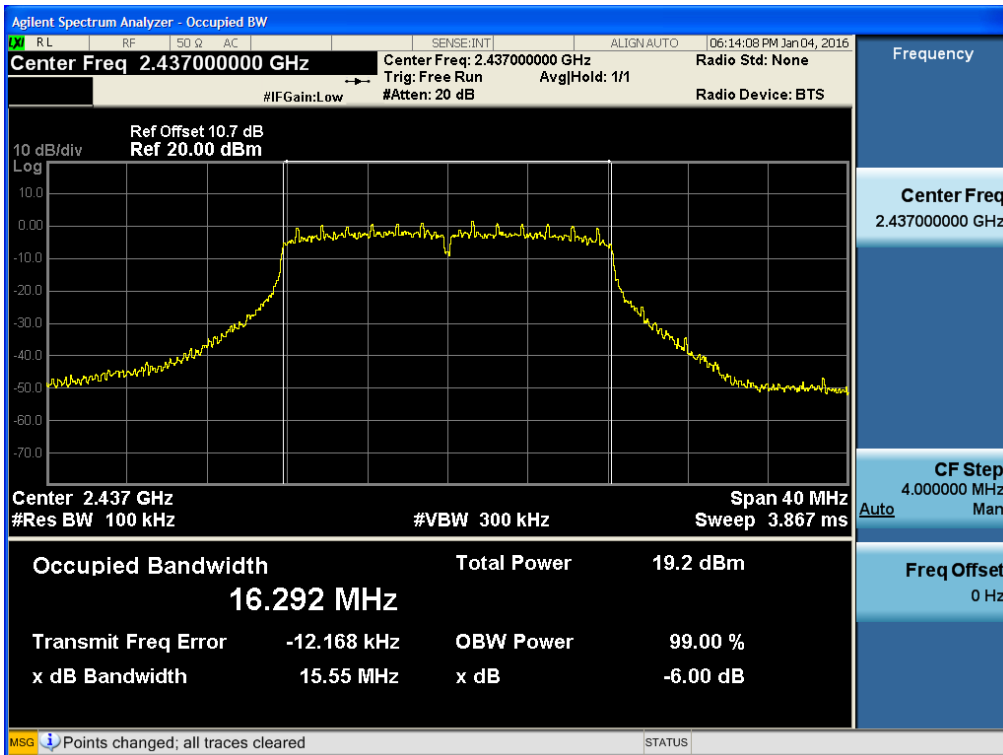

6dB Bandwidth plot (802.11n_20 MHz BW-CH 1)

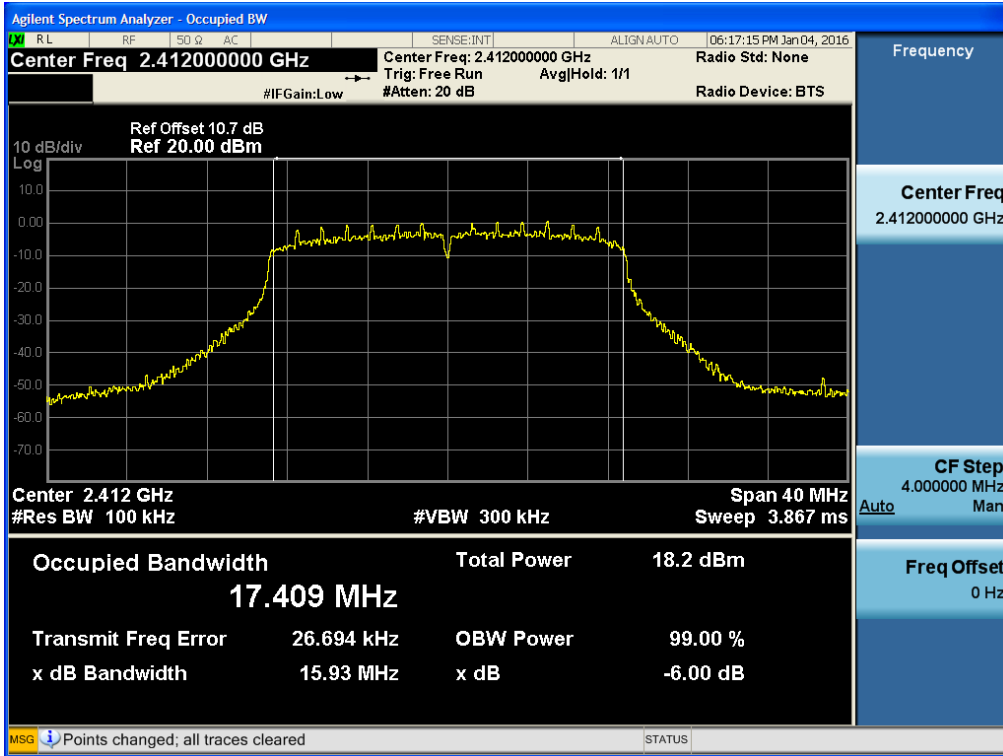

6dB Bandwidth plot (802.11n_40 MHz BW-CH 6)

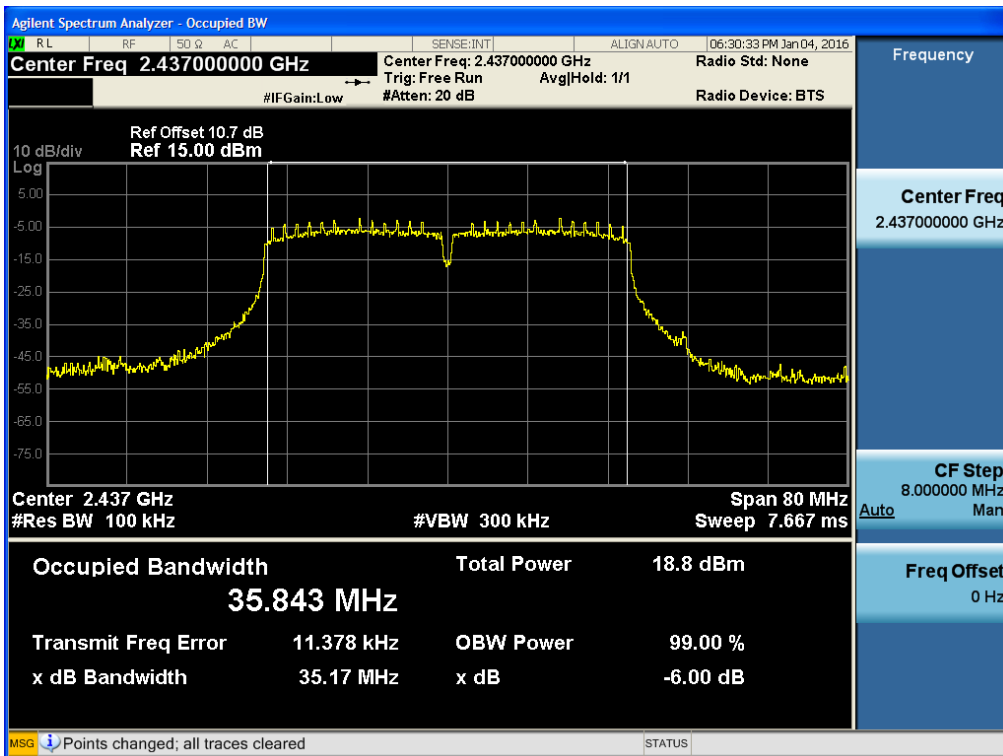

■ TEST RESULTS_Ant.1

Conducted 6dB Bandwidth Measurements for 802.11b

802.11b Mode		Measured Bandwidth [MHz]	Minimum Bandwidth [MHz]	Pass / Fail
Frequency [MHz]	Channel No.			
2412	1	7.609	0.500	Pass
2437	6	7.621	0.500	Pass
2462	11	8.582	0.500	Pass

Conducted 6dB Bandwidth Measurements for 802.11g

802.11g Mode		Measured Bandwidth [MHz]	Minimum Bandwidth [MHz]	Pass / Fail
Frequency [MHz]	Channel No.			
2412	1	15.150	0.500	Pass
2437	6	15.341	0.500	Pass
2462	11	15.942	0.500	Pass

Conducted 6dB Bandwidth Measurements for 802.11n_20 MHz BW

802.11n Mode		Measured Bandwidth [MHz]	Minimum Bandwidth [MHz]	Pass / Fail
Frequency [MHz]	Channel No.			
2412	1	15.149	0.500	Pass
2437	6	15.165	0.500	Pass
2462	11	15.997	0.500	Pass


Conducted 6dB Bandwidth Measurements for 802.11n_40 MHz BW

802.11n Mode		Measured Bandwidth [MHz]	Minimum Bandwidth [MHz]	Pass / Fail
Frequency [MHz]	Channel No.			
2422	3	33.965	0.500	Pass
2437	6	33.770	0.500	Pass
2452	9	28.858	0.500	Pass


Note : In order to simplify the report, attached plots were only the most wide 6 dB BW channel.

RESULT PLOTS


6dB Bandwidth plot (802.11b-CH 6)

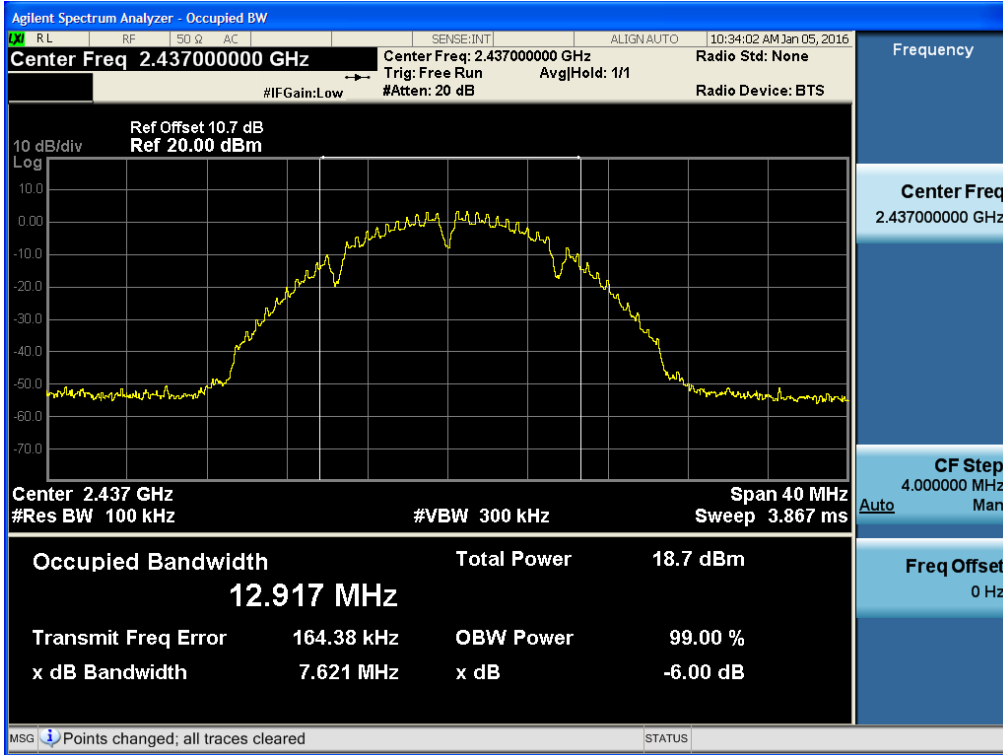


6dB Bandwidth plot (802.11g-CH 11)

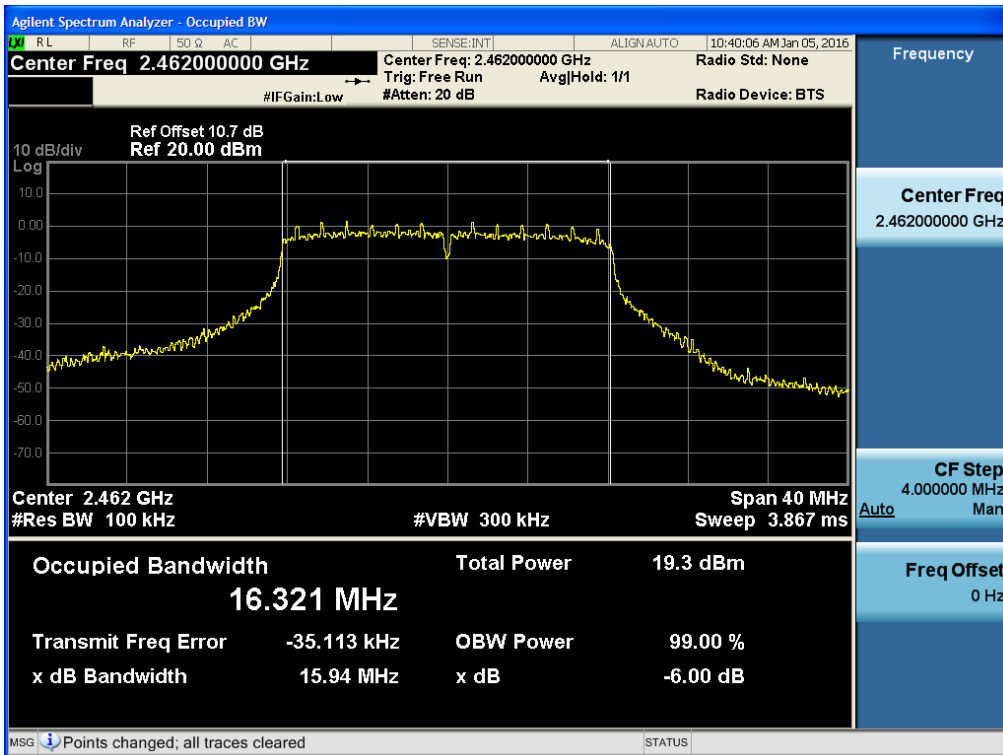

6dB Bandwidth plot (802.11n_20 MHz BW-CH 11)

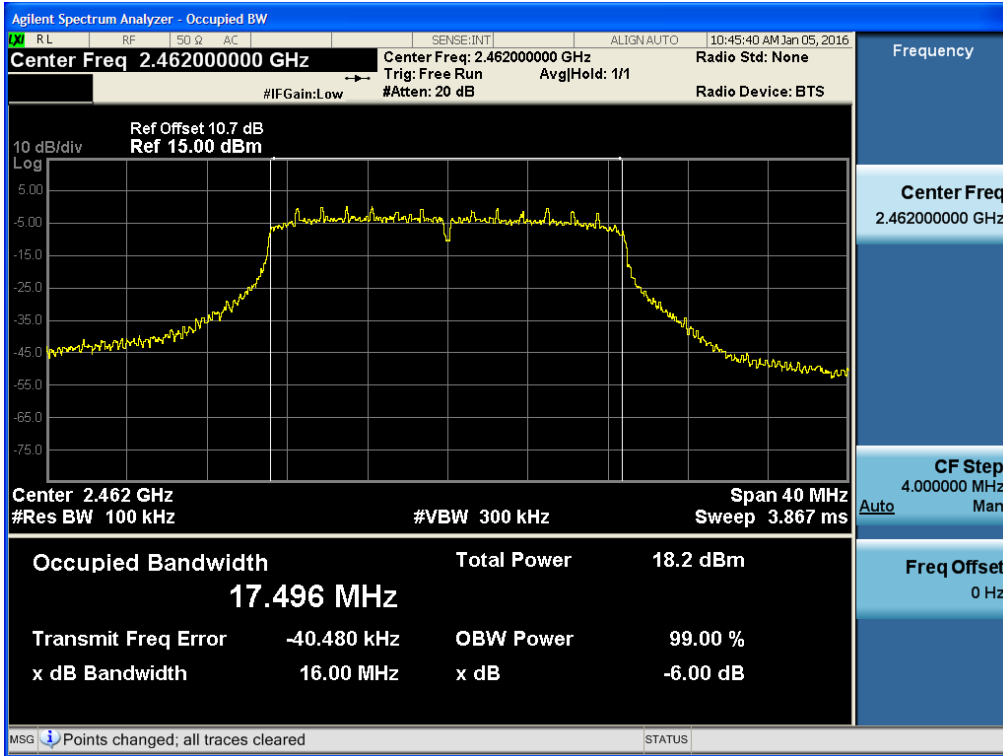

6dB Bandwidth plot (802.11n_40 MHz BW-CH 3)

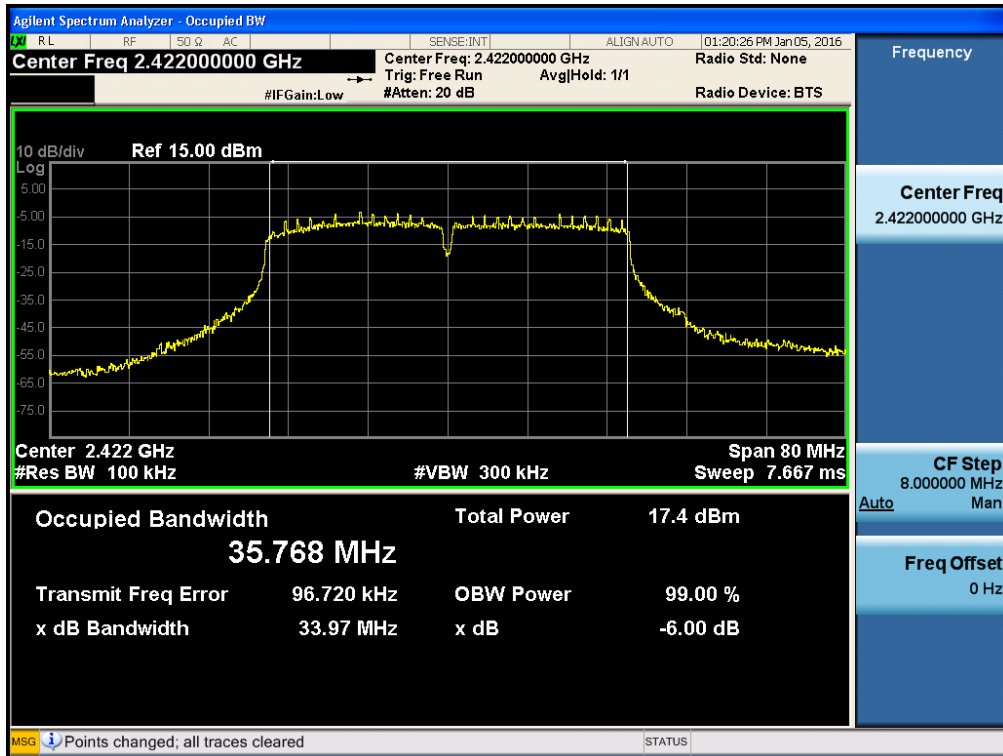

8.3 OUTPUT POWER (802.11b/g/n)

Test Requirements and limit, §15.247(b)(3)

The transmitter output is connected to the input of an RF power sensor. Measurement is made using a broadband power meter capable of making peak and average measurements while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies.

The maximum permissible conducted output power is 1 Watt.

■ Limit(CDD)

Maximum Conducted Output Power

Operating Mode	Band	Mode	Ant. Port	Ant. Gain (dBi)	Limit (dBm)
SISO	2.4 GHz	802.11b/g/n	0	2.14	30
			1	3.78	30
MIMO(2 TX)		802.11b/g/n_HT20	0 & 1	6.01	29.99
		802.11n_HT40		3.04	30

Note : 1. If all antenna gains are not equal,


$$\text{Directional gain} = 10 \cdot \log\left[\frac{10^{G1/20} + 10^{G2/20} + \dots + 10^{GN/20}}{N}\right] \text{ dBi (802.11b/g/n_HT20)}$$

$$\text{Directional gain} = 10 \cdot \log\left[\frac{10^{G1/10} + 10^{G2/10} + \dots + 10^{GN/10}}{N}\right] \text{ dBi (802.11n_HT40)}$$

(according to KDB662911 D01 v02r01)

2. Limit is calculated by antenna gain.

■ **TEST CONFIGURATION(20 MHz BW)**



■ **TEST PROCEDURE(20 MHz BW)**

- Peak Power (Procedure 9.1.2 in KDB 558074, issued 06/09/2015)
 1. Measure the peak power of the transmitter.
- Average Power (Procedure 9.2.3.1 in KDB 558074, issued 06/09/2015)
 1. Measure the duty cycle.
 2. Measure the average power of the transmitter. This measurement is an average over both the on and off periods of the transmitter.
 3. Add $10 \log (1/x)$, where x is the duty cycle, to the measured power in order to compute the average power during the actual transmission times.


Note :

1. We apply to the offset in the 2.4 GHz range that was rounded off to the closest tenth dB. So, 10.7 dB is offset for 2.4 GHz Band.

Actual value of loss for the attenuator and cable combination is below table.

Band	Frequency(MHz)	Loss(dB)
2.4 GHz	2412	10.65
	2437	10.65
	2462	10.66

(Actual value of loss for the attenuator and cable combination)

■ TEST CONFIGURATION(40 MHz BW)**■ TEST PROCEDURE(40 MHz BW)**

Power sensor(N9121A) is supported only implemented a VBW of 30 MHz. So in case of 40 MHz power measurement, we used the integrated band power method.

The transmitter output is connected to the Spectrum Analyzer. We use the spectrum analyzer's integrated band power measurement function.

The Spectrum Analyzer is set to

- Peak Power (Integrated Band Power Method)

RBW = 1 MHz

VBW $\geq 3 \times$ RBW

SPAN $\geq 1.5 \times$ DTS bandwidth

Detector Mode = Peak

Sweep = auto couple

Trace Mode = max hold

Allow trace to fully stabilize.

Use the instrument's band/channel power measurement function with the band limits set equal to the

DTS bandwidth edges (for some instruments, this may require a manual override to select peak detector).

- Average Power (Procedure 9.2.2.4 in KDB 558074, issued 06/05/2014)

Measure the duty cycle

Set span to at least 1.5 times the OBW

RBW = 1-5 % of the OBW, not to exceed 1 MHz.

VBW $\geq 3 \times$ RBW.

Number of points in sweep $\geq 2 \times$ span / RBW. (This gives bin-to-bin spacing \leq RBW/2, so that narrowband signals are not lost between frequency bins.)

Sweep time = auto.

Detector = RMS(i.e., power averaging)

Do not use sweep triggering. Allow the sweep to "free run".

Trace average at least 100 traces in power averaging(RMS) mode.

Compute power by integrating the spectrum across the OBW of the signal using the instrument's band power measurement function with band limits set equal to the OBW band edges.

Add $10 \log(1/x)$, where x is the duty cycle, to the measured power in order to compute the average power during the actual transmission times.

■ Sample Calculation

Output Power = Reading Value + ATT loss + Cable loss(1 ea) + Duty Cycle Factor

Ex) Output Power = 10 dBm + 20 dB + 0.8 dB + 0.2 dB = 31.0 dBm

Note :

1. Spectrum reading values are not plot data. The power results in plot is already including the actual values of loss for the attenuator and cable combination.
2. Spectrum offset = Attenuator loss + Cable loss
3. We apply to the offset in the 2.4 GHz range that was rounded off to the closest tenth dB. So, 10.7 dB is offset for 2.4 GHz Band and

Actual value of loss for the attenuator and cable combination is below table.

Band	Frequency(MHz)	Loss(dB)
2.4 GHz	2412	10.65
	2437	10.65
	2462	10.66

(Actual value of loss for the attenuator and cable combination)

■ TEST RESULTS-Peak

■ TEST RESULTS-Ant.0

Conducted Output Power Measurements (802.11b Mode)

802.11b Mode		Rate (Mbps)	Measured Power(dBm)	Limit (dBm)
Frequency[MHz]	Channel No.			
2412	1	1 Mbps	14.74	30
		2 Mbps	15.03	30
		5.5 Mbps	15.01	30
		11 Mbps	15.04	30
2437	6	1 Mbps	13.78	30
		2 Mbps	14.05	30
		5.5 Mbps	14.09	30
		11 Mbps	14.06	30
2462	11	1 Mbps	17.45	30
		2 Mbps	17.66	30
		5.5 Mbps	17.72	30
		11 Mbps	17.71	30

■ TEST RESULTS-Ant.1

Conducted Output Power Measurements (802.11b Mode)

802.11b Mode		Rate (Mbps)	Measured Power(dBm)	Limit (dBm)
Frequency[MHz]	Channel No.			
2412	1	1 Mbps	14.04	30
		2 Mbps	14.14	30
		5.5 Mbps	14.20	30
		11 Mbps	14.23	30
2437	6	1 Mbps	13.79	30
		2 Mbps	14.00	30
		5.5 Mbps	14.00	30
		11 Mbps	14.01	30
2462	11	1 Mbps	16.06	30
		2 Mbps	16.34	30
		5.5 Mbps	16.30	30
		11 Mbps	16.43	30

■ TEST RESULTS- Sum Data of Ant.0 and Ant.1

Conducted Output Power Measurements (802.11b Mode)

802.11b Mode		Rate (Mbps)	Measured Power(dBm)	Limit (dBm)
Frequency[MHz]	Channel No.			
2412	1	1 Mbps	17.41	29.99
		2 Mbps	17.62	29.99
		5.5 Mbps	17.63	29.99
		11 Mbps	17.66	29.99
2437	6	1 Mbps	16.80	29.99
		2 Mbps	17.04	29.99
		5.5 Mbps	17.06	29.99
		11 Mbps	17.05	29.99
2462	11	1 Mbps	19.82	29.99
		2 Mbps	20.06	29.99
		5.5 Mbps	20.08	29.99
		11 Mbps	20.13	29.99

■ TEST RESULTS-Ant.0

Conducted Output Power Measurements (802.11g Mode)

802.11g Mode		Rate (Mbps)	Measured Power(dBm)	Limit (dBm)
Frequency[MHz]	Channel No.			
2412	1	6 Mbps	19.11	30
		9 Mbps	19.27	30
		12 Mbps	19.09	30
		18 Mbps	19.42	30
		24 Mbps	23.34	30
		36 Mbps	23.41	30
		48 Mbps	22.70	30
		54 Mbps	23.32	30
2437	6	6 Mbps	19.05	30
		9 Mbps	19.22	30
		12 Mbps	19.01	30
		18 Mbps	19.47	30
		24 Mbps	23.58	30
		36 Mbps	23.66	30
		48 Mbps	23.02	30
		54 Mbps	23.53	30
2462	11	6 Mbps	19.22	30
		9 Mbps	19.25	30
		12 Mbps	19.15	30
		18 Mbps	19.39	30
		24 Mbps	22.42	30
		36 Mbps	22.61	30
		48 Mbps	22.09	30
		54 Mbps	22.45	30

■ TEST RESULTS-Ant.1

Conducted Output Power Measurements (802.11g Mode)

802.11g Mode		Rate (Mbps)	Measured Power(dBm)	Limit (dBm)
Frequency[MHz]	Channel No.			
2412	1	6 Mbps	18.11	30
		9 Mbps	18.31	30
		12 Mbps	18.20	30
		18 Mbps	18.58	30
		24 Mbps	22.21	30
		36 Mbps	22.40	30
		48 Mbps	21.46	30
		54 Mbps	22.44	30
2437	6	6 Mbps	18.98	30
		9 Mbps	19.18	30
		12 Mbps	19.09	30
		18 Mbps	19.26	30
		24 Mbps	22.76	30
		36 Mbps	22.96	30
		48 Mbps	22.63	30
		54 Mbps	22.78	30
2462	11	6 Mbps	18.71	30
		9 Mbps	18.87	30
		12 Mbps	18.90	30
		18 Mbps	19.04	30
		24 Mbps	22.73	30
		36 Mbps	22.78	30
		48 Mbps	22.41	30
		54 Mbps	22.83	30

■ TEST RESULTS- Sum Data of Ant.0 and Ant.1

Conducted Output Power Measurements (802.11g Mode)

802.11g Mode		Rate (Mbps)	Measured Power(dBm)	Limit (dBm)
Frequency[MHz]	Channel No.			
2412	1	6 Mbps	21.65	29.99
		9 Mbps	21.83	29.99
		12 Mbps	21.68	29.99
		18 Mbps	22.03	29.99
		24 Mbps	25.82	29.99
		36 Mbps	25.94	29.99
		48 Mbps	25.13	29.99
		54 Mbps	25.91	29.99
2437	6	6 Mbps	22.03	29.99
		9 Mbps	22.21	29.99
		12 Mbps	22.06	29.99
		18 Mbps	22.38	29.99
		24 Mbps	26.20	29.99
		36 Mbps	26.33	29.99
		48 Mbps	25.84	29.99
		54 Mbps	26.18	29.99
2462	11	6 Mbps	21.98	29.99
		9 Mbps	22.07	29.99
		12 Mbps	22.04	29.99
		18 Mbps	22.23	29.99
		24 Mbps	25.59	29.99
		36 Mbps	25.71	29.99
		48 Mbps	25.26	29.99
		54 Mbps	25.65	29.99

■ TEST RESULTS-Ant.0

Conducted Output Power Measurements (802.11n Mode)_20 MHz

802.11n Mode		MCS Index	Measured Power(dBm)	Limit (dBm)
Frequency[MHz]	Channel No.			
2412	1	0	18.33	30
		1	18.16	30
		2	18.23	30
		3	22.78	30
		4	22.99	30
		5	22.10	30
		6	22.59	30
		7	22.87	30
2437	6	0	18.14	30
		1	18.01	30
		2	18.28	30
		3	22.63	30
		4	23.19	30
		5	22.41	30
		6	22.80	30
		7	22.86	30
2462	11	0	18.14	30
		1	18.12	30
		2	18.14	30
		3	21.99	30
		4	22.27	30
		5	21.49	30
		6	22.01	30
		7	21.95	30

■ TEST RESULTS-Ant.1

Conducted Output Power Measurements (802.11n Mode)_20 MHz

802.11n Mode		MCS Index	Measured Power(dBm)	Limit (dBm)
Frequency[MHz]	Channel No.			
2412	1	0	17.17	30
		1	17.14	30
		2	17.24	30
		3	21.70	30
		4	21.78	30
		5	21.10	30
		6	21.36	30
		7	21.46	30
2437	6	0	18.03	30
		1	17.94	30
		2	18.14	30
		3	22.33	30
		4	22.22	30
		5	21.81	30
		6	22.09	30
		7	22.41	30
2462	11	0	17.83	30
		1	17.84	30
		2	17.78	30
		3	22.24	30
		4	22.54	30
		5	21.86	30
		6	22.21	30
		7	22.04	30

■ TEST RESULTS- Sum Data of Ant.0 and Ant.1

Conducted Output Power Measurements (802.11n Mode)_20 MHz

802.11n Mode		MCS Index	Measured Power(dBm)	Limit (dBm)
Frequency[MHz]	Channel No.			
2412	1	0	20.80	29.99
		1	20.69	29.99
		2	20.77	29.99
		3	25.28	29.99
		4	25.44	29.99
		5	24.64	29.99
		6	25.03	29.99
		7	25.23	29.99
2437	6	0	21.10	29.99
		1	20.99	29.99
		2	21.22	29.99
		3	25.49	29.99
		4	25.74	29.99
		5	25.13	29.99
		6	25.47	29.99
		7	25.65	29.99
2462	11	0	21.00	29.99
		1	20.99	29.99
		2	20.97	29.99
		3	25.13	29.99
		4	25.42	29.99
		5	24.69	29.99
		6	25.12	29.99
		7	25.01	29.99

■ TEST RESULTS-Ant.0

Conducted Output Power Measurements (802.11n Mode)_40 MHz

802.11n Mode		MCS Index	Measured Power(dBm)	Limit (dBm)
Frequency[MHz]	Channel No.			
2422	3	0	19.63	30
		1	19.51	30
		2	19.53	30
		3	20.00	30
		4	20.03	30
		5	20.22	30
		6	20.07	30
		7	20.04	30
2437	6	0	19.48	30
		1	19.34	30
		2	19.26	30
		3	19.68	30
		4	19.72	30
		5	19.90	30
		6	19.75	30
		7	19.68	30
2452	9	0	17.97	30
		1	17.78	30
		2	17.84	30
		3	17.91	30
		4	17.86	30
		5	18.07	30
		6	17.89	30
		7	17.85	30

■ TEST RESULTS-Ant.1

Conducted Output Power Measurements (802.11n Mode)_40 MHz

802.11n Mode		MCS Index	Measured Power(dBm)	Limit (dBm)
Frequency[MHz]	Channel No.			
2422	3	0	17.80	30
		1	17.55	30
		2	17.42	30
		3	17.68	30
		4	17.66	30
		5	17.78	30
		6	17.71	30
		7	17.62	30
2437	6	0	18.84	30
		1	18.56	30
		2	18.44	30
		3	18.77	30
		4	18.82	30
		5	18.95	30
		6	18.84	30
		7	18.70	30
2452	9	0	18.17	30
		1	17.90	30
		2	17.81	30
		3	18.04	30
		4	18.03	30
		5	18.03	30
		6	17.99	30
		7	17.92	30


■ TEST RESULTS- Sum Data of Ant.0 and Ant.1

Conducted Output Power Measurements (802.11n Mode)_40 MHz

802.11n Mode		MCS Index	Measured Power(dBm)	Limit (dBm)
Frequency[MHz]	Channel No.			
2422	3	0	21.82	30
		1	21.65	30
		2	21.61	30
		3	22.00	30
		4	22.02	30
		5	22.18	30
		6	22.06	30
		7	22.01	30
2437	6	0	22.18	30
		1	21.98	30
		2	21.88	30
		3	22.26	30
		4	22.30	30
		5	22.46	30
		6	22.33	30
		7	22.23	30
2452	9	0	21.08	30
		1	20.85	30
		2	20.84	30
		3	20.99	30
		4	20.96	30
		5	21.06	30
		6	20.95	30
		7	20.90	30


▣ RESULT PLOTS-Ant.0_40 MHz BW (2422 MHz ~2452 MHz)

Conducted Output Power (802.11n-CH 3) MCS5

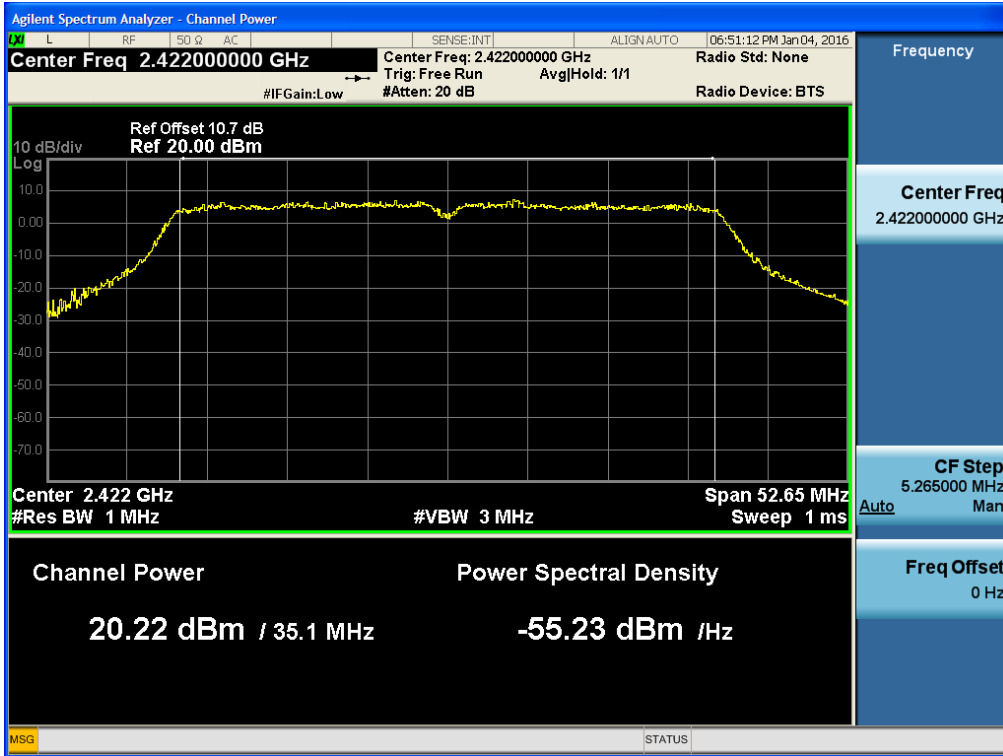

▣ RESULT PLOTS-Ant.1_40 MHz BW (2422 MHz ~2452 MHz)

Conducted Output Power (802.11n-CH 6) MCS5

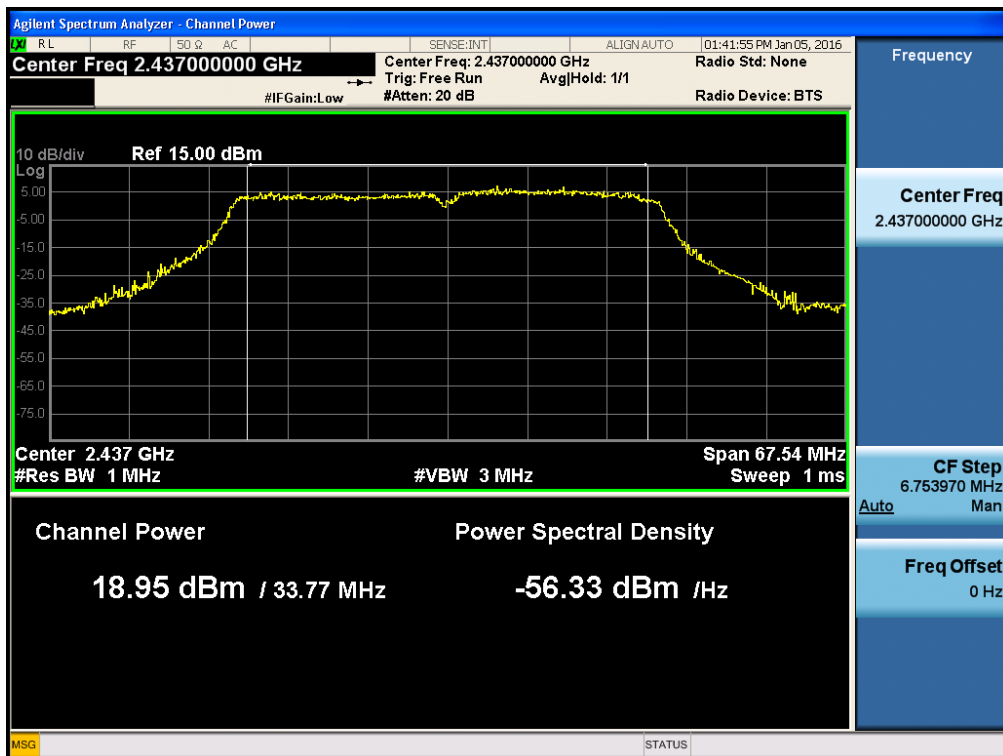

■ TEST RESULTS-Average

■ TEST RESULTS_Ant.0

Conducted Output Power Measurements (802.11b Mode)

802.11b Mode		Rate (Mbps)	Measured Power(dBm)	Duty Cycle Factor (dB)	Measured Power(dBm) + Duty Cycle Factor(dB)	Limit (dBm)
Frequency [MHz]	Channel No.					
2412	1	1 Mbps	12.01	0.035	12.05	30
		2 Mbps	12.26	0.063	12.32	30
		5.5 Mbps	12.12	0.185	12.30	30
		11 Mbps	11.98	0.348	12.33	30
2437	6	1 Mbps	10.86	0.035	10.90	30
		2 Mbps	11.17	0.063	11.23	30
		5.5 Mbps	11.07	0.185	11.25	30
		11 Mbps	11.01	0.348	11.36	30
2462	11	1 Mbps	14.61	0.035	14.65	30
		2 Mbps	14.82	0.063	14.88	30
		5.5 Mbps	14.84	0.185	15.02	30
		11 Mbps	14.58	0.348	14.93	30

■ TEST RESULTS_Ant.1

Conducted Output Power Measurements (802.11b Mode)

802.11b Mode		Rate (Mbps)	Measured Power(dBm)	Duty Cycle Factor (dB)	Measured Power(dBm) + Duty Cycle Factor(dB)	Limit (dBm)
Frequency [MHz]	Channel No.					
2412	1	1 Mbps	10.88	0.035	10.92	30
		2 Mbps	11.16	0.070	11.23	30
		5.5 Mbps	11.07	0.185	11.25	30
		11 Mbps	10.92	0.348	11.27	30
2437	6	1 Mbps	10.97	0.035	11.01	30
		2 Mbps	11.21	0.070	11.28	30
		5.5 Mbps	11.12	0.185	11.30	30
		11 Mbps	10.95	0.348	11.30	30
2462	11	1 Mbps	13.49	0.035	13.53	30
		2 Mbps	13.70	0.070	13.77	30
		5.5 Mbps	13.72	0.185	13.90	30
		11 Mbps	13.51	0.348	13.86	30

■ TEST RESULTS_Sum Data of Ant.0 and Ant.1

Conducted Output Power Measurements (802.11b Mode)

802.11b Mode		Rate (Mbps)	Sum Power of Ant.0 & 1 (dBm)	Limit (dBm)
Frequency[MHz]	Channel No.			
2412	1	1 Mbps	14.53	29.99
		2 Mbps	14.82	29.99
		5.5 Mbps	14.82	29.99
		11 Mbps	14.84	29.99
2437	6	1 Mbps	13.97	29.99
		2 Mbps	14.27	29.99
		5.5 Mbps	14.29	29.99
		11 Mbps	14.34	29.99
2462	11	1 Mbps	17.14	29.99
		2 Mbps	17.37	29.99
		5.5 Mbps	17.51	29.99
		11 Mbps	17.44	29.99

■ TEST RESULTS_Ant.0

Conducted Output Power Measurements (802.11g Mode)

802.11g Mode		Rate (Mbps)	Measured Power(dBm)	Duty Cycle Factor (dB)	Measured Power(dBm) + Duty Cycle Factor(dB)	Limit (dBm)
Frequency [MHz]	Channel No.					
2412	1	6 Mbps	11.62	0.227	11.85	30
		9 Mbps	11.52	0.304	11.82	30
		12 Mbps	11.44	0.441	11.88	30
		18 Mbps	11.27	0.584	11.85	30
		24 Mbps	11.46	0.757	12.22	30
		36 Mbps	11.18	1.046	12.23	30
		48 Mbps	10.90	1.320	12.22	30
		54 Mbps	10.80	1.446	12.25	30
2437	6	6 Mbps	11.60	0.227	11.83	30
		9 Mbps	11.53	0.304	11.83	30
		12 Mbps	11.45	0.441	11.89	30
		18 Mbps	11.27	0.584	11.85	30
		24 Mbps	11.48	0.757	12.24	30
		36 Mbps	11.17	1.046	12.22	30
		48 Mbps	10.88	1.320	12.20	30
		54 Mbps	10.77	1.446	12.22	30
2462	11	6 Mbps	11.66	0.227	11.89	30
		9 Mbps	11.53	0.304	11.83	30
		12 Mbps	11.45	0.441	11.89	30
		18 Mbps	11.30	0.584	11.88	30
		24 Mbps	11.44	0.757	12.20	30
		36 Mbps	11.12	1.046	12.17	30
		48 Mbps	10.79	1.320	12.11	30
		54 Mbps	10.62	1.446	12.07	30

■ TEST RESULTS_Ant.1

Conducted Output Power Measurements (802.11g Mode)

802.11g Mode		Rate (Mbps)	Measured Power(dBm)	Duty Cycle Factor (dB)	Measured Power(dBm) + Duty Cycle Factor(dB)	Limit (dBm)
Frequency [MHz]	Channel No.					
2412	1	6 Mbps	10.53	0.228	10.76	30
		9 Mbps	10.43	0.335	10.77	30
		12 Mbps	10.35	0.399	10.75	30
		18 Mbps	10.16	0.556	10.72	30
		24 Mbps	10.34	0.757	11.10	30
		36 Mbps	10.04	1.046	11.09	30
		48 Mbps	9.76	1.412	11.17	30
		54 Mbps	9.64	1.446	11.09	30
2437	6	6 Mbps	11.43	0.228	11.66	30
		9 Mbps	11.32	0.335	11.66	30
		12 Mbps	11.24	0.399	11.64	30
		18 Mbps	11.06	0.556	11.62	30
		24 Mbps	11.23	0.757	11.99	30
		36 Mbps	10.92	1.046	11.97	30
		48 Mbps	10.66	1.412	12.07	30
		54 Mbps	10.53	1.446	11.98	30
2462	11	6 Mbps	11.48	0.228	11.71	30
		9 Mbps	11.38	0.335	11.72	30
		12 Mbps	11.26	0.399	11.66	30
		18 Mbps	11.06	0.556	11.62	30
		24 Mbps	11.29	0.757	12.05	30
		36 Mbps	11.00	1.046	12.05	30
		48 Mbps	10.80	1.412	12.21	30
		54 Mbps	10.54	1.446	11.99	30

■ TEST RESULTS_Sum Data of Ant.0 and Ant.1

Conducted Output Power Measurements (802.11g Mode)

802.11g Mode		Rate (Mbps)	Sum Power of Ant.0 & 1 (dBm)	Limit (dBm)
Frequency[MHz]	Channel No.			
2412	1	6 Mbps	14.35	29.99
		9 Mbps	14.34	29.99
		12 Mbps	14.36	29.99
		18 Mbps	14.33	29.99
		24 Mbps	14.71	29.99
		36 Mbps	14.71	29.99
		48 Mbps	14.74	29.99
		54 Mbps	14.72	29.99
2437	6	6 Mbps	14.76	29.99
		9 Mbps	14.76	29.99
		12 Mbps	14.78	29.99
		18 Mbps	14.75	29.99
		24 Mbps	15.13	29.99
		36 Mbps	15.11	29.99
		48 Mbps	15.15	29.99
		54 Mbps	15.11	29.99
2462	11	6 Mbps	14.81	29.99
		9 Mbps	14.79	29.99
		12 Mbps	14.79	29.99
		18 Mbps	14.76	29.99
		24 Mbps	15.14	29.99
		36 Mbps	15.12	29.99
		48 Mbps	15.17	29.99
		54 Mbps	15.04	29.99

■ TEST RESULTS_Ant.0

Conducted Output Power Measurements (802.11n Mode) _20 MHz BW

802.11n Mode		MCS Index	Measured Power(dBm)	Duty Cycle Factor (dB)	Measured Power(dBm) + Duty Cycle Factor(dB)	Limit (dBm)
Frequency [MHz]	Channel No.					
2412	1	0	10.37	0.211	10.58	30
		1	10.20	0.404	10.60	30
		2	10.02	0.580	10.60	30
		3	10.46	0.792	11.25	30
		4	10.16	1.058	11.22	30
		5	9.87	1.357	11.23	30
		6	9.76	1.484	11.24	30
		7	9.66	1.602	11.26	30
2437	6	0	10.39	0.211	10.60	30
		1	10.21	0.404	10.61	30
		2	10.03	0.580	10.61	30
		3	10.47	0.792	11.26	30
		4	10.16	1.058	11.22	30
		5	9.87	1.357	11.23	30
		6	9.75	1.484	11.23	30
		7	9.64	1.602	11.24	30
2462	11	0	10.38	0.211	10.59	30
		1	10.18	0.404	10.58	30
		2	10.04	0.580	10.62	30
		3	10.39	0.792	11.18	30
		4	9.99	1.058	11.05	30
		5	9.69	1.357	11.05	30
		6	9.58	1.484	11.06	30
		7	9.59	1.602	11.19	30

■ TEST RESULTS_Ant.1

Conducted Output Power Measurements (802.11n Mode) _20 MHz BW

802.11n Mode		MCS Index	Measured Power(dBm)	Duty Cycle Factor (dB)	Measured Power(dBm) + Duty Cycle Factor(dB)	Limit (dBm)
Frequency [MHz]	Channel No.					
2412	1	0	9.22	0.233	9.45	30
		1	9.06	0.482	9.54	30
		2	8.87	0.607	9.48	30
		3	9.22	0.757	9.98	30
		4	8.92	1.087	10.01	30
		5	8.67	1.448	10.12	30
		6	8.55	1.431	9.98	30
		7	8.43	1.543	9.97	30
2437	6	0	10.15	0.233	10.38	30
		1	9.96	0.482	10.44	30
		2	9.78	0.607	10.39	30
		3	10.14	0.757	10.90	30
		4	9.84	1.087	10.93	30
		5	9.58	1.448	11.03	30
		6	9.46	1.431	10.89	30
		7	9.34	1.543	10.88	30
2462	11	0	10.24	0.233	10.47	30
		1	10.03	0.482	10.51	30
		2	9.82	0.607	10.43	30
		3	10.27	0.757	11.03	30
		4	9.93	1.087	11.02	30
		5	9.79	1.448	11.24	30
		6	9.55	1.431	10.98	30
		7	9.37	1.543	10.91	30

■ TEST RESULTS_Sum Data of Ant.0 and Ant.1

Conducted Output Power Measurements (802.11n Mode) _20 MHz BW

802.11n Mode		MCS Index	Sum Power of Ant.0 & 1 (dBm)	Limit (dBm)
Frequency[MHz]	Channel No.			
2412	1	0	13.06	29.99
		1	13.11	29.99
		2	13.09	29.99
		3	13.67	29.99
		4	13.67	29.99
		5	13.72	29.99
		6	13.67	29.99
		7	13.67	29.99
2437	6	0	13.50	29.99
		1	13.54	29.99
		2	13.51	29.99
		3	14.09	29.99
		4	14.09	29.99
		5	14.14	29.99
		6	14.07	29.99
		7	14.07	29.99
2462	11	0	13.54	29.99
		1	13.56	29.99
		2	13.54	29.99
		3	14.12	29.99
		4	14.05	29.99
		5	14.16	29.99
		6	14.03	29.99
		7	14.06	29.99

■ TEST RESULTS_Ant.0

Conducted Output Power Measurements (802.11n Mode) _40 MHz BW

802.11n Mode		MCS Index	Measured Power(dBm)	Duty Cycle Factor (dB)	Measured Power(dBm) + Duty Cycle Factor(dB)	Limit (dBm)
Frequency [MHz]	Channel No.					
2422	3	0	10.87	0.421	11.29	30
		1	10.55	0.778	11.33	30
		2	10.23	1.201	11.43	30
		3	10.07	1.347	11.42	30
		4	9.66	1.807	11.47	30
		5	9.30	2.144	11.44	30
		6	9.13	2.286	11.42	30
		7	8.99	2.605	11.60	30
2437	6	0	10.71	0.421	11.13	30
		1	10.37	0.778	11.15	30
		2	10.05	1.201	11.25	30
		3	9.86	1.347	11.20	30
		4	9.40	1.807	11.21	30
		5	9.01	2.144	11.15	30
		6	8.86	2.286	11.14	30
		7	8.73	2.605	11.34	30
2452	9	0	8.82	0.421	9.24	30
		1	8.56	0.778	9.33	30
		2	8.14	1.201	9.34	30
		3	7.73	1.347	9.07	30
		4	7.24	1.807	9.05	30
		5	6.90	2.144	9.04	30
		6	6.68	2.286	8.96	30
		7	6.66	2.605	9.26	30

■ TEST RESULTS_Ant.1

Conducted Output Power Measurements (802.11n Mode) _40 MHz BW

802.11n Mode		MCS Index	Measured Power(dBm)	Duty Cycle Factor (dB)	Measured Power(dBm) + Duty Cycle Factor(dB)	Limit (dBm)
Frequency [MHz]	Channel No.					
2422	3	0	9.40	0.421	9.83	30
		1	9.01	0.845	9.86	30
		2	8.68	1.172	9.85	30
		3	8.35	1.347	9.69	30
		4	7.87	1.853	9.72	30
		5	7.47	2.115	9.58	30
		6	7.33	2.255	9.58	30
		7	7.23	2.484	9.72	30
2437	6	0	10.40	0.421	10.82	30
		1	10.01	0.845	10.86	30
		2	9.71	1.172	10.88	30
		3	9.50	1.347	10.85	30
		4	9.00	1.853	10.85	30
		5	8.65	2.115	10.77	30
		6	8.51	2.255	10.76	30
		7	8.36	2.484	10.85	30
2452	9	0	10.16	0.421	10.58	30
		1	9.72	0.845	10.56	30
		2	9.56	1.172	10.73	30
		3	9.32	1.347	10.67	30
		4	8.90	1.853	10.75	30
		5	8.55	2.115	10.67	30
		6	8.41	2.255	10.66	30
		7	8.27	2.484	10.76	30


■ TEST RESULTS_Sum Data of Ant.0 and Ant.1

Conducted Output Power Measurements (802.11n Mode) _40 MHz BW

802.11n Mode		MCS Index	Sum Power of Ant.0 & 1 (dBm)	Limit (dBm)
Frequency[MHz]	Channel No.			
2422	3	0	13.63	30
		1	13.67	30
		2	13.72	30
		3	13.65	30
		4	13.69	30
		5	13.62	30
		6	13.61	30
		7	13.77	30
2437	6	0	13.99	30
		1	14.02	30
		2	14.08	30
		3	14.04	30
		4	14.04	30
		5	13.97	30
		6	13.96	30
		7	14.11	30
2452	9	0	12.97	30
		1	13.00	30
		2	13.10	30
		3	12.95	30
		4	12.99	30
		5	12.94	30
		6	12.90	30
		7	13.08	30


▣ RESULT PLOTS-Ant.0_40 MHz BW (2422 MHz ~2452 MHz)

Conducted Output Power (802.11n-CH 3) MCS7

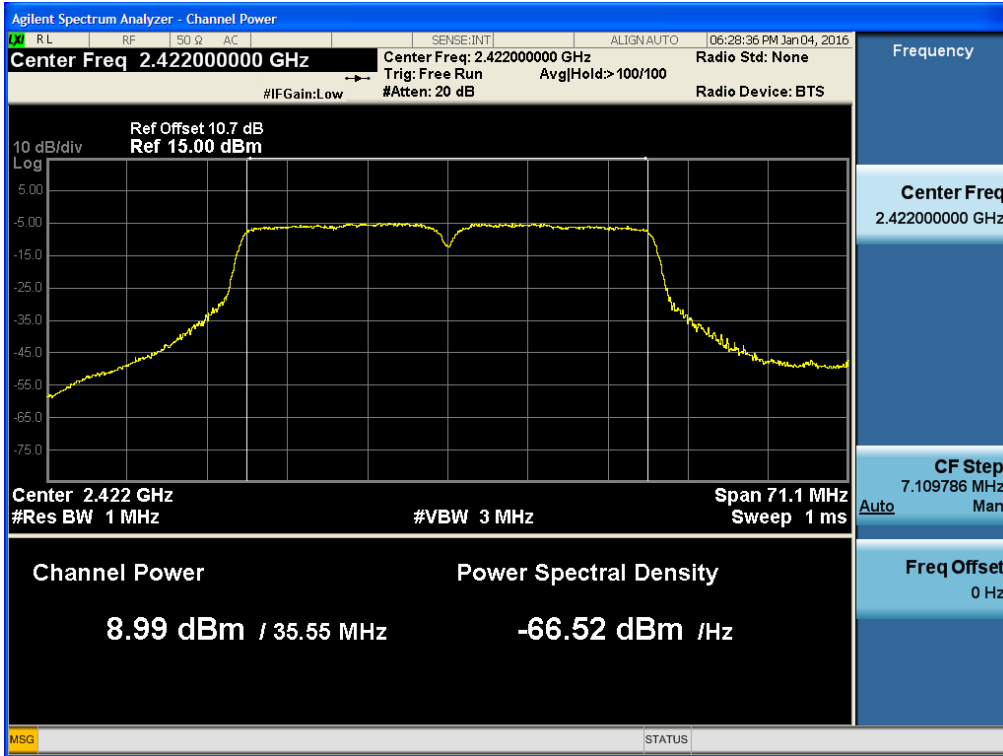

▣ RESULT PLOTS-Ant.1_40 MHz BW (2422 MHz ~2452 MHz)

Conducted Output Power (802.11n-CH 6) MCS2

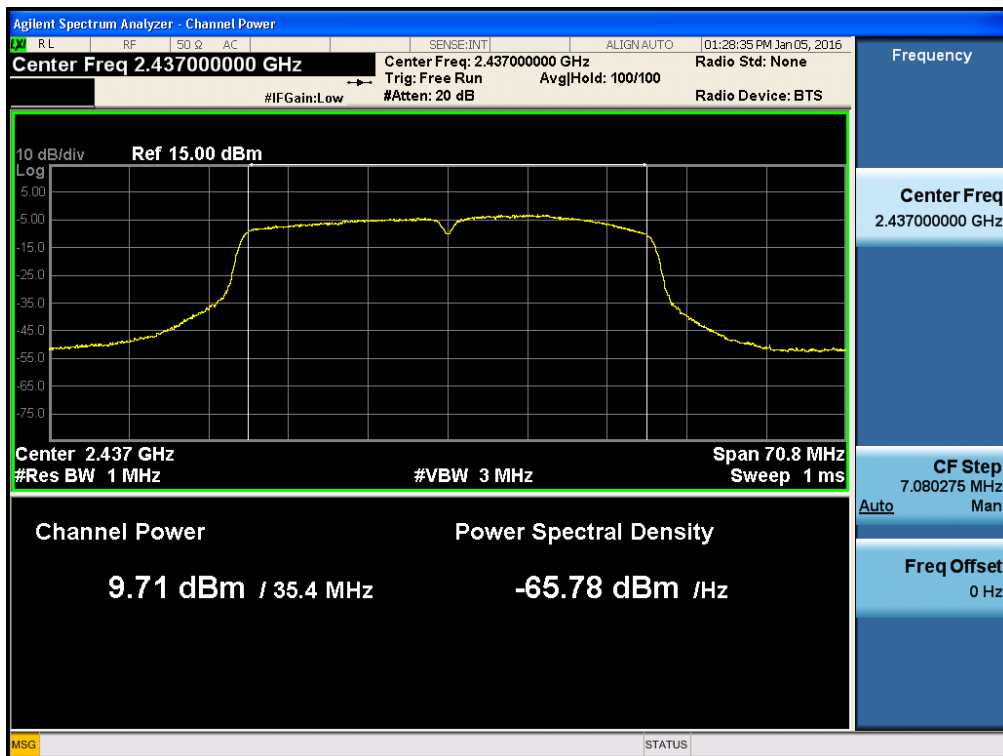

8.4 POWER SPECTRAL DENSITY (802.11b/g/n)

Test Requirements and limit, §15.247(e)

The peak power spectral density is measured with a spectrum analyzer connected to the antenna terminal while the EUT is operating in transmission mode at the appropriate frequencies.

Minimum Standard – the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

■ Limit

Operating Mode	Band	Mode	Ant. Port	Ant. Gain (dBi)	Limit (dBm)
SISO	2.4 GHz	802.11b/g/n	0	2.14	8
			1	3.78	8
MIMO(2 TX)		802.11b/g/n_HT20	0 & 1	6.01	7.99
		802.11n_HT40		3.04	8

Note : 1. If all antenna gains are not equal,


$$\text{Directional gain} = 10 \cdot \log\left[\frac{10^{G1/20} + 10^{G2/20} + \dots + 10^{GN/20}}{N}\right] \text{ dBi}$$

$$\text{Directional gain} = 10 \cdot \log\left[\frac{10^{G1/10} + 10^{G2/10} + \dots + 10^{GN/10}}{N}\right] \text{ dBi}$$

(according to KDB662911 D01 v02r01)

2. Limit is calculated by antenna gain.

■ **TEST CONFIGURATION**



■ **TEST PROCEDURE**

We tested according to Procedure 10.2 in KDB 558074, issued 06/09/2015

The spectrum analyzer is set to :

Set analyzer center frequency to DTS channel center frequency.

Span = 1.5 times the DTS channel bandwidth.

RBW = 3 kHz ≤ RBW ≤ 100 kHz.

VBW ≥ 3 x RBW.

Sweep = auto couple

Detector = peak

Trace Mode = max hold

Allow trace to fully stabilize.

Use the peak marker function to determine the maximum amplitude level within the RBW.

If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

■ **Sample Calculation**

$$PSD = \text{Reading Value} + \text{ATT loss} + \text{Cable loss}(1 \text{ ea})$$

Note :

1. Spectrum reading values are not plot data. The PSD results in plot is already including the actual values of loss for the attenuator and cable combination.
2. Spectrum offset = Attenuator loss + Cable loss
3. We apply to the offset in the 2.4 GHz range that was rounded off to the closest tenth dB. So, 10.7 dB is offset for 2.4 GHz Band.

Actual value of loss for the attenuator and cable combination is below table.

Band	Frequency(MHz)	Loss(dB)
2.4 GHz	2412	10.65
	2437	10.65
	2462	10.66

(Actual value of loss for the attenuator and cable combination)

■ TEST RESULTS_Ant.0

Conducted Power Density Measurements

Frequency (MHz)	Channel No.	Mode	Test Result		
			PSD (dBm)	Limit (dBm)	Pass/Fail
2412	1	802.11b	-2.101	8	Pass
2437	6		-4.960	8	Pass
2462	11		-1.865	8	Pass
2412	1	802.11g	-13.006	8	Pass
2437	6		-13.112	8	Pass
2462	11		-11.726	8	Pass
2412	1	802.11n 20MHz BW	-13.259	8	Pass
2437	6		-14.850	8	Pass
2462	11		-13.139	8	Pass
2422	3	802.11n 40MHz BW	-16.298	8	Pass
2437	6		-17.080	8	Pass
2452	9		-18.362	8	Pass

■ TEST RESULTS_Ant.1

Conducted Power Density Measurements

Frequency (MHz)	Channel No.	Mode	Test Result		
			PSD (dBm)	Limit (dBm)	Pass/Fail
2412	1	802.11b	-5.901	8	Pass
2437	6		-2.157	8	Pass
2462	11		-2.964	8	Pass
2412	1	802.11g	-14.167	8	Pass
2437	6		-12.360	8	Pass
2462	11		-12.984	8	Pass
2412	1	802.11n 20MHz BW	-15.549	8	Pass
2437	6		-13.642	8	Pass
2462	11		-13.294	8	Pass
2422	3	802.11n 40MHz BW	-16.736	8	Pass
2437	6		-18.156	8	Pass
2452	9		-16.630	8	Pass

■ TEST RESULTS_Sum Data of Ant.0 and Ant.1


Conducted Power Density Measurements

Frequency (MHz)	Channel No.	Mode	Test Result		
			PSD (dBm)	Limit (dBm)	Pass/Fail
2412	1	802.11b	-0.78	8	Pass
2437	6		-0.44		Pass
2462	11		0.61		Pass
2412	1	802.11g	-10.56	8	Pass
2437	6		-9.72		Pass
2462	11		-9.32		Pass
2412	1	802.11n 20MHz BW	-11.32	7.99	Pass
2437	6		-11.21		Pass
2462	11		-10.21		Pass
2422	3	802.11n 40MHz BW	-13.50	8	Pass
2437	6		-14.59		Pass
2452	9		-14.44		Pass


Note : In order to simplify the report, attached plots were only the highest PSD channel.

▣ RESULT PLOTS_Ant.0


Power Spectral Density (802.11b-CH 11)

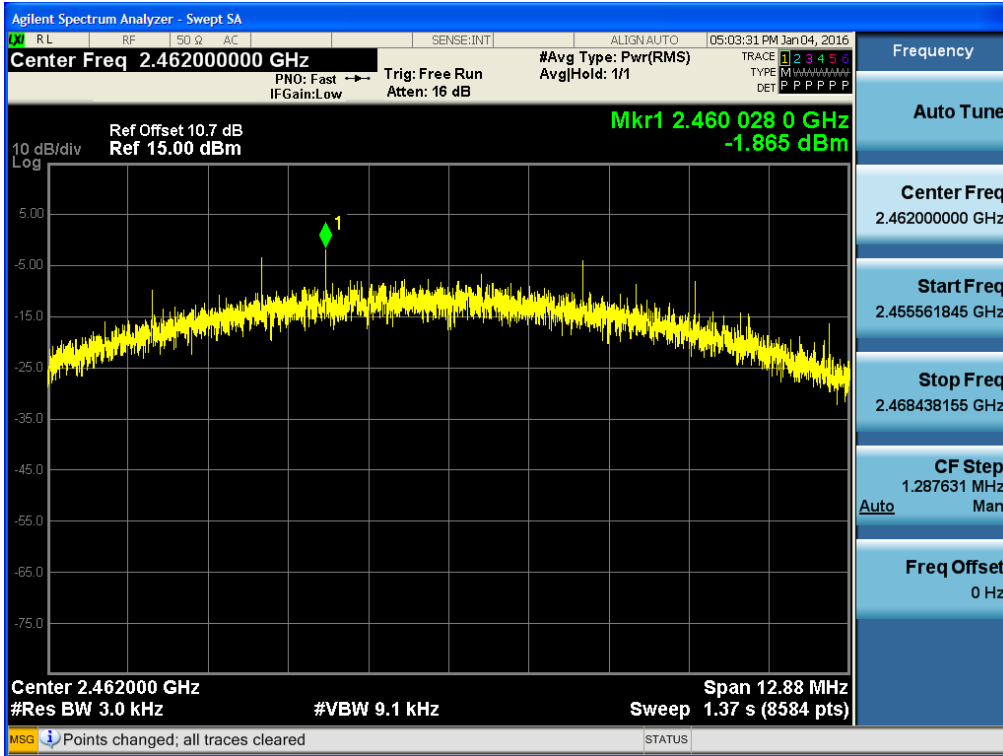


Power Spectral Density (802.11g-CH 11)

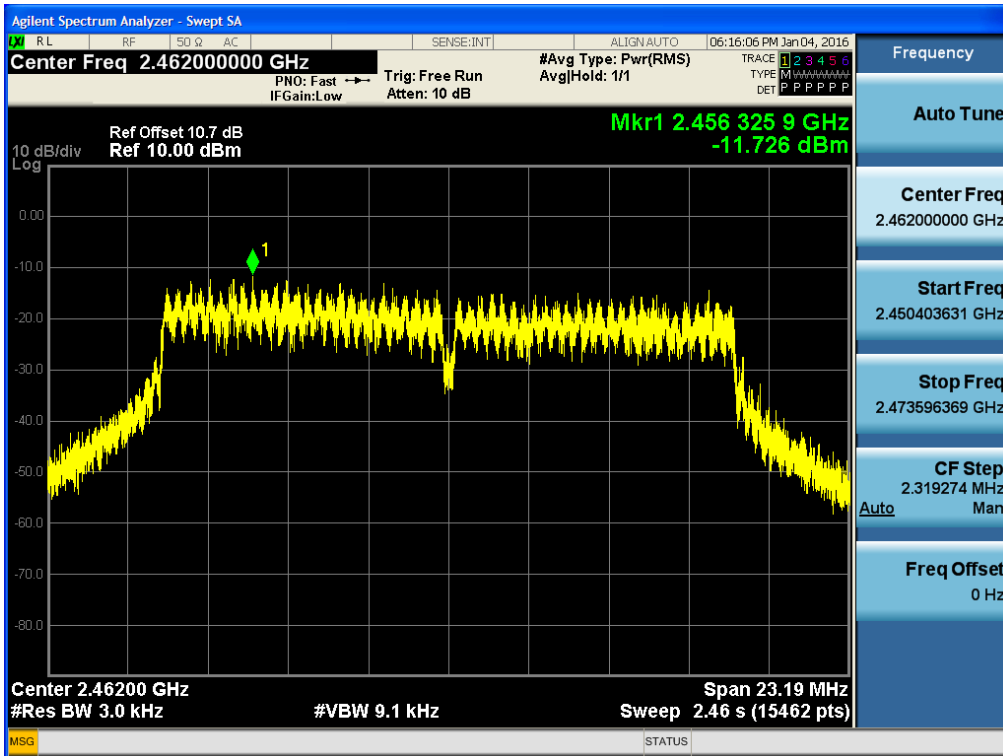

Power Spectral Density (802.11n_20MHz BW -CH 11)

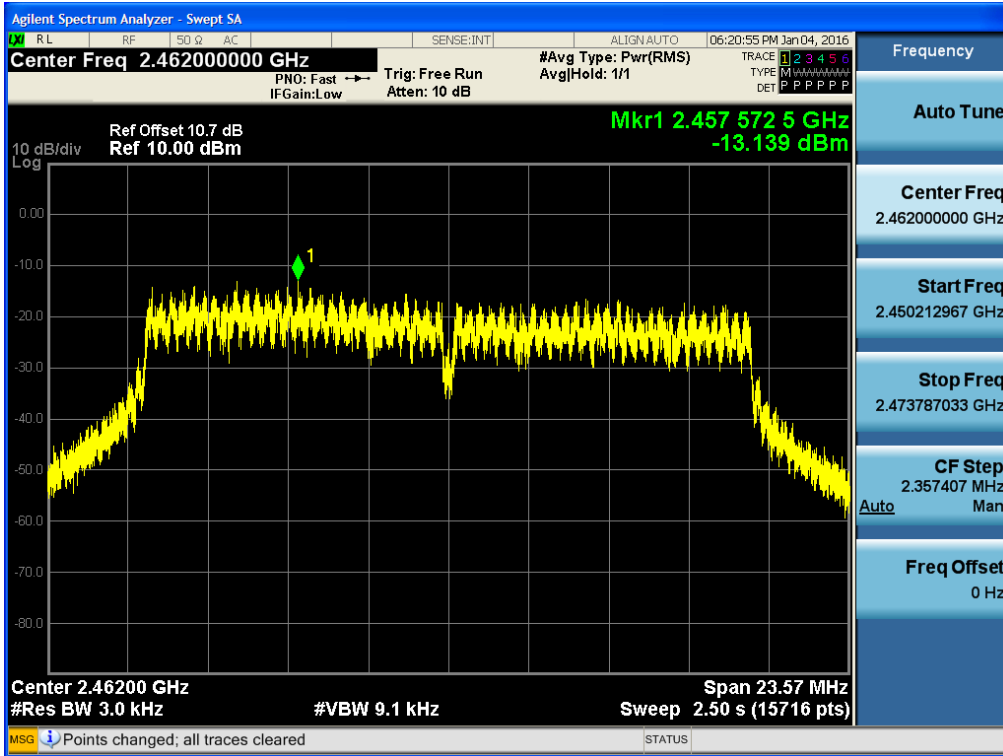


Power Spectral Density (802.11n_40MHz BW -CH 3)

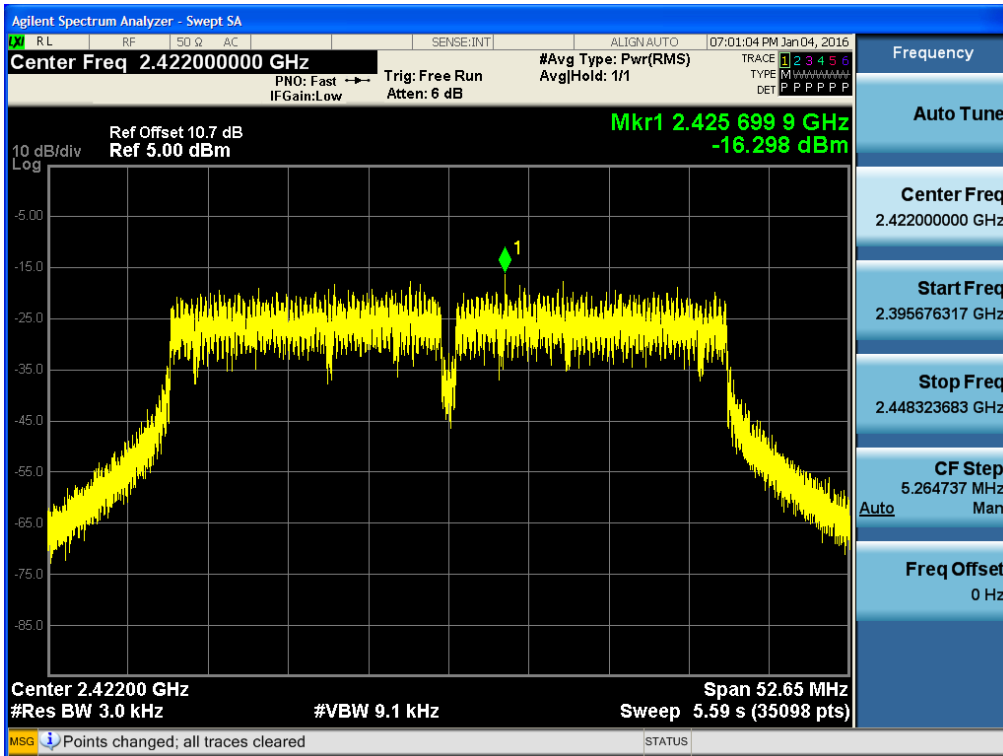


▣ RESULT PLOTS_Ant.1


Power Spectral Density (802.11b-CH 6)

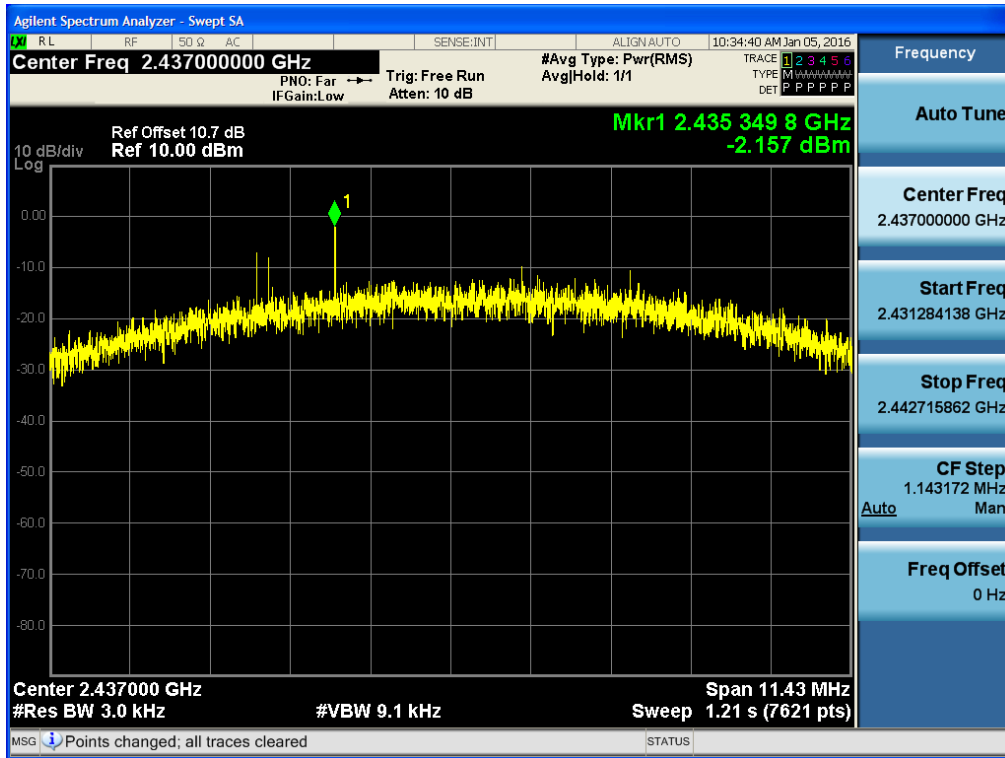


Power Spectral Density (802.11g-CH 6)

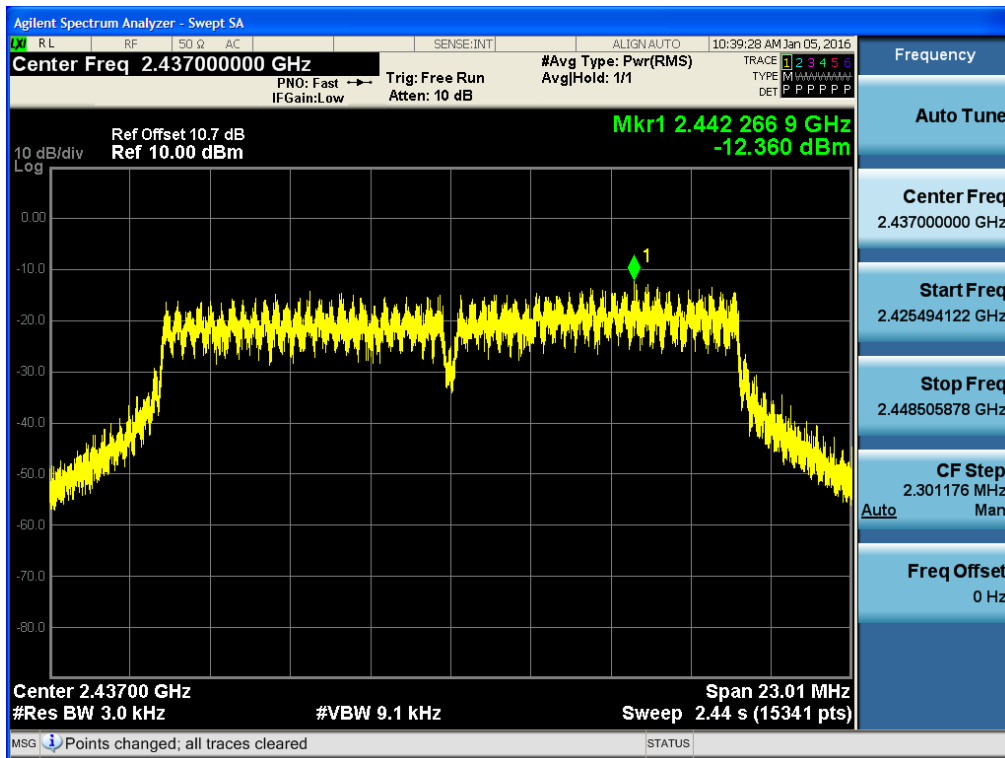

Power Spectral Density (802.11n_20MHz BW -CH 11)

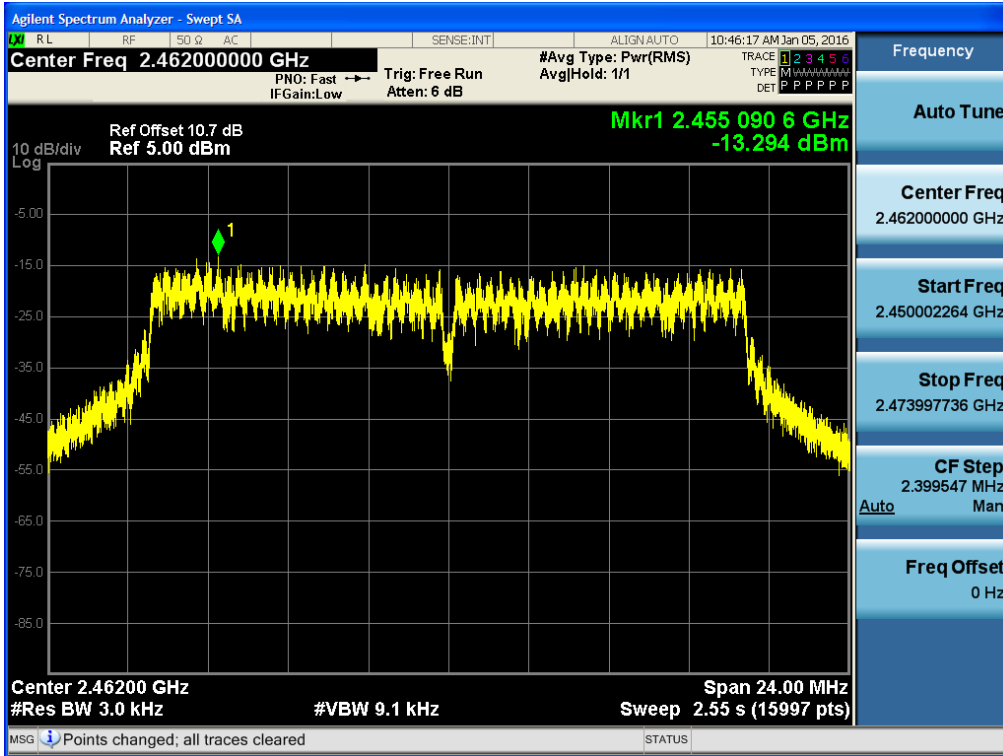

Power Spectral Density (802.11n_40MHz BW -CH 9)

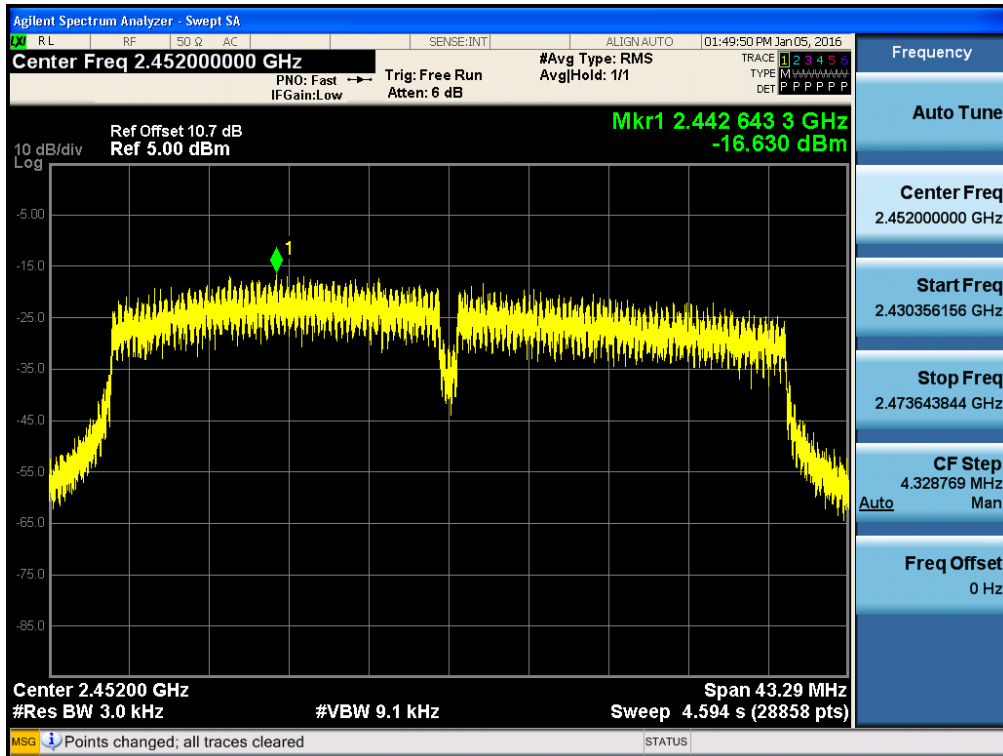


8.5 OUT OF BAND EMISSIONS AT THE BAND EDGE/ CONDUCTED SPURIOUS EMISSIONS

Test Requirements and limit, §15.247(d)

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in § 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in § 15.205(a), must also comply with the radiated emission limits specified in § 15.209(a) (see § 15.205(c)).

Limit : 20 dBc

■ TEST CONFIGURATION



■ TEST PROCEDURE

The transmitter output is connected to the spectrum analyzer. (Procedure 11.0 in KDB 558074, issued 06/09/2015)

RBW = 100 kHz

VBW \geq 3 x RBW

Set span to encompass the spectrum to be examined

Detector = Peak

Trace Mode = max hold

Sweep time = auto couple

Ensure that the number of measurement points \geq Span/RBW

Allow trace to fully stabilize.

Use peak marker function to determine the maximum amplitude level.

Measurements are made over the 30 MHz to 10th harmonic range with the transmitter set to the lowest, middle, and highest channels.

Note :

1. The band edge results in plot is already including the actual values of loss for the attenuator and cable combination.

2. Spectrum offset = Attenuator loss + Cable loss
3. We apply to the offset in the 2.4 GHz range that was rounded off to the closest tenth dB. So, 10.7 dB is offset for 2.4 GHz Band. Actual value of loss for the attenuator and cable combination is below table.

Band	Frequency(MHz)	Loss(dB)
2.4 GHz	2412	10.65
	2437	10.65
	2462	10.66

(Actual value of loss for the attenuator and cable combination)

4. In case of conducted spurious emissions test, please check factors blow table.
5. In order to simplify the report, attached plots were only the worst case channel.

■ FACTORS FOR FREQUENCY

Freq(MHz)	Factor(dB)
30	11.30
100	9.83
200	10.19
300	10.13
400	10.23
500	10.25
600	10.32
700	10.35
800	10.35
900	10.34
1000	10.39
2000	10.64
2400*	10.65
2500*	10.67
3000	10.68
4000	10.89
5000	11.07
6000	11.06
7000	11.35
8000	11.32
9000	11.48
10000	11.56


11000	11.56
12000	11.68
13000	11.83
14000	11.90
15000	11.98
16000	12.04
17000	12.02
18000	12.08
19000	12.07
20000	12.14
21000	12.17
22000	12.31
23000	12.60
24000	12.34
25000	12.53

Note : 1. ** is fundamental frequency range.


2. Factor = Cable loss + Attenuator loss

RESULT PLOTS_Ant.0


BandEdge (802.11b-CH1)

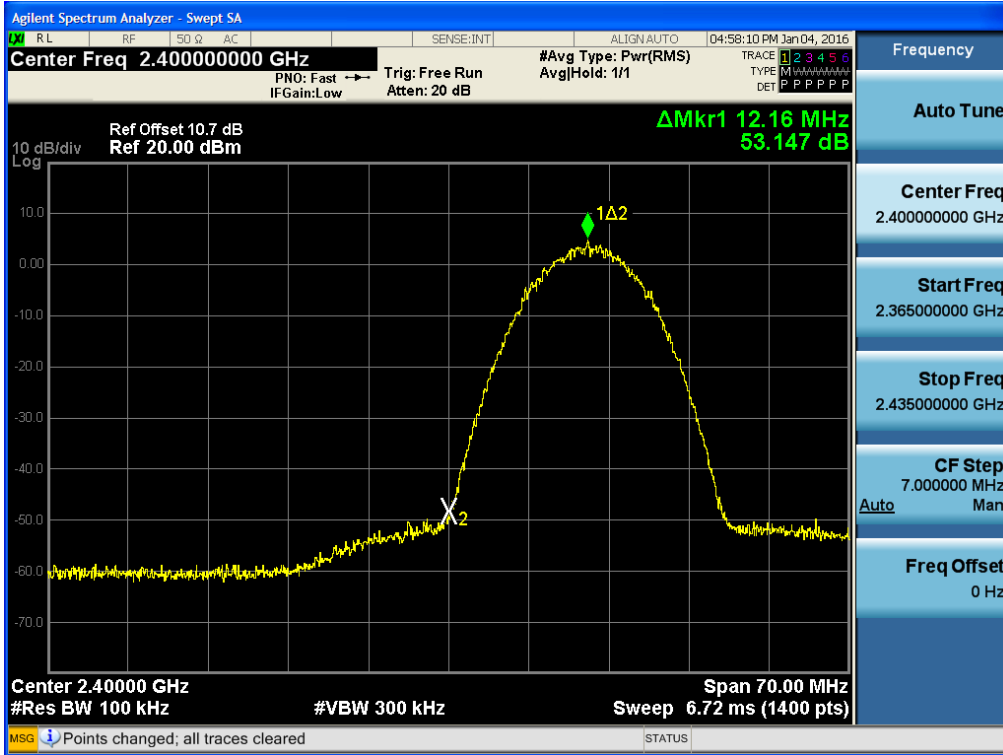


BandEdge (802.11b-CH11)

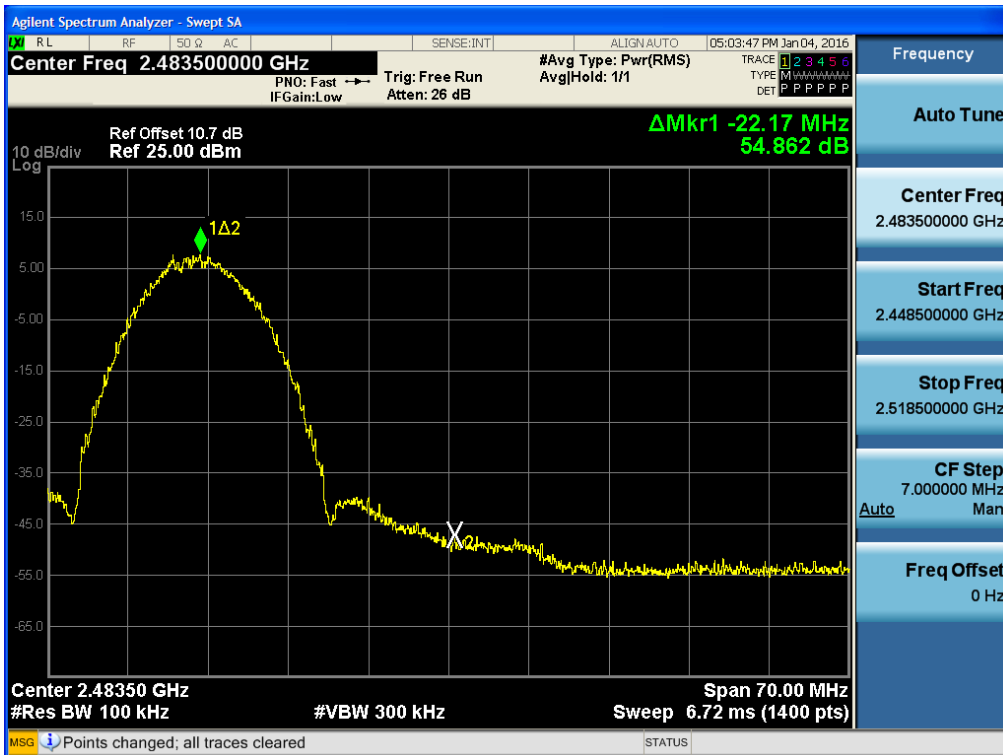


BandEdge (802.11g-CH1)

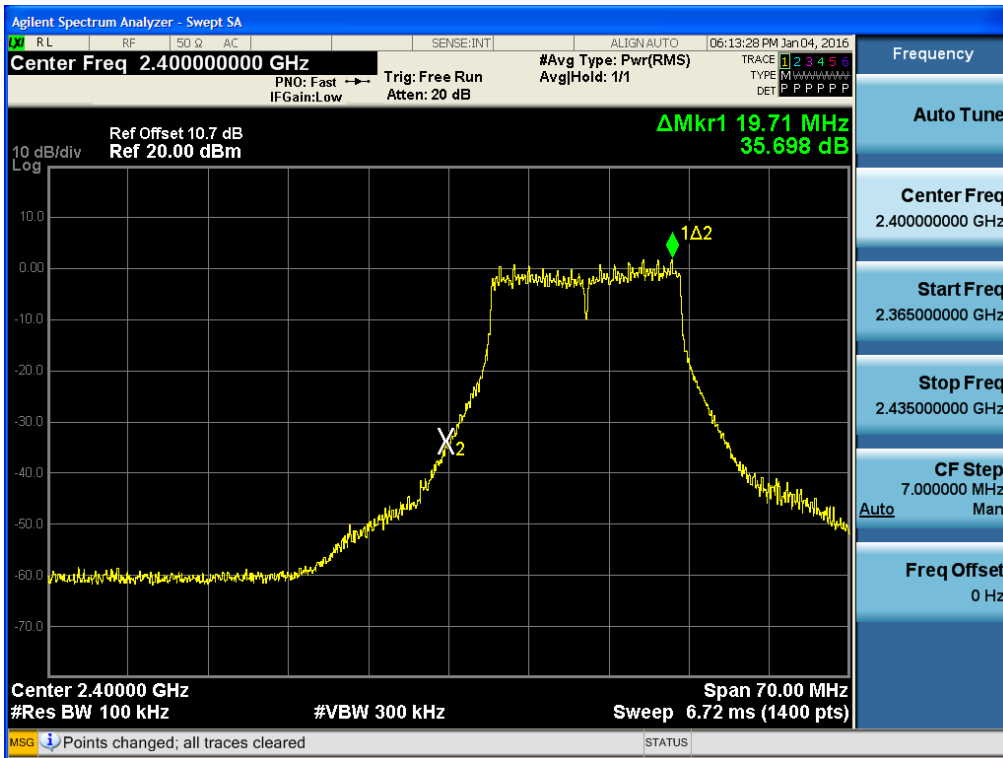


BandEdge (802.11g-CH11)

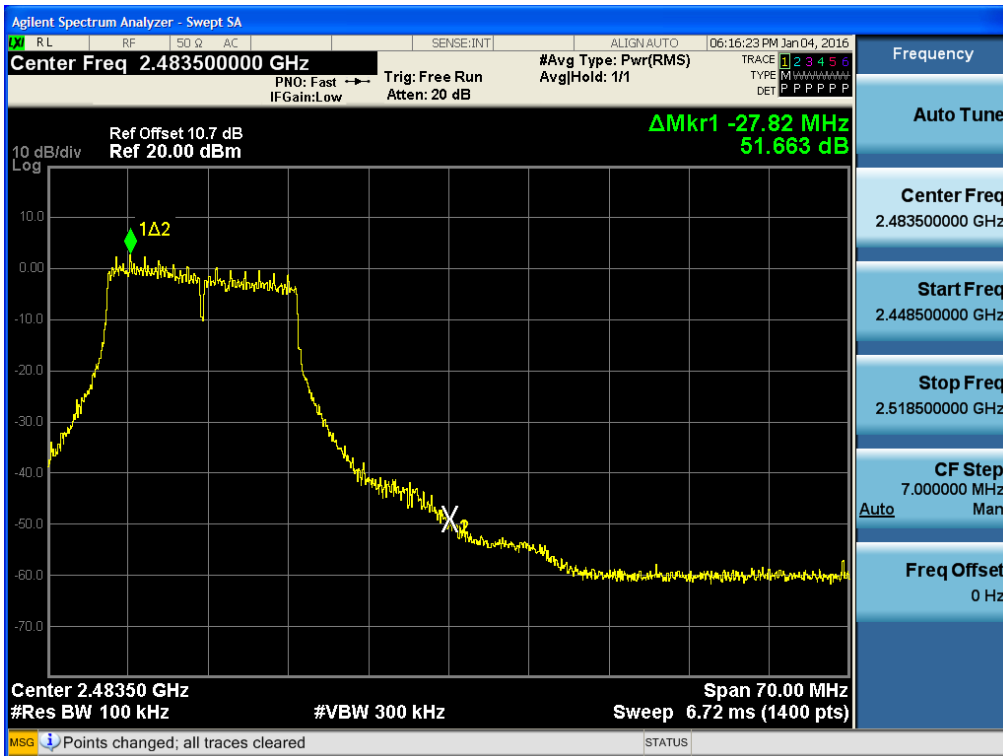


Band Edge (802.11n_20MHz-CH1)

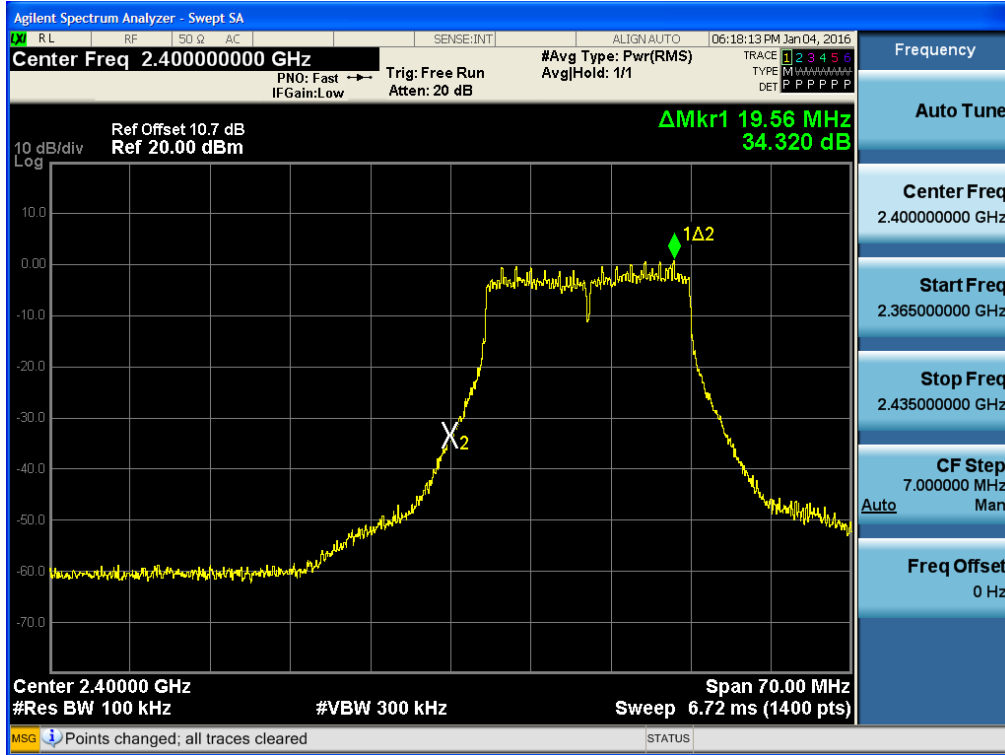


Band Edge (802.11n_20MHz-CH11)

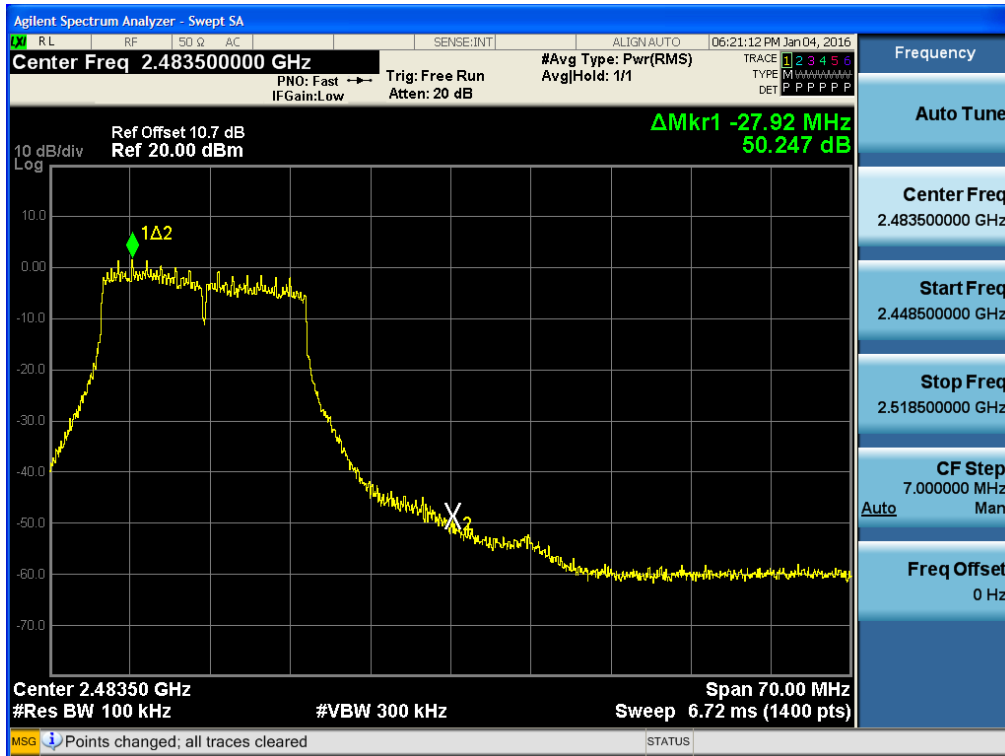

Band Edge (802.11n_40MHz-CH 3)

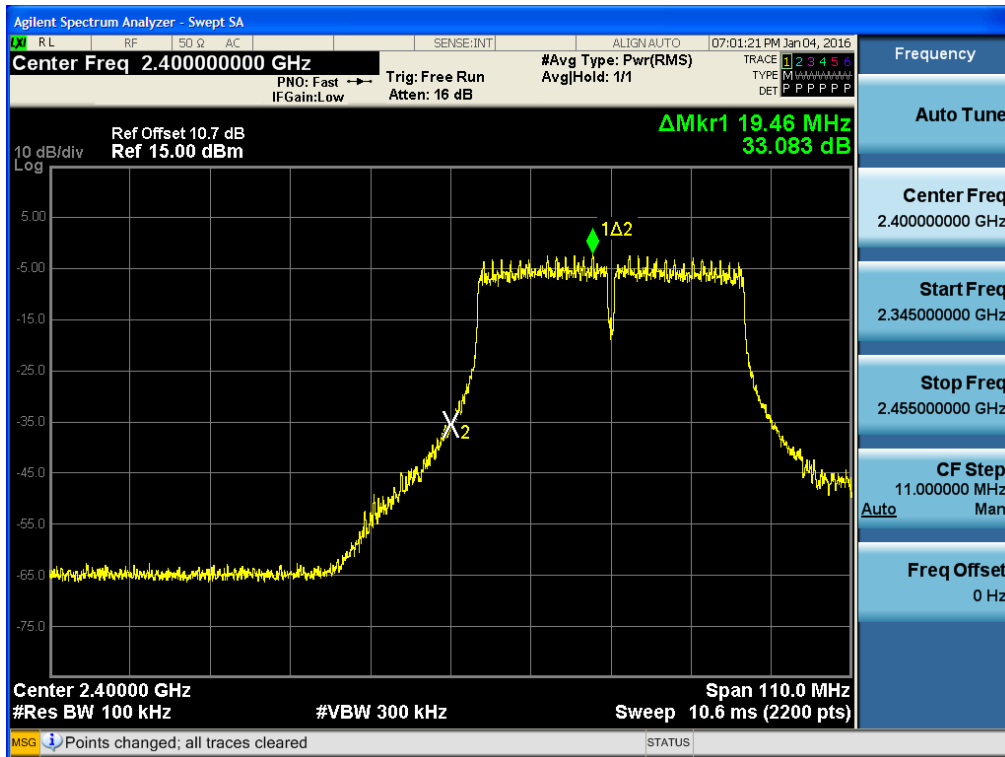


Band Edge (802.11n_40MHz-CH 9)

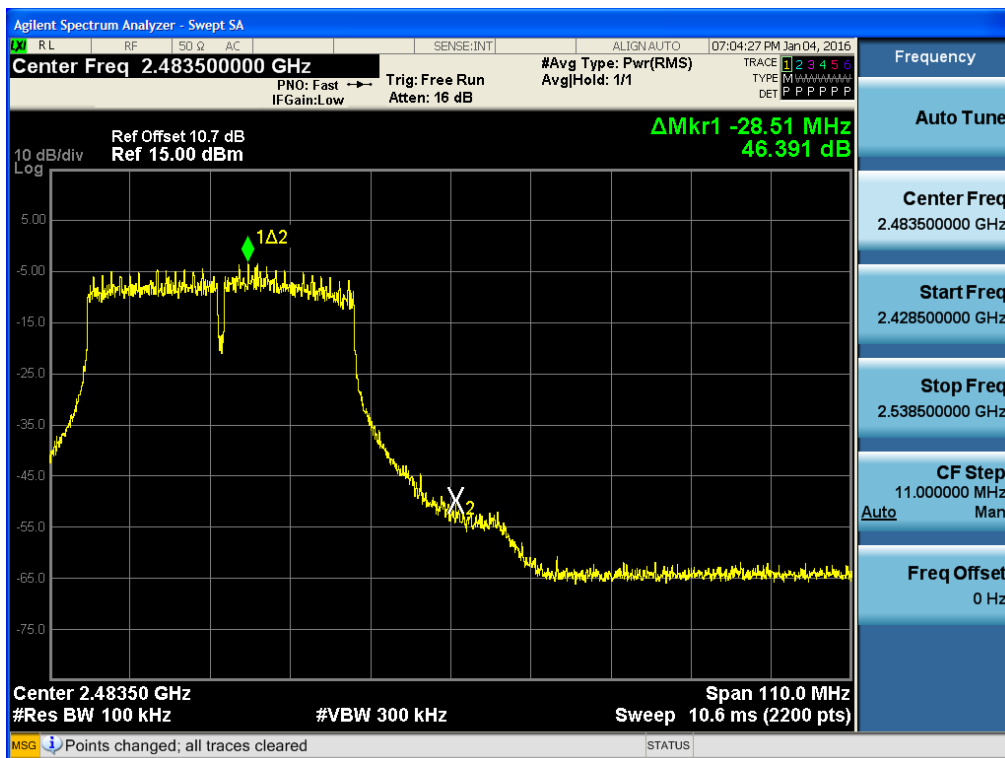


RESULT PLOTS_Ant.1


BandEdge (802.11b-CH1)

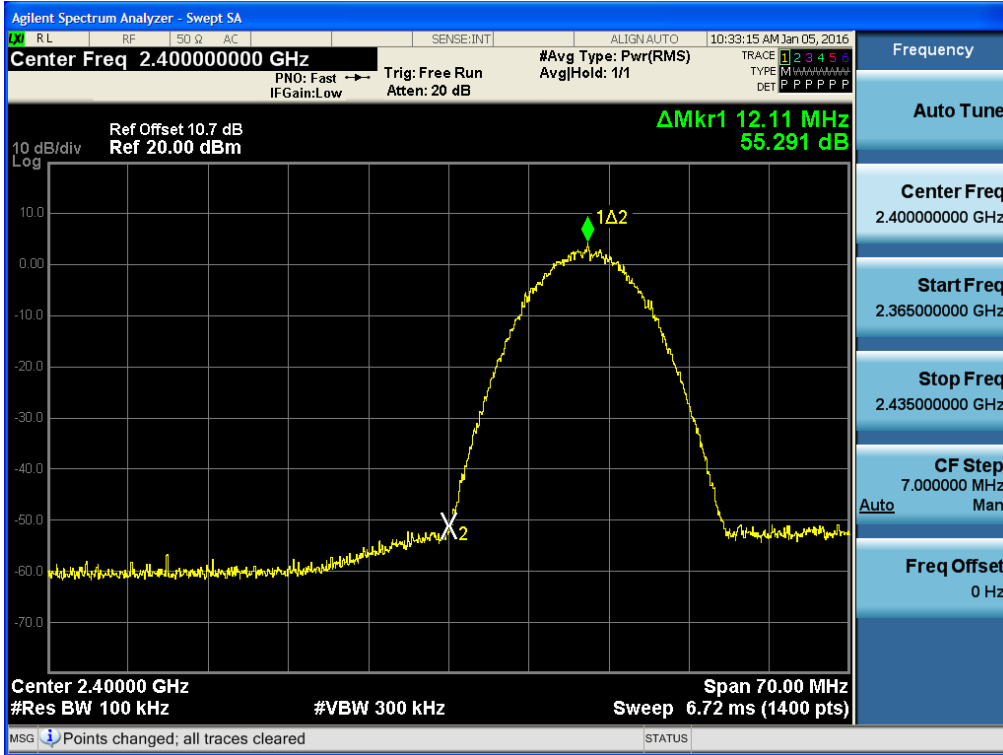

BandEdge (802.11b-CH11)

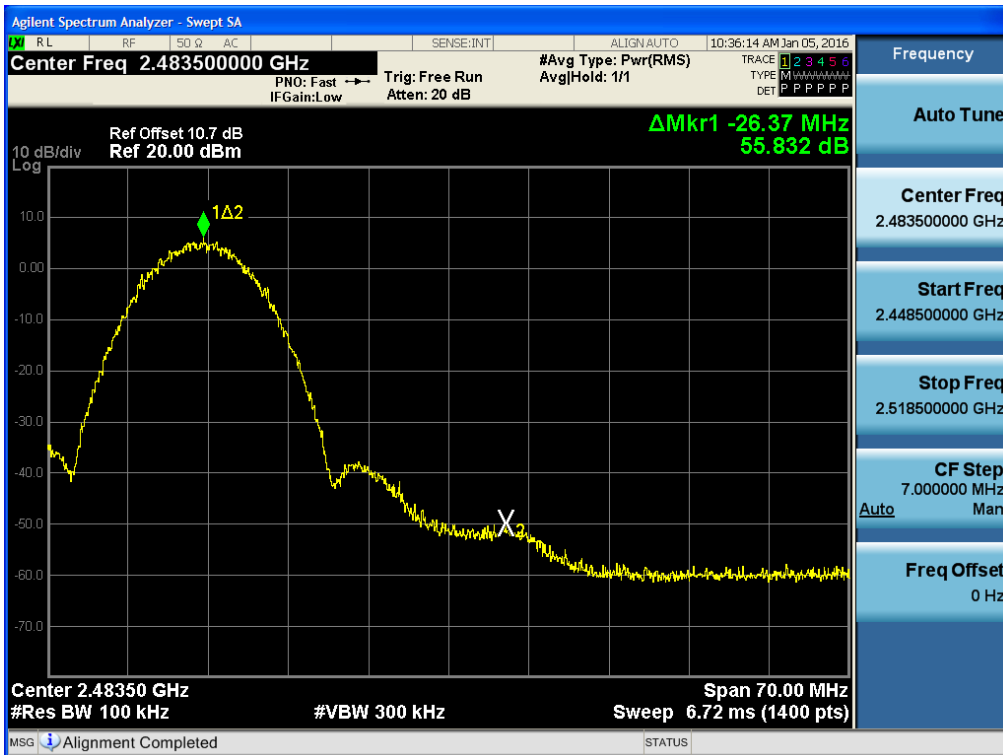


BandEdge (802.11g-CH1)

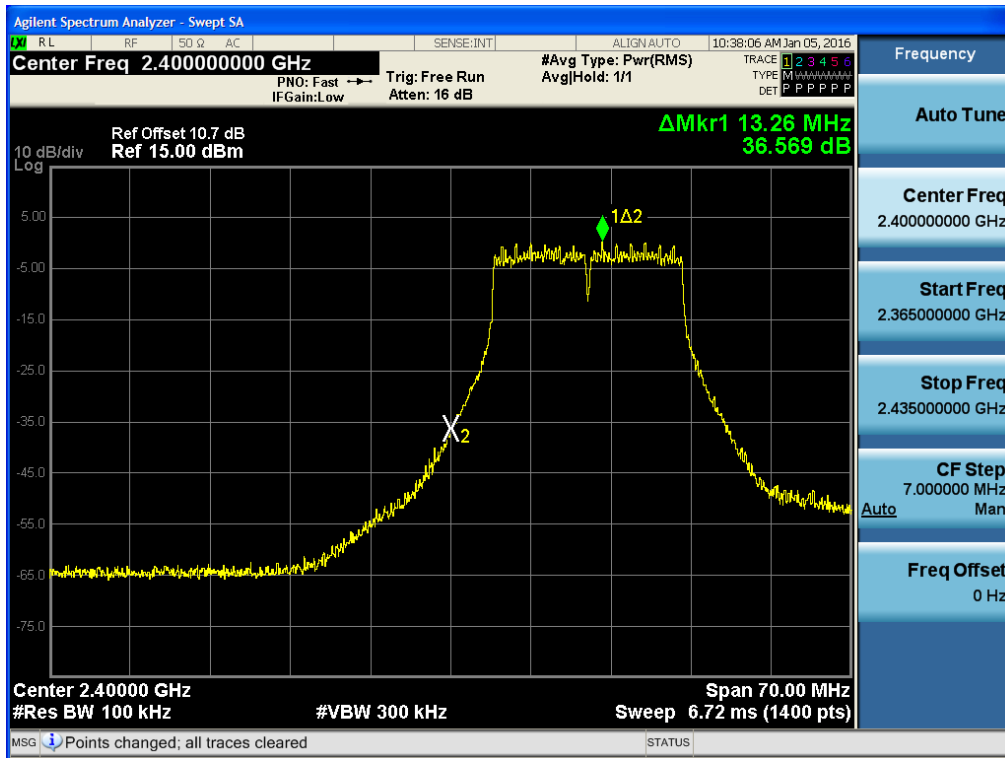


BandEdge (802.11g-CH11)




Band Edge (802.11n_20MHz-CH1)

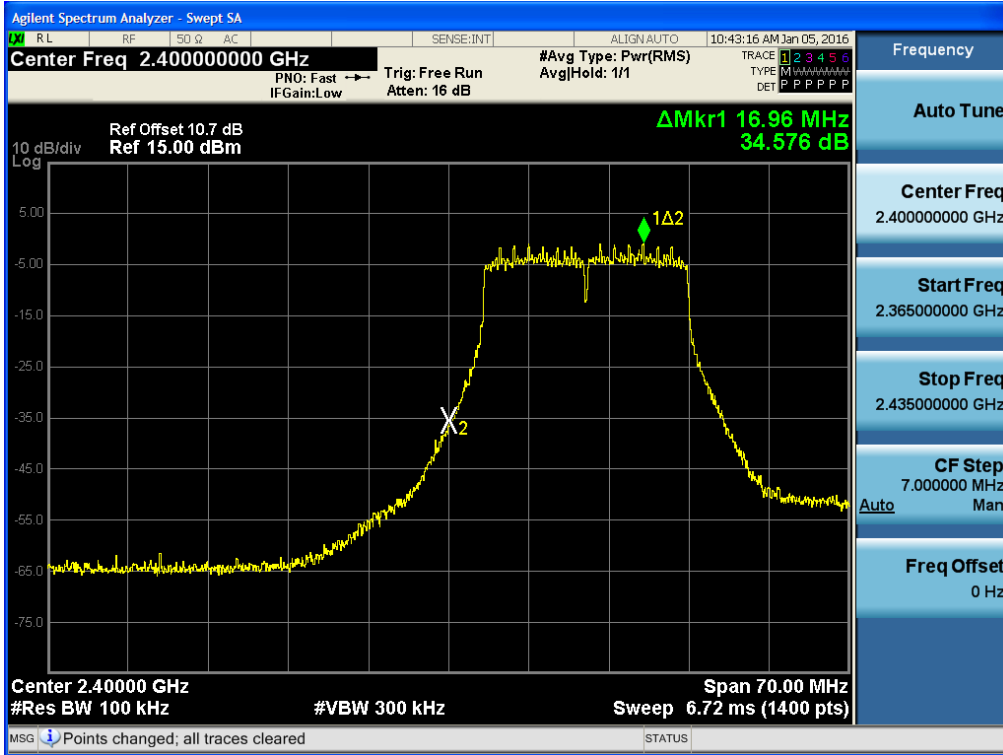


Band Edge (802.11n_20MHz-CH11)

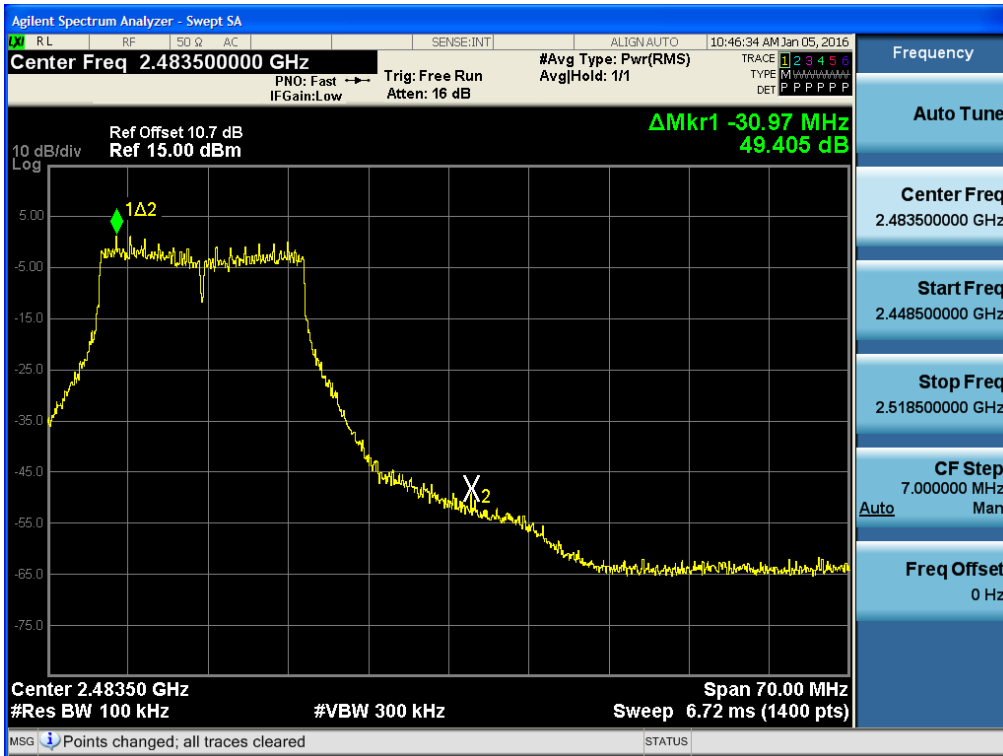

Band Edge (802.11n_40MHz-CH 3)

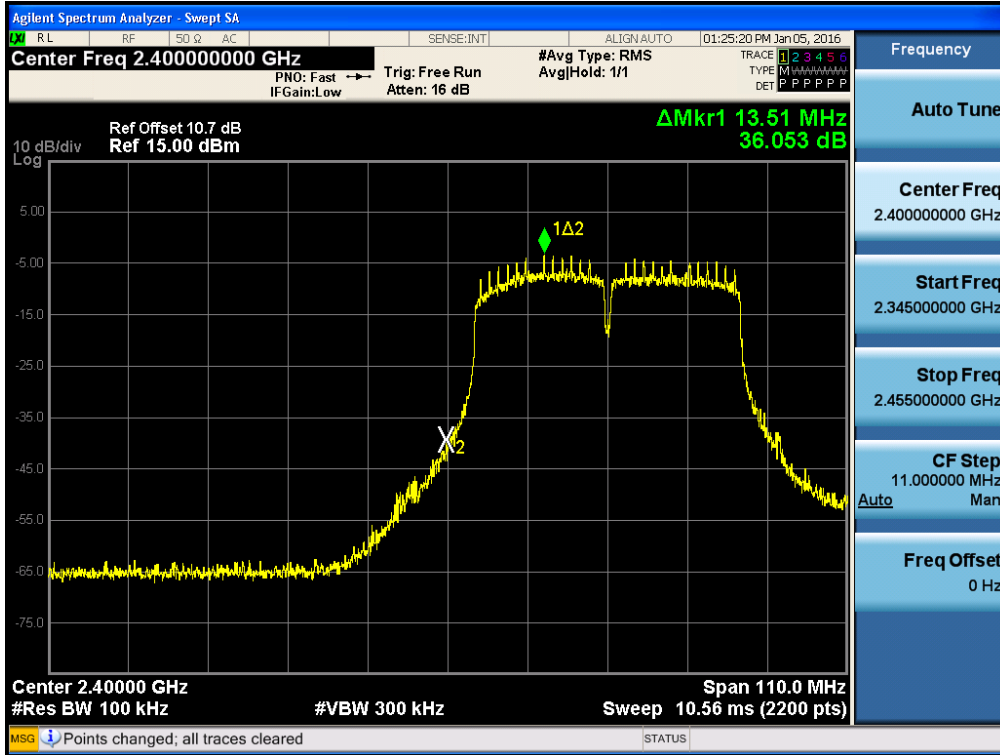


Band Edge (802.11n_40MHz-CH 9)

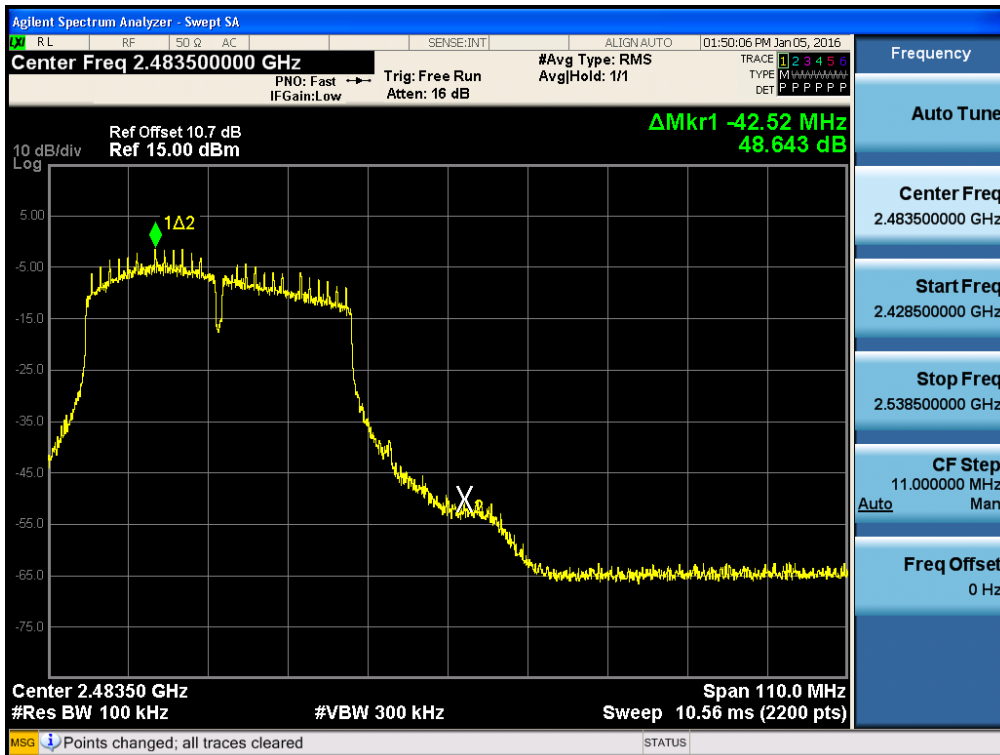

Ant.0


30 MHz ~ 1 GHz

Conducted Spurious Emission (802.11g_Ch.6_36 Mbps)

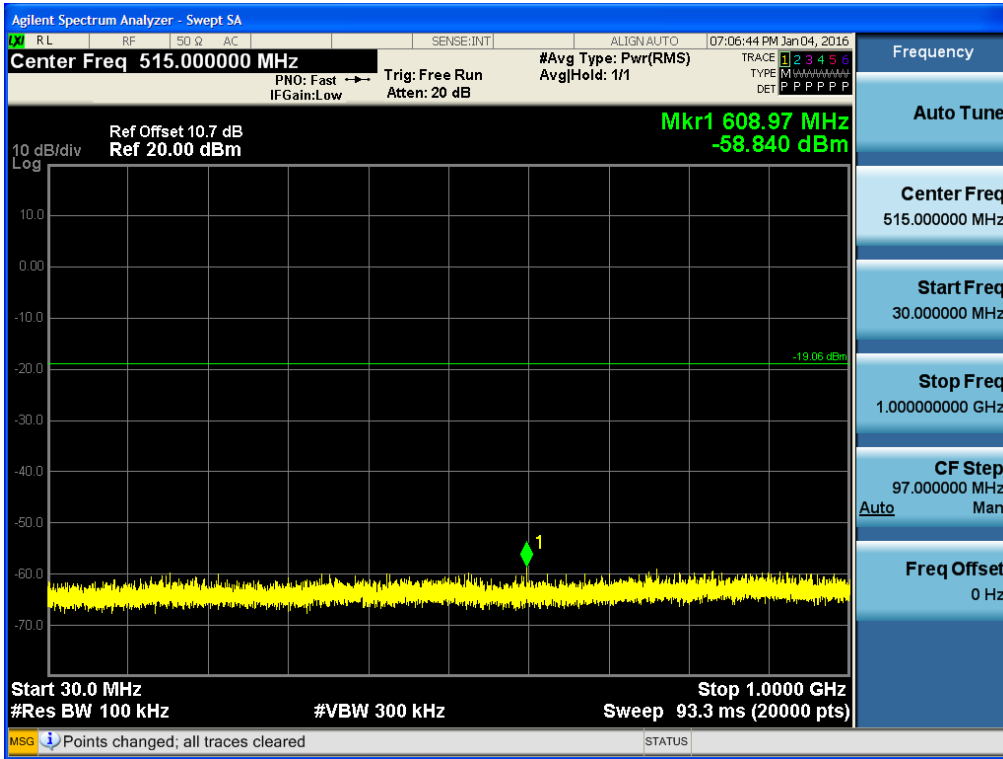


1 GHz ~ 3 GHz

Conducted Spurious Emission (802.11g_Ch.6_36 Mbps)

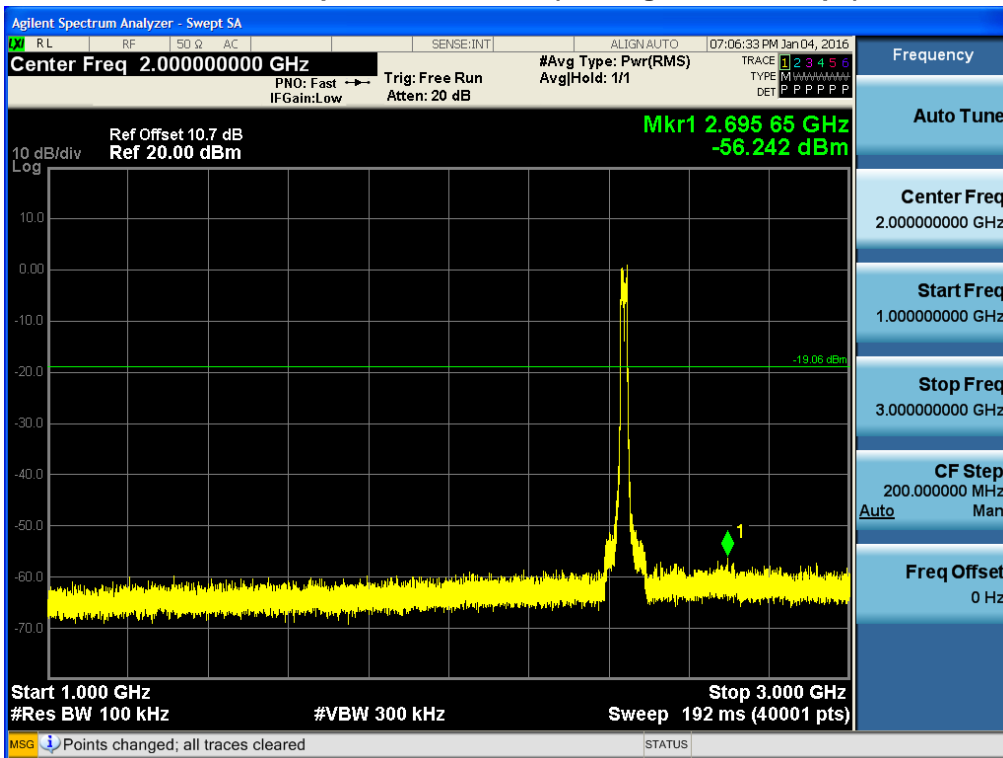


3 GHz ~ 5 GHz

Conducted Spurious Emission (802.11g_Ch.6_36 Mbps)

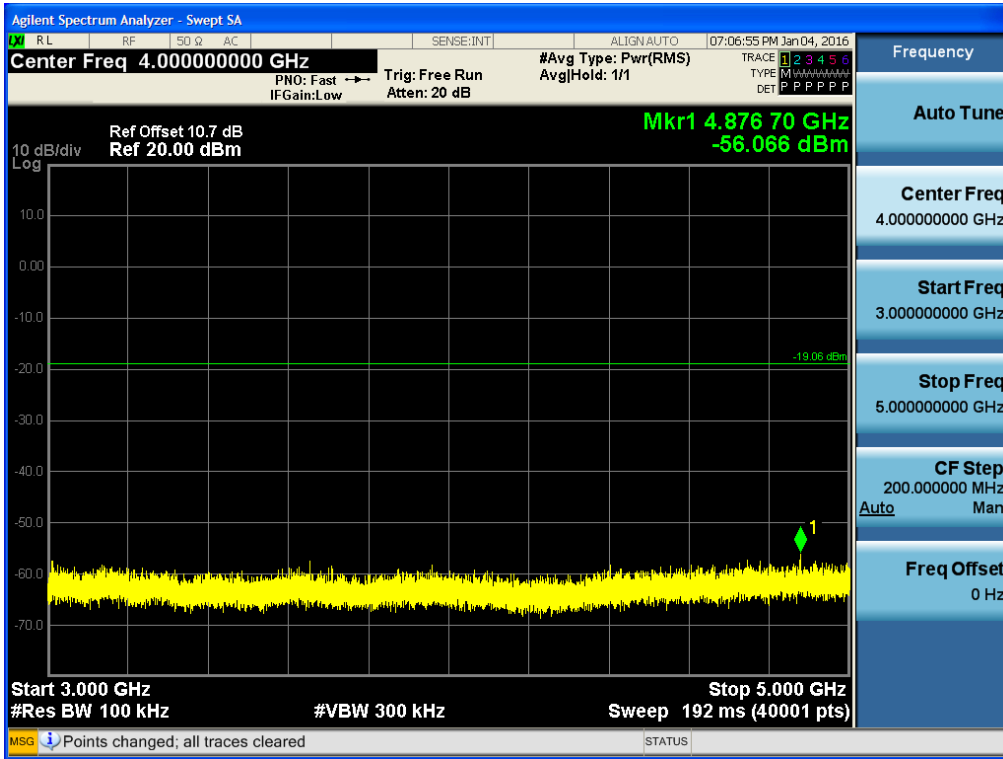


5 GHz ~ 7 GHz

Conducted Spurious Emission (802.11g_Ch.6_36 Mbps)

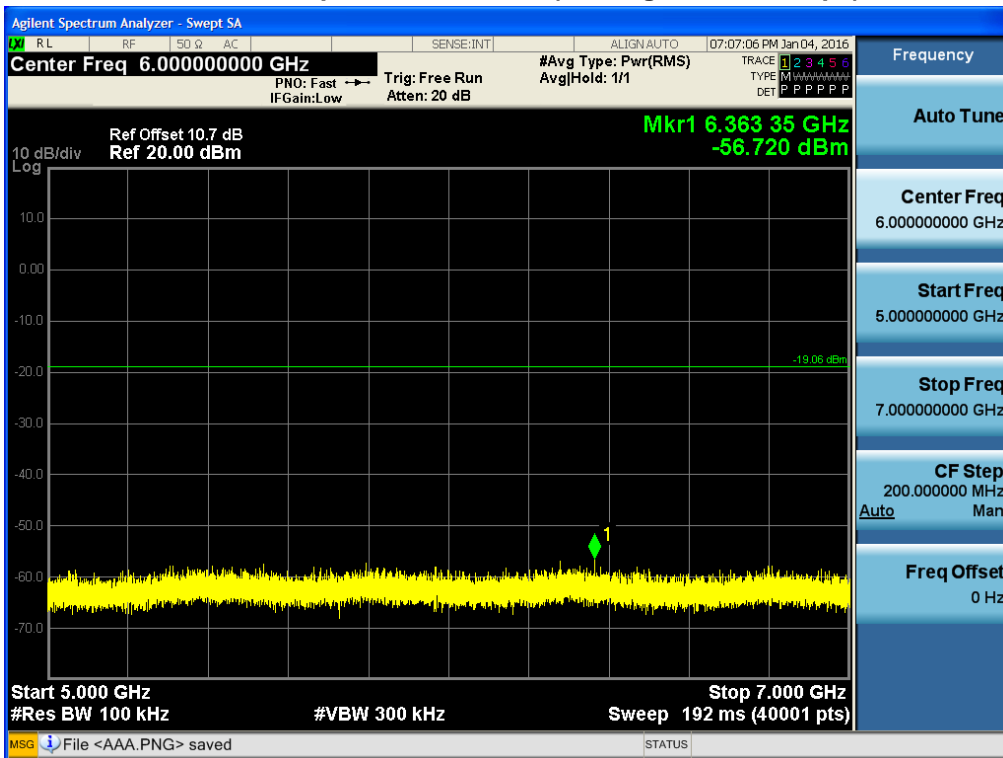


7 GHz ~ 9 GHz

Conducted Spurious Emission (802.11g_Ch.6_36 Mbps)

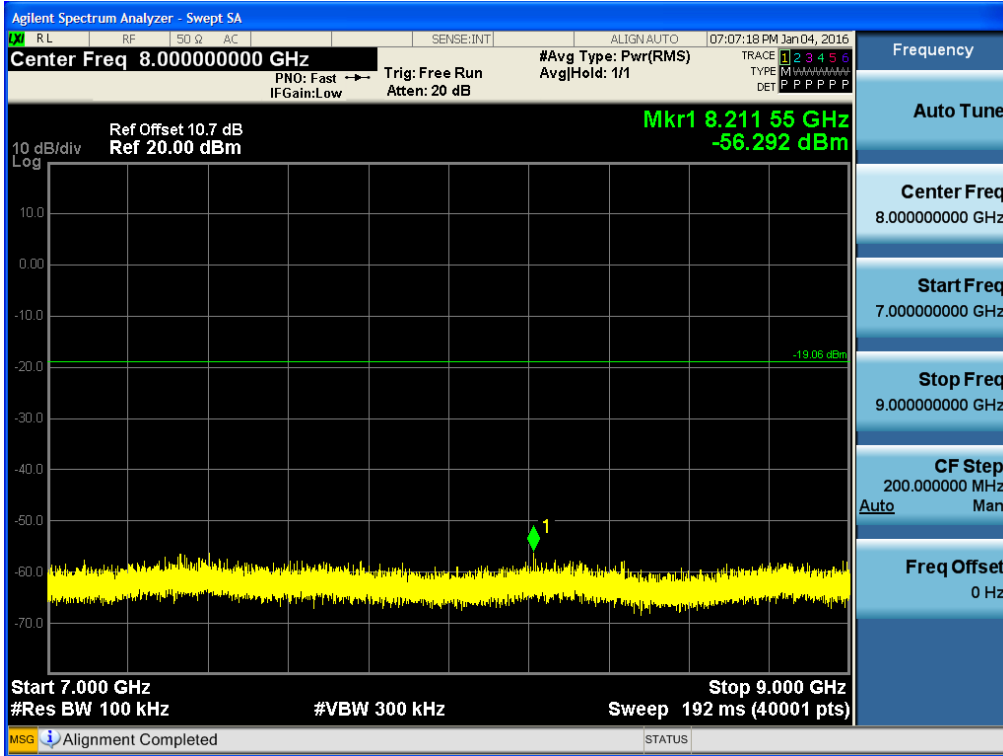


9 GHz ~ 11 GHz

Conducted Spurious Emission (802.11g_Ch.6_36 Mbps)

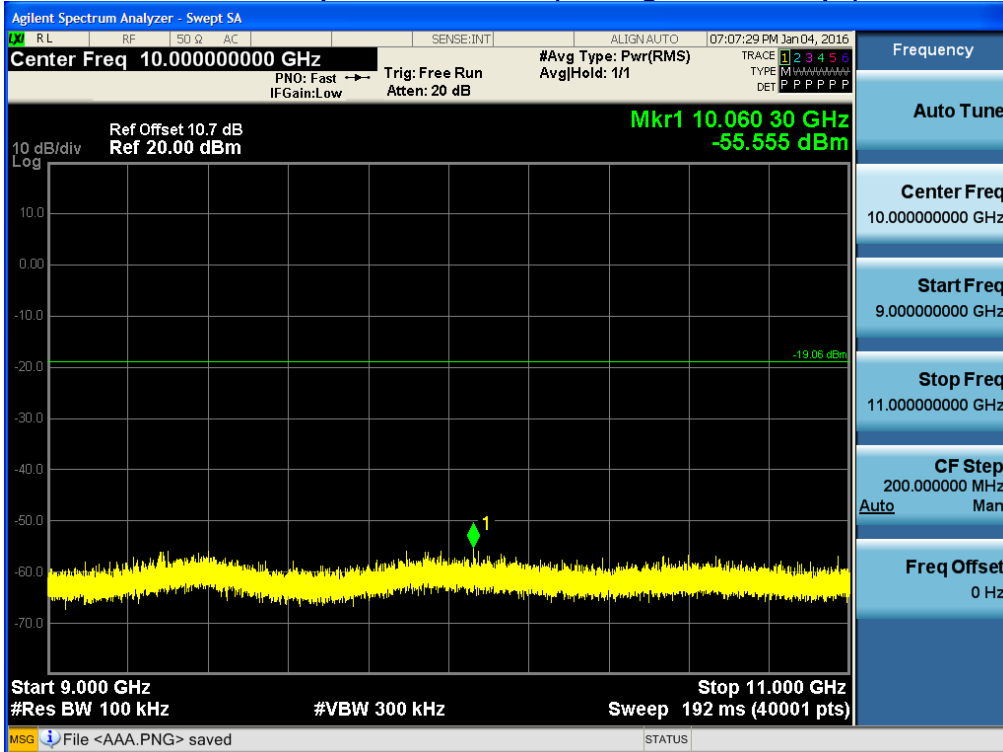


11 GHz ~ 13 GHz

Conducted Spurious Emission (802.11g_Ch.6_36 Mbps)

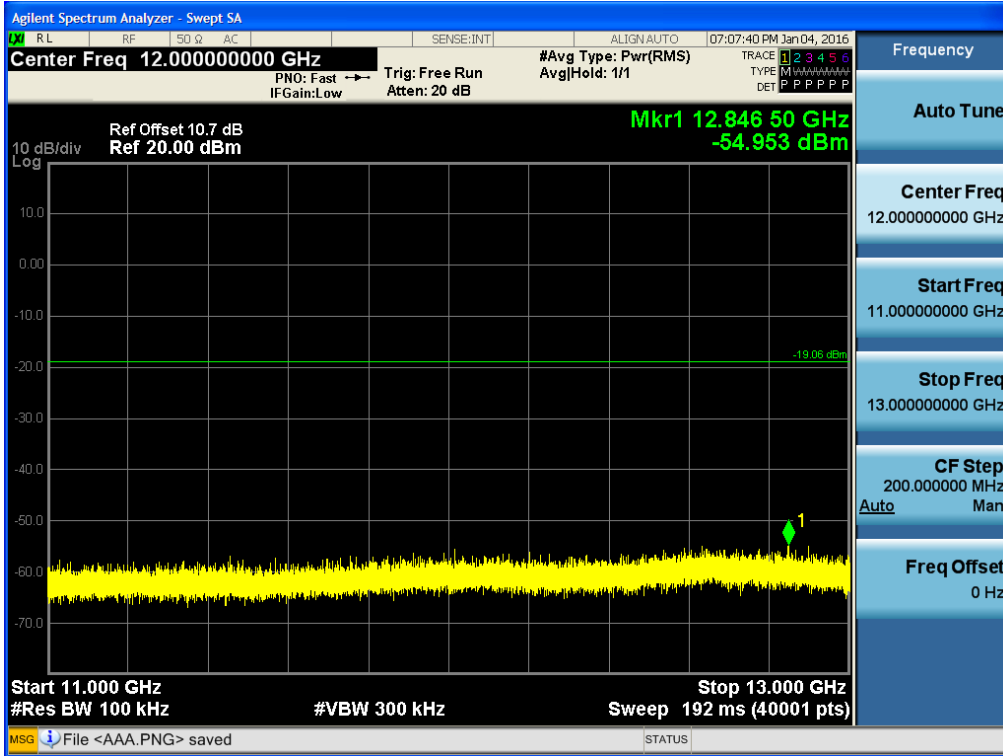


13 GHz ~ 15 GHz

Conducted Spurious Emission (802.11g_Ch.6_36 Mbps)

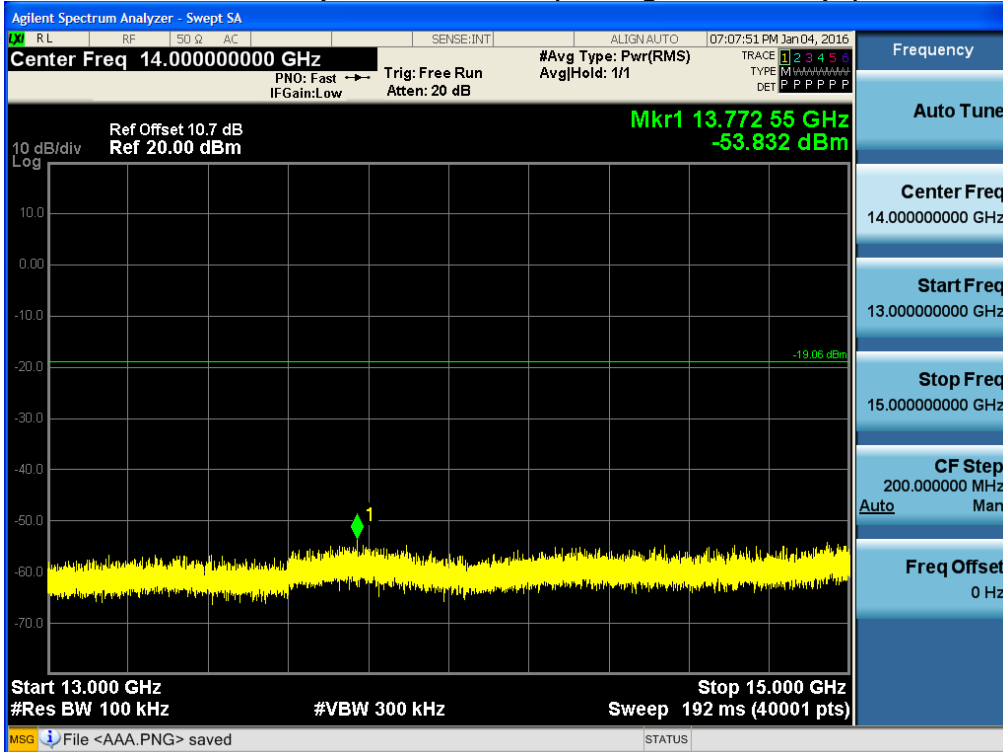


15 GHz ~ 17 GHz

Conducted Spurious Emission (802.11g_Ch.6_36 Mbps)

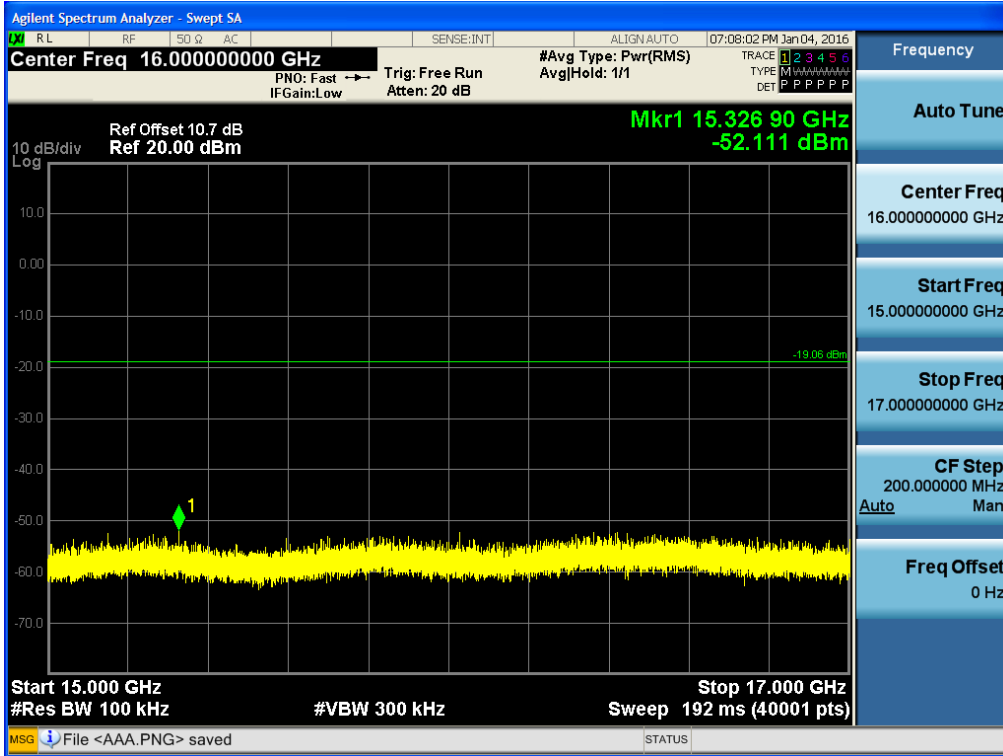


17 GHz ~ 19 GHz

Conducted Spurious Emission (802.11g_Ch.6_36 Mbps)

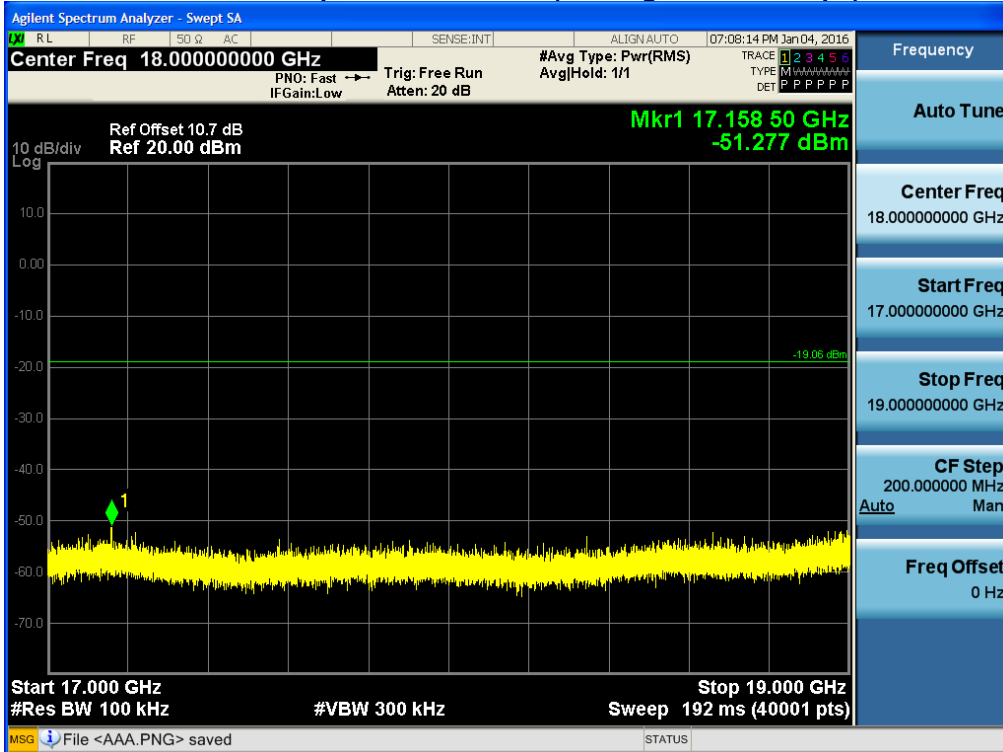


19 GHz ~ 21 GHz

Conducted Spurious Emission (802.11g_Ch.6_36 Mbps)

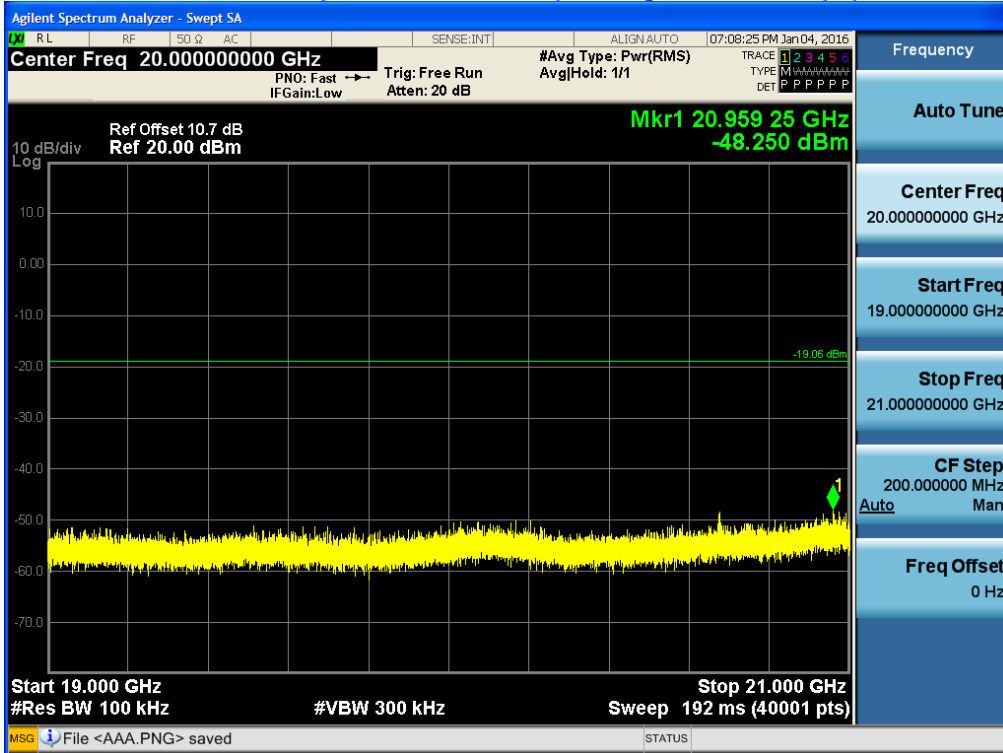


21 GHz ~ 23 GHz

Conducted Spurious Emission (802.11g_Ch.6_36 Mbps)

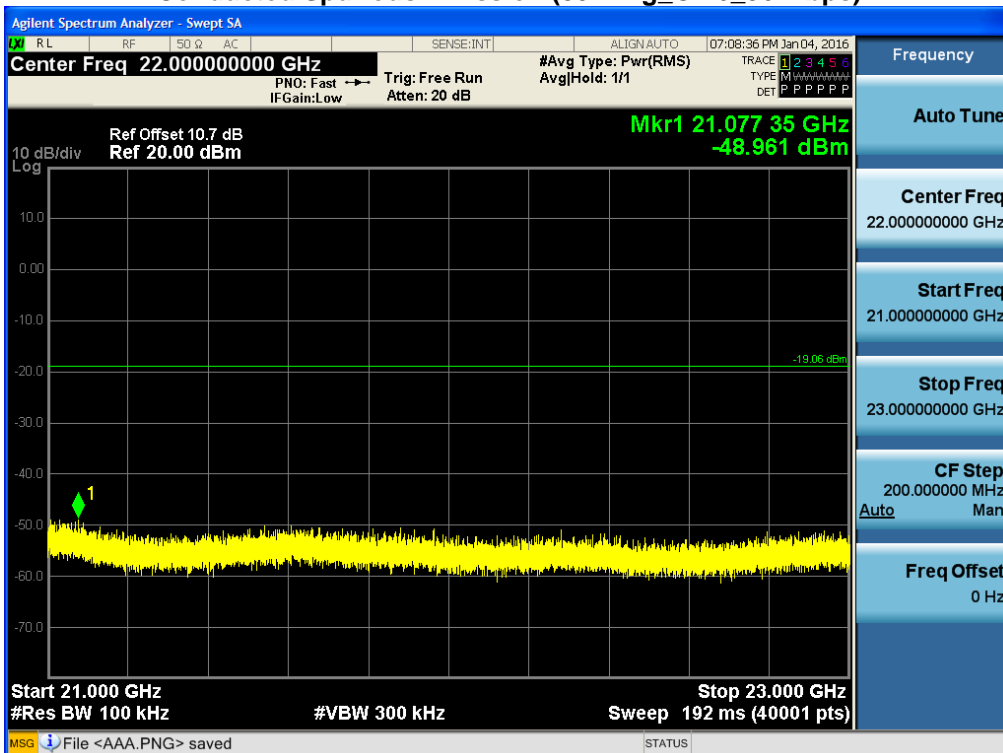

23 GHz ~ 25 GHz


Conducted Spurious Emission (802.11g_Ch.6_36 Mbps)

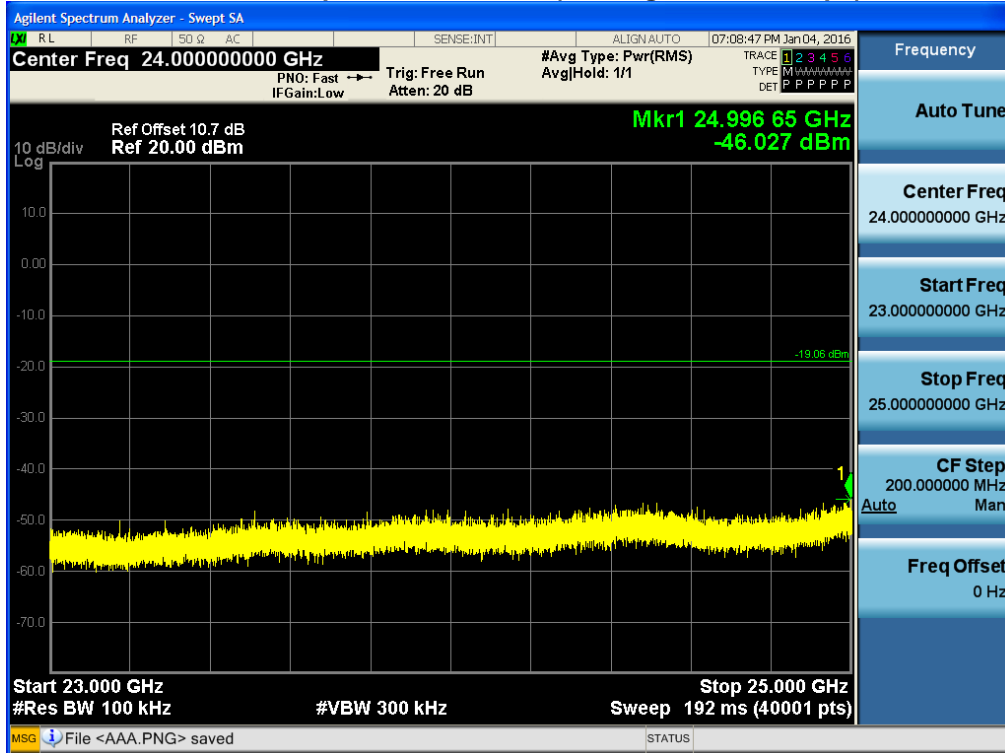

Ant.1


30 MHz ~ 1 GHz

Conducted Spurious Emission (802.11g_Ch.6_36 Mbps)

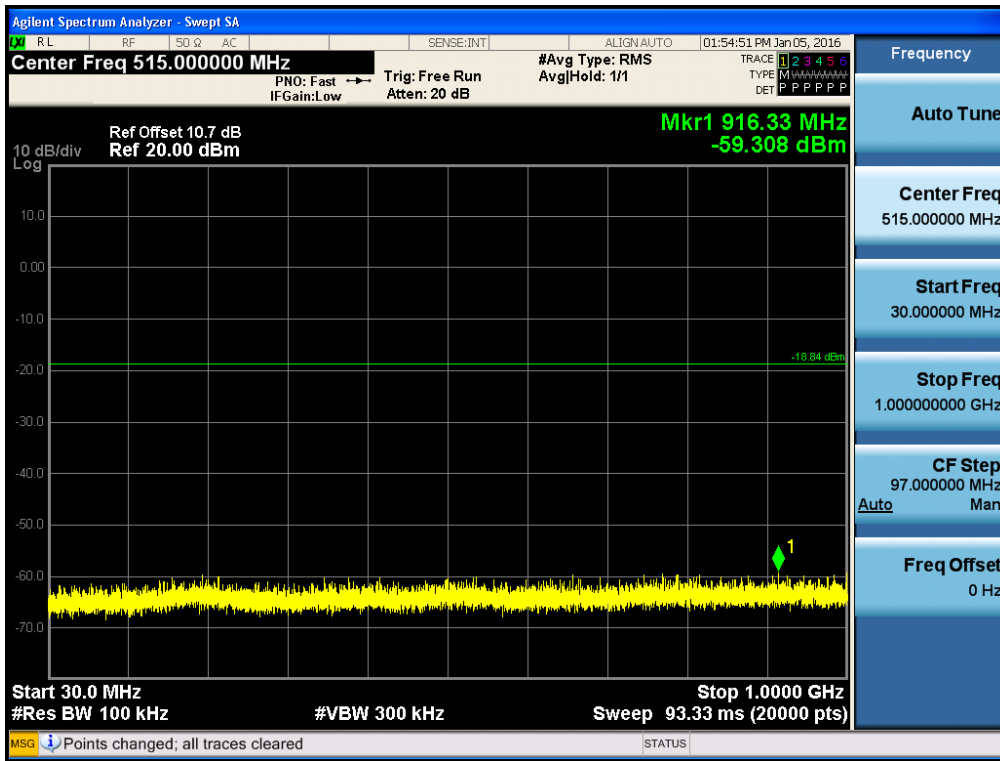


1 GHz ~ 3 GHz

Conducted Spurious Emission (802.11g_Ch.6_36 Mbps)

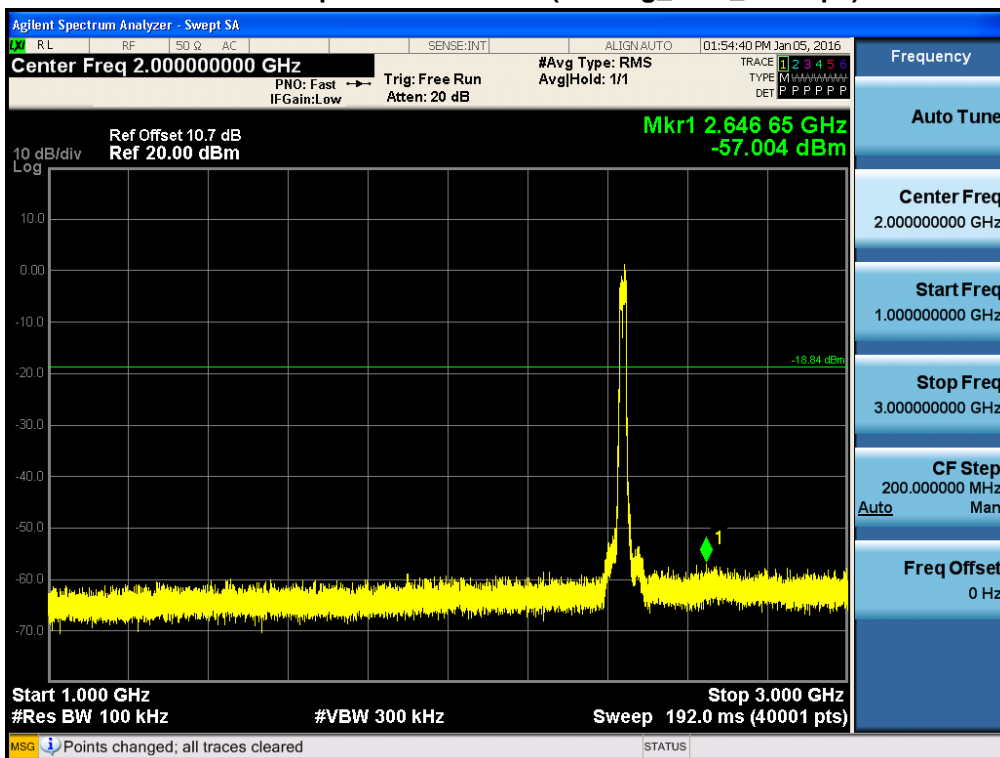


3 GHz ~ 5 GHz

Conducted Spurious Emission (802.11g_Ch.6_36 Mbps)

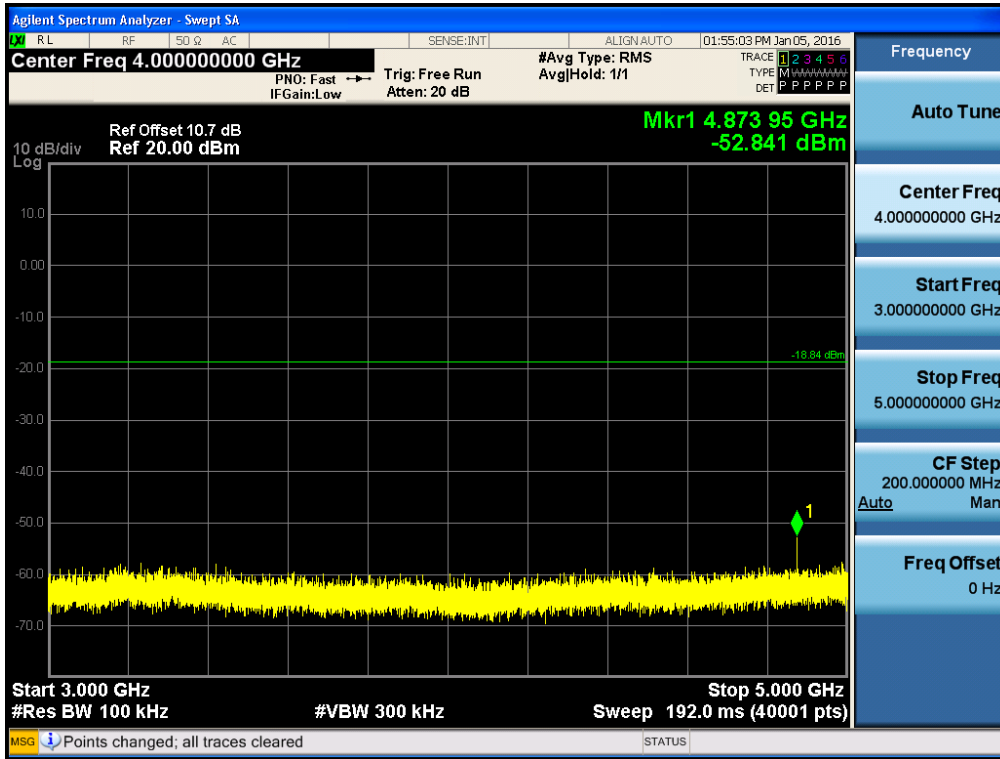


5 GHz ~ 7 GHz

Conducted Spurious Emission (802.11g_Ch.6_36 Mbps)

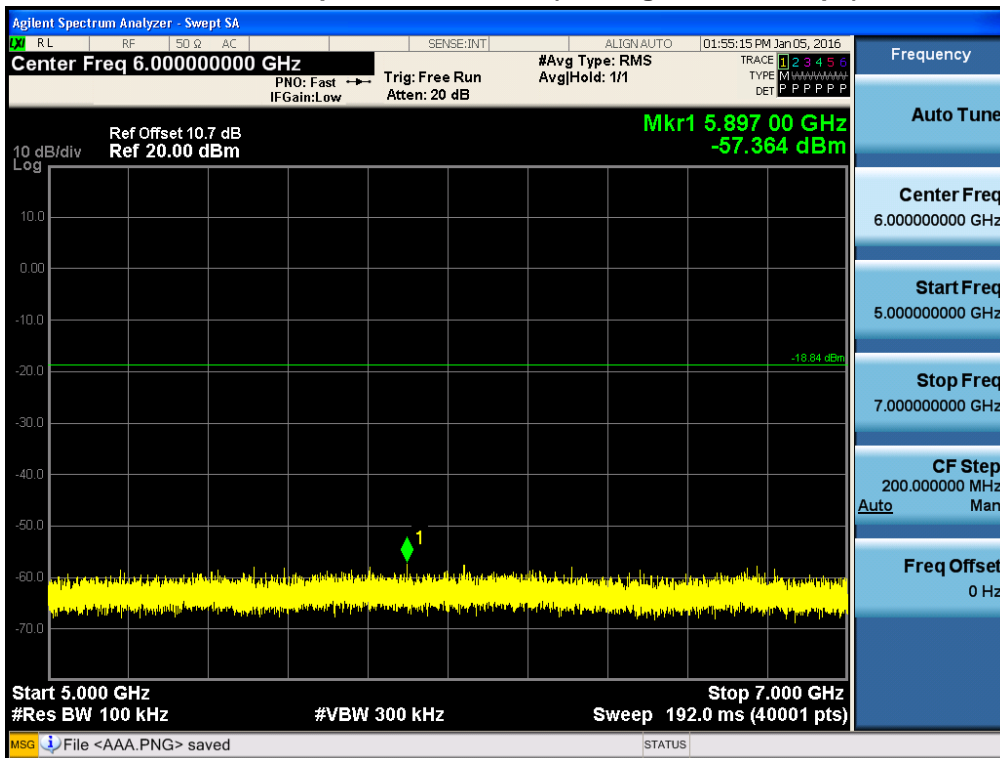


7 GHz ~ 9 GHz

Conducted Spurious Emission (802.11g_Ch.6_36 Mbps)

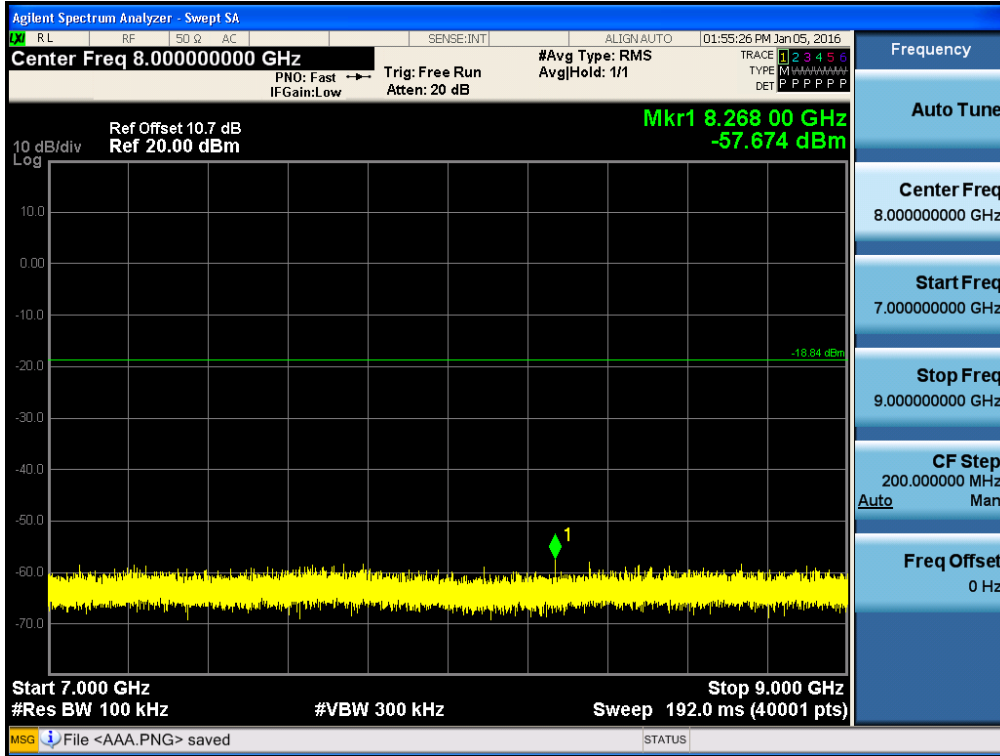


9 GHz ~ 11 GHz

Conducted Spurious Emission (802.11g_Ch.6_36 Mbps)

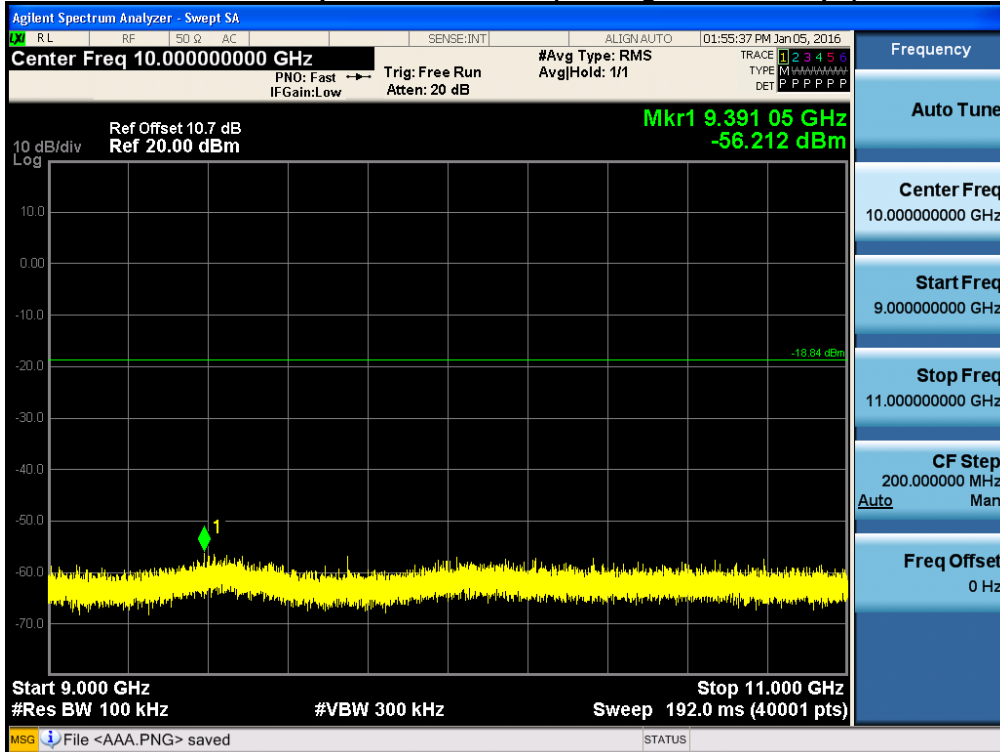


11 GHz ~ 13 GHz

Conducted Spurious Emission (802.11g_Ch.6_36 Mbps)

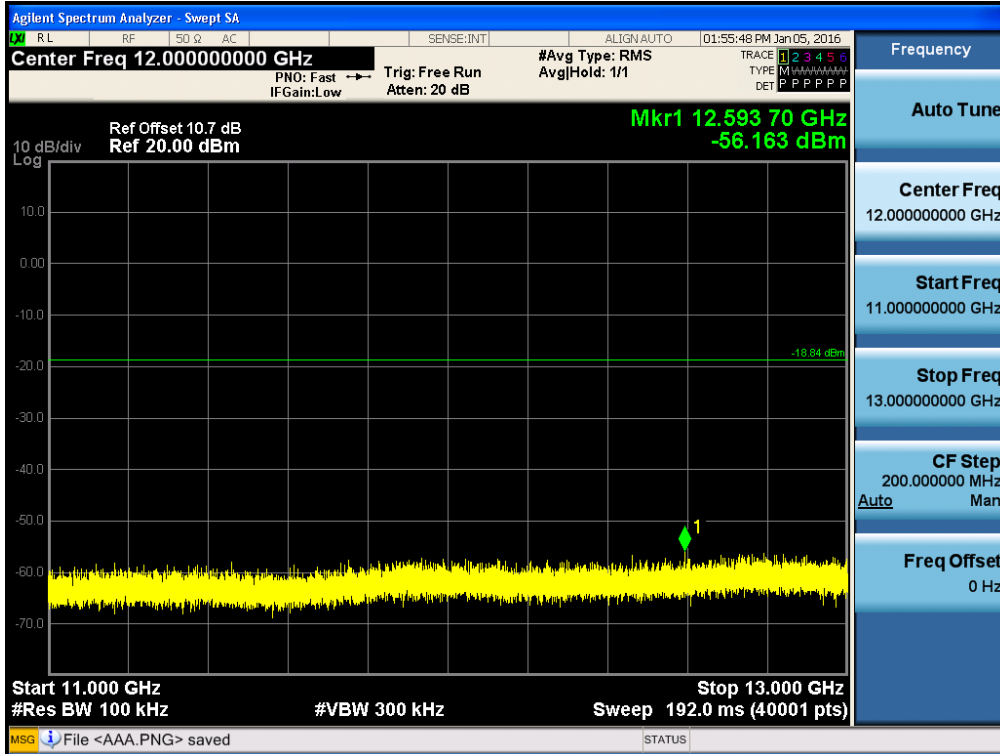


13 GHz ~ 15 GHz

Conducted Spurious Emission (802.11g_Ch.6_36 Mbps)

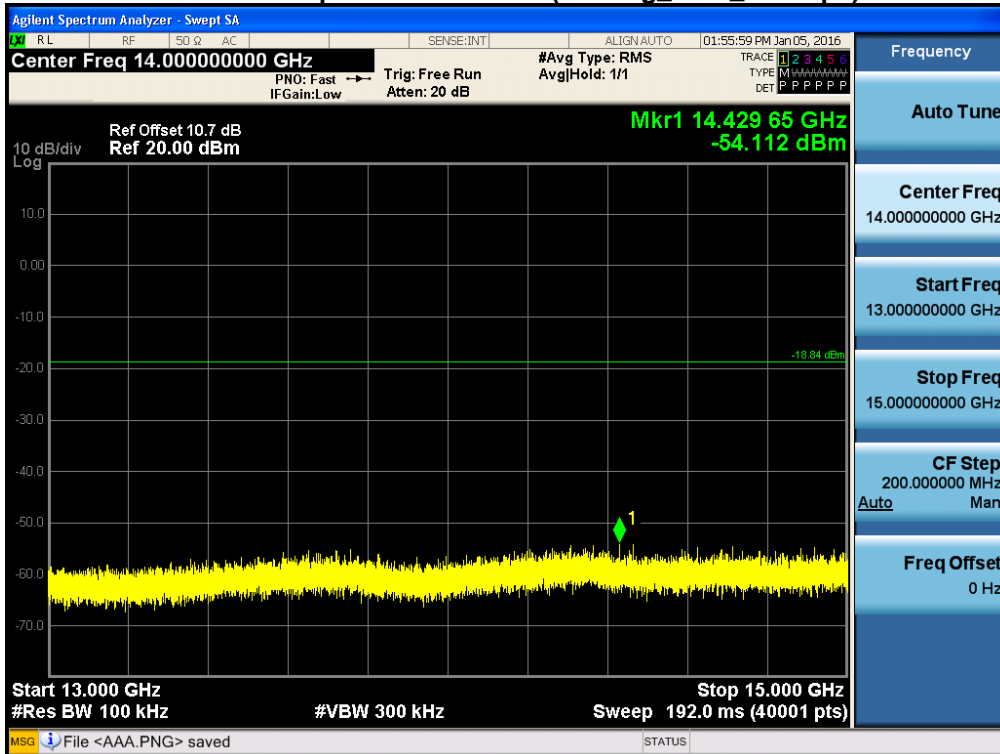


15 GHz ~ 17 GHz

Conducted Spurious Emission (802.11g_Ch.6_36 Mbps)

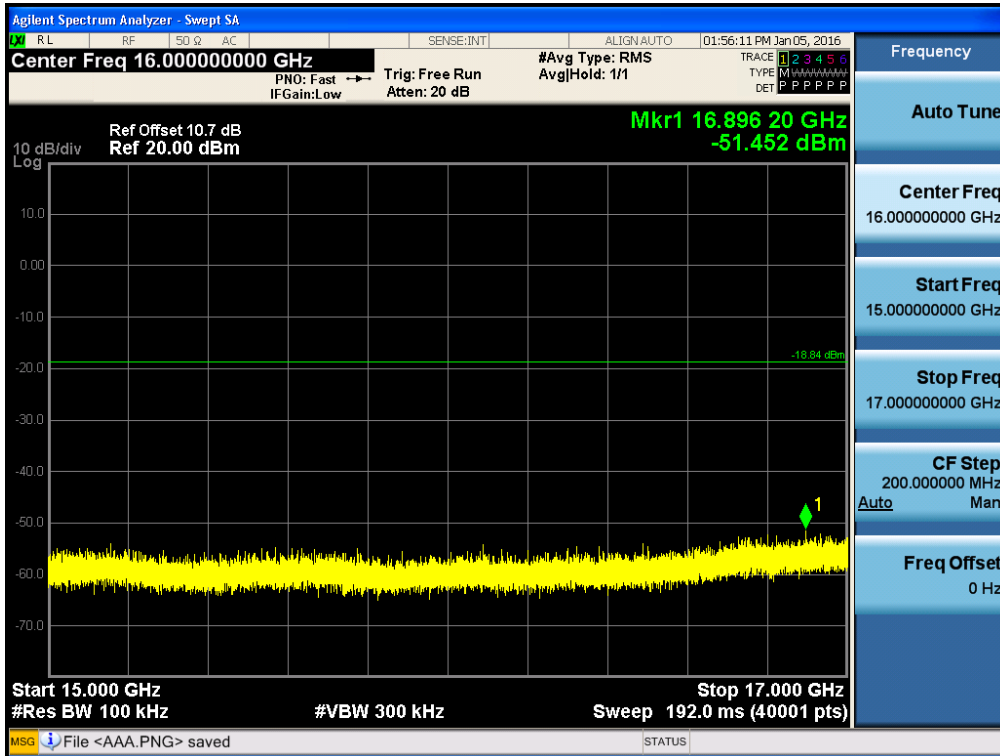


17 GHz ~ 19 GHz

Conducted Spurious Emission (802.11g_Ch.6_36 Mbps)

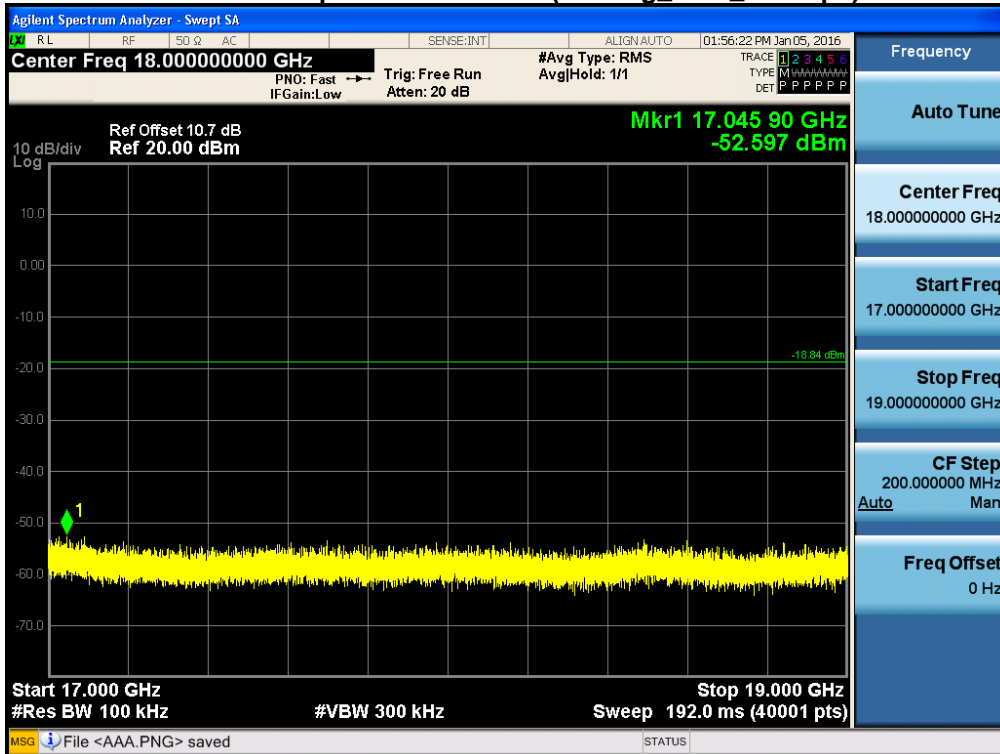


19 GHz ~ 21 GHz

Conducted Spurious Emission (802.11g_Ch.6_36 Mbps)

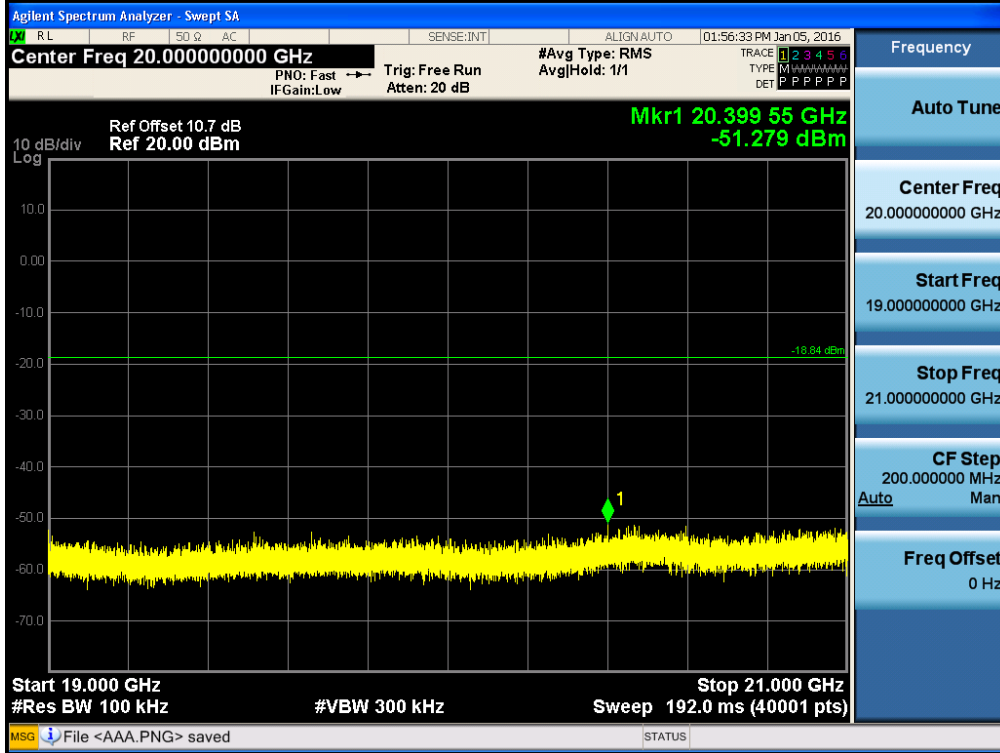


21 GHz ~ 23 GHz

Conducted Spurious Emission (802.11g_Ch.6_36 Mbps)

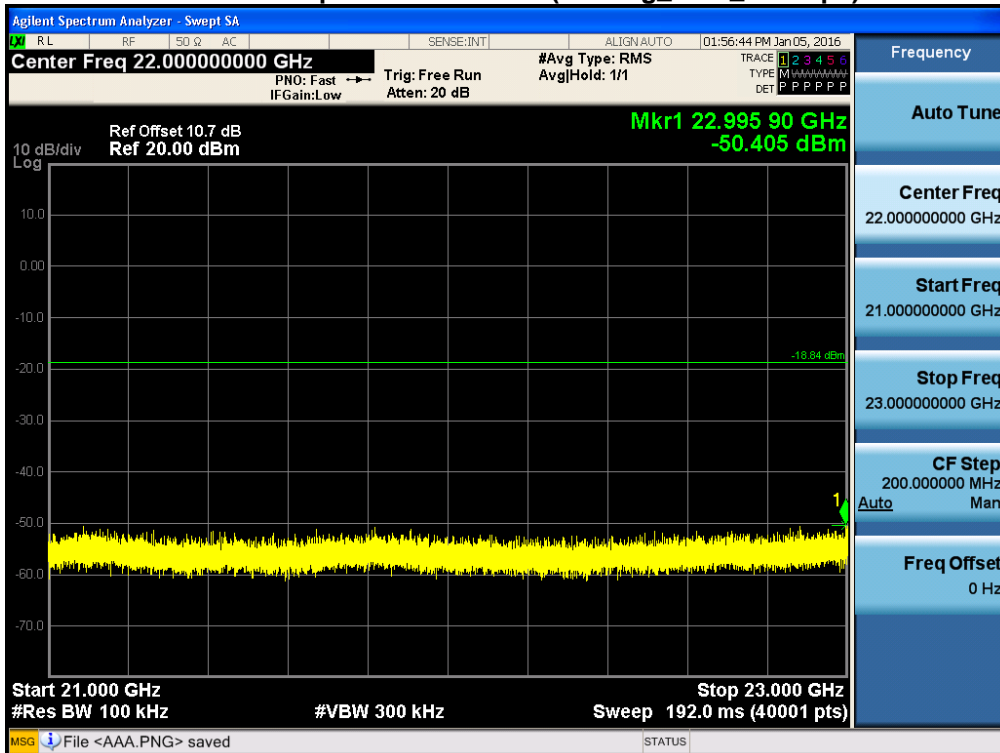

23 GHz ~ 25 GHz

Conducted Spurious Emission (802.11g_Ch.6_36 Mbps)

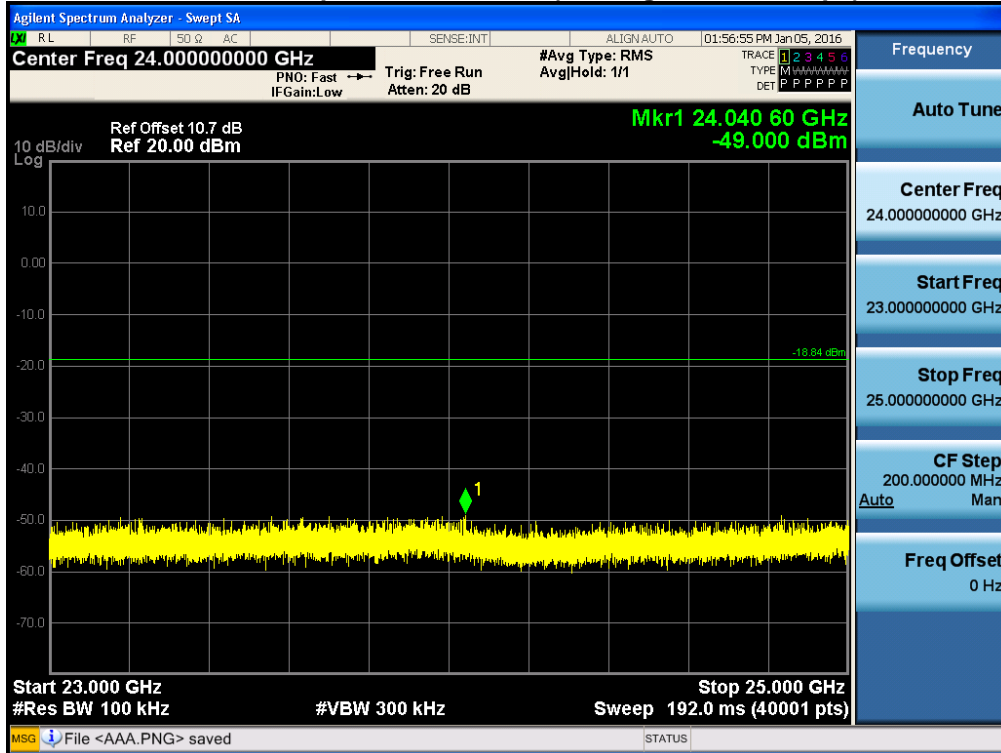

8.6 RADIATED MEASUREMENT.

8.6.1 RADIATED SPURIOUS EMISSIONS.

Test Requirements and limit, §15.205, §15.209

Frequency (MHz)	Field Strength (uV/m)	Measurement Distance (m)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3


■ Test case

Mode	Operating Mode	Operating Ant.
802.11b/g/n	SISO	Ant 0
		Ant 1
802.11b/g/n	MIMO	Ant 0 & 1


Note : In case of radiation test, we have done all test case. Worst case is MIMO(CDD) for 802.11b/g/n_HT20 mode and MIMO(SDM) for 802.11n_HT40. So, we attached the result of MIMO for 802.11b/g/n mode.

Test Configuration


Below 30 MHz

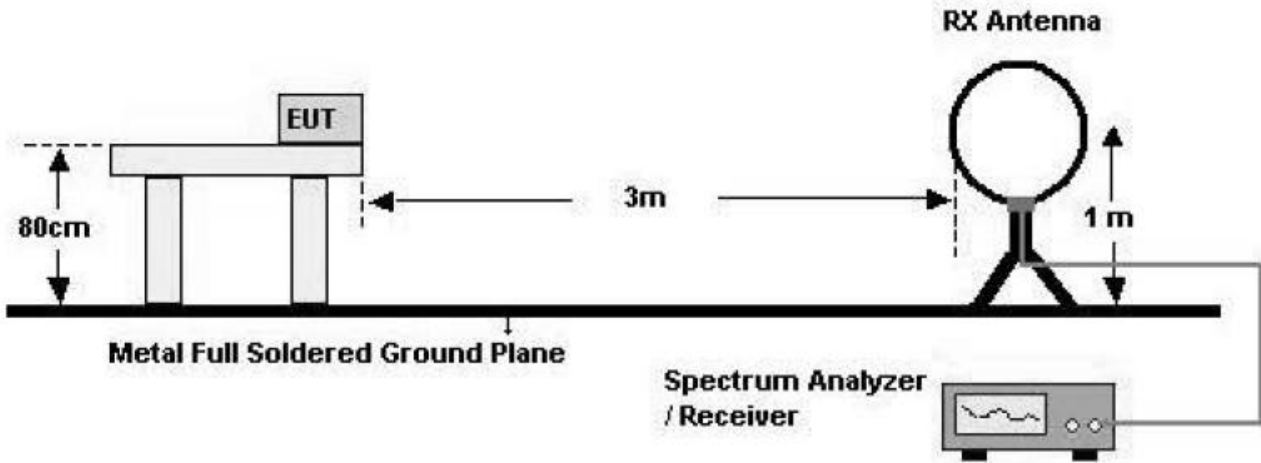

30 MHz - 1 GHz

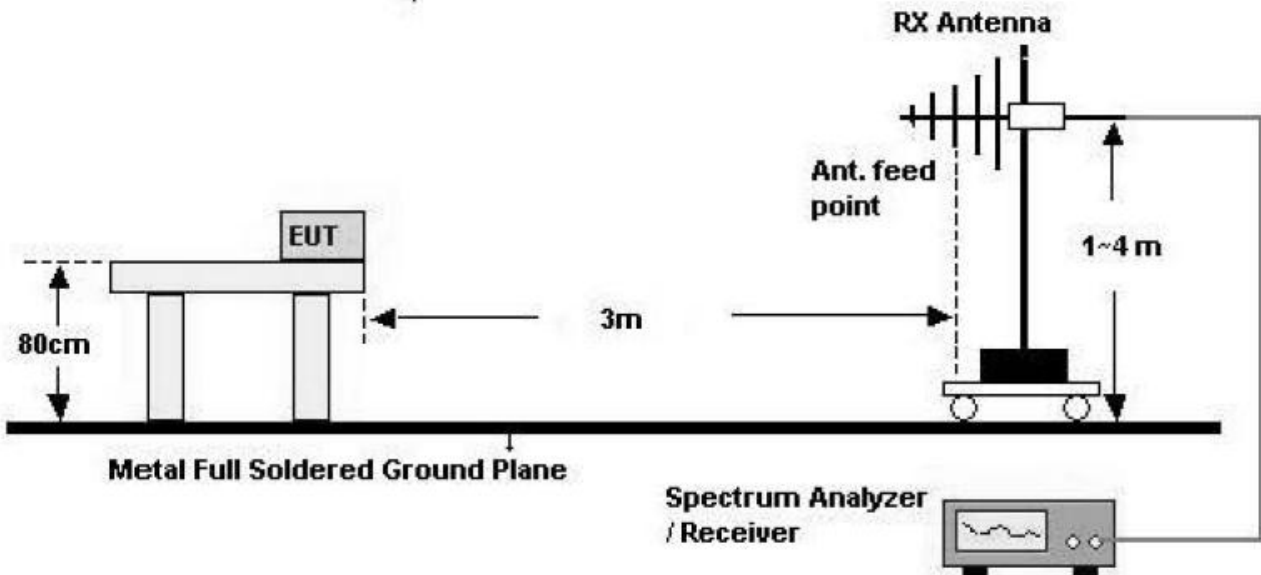

Above 1 GHz

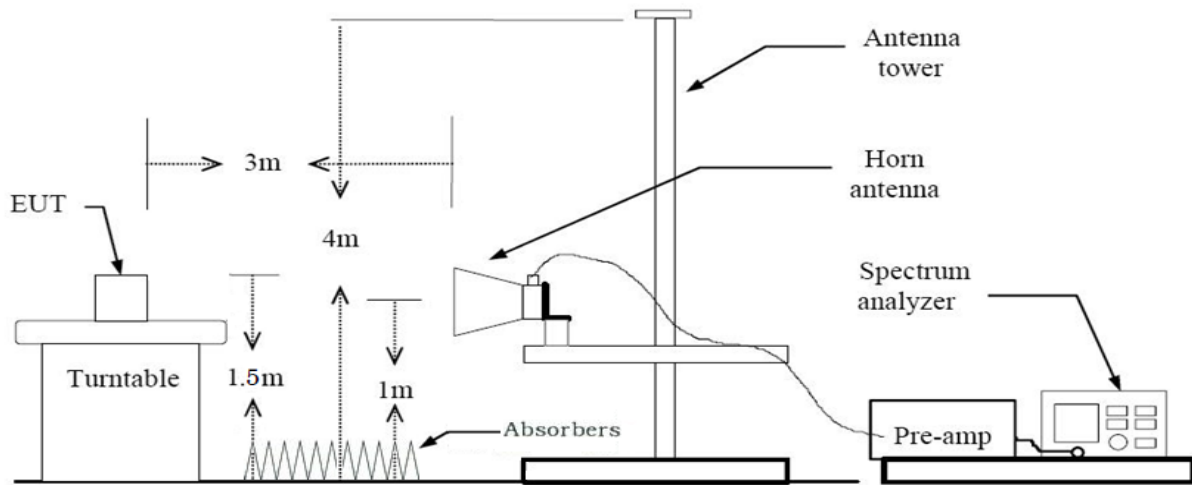

TEST PROCEDURE USED

Method 12.1 in KDB 558074, issued 06/09/2015

Spectrum Setting

- Peak

Peak emission levels are measured by setting the instrument as follows:

RBW = cf. Table 1.

VBW $\geq 3 \times$ RBW.

Detector = Peak.

Sweep time = auto.

Trace mode = max hold.

Allow sweeps to continue until the trace stabilizes.

(Note that the required measurement time may be longer for low duty cycle applications).

Table 1 —RBW as a function of frequency

Frequency	RBW
9-150 kHz	200-300 Hz
0.15-30 MHz	9-10 kHz
30-1000 MHz	100-120 kHz
> 1000 MHz	1 MHz

- Average (duty cycle \geq 98%)

Set RBW = 1 MHz

Set VBW \geq 3 x RBW

Detector = RMS

Averaging type = power (i.e., RMS).

Sweep time = auto.

Trace mode = average (at least 100 traces).

- Average (duty cycle < 98%, duty cycle variations are less than $\pm 2\%$)

Set RBW = 1 MHz

Set VBW \geq 3 x RBW

Detector = RMS.

Averaging type = power (i.e., RMS).

Sweep time = auto.

Trace mode = average (at least 100 traces).

A correction factor shall be added to the measurement results prior to comparing to the emission limit in order to compute the emission level that would have been measured had the test been performed at 100 percent duty cycle.

- Average (duty cycle < 98%, duty cycle variations exceed $\pm 2\%$)

Set RBW = 1 MHz

Set VBW \geq 1/T. (at least 100 times less than the resolution bandwidth, but no less than 10 Hz.)

Select spectrum analyzer linear display mode.

Detector = Peak.

Sweep time = auto.

Trace mode = max hold.

Note :

The duty cycle factor for 802.11 b/g/n_20MHz/40MHz

Mode	Worst Data rate (Mbps)	T _{on} (ms)	T _{total} (ms)	Duty Cycle (%)	Duty Cycle Factor (dB)	VBW(1/T) (Hz)
b	1	12.350	12.450	99.20	0.035	81
g	6	2.050	2.160	94.91	0.227	488
n_20MHz	MCS 0	1.910	2.005	95.26	0.211	524
n_40MHz	MCS 0	0.942	1.038	90.75	0.421	1062

TEST RESULTS

9 kHz – 30MHz

Operation Mode: Normal Mode

Frequency	Reading	Ant. factor	Cable loss	Ant. POL	Total	Limit	Margin
MHz	dB μ V	dB /m	dB	(H/V)	dB μ V/m	dB μ V/m	dB
No Critical peaks found							

Notes:

1. Measuring frequencies from 9 kHz to the 30MHz.
2. The reading of emissions are attenuated more than 20 dB below the permissible limits or the field strength is too small to be measured.
3. Distance extrapolation factor = 40 log (specific distance / test distance) (dB)
4. Limit line = specific Limits (dBuV) + Distance extrapolation factor
5. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.

TEST RESULTS

Below 1 GHz

Operation Mode: Normal Mode

Frequency	Reading	Ant. factor	Cable loss	Ant. POL	Total	Limit	Margin
MHz	dB μ V	dB /m	dB	(H/V)	dB μ V/m	dB μ V/m	dB
No Critical peaks found							

Notes:

1. Measuring frequencies from 30 MHz to the 1 GHz.
2. Radiated emissions measured in frequency range from 30 MHz to 1000 MHz were made with an instrument using Quasi peak detector mode.
3. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.

Above 1 GHz

Operation Mode: 802.11 b
 Transfer Rate: 1 Mbps
 Operating Frequency: 2412
 Channel No. 01 Ch

Frequency [MHz]	Reading dBuV	A.F.+CL-AMP G [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
4824	62.95	-7.72	V	55.23	73.98	18.75	PK
4824	58.60	-7.72	V	50.88	53.98	3.10	AV
7236	53.79	-1.83	V	51.96	73.98	22.02	PK
7236	42.17	-1.83	V	40.34	53.98	13.64	AV
4824	61.05	-7.72	H	53.33	73.98	20.65	PK
4824	56.35	-7.72	H	48.63	53.98	5.35	AV
7236	53.22	-1.83	H	51.39	73.98	22.59	PK
7236	42.15	-1.83	H	40.32	53.98	13.66	AV

Operation Mode: 802.11 g
 Transfer Rate: 6 Mbps
 Operating Frequency: 2412
 Channel No. 01 Ch

Frequency [MHz]	Reading dBuV	Ducy Cycle Factor	A.F.+CL-AMP G [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
4824	62.07	0.00	-7.72	V	54.35	73.98	19.63	PK
4824	49.28	0.227	-7.72	V	41.79	53.98	12.19	AV
7236	53.65	0.00	-1.83	V	51.82	73.98	22.16	PK
7236	42.05	0.227	-1.83	V	40.45	53.98	13.53	AV
4824	60.86	0.00	-7.72	H	53.14	73.98	20.84	PK
4824	48.26	0.227	-7.72	H	40.77	53.98	13.21	AV
7236	53.42	0.00	-1.83	H	51.59	73.98	22.39	PK
7236	42.00	0.227	-1.83	H	40.40	53.98	13.58	AV

Operation Mode: 802.11 n_20 MHz BW
 Transfer MCS Index: 0
 Operating Frequency 2412
 Channel No. 01 Ch

Frequency [MHz]	Reading dBuV	Ducy Cycle Factor	A.F.+CL-AMP G [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
4824	60.47	0.00	-7.72	V	52.75	73.98	21.23	PK
4824	48.28	0.211	-7.72	V	40.77	53.98	13.21	AV
7236	53.88	0.00	-1.83	V	52.05	73.98	21.93	PK
7236	41.95	0.211	-1.83	V	40.33	53.98	13.65	AV
4824	59.66	0.00	-7.72	H	51.94	73.98	22.04	PK
4824	48.16	0.211	-7.72	H	40.65	53.98	13.33	AV
7236	53.75	0.00	-1.83	H	51.92	73.98	22.06	PK
7236	41.89	0.211	-1.83	H	40.27	53.98	13.71	AV

Operation Mode: 802.11 n_40 MHz BW
 Transfer MCS Index: 0
 Operating Frequency 2412
 Channel No. 01 Ch

Frequency [MHz]	Reading dBuV	Ducy Cycle Factor	A.F.+CL-AMP G [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
4844	58.71	0.00	-7.50	V	51.21	73.98	22.77	PK
4844	47.82	0.421	-7.50	V	40.74	53.98	13.24	AV
7266	53.57	0.00	-1.71	V	51.86	73.98	22.12	PK
7266	42.13	0.421	-1.71	V	40.84	53.98	13.14	AV
4844	58.29	0.00	-7.50	H	50.79	73.98	23.19	PK
4844	47.68	0.421	-7.50	H	40.60	53.98	13.38	AV
7266	53.51	0.00	-1.71	H	51.80	73.98	22.18	PK
7266	42.11	0.421	-1.71	H	40.82	53.98	13.16	AV

Notes:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Total = Reading Value + Antenna Factor + Cable Loss - Amp Gain + Duty Cycle Factor(802.11g/n)
5. We have done 802.11b/g/n mode and all data rate. Worst data rate is the lowest data of each mode.
6. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.

Operation Mode: 802.11 b
 Transfer Rate: 1 Mbps
 Operating Frequency: 2437
 Channel No.: 06 Ch

Frequency [MHz]	Reading dBuV	A.F.+CL-AMP G [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
4874	61.83	-7.37	V	54.46	73.98	19.52	PK
4874	58.10	-7.37	V	50.73	53.98	3.25	AV
7311	53.72	-1.64	V	52.08	73.98	21.90	PK
7311	42.05	-1.64	V	40.41	53.98	13.57	AV
4874	60.13	-7.37	H	52.76	73.98	21.22	PK
4874	56.24	-7.37	H	48.87	53.98	5.11	AV
7311	53.48	-1.64	H	51.84	73.98	22.14	PK
7311	41.89	-1.64	H	40.25	53.98	13.73	AV

Operation Mode: 802.11 g
 Transfer Rate: 6 Mbps
 Operating Frequency: 2437
 Channel No.: 06 Ch

Frequency [MHz]	Reading dBuV	Ducy Cycle Factor	A.F.+CL-AMP G [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
4874	59.71	0.00	-7.37	V	52.34	73.98	21.64	PK
4874	50.01	0.227	-7.37	V	42.87	53.98	11.11	AV
7311	53.42	0.00	-1.64	V	51.78	73.98	22.20	PK
7311	41.96	0.227	-1.64	V	40.55	53.98	13.43	AV
4874	58.96	0.00	-7.37	H	51.59	73.98	22.39	PK
4874	48.96	0.227	-7.37	H	41.82	53.98	12.16	AV
7311	53.28	0.00	-1.64	H	51.64	73.98	22.34	PK
7311	41.85	0.227	-1.64	H	40.44	53.98	13.54	AV

Operation Mode: 802.11 n_20 MHz BW
 Transfer MCS Index: 0
 Operating Frequency 2437
 Channel No. 06 Ch

Frequency [MHz]	Reading dBuV	Ducy Cycle Factor	A.F.+CL-AMP G [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
4874	59.18	0.00	-7.37	V	51.81	73.98	22.17	PK
4874	48.91	0.211	-7.37	V	41.75	53.98	12.23	AV
7311	54.16	0.00	-1.64	V	52.52	73.98	21.46	PK
7311	42.20	0.211	-1.64	V	40.77	53.98	13.21	AV
4874	59.02	0.00	-7.37	H	51.65	73.98	22.33	PK
4874	48.68	0.211	-7.37	H	41.52	53.98	12.46	AV
7311	54.11	0.00	-1.64	H	52.47	73.98	21.51	PK
7311	42.16	0.211	-1.64	H	40.73	53.98	13.25	AV

Operation Mode: 802.11 n_40 MHz BW
 Transfer MCS Index: 0
 Operating Frequency 2437
 Channel No. 06 Ch

Frequency [MHz]	Reading dBuV	Ducy Cycle Factor	A.F.+CL-AMP G [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
4874	57.87	0.00	-7.37	V	50.50	73.98	23.48	PK
4874	47.62	0.421	-7.37	V	40.67	53.98	13.31	AV
7311	53.69	0.00	-1.64	V	52.05	73.98	21.93	PK
7311	42.11	0.421	-1.64	V	40.89	53.98	13.09	AV
4874	57.36	0.00	-7.37	H	49.99	73.98	23.99	PK
4874	47.51	0.421	-7.37	H	40.56	53.98	13.42	AV
7311	53.45	0.00	-1.64	H	51.81	73.98	22.17	PK
7311	42.06	0.421	-1.64	H	40.84	53.98	13.14	AV

Notes:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Total = Reading Value + Antenna Factor + Cable Loss - Amp Gain + Duty Cycle Factor(802.11g/n)
5. We have done 802.11b/g/n mode and all data rate. Worst data rate is the lowest data of each mode.
6. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.

Operation Mode: 802.11 b
 Transfer Rate: 1 Mbps
 Operating Frequency: 2462
 Channel No.: 11 Ch

Frequency [MHz]	Reading dBuV	A.F.+CL-AMP G [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
4924	59.60	-7.35	V	52.25	73.98	21.73	PK
4924	54.51	-7.35	V	47.16	53.98	6.82	AV
7386	53.54	-1.35	V	52.19	73.98	21.79	PK
7386	42.11	-1.35	V	40.76	53.98	13.22	AV
4924	58.01	-7.35	H	50.66	73.98	23.32	PK
4924	52.66	-7.35	H	45.31	53.98	8.67	AV
7386	53.29	-1.35	H	51.94	73.98	22.04	PK
7386	42.06	-1.35	H	40.71	53.98	13.27	AV

Operation Mode: 802.11 g
 Transfer Rate: 6 Mbps
 Operating Frequency: 2462
 Channel No.: 11 Ch

Frequency [MHz]	Reading dBuV	Ducy Cycle Factor	A.F.+CL-AMP G [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
4924	61.64	0.00	-7.35	V	54.29	73.98	19.69	PK
4924	50.38	0.227	-7.35	V	43.26	53.98	10.72	AV
7386	53.44	0.00	-1.35	V	52.09	73.98	21.89	PK
7386	42.08	0.227	-1.35	V	40.96	53.98	13.02	AV
4924	60.41	0.00	-7.35	H	53.06	73.98	20.92	PK
4924	49.82	0.227	-7.35	H	42.70	53.98	11.28	AV
7386	53.29	0.00	-1.35	H	51.94	73.98	22.04	PK
7386	42.01	0.227	-1.35	H	40.89	53.98	13.09	AV

Operation Mode: 802.11 n_20 MHz BW
 Transfer MCS Index: 0
 Operating Frequency 2462
 Channel No. 11 Ch

Frequency [MHz]	Reading dBuV	Ducy Cycle Factor	A.F.+CL-AMP G [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
4924	60.42	0.00	-7.35	V	53.07	73.98	20.91	PK
4924	49.12	0.211	-7.35	V	41.98	53.98	12.00	AV
7386	53.72	0.00	-1.35	V	52.37	73.98	21.61	PK
7386	41.89	0.211	-1.35	V	40.75	53.98	13.23	AV
4924	58.96	0.00	-7.35	H	51.61	73.98	22.37	PK
4924	48.52	0.211	-7.35	H	41.38	53.98	12.60	AV
7386	53.46	0.00	-1.35	H	52.11	73.98	21.87	PK
7386	41.82	0.211	-1.35	H	40.68	53.98	13.30	AV

Operation Mode: 802.11 n_40 MHz BW
 Transfer MCS Index: 0
 Operating Frequency 2462
 Channel No. 11 Ch


Frequency [MHz]	Reading dBuV	Ducy Cycle Factor	A.F.+CL-AMP G [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
4904	62.23	0.00	-7.49	V	54.74	73.98	19.24	PK
4904	48.57	0.421	-7.49	V	41.50	53.98	12.48	AV
7356	53.75	0.00	-1.52	V	52.23	73.98	21.75	PK
7356	42.05	0.421	-1.52	V	40.95	53.98	13.03	AV
4904	60.56	0.00	-7.49	H	53.07	73.98	20.91	PK
4904	48.02	0.421	-7.49	H	40.95	53.98	13.03	AV
7356	53.44	0.00	-1.52	H	51.92	73.98	22.06	PK
7356	41.95	0.421	-1.52	H	40.85	53.98	13.13	AV

Notes:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Total = Reading Value + Antenna Factor + Cable Loss - Amp Gain + Duty Cycle Factor(802.11g/n)
5. We have done 802.11b/g/n mode and all data rate. Worst data rate is the lowest data of each mode.
6. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.


■ **RESULT PLOTS**

Radiated Spurious Emissions plot – Average Reading (802.11b, Ch.1 2nd Harmonic)

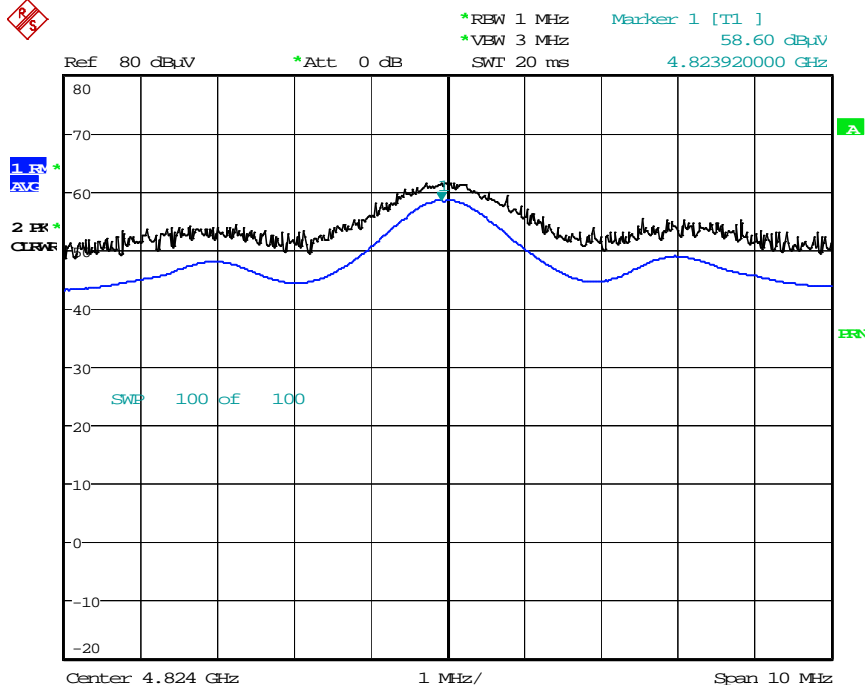


Date: 13.NOV.2015 08:15:26

Radiated Spurious Emissions plot – Peak Reading (802.11b, Ch.1 2nd Harmonic)

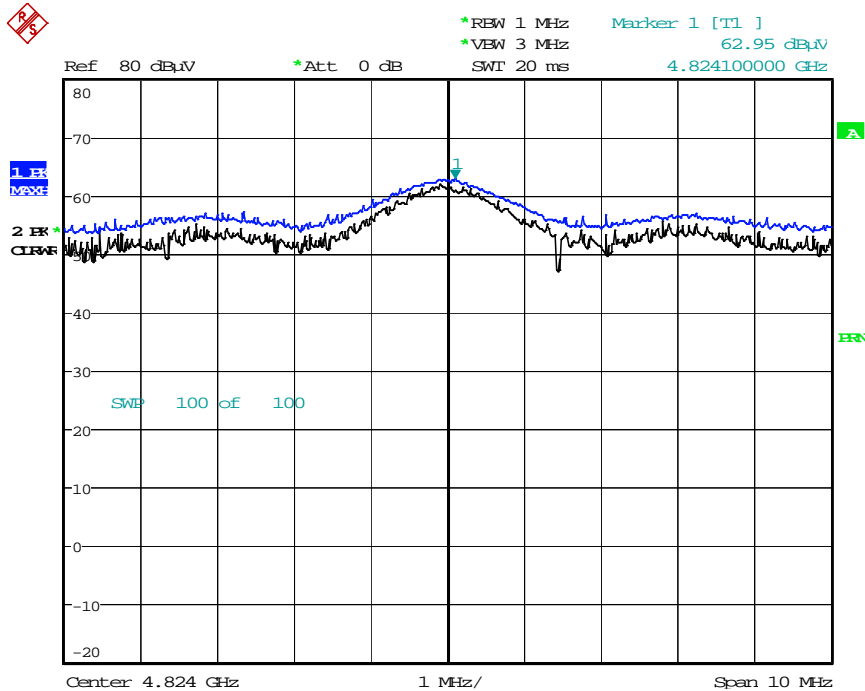


Date: 13.NOV.2015 08:16:09

Radiated Spurious Emissions plot – Average Reading (802.11g, Ch.1 2nd Harmonic)

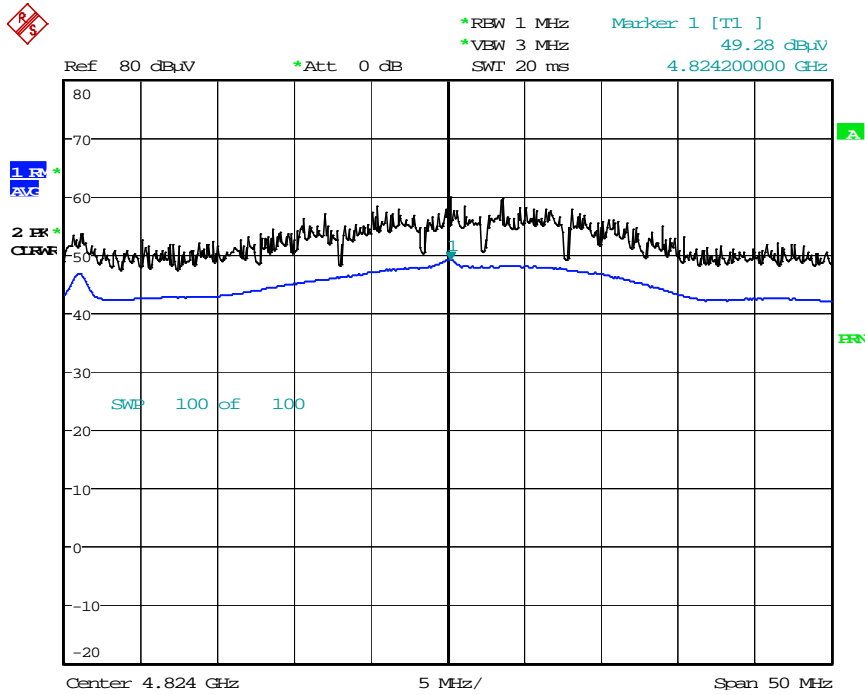


Date: 13.NOV.2015 08:18:33

Radiated Spurious Emissions plot – Peak Reading (802.11g, Ch.1 2nd Harmonic)

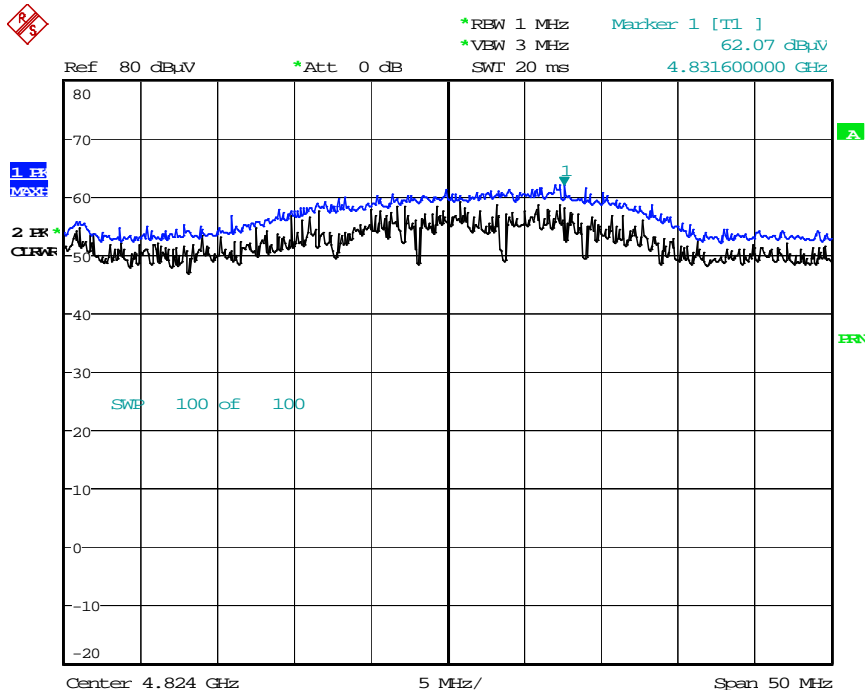


Date: 13.NOV.2015 08:18:04

Radiated Spurious Emissions plot – Average Reading (802.11n_20MHz, Ch.1 2nd Harmonic)

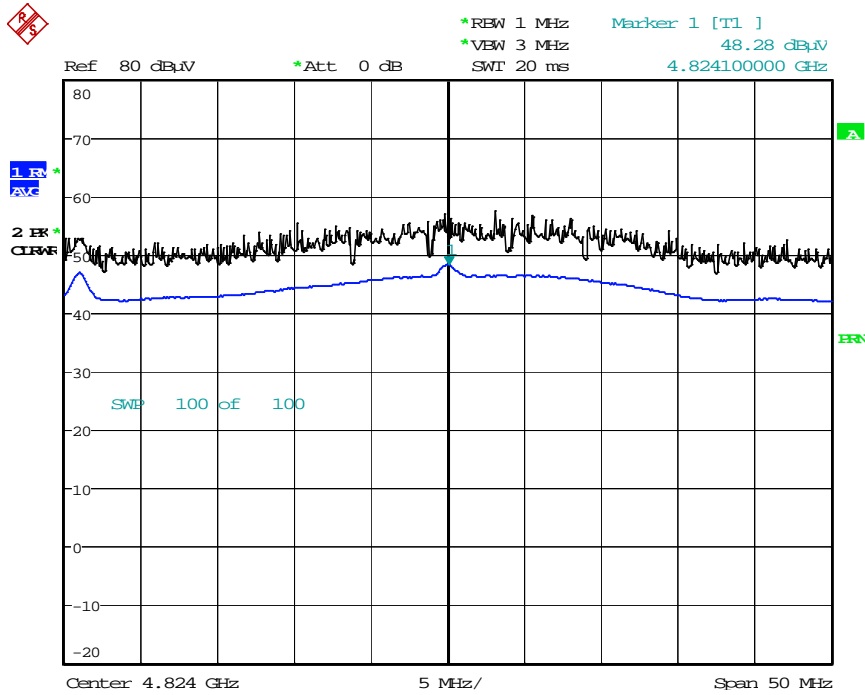


Date: 13.NOV.2015 08:31:02

Radiated Spurious Emissions plot – Peak Reading (802.11n_20MHz, Ch.1 2nd Harmonic)

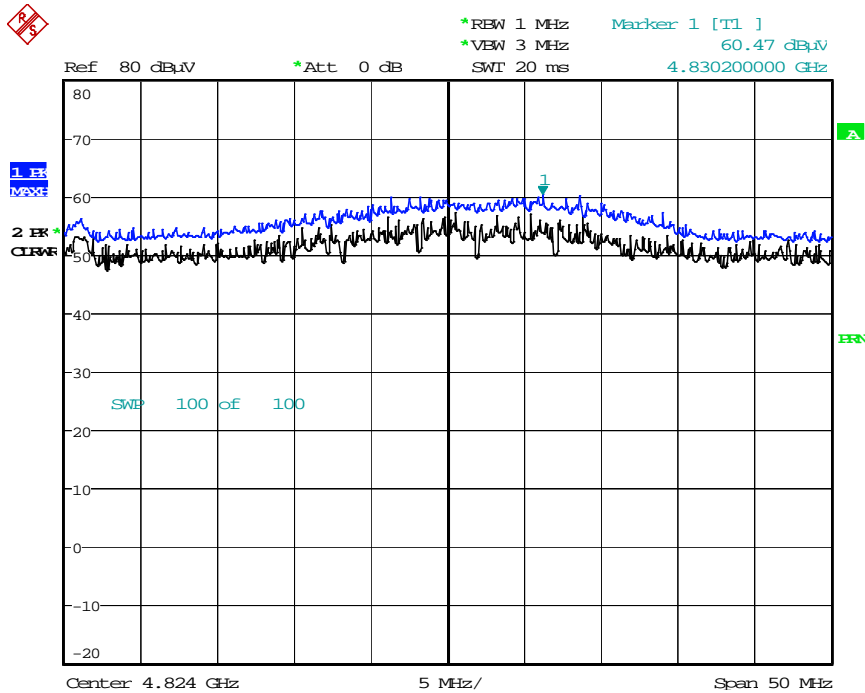


Date: 13.NOV.2015 08:22:55

Radiated Spurious Emissions plot – Average Reading (802.11n_40MHz, Ch.1 3rd Harmonic)

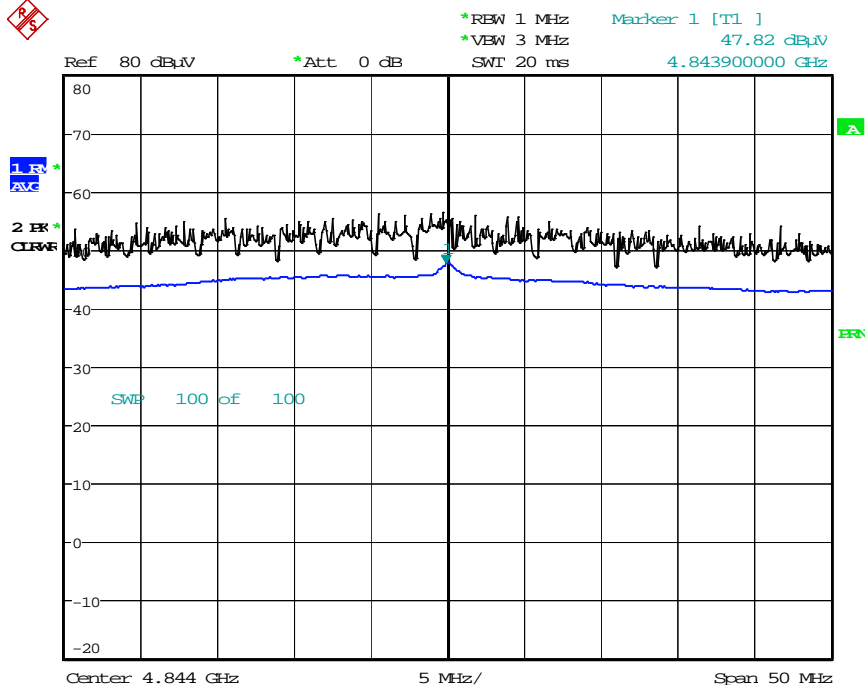

Date: 13.NOV.2015 08:54:00

Radiated Spurious Emissions plot – Peak Reading (802.11n_40MHz, Ch.1 3rd Harmonic)

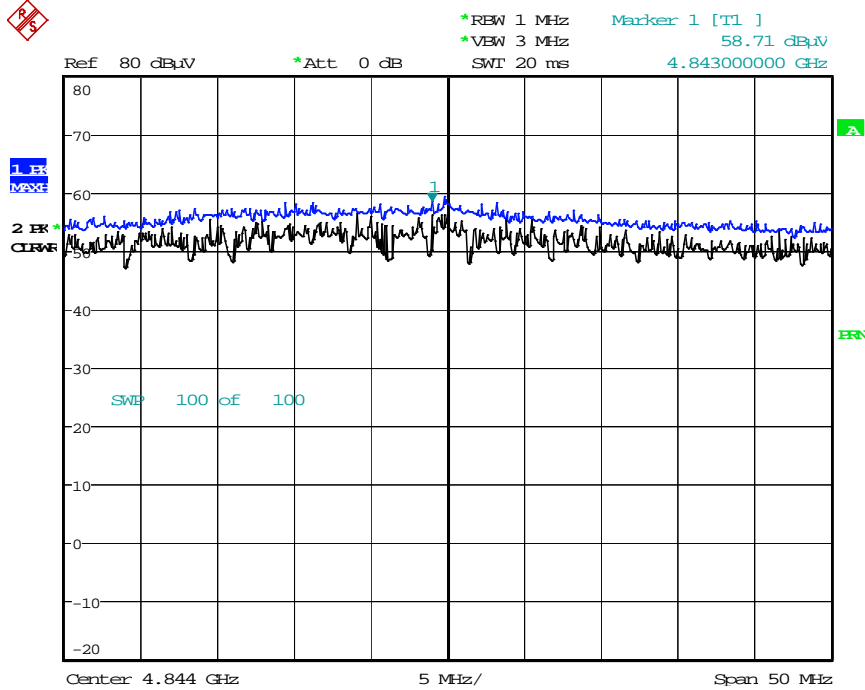

Date: 13.NOV.2015 08:51:54

8.6.2 RADIATED RESTRICTED BAND EDGES

Test Requirements and limit, §15.247(d) §15.205, §15.209

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in section 15.209(a) (See section 15.205(c)).

Operation Mode: 802.11g
 Transfer Rate: 6 Mbps
 Operating Frequency 2412 MHz, 2462 MHz
 Channel No. 01 Ch, 11 Ch

Frequency [MHz]	Reading dBuV	Duty Cycle Factor	A.F.+CL [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
2390.0	26.34	0.00	31.28	H	57.62	73.98	16.36	PK
2390.0	15.54	0.227	31.28	H	47.05	53.98	6.93	AV
2390.0	26.18	0.00	31.28	V	57.46	73.98	16.52	PK
2390.0	15.48	0.227	31.28	V	46.99	53.98	6.99	AV
2483.5	30.41	0.00	31.28	H	61.69	73.98	12.29	PK
2483.5	18.16	0.227	31.28	H	49.67	53.98	4.31	AV
2483.5	29.54	0.00	31.28	V	60.82	73.98	13.16	PK
2483.5	17.11	0.227	31.28	V	48.62	53.98	5.36	AV

Operation Mode: 802.11b
 Transfer Rate: 1 Mbps
 Operating Frequency: 2412 MHz, 2462 MHz
 Channel No.: 01 Ch, 11 Ch

Frequency [MHz]	Reading dBuV	A.F.+CL [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
2390.0	27.05	31.28	H	58.33	73.98	15.65	PK
2390.0	15.53	31.28	H	46.81	53.98	7.17	AV
2390.0	26.82	31.28	V	58.10	73.98	15.88	PK
2390.0	15.39	31.28	V	46.67	53.98	7.31	AV
2483.5	30.08	31.28	H	61.36	73.98	12.62	PK
2483.5	18.99	31.28	H	50.27	53.98	3.71	AV
2483.5	28.99	31.28	V	60.27	73.98	13.71	PK
2483.5	17.69	31.28	V	48.97	53.98	5.01	AV

Operation Mode: 802.11n_20MHz BW
 Transfer MCS Index: 0
 Operating Frequency: 2412 MHz, 2462 MHz
 Channel No.: 01 Ch, 11 Ch

Frequency [MHz]	Reading dBuV	Duty Cycle Factor	A.F.+CL [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
2390.0	26.27	0.00	31.28	H	57.55	73.98	16.43	PK
2390.0	15.43	0.211	31.28	H	46.92	53.98	7.06	AV
2390.0	26.42	0.00	31.28	V	57.70	73.98	16.28	PK
2390.0	15.27	0.211	31.28	V	46.76	53.98	7.22	AV
2483.5	30.58	0.00	31.28	H	61.86	73.98	12.12	PK
2483.5	18.21	0.211	31.28	H	49.70	53.98	4.28	AV
2483.5	29.46	0.00	31.28	V	60.74	73.98	13.24	PK
2483.5	17.64	0.211	31.28	V	49.13	53.98	4.85	AV

Operation Mode: 802.11n_40MHz BW
 Transfer MCS Index: 0
 Operating Frequency 2422 MHz, 2452 MHz
 Channel No. 03 Ch, 09 Ch


Frequency [MHz]	Reading dBuV	Duty Cycle Factor	A.F.+CL [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
2390.0	32.30	0.00	31.28	H	63.58	73.98	10.40	PK
2390.0	16.56	0.421	31.28	H	48.26	53.98	5.72	AV
2390.0	31.44	0.00	31.28	V	62.72	73.98	11.26	PK
2390.0	16.10	0.421	31.28	V	47.80	53.98	6.18	AV
2483.5	39.12	0.00	31.28	H	70.40	73.98	3.58	PK
2483.5	18.97	0.421	31.28	H	50.67	53.98	3.31	AV
2483.5	38.72	0.00	31.28	V	70.00	73.98	3.98	PK
2483.5	18.21	0.421	31.28	V	49.91	53.98	4.07	AV

Notes:

1. Total = Reading Value + Antenna Factor + Cable Loss + Duty Cycle Factor(802.11g/n)
2. We have done 802.11b/g/n mode and all data rate. Worst data rate is the lowest data of each mode.
3. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.


■ RESULT PLOTS

Radiated Restricted Band Edges plot – Average Reading (802.11b, Ch.11)

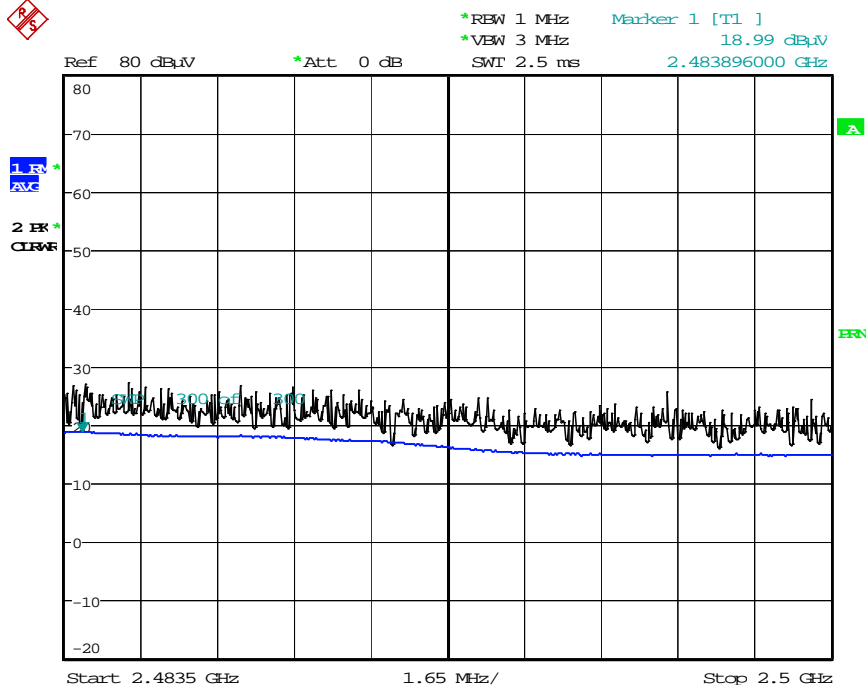


Date: 10.NOV.2015 08:04:46

Radiated Restricted Band Edges plot – Peak Reading (802.11b, Ch.11)

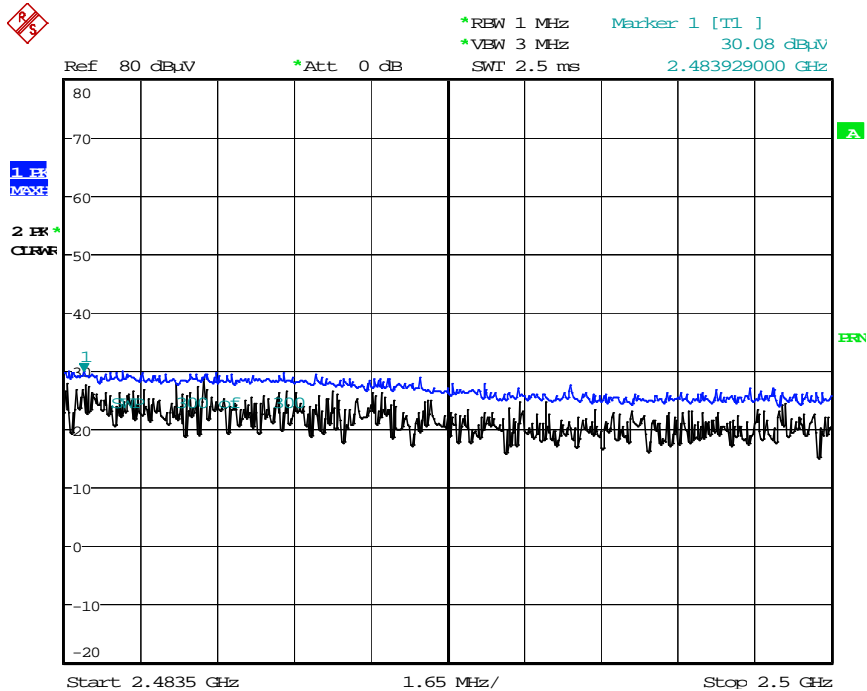


Date: 10.NOV.2015 08:04:10

Radiated Restricted Band Edges plot – Average Reading (802.11g, Ch.11)

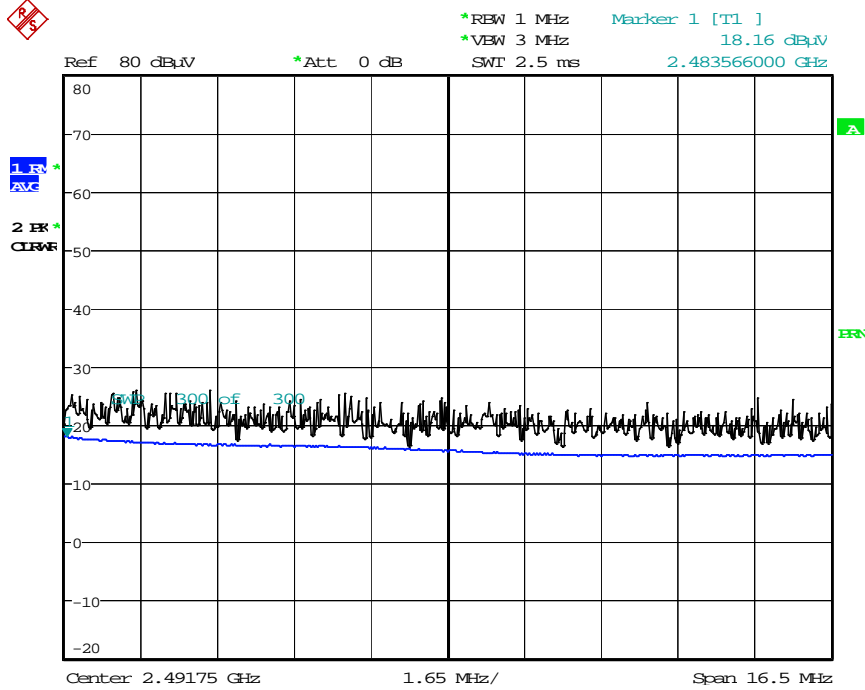


Date: 10.NOV.2015 02:51:36

Radiated Restricted Band Edges plot – Peak Reading (802.11g, Ch.11)

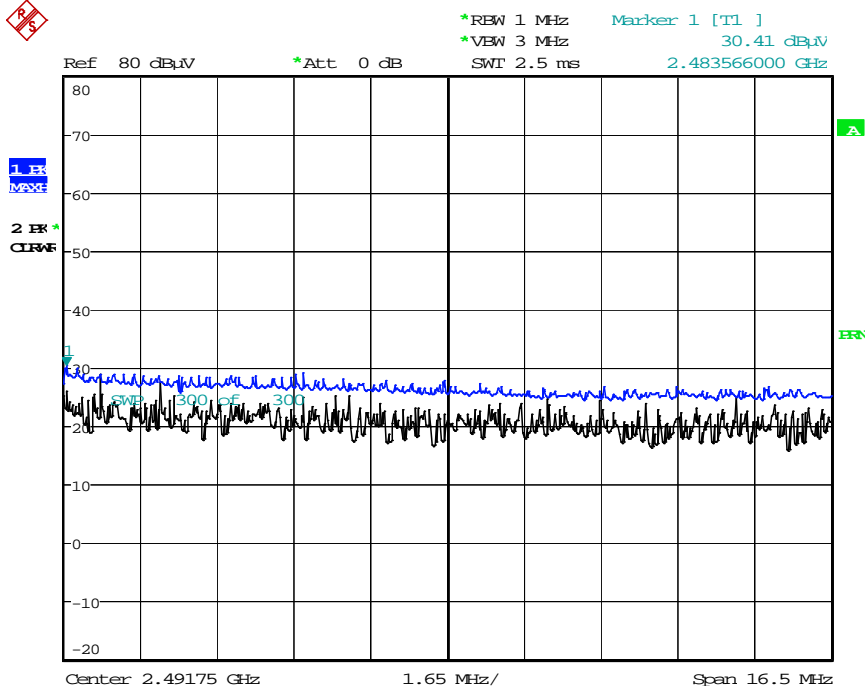


Date: 10.NOV.2015 02:52:25

Radiated Restricted Band Edges plot – Average Reading (802.11n_20MHz, Ch.11)

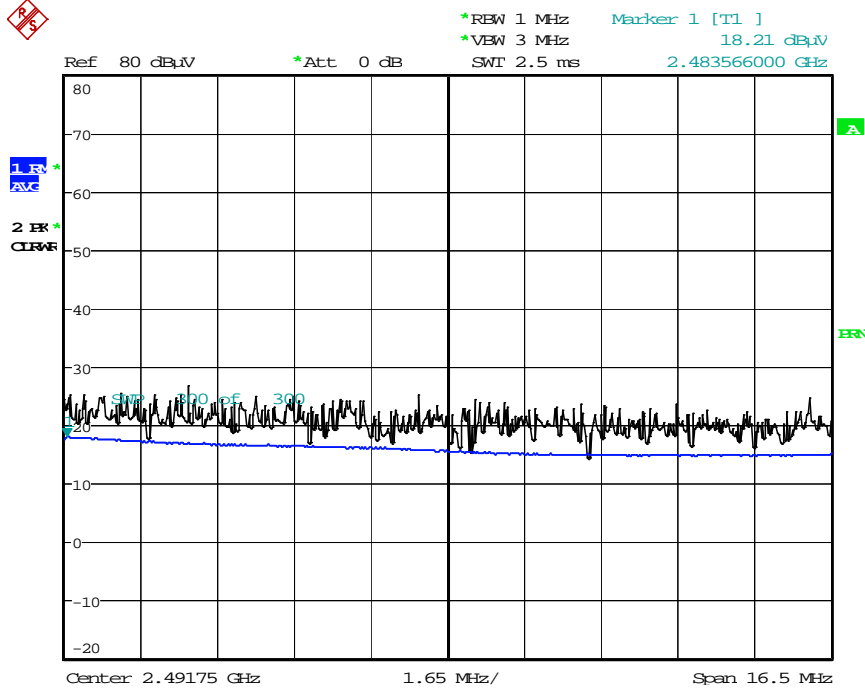


Date: 10.NOV.2015 08:11:49

Radiated Restricted Band Edges plot – Peak Reading (802.11n_20MHz, Ch.11)

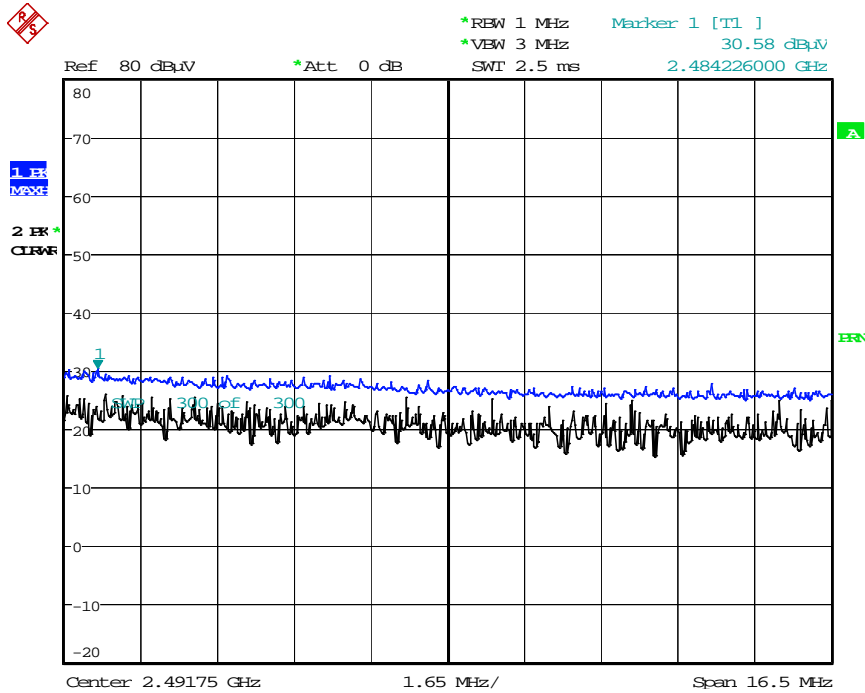


Date: 10.NOV.2015 08:11:18

Radiated Restricted Band Edges plot – Average Reading (802.11n_40MHz, Ch.09)

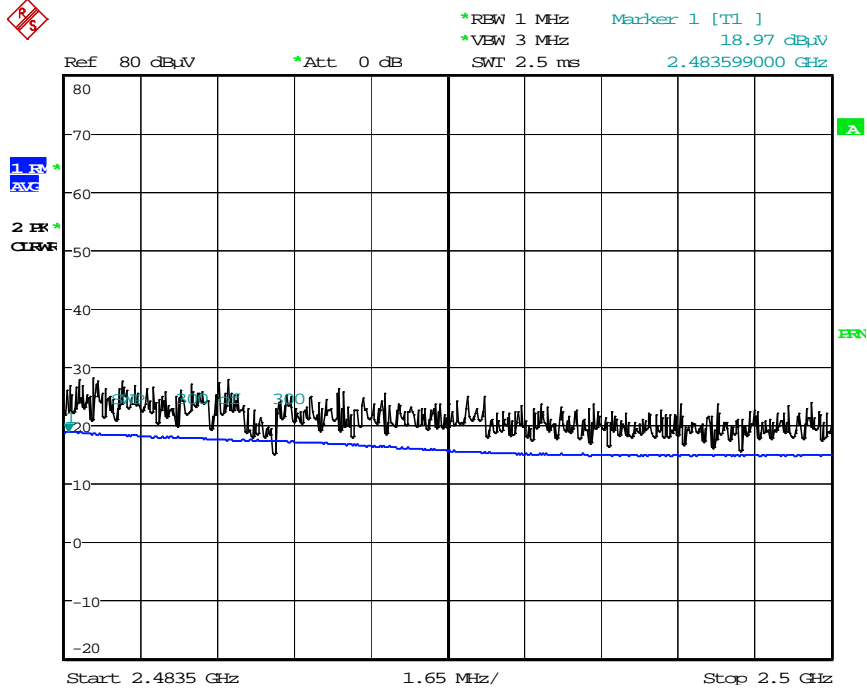

Date: 10.NOV.2015 08:49:51

Radiated Restricted Band Edges plot – Peak Reading (802.11n_40MHz, Ch.09)

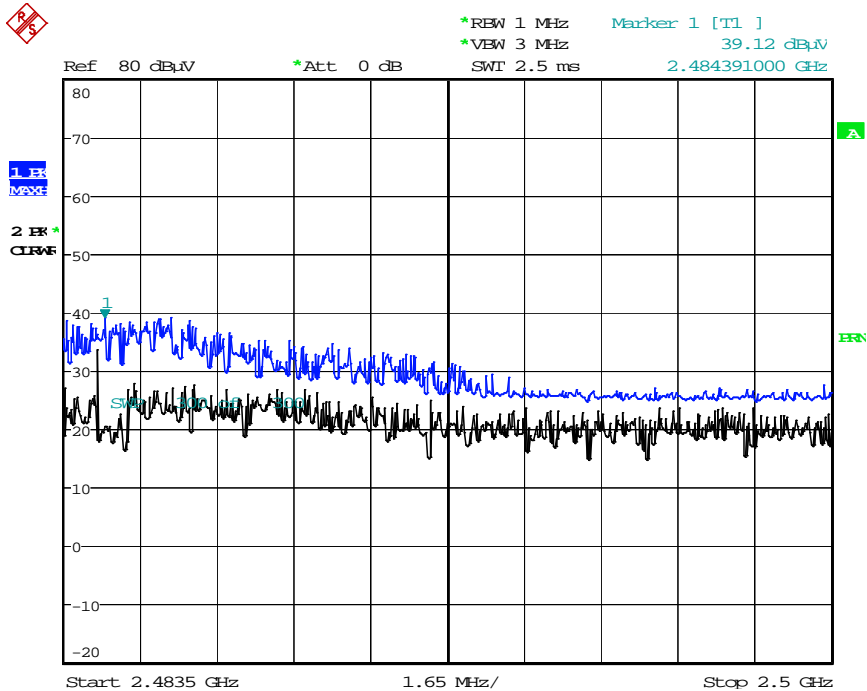

Date: 10.NOV.2015 08:49:13

8.7 POWERLINE CONDUCTED EMISSIONS

Test Requirements and limit, §15.207

For an intentional radiator which is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed 250 microvolts (The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz). The limits at specific frequency range is listed as follows:

Frequency Range (MHz)	Limits (dBµV)	
	Quasi-peak	Average
0.15 to 0.50	66 to 56	56 to 46
0.50 to 5	56	46
5 to 30	60	50

Compliance with this provision shall be based on the measurement of the radio frequency voltage between each power line (LINE and NEUTRAL) and ground at the power terminals.

Test Configuration

See test photographs attached in Appendix 1 for the actual connections between EUT and support equipment.

TEST PROCEDURE

1. The EUT is placed on a wooden table 80 cm above the reference ground plane.
2. The EUT is connected via LISN to a test power supply.
3. The measurement results are obtained as described below:
4. Detectors – Quasi Peak and Average Detector.
5. We are performed the AC Power Line Conducted Emission test for worst data rate, channel, operation mode.

Sample Calculation

Quasi-peak(Final Result) = Reading Value + Correction Factor

Note : We don't perform powerline conducted emission test. Because this EUT is used with vehicle.

9. LIST OF TEST EQUIPMENT

9.1 LIST OF TEST EQUIPMENT(Conducted Test)

Manufacturer	Model / Equipment	Calibration Date	Calibration Interval	Serial No.
Rohde & Schwarz	ENV216/ LISN	01/13/2015	Annual	100073
Agilent	E4440A/ Spectrum Analyzer	03/18/2015	Annual	US45303008
Agilent	N9020A / SIGNAL ANALYZER	06/30/2015	Annual	MY51110085
Agilent	N9020A / SIGNAL ANALYZER	07/02/2015	Annual	MY50510304
Agilent	N1911A/Power Meter	07/09/2015	Annual	MY45100523
Agilent	N1921A /POWER SENSOR	07/09/2015	Annual	MY45241059
*Agilent	*87300B/Directional Coupler	11/30/2015	Annual	3116A03621
Hewlett Packard	11667B / Power Splitter	06/15/2015	Annual	5001
Hewlett Packard	E3632A / DC POWER SUPPLY	03/11/2015	Annual	KR75303962
Agilent	8493C / Attenuator(10 dB)	07/21/2015	Annual	07560
The *Agilinet '87300B/Directional Coupler' was used after calibration date.(11/30/2015)				

9.2 LIST OF TEST EQUIPMENT(Radiated Test)

Manufacturer	Model / Equipment	Calibration Date	Calibration Interval	Serial No.
Schwarzbeck	VULB 9160/ TRILOG Antenna	10/10/2014	Biennial	3368
HD	MA240/ Antenna Position Tower	N/A	N/A	556
EMCO	1050/ Turn Table	N/A	N/A	114
HD GmbH	HD 100/ Controller	N/A	N/A	13
HD GmbH	KMS 560/ SlideBar	N/A	N/A	12
Schwarzbeck	BBHA 9120D/ Horn Antenna	05/07/2015	Biennial	937
Schwarzbeck	BBHA9170 / Horn Antenna(15 GHz ~ 40 GHz)	04/30/2015	Biennial	BBHA9170124
Rohde & Schwarz	FSP / Spectrum Analyzer	01/22/2015	Annual	839117/011
Wainwright Instrument	WHF3.0/18G-10EF / High Pass Filter	06/29/2015	Annual	8
Wainwright Instrument	WRCJ2400/2483.5-2370/2520-60/14SS / Band Reject Filter	06/15/2015	Annual	1
Rohde & Schwarz	LOOP ANTENNA	09/03/2014	Biennial	1513-175
CERNEX	CBL18265035 / POWER AMP	07/27/2015	Annual	22966
CERNEX	CBL06185030 / POWER AMP	07/21/2015	Annual	22965
CERNEX	CBLU1183540 / POWER AMP	07/21/2015	Annual	22964