

TEST REPORT

of

FCC CFR 47 part 1, 1.1307(b), 1.1310


FCC ID: BEJTM16FNNABM0

Equipment Under Test : Telematics Module
Model Name : TM16FNNABM0
Variant Model Name(s) : -
Applicant : LG Electronics USA
Manufacturer : LG Electronics Inc.
Date of Receipt : 2023.12.13
Date of Test(s) : 2023.12.13 ~ 2024.03.27
Date of Issue : 2024.03.27

In the configuration tested, the EUT complied with the standards specified above. This test report does not assure KOLAS accreditation.


- 1) The results of this test report are effective only to the items tested.
- 2) The SGS Korea is not responsible for the sampling, the results of this test report apply to the sample as received.
- 3) This test report cannot be reproduced, except in full, without prior written permission of the Company.
- 4) The data marked ※ in this report was provided by the customer and may affect the validity of the test results.
We are responsible for all the information of this test report except for the data(※) provided by the customer.

Tested by:

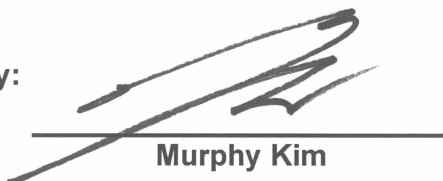

Murphy Kim

Technical
Manager:

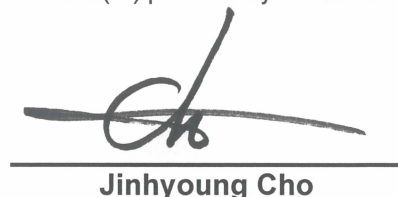

Jinhyoung Cho

SGS Korea Co., Ltd. Gunpo Laboratory



INDEX

Table of Contents

| | |
|---------------------------------|---|
| 1. General Information | 3 |
| 2. RF Exposure Evaluation | 7 |

1. General Information

1.1. Testing Laboratory

SGS Korea Co., Ltd. (Gunpo Laboratory)

- 10-2, LS-ro 182beon-gil, Gunpo-si, Gyeonggi-do, Korea, 15807
- 4, LS-ro 182beon-gil, Gunpo-si, Gyeonggi-do, Korea, 15807
- CAB Identifier: KR0150

All SGS services are rendered in accordance with the applicable SGS conditions of service available on request and accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx>.

Phone No. : +82 31 688 0901

Fax No. : +82 31 688 0921

1.2. Details of Applicant

Applicant : LG Electronics USA

Address : 111 Sylvan Avenue, North Building, Englewood Cliffs, New Jersey, United States, 07632

Contact Person : Kim, David

Phone No. : +1 201 470 2696

1.3. Details of Manufacturer

Company : LG Electronics Inc.

Address : 128, Yeoui-daero, Yeongdeungpo-gu, Seoul, Republic of Korea, 07336

1.4. Description of EUT

| | | | |
|-----------------------------|---|--|----------------------|
| Kind of Product | Telematics Module | | |
| Model Name | TM16FNNABM0 | | |
| Serial Number | Conducted: FCC_04 Radiated: FCC Rad_02 | | |
| Power Supply | DC 4.10 V | | |
| Rated Power | WCDMA II, V: 24 dB m LTE Band 2, 4, 5, 7, 12, 13, 17, 25, 26, 38, 66, 71: 23 dB m LTE Band 48: 22 dB m NR Band 2, 5, 7, 12, 25, 41, 66, 71, 77, 78: 23 dB m NR Band 48: 22 dB m | | |
| Frequency Range | WCDMA II: 1 850 MHz ~ 1 910 MHz WCDMA V: 824 MHz ~ 849 MHz LTE Band 2: 1 850 MHz ~ 1 910 MHz LTE Band 4: 1 710 MHz ~ 1 755 MHz LTE Band 5: 824 MHz ~ 849 MHz LTE Band 7: 2 500 MHz ~ 2 570 MHz LTE Band 12: 699 MHz ~ 716 MHz LTE Band 13: 777 MHz ~ 787 MHz LTE Band 17: 704 MHz ~ 716 MHz LTE Band 25: 1 850 MHz ~ 1 915 MHz LTE Band 26: 814 MHz ~ 849 MHz LTE Band 38: 2 570 MHz ~ 2 620 MHz LTE Band 48: 3 550 ~ 3 700 MHz LTE Band 66: 1 710 MHz ~ 1 780 MHz LTE Band 71: 663 MHz ~ 698 MHz | NR Band 2: 1 850 MHz ~ 1 910 MHz NR Band 5: 824 MHz ~ 849 MHz NR Band 7: 2 500 MHz ~ 2 570 MHz NR Band 12: 699 MHz ~ 716 MHz NR Band 25: 1 850 MHz ~ 1 915 MHz NR Band 41: 2 496 MHz ~ 2 690 MHz NR Band 48: 3 550 ~ 3 700 MHz NR Band 66: 1 710 MHz ~ 1 780 MHz NR Band 71: 663 MHz ~ 698 MHz NR Band 77: 3 450 MHz ~ 3 550 MHz NR Band 77: 3 700 MHz ~ 3 980 MHz NR Band 78: 3 450 MHz ~ 3 550 MHz NR Band 78: 3 700 MHz ~ 3 800 MHz | |
| Modulation Technique | BPSK, QPSK, 16QAM, 64QAM, 256QAM | | |
| Antenna Type | Ant. 1: PIFA Antenna | Ant. 2: PIFA Antenna | Ant. 3: PIFA Antenna |
| Antenna Gain* | Refer to the clause 1.6 | | |
| H/W Version | Rev.D | | |
| S/W Version | IN25XA03 | | |

1.5. Manufacturer Declaration

The EUT has three antennas, antennas 1 and 2 are the main antennas, and antenna 3 can be switched to the main antenna. Each antenna can't transmit simultaneously.

1.6. Antenna Information

| Ant. No. | Ant. Type | Frequency Range | Support Band | | |
|----------|-----------|-----------------|--|-----------------------------|-------|
| | | | LTE | NR | WCDMA |
| Ant. 1 | PIFA | Below 3 GHz | 2, 4, 5, 7, 12, 13, 17, 25, 26, 38, 66, 71 | 2, 5, 7, 12, 25, 41, 66, 71 | II, V |
| Ant. 2 | PIFA | Above 3 GHz | 48 | 48, 77, 78 | |
| Ant. 3 | PIFA | Below 3 GHz | 2, 4, 5, 7, 12, 13, 17, 25, 26, 38, 66, 71 | 2, 5, 7, 12, 25, 41, 66, 71 | II, V |

| Band | Operating Frequency (MHz) | Antenna Peak Gain (dB i) | | |
|---------------------------------|---------------------------|--------------------------|--------------|--------------|
| | | Ant. 1 | Ant. 2 | Ant. 3 |
| LTE 25/2 WCDMA II NR 25/2 | 1 850 ~ 1 915 | <u>1.86</u> | | -0.32 |
| LTE 66/4 NR 66 | 1 710 ~ 1 780 | <u>1.37</u> | | -0.03 |
| LTE 26/5 WCDMA V NR 5 | 824 ~ 849 | <u>-2.43</u> | | -3.16 |
| LTE 7 NR 7 | 2 500 ~ 2 570 | 0.92 | | <u>2.79</u> |
| LTE 12/17 NR 12 | 699 ~ 716 | -3.98 | | <u>-1.20</u> |
| LTE 13 | 777 ~ 787 | -4.60 | | <u>-3.16</u> |
| LTE 26 | 814 ~ 824 | <u>-2.43</u> | | -3.16 |
| LTE 38 | 2 570 ~ 2 620 | 0.92 | | <u>2.79</u> |
| LTE 48 NR 48 | 3 550 ~ 3 700 | | <u>-1.37</u> | |
| LTE 71 NR 71 | 663 ~ 698 | -2.45 | | <u>-1.60</u> |
| NR 41 | 2 496 ~ 2 690 | 0.92 | | <u>2.79</u> |
| NR 77 | 3 450 ~ 3 550 | | <u>0.12</u> | |
| | 3 700 ~ 3 980 | | <u>0.12</u> | |
| NR 78 | 3 450 ~ 3 550 | | <u>0.12</u> | |
| | 3 700 ~ 3 800 | | <u>0.12</u> | |

Note;

Antenna gains were compared between antennas and mark the worst gain of each band.

1.7. Summary of Test Results

The EUT has been tested according to the following specifications:

| APPLIED STANDARD: FCC Part 1 | | |
|------------------------------|------------------------|----------|
| Section | Test Item(s) | Result |
| 1.1307(b)(3) | RF Exposure Evaluation | Complied |

1.8. Test Report Revision

| Revision | Report Number | Date of Issue | Description |
|----------|----------------------|---------------|-------------|
| 0 | F690501-RF-RTL004919 | 2024.03.27 | Initial |

2. RF Exposure Evaluation

Test exemptions apply for devices used in general population/uncontrolled exposure environments, according to the SAR-based, or MPE-based exemption thresholds.

2.1. Blanket 1 mW Blanket Exemption

The 1 mW Blanket Exemption of § 1.1307(b)(3)(i)(A) applies for single fixed, mobile, and portable RF sources with available maximum time-averaged power of no more than 1 mW, regardless of separation distance.

The 1 mW blanket exemption applies at separation distances less than 0.5 cm, including where there is no separation. This exemption shall not be used in conjunction with other exemption criteria other than those for multiple RF sources in paragraph § 1.1307(b)(3)(ii)(A).

The 1 mW exemption is independent of service type and covers the full range of 100 kHz to 100 GHz, but it shall not be used in conjunction with other exemption criteria or in devices with higher-power transmitters operating in the same time-averaging period. Exposure from such higher-power transmitters would invalidate the underlying assumption that exposure from the lower-power transmitter is the only contributor to SAR in the relevant volume of tissue.

2.2. MPE-based Exemption

General frequency and separation-distance dependent MPE-based effective radiated power (ERP) thresholds are in Table B.1 [Table 1 of § 1.1307(b)(1)(i)(C)] to support an exemption from further evaluation from 300 kHz through 100 GHz.

**Table 1: THRESHOLDS FOR SINGLE RF SOURCES
 SUBJECT TO ROUTINE ENVIRONMENTAL EVALUATION**

| RF Source Frequency | | | Minimum Distance | | | Threshold ERP |
|---------------------|---|----------------|--------------------|---|--------------------|--------------------------------------|
| f_L (MHz) | | f_H (MHz) | $\lambda_L / 2\pi$ | | $\lambda_H / 2\pi$ | W |
| 0.3 | - | 1.34 | 159 m | - | 35.6 m | 1 920 R ² |
| 1.34 | - | 30 | 35.6 m | - | 1.6 m | 3 450 R ² /f ² |
| 30 | - | 300 | 1.6 m | - | 159 mm | 3.83 R ² |
| 300 | - | 1 500 | 159 mm | - | 31.8 mm | 0.012 8 R ² f |
| 1 500 | - | 100 000 | 31.8 mm | - | 0.5 mm | 19.2 R ² |

Subscripts L and H are low and high; λ is wavelength.
 From § 1.1307(b)(3)(i)(C), modified by adding Minimum Distance columns.

The table applies to any RF source (i.e., single fixed, mobile, and portable transmitters) and specifies power and distance criteria for each of the five frequency ranges used for the MPE limits. These criteria apply at separation distances from any part of the radiating structure of at least $\lambda/2\pi$. The thresholds are based on the general population MPE limits with a single perfect reflection, outside of the reactive near-field, and in the main beam of the radiator.

For mobile devices that are not exempt per Table B.1 [Table 1 of § 1.1307(b)(1)(i)(C)] at distances from 20 cm to 40 cm and in 0.3 GHz to 6 GHz, evaluation of compliance with the exposure limits in § 1.1310 is necessary if the ERP of the device is greater than ERP 20 cm in Formula (B.1) [repeated from § 2.1091(c)(1) and § 1.1307(b)(1)(i)(B)].

$$P_{th} \text{ (mW)} = ERP_{20 \text{ cm}} \text{ (mW)} = \begin{cases} 2040f & 0.3 \text{ GHz} \leq f < 1.5 \text{ GHz} \\ 3060 & 1.5 \text{ GHz} \leq f \leq 6 \text{ GHz} \end{cases} \quad (\text{B. 1})$$

If the ERP is not easily obtained, then the available maximum time-averaged power may be used (i.e., without consideration of ERP only if the physical dimensions of the radiating structure(s) do not exceed the electrical length of $\lambda/4$ or if the antenna gain is less than that of a half-wave dipole.

SAR-based exemptions are constant at separation distances between 20 cm and 40 cm to avoid discontinuities in the threshold when transitioning between SAR-based and MPE-based exemption criteria at 40 cm, considering the importance of reflections.

2.3. SAR-based Exemption

SAR-based thresholds are derived based on frequency, power, and separation distance of the RF source. The formula defines the thresholds in general for either available maximum time-averaged power or maximum time-averaged ERP, whichever is greater.

If the ERP of a device is not easily determined, such as for a portable device with a small form factor, the applicant may use the available maximum time-averaged power exclusively if the device antenna or radiating structure does not exceed an electrical length of $\lambda/4$.

As for devices with antennas of length greater than $\lambda/4$ where the gain is not well defined, but always less than that of a half-wave dipole (length $\lambda/2$), the available maximum time-averaged power generated by the device may be used in place of the maximum time-averaged ERP, where that value is not known.

The separation distance is the smallest distance from any part of the antenna or radiating structure for all persons, during operation at the applicable ERP. In the case of mobile or portable devices, the separation distance is from the outer housing of the device where it is closest to the antenna.

The SAR-based exemption formula of § 1.1307(b)(3)(i)(B), repeated here as Formula (B.2), applies for single fixed, mobile, and portable RF sources with available maximum time-averaged power or effective radiated power (ERP), whichever is greater, of less than or equal to the threshold P_{th} (mW).

This method shall only be used at separation distances from 0.5 cm to 40 cm and at frequencies from 0.3 GHz to 6 GHz (inclusive). P_{th} is given by Formula (B.2).

$$P_{th} \text{ (mW)} = \begin{cases} ERP_{20 \text{ cm}}(d/20 \text{ cm})^x & d \leq 20 \text{ cm} \\ ERP_{20 \text{ cm}} & 20 \text{ cm} < d \leq 40 \text{ cm} \end{cases} \quad (\text{B.2})$$

where

$$x = -\log_{10} \left(\frac{60}{ERP_{20 \text{ cm}} \sqrt{f}} \right)$$

and f is in GHz, d is the separation distance (cm), and $ERP_{20 \text{ cm}}$ is per Formula (B.1).

2.4. Simultaneous Transmission SAR Test Exemption with Respect to Multiple Exemption Criteria

Either SAR-based or MPE-based exemption may be considered for test exemption for fixed, mobile, or portable device exposure conditions; therefore, the contributions from each exemption in conjunction with the measured SAR (Evaluated_k term) shall be used to determine exemption for simultaneous transmission according to Formula (C.1) [repeated from § 1.1307(b)(3)(ii)(B)].

$$\sum_{i=1}^a \frac{P_i}{P_{th,i}} + \sum_{j=1}^b \frac{ERP_j}{ERP_{th,j}} + \sum_{k=1}^c \frac{Evaluated_k}{Exposure Limit_k} \leq 1$$

3. Test Result

3.1. MPE-based Exemption

| Mode | Frequency Range (MHz) | Maximum Average Power (dB m) | Worst Antenna Gain (dB i) | Minimum Separation Distance (cm) | Maximum Average Power (mW) | ERP (mW) | Threshold ERP (mW) | Ratio | Result |
|-----------------------|-----------------------|------------------------------|---------------------------|----------------------------------|----------------------------|----------|--------------------|-------|--------|
| WCMDA II | 1 850 ~ 1 910 | 25.5 | 1.86 | 20 | 354.81 | 331.89 | 768.00 | 0.43 | Pass |
| WCDMA V | 824 ~ 849 | 25.5 | -2.43 | 20 | 354.81 | 123.59 | 434.69 | 0.28 | Pass |
| LTE Band 25/2 | 1 850 ~ 1 915 | 24.5 | 1.86 | 20 | 281.84 | 263.63 | 768.00 | 0.34 | Pass |
| LTE Band 66/4 | 1 710 ~ 1 780 | 24.5 | 1.37 | 20 | 281.84 | 235.50 | 768.00 | 0.31 | Pass |
| LTE Band 26/5 Part 22 | 824 ~ 849 | 24.5 | -2.43 | 20 | 281.84 | 98.17 | 434.69 | 0.23 | Pass |
| LTE Band 26 Part 90 | 814 ~ 824 | 24.5 | -2.43 | 20 | 281.84 | 98.17 | 421.89 | 0.23 | Pass |
| LTE Band 7 | 2 500 ~ 2 570 | 24.5 | 2.79 | 20 | 281.84 | 326.59 | 768.00 | 0.43 | Pass |
| LTE Band 12/17 | 699 ~ 716 | 24.5 | -1.20 | 20 | 281.84 | 130.32 | 366.59 | 0.36 | Pass |
| LTE Band 13 | 777 ~ 787 | 24.5 | -3.16 | 20 | 281.84 | 82.99 | 402.94 | 0.21 | Pass |
| LTE Band 38 | 2 570 ~ 2 620 | 24.5 | 2.79 | 20 | 281.84 | 326.59 | 768.00 | 0.43 | Pass |
| LTE Band 48 | 3 550 ~ 3 700 | 23 | -1.37 | 20 | 199.53 | 88.72 | 768.00 | 0.12 | Pass |
| LTE Band 71 | 663 ~ 698 | 24.5 | -1.60 | 20 | 281.84 | 118.85 | 357.38 | 0.33 | Pass |
| 5G NR Band 25/2 | 1 850 ~ 1 915 | 24.5 | 1.86 | 20 | 281.84 | 263.63 | 768.00 | 0.34 | Pass |
| 5G NR Band 5 | 824 ~ 849 | 24.5 | -2.43 | 20 | 281.84 | 98.17 | 434.69 | 0.23 | Pass |
| 5G NR Band 7 | 2 500 ~ 2 570 | 24.5 | 2.79 | 20 | 281.84 | 326.59 | 768.00 | 0.43 | Pass |
| 5G NR Band 12 | 699 ~ 716 | 24.5 | -1.20 | 20 | 281.84 | 130.32 | 366.59 | 0.36 | Pass |
| 5G NR Band 41 | 2 496 ~ 2 690 | 24.5 | 2.79 | 20 | 281.84 | 326.59 | 768.00 | 0.43 | Pass |
| 5G NR Band 48 | 3 550 ~ 3 700 | 23 | -1.37 | 20 | 199.53 | 88.72 | 768.00 | 0.12 | Pass |
| 5G NR Band 66 | 1 710 ~ 1 780 | 24.5 | 1.37 | 20 | 281.84 | 235.50 | 768.00 | 0.31 | Pass |
| 5G NR Band 71 | 663 ~ 698 | 24.5 | -1.60 | 20 | 281.84 | 118.85 | 357.38 | 0.33 | Pass |
| 5G NR Band 77/78 | 3 450 ~ 3 550 | 24.5 | 0.12 | 20 | 281.84 | 176.60 | 768.00 | 0.23 | Pass |
| 5G NR Band 77/78 | 3 700 ~ 3 980 | 24.5 | 0.12 | 20 | 281.84 | 176.60 | 768.00 | 0.23 | Pass |

Note;

- Maximum average target power is the manufacturer's declared rated power.
- Maximum average output power = Maximum average target power (dB m) + Maximum tune up (dB).
- ERP (dB m) = Maximum average power (dB m) + Antenna gain (dB i) - 2.15 (dB)

3.2. Simultaneous Transmission SAR Test Exemption with Respect to Multiple Exemption Criteria

| Mode | Band | P_i/P_{th} Ratio Mode A | P_i/P_{th} Ratio Mode B | $\Sigma P_i/P_{th}$ Ratio Mode A+B | Result |
|------------------|--------------------------------------|---------------------------------|---------------------------------|--|--------|
| Inter band CA | 2A-12A | 0.34 | 0.36 | 0.70 | Pass |
| | 12A-66A | 0.36 | 0.31 | 0.67 | Pass |
| EN-DC | NR 2 LTE 5, 12, 13, 48 | 0.34 | 0.36 | 0.70 | Pass |
| | NR 5 LTE 2, 66 | 0.23 | 0.34 | 0.57 | Pass |
| | NR 66 LTE 5, 12, 13, 48 | 0.31 | 0.36 | 0.67 | Pass |
| | NR 71 LTE 2, 7, 66 | 0.33 | 0.43 | 0.76 | Pass |
| | NR 77 LTE 2, 5, 7, 12, 13, 25, 66 | 0.23 | 0.43 | 0.66 | Pass |
| | NR 78 LTE 2, 7, 12, 25, 66 | 0.23 | 0.43 | 0.66 | Pass |

Note;

- The Antenna gain was considered both External and Internal and only worst gain was calculated for RF exposure.
- Total power of simultaneous mode (Inter CA, and EN-DC) not exceed single mode output power.
- In case of EN-DC mode, only one combination was reported as worst case.

Conclusion: No SAR is required.