



FCC 47 CFR PART 15 SUBPART E

TEST REPORT

For

TATUNG CO.

TABLET PC

Model: TTAB-B12D

Trade Name: Tatung

Prepared for

TATUNG CO.

**22 Chungshan N. Rd., 3 Sec. Taipei,
Taiwan, 10451 R.O.C.**

Prepared by

**Compliance Certification Services Inc.
No. 81-1, Lane 210, Bade Rd. 2, Luchu Hsiang,
Taoyuan Hsien, (338) Taiwan, R.O.C.
TEL: 886-3-324-0332
FAX: 886-3-324-5235**



***Note:** This report shall not be reproduced except in full, without the written approval of Compliance Certification Services Inc. This document may be altered or revised by Compliance Certification Services Inc. personnel only, and shall be noted in the revision section of the document.*



TABLE OF CONTENTS

1. TEST RESULT CERTIFICATION.....	3
2. EUT DESCRIPTION	4
3. TEST METHODOLOGY	5
3.1 EUT CONFIGURATION	5
3.2 EUT EXERCISE	5
3.3 GENERAL TEST PROCEDURES	5
3.4 FCC PART 15.205 RESTRICTED BANDS OF OPERATIONS	6
3.5 DESCRIPTION OF TEST MODES	6
4. INSTRUMENT CALIBRATION.....	7
5. FACILITIES AND ACCREDITATIONS	8
5.1 FACILITIES	8
5.2 EQUIPMENT	8
5.3 LABORATORY ACCREDITATIONS AND LISTING	8
5.4 TABLE OF ACCREDITATIONS AND LISTINGS	9
6. SETUP OF EQUIPMENT UNDER TEST	10
6.1 SETUP CONFIGURATION OF EUT	10
6.2 SUPPORT EQUIPMENT	10
7. FCC PART 15 REQUIREMENTS.....	11
7.1 26 DB EMISSION BANDWIDTH (15.403)	11
7.2 PEAK POWER (15.407).....	15
7.3 BAND EDGES MEASUREMENT	19
7.4 PEAK POWER SPECTRAL DENSITY (15.407).....	24
7.5 POWERLINE CONDUCTED EMISSION (15.207)	28
7.6 PEAK EXCURSION (15.407)	31
7.7 RADIO FREQUENCY EXPOSURE (15.407).....	35
7.8 RADIATED UNDESIRABLE EMISSION (15.407)	36
7.9 CONDUCTED UNDESIRABLE EMISSION (15.407).....	41
7.10 TRANSMISSION IN ABSENCE OF DATA (15.407).....	47
7.11 FREQUENCY STABILITY (15.407)	47
7.12 ANTENNA REQUIREMENT (15.407).....	47
APPENDIX 1 PHOTOGRPHS OF TEST SETUP	48



1. TEST RESULT CERTIFICATION

Applicant: TATUNG CO.
22 Chungshan N. Rd.,3 Sec. Taipei, Taiwan, 10451 R.O.C.

Equipment Under Test: TABLET PC

Trade Name: Tatung

Model: TTAB-B12D

Date of Test: September 8 ~ 10, 2004

APPLICABLE STANDARDS	
STANDARD	TEST RESULT
FCC Part 15 Subpart E	No non-compliance noted

We hereby certify that:

Compliance Certification Services Inc. tested the above equipment. The test data, data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in ANSI C63.4 and the energy emitted by the sample EUT tested as described in this report is in compliance with conducted and radiated emission limits of FCC Rules Part 15.407.

The test results of this report relate only to the tested sample identified in this report.

Approved by:

Reviewed by:

Harris W. Lai
Executive Vice President
Compliance Certification Services Inc.

Devin Chang
Section Manager
Compliance Certification Services Inc.



2. EUT DESCRIPTION

Product	TABLET PC
Trade Name	Tatung
Model Number	TTAB-B12D
Model Discrepancy	N/A
Power Supply	HP-OK065B13 I/P: 100-240V, 1.7A, 50-60Hz O/P: 18.5V, 3.5A, 65W
Frequency Range	IEEE802.11a : 5.15~5.35 GHz 5.725~5.85 GHz IEEE802.11b/g : 2412~2462 MHz
Transmit Power	IEEE 802.11a: 5.15~5.35 GHz: 12.30 dBm 5.725~5.85 GHz: 15.37dBm IEEE 802.11b: 15.55 dBm IEEE 802.11g: 15.67 dBm
Modulation Technique	IEEE 802.11a: DSSS+ OFDM IEEE 802.11b: DSSS IEEE 802.11g: OFDM
Transmit Data Rate	IEEE802.11a: 54Mbps IEEE 802.11b: 11Mbps IEEE 802.11g: 54Mbps
Number of Channels	IEEE802.11a: 5.15~5.35 GHz: 8 Channels 5.725~5.85 GHz: 5 Channels IEEE802.11b/g : 11 Channels
Antenna Specification	Antenna Type : PIFA Antenna Antenna Gain: IEEE802.11a: 5.15~5.35 GHz: 3.709dBi 5.725~5.85 GHz: -0.669dBi IEEE802.11b/g: -0.922dBi

Operation Frequency:

UNLICENSED NATIONAL INFORMATION INFRASTRUCTURE (U-NII)	
CHANNEL	MHz
1	5180
2	5200
3	5220
4	5240
5	5260
6	5280
7	5300
8	5320

Note:

1. This submittal(s) (test report) is intended for FCC ID: BJM-TTAB12DABG filing to comply with Section 15.407 of the FCC Part 15, Subpart E Rules.
2. The 5.2 GHz U-NII band is applicable to this report; another bands of operation (2.4 GHz) is documented in a separate report.



3. TEST METHODOLOGY

Both conducted and radiated testing was performed according to the procedures in ANSI C63.4. Radiated testing was performed at an antenna to EUT distance 3 meters.

3.1 EUT CONFIGURATION

The EUT configuration for testing is installed for RF field strength measurement to meet the Commissions requirement, and is operated in a manner intended to generate the maximum emission in a continuous normal application.

3.2 EUT EXERCISE

The EUT is operated in the engineering mode to fix the Tx frequency for the purposes of measurement.

According to its specifications, the EUT must comply with the requirements of Section 15.407 under the FCC Rules Part 15 Subpart E.

3.3 GENERAL TEST PROCEDURES

Conducted Emissions

The EUT is placed on the turntable, which is positioned at 0.8 m above the ground plane. According to the requirements in Section 13.1.4.1 of ANSI C63.4, the conducted emission from the EUT is measured in the frequency range between 0.15 MHz and 30MHz, using the CISPR Quasi-Peak detector mode.

Radiated Emissions

The EUT is placed on the turntable, which is 0.8 m above the ground plane. The turntable is then rotated for 360 degrees to determine the proper orientation for the maximum emission level. The EUT is set 3m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emission level. And, each emission is to be maximized by changing the horizontal and vertical polarization of the receiving antenna. In order to find out the maximum emission level, the relative positions of the EUT was rotated in each of the three orthogonal axes, according to the requirements in Section 13.1.4.1 of ANSI C63.4.

3.4 FCC PART 15.205 RESTRICTED BANDS OF OPERATIONS

- (a) Except as shown in paragraph (d) of this section, only spurious emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	GHz
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
¹ 0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 -	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.52525	2655 - 2900	22.01 - 23.12
8.41425 - 8.41475	156.7 - 156.9	3260 - 3267	23.6 - 24.0
12.29 - 12.293	162.0125 - 167.17	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	167.72 - 173.2	3345.8 - 3358	36.43 - 36.5
12.57675 - 12.57725	240 - 285	3600 - 4400	(²)
13.36 - 13.41	322 - 335.4		

¹ Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz.

² Above 38.6

- (b) Except as provided in paragraphs (d) and (e), the field strength of emissions appearing within these frequency bands shall not exceed the limits shown in Section 15.209. At frequencies equal to or less than 1000 MHz, compliance with the limits in Section 15.209 shall be demonstrated using measurement instrumentation employing a CISPR quasi-peak detector. Above 1000 MHz, compliance with the emission limits in Section 15.209 shall be demonstrated based on the average value of the measured emissions. The provisions in Section 15.35 apply to these measurements.

3.5 DESCRIPTION OF TEST MODES

The EUT has been tested under the operating condition.

Software used to control the EUT for staying in continuous transmitting and receiving mode is programmed.

Channel 1 (5180MHz), Channel 5 (5260MHz) and Channel 8 (5320MHz), which give the highest data rate of 54Mbps, are chosen for full testing.

The field strength of spurious radiation emission was measured in the following position: EUT stand-up position (Z axis), lie-down position (X, Y axis). The following data show only with the worst case setup.

The worst case of Z axis was reported.



4. INSTRUMENT CALIBRATION

The measuring equipment, which was utilized in performing the tests documented herein, has been calibrated in accordance with the manufacturer's recommendations for utilizing calibration equipment, which is traceable to recognized national standards.



5. FACILITIES AND ACCREDITATIONS

5.1 FACILITIES

All measurement facilities used to collect the measurement data are located at

☒ No. 81-1, Lane 210, Bade Rd. 2, Luchu Hsiang, Taoyuan Hsien, Taiwan, R.O.C.

☐ No. 199, Chunghsen Road, Hsintien City, Taipei Hsien, Taiwan, R.O.C.

The sites are constructed in conformance with the requirements of ANSI C63.7, ANSI C63.4 and CISPR Publication 22.

5.2 EQUIPMENT

Radiated emissions are measured with one or more of the following types of linearly polarized antennas: tuned dipole, biconical, log periodic, bi-log, and/or ridged waveguide, horn. Spectrum analyzers with pre-selectors and quasi-peak detectors are used to perform radiated measurements.

Conducted emissions are measured with Line Impedance Stabilization Networks and EMI Test Receivers.







Calibrated wideband preamplifiers, coaxial cables, and coaxial attenuators are also used for making measurements.

All receiving equipment conforms to CISPR Publication 16-1, "Radio Interference Measuring Apparatus and Measurement Methods."

5.3 LABORATORY ACCREDITATIONS AND LISTING

The test facilities used to perform radiated and conducted emissions tests are accredited by National Voluntary Laboratory Accreditation Program for the specific scope of accreditation under Lab Code: 200600-0 to perform Electromagnetic Interference tests according to FCC PART 15 AND CISPR 22 requirements. No part of this report may be used to claim or imply product endorsement by NVLAP or any agency of the US Government. In addition, the test facilities are listed with Federal Communications Commission (Registration no: 93105 and 90471).

5.4 TABLE OF ACCREDITATIONS AND LISTINGS

Country	Agency	Scope of Accreditation	Logo
USA	NVLAP*	EN 55011, EN 55014-1, AS/NZS 1044, CNS 13783-1, EN 55022, CNS 13438, EN 61000-3-2, EN 61000-3-3, ANSI C63.4, FCC OST/MP-5, AS/NZS CISPR 22, IEC 61000-4-2, IEC 61000-4-3, IEC 61000-4-4, IEC 61000-4-5, IEC 61000-4-6, IEC 61000-4-8, IEC 61000-4-11	 200600-0
USA	FCC	3/10 meter Open Area Test Sites to perform FCC Part 15/18 measurements	 93105, 90471
Japan	VCCI	4 3/10 meter Open Area Test Sites to perform conducted/radiated measurements	VCCI R-393/1066/725/879 C-402/747/912
Norway	NEMKO	EN 50081-1/2, EN 50082-1/2, IEC 61000-6-1/2, EN 50091-2, EN 50130-4, EN 55011, EN 55013, EN 55014-1/2, EN 55015, EN 55022, EN 55024, EN 61000-3-2/3, EN 61326-1, IEC 61000-4-2/3/4/5/6/8/11, EN 60601-1-2, EN 300 328-2, EN 300 422-2, EN 301 419-1, EN 301 489-01/03/07/08/09/17, EN 301 419-2/3, EN 300 454-2, EN 301 357-2	 ELA 124a ELA 124b ELA 124c
Taiwan	CNLA	EN 300 328-1/2, EN 300 220-1/2/3, EN 300 440-1/2, EN 61000-3-2, EN 61000-3-3, 47 CFR FCC Part 15 Subpart C/D/E, EN 55013, CNS 13439, EN 55014-1, CNS 13783-1, EN 55022, CNS 13438, CISPR 22, AS/NZS 3548, EN 61000-4-2/3/4/5/6/8/11, ENV 50204, IEEE Std 1528, FCC OET Bulletin, 65+Supplement C, EN50360, EN50361, EN50371, RSS102	 0 3 6 3 ILAC MRA
Taiwan	BSMI	CNS 13438, CNS 13783-1, CNS 13439, CNS 14115	 SL2-IS-E-0014 SL2-IN-E-0014 SL2-A1-E-0014 SL2-R1-E-0014 SL2-R2-E-0014 SL2-L1-E-0014
Canada	Industry Canada	RSS212, Issue 1	 IC 3991-3 IC 3991-4

* No part of this report may be used to claim or imply product endorsement by NVLAP or any agency of the US Government.



6. SETUP OF EQUIPMENT UNDER TEST

6.1 SETUP CONFIGURATION OF EUT

See test photographs attached in Appendix 1 for the actual connections between EUT and support equipment.

6.2 SUPPORT EQUIPMENT

Device Type	Brand	Model	Series No.	FCC ID	Data Cable	Power Cord
USB Keyboard	Compaq	KU-9978	B463AOAGALT097	FCC DoC	Shielded, 1.8m	N/A
USB Mouse	Logitech	M-BB48	LZE01360732	FCC DoC	Shielded, 1.8m	N/A

Notes:

- 1. All the equipment/cables were placed in the worst-case configuration to maximize the emission during the test.*
- 2. Grounding was established in accordance with the manufacturer's requirements and conditions for the intended use.*



7. FCC PART 15 REQUIREMENTS

7.1 26 dB EMISSION BANDWIDTH (15.403)

LIMIT


For purposes of this subpart, the emission bandwidth shall be determined by measuring the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, that are 26 dB down relative to the maximum level of the modulated carrier. Determination of the emissions bandwidth is based on the use of measurement instrumentation employing a peak detector function with an instrument resolutions bandwidth approximately equal to 1.0 percent of the emission bandwidth of the device under measurement.

MEASUREMENT EQUIPMENT USED

Name of Equipment	Manufacturer	Model	Serial Number	Calibration Due
Spectrum Analyzer	Agilent	E4446A	MY43360131	01/10/2005
Spectrum Analyzer	R&S	FSP30	100112	08/03/2005

Remark: Each piece of equipment is scheduled for calibration once a year.

Test Configuration

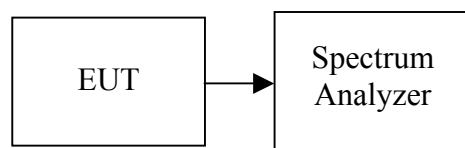

TEST PROCEDURE

1. Place the EUT on the table and set it in the transmitting mode.
2. Remove the antenna from the EUT and then connect a low-loss RF cable from the antenna port to the spectrum analyzer.
3. Set the spectrum analyzer as RBW = 1%EBW, VBW = RBW, Span = 50MHz / 100MHz (Turbo Mode), and Sweep = auto.
4. Mark the peak frequency and -26dB (upper and lower) frequency.
5. Repeat until all the rest channels were investigated.



TEST RESULTS

No non-compliance noted

Test Data


C h a n n e l	F r e q u e n c y (M H z)	B a n d w i d t h (B) (M H z)
L o w	5 1 8 0	2 3 . 1 7
M i d	5 2 6 0	2 3 . 2 5
H i g h	5 3 2 0	2 3 . 0 0



Test Plot

CH Low


* Agilent 17:23:00 Sep 8, 2004

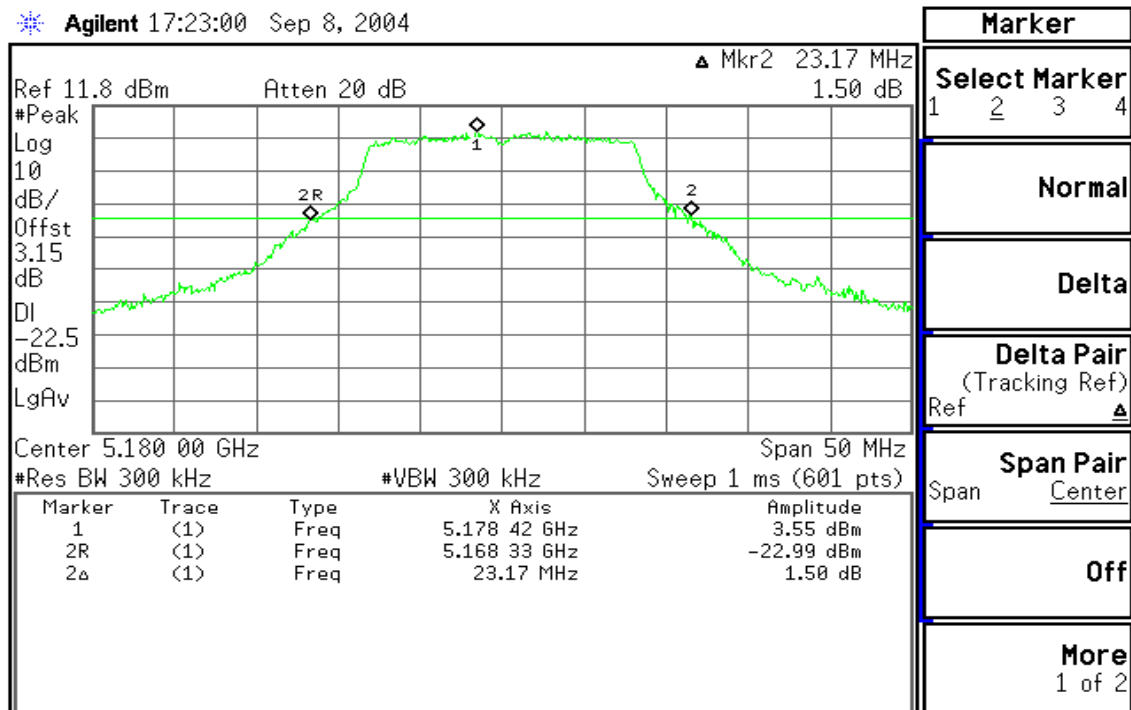

Copyright 2000-2003 Agilent Technologies

CH Mid

* Agilent 17:21:00 Sep 8, 2004

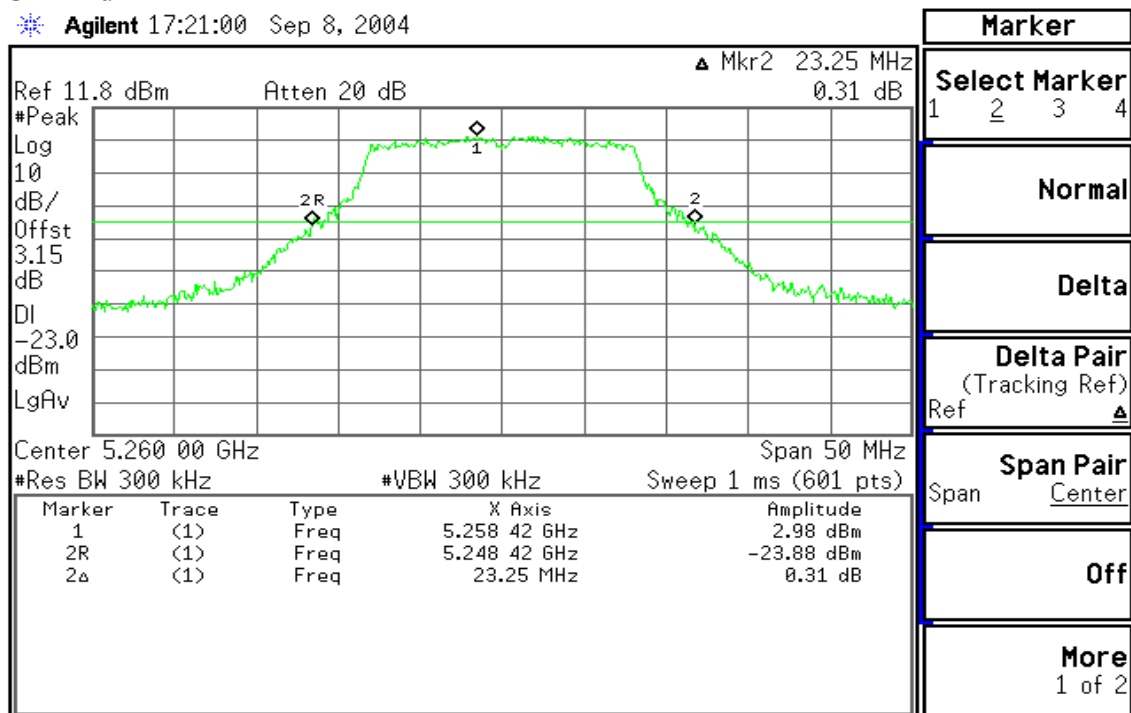


Copyright 2000-2003 Agilent Technologies



CH High

Agilent 17:19:04 Sep 8, 2004

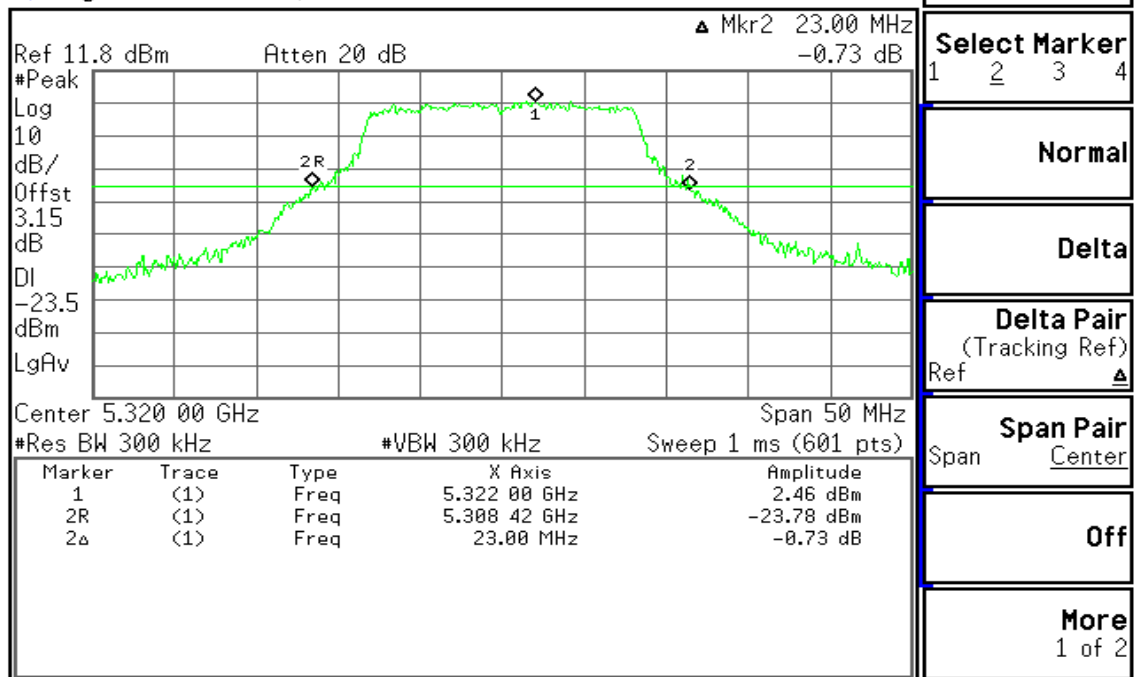

Copyright 2000-2003 Agilent Technologies



7.2 PEAK POWER (15.407)

LIMIT

- For the band 5.15-5.25 GHz, the peak transmit power over the frequency band of operation shall not exceed the lesser of 50mW (17dBm) or $4\text{dBm} + 10\log B$, where B is the 26dB emission bandwidth in MHz. In addition, the peak power spectral density shall not exceed 4dBm in any 1 MHz band.
- For the band 5.25-5.35 GHz, the peak transmit power over the frequency band of operation shall not exceed the lesser of 250mW (24dBm) or $11\text{dBm} + 10\log B$, where B is the 26dB emission bandwidth in MHz. In addition, the peak power spectral density shall not exceed 11dBm in any 1 MHz band.
- For the band 5.725-5.825 GHz, the peak transmit power over the frequency band of operation shall not exceed the lesser of 1mW (30dBm) or $17\text{dBm} + 10\log B$, where B is the 26dB emission bandwidth in MHz. In addition, the peak power spectral density shall not exceed 17dBm in any 1 MHz band.

If transmitting antennas of directional gain greater than 6dBi are used, both the peak transmit power and the peak power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi. The peak power shall not exceeded the limit as follows:

Specified Limit of the Peak Power

Channel	Frequency (MHz)	10 Log B (dB)	4 + 10 Log B or 11 + 10 Log B (dBm)	Power Limit (dBm)
Low	5180	13.65	17.65	17
Mid	5260	13.66	17.66	17
High	5320	13.62	17.62	17

(Note: Maximum antenna gain = 3.709dBi, therefore there is no reduction due to antenna gain.)


**MEASUREMENT EQUIPMENT USED**

Name of Equipment	Manufacturer	Model	Serial Number	Calibration Due
Spectrum Analyzer	Agilent	E4446A	MY43360131	01/10/2005
Spectrum Analyzer	R&S	FSP30	100112	08/03/2005

Remark: Each piece of equipment is scheduled for calibration once a year.

Test Configuration

The EUT was connected to a spectrum analyzer through a 50 Ω RF cable.

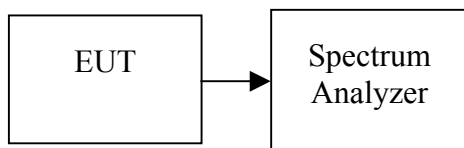**TEST PROCEDURE**

Set span to encompass the entire emission bandwidth (EBW) of the signal.

Set RBW = 1 MHz / Set VBW = 3 MHz.

Use sample detector mode if bin width (i.e., span/number of points in spectrum display) < 0.5 RBW. Otherwise use peak detector mode. Use a video trigger with the trigger level set to enable triggering only on full power pulses. Transmitter must operate at full control power for entire sweep of every sweep. If the device transmits continuously, with no off intervals or reduced power intervals, the trigger may be set to "free run". Trace average 100 traces in power averaging mode. Compute power by integrating the spectrum across the 26 dB EBW of the signal. The integration can be performed using the spectrum analyzer's band power measurement function with band limits set equal to the EBW band edges or by summing power levels in each 1 MHz band in linear power terms. The 1 MHz band power levels to be summed can be obtained by averaging, in linear power terms, power levels in each frequency bin across the 1 MHz.

TEST RESULTS


No non-compliance noted

Test Data


Channel	Frequency (MHz)	Reading (dBm)	Cable Loss (dB)	Output Power (dBm)	Limit (dBm)
Low	5180	8.45	3.15	11.60	17
Mid	5260	9.15	3.15	12.30	17
High	5320	8.89	3.15	12.04	17

**Test Plot****CH Low**

* Agilent 17:14:29 Sep 8, 2004

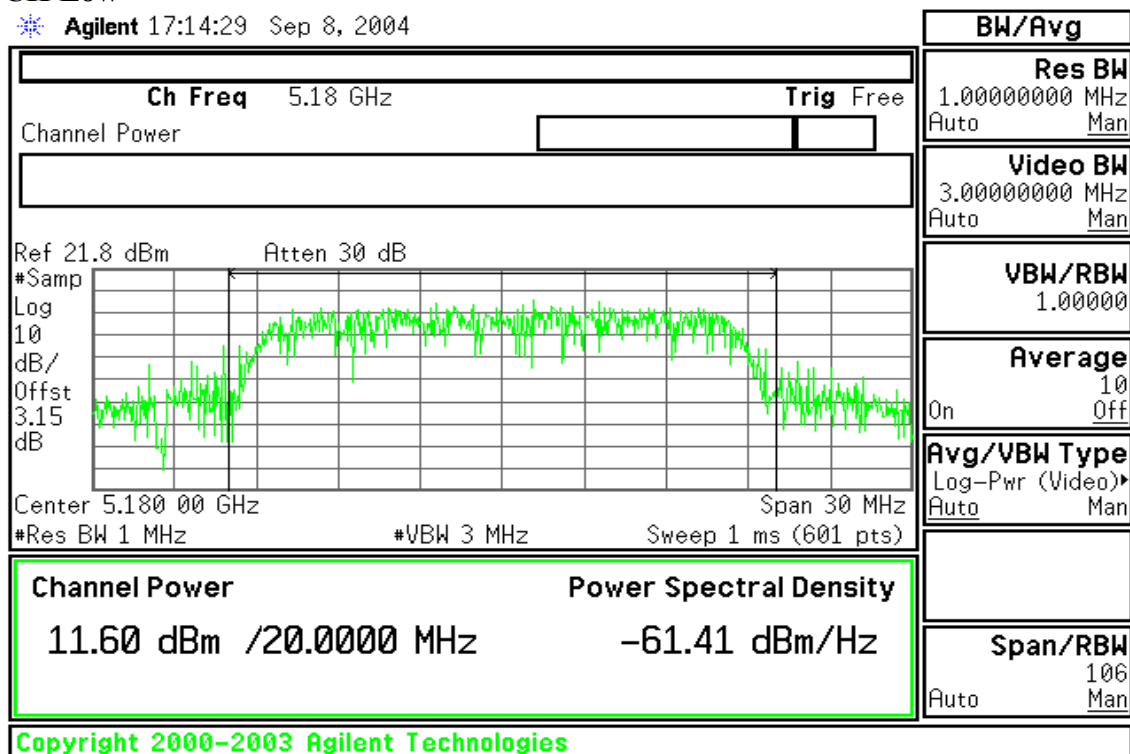**CH Mid**


* Agilent 17:15:59 Sep 8, 2004

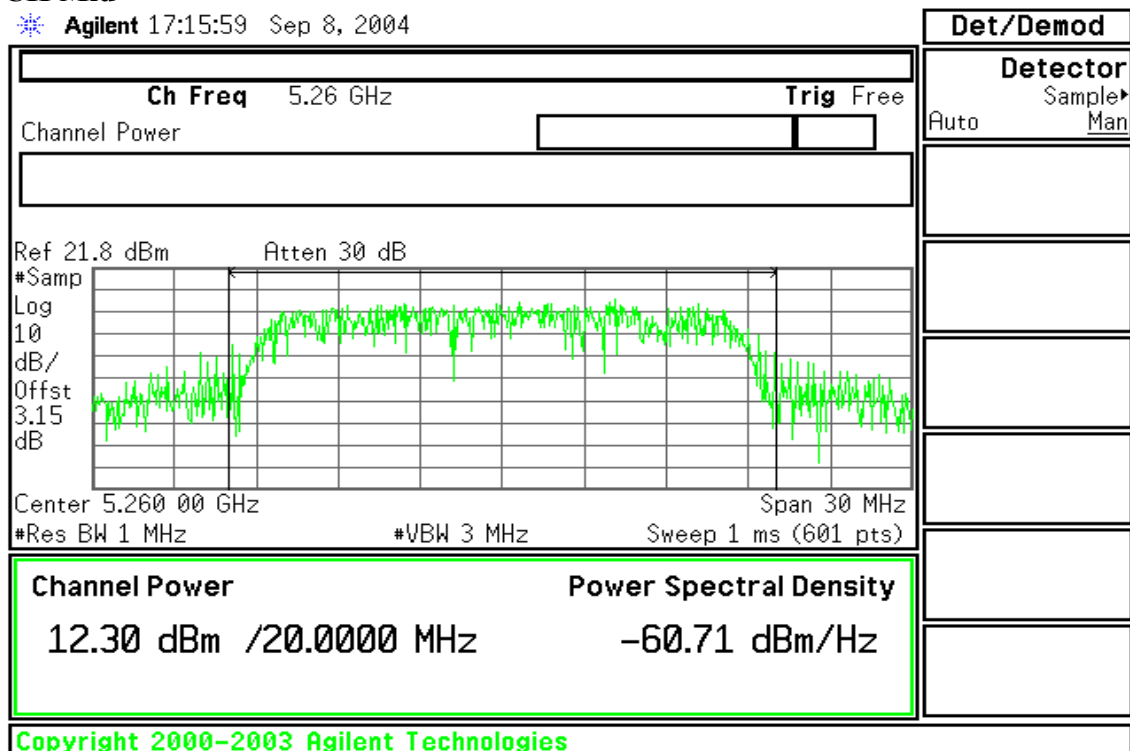



CH High

Agilent 17:17:20 Sep 8, 2004

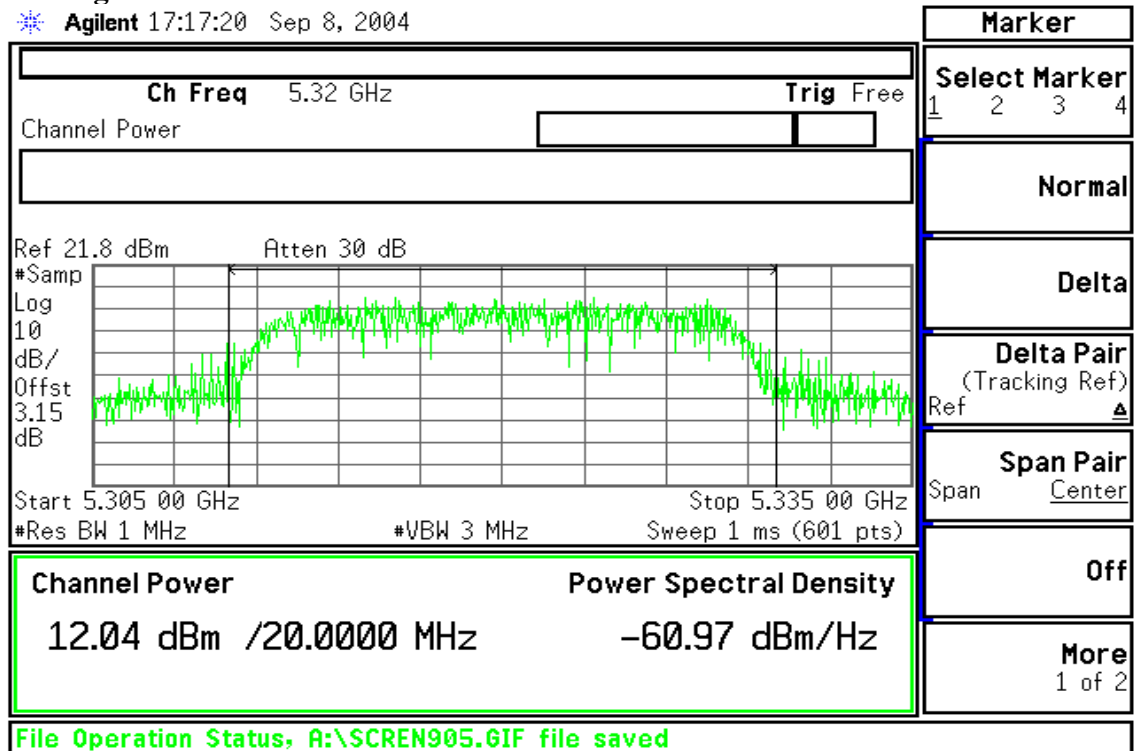

7.3 BAND EDGES MEASUREMENT

LIMIT


According to §15.407(c), in any 100 kHz bandwidth outside the frequency bands in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a).

MEASUREMENT EQUIPMENT USED

Name of Equipment	Manufacturer	Model	Serial Number	Calibration Due
Spectrum Analyzer	Agilent	E4446A	MY43360131	01/10/2005
Spectrum Analyzer	R&S	FSP30	100112	08/03/2005

Remark: Each piece of equipment is scheduled for calibration once a year.

Test Configuration

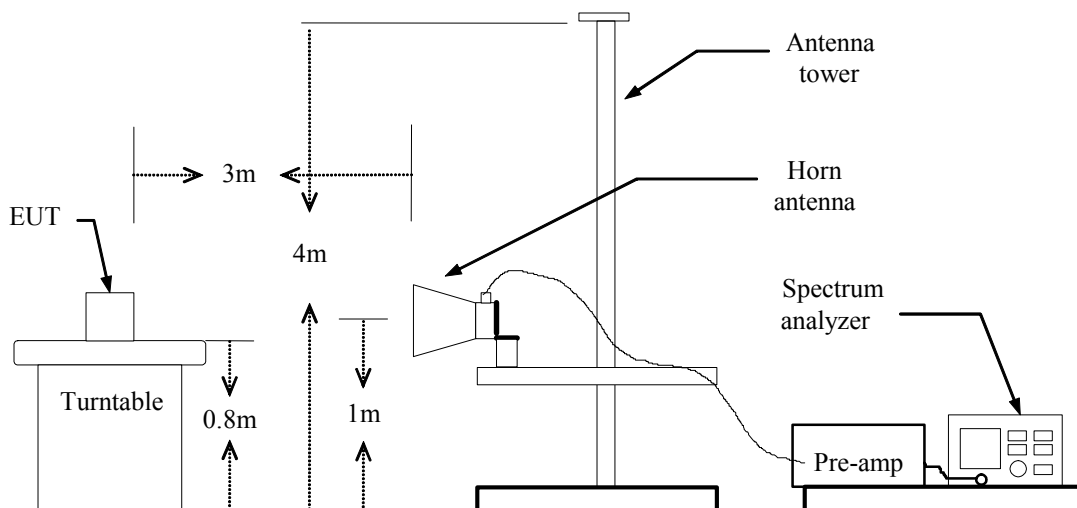

TEST PROCEDURE

1. The EUT is placed on a turntable, which is 0.8m above the ground plane.
2. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
3. EUT is set 3m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emission.
4. Set the spectrum analyzer in the following setting in order to capture the lower and upper band-edges of the emission:
 - (a) PEAK: RBW=VBW=1MHz / Sweep=AUTO
 - (b) AVERAGE: RBW=1MHz / VBW=10Hz / Sweep=AUTO
5. Repeat the procedures until all the PEAK and AVERAGE versus POLARIZATION are measured.

TEST RESULTS


Refer to attach spectrum analyzer data chart.



Band Edges (CH Low)

Detector mode: Peak


Polarity: Vertical

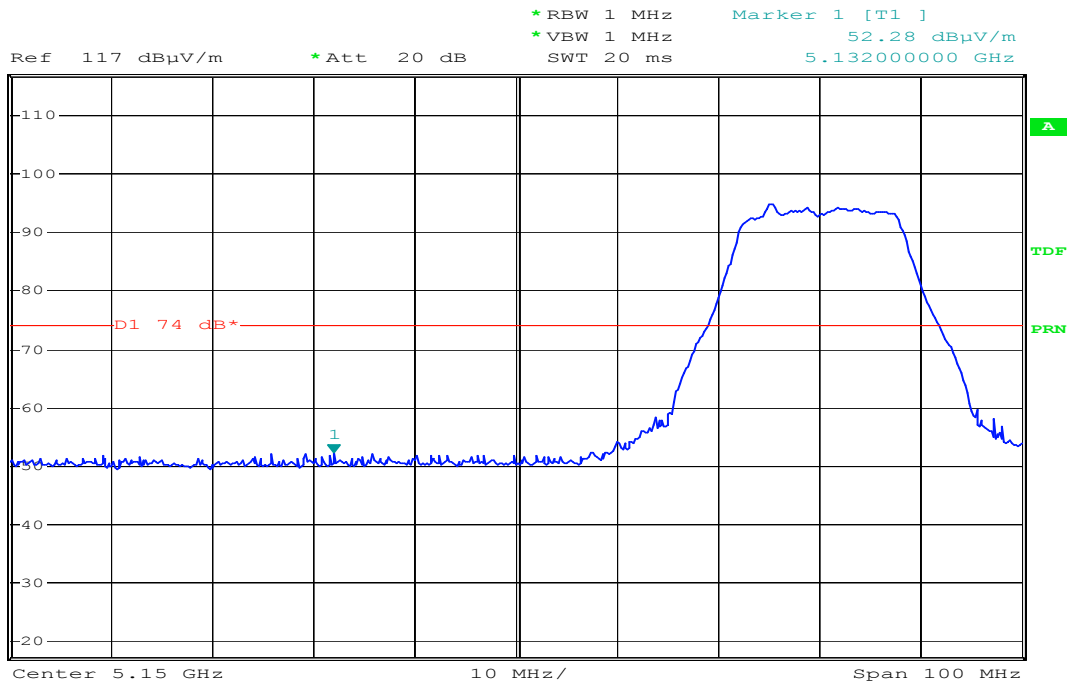

Date: 9.SEP.2004 06:19:48

Detector mode: Average

Polarity: Vertical

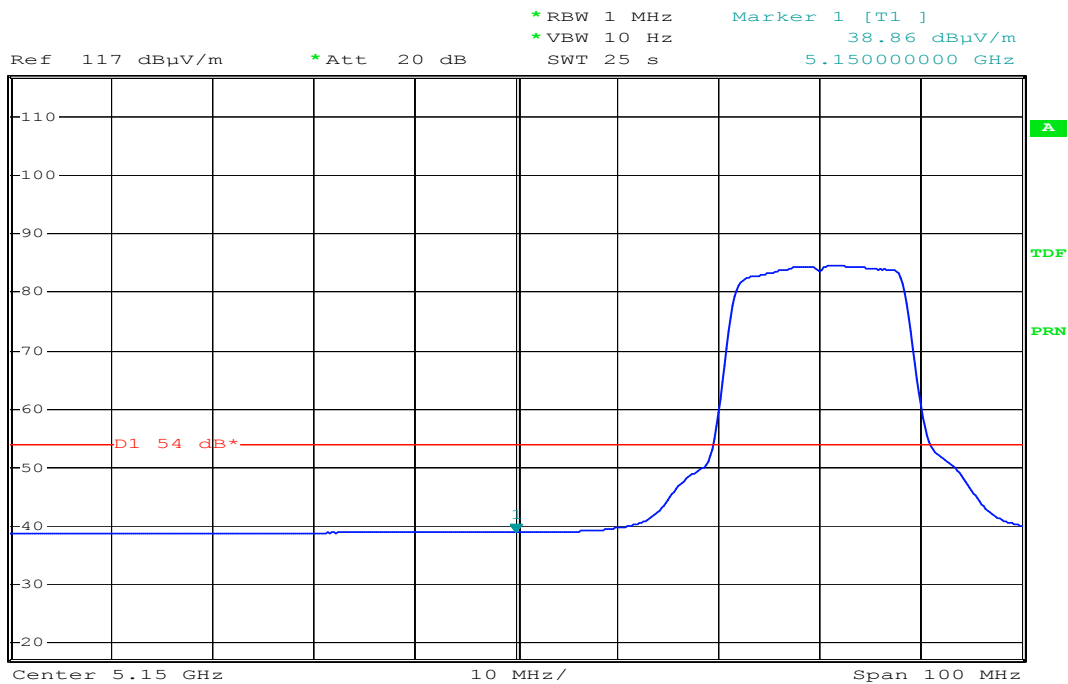


Date: 9.SEP.2004 06:21:25



Detector mode: Peak


Polarity: Horizontal

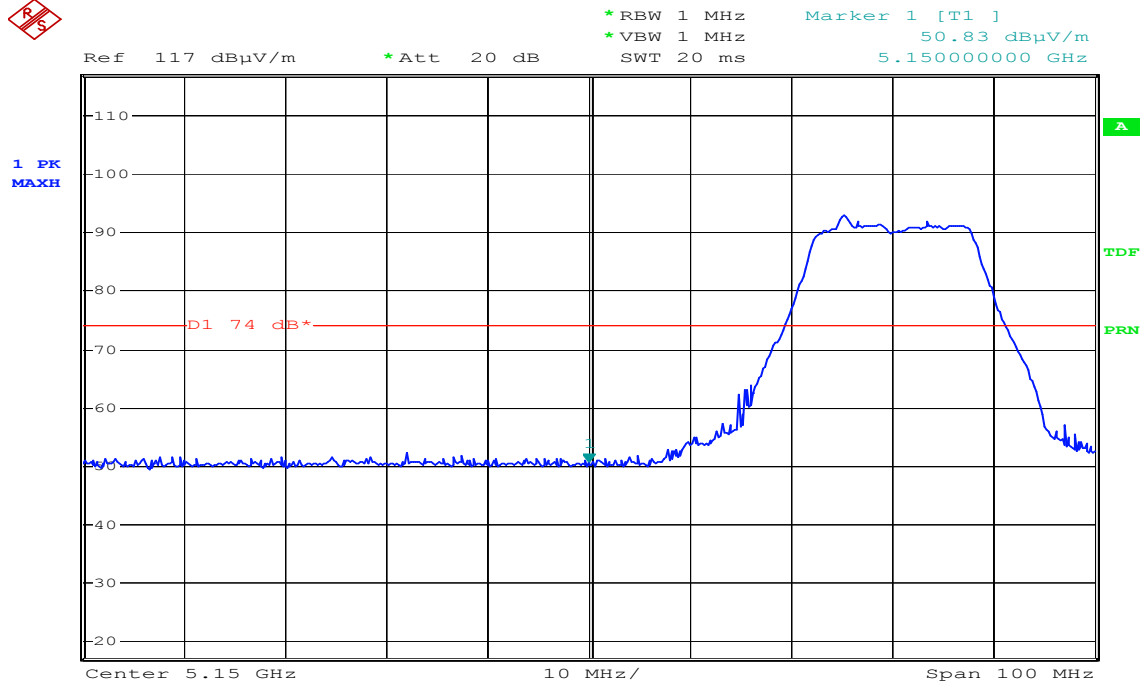

Date: 9.SEP.2004 06:06:54

Detector mode: Average

Polarity: Horizontal

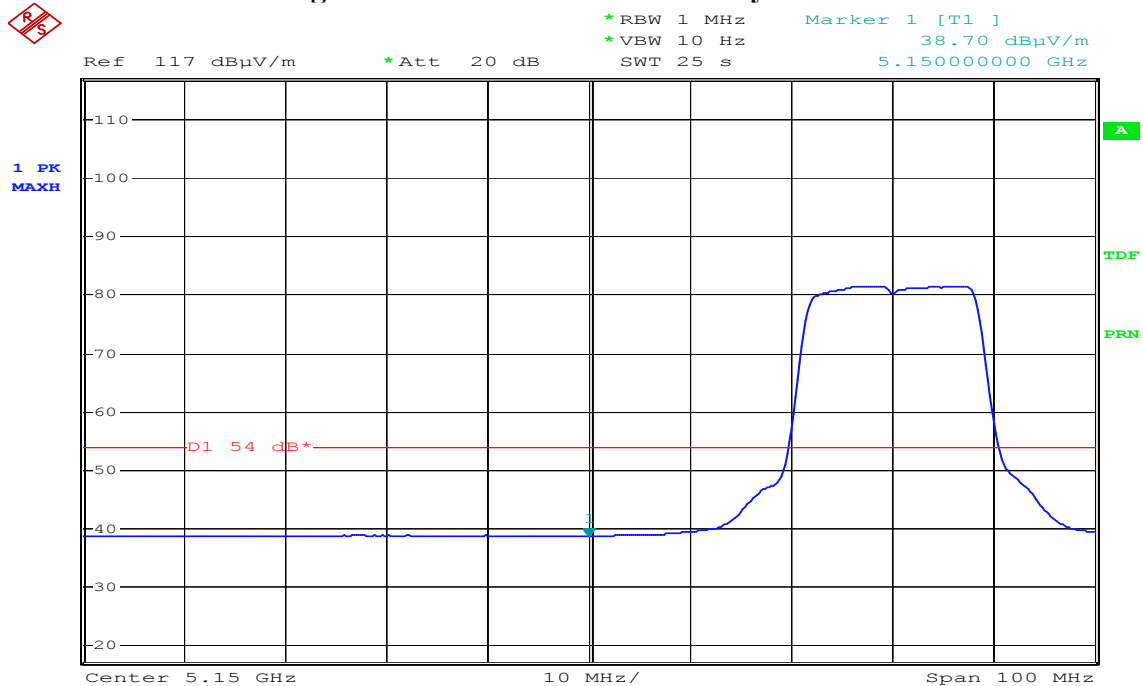


Date: 9.SEP.2004 06:05:07



Band Edges (CH High)

Detector mode: Peak


Polarity: Vertical

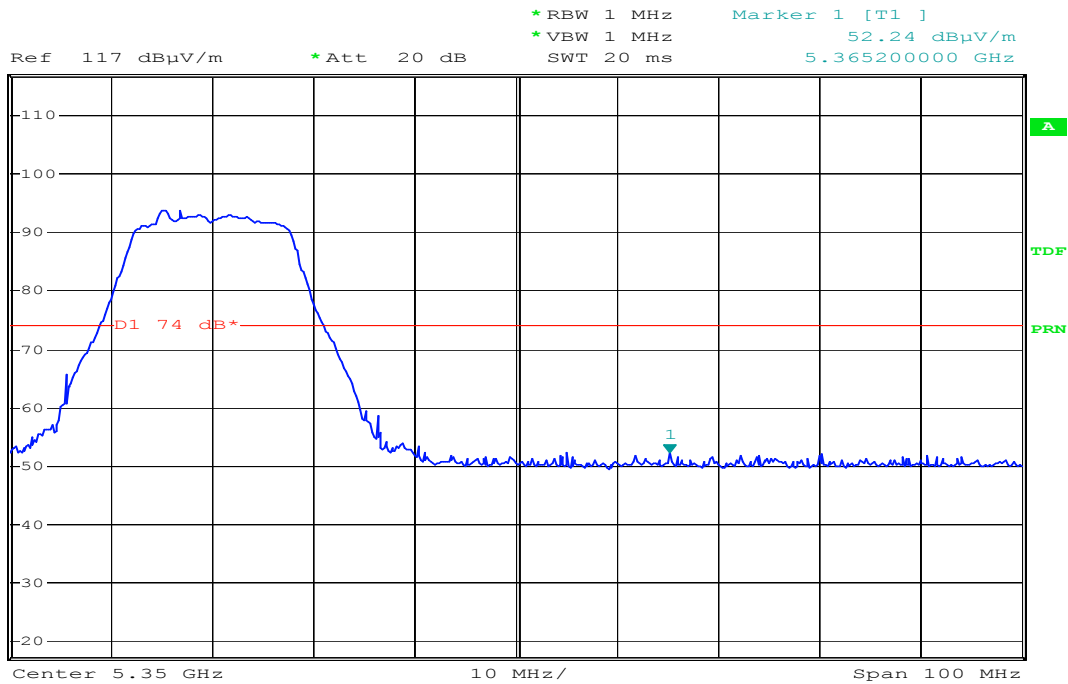

Date: 9.SEP.2004 06:17:45

Detector mode: Average

Polarity: Vertical

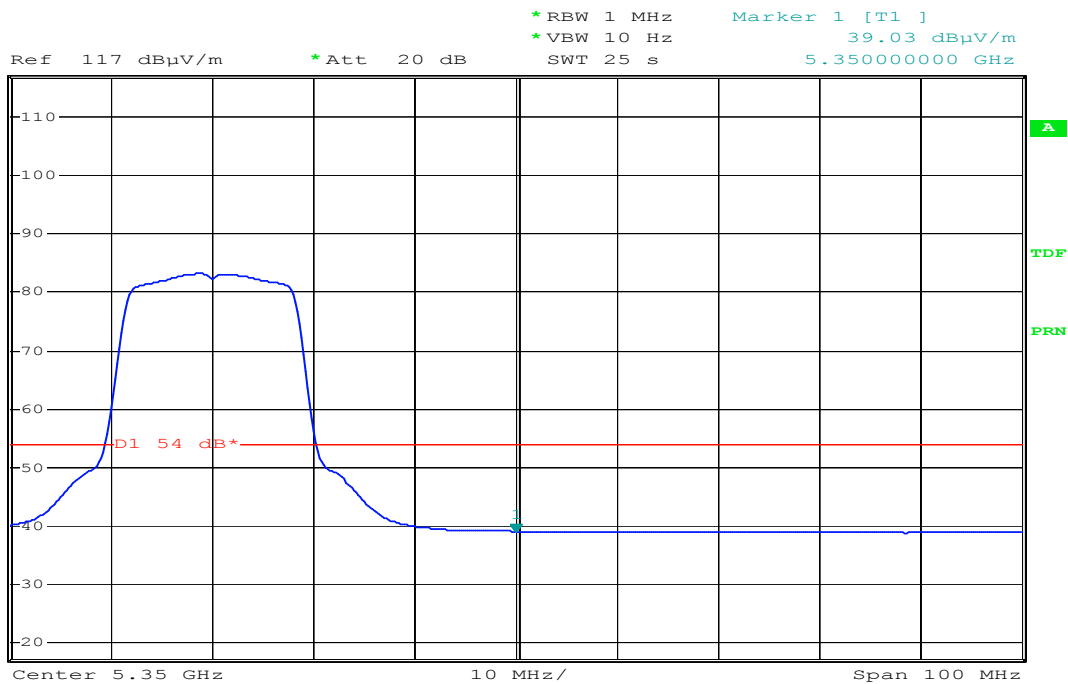


Date: 9.SEP.2004 06:17:10



Detector mode: Peak


Polarity: Horizontal

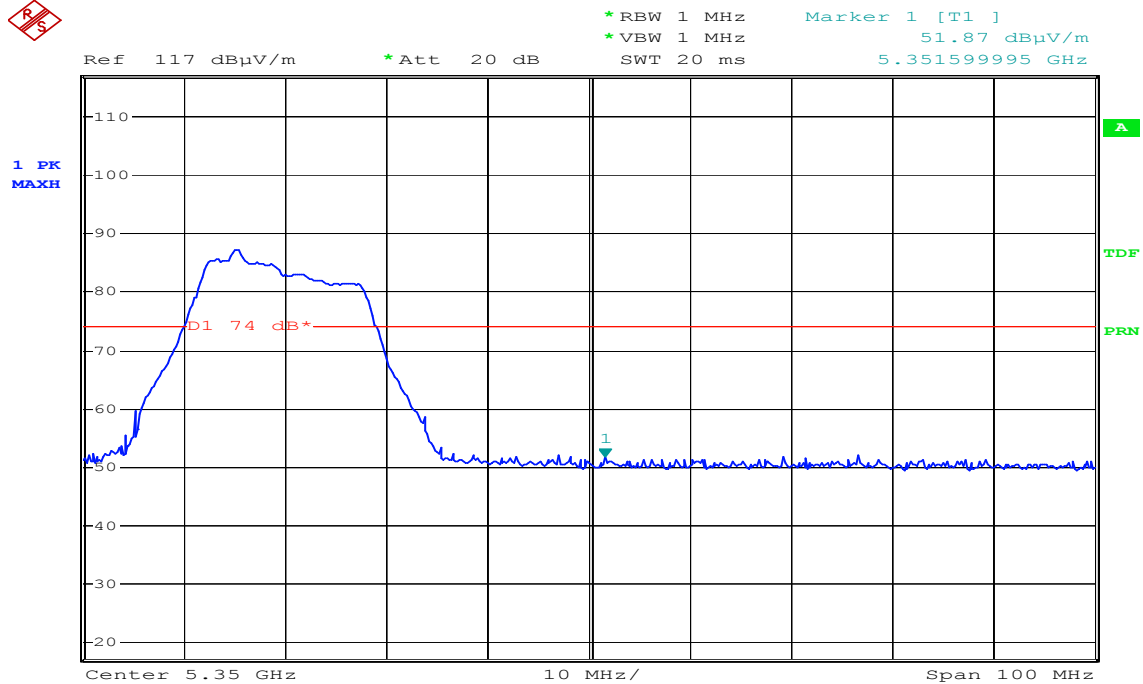

Date: 9.SEP.2004 06:09:49

Detector mode: Average

Polarity: Horizontal

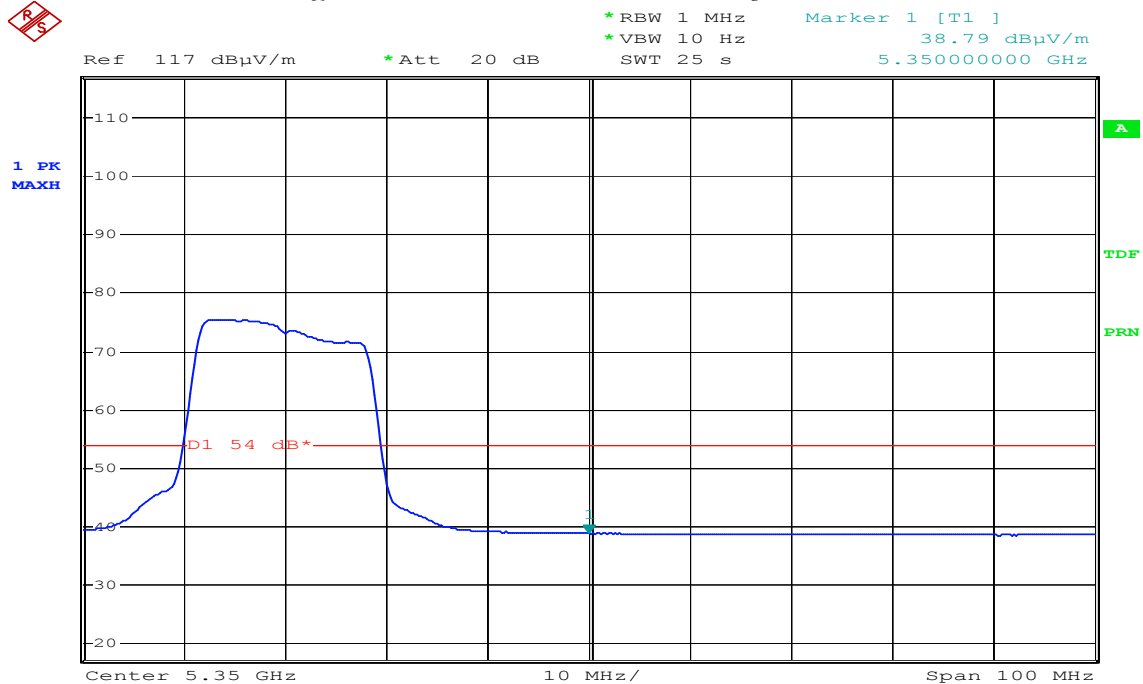

Date: 9.SEP.2004 06:11:09



7.4 PEAK POWER SPECTRAL DENSITY (15.407)

LIMIT

- The peak power spectral density shall not exceed 4dBm in any 1MHz band.
- The peak power spectral density shall not exceed 11dBm in any 1MHz band.


If transmitting antennas of directional gain greater than 6dBi are used, both the peak transmit power and the peak power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

MEASUREMENT EQUIPMENT USED

Name of Equipment	Manufacturer	Model	Serial Number	Calibration Due
Spectrum Analyzer	Agilent	E4446A	MY43360131	01/10/2005
Spectrum Analyzer	R&S	FSP30	100112	08/03/2005

Remark: Each piece of equipment is scheduled for calibration once a year.

Test Configuration

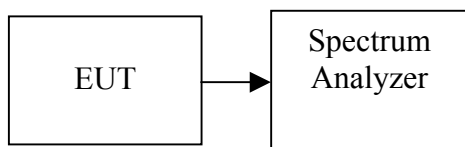

TEST PROCEDURE

1. The EUT is placed on a turntable, which is 0.8m above the ground plane.
2. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
3. EUT is set 3m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emission.
4. Set the spectrum analyzer in the following setting in order to capture the lower and upper band-edges of the emission:
 - (b) PEAK: RBW=VBW=1MHz / Sweep=AUTO
 - (c) AVERAGE: RBW=1MHz / VBW=10Hz / Sweep=AUTO
5. Repeat the procedures until all the PEAK and AVERAGE versus POLARIZATION are measured.



TEST RESULTS

No non-compliance noted

Test Data


Channel	Frequency (MHz)	PPSD (dBm)	Limit (dBm)	Margin (dB)	Result
Low	5180	3.659	4	-0.341	PASS
Mid	5260	4.252	11	-6.748	PASS
High	5320	4.039	11	-6.961	PASS



Test Plot

CH Low

Agilent 17:13:48 Sep 8, 2004

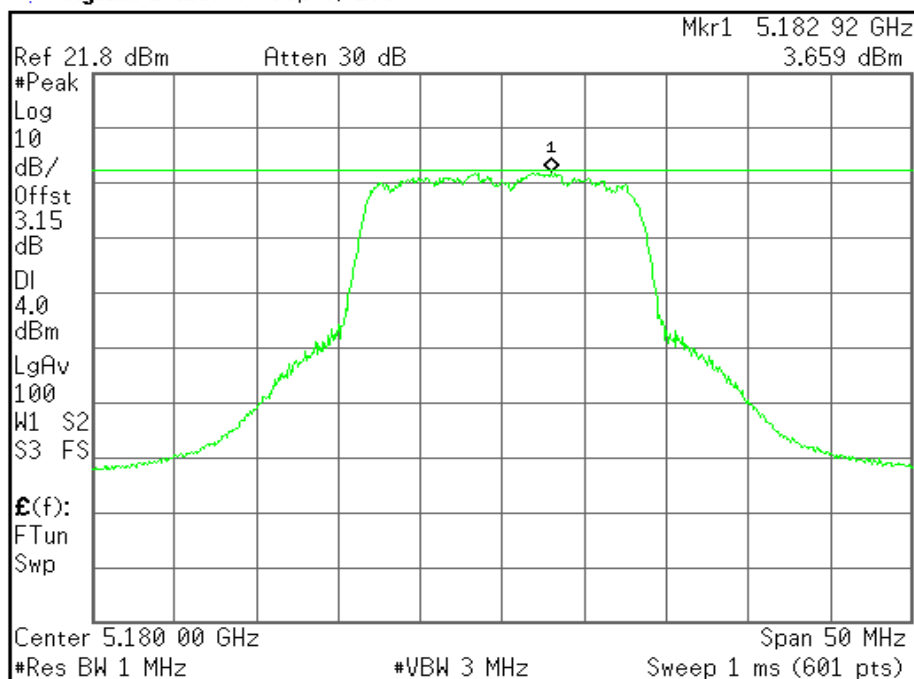

Peak Search

Next Peak

Next Pk Right

Next Pk Left

Min Search

Pk-Pk Search


Mkr → CF

More
1 of 2

Copyright 2000-2003 Agilent Technologies

CH Mid

Agilent 17:24:30 Sep 8, 2004

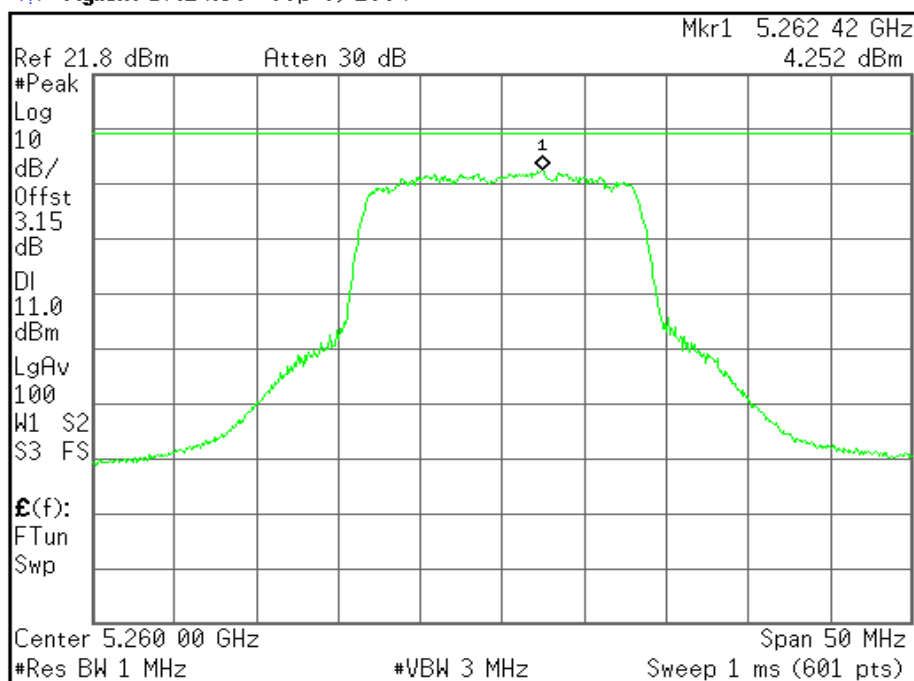

Peak Search

Next Peak

Next Pk Right

Next Pk Left

Min Search

Pk-Pk Search

Mkr → CF


More
1 of 2

Copyright 2000-2003 Agilent Technologies



CH High

Agilent 17:25:33 Sep 8, 2004

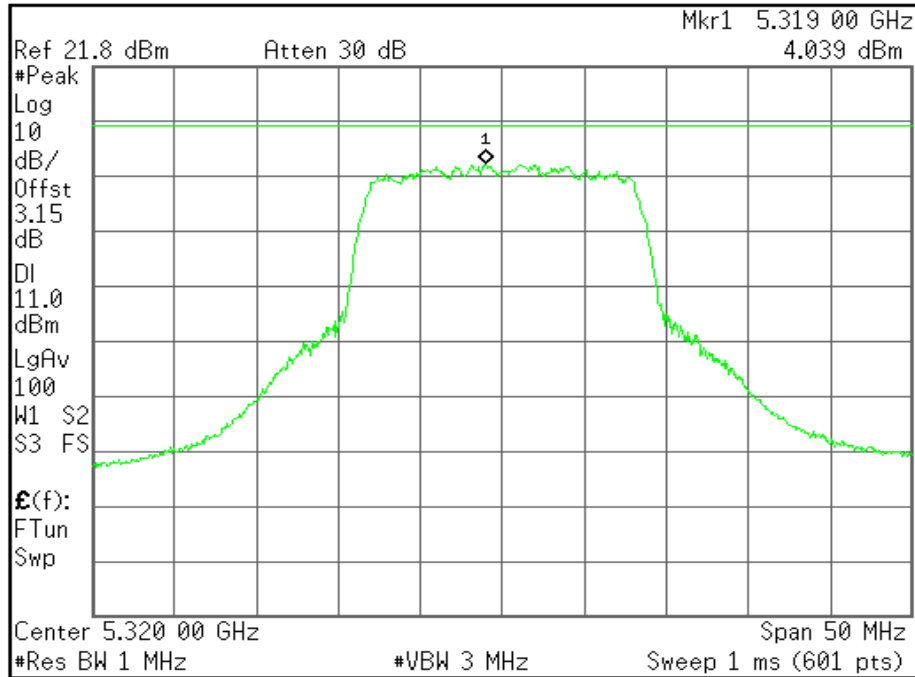

Peak Search

Next Peak

Next Pk Right

Next Pk Left

Min Search

Pk-Pk Search

Mkr → CF

More
1 of 2

Copyright 2000-2003 Agilent Technologies



7.5 POWERLINE CONDUCTED EMISSION (15.207)

LIMIT

For an intentional radiator which is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed 250 microvolts (The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz). The limits at specific frequency range is listed as follows:

Frequency Range (MHz)	Limits (dB μ V)	
	Quasi-peak	Average
0.15 to 0.50	66 to 56	56 to 46
0.50 to 5	56	46
5 to 30	60	50

Compliance with this provision shall be based on the measurement of the radio frequency voltage between each power line (*Live Line* and *Neutral Line*) and ground at the power terminals.

measurement equipment used

Name of Equipment	Manufacturer	Model	Serial Number	Calibration Due
EMI Test Receiver	R&S	ESCS30	847793/012	12/20/2004
LISN	R&S	ESH2-Z5	843285/010	12/15/2004
LISN	EMCO	3825/2	9003-1628	07/25/2005

Remark: Each piece of equipment is scheduled for calibration once a year.

Test Configuration

See test photographs attached in Appendix 1 for the actual connections between EUT and support equipment.

TEST PROCEDURE

1. The EUT was placed on a table, which is 0.8m above ground plane.
2. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
3. Repeat above procedures until all frequency measured were complete.

**TEST RESULTS**

The initial step in collecting conducted data is a spectrum analyzer peak scan of the measurement range. Significant peaks are then marked as shown on the following data page, and these signals are then quasi-peaked.

Operation Mode: TX + RX mode**Test Date:** September 10, 2004**Temperature:** 25°C**Tested by:** Roy Cheng**Humidity:** 68% RH

Freq. (MHz)	Q.P. Raw (dBuV)	AVG Raw (dBuV)	Q.P. Limit (dBuV)	AVG Limit (dBuV)	Q.P. Margin (dB)	AVG Margin (dB)	Note
0.160	40.20	---	65.46	---	-25.26	---	L1
1.190	29.20	---	56.00	---	-26.80	---	L1
3.410	29.10	---	56.00	---	-26.90	---	L1
3.970	26.90	---	56.00	---	-29.10	---	L1
6.670	25.60	---	60.00	---	-34.40	---	L1
7.460	28.50	---	60.00	---	-31.50	---	L1
0.160	39.50	---	65.46	---	-25.96	---	L2
0.955	25.40	---	56.00	---	-30.60	---	L2
3.820	25.90	---	56.00	---	-30.10	---	L2
3.900	26.30	---	56.00	---	-29.70	---	L2
6.050	27.20	---	60.00	---	-32.80	---	L2
7.880	28.00	---	60.00	---	-32.00	---	L2


Note:

- 1. Measuring frequencies from 0.15 MHz to 30MHz.*
- 2. The emissions measured in frequency range from 0.15 MHz to 30MHz were made with an instrument using Quasi-Peak detector and Average detector.*
- 3. “---” denotes the emission level was or more than 2dB below the Average limit*
- 4. The IF bandwidth of SPA between 0.15MHz to 30MHz was 10KHz; the IF bandwidth of Test Receiver between 0.15MHz to 30MHz was 9KHz;*
- 5. L1 = Line One (Live Line) / L2 = Line Two (Neutral Line)*




Test Plots

Conducted emissions (Line 1)

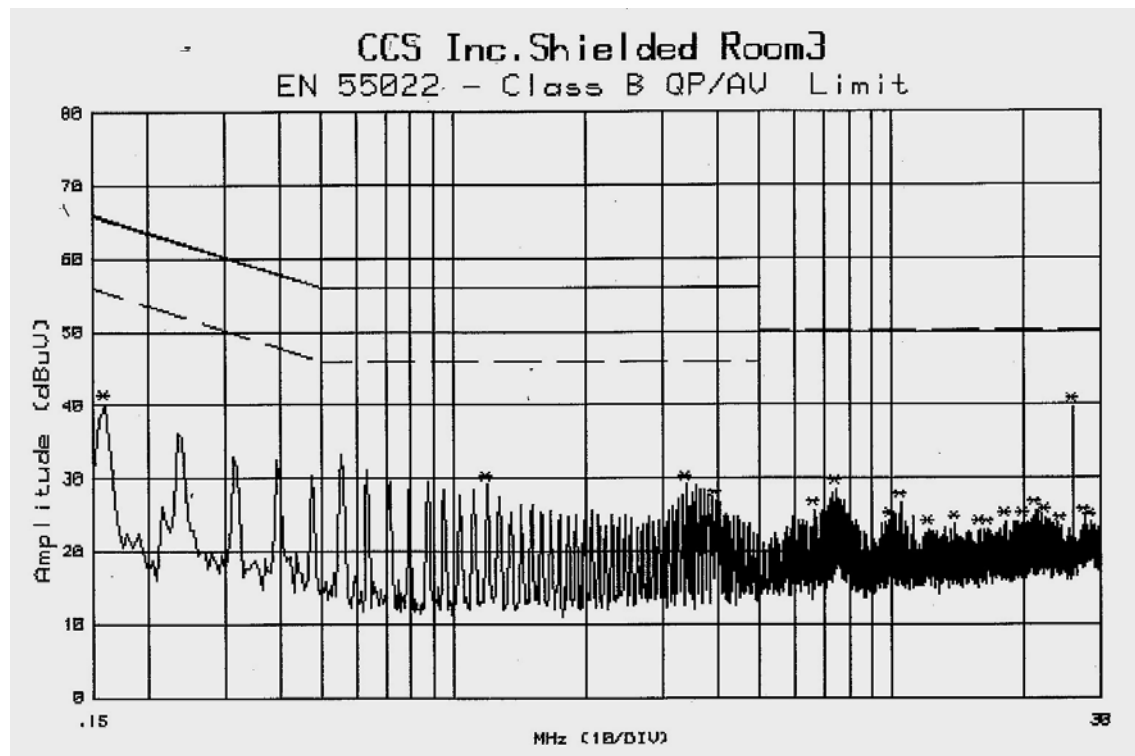

Conducted emissions (Line 2)

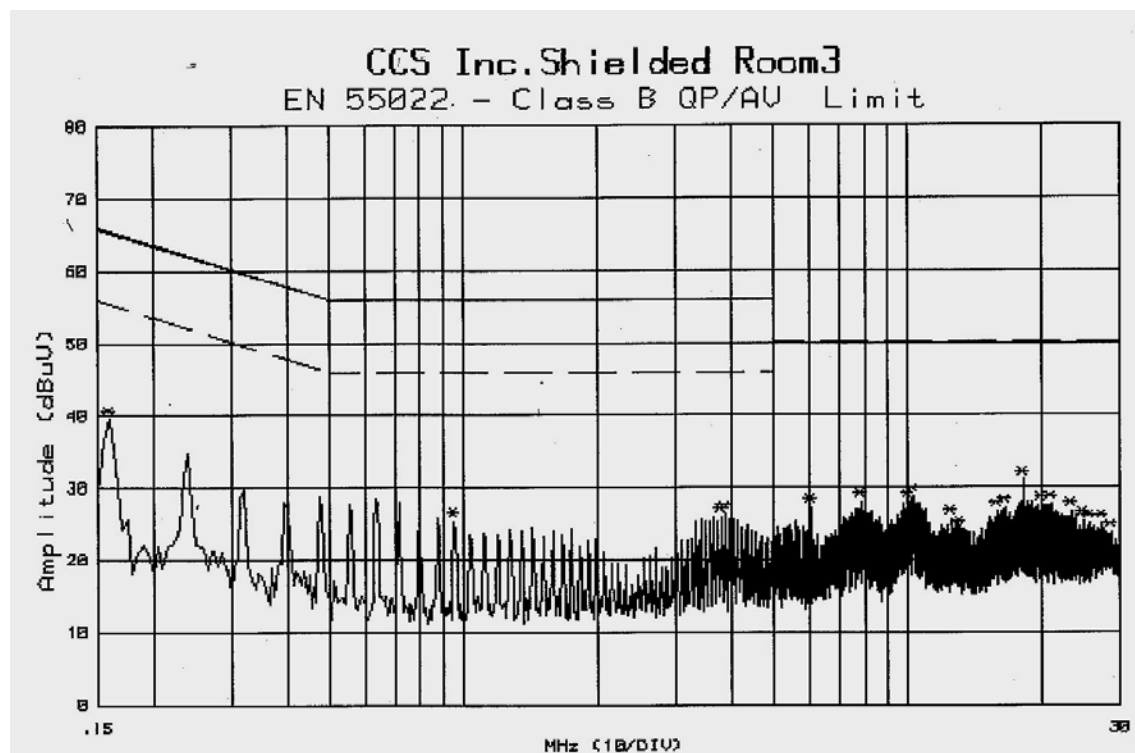



7.6 PEAK EXCURSION (15.407)

LIMIT


The ratio of the peak excursion of the modulation envelope (measured using a peak hold function) to the peak transmit power (measured as specified above) shall not exceed 13 dB across any 1 MHz bandwidth or the emission bandwidth whichever is less.

MEASUREMENT EQUIPMENT USED

Name of Equipment	Manufacturer	Model	Serial Number	Calibration Due
Spectrum Analyzer	Agilent	E4446A	MY43360131	01/10/2005
Spectrum Analyzer	R&S	FSP30	100112	08/03/2005

Remark: Each piece of equipment is scheduled for calibration once a year.

Test Configuration

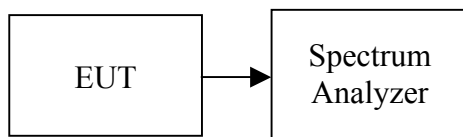

TEST PROCEDURE

The test is performed in accordance with <FCC Public Notice: APPENDIX A Guidelines for Assessing Unlicensed National Information Infrastructure (U-NII) Devices> – Part 15, Subpart E, August 2002.

1. Place the EUT on the table and set it in transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to spectrum.
3. Trace A, Set RBW = 1MHz, VBW = 3MHz, Span = 20MHz, Max. hold.
4. Trace B, Set RBW = 1MHz, VBW = 30kHz, Span = 20MHz, Max. hold.
5. Delta Mark trace A Maximum frequency and trace B same frequency.
6. Repeat the above procedure until measurements for all frequencies were complete.


**TEST RESULTS***No non-compliance noted***Test Data**

Channel	Frequency (MHz)	Peak Excursion (dB)	Limit (dB)	Margin (dB)	Result
Low	5180	10.12	13	-2.88	PASS
Mid	5260	8.81	13	-4.19	PASS
High	5320	9.66	13	-3.34	PASS


(Note: Maximum antenna gain = 3.709dBi, therefore there is no reduction due to antenna gain.)

**Test Plot****CH Low**

Agilent 17:35:29 Sep 8, 2004

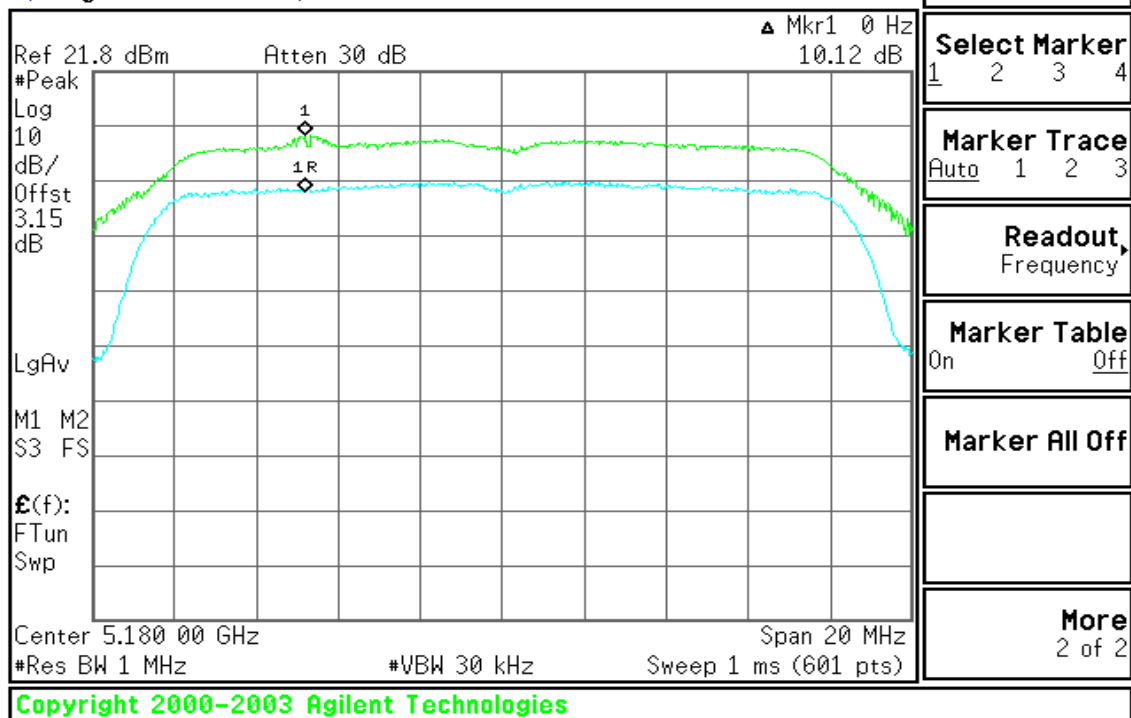**CH Mid**


Agilent 17:37:05 Sep 8, 2004

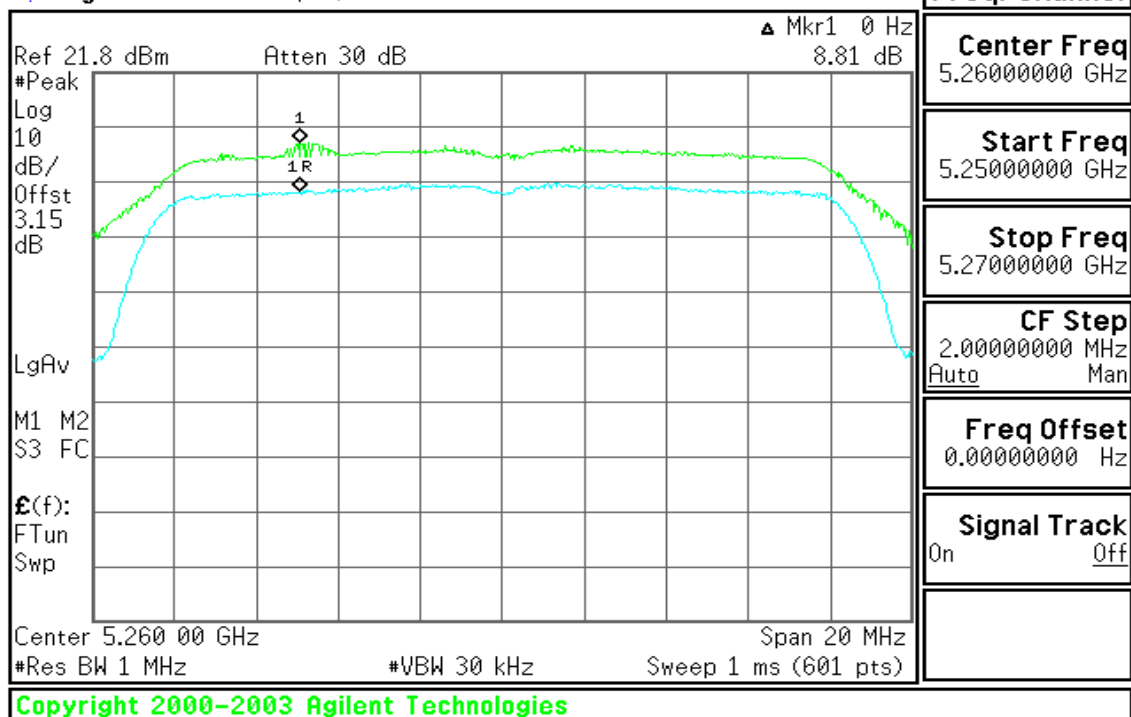



CH High

Agilent 17:38:07 Sep 8, 2004

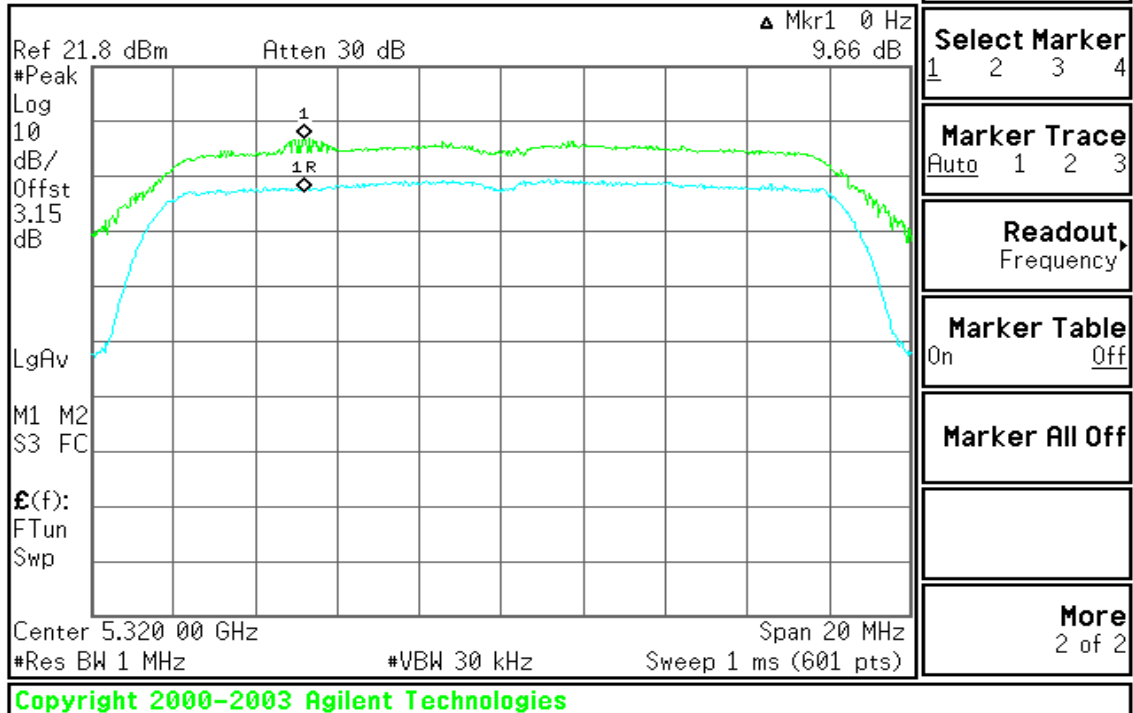



7.7 RADIO FREQUENCY EXPOSURE (15.407)

LIMIT

U-NII devices are subject to the radio frequency radiation exposure requirements specified in §1.1307(b), §2.1091 and §2.1093 of this chapter, as appropriate. All equipment shall be considered to operate in a "general population/uncontrolled" environment. Applications for equipment authorization of devices operating under this section must contain a statement confirming compliance with these requirements for both fundamental emissions and unwanted emissions. Technical information showing the basis for this statement must be submitted to the Commission upon request.

EUT Specification

EUT	TABLET PC
Frequency band (Operating)	<input checked="" type="checkbox"/> WLAN: 5.18GHz ~ 5.32GHz / 5.50GHz ~ 5.70GHz <input type="checkbox"/> Others _____
Device category	<input checked="" type="checkbox"/> Portable (<20cm separation) <input type="checkbox"/> Mobile (>20cm separation) <input type="checkbox"/> Others _____
Exposure classification	General Population/Uncontrolled exposure ($S=1mW/cm^2$)
Antenna diversity	<input type="checkbox"/> Single antenna <input checked="" type="checkbox"/> Multiple antennas <input type="checkbox"/> Tx diversity <input type="checkbox"/> Rx diversity <input checked="" type="checkbox"/> Tx/Rx diversity
Max. output power	12.30dBm (16.98mW)
Antenna gain (Max)	3.709dBi (Numeric gain:2.35)
Evaluation applied	<input type="checkbox"/> MPE Evaluation <input checked="" type="checkbox"/> SAR Evaluation*
Note: 1. *The maximum output power is 12.30dBm (16.98mW) at 5260MHz, which is greater than general population low threshold $60/F$ ($60/5.260=11.41mW$), SAR is required. 2. For mobile or fixed location transmitters, the minimum separation distance is 20 cm, even if calculations indicate that the MPE distance would be less.	

TEST RESULTS

No non-compliance noted

Note: Please refer to the separate SAR report.



7.8 RADIATED UNDESIRABLE EMISSION (15.407)

LIMIT

For transmitters operating in the 5.15-5.35 GHz band: all emissions outside of the 5.15-5.35 GHz band shall not exceed an EIRP of -27dBm / MHz. Unwanted emissions below 1 GHz must comply with the general field strength limits set forth in §15.209. Further, any U-NII devices using an AC power line are required to comply also with the conducted limits set forth in §15.207.

The provisions of §15.205 apply to intentional radiators operating under this section. The EUT is set to transmit in a continuous mode.


MEASUREMENT EQUIPMENT USED

Open Area Test Site # 3				
Name of Equipment	Manufacturer	Model	Serial Number	Calibration Due
Spectrum Analyzer	ADVANTEST	R3261A	N/A	03/18/2005
EMI Test Receiver	R&S	ESVS20	838804/004	01/04/2005
Pre-Amplifier	HP	8447D	2944A09173	03/03/2005
Bilog Antenna	SCHWAZBECK	VULB9163	145	07/05/2005
Turn Table	EMCO	2081-1.21	9709-1885	N.C.R
Antenna Tower	EMCO	2075-2	9707-2060	N.C.R
Controller	EMCO	2090	9709-1256	N.C.R
RF Switch	ANRITSU	MP59B	M53867	N.C.R
Site NSA	C&C	N/A	N/A	09/06/2005
Horn antenna	Schwarzbeck	BBHA 9120	D210	02/23/2005
Loop Antenna	EMCO	6502	2356	07/10/2005
Pre-Amplifier	HP	8449B	3008B00965	10/02/2004

Remark: Each piece of equipment is scheduled for calibration once a year.

Test Configuration

Below 1 GHz

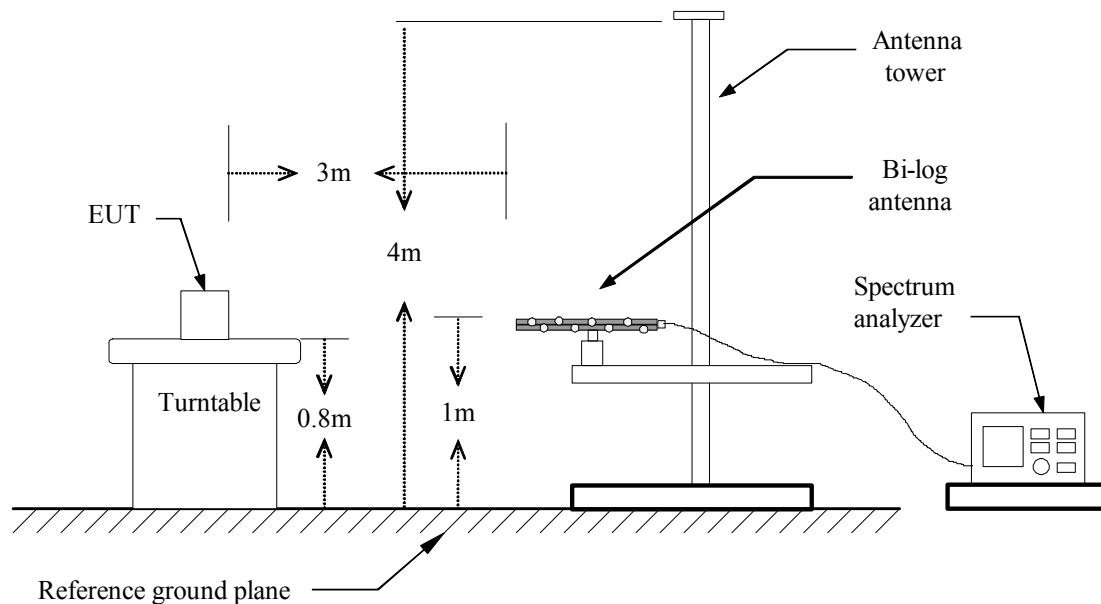

TEST PROCEDURE

1. The EUT is placed on a turntable, which is 0.8m above ground plane.
2. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
3. EUT is set 3m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emissions.
4. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
5. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
6. Repeat above procedures until the measurements for all frequencies are complete.

Note: The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 100kHz for Peak detection (PK) and Quasi-peak detection (QP) at frequency below 1GHz.



TEST RESULTS

Below 1 GHz

Operation Mode: TX 802.11a / CH 5180**Test Date:** September 10, 2004**Temperature:** 28°C**Tested by:** Roy Cheng**Humidity:** 60% RH**Polarity:** Ver. / Hor.

Freq. (MHz)	Ant.Pol. H/V	Detector Mode (PK/QP)	Reading (dBuV)	Factor (dB)	Actual FS (dBuV/m)	Limit 3m (dBuV/m)	Safe Margin (dB)
65.10	V	Peak	13.76	11.76	25.52	40.00	-14.48
85.80	V	Peak	10.60	11.01	21.61	40.00	-18.39
98.85	V	Peak	11.31	13.90	25.21	43.50	-18.29
103.35	V	Peak	10.90	13.70	24.60	43.50	-18.90
325.67	V	Peak	10.28	17.37	27.65	46.00	-18.35
912.50	V	Peak	3.57	28.33	31.90	46.00	-14.10
99.75	H	Peak	15.36	14.08	29.44	43.50	-14.06
104.70	H	Peak	16.71	13.53	30.24	43.50	-13.26
109.20	H	Peak	16.03	12.95	28.98	43.50	-14.52
365.33	H	Peak	4.75	18.85	23.60	46.00	-22.40
456.33	H	Peak	7.60	20.47	28.07	46.00	-17.93
912.50	H	Peak	0.57	28.33	28.90	46.00	-17.10

Notes:

- 1. Measuring frequencies from 30 MHz to the 1GHz.*
- 2. Radiated emissions measured in frequency range from 30 MHz to 1000MHz were made with an instrument using Peak detector mode.*
- 3. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.*
- 4. The IF bandwidth of SPA between 30MHz to 1GHz was 100kHz.*

**Operation Mode:** TX 802.11a / CH 5260**Test Date:** September 10, 2004**Temperature:** 28°C**Tested by:** Roy Cheng**Humidity:** 60% RH**Polarity:** Ver. / Hor.

Freq. (MHz)	Ant.Pol. H/V	Detector Mode (PK/QP)	Reading (dBuV)	Factor (dB)	Actual FS (dBuV/m)	Limit 3m (dBuV/m)	Safe Margin (dB)
65.10	V	Peak	11.59	11.76	23.35	40.00	-16.65
85.80	V	Peak	10.44	11.01	21.45	40.00	-18.55
97.05	V	Peak	11.88	13.53	25.41	43.50	-18.09
99.75	V	Peak	11.86	14.08	25.94	43.50	-17.56
829.67	V	Peak	1.27	26.82	28.09	46.00	-17.91
912.50	V	Peak	2.91	28.33	31.24	46.00	-14.76
99.30	H	Peak	16.09	13.99	30.08	43.50	-13.42
103.80	H	Peak	17.23	13.64	30.87	43.50	-12.63
107.85	H	Peak	16.44	13.13	29.57	43.50	-13.93
112.35	H	Peak	15.82	12.55	28.37	43.50	-15.13
456.33	H	Peak	6.93	20.47	27.40	46.00	-18.60
912.50	H	Peak	0.74	28.33	29.07	46.00	-16.93

Notes:

1. Measuring frequencies from 30 MHz to the 1GHz.
2. Radiated emissions measured in frequency range from 30 MHz to 1000MHz were made with an instrument using Peak detector mode.
3. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
4. The IF bandwidth of SPA between 30MHz to 1GHz was 100kHz.

**Operation Mode:** TX 802.11a / CH 5320**Test Date:** September 10, 2004**Temperature:** 28°C**Tested by:** Roy Cheng**Humidity:** 60% RH**Polarity:** Ver. / Hor.

Freq. (MHz)	Ant.Pol. H/V	Detector Mode (PK/QP)	Reading (dBUV)	Factor (dB)	Actual FS (dBUV/m)	Limit 3m (dBUV/m)	Safe Margin (dB)
99.75	V	Peak	11.69	14.08	25.77	43.50	-17.73
109.20	V	Peak	10.29	12.95	23.24	43.50	-20.26
325.67	V	Peak	10.11	17.37	27.48	46.00	-18.52
391.00	V	Peak	5.85	20.24	26.09	46.00	-19.91
665.17	V	Peak	1.18	25.15	26.33	46.00	-19.67
911.33	V	Peak	3.07	28.31	31.38	46.00	-14.62
98.85	H	Peak	14.65	13.90	28.55	43.50	-14.95
104.70	H	Peak	16.71	13.53	30.24	43.50	-13.26
109.20	H	Peak	17.03	12.95	29.98	43.50	-13.52
564.83	H	Peak	7.93	20.47	28.40	46.00	-17.60
832.00	H	Peak	1.27	26.87	28.14	46.00	-17.86
911.33	H	Peak	1.24	28.31	29.55	46.00	-16.45

Notes:

1. Measuring frequencies from 30 MHz to the 1GHz.
2. Radiated emissions measured in frequency range from 30 MHz to 1000MHz were made with an instrument using Peak detector mode.
3. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
4. The IF bandwidth of SPA between 30MHz to 1GHz was 100kHz.



7.9 CONDUCTED UNDESIRABLE EMISSION (15.407)

LIMIT

Transmitters operating in the 5.15-5.35 GHz band: all emissions outside of the 5.15-5.35 GHz band shall not exceed an EIRP of -27dBm / MHz. Unwanted emissions below 1 GHz must comply with the general field strength limits set forth in §15.209. Further, any U-NII devices using an AC power line are required to comply also with the conducted limits set forth in §15.207.


The provisions of §15.205 apply to intentional radiators operating under this section.

MEASUREMENT EQUIPMENT USED

Name of Equipment	Manufacturer	Model	Serial Number	Calibration Due
Spectrum Analyzer	Agilent	E4446A	MY43360131	01/10/2005
Spectrum Analyzer	R&S	FSP30	100112	08/03/2005

Remark: Each piece of equipment is scheduled for calibration once a year.

Test Configuration

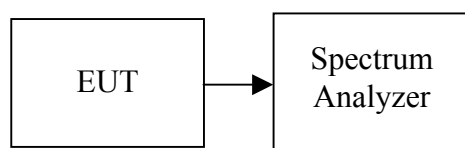

TEST PROCEDURE

Conducted RF measurements of the transmitter output were made to confirm that the EUT antenna port conducted emissions meet the specified limit and to identify any spurious signals that require further investigation or measurements on the radiated emissions site.

The transmitter output is connected to the spectrum analyzer. The resolution bandwidth is set to 1 MHz. The video bandwidth is set to 1 MHz. Peak detection measurements are compared to the average EIRP limit, adjusted for the maximum antenna gain. If necessary, additional average detection measurements are made.

Measurements are made over the 30 MHz to 40 GHz range with the transmitter set to the lowest, middle, and highest channels.


TEST RESULTS

No non-compliance noted


(Note: Maximum antenna gain = 3.709 dBi, therefore there is no reduction due to antenna gain.)

**Test Plot****CH Low****30MHz ~ 8GHz**

* Agilent 17:32:16 Sep 8, 2004

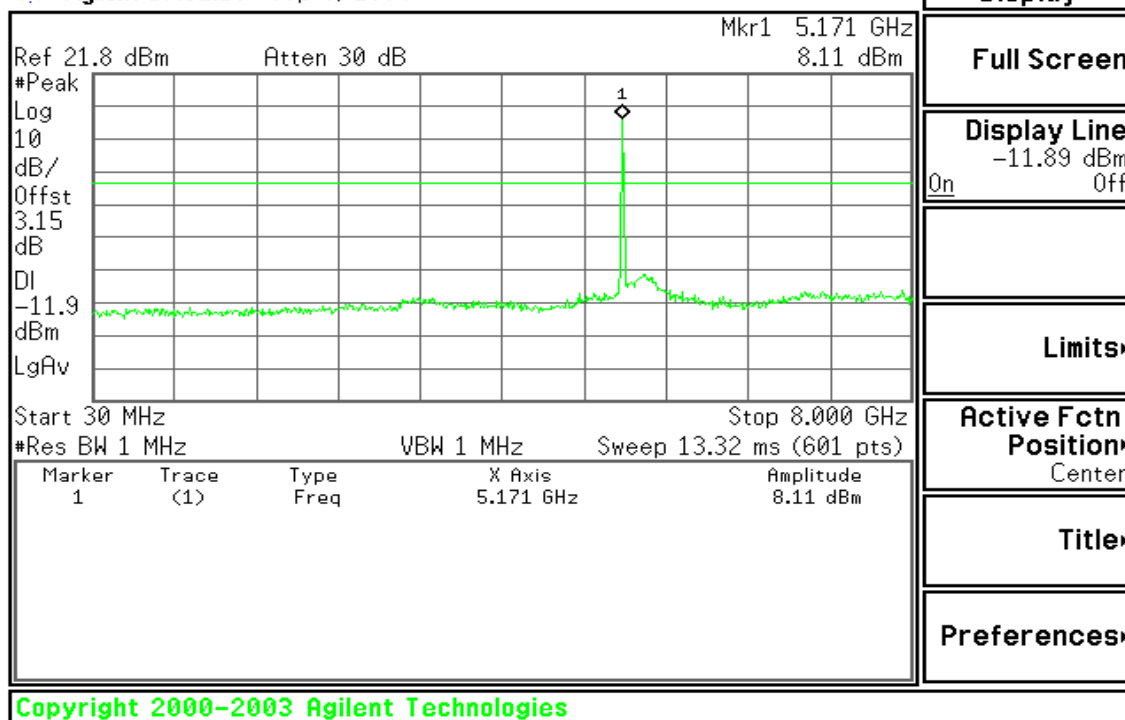**8GHz ~ 26GHz**


* Agilent 17:32:55 Sep 8, 2004

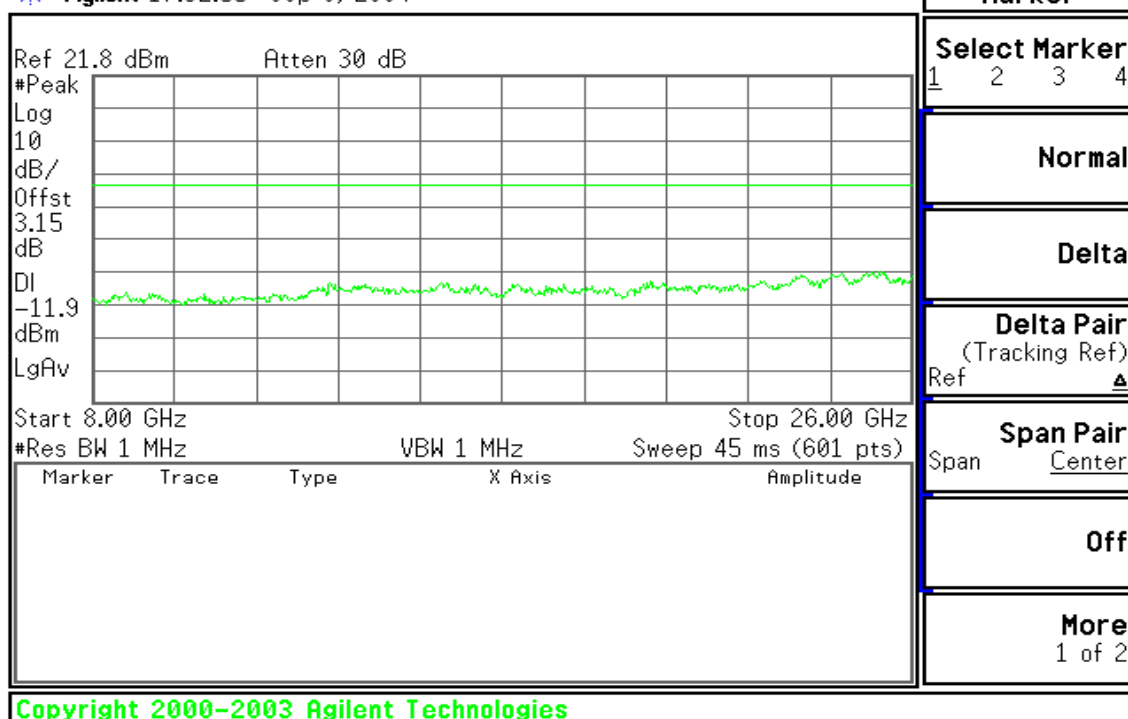



26GHz ~ 40GHz


Agilent 17:33:25 Sep 8, 2004

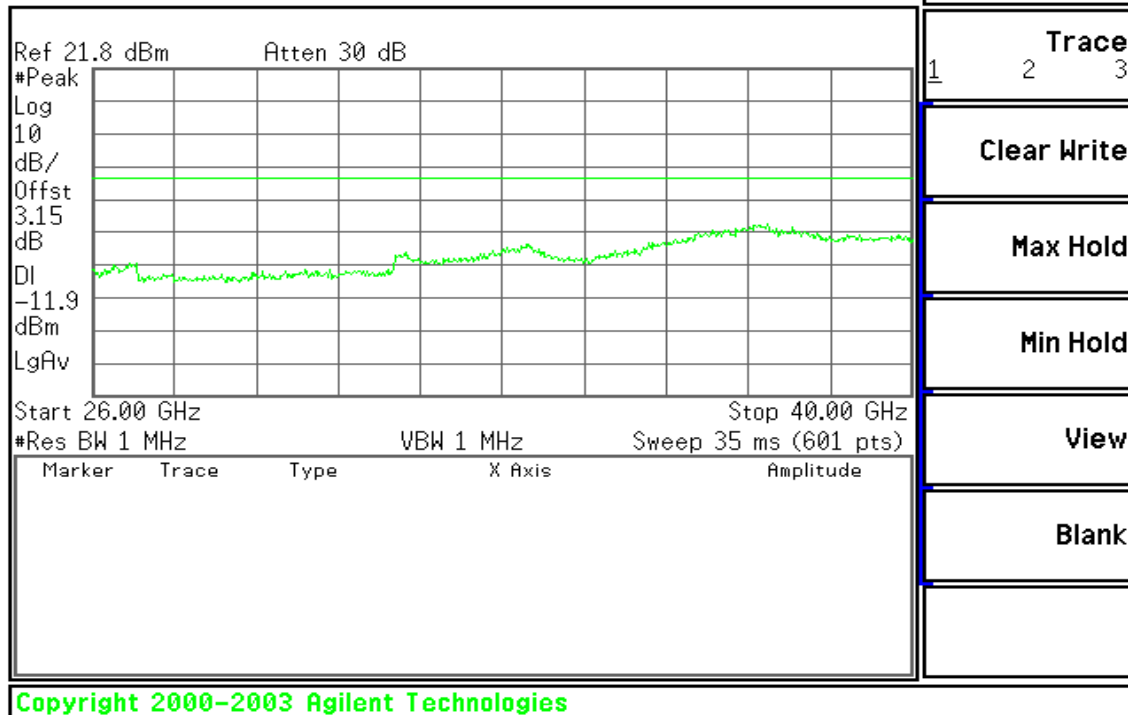

CH Mid


30MHz ~ 8GHz

Agilent 17:29:36 Sep 8, 2004

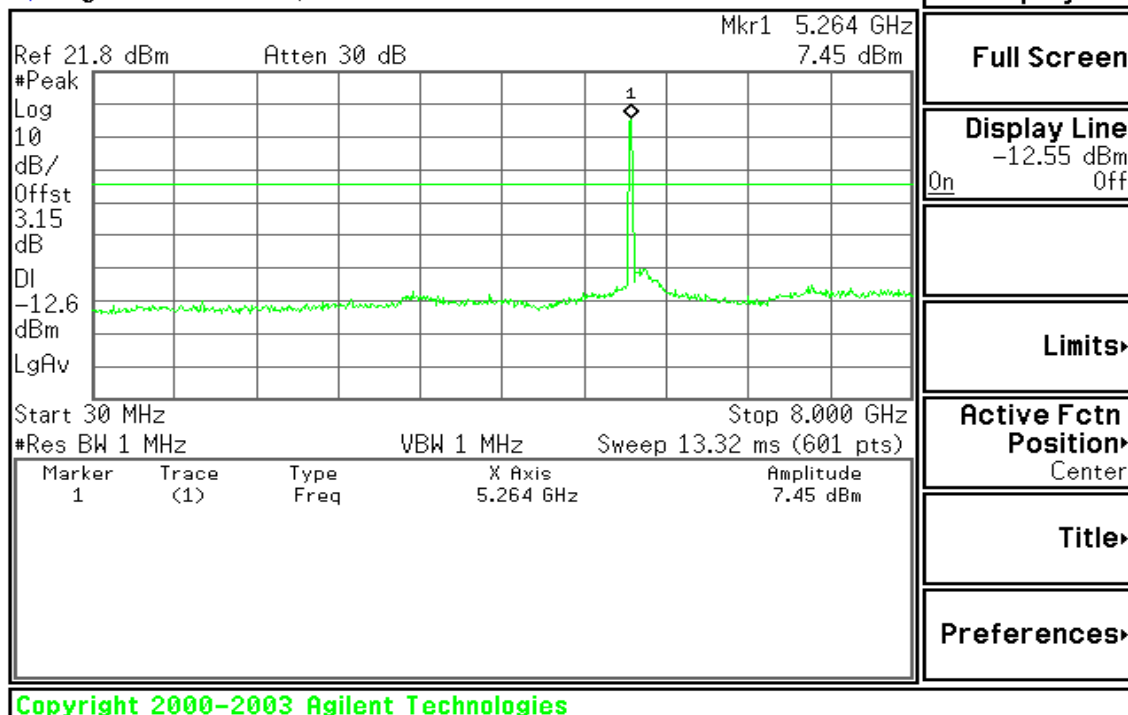


8GHz ~ 26GHz

Agilent 17:30:13 Sep 8, 2004

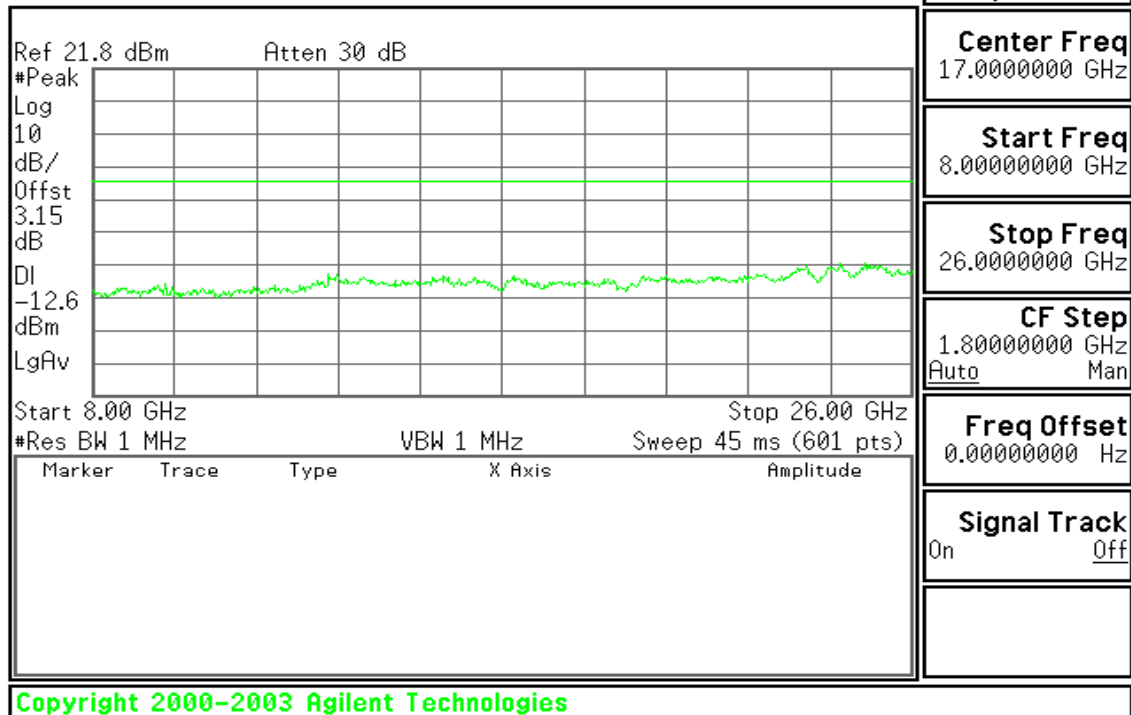

26GHz ~ 40GHz

Agilent 17:31:02 Sep 8, 2004

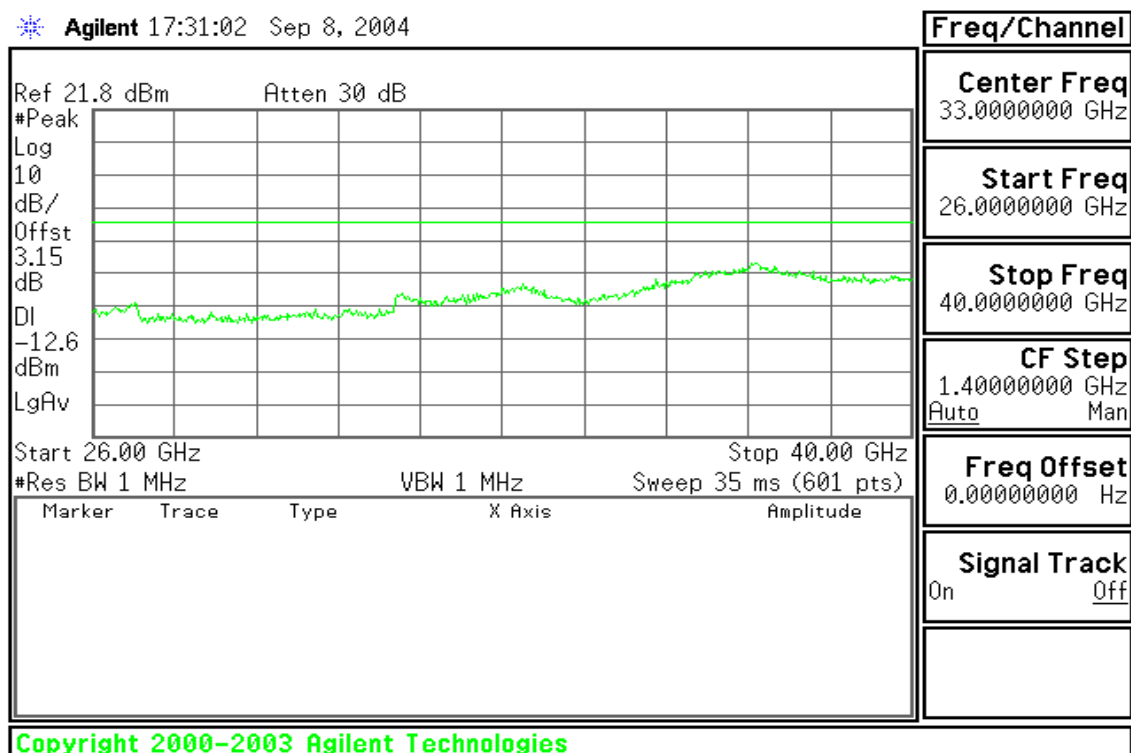




CH High


30MHz ~ 8GHz

* Agilent 17:26:55 Sep 8, 2004

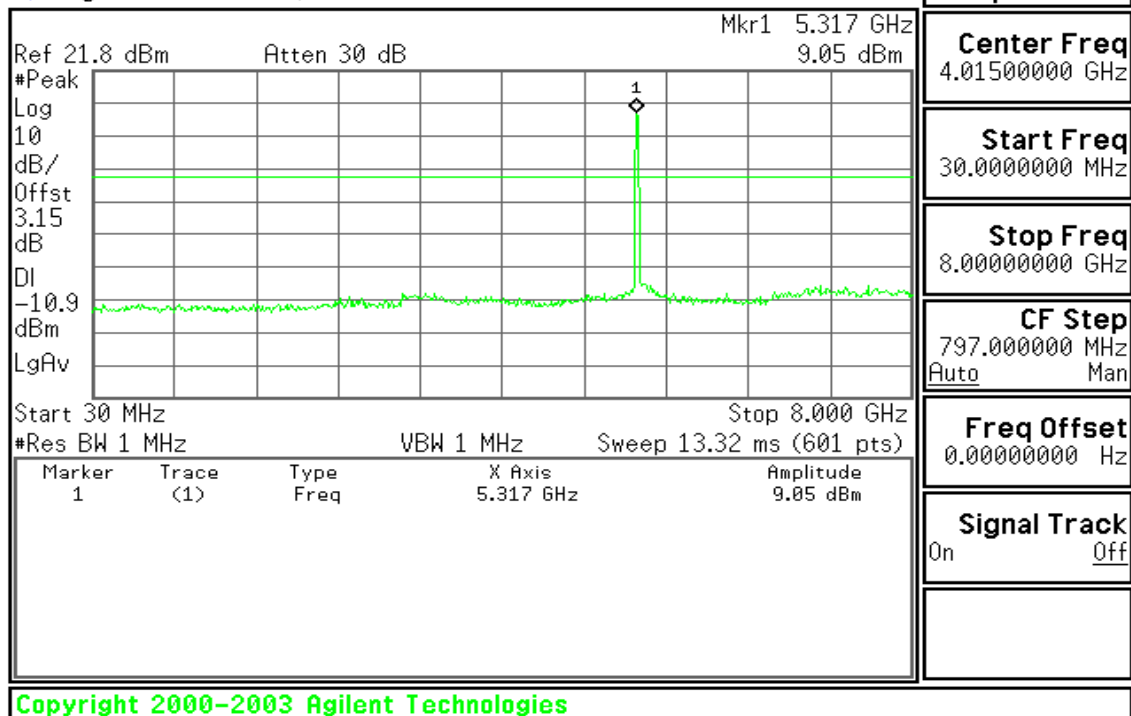


8GHz ~ 26GHz

* Agilent 17:27:30 Sep 8, 2004

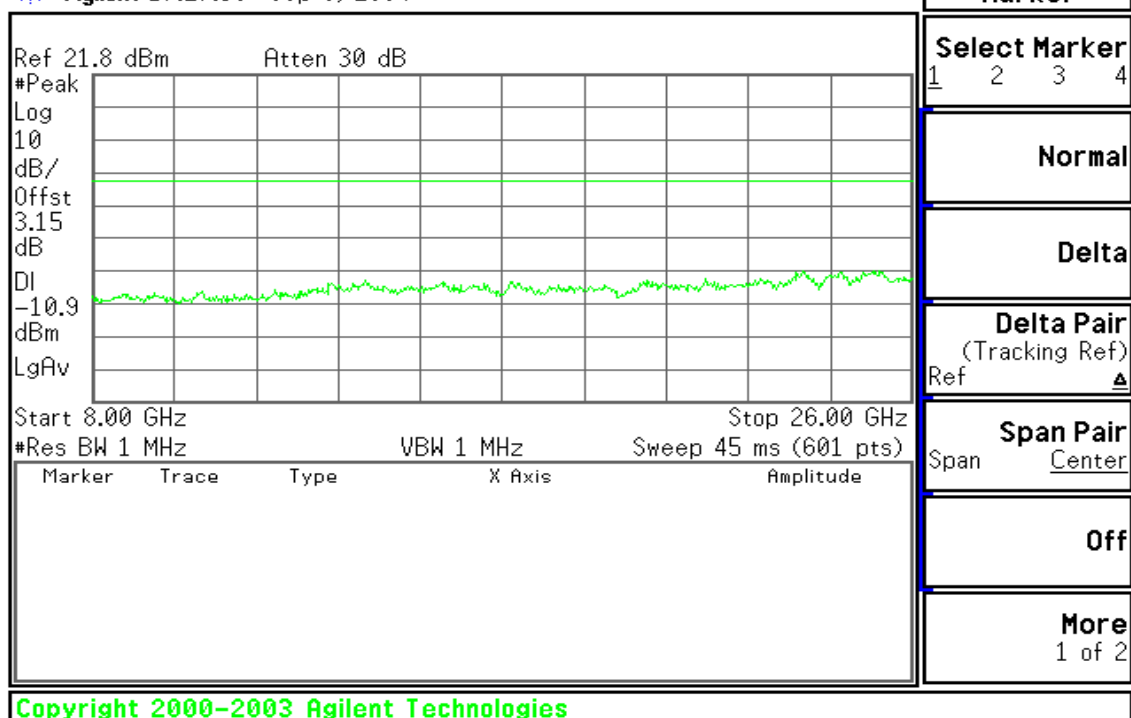

26GHz ~ 40GHz

Agilent 17:28:25 Sep 8, 2004

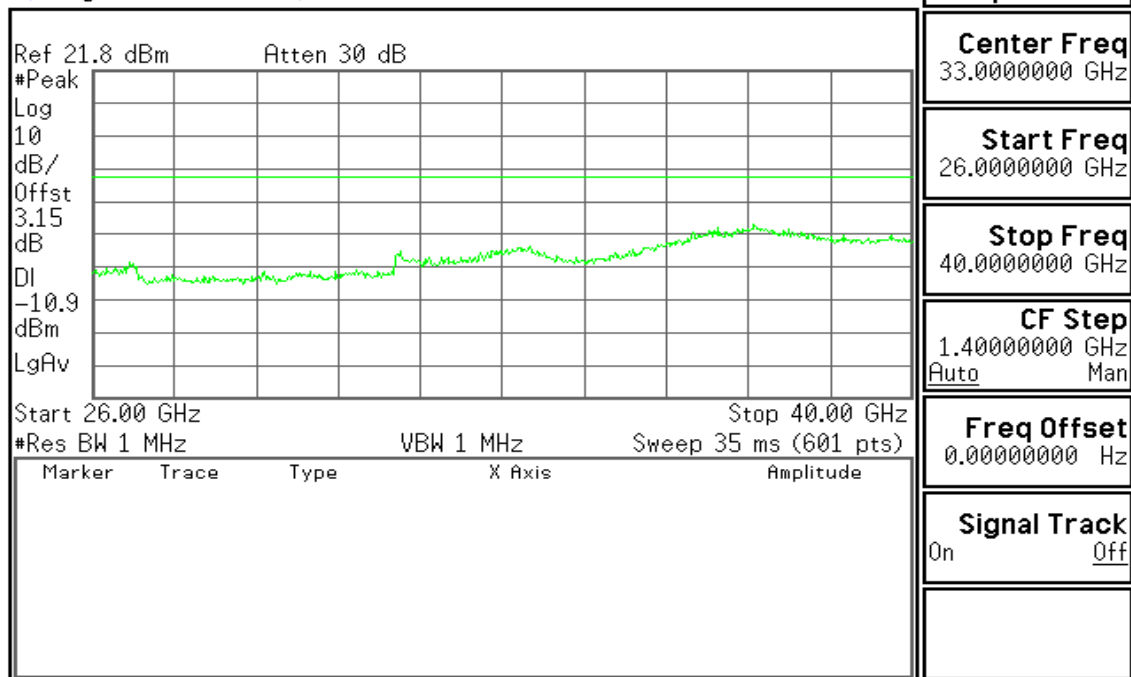

Copyright 2000–2003 Agilent Technologies



7.10 TRANSMISSION IN ABSENCE OF DATA (15.407)

LIMIT

The device shall automatically discontinue transmission in case of either absence of information to transmit or operation failure. These provisions are not intended to preclude the transmission of control or signaling information or the use of repetitive codes used by certain digital technologies to complete frame or burst intervals. Applicants shall include in their application for equipment authorization a description of how this requirement is met.

TEST RESULTS

No non-compliance noted

Note: *For the details, refer to the theory of the operation.*

7.11 FREQUENCY STABILITY (15.407)

LIMIT

Manufacturers of U-NII devices are responsible for ensuring frequency stability such that an emission is maintained within the band of operation under all conditions of normal operation as specified in the user's manual.

TEST RESULTS

Please refer to the operational description for details.

Note: *An examination of the band-edge plots shows that the emission will stay within the authorized band over the entire temperature range.*

7.12 ANTENNA REQUIREMENT (15.407)

LIMIT

According to FCC Part 15.407(d), any U-NII device that operates in the 5.15-5.25 GHz band shall use a transmitting antenna that is an integral part of the device.

TEST RESULTS

No non-compliance noted

The antenna connector is designed with a unique connector and replacement of it by the user is not considered. For details, refer to the EUT photos.