

**ELECTROMAGNETIC EMISSIONS COMPLIANCE REPORT
INTENTIONAL RADIATOR CERTIFICATION TO
FCC PART 15 SUBPART C REQUIREMENT**

OF

2 PU Crisp and Clear Monitor

MODEL No.: Y7569C

Trademark: Not Provided

FCC ID: BMWTFY7569C

Date Code: J2312HON00

REPORT NO: ED121012036E

ISSUE DATE: October 23, 2012

Prepared for

TOMY International, Inc.

1111 W. 22nd Street Suite 320 Oak Brook, IL 60523 United States

Prepared by

DONGGUAN EMTEK CO., LTD

No.281, Guantai Road, Nancheng District,

Dongguan, Guangdong, China

TEL: 86-769-22807078

FAX: 86-769-22807079

VERIFICATION OF COMPLIANCE

Applicant:	TOMY International, Inc. 1111 W. 22nd Street Suite 320 Oak Brook, IL 60523 United States
manufacturer:	Honor Tone Limited
Product Description:	2 PU Crisp and Clear Monitor
Trademark:	Not Provided
Model Number:	Y7569C
FCC ID Number:	BMWTFY7569C
Serial Number:	Not Provided
File Number:	ED121012036E
Date of Test:	October 12, 2012 to October 23, 2012

We hereby certify that:

The above equipment was tested by Dongguan EMTEK Co., Ltd. The test data, data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in ANSI C63.4 (2009) and the energy emitted by the sample EUT tested as described in this report is in compliance with conducted and radiated emission limits of FCC Rules Part 15.235.

The test results of this report relate only to the tested sample identified in this report.

Approved By



Sam Lv / Q.A. Manager
DONGGUAN EMTEK CO., LTD.

Table of Contents

1.	GENERAL INFORMATION	4
1.1	Product Description.....	4
1.2	Related Submittal(s) / Grant (s).....	4
1.3	Test Methodology	4
1.4	Special Accessories	4
1.5	Equipment Modifications.....	4
1.6	Test Facility.....	5
2.	System Test Configuration.....	6
2.1	EUT Configuration.....	6
2.2	EUT Exercise	6
2.3	Test Procedure.....	6
2.4	Limitation	6
2.5	Configuration of Tested System.....	8
3.	Summary Of Test Results.....	9
4.	Description of test modes.....	9
5.	Conducted Emissions Test	10
5.1	Measurement Procedure:	10
5.2	Test SET-UP (Block Diagram of Configuration).....	10
5.3	Measurement Equipment Used:	10
5.4	Measurement Results:	10
5.5	Conducted Measurement Photos:	13
6.	Radiated Emission Test	14
6.1	Measurement Procedure	14
6.2	Test SET-UP (Block Diagram of Configuration).....	14
6.3	Measurement Equipment Used:	15
6.4	Measurement Results	15
6.5	Radiated Measurement Photos:	19
7.	Occupied Bandwidth.....	20
7.1	Measurement Procedure	20
7.2	Test SET-UP (Block Diagram of Configuration).....	20
7.3	Measurement Equipment Used:	20
7.4	Measurement Results:	20

1.GENERAL INFORMATION

1.1 Product Description

The TOMY International, Inc. Model: Y7569C (referred to as the EUT in this report) The EUT is an short range, lower power, 2 PU Crisp and Clear Monitor designed as an " Input Device.

A major technical descriptions of EUT is described as following:

- A). Operation Frequency: 49.830 MHz and 49.860 MHz, two channels.
- B). Antenna Designation: External Antenna
- C). Power Supply: the EUT is powered by a 120VAC to 6VDC 200mA AC adapter.
- D) Information about the adapter:
 - Model No.: KU1B-060-0200D
 - Input Rating: AC 120V/60Hz, 6VA
 - Output Rating: DC 6V, 200mA

1.2 Related Submittal(s) / Grant (s)

This submittal(s) (test report) is intended for FCC ID: BMWTFY7569C filing to comply with Section 15.235 of the FCC Part 15, Subpart C Rules. The composite system (receiver) is compliance with Subpart B is authorized under an ID procedure.

1.3 Test Methodology

Both conducted and radiated testing were performed according to the procedures in ANSI C63.4 (2009). Radiated testing was performed at an antenna to EUT distance 3 meters.

1.4 Special Accessories

Not available for this EUT intended for grant.

1.5 Equipment Modifications

Not available for this EUT intended for grant.

1.6 Test Facility

Site Description

EMC Lab. : Accredited by FCC, Aug. 18, 2011
The Certificate Number is 247565

Accredited by Industry Canada, January 13, 2011
The Certificate Number is 9444A

Name of Firm : Dongguan EMTEK Co., Ltd.

Site Location : No.281, Guantai Road, Nancheng District, Dongguan,
Guangdong, China.

2. System Test Configuration

2.1 EUT Configuration

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner which intends to maximize its emission characteristics in a continuous normal application.

2.2 EUT Exercise

The Transmitter was operated in the normal operating mode. the Tx frequency was fixed which was for the purpose of the measurements.

2.3 Test Procedure

2.3.1 Conducted Emissions

The EUT is a placed on as turn table which is 0.8 m above ground plane. According to the requirements in Section 13.1.4.1 of ANSI C63.4-2009. Conducted emissions from the EUT measured in the **frequency range between 0.15 MHz and 30MHz** using **CISPR Quasi-Peak and average detector mode**.

2.3.2 Radiated Emissions

The EUT is a placed on as turn table which is 0.8 m above ground plane. The turn table shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3m away from the receiving antenna which varied from 1m to 4m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the max. emission, the relative positions of this hand-held transmitter(EUT) was rotated through three orthogonal axes according to the requirements in Section 13.1.4.1 of ANSI C63.4-2009.

2.4 Limitation

(1) Conducted Emission

According to section 15.207(a) Conducted Emission Limits is as following.

Frequency range MHz	Limits dB(uV)	
	Quasi-peak	Average
0.15 to 0.50	66 to 56	56 to 46
0.50 to 5	56	46
5 to 30	60	50
Note 1.The lower limit shall apply at the transition frequencies 2.The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz.		

(2) Radiated Emission

- The field strength of any emission within this band (section 15.235 frequency between 49.82MHz -49.90MHz) shall not exceed 10000 micro volts/meter at 3 meters. (80dBμV at 3m) The emission limit in this paragraph is based on measurement instrumentation employing an average detector. The provisions in section 15.35 for limiting peak emissions apply.
- The field strength of any emissions which appear outside of this band shall not exceed the general radiated emission limits in section 15.209(Intentional Radiators general limit).as below.

Frequency (MHz)	Field strength μV/m	Distance(m)	Field strength at 3m dBμV/m
1.705-30	30	30	69.54
30-88	100	3	40
88-216	150	3	43.5
216-960	200	3	46
Above 960	500	3	54

- Remark:
- Emission level in dBuV/m=20 log (uV/m)
 - Measurement was performed at an antenna to the closed point of EUT distance of meters.
 - Only spurious frequency is permitted to locate within the Restricted Bands specified in provision of § 15.205
 - Emission spurious frequency which appearing within the Restricted Bands specified in provision of §15.205, then the general radiated emission limits in § 15.209 apply.

2.5 Configuration of Tested System

Fig. 2-1 Configuration of Tested System

EUT

Table 2-1 Equipment Used in Tested System

Item	Equipment	Mfr/Brand	Model/Type No.	FCC ID	Series No.	Note
1	2 PU Crisp and Clear Monitor	N/A	Y7569C	BMWTFY7569C	N/A	EUT

Note:

- (1) Unless otherwise denoted as EUT in 『Remark』 column , device(s) used in tested system is a support equipment.

3. Summary Of Test Results

FCC Rules	Description Of Test	Result
§ 15.207	Conducted Emission	Compliant
§ 15.235	Radiated Emission	Compliant
§ 15.235	Bandwidth Test	Compliant

4. Description of test modes

The EUT (2 PU Crisp and Clear Monitor) has been tested under normal operating condition. The EUT stay in continuous transmitting mode. The Frequency 49.830MHz and 49.860 MHz are chosen for testing.

5. Conducted Emissions Test

5.1 Measurement Procedure:

1. The EUT was placed on a table which is 0.8m above ground plane.
2. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
3. Repeat above procedures until all frequency measured were complete.

5.2 Test SET-UP (Block Diagram of Configuration)

5.3 Measurement Equipment Used:

Conducted Emission Test Site # 4					
EQUIPMENT TYPE	MFR	MODEL NUMBER	SERIAL NUMBER	LAST CAL.	CAL DUE.
Test Receiver	Rohde & Schwarz	ESCS30	828985/018	05/29/2012	05/28/2013
L.I.S.N	Rohde & Schwarz	ESH2-Z5	834549/005	05/29/2012	05/28/2013
L.I.S.N	Rohde & Schwarz	ESH2-Z5	834549/005	05/29/2012	05/28/2013
50ΩCoaxial Switch	Anritsu	MP59B	M20531	05/29/2012	05/28/2013

5.4 Measurement Result:

Pass.

Please refer to the following data.


Conducted Emission Measurement

File: Y7569
80.0 dBuV

Data: #1

Date: 2012-10-22

Time: 9:35:20

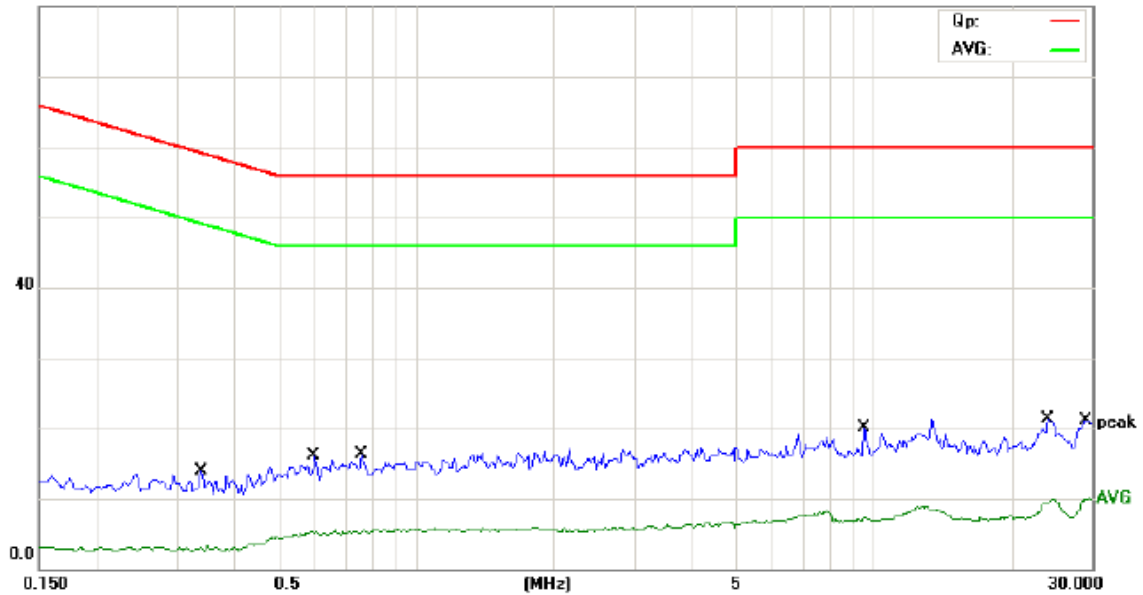

Site site #1

Phase: L1

Temperature: 26

Limit: (CE)FCC PART 15 class C_QP

Power: AC 120V/60Hz

Humidity: 60 %

EUT: 2 PU Crisp and Clear Monitor

M/N: Y7569

Mode: TX

Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector	Comment
1		0.3400	13.82	0.00	13.82	59.20	-45.38	QP	
2		0.3400	3.40	0.00	3.40	49.20	-45.80	AVG	
3		0.6000	16.04	0.00	16.04	56.00	-39.96	QP	
4		0.6000	5.27	0.00	5.27	46.00	-40.73	AVG	
5		0.7600	16.30	0.00	16.30	56.00	-39.70	QP	
6		0.7600	5.52	0.00	5.52	46.00	-40.48	AVG	
7		9.5250	20.10	0.00	20.10	60.00	-39.90	QP	
8		9.5250	7.33	0.00	7.33	50.00	-42.67	AVG	
9	*	24.1000	21.28	0.00	21.28	60.00	-38.72	QP	
10		24.1000	9.85	0.00	9.85	50.00	-40.15	AVG	
11		29.0250	21.15	0.00	21.15	60.00	-38.85	QP	
12		29.0250	10.06	0.00	10.06	50.00	-39.94	AVG	

*:Maximum data x:Over limit !:over margin Comment: Factor build in receiver.


Conducted Emission Measurement

File: Y7569
80.0 dBuV

Data: #2

Date: 2012-10-22

Time: 9:38:41

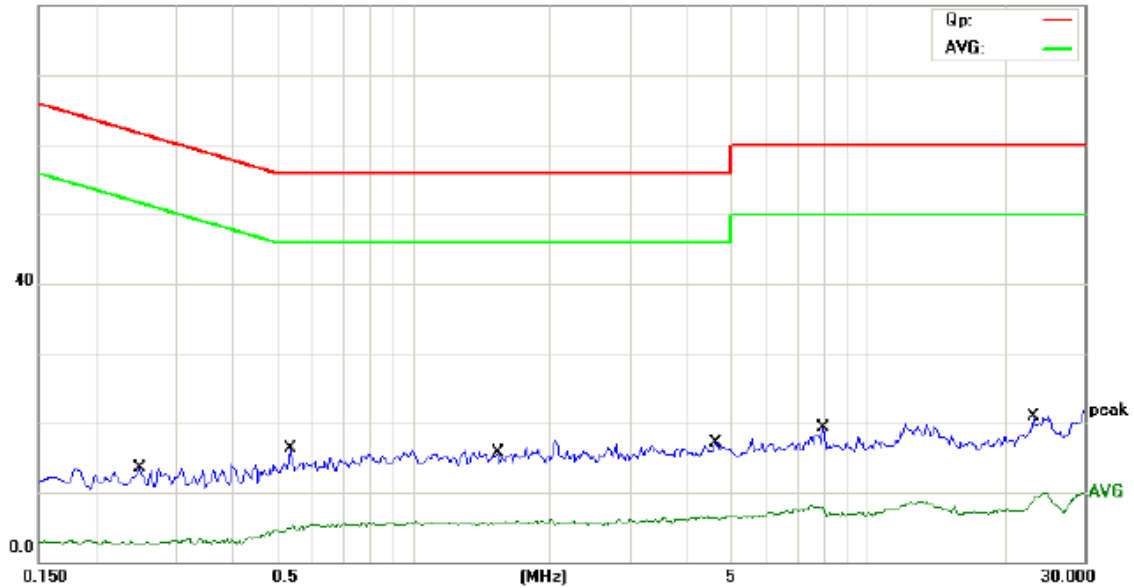

Site site #1

Phase: N

Temperature: 26

Limit: (CE)FCC PART 15 class C_QP

Power: AC 120V/60Hz

Humidity: 60 %

EUT: 2 PU Crisp and Clear Monitor

M/N: Y7569

Mode: TX

Note:

No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector	Comment
1	0.2500	13.54	0.00	13.54	61.76	-48.22	QP	
2	0.2500	3.02	0.00	3.02	51.76	-48.74	AVG	
3	0.5350	16.36	0.00	16.36	56.00	-39.64	QP	
4	0.5350	5.26	0.00	5.26	46.00	-40.74	AVG	
5	1.5400	15.61	0.00	15.61	56.00	-40.39	QP	
6	1.5400	5.95	0.00	5.95	46.00	-40.05	AVG	
7 *	4.6400	17.15	0.00	17.15	56.00	-38.85	QP	
8	4.6400	6.58	0.00	6.58	46.00	-39.42	AVG	
9	8.0000	19.29	0.00	19.29	60.00	-40.71	QP	
10	8.0000	8.09	0.00	8.09	50.00	-41.91	AVG	
11	23.2250	20.81	0.00	20.81	60.00	-39.19	QP	
12	23.2250	9.97	0.00	9.97	50.00	-40.03	AVG	

*:Maximum data x:Over limit !:over margin Comment: Factor build in receiver.

5.5 Conducted Measurement Photos:




6. Radiated Emission Test

6.1 Measurement Procedure


1. The EUT was placed on a turn table which is 0.8m above ground plane.
2. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
3. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
4. Repeat above procedures until all frequency measured were complete.

6.2 Test SET-UP (Block Diagram of Configuration)

(A) Radiated Emission Test Set-Up, Frequency Below 30MHz

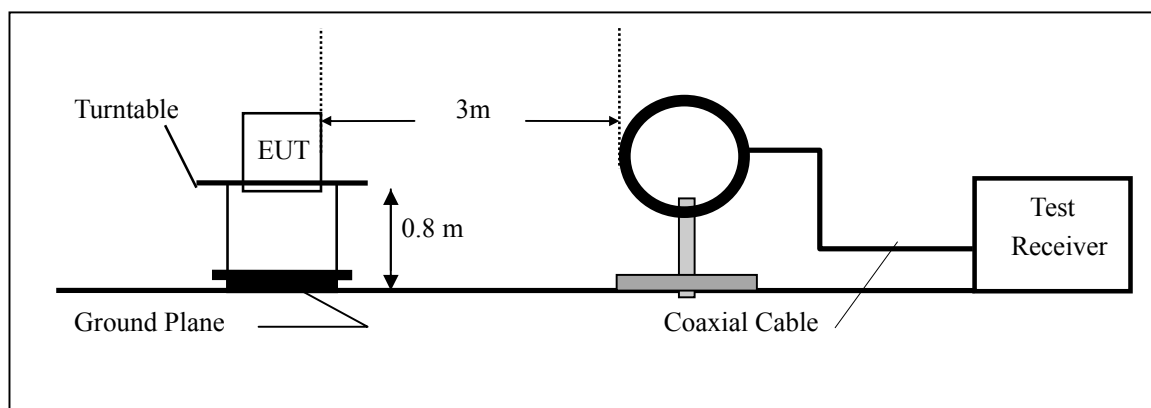

(B) Radiated Emission Test Set-Up, Frequency Above 30MHz

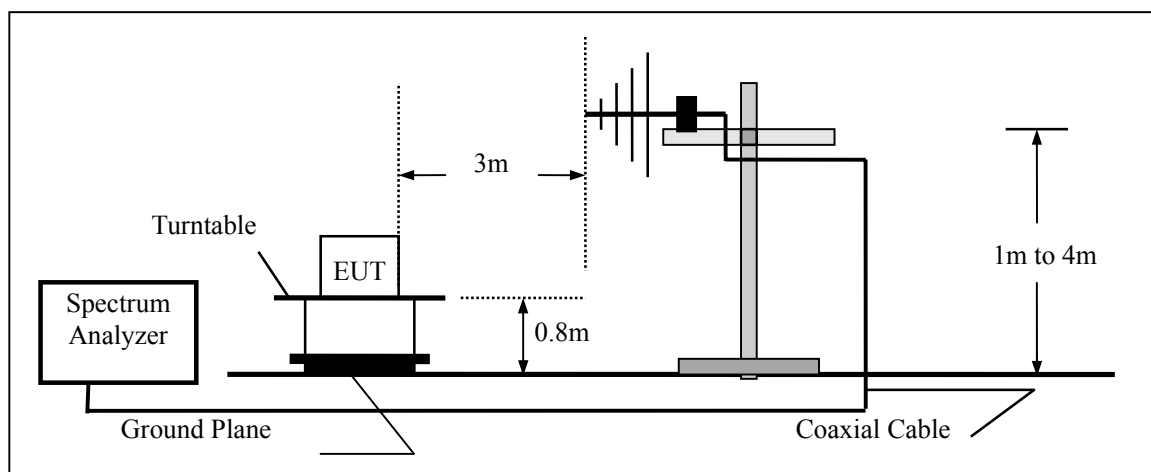

6.3 Measurement Equipment Used:

Open Area Test Site # 3					
EQUIPMENT TYPE	MFR	MODEL NUMBER	SERIAL NUMBER	LAST CAL.	CAL DUE.
Spectrum Analyzer	ANRITSU	MS2661C	6200140915	05/29/2012	05/28/2013
EMI Test Receiver	Rohde & Schwarz	ESCS30	828985/018	05/29/2012	05/28/2013
Pre-Amplifier	HP	8447D	2944A07999	05/29/2012	05/28/2013
Bilog Antenna	Schwarzbeck	VULB9163	142	05/29/2012	05/28/2013
Loop Antenna	ARA	PLA-1030/B	1029	05/29/2012	05/28/2013

6.4 Measurement Results

Fundamental and Harmonics Radiated Emission Data

Operation Mode:	Transmitting Mode	Test Date :	October 19, 2012
Frequency Range:	20M-1GHz	Temperature :	25 °C
Fundamental	49.830 MHz	Humidity :	50 %
Frequency:			
Test Result:	PASS	Test By:	Andy

Freq. (MHz)	Ant.Pol. H/V	Emission Level (dBuV/m)	Limit 3m (dBuV/m)	Margin (dB)	Note
49.830	V	74.13	100.00	-25.87	Peak
49.830	V	69.25	80.00	-10.75	AV
99.660	V	32.22	43.50	-11.28	QP
149.490	V	28.34	43.50	-15.16	QP
199.320	V	33.79	43.50	-9.71	QP
249.150	V	31.63	46.00	-14.37	QP
298.980	V	29.25	46.00	-16.75	QP
348.810	V	34.31	46.00	-11.69	QP
398.640	V	30.29	46.00	-15.71	QP
448.470	V	29.26	46.00	-16.74	QP
498.300	V	33.42	46.00	-12.58	QP
548.130	V	32.17	46.00	-13.83	QP
597.960	V	34.25	46.00	-11.75	QP
647.790	V	31.30	46.00	-14.7	QP
697.620	V	30.87	46.00	-15.13	QP
747.450	V	33.61	46.00	-12.39	QP
797.280	V	31.37	46.00	-14.63	QP
847.110	V	32.19	46.00	-13.81	QP
49.830	H	78.64	100.00	-21.36	Peak

49.830	H	64.22	80.00	-15.78	AV
99.660	H	26.59	43.50	-16.91	QP
149.490	H	28.44	43.50	-15.06	QP
199.320	H	28.25	43.50	-15.25	QP
249.150	H	33.79	46.00	-12.21	QP
298.980	H	29.02	46.00	-16.98	QP
348.810	H	27.07	46.00	-18.93	QP
398.640	H	26.92	46.00	-19.08	QP
448.470	H	27.81	46.00	-18.19	QP
498.300	H	31.87	46.00	-14.13	QP
548.130	H	30.02	46.00	-15.98	QP
597.960	H	29.52	46.00	-16.48	QP
647.790	H	34.39	46.00	-11.61	QP
697.620	H	28.87	46.00	-17.13	QP
747.450	H	28.29	46.00	-17.71	QP
797.280	H	29.11	46.00	-16.89	QP
847.110	H	28.35	46.00	-17.65	QP

No others harmonics emissions are higher than 20dB below the limits of 47 CFR Part 15.227.

Note: (1) Emission Level= Reading Level+ Probe Factor +Cable Loss.
(2) The average measurement was not performed when the peak measured data under the limit of average detection.

Fundamental and Harmonics Radiated Emission Data

Operation Mode: Transmitting Mode Test Date : October 19, 2012
Frequency Range: 20M-1GHz Temperature : 25 °C
Fundamental: 49.860 MHz Humidity : 50 %
Frequency:
Test Result: PASS Test By: Andy



Freq. (MHz)	Ant.Pol. H/V	Emission Level (dBuV/m)	Limit 3m (dBuV/m)	Margin (dB)	Note
49.860	V	75.02	100.00	-24.98	Peak
49.860	V	70.02	80.00	-9.98	AV
99.780	V	31.91	43.50	-11.59	QP
149.670	V	28.45	43.50	-15.05	QP
199.560	V	31.79	43.50	-11.71	QP
249.450	V	31.08	46.00	-14.92	QP
299.340	V	28.21	46.00	-17.79	QP
349.230	V	30.44	46.00	-15.56	QP
399.120	V	31.22	46.00	-14.78	QP
449.010	V	29.52	46.00	-16.48	QP
498.900	V	32.19	46.00	-13.81	QP
548.790	V	30.19	46.00	-15.81	QP
598.680	V	34.77	46.00	-11.23	QP
648.570	V	31.33	46.00	-14.67	QP
698.460	V	30.67	46.00	-15.33	QP
748.350	V	33.54	46.00	-12.46	QP
798.240	V	31.09	46.00	-14.91	QP
848.130	V	28.51	46.00	-17.49	QP
49.860	H	78.09	100.00	-21.91	Peak
49.860	H	64.47	80.00	-15.53	AV
99.780	H	28.25	43.50	-15.25	QP
149.670	H	28.68	43.50	-14.82	QP
199.560	H	30.37	43.50	-13.13	QP
249.450	H	32.11	46.00	-13.89	QP
299.340	H	29.79	46.00	-16.21	QP
349.230	H	27.15	46.00	-18.85	QP
399.120	H	26.52	46.00	-19.48	QP
449.010	H	27.02	46.00	-18.98	QP
498.900	H	31.24	46.00	-14.76	QP
548.790	H	30.57	46.00	-15.43	QP
598.680	H	28.12	46.00	-17.88	QP

648.570	H	30.39	46.00	-15.61	QP
698.460	H	26.87	46.00	-19.13	QP
748.350	H	28.36	46.00	-17.64	QP
798.240	H	29.55	46.00	-16.45	QP
848.130	H	28.66	46.00	-17.34	QP

No others harmonics emissions are higher than 20dB below the limits of 47 CFR Part 15.227.

Note: (1) Emission Level= Reading Level+ Probe Factor +Cable Loss.
(2) The average measurement was not performed when the peak measured data under the limit of average detection.

6.5 Radiated Measurement Photos:

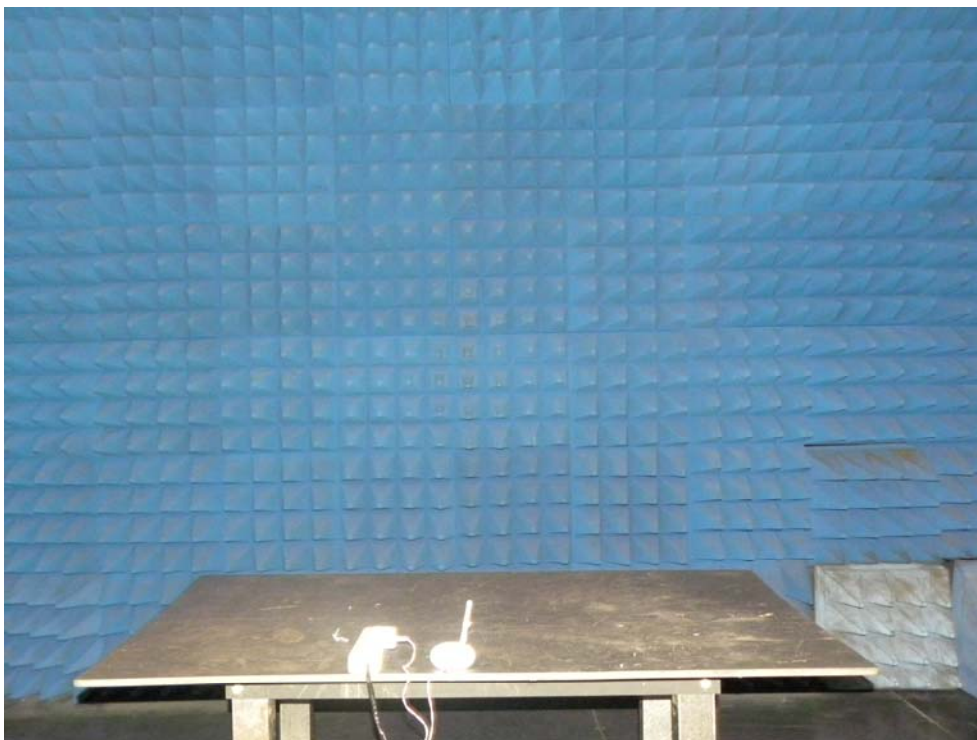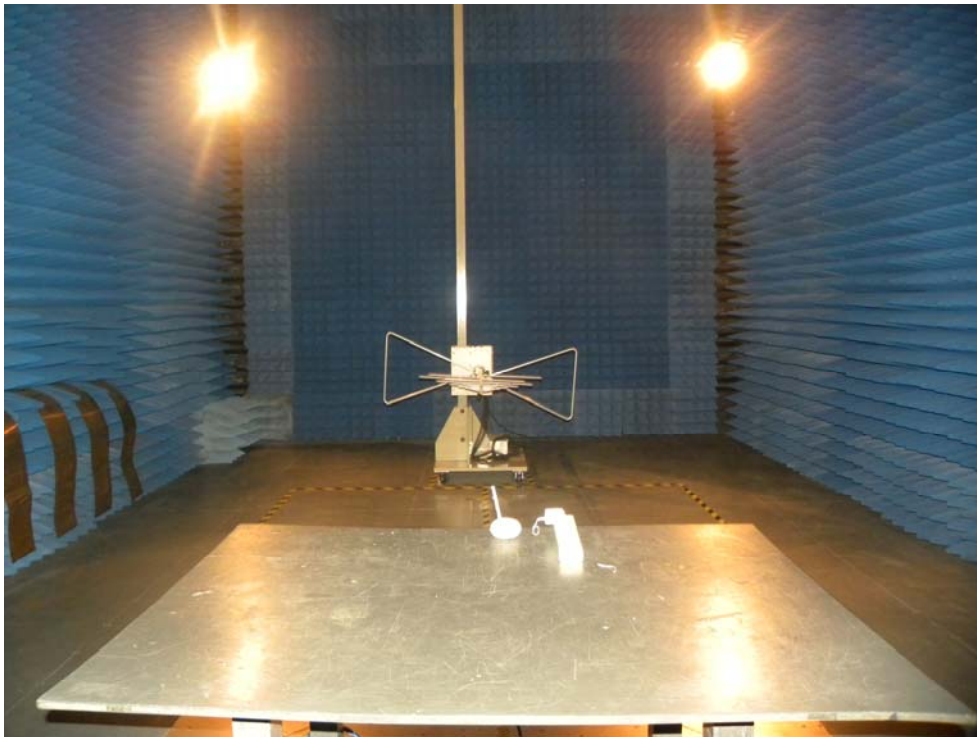

7. Occupied Bandwidth

7.1 Measurement Procedure

1. The EUT was placed on a turn table which is 0.8m above ground plane.
2. Set EUT as normal operation
3. Set SPA Center Frequency = fundamental frequency, RBW= 300Hz, VBW= 1KHz
4. Set SPA Max hold. Mark peak.

7.2 Test SET-UP (Block Diagram of Configuration)

Same as 6.2 Radiated Emission Measurement.

7.3 Measurement Equipment Used:

The useful radiated emission from the EUT was detected by the spectrum analyser with peak detector. The vertical scale is set to 10db per division. The horizontal scale is set to 10KHz per division. Read the down 26db bandwidth of the carrier.

7.4 Measurement Requirements:

The field strength of any emissions appearing between the band edges and up to 10 kHz above and below the band edges shall be attenuated at least 26 dB below the level of the unmodulated carrier.

Operation within the band 49.81~49.91Mhz

Refer to attached data chart.

Band Width Test Data

Low Channel: 49.830 MHz



High Channel: 49.860 MHz

