

# TEST REPORT



**Dt&C Co., Ltd.**

42, Yurim-ro, 154Beon-gil, Cheoin-gu, Yongin-si, Gyeonggi-do, Korea, 17042  
Tel : 031-321-2664, Fax : 031-321-1664

1. Report No : DRTFCC2401-0001

2. Customer

• Name (FCC) : MOTREX CO.,LTD.

• Address (FCC) : Seoyoung Bldg. 25, Hwangsaoul-ro 258beon-gil, Bundang-gu, Seongnam-si,  
Gyeonggi-do, South Korea

3. Use of Report : FCC Original Grant

4. Product Name / Model Name : SMART DISPLAY / MS500A-K01

FCC ID : BP9-MS500AK01

5. FCC Regulation(s): Part 15.247

Test Method used: KDB558074 D01v05r02, ANSI C63.10-2013

6. Date of Test : 2023.12.04 ~ 2023.12.21



7. Location of Test :  Permanent Testing Lab  On Site Testing

8. Testing Environment : See appended test report.

9. Test Result : Refer to the attached test result.

The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

This test report is not related to KOLAS accreditation.

Affirmation	Tested by	Technical Manager
	Name : SeungMin Gil  (Signature)	Name : JaeJin Lee  (Signature)

2024 . 01 . 17 .

**Dt&C Co., Ltd.**

If this report is required to confirmation of authenticity, please contact to [report@dtnc.net](mailto:report@dtnc.net)

## Test Report Version

Test Report No.	Date	Description	Revised by	Reviewed by
DRTFCC2401-0001	Jan. 17, 2024	Initial issue	SeungMin Gil	JaeJin Lee

## Table of Contents

<b>1. General Information</b> .....	<b>4</b>
1.1. Description of EUT .....	4
1.2. Declaration by the applicant / manufacturer .....	4
1.3. Testing Laboratory .....	5
1.4. Testing Environment .....	5
1.5. Measurement Uncertainty .....	5
1.6. Information about the FHSS characteristics .....	6
1.7. Conclusion of worst-case and operation mode .....	7
1.8. Test Equipment List.....	8
<b>2. Antenna Requirement</b> .....	<b>9</b>
<b>3. Summary of Test Results</b> .....	<b>10</b>
<b>4. Maximum Peak Conducted Output Power</b> .....	<b>11</b>
4.1. Test Setup .....	11
4.2. Limit.....	11
4.3. Test Procedure.....	11
4.4. Test Results .....	12
<b>5. 20 dB BW</b> .....	<b>18</b>
5.1. Test Setup .....	18
5.2. Limit.....	18
5.3. Test Procedure.....	18
5.4. Test Results .....	18
<b>6. Carrier Frequency Separation</b> .....	<b>24</b>
6.1. Test Setup .....	24
6.2. Limit.....	24
6.3. Test Procedure.....	24
6.4. Test Results .....	24
<b>7. Number of Hopping Channels</b> .....	<b>29</b>
7.1. Test Setup .....	29
7.2. Limit.....	29
7.3. Test Procedure.....	29
7.4. Test Results .....	29
<b>8. Time of Occupancy</b> .....	<b>35</b>
8.1. Test Setup .....	35
8.2. Limit.....	35
8.3. Test Procedure.....	35
8.4. Test Results .....	35
<b>9. Unwanted Emissions</b> .....	<b>40</b>
9.1. Test Setup .....	40
9.2. Limit.....	40
9.3. Test Procedures.....	42
9.3.1. Test Procedures for Unwanted Emissions(Radiated) .....	42
9.3.2. Test Procedures for Unwanted Emissions(Conducted).....	43
9.4. Test Results .....	44
9.4.1. Unwanted Emissions(Radiated).....	44
9.4.2. Unwanted Emissions(Conducted) .....	47
<b>10. AC Power-Line Conducted Emissions</b> .....	<b>71</b>
10.1. Test Setup .....	71
10.2. Limit.....	71
10.3. Test Procedure.....	71
10.4. Test Results .....	71
<b>APPENDIX I</b> .....	<b>72</b>
<b>APPENDIX II</b> .....	<b>73</b>

## 1. General Information

### 1.1. Description of EUT

<b>Equipment Class</b>	Spread Spectrum Transmitter(DSS)
<b>Product Name</b>	SMART DISPLAY
<b>Model Name</b>	MS500A-K01
<b>Add Model Name</b>	-
<b>Firmware Version Identification Number</b>	Rev0.1
<b>EUT Serial Number</b>	MS400A0501JA0001
<b>Power Supply</b>	DC 12 V
<b>Frequency Range</b>	2 402 MHz ~ 2 480 MHz
<b>Max. RF Output Power</b>	6.09 dBm (0.004 W)
<b>Modulation Technique (Data rate)</b>	GFSK(1 Mbps), $\pi/4$ DQPSK(2 Mbps), 8DPSK(3 Mbps)
<b>Number of Channels</b>	79
<b>Antenna Specification</b>	Antenna Type: PCB Antenna Gain : 4.49 dBi (PK)

### 1.2. Declaration by the applicant / manufacturer

- NA

### 1.3. Testing Laboratory

<b>Dt&amp;C Co., Ltd.</b>		
The 3 m test site and conducted measurement facility used to collect the radiated data are located at the 42, Yurim-ro, 154beon-gil, Cheoin-gu, Yongin-si, Gyeonggi-do, Korea 17042.		
The test site complies with the requirements of Part 2.948 according to ANSI C63.4-2014.		
- FCC & IC MRA Designation No. : KR0034		
- ISED#: 5740A		
<a href="http://www.dtnc.net">www.dtnc.net</a>		
Telephone	:	+ 82-31-321-2664
FAX	:	+ 82-31-321-1664

### 1.4. Testing Environment

Ambient Condition	
▪ Temperature	+21 °C ~ +24 °C
▪ Relative Humidity	40 % ~ 43 %

### 1.5. Measurement Uncertainty

The measurement uncertainties shown below were calculated in accordance with requirements of ANSI C63.4-2014 and ANSI C63.10-2013. All measurement uncertainty values are shown with a coverage factor of  $k = 2$  to indicate a 95 % level of confidence.

Parameter	Measurement uncertainty
Antenna-port conducted emission	1.0 dB (The confidence level is about 95 %, $k = 2$ )
Radiated emission (1 GHz Below)	4.8 dB (The confidence level is about 95 %, $k = 2$ )
Radiated emission (1 GHz ~ 18 GHz)	4.8 dB (The confidence level is about 95 %, $k = 2$ )
Radiated emission (18 GHz Above)	4.9 dB (The confidence level is about 95 %, $k = 2$ )

## 1.6. Information about the FHSS characteristics

- This Bluetooth module has been tested by a Bluetooth Qualification Lab, and we confirm the following :

A) The hopping sequence is pseudorandom

Note 1 : Pseudorandom Frequency Hopping Sequence Table as below:

Channel: 08, 24, 40, 56, 42, 54, 72, 09, 01, 11, 33, 41, 34, 42, 65, 73, 53, 69, 06, 22, 04, 20,  
36, 52, 38, 46, 70, 78, 68, 76, 21, 29, 10, 26, 41, 58, 44, 60, 76, 13, 03, 11, 35, 43,  
37, 45, 69, 77, 52, 71, 08, 24, 06, 24, 48, 56, 45, 46, 70, 01, 72, 06, 25, 33, 12, 28,  
49, 60, 45, 58, 74, 13, 05, 18, 37, 49 etc

The System receiver have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shift frequencies in synchroniztation with the transmitted signals.

B) All channels are used equally on average

C) The receiver input bandwidth equals the transmit bandwidth

D) The receiver hops in sequence with the transmit signal

- 15.247(g) : In accordance with the Bluetooth Industry Standard, the system is designed to comply with all of the regulations in Section 15.247 when the transmitter is presented with a continuous data (or information) system.

- 15.247(h) : In accordance with the Bluetooth Industry Standard, the system does not coordinate its channels selection / hopping sequence with other frequency hopping systems for the express purpose of avoiding the simultaneous occupancy of individual hopping frequencies by multiple transmitters.

- 15.247(h) : The EUT employs Adaptive Frequency Hopping (AFH) which identifies sources of interference namely devices operating in 802.11 WLAN and excludes them from the list of available channels. The process of re-mapping reduces the number of test channels from 79 channels to a minimum number of 20 channels.

### 1.7. Conclusion of worst-case and operation mode

The EUT has three types of modulation (GFSK,  $\pi/4$ DQPSK and 8DPSK). Therefore all applicable requirements were tested with all the modulations. And packet type was tested at the worst case(DH5).

#### EUT Operation test setup

Bluetooth tester was used to control the transmit parameters during test.

#### Tested frequency information,

- Hopping Function : Enable

	Tested Frequency (MHz)
Hopping Band	2 402 ~ 2 480

- Hopping Function : Disable

	Tested Frequency (MHz)
Lowest Channel	2 402
Middle Channel	2 441
Highest Channel	2 480

## 1.8. Test Equipment List

Type	Manufacturer	Model	Cal.Date (yy/mm/dd)	Next.Cal.Date (yy/mm/dd)	S/N
Spectrum Analyzer	Agilent Technologies	N9020A	23/06/23	24/06/23	MY46471622
Spectrum Analyzer	Agilent Technologies	N9020A	23/12/15	24/12/15	MY48011700
Spectrum Analyzer	Agilent Technologies	N9020A	23/06/23	24/06/23	US47360812
DC Power Supply	Agilent Technologies	66332A	23/06/23	24/06/23	US37474125
DC Power Supply	SM techno	SDP30-5D	23/06/23	24/06/23	305DMG288
Multimeter	FLUKE	17B+	23/12/15	24/12/15	36390701WS
BlueTooth Tester	TESCOM	TC-3000C	23/06/23	24/06/23	3000C000563
Power Splitter	Anritsu	K241B	23/06/23	24/06/23	020611
Signal Generator	Rohde Schwarz	SMBV100A	23/12/15	24/12/15	255571
Signal Generator	ANRITSU	MG3695C	23/12/15	24/12/15	173501
Thermohygrometer	BODYCOM	BJ5478	23/12/15	24/12/15	120612-1
Thermohygrometer	BODYCOM	BJ5478	23/12/15	24/12/15	120612-2
Thermohygrometer	BODYCOM	BJ5478	23/06/23	24/06/23	N/A
Loop Antenna	ETS-Lindgren	6502	22/04/22	24/04/22	203480
Hybrid Antenna	Schwarzbeck	VULB 9160	23/12/15	24/12/15	3362
Horn Antenna	ETS-Lindgren	3117	23/06/23	24/06/23	00143278
Horn Antenna	A.H.Systems Inc.	SAS-574	23/06/23	24/06/23	155
PreAmplifier	tsj	MLA-0118-B01-40	23/12/15	24/12/15	1852267
PreAmplifier	tsj	MLA-1840-J02-45	23/06/23	24/06/23	16966-10728
PreAmplifier	H.P	8447D	23/12/15	24/12/15	2944A07774
High Pass Filter	Wainwright Instruments	WHKX12-935-1000-15000-40SS	23/06/23	24/06/23	8
High Pass Filter	Wainwright Instruments	WHKX10-2838-3300-18000-60SS	23/06/23	24/06/23	1
High Pass Filter	Wainwright Instruments	WHNX8.0/26.5-6SS	23/06/23	24/06/23	3
Attenuator	Hefei Shunze	SS5T2.92-10-40	23/06/23	24/06/23	16012202
Attenuator	Aeroflex/Weinschel	56-3	23/06/23	24/06/23	Y2370
Attenuator	SMAJK	SMAJK-2-3	23/06/23	24/06/23	3
Attenuator	SMAJK	SMAJK-2-3	23/06/23	24/06/23	2
Attenuator	Aeroflex/Weinschel	86-10-11	23/06/23	24/06/23	408
Power Meter & Wide Bandwidth Sensor	Anritsu	ML2496A MA2411B	23/12/15	24/12/15	1338004 1911481
Cable	Dt&C	Cable	23/01/04	24/01/04	G-2
Cable	HUBER+SUHNER	SUCOFLEX 100	23/01/04	24/01/04	G-3
Cable	Dt&C	Cable	23/01/04	24/01/04	G-4
Cable	OMT	YSS21S	23/01/04	24/01/04	G-5
Cable	Junkosha	MWX241	23/01/03	24/01/03	mmW-1
Cable	Junkosha	MWX241	23/01/03	24/01/03	mmW-4
Cable	HUBER+SUHNER	SUCOFLEX100	23/01/04	24/01/04	M-01
Cable	HUBER+SUHNER	SUCOFLEX100	23/01/04	24/01/04	M-02
Cable	JUNKOSHA	MWX241/B	23/01/04	24/01/04	M-03
Cable	JUNKOSHA	J12J101757-00	23/01/04	24/01/04	M-07
Cable	HUBER+SUHNER	SUCOFLEX106	23/01/04	24/01/04	M-09
Cable	Radiall	TESTPRO3	23/01/04	24/01/04	RFC-70
Test Software (Radiated)	tsj	EMI Measurement	NA	NA	Version 2.00.0185

Note1: The measurement antennas were calibrated in accordance to the requirements of ANSI C63.5-2017

Note2: The cable is not a regular calibration item, so it has been calibrated by Dt&C itself.



## 2. Antenna Requirement

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions.

**Conclusion: Comply**

**The antenna is attached on the PCB by means of unique connector.  
Therefore this E.U.T complies with the requirement of Part 15.203**

### 3. Summary of Test Results

FCC part section(s)	Test Description	Limit (Using in 2 400~ 2 483.5 MHz)	Test Condition	Status Note 1
15.247(a) 15.247(b)	Maximum Peak Conducted Output Power	=< 0.125 W(conducted)	Conducted	C
15.247(a)	20 dB Bandwidth	NA		C
	Carrier Frequency Separation	>= 25 kHz or >= Two thirds of the 20 dB BW, whichever is greater.		C
	Number of Hopping Channels	>= 15 hops		C
	Time of Occupancy	=< 0.4 seconds		C
15.247(d)	Unwanted Emissions (Conducted)	The radiated emission to any 100 kHz of out-band shall be at least 20 dB below the highest in-band spectral density.		C
15.247(d) 15.205 15.209	Unwanted Emissions (Radiated)	Part 15.209 Limits (Refer to section 9)	Radiated	C
15.207	AC Power-Line Conducted Emissions	Part 15.207 Limits (Refer to section 10)	AC Line Conducted	NA <sup>Note3</sup>
15.203	Antenna Requirement	Part 15.203 (Refer to section 2)	-	C
Note 1: <b>C</b> = Comply <b>NC</b> = Not Comply <b>NT</b> = Not Tested <b>NA</b> = Not Applicable Note 2: For radiated emission tests below 30 MHz were performed on semi-anechoic chamber which is correlated with OATS. Note 3: This device is installed in a car. Therefore the power source is a battery of car.				

## 4. Maximum Peak Conducted Output Power

### 4.1. Test Setup

Refer to the APPENDIX I.

### 4.2. Limit

#### ■ FCC Requirements

The maximum peak output power of the intentional radiator shall not exceed the following :

1. §15.247(a)(1), Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2 400 MHz - 2 483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.
2. §15.247(b)(1), For frequency hopping systems operating in the 2 400 – 2 483.5 MHz employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5 725 MHz – 5 805 MHz band : 1 Watt. For all other frequency hopping systems in the 2 400 MHz – 2 483.5 MHz band: 0.125 watts.

### 4.3. Test Procedure

1. The RF output power was measured with a spectrum analyzer connected to the RF Antenna connector (conducted measurement) while EUT was operating in transmit mode at the appropriate center frequency, A spectrum analyzer was used to record the shape of the transmit signal.
2. The peak output power of the fundamental frequency was measured with the spectrum analyzer using ;  
Span = approximately 5 times of the 20 dB bandwidth, centered on a hopping channel  
RBW  $\geq$  20 dB BW  
VBW  $\geq$  RBW  
Sweep = auto  
Detector function = peak  
Trace = max hold

#### 4.4. Test Results


Modulation	Tested Channel	Burst Average Output Power		Peak Output Power	
		dBm	mW	dBm	mW
<b><u>GFSK</u></b>	<b>Lowest</b>	1.78	1.51	2.07	1.61
	<b>Middle</b>	1.90	1.55	1.94	1.56
	<b>Highest</b>	0.86	1.22	1.96	1.57
<b><u><math>\pi/4</math>DQPSK</u></b>	<b>Lowest</b>	3.04	2.01	5.53	3.57
	<b>Middle</b>	2.91	1.95	5.08	3.22
	<b>Highest</b>	2.04	1.60	5.04	3.19
<b><u>8DPSK</u></b>	<b>Lowest</b>	3.07	2.03	<b>6.09</b>	<b>4.06</b>
	<b>Middle</b>	2.91	1.95	5.55	3.59
	<b>Highest</b>	2.02	1.59	5.45	3.51

Note 1: The average output power was tested using an average power meter for reference only.

Note 2: See next pages for actual measured spectrum plots.


Peak Output Power

**Lowest Channel & Modulation : GFSK**

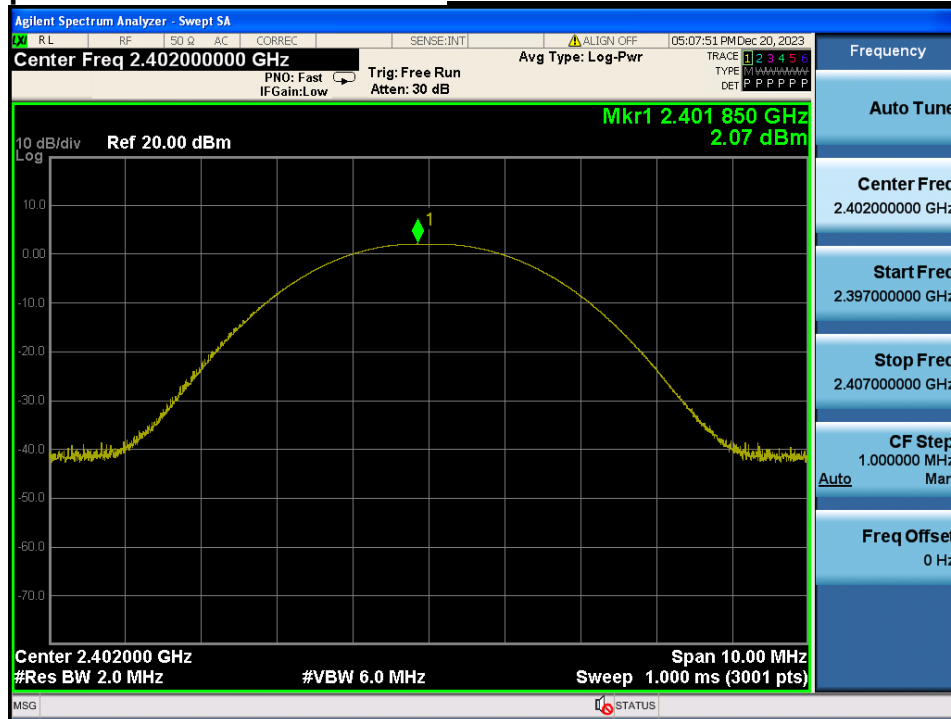


Peak Output Power

**Middle Channel & Modulation : GFSK**

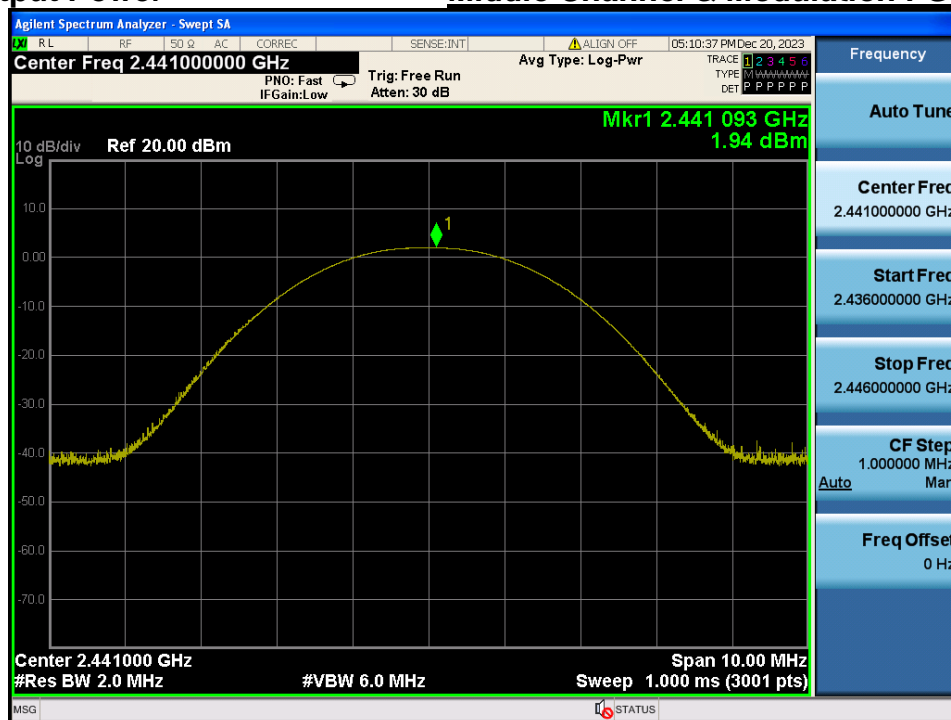


Peak Output Power

Highest Channel & Modulation : GFSK

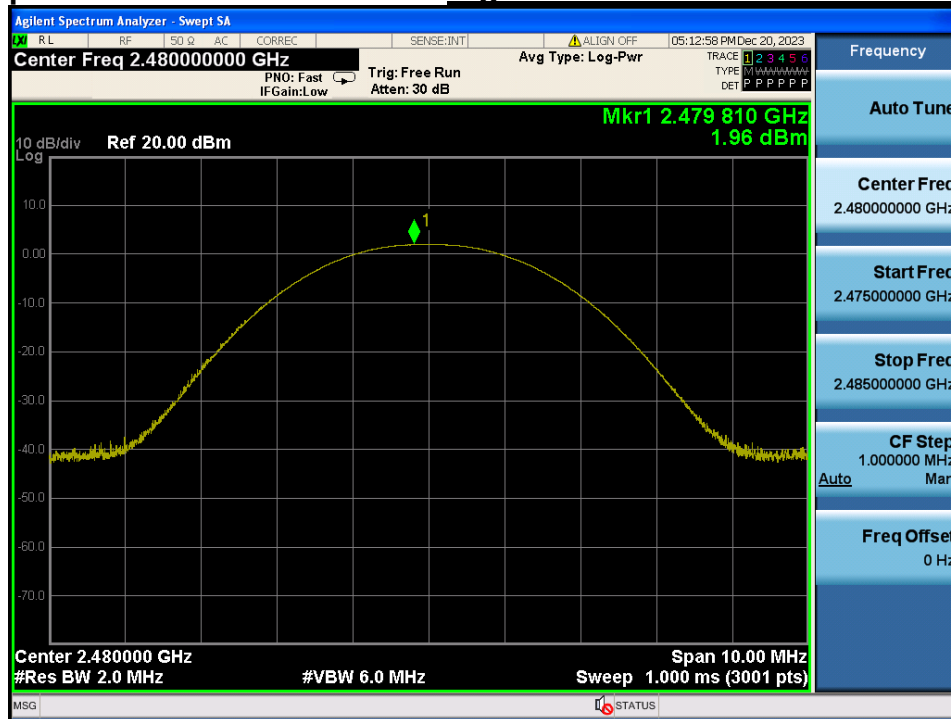


Peak Output Power

Lowest Channel & Modulation :  $\pi/4$ DQPSK

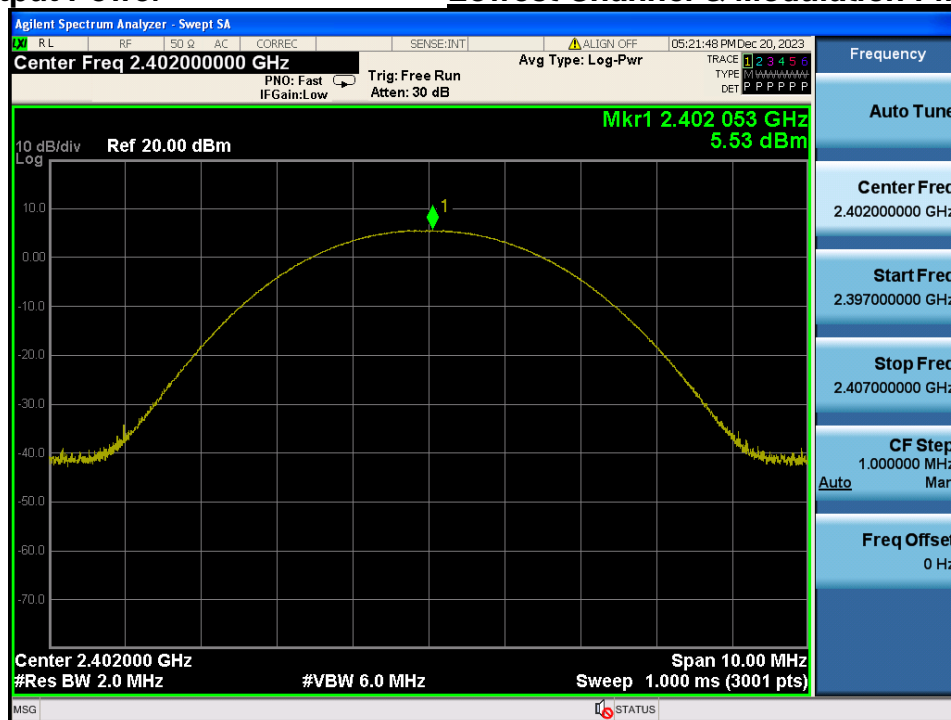


Peak Output Power

*Middle Channel & Modulation :  $\pi/4$ DQPSK*

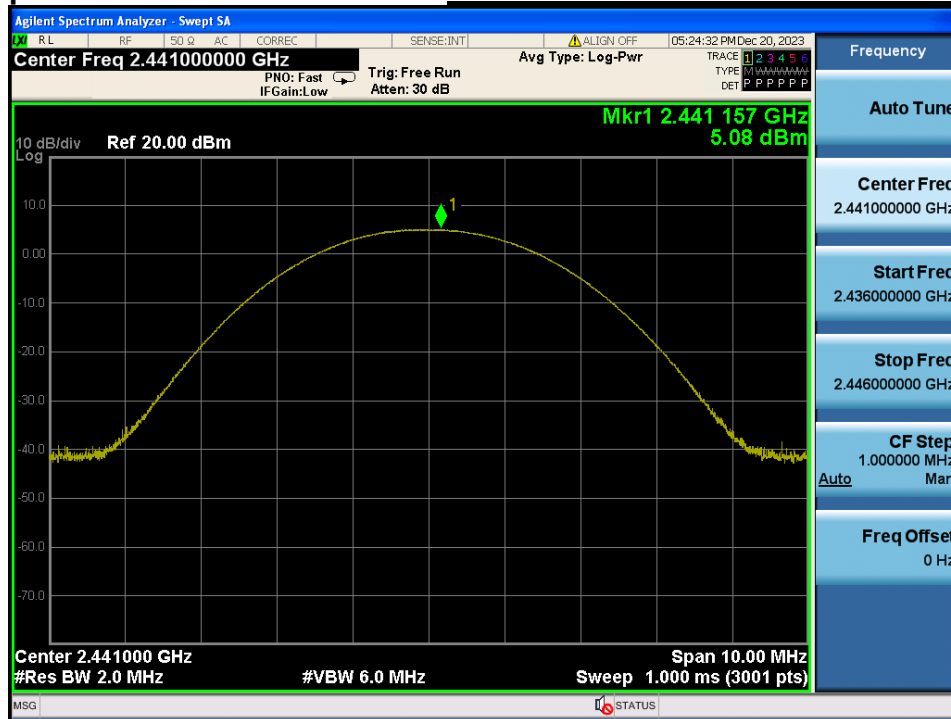


Peak Output Power

*Highest Channel & Modulation :  $\pi/4$ DQPSK*

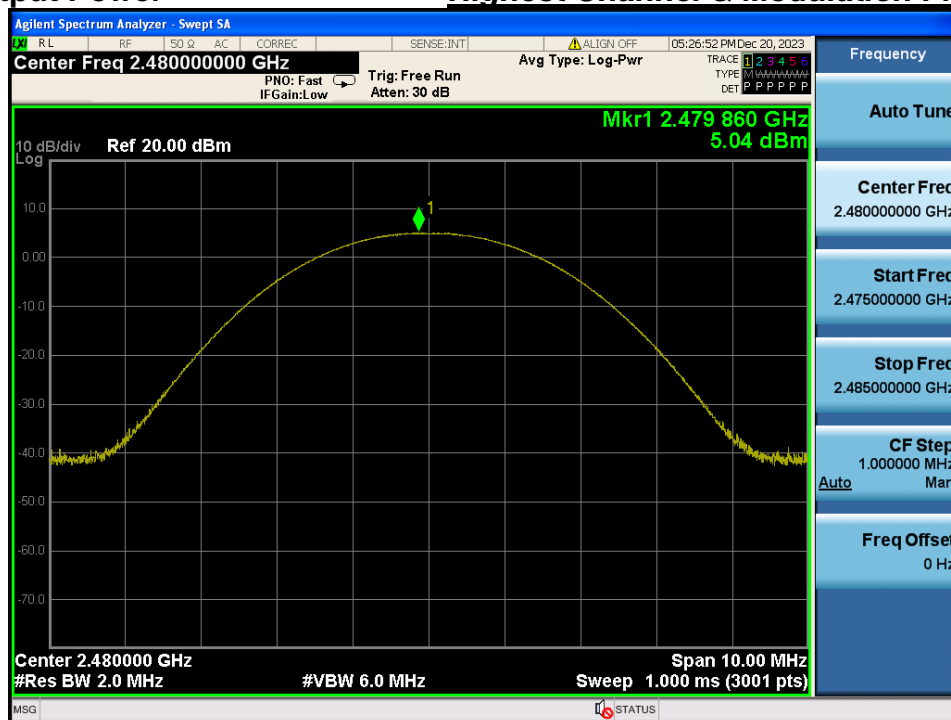


Peak Output Power

Lowest Channel & Modulation : 8DPSK

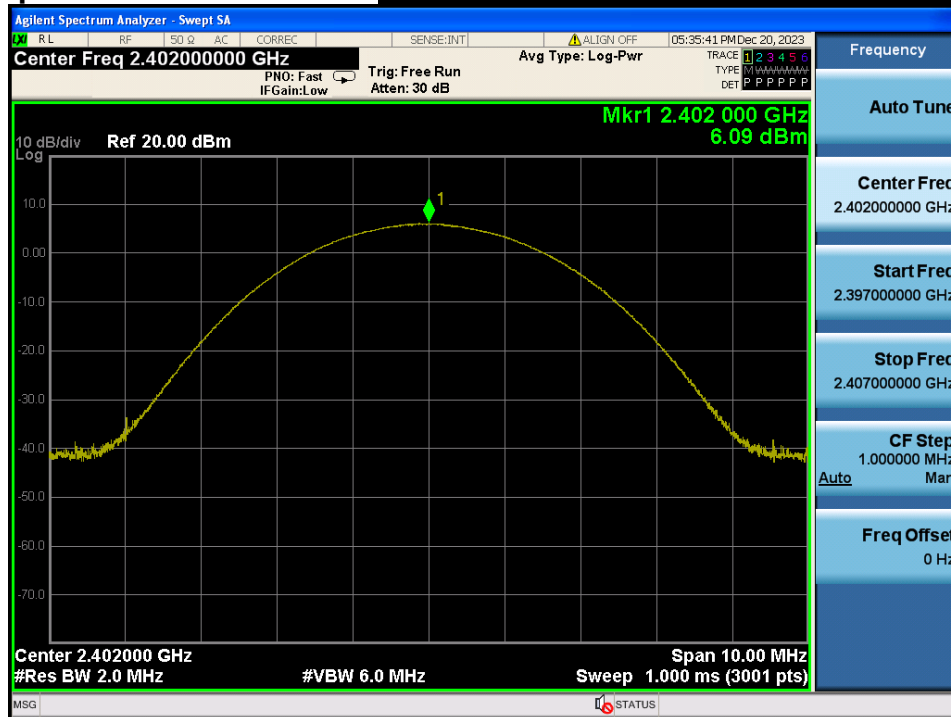

Peak Output Power


Middle Channel & Modulation : 8DPSK

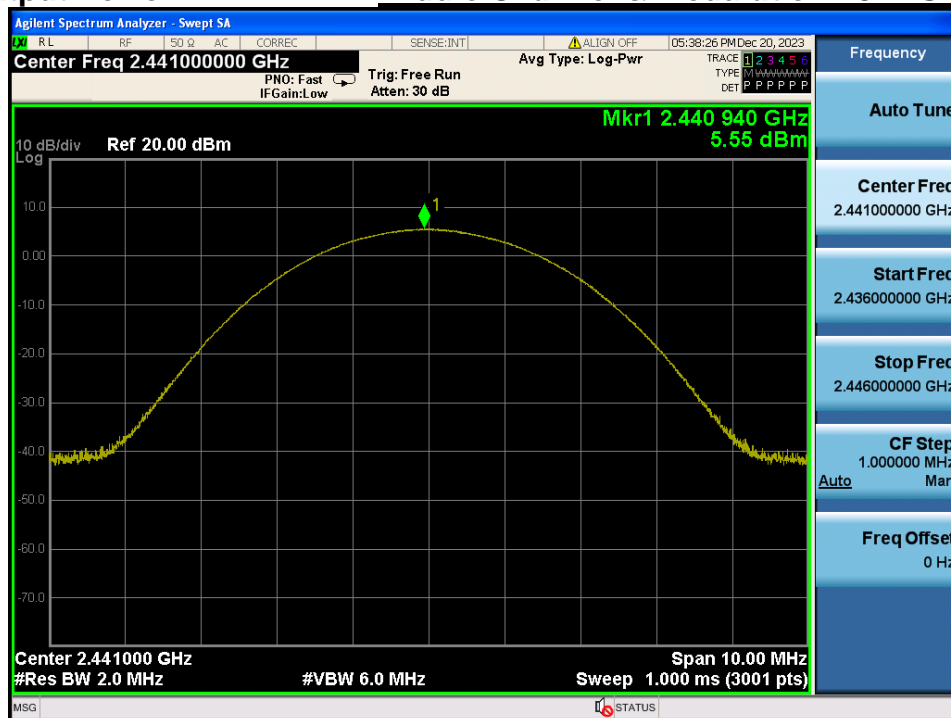



Peak Output Power

Highest Channel & Modulation : 8DPSK

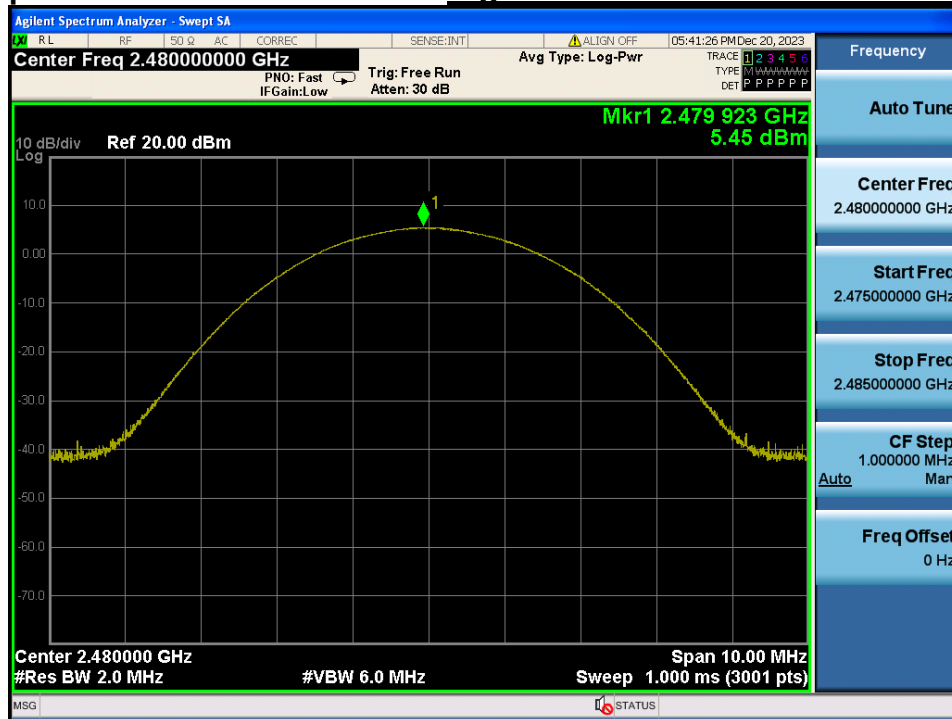

## 5. 20 dB BW

### 5.1. Test Setup

Refer to the APPENDIX I.

### 5.2. Limit

Limit : Not Applicable

### 5.3. Test Procedure


1. The 20 dB bandwidth was measured with a spectrum analyzer connected to RF antenna Connector (conducted measurement) while EUT was operating in transmit mode. The analyzer center frequency was set to the EUT carrier frequency, using the analyzer.
2. The bandwidth of the fundamental frequency was measured with the spectrum analyzer using below setting:
  - RBW = 1 % to 5 % of the 20 dB BW
  - VBW  $\geq 3 \times$  RBW
  - Span = between two times and five times the 20 dB bandwidth
  - Sweep = auto
  - Detector function = peak
  - Trace = max hold

### 5.4. Test Results

Modulation	Tested Channel	20 dB BW (MHz)
<b><u>GFSK</u></b>	<b>Lowest</b>	1.011
	<b>Middle</b>	<b>1.014</b>
	<b>Highest</b>	1.009
<b><u><math>\pi/4</math>DQPSK</u></b>	<b>Lowest</b>	<b>1.347</b>
	<b>Middle</b>	1.345
	<b>Highest</b>	1.346
<b><u>8DPSK</u></b>	<b>Lowest</b>	1.347
	<b>Middle</b>	1.345
	<b>Highest</b>	<b>1.348</b>

20 dB BW

***Lowest Channel & Modulation : GFSK***

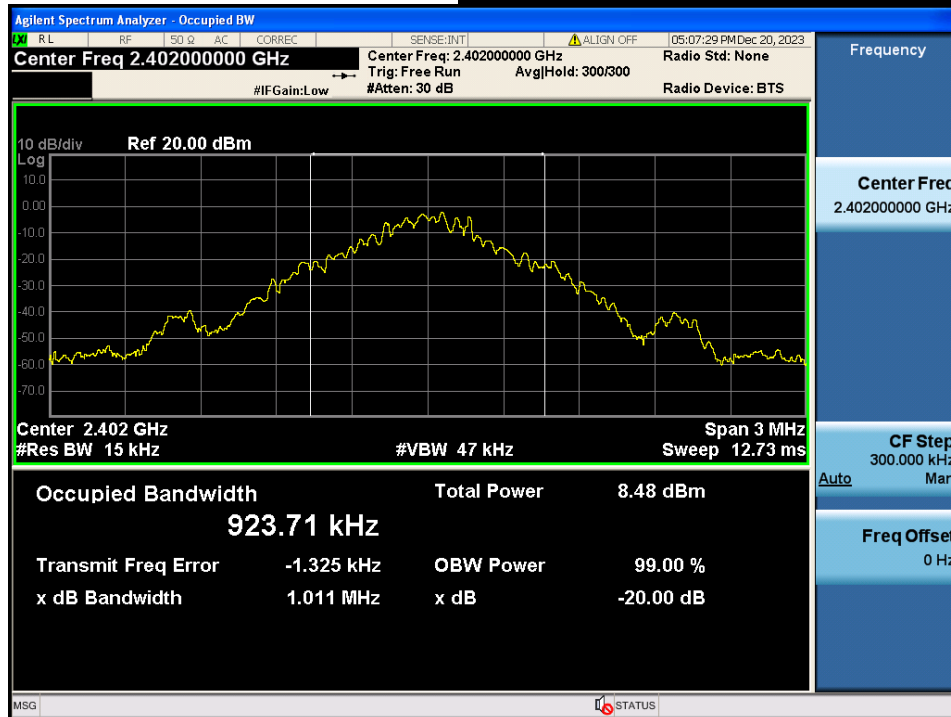


20 dB BW

***Middle Channel & Modulation : GFSK***




20 dB BW

Highest Channel & Modulation : GFSK

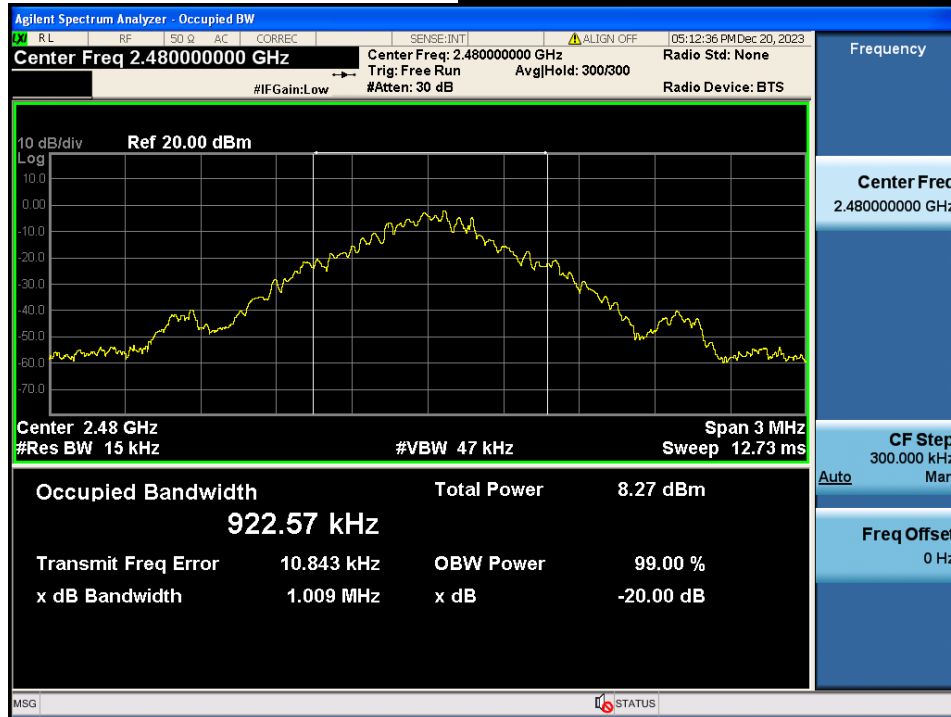


20 dB BW

Lowest Channel & Modulation :  $\pi/4$ DQPSK

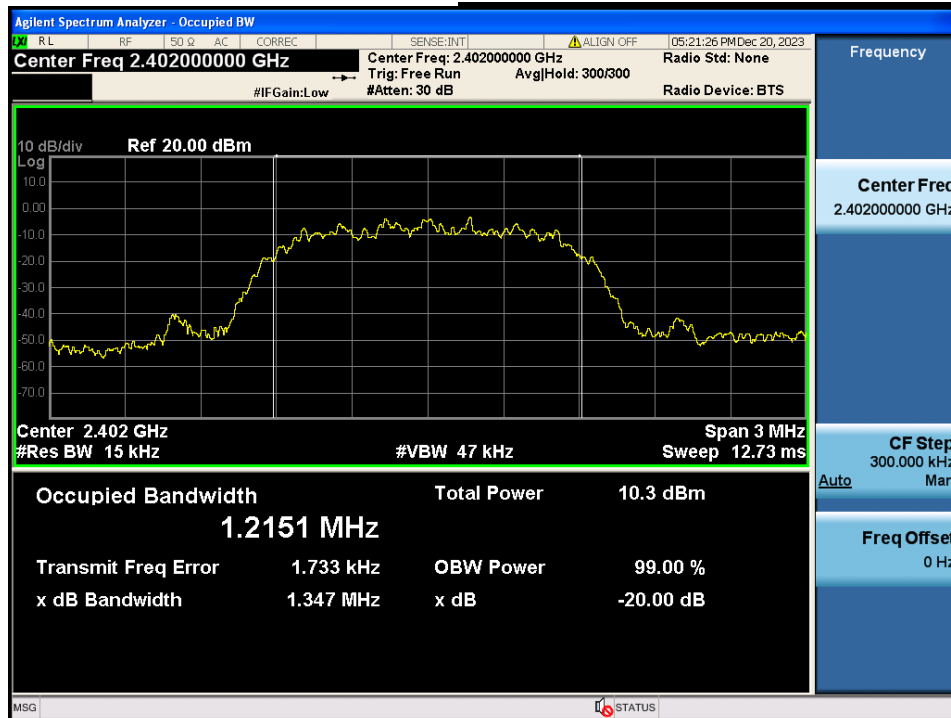


20 dB BW

**Middle Channel & Modulation :  $\pi/4$ DQPSK**

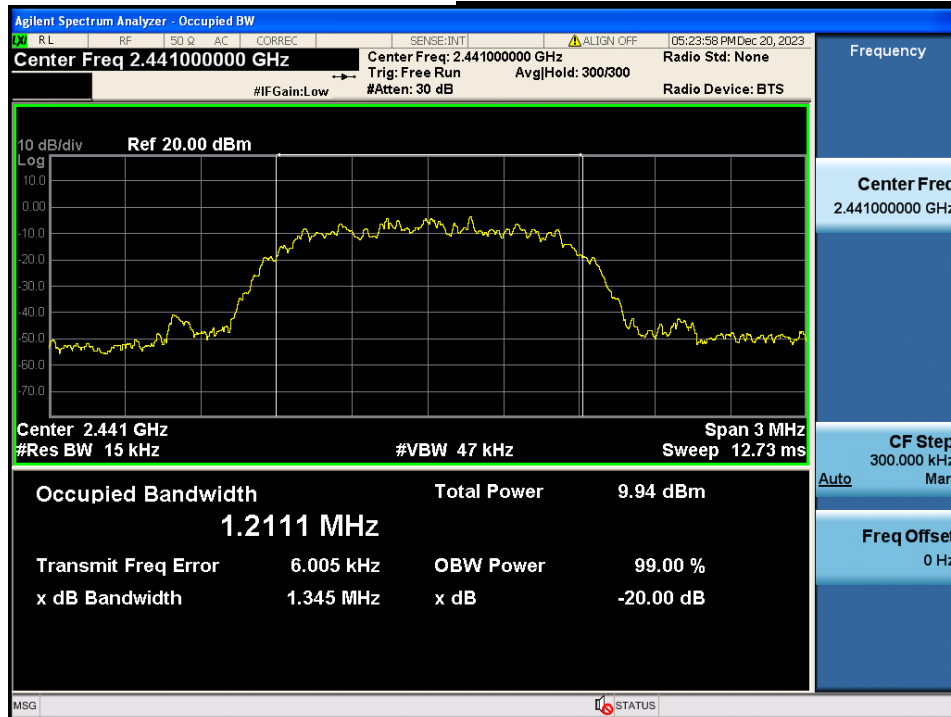


20 dB BW

**Highest Channel & Modulation :  $\pi/4$ DQPSK**

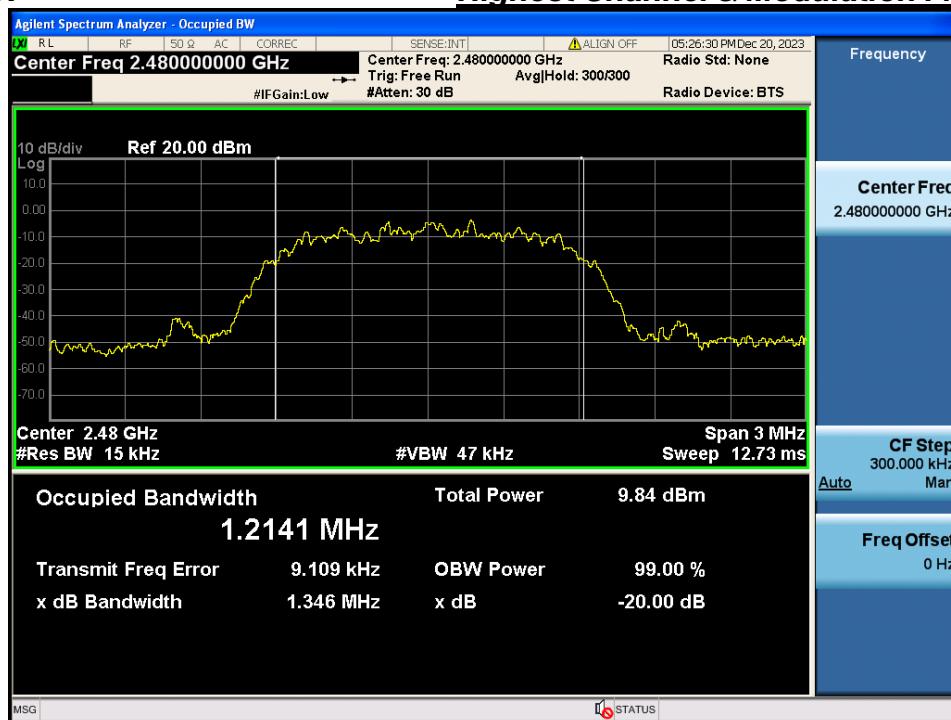


20 dB BW

**Lowest Channel & Modulation : 8DPSK**

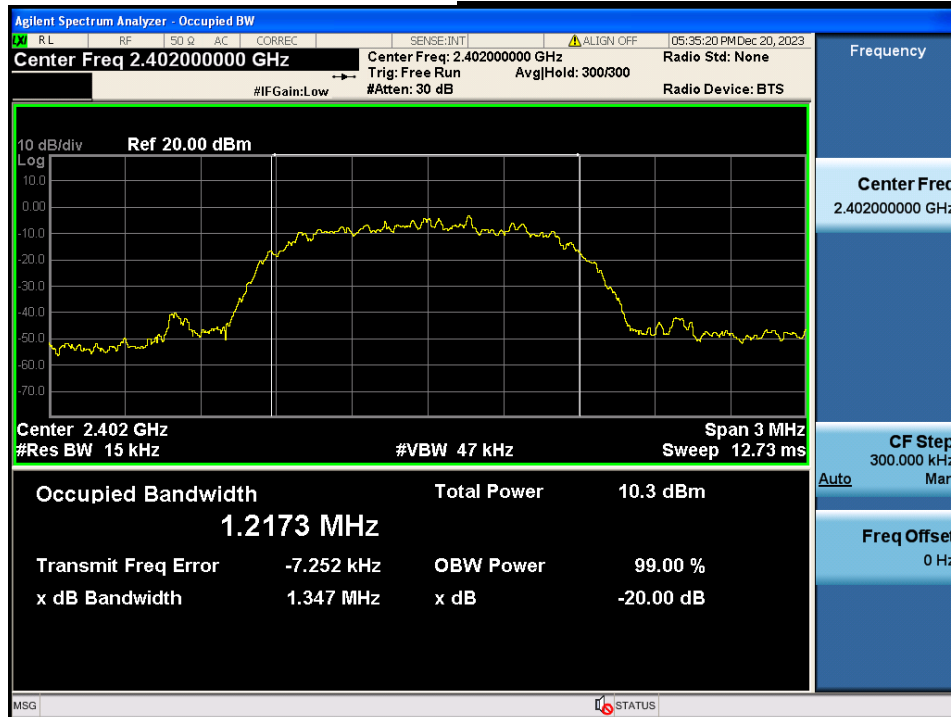


20 dB BW

**Middle Channel & Modulation : 8DPSK**

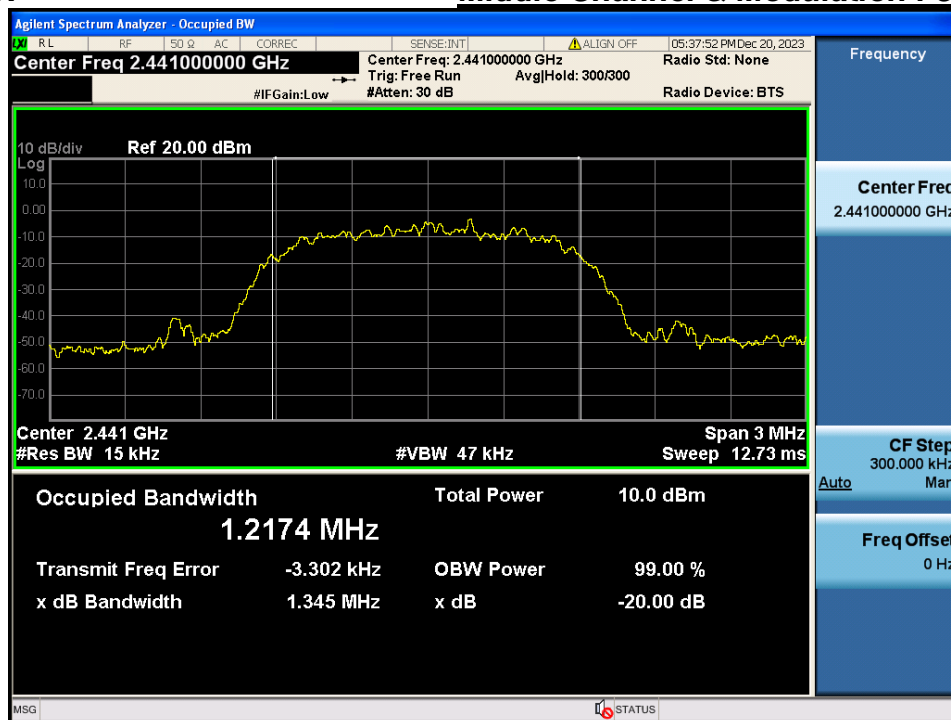

20 dB BW

**Highest Channel & Modulation : 8DPSK**

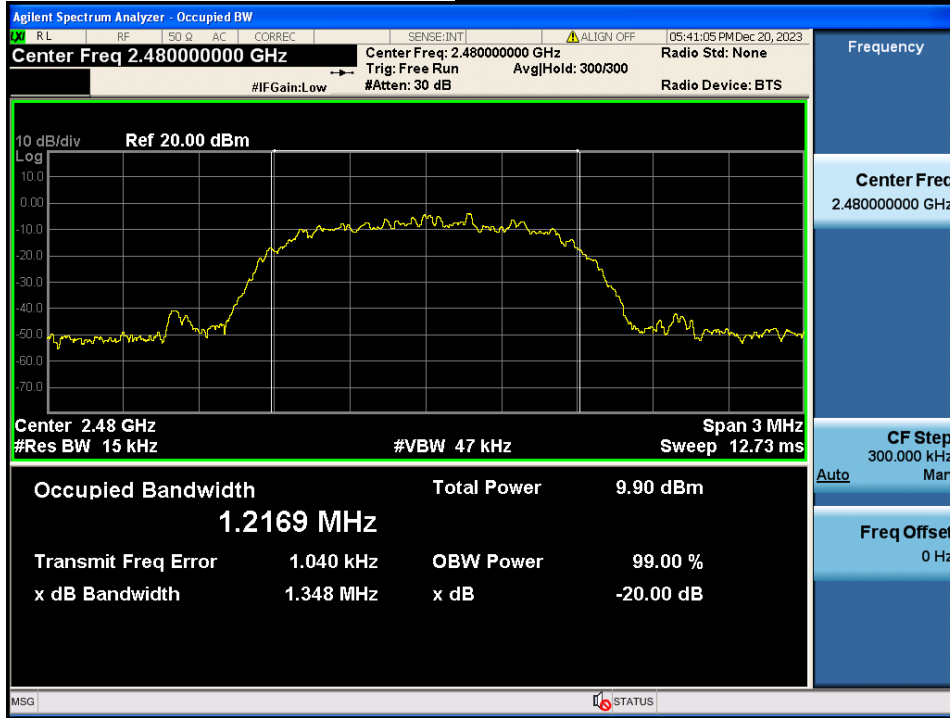

## 6. Carrier Frequency Separation

### 6.1. Test Setup

Refer to the APPENDIX I.

### 6.2. Limit

Limit :  $\geq 25$  kHz or  $\geq$  Two-Thirds of the 20 dB BW whichever is greater.

### 6.3. Test Procedure

The carrier frequency separation was measured with a spectrum analyzer connected to the antenna terminal, while EUT had its hopping function enabled.

After the trace being stable, the reading value between the peaks of the adjacent channels using the marker-delta function was recorded as the measurement results.

The spectrum analyzer is set to :

Span = wide enough to capture the peaks of two adjacent channels

RBW = Start with the RBW set to approximately 30 % of the channel spacing; adjust as necessary to best identify the center of each individual channel.

VBW  $\geq$  RBW

Sweep = auto

Detector function = peak

Trace = max hold

### 6.4. Test Results

#### FH mode

Hopping Mode	Modulation	Peak of reference channel(MHz)	Peak of adjacent Channel(MHz)	Test Result (MHz)
Enable	GFSK	2 441.007	2 442.002	0.995
	$\pi/4$ DQPSK	2 440.003	2 441.007	1.004
	8DPSK	2 441.005	2 442.006	1.001


#### AFH mode

Hopping Mode	Modulation	Peak of reference channel(MHz)	Peak of adjacent Channel(MHz)	Test Result (MHz)
Enable	GFSK	2 441.004	2 442.006	1.002
	$\pi/4$ DQPSK	2 441.002	2 442.003	1.001
	8DPSK	2 441.005	2 442.008	1.003


Note 1 : See next pages for actual measured spectrum




**Carrier Frequency Separation (FH) *Hopping mode : Enable&GFSK***

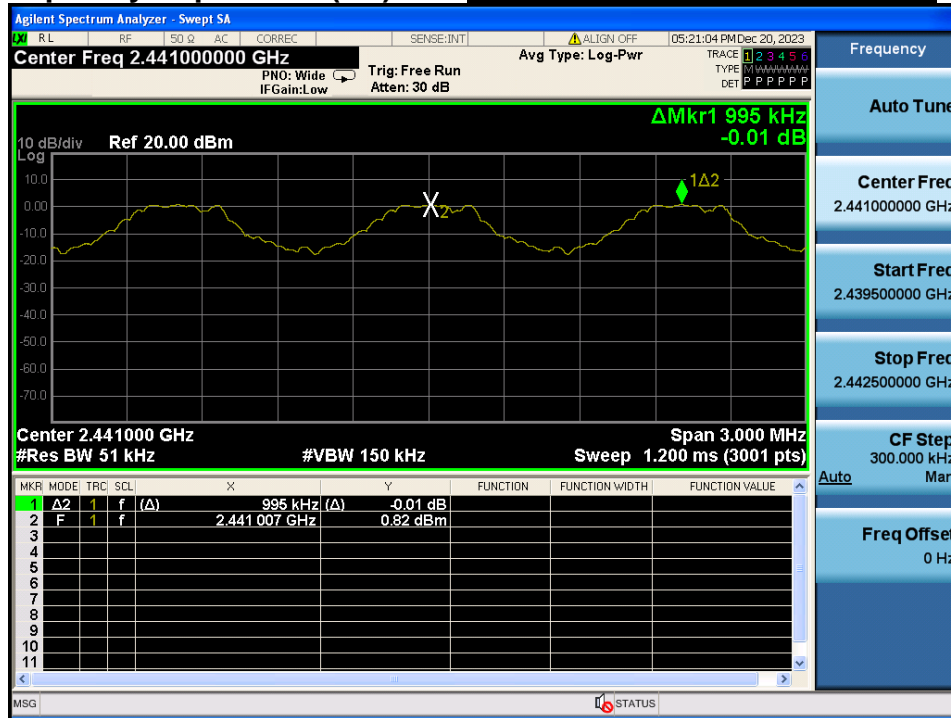


**Carrier Frequency Separation (FH) *Hopping mode : Enable& $\pi/4$ DQPSK***

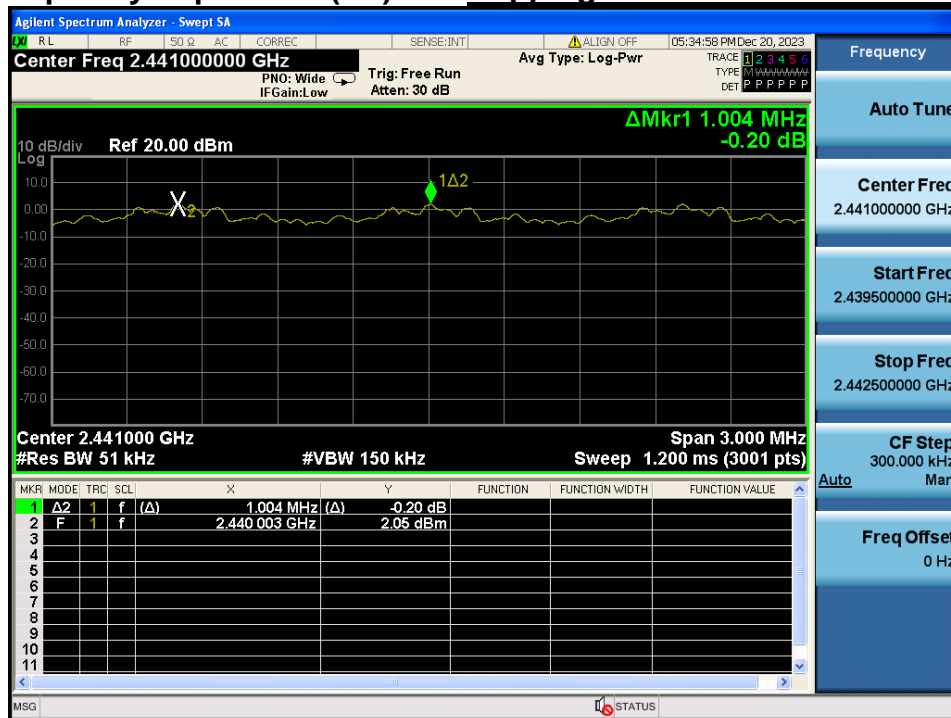


**Carrier Frequency Separation (FH) *Hopping mode : Enable&8DPSK***

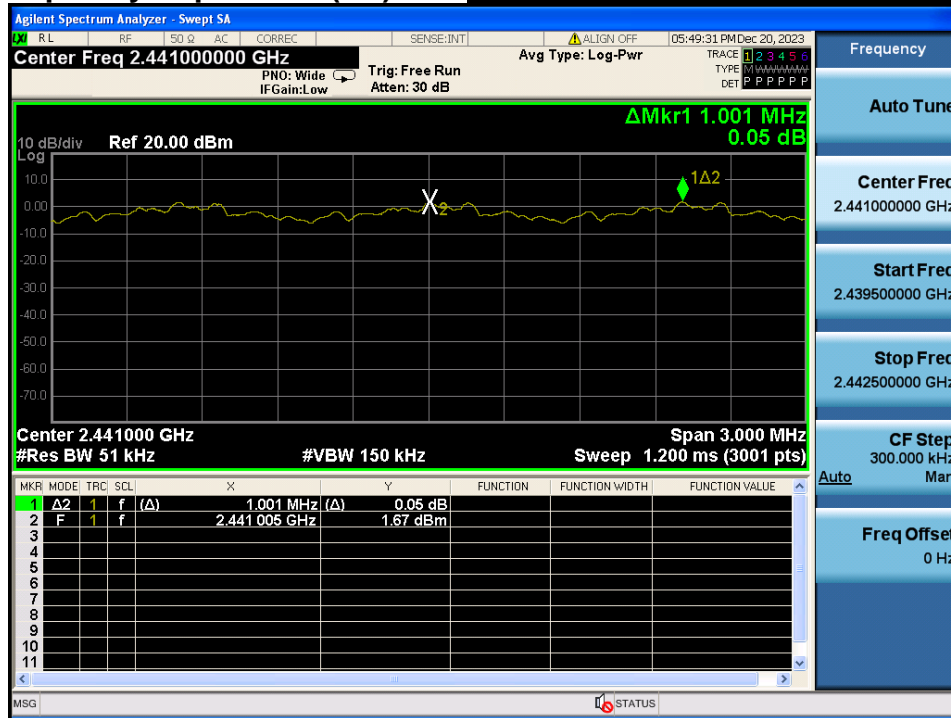


**Carrier Frequency Separation (AFH) *Hopping mode : Enable&GFSK***

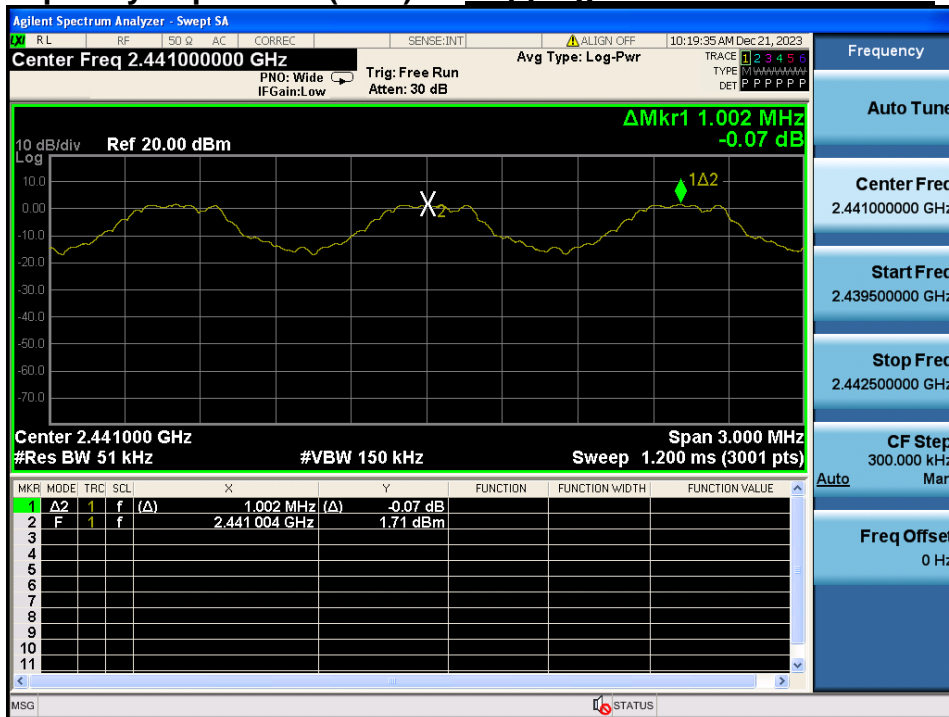

**Carrier Frequency Separation (AFH) *Hopping mode : Enable& $\pi/4$ DQPSK***

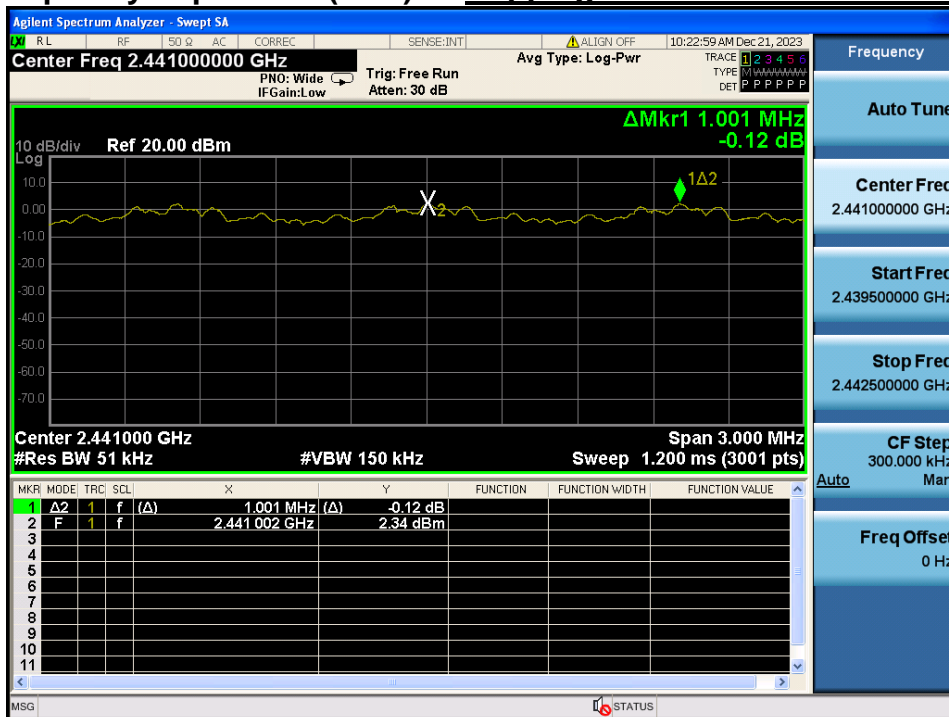

Carrier Frequency Separation (AFH) *Hopping mode : Enable&8DPSK*

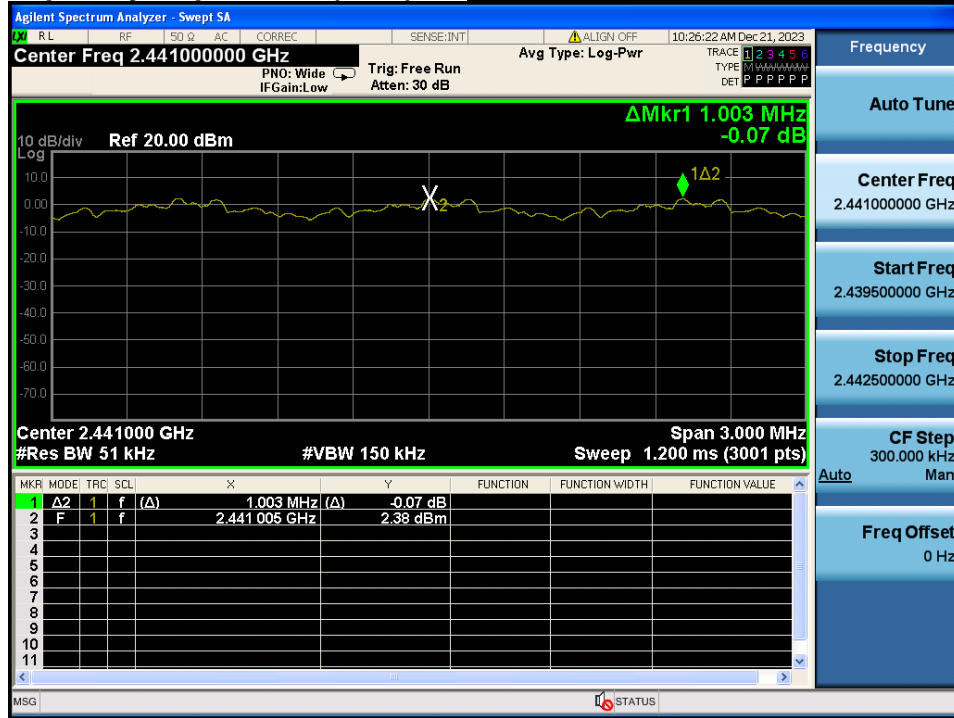

## 7. Number of Hopping Channels

### 7.1. Test Setup

Refer to the APPENDIX I.

### 7.2. Limit

Limit :  $\geq 15$  hops

### 7.3. Test Procedure

The number of hopping frequencies was measured with a spectrum analyzer connected to the antenna terminal, while EUT had its hopping function enabled.

To get higher resolution, two frequency ranges for FH mode within the 2 400 MHz ~ 2 483.5 MHz were examined.

The spectrum analyzer is set to :

Span for FH mode = 50 MHz      Start Frequency = 2 391.5 MHz,      Stop Frequency = 2 441.5 MHz

Start Frequency = 2 441.5 MHz,      Stop Frequency = 2 491.5 MHz

Span for AFH mode = 30 MHz      Start Frequency = 2 426.0 MHz,      Stop Frequency = 2 456.0 MHz

RBW = To identify clearly the individual channels, set the RBW to less than 30 % of the channel spacing or the 20 dB bandwidth, whichever is smaller.

VBW  $\geq$  RBW      Sweep = auto

Detector function = peak      Trace = max hold

### 7.4. Test Results

#### FH mode

Hopping mode	Modulation	Test Result (Total Hops)
Enable	GFSK	79
	$\pi/4$ DQPSK	79
	8DPSK	79


#### AFH mode

Hopping mode	Modulation	Test Result (Total Hops)
Enable	GFSK	20
	$\pi/4$ DQPSK	20
	8DPSK	20

Note 1 : See next pages for actual measured spectrum plots.


Number of Hopping Channels 1(FH)

Hopping mode : Enable & GFSK

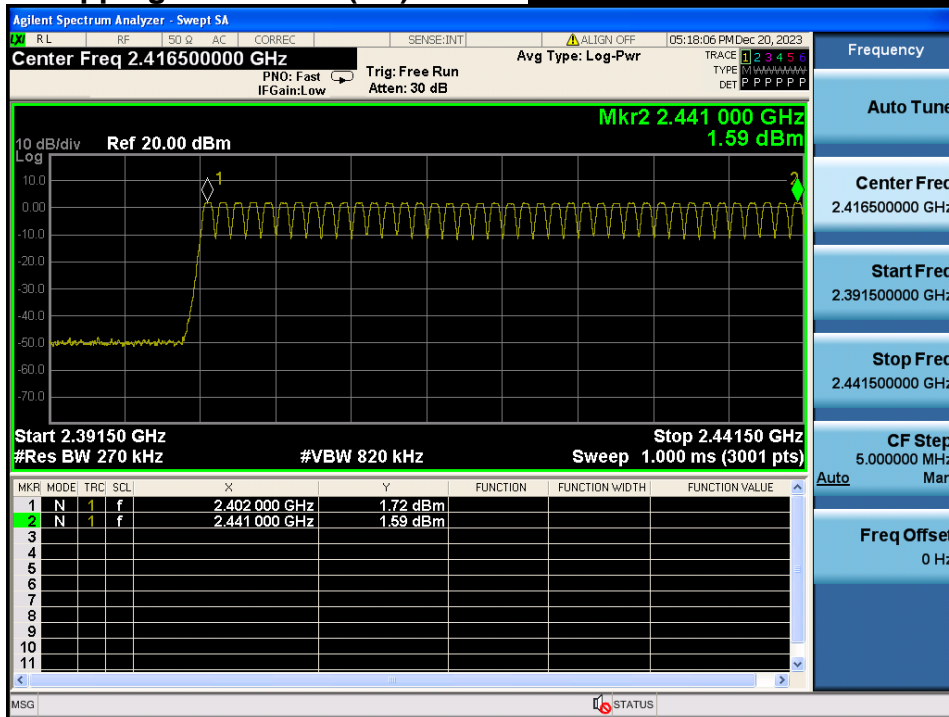


Number of Hopping Channels 2(FH)

Hopping mode : Enable & GFSK

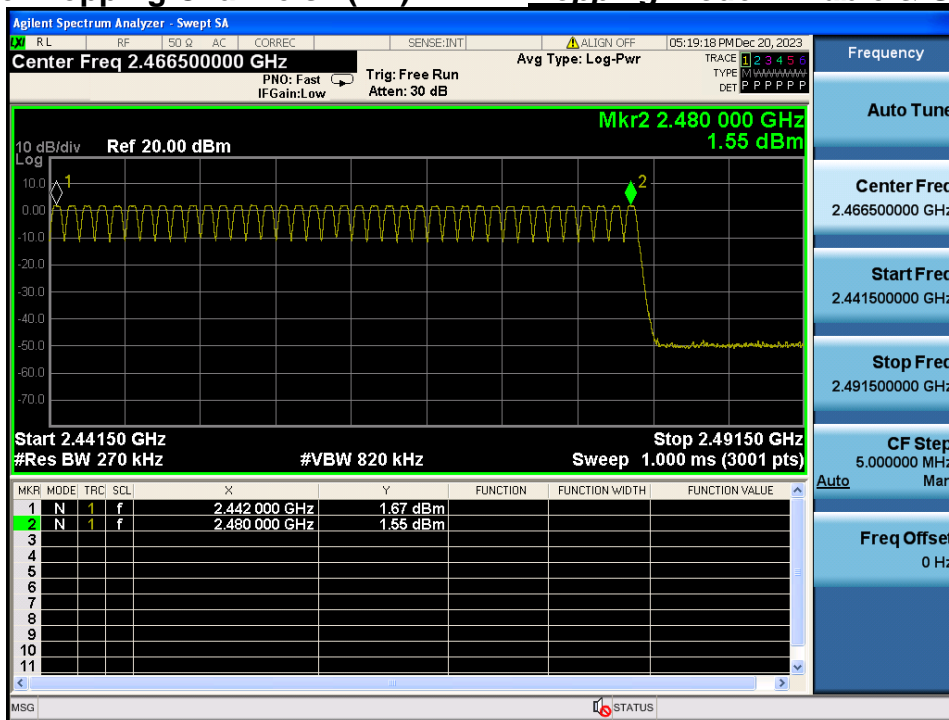


Number of Hopping Channels 1(FH)

Hopping mode : Enable &  $\pi/4$ DQPSK

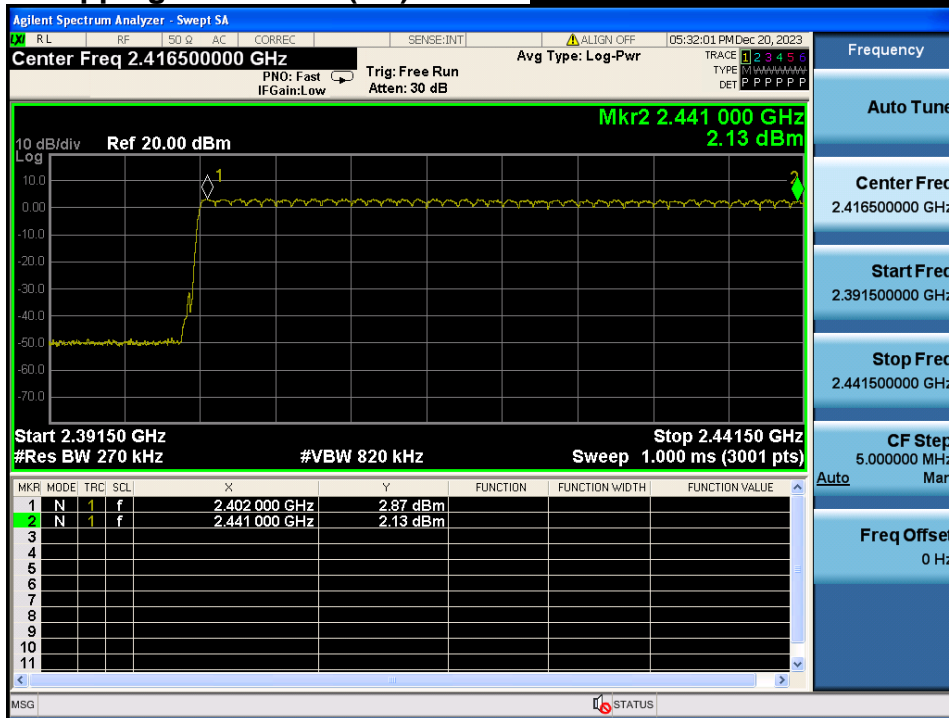


Number of Hopping Channels 2(FH)


Hopping mode : Enable &  $\pi/4$ DQPSK

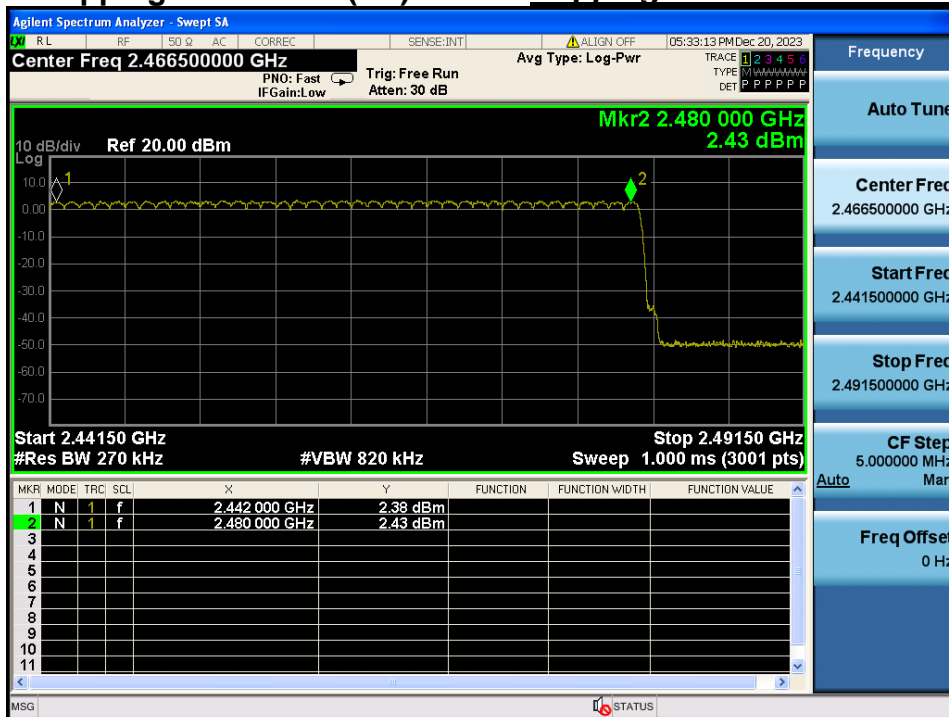

**Number of Hopping Channels 1(FH)      Hopping mode : Enable&8DPSK**

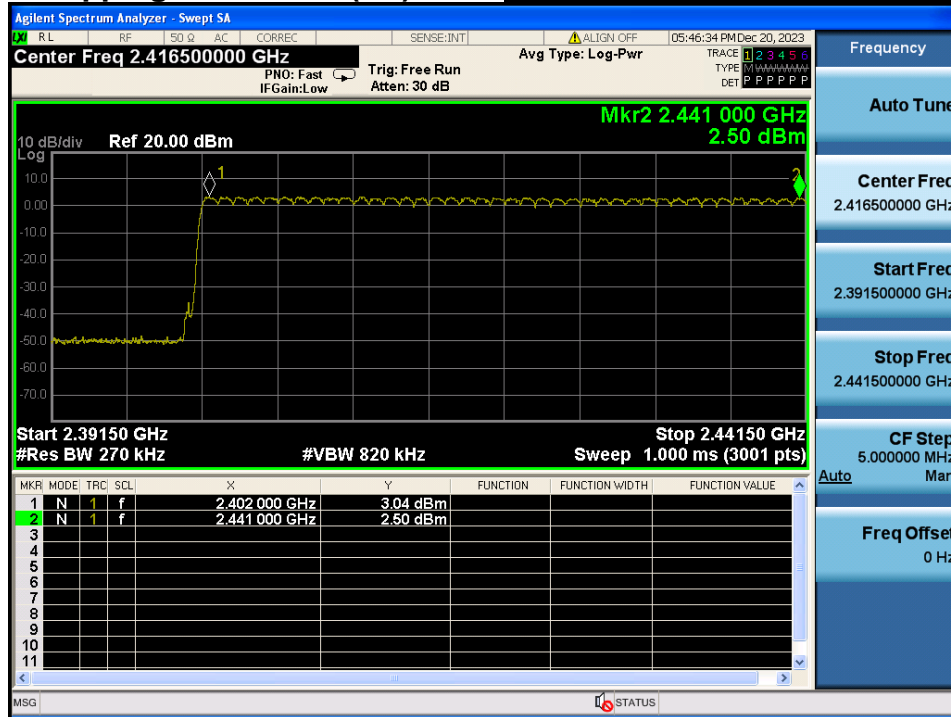


**Number of Hopping Channels 2(FH)      Hopping mode : Enable & 8DPSK**

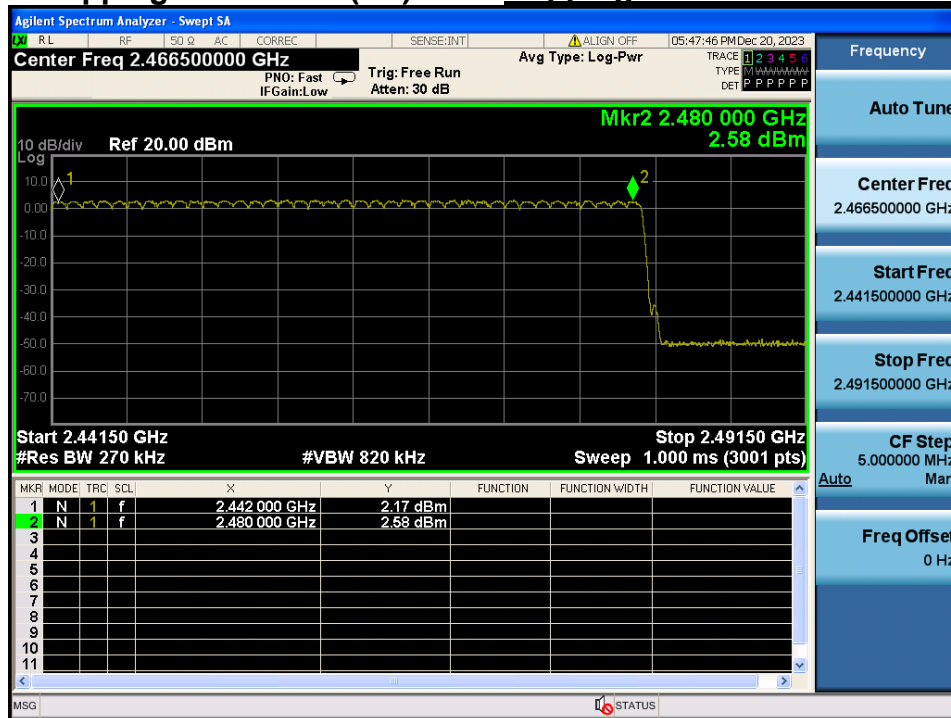




Number of Hopping Channels 1(AFH)

Hopping mode : Enable &GFSK

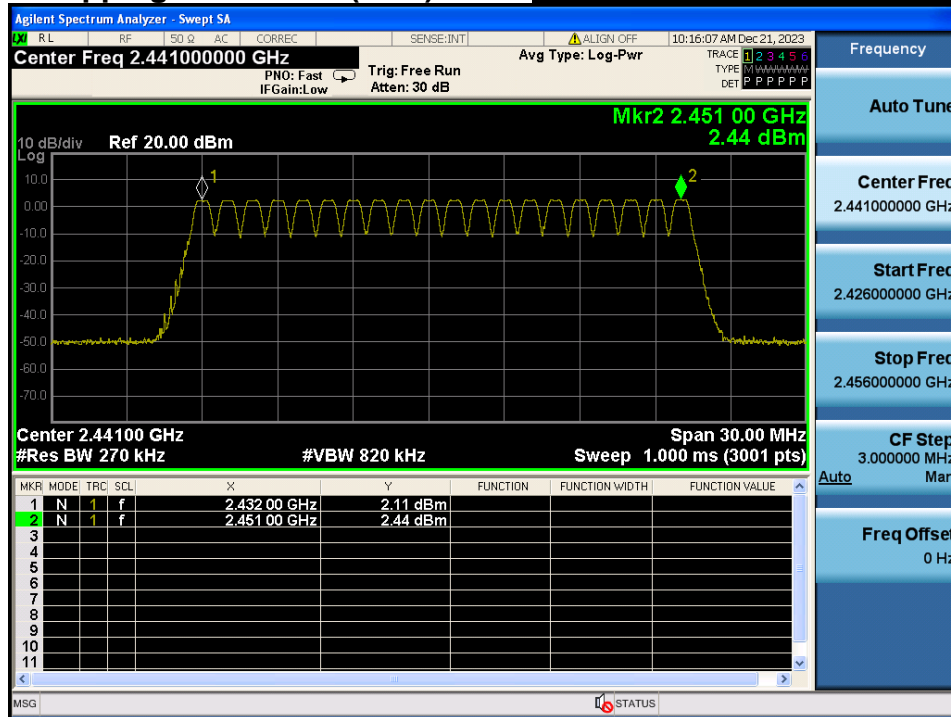


Number of Hopping Channels 1(AFH)

Hopping mode : Enable & $\pi/4$ DQPSK

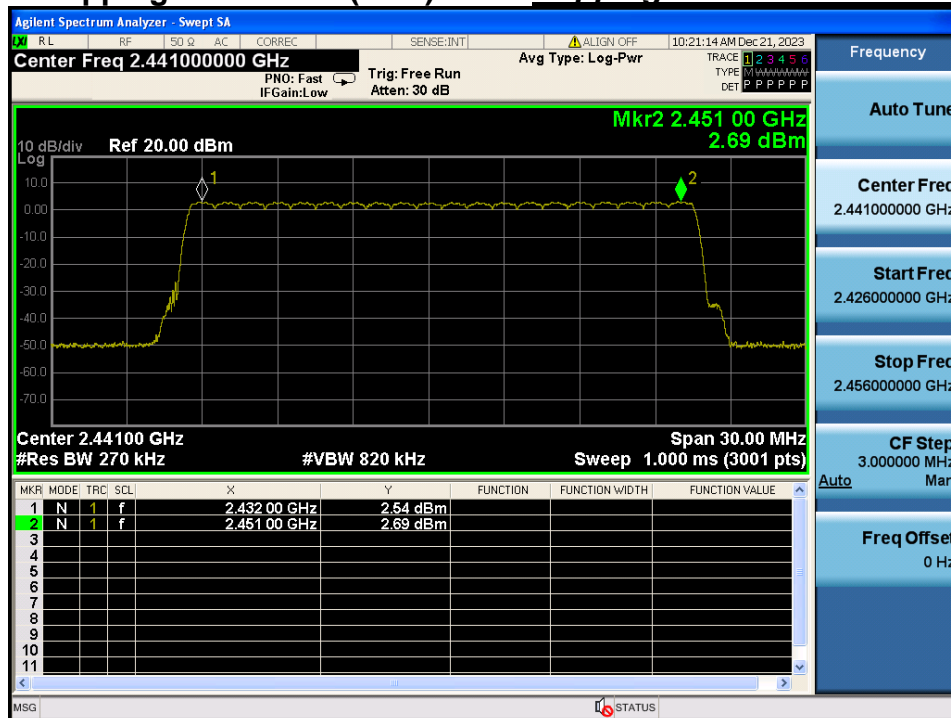

Number of Hopping Channels 1(AFH) *Hopping mode : Enable & 8DPSK*

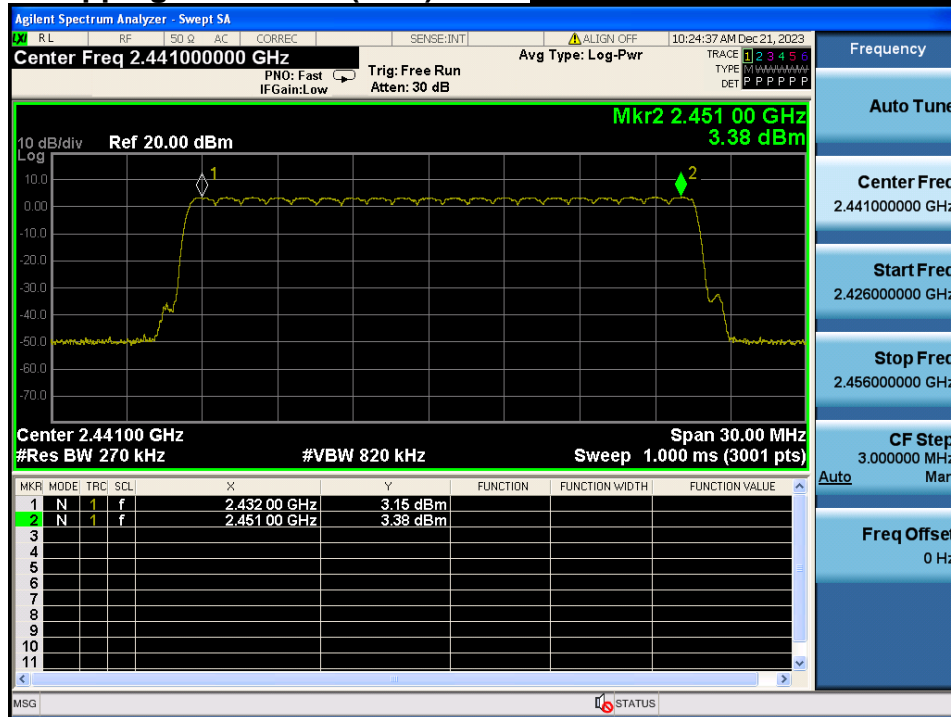

## 8. Time of Occupancy

### 8.1. Test Setup

Refer to the APPENDIX I.

### 8.2. Limit

The maximum permissible time of occupancy is 400 ms within a period of 400 ms multiplied by the number of hopping channels employed.

### 8.3. Test Procedure

The dwell time was measured with a spectrum analyzer connected to the antenna terminal, while EUT had its hopping function enabled.

The spectrum analyzer is set to :

Center frequency = 2 441 MHz

Span = zero

RBW = 1 MHz (RBW shall be  $\leq$  channel spacing and where possible RBW should be set  $\gg 1 / T$ , where T is the expected dwell time per channel)

VBW  $\geq$  RBW

Detector function = peak

Trace = max hold

### 8.4. Test Results

#### FH mode

Hopping mode	Packet Type	Number of hopping Channels	Burst On Time (ms)	Period (ms)	Test Result (sec)
Enable	DH 5	79	2.880	3.750	0.307
	2 DH 5	79	2.880	3.750	0.307
	3 DH 5	79	2.880	3.750	0.307

#### AFH mode

Hopping mode	Packet Type	Number of hopping Channels	Burst On Time (ms)	Period (ms)	Test Result (sec)
Enable	DH 5	20	2.880	3.750	0.154
	2 DH 5	20	2.880	3.750	0.154
	3 DH 5	20	2.880	3.750	0.154


Note 1 : Dwell Time =  $0.4 \times \text{Hopping channel} \times \text{Burst ON time} \times ((\text{Hopping rate} \div \text{Time slots}) \div \text{Hopping channel})$

- Time slots for DH5 = 6 slots (TX = 5 slots / RX = 1 slot)
- Hopping Rate = 1 600 for FH mode & 800 for AFH mode

Note 2 : See next pages for actual measured spectrum plots.


Time of Occupancy (FH)

Hopping mode : Enable&DH5

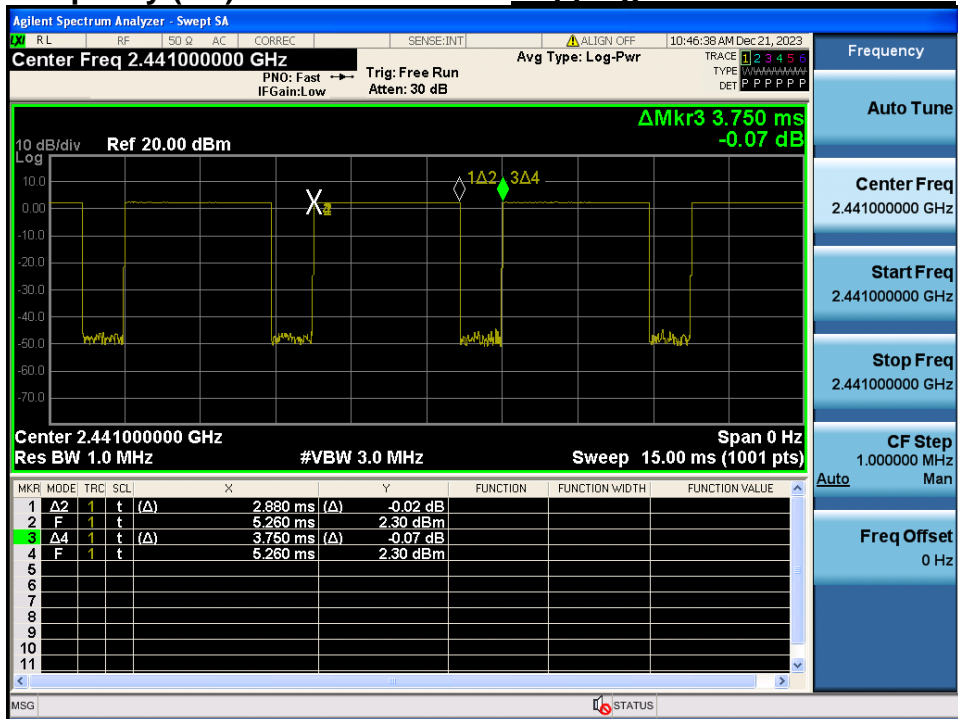


Time of Occupancy (FH)

Hopping mode : Enable&2-DH5

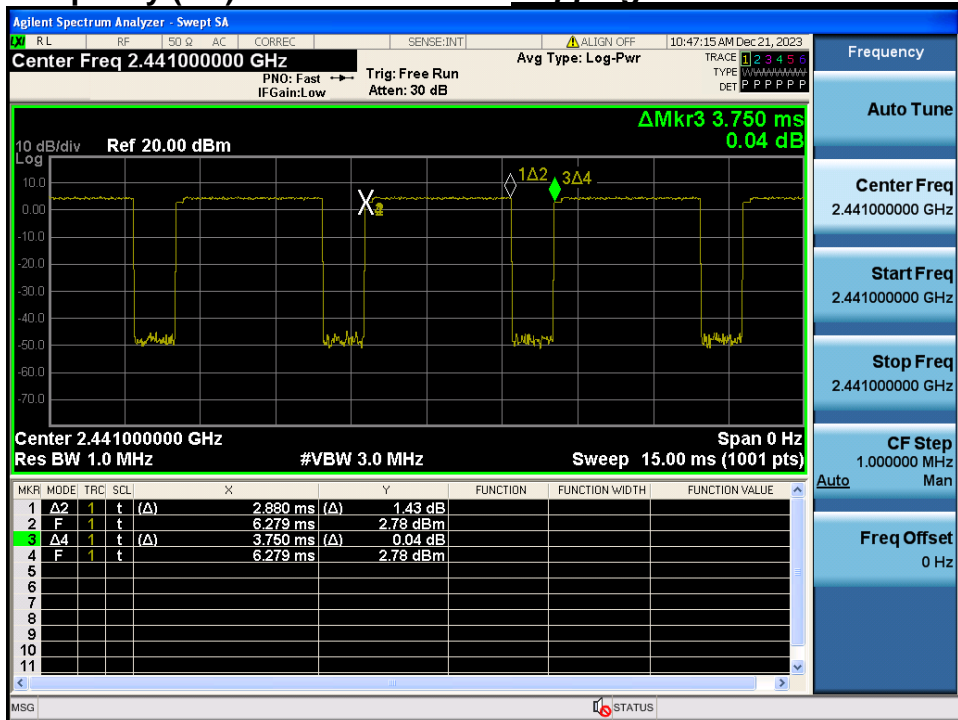


Time of Occupancy (FH)

Hopping mode : Enable&3-DH5

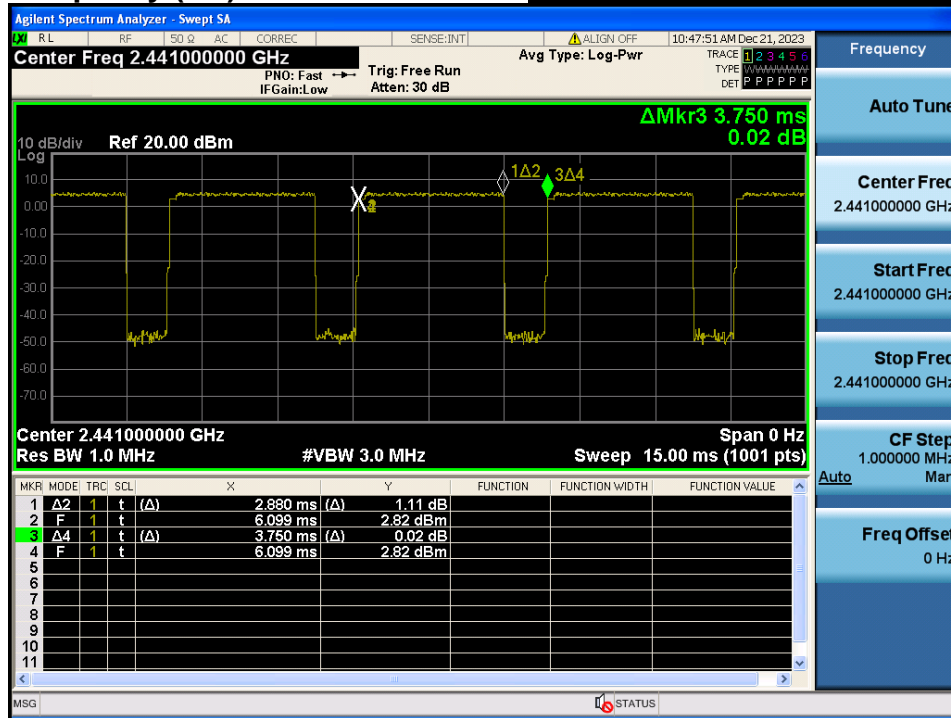


Time of Occupancy (AFH)

Hopping mode : Enable&DH5

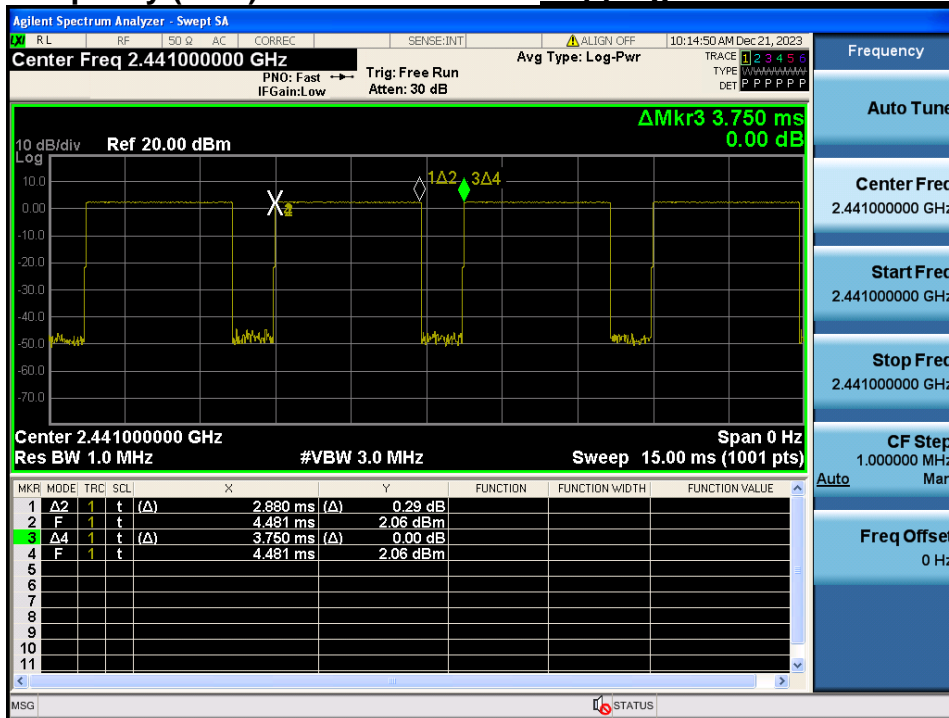


Time of Occupancy (AFH)

Hopping mode : Enable&2-DH5

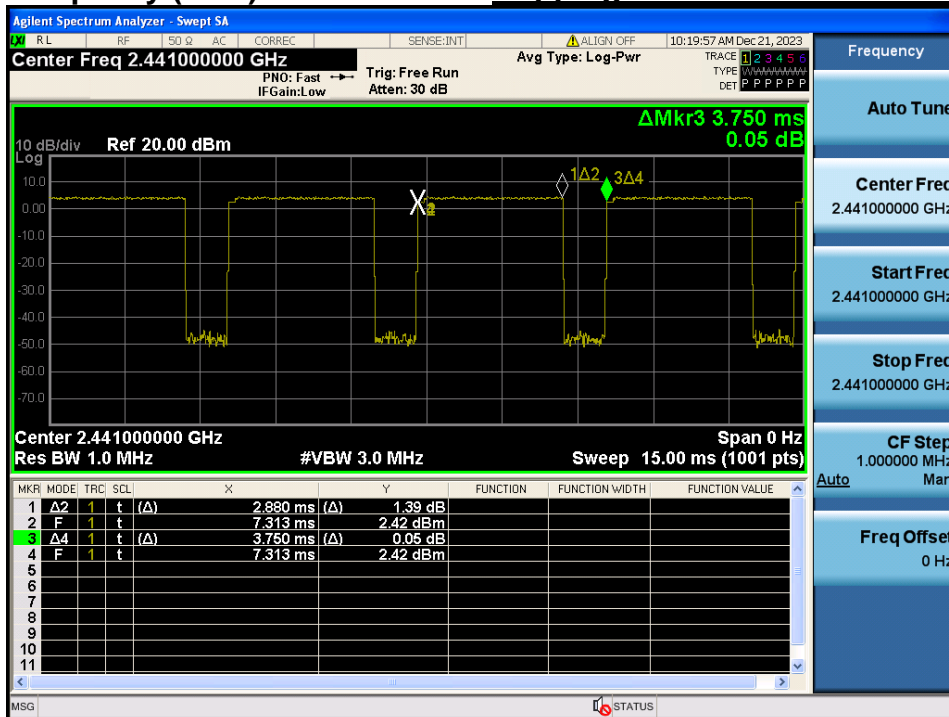

Time of Occupancy (AFH)

Hopping mode : Enable&3-DH5

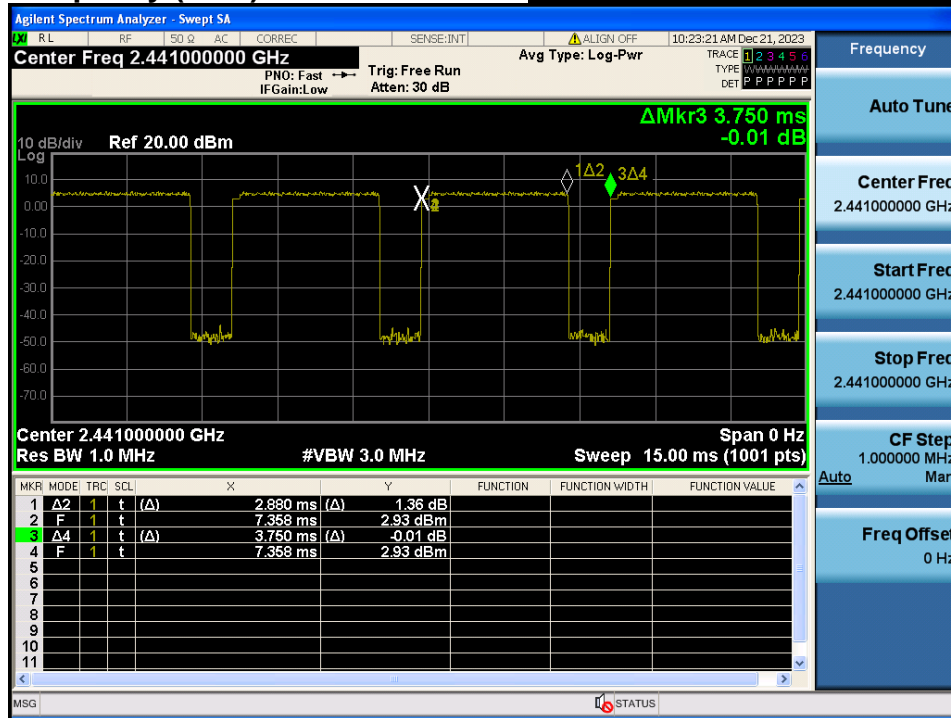

## 9. Unwanted Emissions

### 9.1. Test Setup

Refer to the APPENDIX I.

### 9.2. Limit

Part 15.247(d), Part 15.205, Part 15.209

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of Part 15.247 the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

#### - Part 15.209: General requirement

Frequency (MHz)	FCC Limit (uV/m)	Measurement Distance (m)
0.009 – 0.490	2 400 / F (kHz)	300
0.490 – 1.705	24 000 / F (kHz)	30
1.705 – 30.0	30	30

Frequency (MHz)	FCC Limit (uV/m)	Measurement Distance (m)
30 ~ 88	100 **	3
88 ~ 216	150 **	3
216 ~ 960	200 **	3
Above 960	500	3

\*\*Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this part, e.g., §15.231 and 15.241.