



MEASUREMENT REPORT

FCC PART 15.249 / RSS-210

FCC ID: BRWBLH1301
IC: 6157A-BLH1301
Application: Horizon Hobby, LLC
Application Type: Certification
Product: Flight Control Board: Nano S2
Model No.: BLH1301
Brand Name: Blade
FCC Classification: Part 15 low power transceiver, RX verified (DXT)
FCC Rule Part(s): Part 15.249
IC Rule(s): RSS-210 Issue 9, RSS-GEN Issue 5
Test Procedure(s): ANSI C63.10 - 2013
Test Date: October 22 ~ November 05, 2018

Reviewed By: *Sunny Sun*

(Sunny Sun)

Approved By: *Robin Wu*

(Robin Wu)



The test results relate only to the samples tested.

This equipment has been shown to be capable of compliance with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in ANSI C63.10-2013. Test results reported herein relate only to the item(s) tested.

The test report shall not be reproduced except in full without the written approval of MRT Technology (Suzhou) Co., Ltd.

Revision History

Report No.	Version	Description	Issue Date	Note
18010RSU018-U1	Rev. 01	Initial Report	11-17-2018	Valid

CONTENTS

Description	Page
1. INTRODUCTION	6
1.1. Scope	6
1.2. MRT Test Location	6
2. PRODUCT INFORMATION	7
2.1. Equipment Description.....	7
2.2. Operation Frequency and Channel List.....	7
2.3. Test Configuration.....	8
2.4. EMI Suppression Device(s)/Modifications	8
2.5. Labeling Requirements	8
3. DESCRIPTION OF TEST	9
3.1. Evaluation Procedure	9
3.2. AC Line Conducted Emissions	9
3.3. Radiated Emissions	10
4. ANTENNA REQUIREMENTS.....	11
5. TEST EQUIPMENT CALIBRATION DATE	12
6. MEASUREMENT UNCERTAINTY.....	13
7. TEST RESULT	14
7.1. Summary	14
7.2. Conducted Emission.....	15
7.2.1. Test Limit	15
7.2.2. Test Setup.....	15
7.2.3. Test Result.....	15
7.3. Radiated Emission.....	16
7.3.1. Test Limit	16
7.3.2. Test Setup.....	17
7.3.3. Test Result.....	18
7.4. Radiated Restricted Band Edge Measurement	23
7.4.1. Test Limit	23
7.4.2. Test Setup.....	26
7.4.3. Test Result.....	27
7.5. 20dB Spectrum Bandwidth Measurement	31
7.5.1. Test Limit	31
7.5.2. Test Procedure used	31

7.5.3.	Test Setting.....	31
7.5.4.	Test Setup.....	31
7.5.5.	Test Result.....	32
7.6.	99% Bandwidth Measurement	33
7.6.1.	Test Limit	33
7.6.2.	Test Procedure used.....	33
7.6.3.	Test Setting.....	33
7.6.4.	Test Setup.....	33
7.6.5.	Test Result.....	34
8.	CONCLUSION.....	35
	Appendix A - Test Setup Photograph	36
	Appendix B - EUT Photograph.....	37

§2.1033 General Information

Applicant:	Horizon Hobby, LLC		
Applicant Address:	4105 Fieldstone Rd., Champaign, IL 61822 USA		
Manufacturer:	Horizon Hobby, LLC		
Manufacturer Address:	4105 Fieldstone Rd., Champaign, IL 61822 USA		
Test Site:	MRT Technology (Suzhou) Co., Ltd		
Test Site Address:	D8 Building, No.2 Tian'edang Rd., Wuzhong Economic Development Zone, Suzhou, China		
FCC Registration No.:	893164		
IC Registration No.:	11384A-1		
Test Device Serial No.:	N/A	<input type="checkbox"/> Production	<input checked="" type="checkbox"/> Pre-Production <input type="checkbox"/> Engineering

Test Facility / Accreditations

Measurements were performed at MRT Laboratory located in Tian'edang Rd., Suzhou, China.

- MRT facility is a FCC registered (MRT Reg. No. 893164) test facility with the site description report on file and has met all the requirements specified in ANSI C63.4-2014.
- MRT facility is an IC registered (MRT Reg. No. 11384A-1) test laboratory with the site description on file at Industry Canada.
- MRT facility is a VCCI registered (R-20025, G-20034, C-20020, T-20020) test laboratory with the site description on file at VCCI Council.
- MRT Lab is accredited to ISO 17025 by the American Association for Laboratory Accreditation (A2LA) under the American Association for Laboratory Accreditation Program (A2LA Cert. No. 3628.01) in EMC, Telecommunications, Radio and SAR testing.



1. INTRODUCTION

1.1. Scope

Measurement and determination of electromagnetic emissions (EMC) of radio frequency devices including intentional and/or unintentional radiators for compliance with the technical rules and regulations of the Federal Communications Commission and the Industry Canada Certification and Engineering Bureau.

1.2. MRT Test Location

The map below shows the location of the MRT LABORATORY, its proximity to the Taihu Lake. These measurement tests were conducted at the MRT Technology (Suzhou) Co., Ltd. Facility located at D8 Building, No.2 Tian'edang Rd., Wuzhong Economic Development Zone, Suzhou, China. The measurement facility compliant with the test site requirements specified in ANSI C63.4-2014.



2. PRODUCT INFORMATION

2.1. Equipment Description

Product Name :	Flight Control Board: Nano S2
Model No.:	BLH1301
Brand Name:	Blade
Power Supply:	By Li-Polymer Battery
Battery Specification:	3.7V, 150mAh, 5Wh
Working Temperature:	-10°C ~ 40°C
Frequency Range:	2404 ~ 2476 MHz
Type of Modulation:	GFSK
Antenna Gain:	1dBi

2.2. Operation Frequency and Channel List

Channel	Frequency	Channel	Frequency
01	2404 MHz	02	2412 MHz
03	2416 MHz	04	2418 MHz
05	2422 MHz	06	2424 MHz
07	2426 MHz	08	2428 MHz
09	2430 MHz	10	2432 MHz
11	2434 MHz	12	2438 MHz
13	2440 MHz	14	2444 MHz
15	2452 MHz	16	2460 MHz
17	2462 MHz	18	2464 MHz
19	2466 MHz	20	2468 MHz
21	2470 MHz	22	2472 MHz
23	2476 MHz	---	---

Note: The engineer test sample was provided by the manufacturer, it was configured into fixed frequency T_x status after power on.

2.3. Test Configuration

The EUT was tested as described in this report is in compliance with the requirements limits of FCC Rules Part 15.207, 15.209, 15.215 and 15.249. ANSI C63.10-2013 was used to reference the appropriate EUT setup for radiated spurious emissions testing and AC line conducted testing.

2.4. EMI Suppression Device(s)/Modifications

No EMI suppression device(s) were added and/or no modifications were made during testing.

2.5. Labeling Requirements

Per 2.1074 & 15.19; Docket 95-19

The label shall be permanently affixed at a conspicuous location on the device; instruction manual or pamphlet supplied to the user and be readily visible to the purchaser at the time of purchase. However, when the device is so small wherein placement of the label with specified statement is not practical, only the FCC ID must be displayed on the device per Section 15.19(a)(5). Please see attachment for FCC ID label and label location.

RSP-100 Issue 11 Section 3

The manufacturer, importer or distributor shall meet the labeling requirements set out in this section for every unit:

- (i) prior to marketing in Canada, for products manufactured in Canada
- (ii) prior to importation into Canada, for imported products

For information regarding the e-labeling option, see Notice 2014–DRS1003. The label for the certified product represents the manufacturer's or importer's compliance with Innovation, Science and Economic Development Canada's (ISED) regulatory requirements.

Please see attachment for IC label and label location.

3. DESCRIPTION OF TEST

3.1. Evaluation Procedure

The measurement procedures described in the American National Standard for Testing Unlicensed Wireless Devices (ANSI C63.10-2013), and the requirements provided in FCC 15.207, 15.209, 15.215 and 15.249 were performed in the report of the EUT.

Deviation from measurement procedure.....None

3.2. AC Line Conducted Emissions

The line-conducted facility is located inside an 8'x4'x4' shielded enclosure. A 1m x 2m wooden table 80cm high is placed 40cm away from the vertical wall and 80cm away from the sidewall of the shielded room. Two 10kHz-30MHz, 50Ω/50uH Line-Impedance Stabilization Networks (LISNs) are bonded to the shielded room floor. Power to the LISNs is filtered by external high-current high-insertion loss power line filters. These filters attenuate ambient signal noise from entering the measurement lines. These filters are also bonded to the shielded enclosure.

The EUT is powered from one LISN and the support equipment is powered from the second LISN. All interconnecting cables more than 1 meter were shortened to a 1 meter length by non-inductive bundling (serpentine fashion) and draped over the back edge of the test table. All cables were at least 40cm above the horizontal reference ground-plane. Power cables for support equipment were routed down to the second LISN while ensuring that that cables were not draped over the second LISN.

Sufficient time for the EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition. The RF output of the LISN was connected to the receiver and exploratory measurements were made to determine the frequencies producing the maximum emission from the EUT. The receiver was scanned from 150kHz to 30MHz. The detector function was set to peak mode for exploratory measurements while the bandwidth of the analyzer was set to 9kHz. The EUT, support equipment, and interconnecting cables were arranged and manipulated to maximize each emission. Each emission was also maximized by varying: power lines, the mode of operation or data exchange speed, or support equipment whichever determined the worst-case emission. Once the worst case emissions have been identified, the one EUT cable configuration/arrangement and mode of operation that produced these emissions are used for final measurements on the same test site. The analyzer is set to CISPR quasi-peak and average detectors with a 9kHz resolution bandwidth for final measurements.

An extension cord was used to connect to a single LISN which powered by EUT. The extension cord was calibrated with LISN, the impedance and insertion loss are compliance with the requirements as stated in ANSI C63.10-2013.

3.3. Radiated Emissions

The radiated test facilities consisted of an indoor 3 meter semi-anechoic chamber used for final measurements and exploratory measurements, when necessary. The measurement area is contained within the semi-anechoic chamber which is shielded from any ambient interference. For measurements above 1GHz absorbers are arranged on the floor between the turn table and the antenna mast in such a way so as to maximize the reduction of reflections. For measurements below 1GHz, the absorbers are removed. A MF Model 210SS turntable is used for radiated measurement. It is a continuously rotatable, remote controlled, metallic turntable and 2 meters (6.56 ft.) in diameter. The turn table is flush with the raised floor of the chamber in order to maintain its function as a ground plane. An 80cm high PVC support structure is placed on top of the turntable.

For all measurements, the spectrum was scanned through all EUT azimuths and from 1 to 4 meter receive antenna height using a broadband antenna from 30MHz up to the upper frequency shown in 15.33(b)(1) depending on the highest frequency generated or used in the device or on which the device operates or tunes. For frequencies above 1GHz, linearly polarized double ridge horn antennas were used. For frequencies below 30MHz, a calibrated loop antenna was used. When exploratory measurements were necessary, they were performed at 1 meter test distance inside the semi-anechoic chamber using broadband antennas, broadband amplifiers, and spectrum analyzers to determine the frequencies and modes producing the maximum emissions. Sufficient time for the EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition. The test set-up for frequencies below 1GHz was placed on top of the 0.8 meter high, 1 x 1.5 meter table; and test set-up for frequencies 1-25GHz was placed on top of the 1.5 meter high, 1 x 1.5 meter table. The EUT, support equipment, and interconnecting cables were arranged and manipulated to maximize each emission. Appropriate precaution was taken to ensure that all emissions from the EUT were maximized and investigated. The system configuration, clock speed, mode of operation or video resolution, if applicable, turntable azimuth, and receive antenna height was noted for each frequency found.

Final measurements were made in the semi-anechoic chamber using calibrated, linearly polarized broadband and horn antennas. The test setup was configured to the setup that produced the worst case emissions. The spectrum analyzer was set to investigate all frequencies required for testing to compare the highest radiated disturbances with respect to the specified limits. The turntable containing the EUT was rotated through 360 degrees and the height of the receive antenna was varied 1 to 4 meters and stopped at the azimuth and height producing the maximum emission. Each emission was maximized by changing the orientation of the EUT through three orthogonal planes and changing the polarity of the receive antenna, whichever produced the worst-case emissions. According to 3dB Beam-Width of horn antenna, the horn antenna should be always directed to the EUT when rising height.

4. ANTENNA REQUIREMENTS

Excerpt from §15.203 of the FCC Rules/Regulations:

“An intentional radiator antenna shall be designed to ensure that no antenna other than that furnished by the responsible party can be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.”

- The antenna of the EUT is **permanently attached**.
- There are no provisions for connection to an external antenna.

Conclusion:

This unit complies with the requirement of §15.203.

5. TEST EQUIPMENT CALIBRATION DATE

Conducted Emissions - SR2

Instrument	Manufacturer	Type No.	Asset No.	Cali. Interval	Cali. Due Date
EMI Test Receiver	R&S	ESR3	MRTSUE06185	1 year	2019/04/20
Two-Line V-Network	R&S	ENV216	MRTSUE06002	1 year	2019/06/15
Two-Line V-Network	R&S	ENV216	MRTSUE06003	1 year	2019/06/15
Temperature/Humidity Meter	Testo	608-H1	MRTSUE06404	1 year	2019/08/15
Shielding Anechoic Chamber	Mikebang	Chamber-SR2	MRTSUE06214	N/A	N/A

Radiated Emission - AC1

Instrument	Manufacturer	Type No.	Asset No.	Cali. Interval	Cal. Due Date
Spectrum Analyzer	Keysight	N9030B	MRTSUE06395	1 year	2019/09/06
EMI Test Receiver	R&S	ESR7	MRTSUE06001	1 year	2019/08/14
Loop Antenna	Schwarzbeck	FMZB 1519	MRTSUE06025	1 year	2018/11/20
Bilog Period Antenna	Schwarzbeck	VULB 9168	MRTSUE06172	1 year	2019/04/12
Horn Antenna	Schwarzbeck	BBHA9120D	MRTSUE06023	1 year	2019/10/20
Broadband Horn Antenna	Schwarzbeck	BBHA9170	MRTSUE06024	1 year	2018/12/14
Microwave System Amplifier	Agilent	83017A	MRTSUE06076	1 year	2018/11/16
Preamplifier	Schwarzbeck	BBV 9721	MRTSUE06121	1 year	2019/06/13
Temperature/Humidity Meter	Testo	608-H1	MRTSUE06403	1 year	2019/08/15
Anechoic Chamber	TDK	Chamber-AC1	MRTSUE06212	1 year	2019/05/02

Conducted Test Equipment - TR3

Instrument	Manufacturer	Type No.	Asset No.	Cali. Interval	Cali. Due Date
Spectrum Analyzer	Keysight	N9030B	MRTSUE06395	1 year	2019/09/06
Thermohygrometer	Testo	608-H1	MRTSUE06401	1 year	2019/08/15

Software	Version	Function
e3	V8.3.5	EMI Test Software

6. MEASUREMENT UNCERTAINTY

Where relevant, the following test uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k = 2$.

AC Conducted Emission Measurement - SR2
Measuring Uncertainty for a Level of Confidence of 95% ($U=2Uc(y)$): 150kHz~30MHz: $\pm 3.46\text{dB}$
Radiated Emission Measurement - AC1
Measuring Uncertainty for a Level of Confidence of 95% ($U=2Uc(y)$): Horizontal: 30MHz~300MHz: $\pm 4.07\text{dB}$ 300MHz~1GHz: $\pm 3.63\text{dB}$ 1GHz~18GHz: $\pm 4.16\text{dB}$ Vertical: 30MHz~300MHz: $\pm 4.18\text{dB}$ 300MHz~1GHz: $\pm 3.60\text{dB}$ 1GHz~18GHz: $\pm 4.76\text{dB}$
20dB Spectrum Bandwidth - TR3
Measuring Uncertainty for a Level of Confidence of 95% ($U=2Uc(y)$): 0.28%

7. TEST RESULT

7.1. Summary

Company Name: Horizon Hobby, LLC

Product: Flight Control Board: Nano S2

RSS Section(s)	FCC Part Section(s)	Test Description	Test Limit	Test Condition	Test Result	Reference
RSS-Gen Clause 8.8	15.207	AC Conducted Emissions 150kHz - 30MHz	< FCC 15.207 limits	Line Conducted	N/A	Section 7.2
RSS-Gen Clause 8.9; RSS-210 Annex A B.10	15.209 15.249	General Field Strength Limits (Restricted Bands and Radiated Emission Limits)	Emissions in restricted bands must meet the radiated limits detailed in 15.209	Radiated	Pass	Section 7.3 & 7.4
N/A	15.215(c)	20dB Spectrum Bandwidth	20 dB bandwidth of the emission in the specific band		Pass	Section 7.5
RSS-GEN Clause 6.7	N/A	99% Occupied Bandwidth	N/A		Pass	Section 7.6

Notes:

1. All modes of operation and data rates were investigated. For radiated emission test, every axis (X, Y, Z) was also verified. The test results shown in the following sections represent the worst case emissions.
2. The analyzer plots shown in this section were all taken with a correction table loaded into the analyzer. The correction table was used to account for the losses of the cables and attenuators used as part of the system to connect the EUT to the analyzer at all frequencies of interest.

7.2. Conducted Emission


7.2.1. Test Limit

FCC 15.207 & RSS-Gen Limits		
Frequency (MHz)	QP (dBuV)	AV (dBuV)
0.15 ~ 0.50	66 ~ 56	56 ~ 46
0.50 ~ 5.0	56	46
5.0 ~ 30	60	50

Note 1: The lower limit shall apply at the transition frequencies.

Note 2: The limit decreases linearly with the logarithm of the frequency in the range 0.15MHz to 0.5MHz.

7.2.2. Test Setup

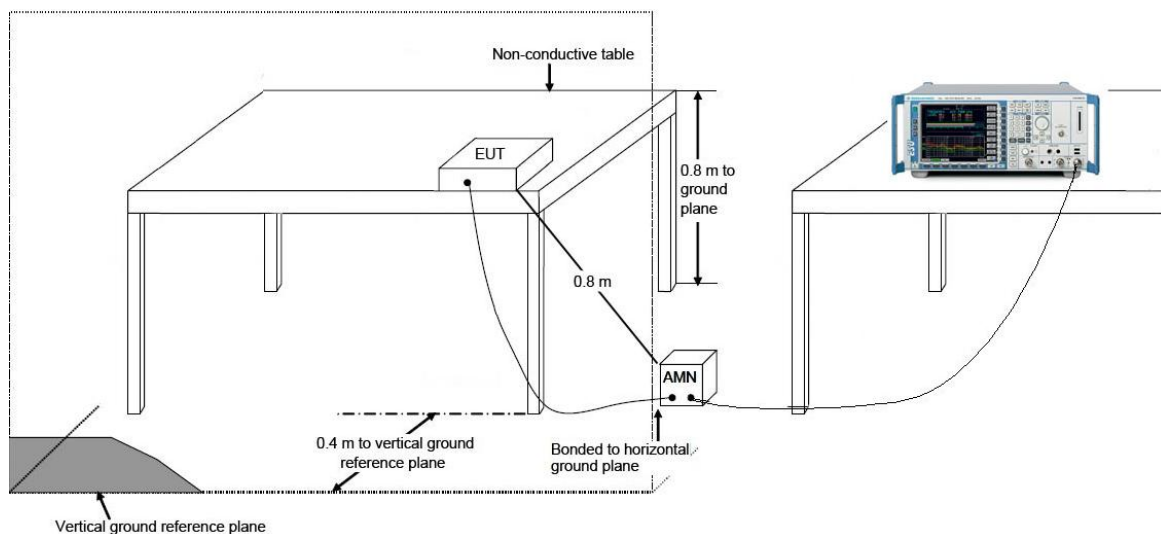

7.2.3. Test Result

The EUT is powered by battery, so this requirement does not apply.

7.3. Radiated Emission

7.3.1. Test Limit

FCC Part 15 Subpart C Paragraph 15.249 & RSS-210		
Fundamental Frequency (MHz)	Field Strength of Fundamental (mV/m)	Field Strength of Harmonics (uV/m)
902 ~ 908	50	500
2400 ~ 2483.5	50	500
5725 ~ 5875	50	500
24000 ~ 24250	250	2500


Note: FCC Part 15.249 (d), Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50 dB below the level of the fundamental or to the general radiated emission limits in §15.209, whichever is the lesser attenuation.

FCC Part 15 Subpart C Paragraph 15.209 & RSS-Gen		
Frequency (MHz)	Field Strength (uV/m)	Measurement Distance (m)
0.009 ~ 0.490	2400/F(kHz)	300
0.490 ~ 1.705	24000/F(kHz)	30
1.705 ~ 30.0	30	30
30 ~ 80	100**	3
80 ~ 216	150**	3
216 ~ 960	200**	3
Above 960	500	3


Note 1: The lower limit shall apply at the transition frequency.
 Note 2: Distance refers to the distance in meters between the measuring instrument antenna and the closed point of any part of the device or system.
 Note 3: E field strength (dBuV/m) = 20 log E field strength (uV/m).

7.3.2. Test Setup

Below 1GHz Test Setup:

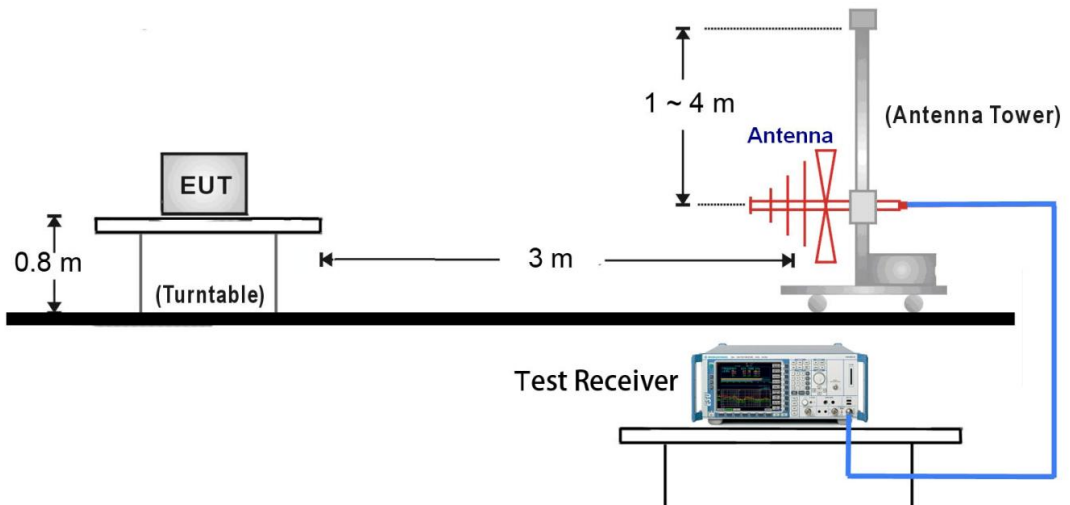

Above 1GHz Test Setup:

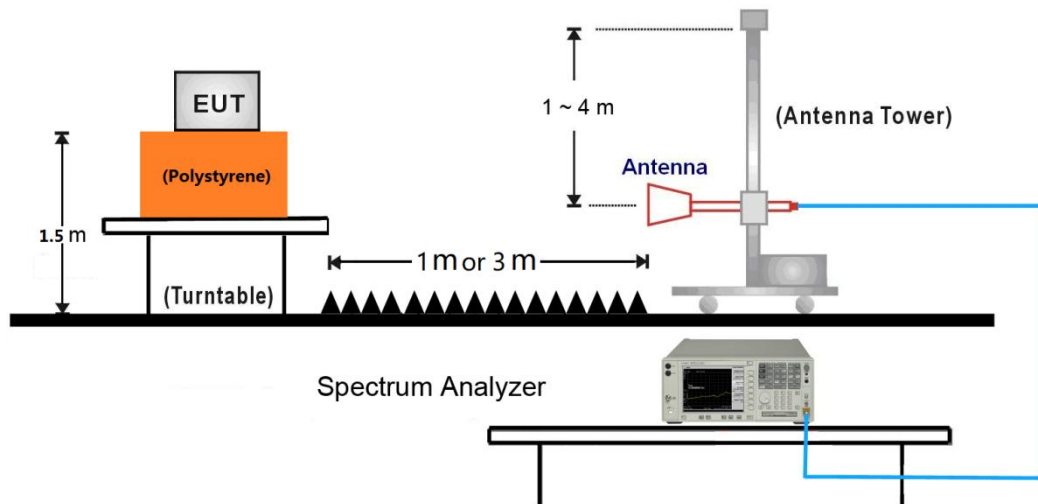


7.3.3. Test Result

Product	Flight Control Board: Nano S2	Temperature	25°C
Test Engineer	Snake Ni	Relative Humidity	58%
Test Site	AC1	Test Date	2018/10/24

Time On (ms)	One Period (ms)	Duty Cycle (%)	Duty Cycle Factor (dB)
0.3378	21.92	1.54	-36.2

Note: Duty Cycle Factor = $20 \cdot \log(\text{Duty Cycle})$

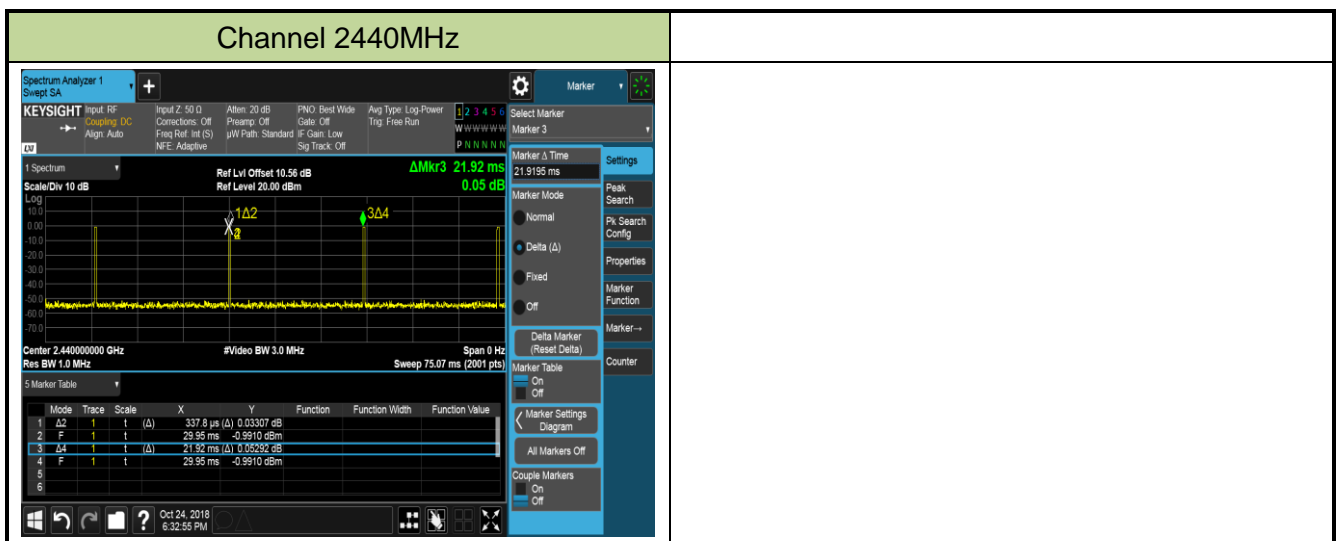

Product	Flight Control Board: Nano S2	Temperature	25°C
Test Engineer	Snake Ni	Relative Humidity	58%
Test Site	AC1	Test Date	2018/10/23
Remark:	Fundamental Radiated Emission		

Frequency (MHz)	Reading Level (dBμV)	Factor (dB)	Duty Cycle Factor (dB)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
2404	62.6	32.6	N/A	95.2	114.0	-18.8	PK	Horizontal
	62.6	32.6	-36.2	59.0	94.0	-35.0	AV	Horizontal
	64.4	32.6	N/A	97.0	114.0	-17.0	PK	Vertical
	64.4	32.6	-36.2	60.8	94.0	-33.2	AV	Vertical
2440	65.3	32.3	N/A	97.6	114.0	-16.4	PK	Horizontal
	65.3	32.3	-36.2	61.4	94.0	-32.6	AV	Horizontal
	65.3	32.3	N/A	97.6	114.0	-16.4	PK	Vertical
	65.3	32.3	-36.2	61.4	94.0	-32.6	AV	Vertical
2476	62.6	32.6	N/A	95.2	114.0	-18.8	PK	Horizontal
	62.6	32.6	-36.2	59.0	94.0	-35.0	AV	Horizontal
	62.8	32.6	N/A	95.4	114.0	-18.6	PK	Vertical
	62.8	32.6	-36.2	59.2	94.0	-34.8	AV	Vertical

Note 1: Peak Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Average Measure Level = Peak Measure Level + Duty Cycle Factor

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Note 2: All readings below 1GHz are peak, above 1GHz are performed with peak and/or average measurements as necessary.

Product	Flight Control Board: Nano S2	Temperature	25°C
Test Engineer	Snake Ni	Relative Humidity	58%
Test Site	AC1	Test Date	2018/10/24
Remark:	Harmonics Radiated Emission - 2404MHz		

Frequency (MHz)	Reading Level (dBμV)	Factor (dB)	Duty Cycle Factor (dB)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
413.2	3.4	17.0	N/A	20.4	46.0	-25.6	QP	Horizontal
810.4	3.8	23.4	N/A	27.2	46.0	-18.8	QP	Horizontal
442.3	3.6	17.7	N/A	21.3	46.0	-24.7	QP	Vertical
800.2	7.6	23.3	N/A	30.9	46.0	-15.1	QP	Vertical
4808.0	36.0	5.5	N/A	41.5	74.0 (Note 2)	-32.5	PK	Horizontal
7213.5	39.1	13.9	N/A	53.0	74.0 (Note 2)	-21.0	PK	Horizontal
8225.0	31.9	14.2	N/A	46.1	74.0 (Note 2)	-27.9	PK	Horizontal
10290.5	32.0	18.4	N/A	50.4	74.0 (Note 2)	-23.6	PK	Horizontal
4808.0	36.5	5.5	N/A	42.0	74.0 (Note 2)	-32.0	PK	Vertical
7213.5	37.4	13.9	N/A	51.3	74.0 (Note 2)	-22.7	PK	Vertical
8429.0	32.1	13.9	N/A	46.0	74.0 (Note 2)	-28.0	PK	Vertical
10299.0	32.3	18.4	N/A	50.7	74.0 (Note 2)	-23.3	PK	Vertical

Note 1: Peak Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Average Measure Level = Peak Measure Level + Duty Cycle Factor

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre Amplifier Gain (dB)

Note 2: Average measurement was not performed when the peak level lower than average limit.

Note 3: The test trace is same as the ambient noise (the test frequency range: 9 kHz ~ 30 MHz and 18 GHz ~ 25 GHz), therefore no data appear in the report.

Product	Flight Control Board: Nano S2	Temperature	25°C
Test Engineer	Snake Ni	Relative Humidity	58%
Test Site	AC1	Test Date	2018/10/24
Remark:	Harmonics Radiated Emission - 2440MHz		

Frequency (MHz)	Reading Level (dBμV)	Factor (dB)	Duty Cycle Factor (dB)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
472.8	3.0	18.2	N/A	21.2	46.0	-24.8	QP	Horizontal
805.0	10.6	23.4	N/A	34.0	46.0	-12.0	QP	Horizontal
343.8	3.3	15.4	N/A	18.7	46.0	-27.3	QP	Vertical
800.7	7.0	23.3	N/A	30.3	46.0	-15.7	QP	Vertical
4876.0	38.0	5.6	N/A	43.6	74.0 (Note 2)	-30.4	PK	Horizontal
6839.5	34.8	11.2	N/A	46.0	74.0 (Note 2)	-28.0	PK	Horizontal
7324.0	34.7	13.8	N/A	48.5	74.0 (Note 2)	-25.5	PK	Horizontal
10052.5	31.9	17.5	N/A	49.4	74.0 (Note 2)	-24.6	PK	Horizontal
4876.0	36.0	5.6	N/A	41.6	74.0 (Note 2)	-32.4	PK	Vertical
6474.0	33.5	10.1	N/A	43.6	74.0 (Note 2)	-30.4	PK	Vertical
7315.5	38.0	13.7	N/A	51.7	74.0 (Note 2)	-22.3	PK	Vertical
9942.0	31.7	17.5	N/A	49.2	74.0 (Note 2)	-24.8	PK	Vertical

Note 1: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Average Measure Level = Peak Measure Level + Duty Cycle Factor

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre Amplifier Gain (dB)

Note 2: Average measurement was not performed when the peak level lower than average limit.

Note 3: The test trace is same as the ambient noise (the test frequency range: 9 kHz ~ 30 MHz and 18 GHz ~ 25 GHz), therefore no data appear in the report.

Product	Flight Control Board: Nano S2	Temperature	25°C
Test Engineer	Snake Ni	Relative Humidity	58%
Test Site	AC1	Test Date	2018/10/24
Remark:	Harmonics Radiated Emission - 2476MHz		

Frequency (MHz)	Reading Level (dBμV)	Factor (dB)	Duty Cycle Factor (dB)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
482.0	1.6	18.3	N/A	19.9	46.0	-26.1	QP	Horizontal
807.9	3.9	23.4	N/A	27.3	46.0	-18.7	QP	Horizontal
501.9	2.9	18.6	N/A	21.5	46.0	-24.5	QP	Vertical
815.2	6.3	23.4	N/A	29.7	46.0	-16.3	QP	Vertical
4961.0	35.2	5.7	N/A	40.9	74.0 (Note 2)	-33.1	PK	Horizontal
6244.5	34.0	8.9	N/A	42.9	74.0 (Note 2)	-31.1	PK	Horizontal
7426.0	33.8	14.2	N/A	48.0	74.0 (Note 2)	-26.0	PK	Horizontal
10146.0	31.7	17.8	N/A	49.5	74.0 (Note 2)	-24.5	PK	Horizontal
4680.5	35.9	5.4	N/A	41.3	74.0 (Note 2)	-32.7	PK	Vertical
6270.0	33.7	9.0	N/A	42.7	74.0 (Note 2)	-31.3	PK	Vertical
7426.0	37.8	14.2	N/A	52.0	74.0 (Note 2)	-22.0	PK	Vertical
10222.5	32.3	18.1	N/A	50.4	74.0 (Note 2)	-23.6	PK	Vertical

Note 1: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Average Measure Level = Peak Measure Level + Duty Cycle Factor

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre Amplifier Gain (dB)

Note 2: Average measurement was not performed when the peak level lower than average limit.

Note 3: The test trace is same as the ambient noise (the test frequency range: 9 kHz ~ 30 MHz and 18 GHz ~ 25 GHz), therefore no data appear in the report.

7.4. Radiated Restricted Band Edge Measurement

7.4.1. Test Limit

For 15.205 requirement:

Radiated emissions which fall in the restricted bands, as defined in Section 15.205(a) of FCC part 15, must also comply with the radiated emission limits specified in Section 15.209(a).

Frequency (MHz)	Frequency (MHz)	Frequency (MHz)	Frequency (GHz)
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
¹ 0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 - 156.52525	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.7 - 156.9	2690 - 2900	22.01 - 23.12
8.41425 - 8.41475	162.0125 - 167.17	3260 - 3267	23.6 - 24.0
12.29 - 12.293	167.72 - 173.2	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	240 - 285	3345.8 - 3358	36.43 - 36.5
12.57675 - 12.57725	322 - 335.4	3600 - 4400	(²)
13.36 - 13.41	--	--	--

All out of band emissions appearing in a restricted band as specified in Section 15.205 of the Title 47 CFR must not exceed the limits shown in Table per Section 15.209.

FCC Part 15 Subpart C Paragraph 15.209		
Frequency [MHz]	Field Strength [$\mu\text{V}/\text{m}$]	Measured Distance [Meters]
0.009 ~ 0.490	2400/F (kHz)	300
0.490 ~ 1.705	24000/F (kHz)	30
1.705 ~ 30	30	30
30 ~ 88	100	3
88 ~ 216	150	3
216 ~ 960	200	3
Above 960	500	3

For RSS-Gen Section 8.10 Requirement:

Radiated emissions which fall in the restricted bands, as defined in Section 8.10 of RSS-Gen, must also comply with the radiated emission limits specified in Section 8.9.

Frequency (MHz)	Frequency (MHz)	Frequency (GHz)
0.090 - 0.110	149.9 - 150.05	9.0 - 9.2
0.495 - 0.505	156.52475 - 156.52525	9.3 - 9.5
2.1735 - 2.1905	156.7 - 156.9	10.6 - 12.7
3.020 - 3.026	162.0125 - 167.17	13.25 - 13.4
4.125 - 4.128	167.72 - 173.2	14.47 - 14.5
4.17725 - 4.17775	240 - 285	15.35 - 16.2
4.20725 - 4.20775	322 - 335.4	17.7 - 21.4
5.677 - 5.683	399.9 - 410	22.01 - 23.12
6.215 - 6.218	608 - 614	23.6 - 24.0
6.26775 - 6.26825	960 - 1427	31.2 - 31.8
6.31175 - 6.31225	1435 - 1626.5	36.43 - 36.5
8.291 - 8.294	1645.5 - 1646.5	Above 38.6
8.362 - 8.366	1660 - 1710	* Certain frequency bands listed in table 7 and in bands above 38.6 GHz are designated for license exempt applications. These frequency bands and the requirements that apply to related devices are set out in the 200- and 300- series of RSSs.
8.37625 - 8.38675	1718.8 - 1722.2	
8.41425 - 8.41475	2200 - 2300	
12.29 - 12.293	2310 - 2390	
12.51975 - 12.52025	2483.5 - 2500	
12.57675 - 12.57725	2655 - 2900	
13.36 - 13.41	3260 - 3267	
16.42 - 16.423	3332 - 3339	
16.69475 - 16.69525	3345.8 - 3358	
16.80425 - 16.80475	3500 - 4400	
25.5 - 25.67	4500 - 5150	
37.5 - 38.25	5350 - 5460	
73 - 74.6	7250 - 7750	
74.8 - 75.2	8025 - 8500	
108 - 138	--	


All out of band emissions appearing in a restricted band as specified in Section 8.10 of the RSS-Gen must not exceed the limits shown in Table per Section 8.9.

RSS-Gen Section 8.9			
Frequency [MHz]	Field Strength [$\mu\text{V}/\text{m}$]	Magnetic Field Strength (H-Field) [$\mu\text{A}/\text{m}$]	Measured Distance [Meters]
0.009 - 0.490 ¹	--	6.37/F (F in kHz)	300
0.490 - 1.705	--	6.37/F (F in kHz)	30
1.705 - 30	--	0.08	30
30 - 88	100	--	3
88 - 216	150	--	3
216 - 960	200	--	3
Above 960	500	--	3

Note 1: The emission limits for the bands 9 - 90 kHz and 110 - 490 kHz are based on measurements employing a linear average detector.


7.4.2. Test Setup

1GHz ~ 18GHz Test Setup:

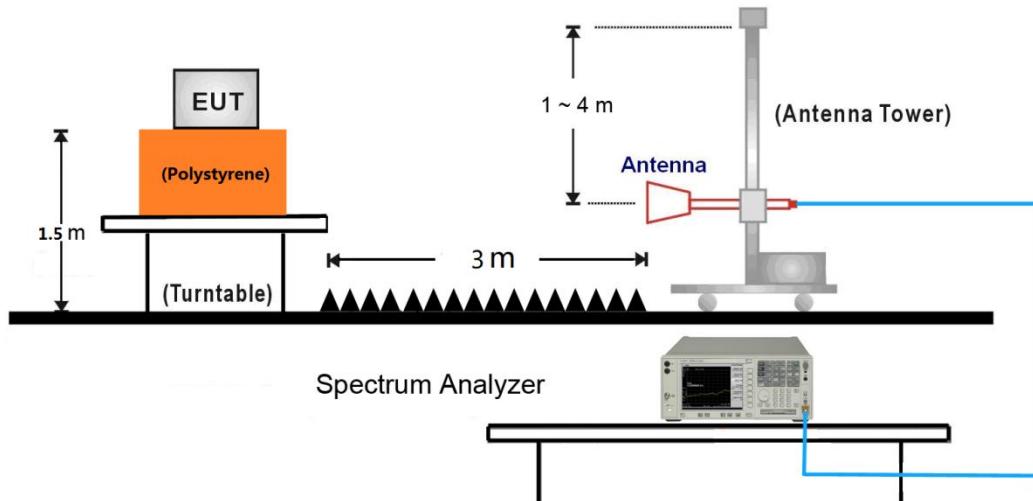

7.4.3. Test Result

Site: AC1	Time: 2018/10/23 - 18:58
Limit: FCC_Part15.209_RE(3m)	Engineer: Max Wang
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Flight Control Board: Nano S2	Power: By Battery
Test Mode: Transmit at Low Channel 2404MHz	

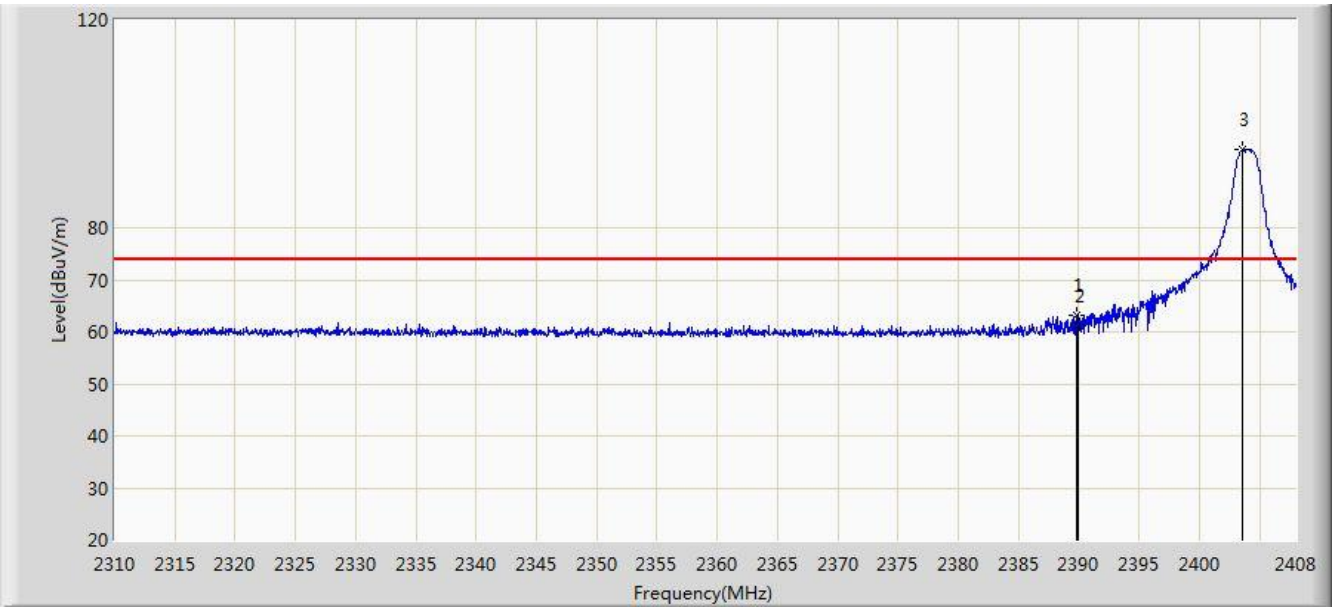


No	Flag	Mark	Frequency (MHz)	Reading Level (dBuV)	Factor (dB)	Duty Cycle Factor (dB)	Measure Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Type
1			2389.870	30.568	32.575	N/A	63.143	74.000	-10.857	PK
			2389.870	30.568	32.575	-36.2	26.943	54.000	-27.057	AV
2			2390.000	28.658	32.575	N/A	61.233	74.000	-12.767	PK
			2390.000	28.658	32.575	-36.2	25.033	54.000	-28.967	AV
3		*	2403.541	62.560	32.557	N/A	95.117	114.000	-18.883	PK

Note: Peak Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Average Measure Level = Peak Measure Level + Duty Cycle Factor

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2018/10/23 - 19:10
Limit: FCC_Part15.209_RE(3m)	Engineer: Max Wang
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Flight Control Board: Nano S2	Power: By Battery
Test Mode: Transmit at Low Channel 2404MHz	

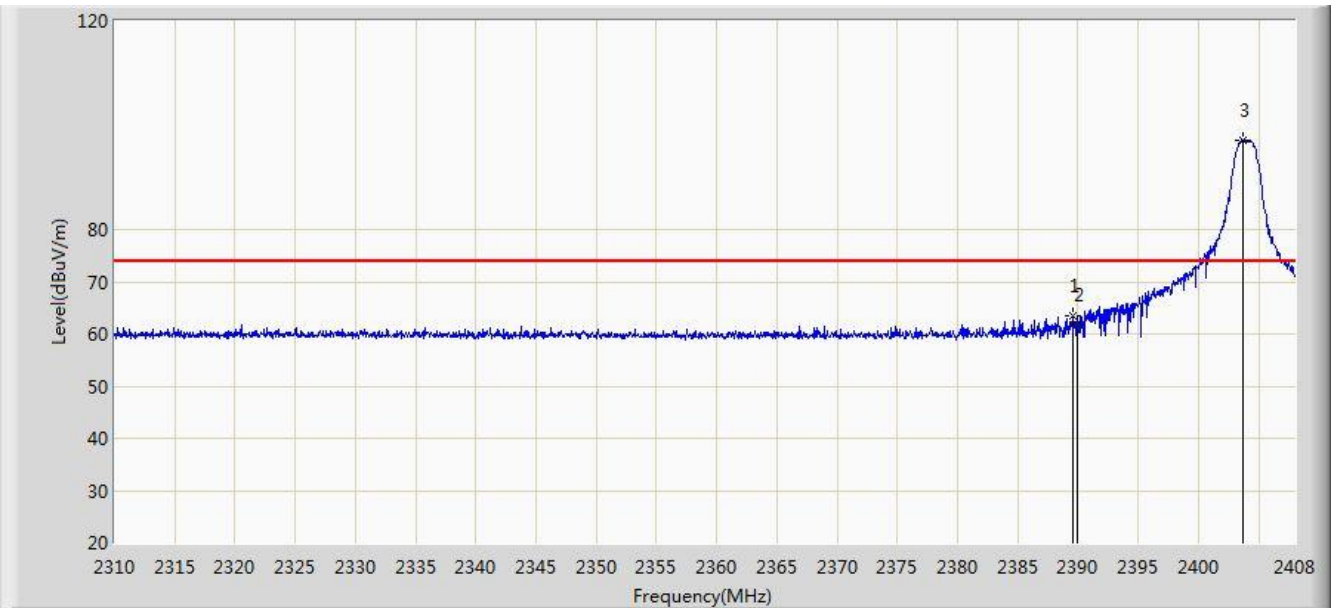


No	Flag	Mark	Frequency (MHz)	Reading Level (dBuV)	Factor (dB)	Duty Cycle Factor (dB)	Measure Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Type
1			2389.576	30.940	32.575	N/A	63.515	74.000	-10.485	PK
			2389.576	30.940	32.575	-36.2	27.315	54.000	-26.685	AV
2			2390.000	29.123	32.575	N/A	61.698	74.000	-12.302	PK
			2390.000	29.123	32.575	-36.2	25.498	54.000	-28.502	AV
3		*	2403.688	64.430	32.557	N/A	96.987	114.000	-17.013	PK

Note: Peak Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Average Measure Level = Peak Measure Level + Duty Cycle Factor

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2018/10/23 - 19:17
Limit: FCC_Part15.209_RE(3m)	Engineer: Max Wang
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Flight Control Board: Nano S2	Power: By Battery
Test Mode: Transmit at High Channel 2476MHz	

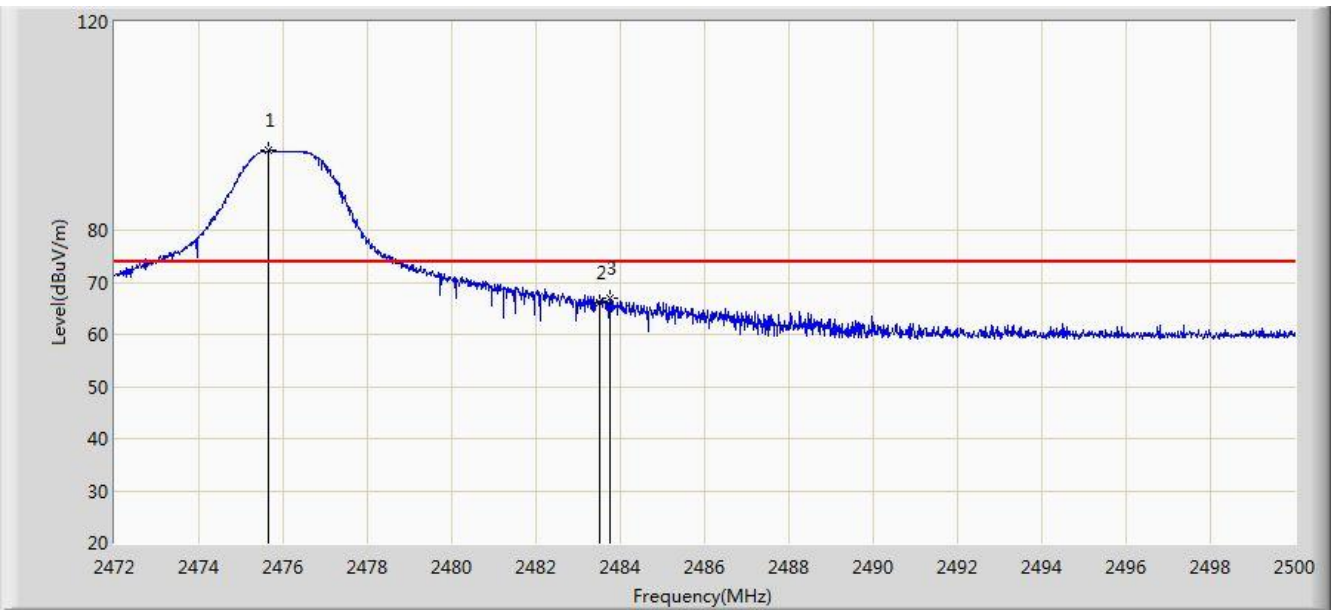


No	Flag	Mark	Frequency (MHz)	Reading Level (dBuV)	Factor (dB)	Duty Cycle Factor (dB)	Measure Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Type
1		*	2475.640	62.648	32.575	N/A	95.223	114.000	-18.777	PK
2			2483.500	33.612	32.596	N/A	66.208	74.000	-7.792	PK
			2483.500	33.612	32.596	-36.2	30.008	54.000	-23.992	AV
3			2483.746	34.428	32.596	N/A	67.024	74.000	-6.976	PK
			2483.746	34.428	32.596	-36.2	30.824	54.000	-23.176	AV

Note: Peak Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Average Measure Level = Peak Measure Level + Duty Cycle Factor

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2018/10/23 - 19:24
Limit: FCC_Part15.209_RE(3m)	Engineer: Max Wang
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Flight Control Board: Nano S2	Power: By Battery
Test Mode: Transmit at High Channel 2476MHz	

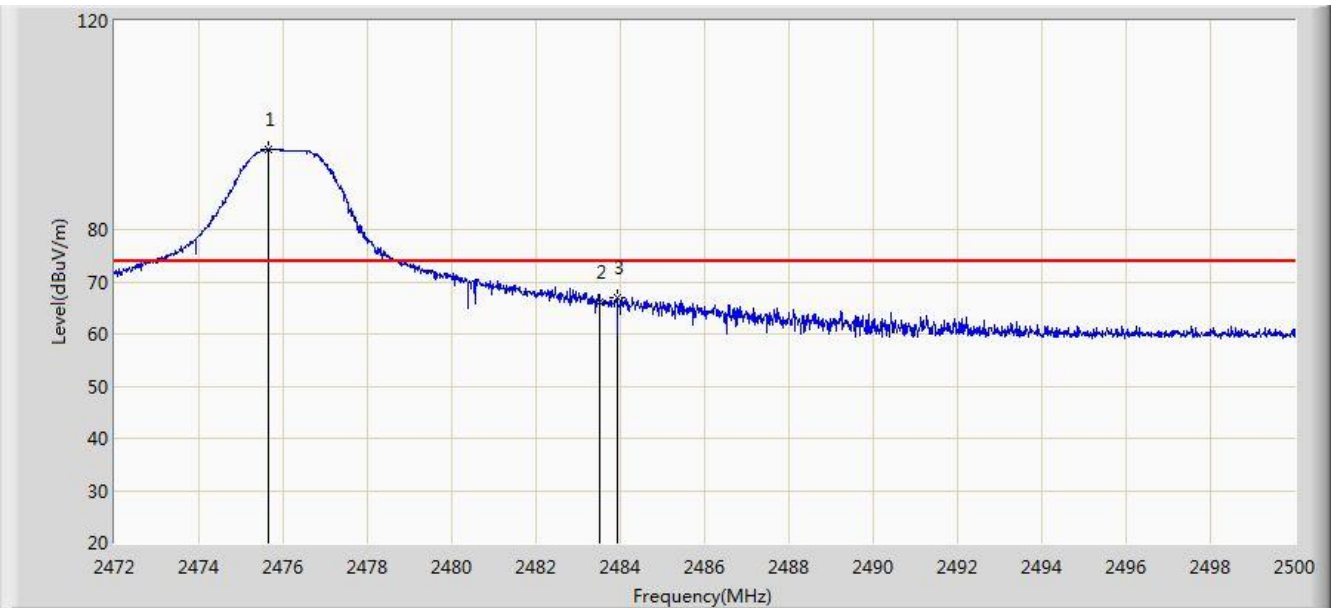

No	Flag	Mark	Frequency (MHz)	Reading Level (dBuV)	Factor (dB)	Duty Cycle Factor (dB)	Measure Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Type
1		*	2475.640	62.755	32.575	N/A	95.330	114.000	-18.670	PK
2			2483.500	33.516	32.596	N/A	66.112	74.000	-7.888	PK
			2483.500	33.516	32.596	-36.2	29.912	54.000	-24.088	AV
3			2483.914	34.222	32.596	N/A	66.818	74.000	-7.182	PK
			2483.914	34.222	32.596	-36.2	30.618	54.000	-23.382	AV

Note: Peak Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Average Measure Level = Peak Measure Level + Duty Cycle Factor

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

7.5. 20dB Spectrum Bandwidth Measurement

7.5.1. Test Limit

Intentional radiators must be designed to ensure that the 20 dB bandwidth of the emission in the specific band (2404 ~ 2476).


7.5.2. Test Procedure used

ANSI C63.10 Clause 6.9.2

7.5.3. Test Setting

1. Set the spectrum span range to overlap the nominal center frequency
2. Set RBW = 100 kHz
3. VBW $\geq 3 \times$ RBW
4. Detector = Peak
5. Trace mode = max hold
6. Sweep = auto couple
7. Allow the trace was allowed to stabilize and marker the highest level.
8. Determine the display level (the highest level - 20dB) and place two markers, one at the lowest frequency and the other at the highest frequency.


7.5.4. Test Setup

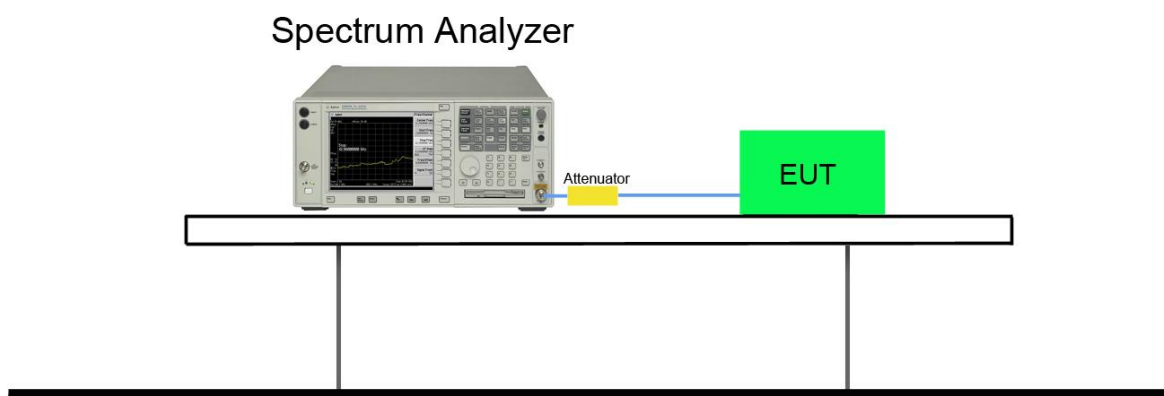

7.5.5. Test Result

Product	Flight Control Board: Nano S2	Temperature	25°C
Test Engineer	Snake Ni	Relative Humidity	58%
Test Site	AC1	Test Date	2018/10/24

Frequency (MHz)	Frequency Range (MHz)	Result
2404	2403.25	Pass
2476	2476.82	Pass

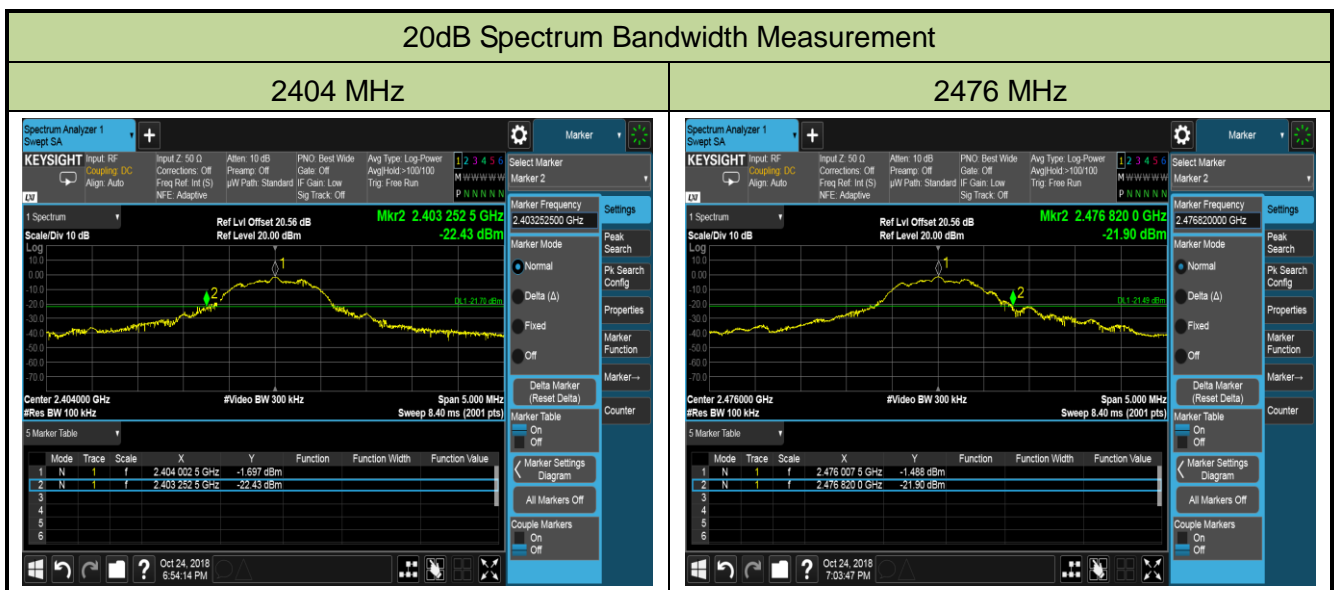

7.6. 99% Bandwidth Measurement

7.6.1. Test Limit

N/A


7.6.2. Test Procedure used

ANSI C63.10 Section 6.9

7.6.3. Test Setting

1. The analyzers' automatic bandwidth measurement capability was used to perform the 99% bandwidth measurement. The bandwidth measurement was not influenced by any intermediated power nulls in the fundamental emission.
2. RBW = approximately 1% to 5% of the OBW.
3. VBW $\geq 3 \times$ RBW.
4. Detector = Peak.
5. Trace mode = max hold.

7.6.4. Test Setup

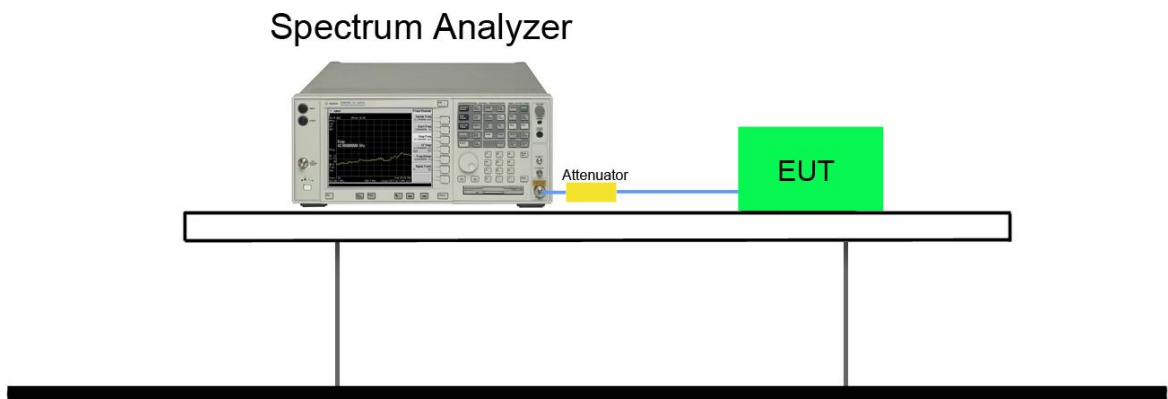

7.6.5. Test Result

Product	Flight Control Board: Nano S2	Temperature	25°C
Test Engineer	Snake Ni	Relative Humidity	58%
Test Site	AC1	Test Date	2018/10/24

Frequency (MHz)	99% Bandwidth (MHz)
2404	1.13
2440	1.14
2476	1.15



8. CONCLUSION

The data collected relate only the item(s) tested and show that the **Flight Control Board: Nano S2** is in compliance with Part 15C of the FCC Rules and ISED Rules.

————— The End —————

Appendix A - Test Setup Photograph

Refer to "1810RSU018-UT" file.

Appendix B - EUT Photograph

Refer to "1810RSU018-UE" file.