

# TEST REPORT

**Reference No.**..... : WTF17S1092243-2E  
**FCC ID** ..... : BRWIX12  
**Applicant**..... : Horizon Hobby, LLC  
**Address**..... : 4105 Fieldstone Road, Champaign, Illinois 61821, United States  
**Manufacturer** ..... : Horizon Hobby, LLC  
**Address**..... : 4105 Fieldstone Road, Champaign, Illinois 61821, United States  
**Product** ..... : iX12  
**Model(s)** ..... : iX12  
**Standards**..... : FCC CFR47 Part 15.247:2017  
**Date of Receipt sample** .... : 2017-10-12  
**Date of Test** ..... : 2017-10-13 to 2018-01-04  
**Date of Issue**..... : 2018-01-06  
**Test Result**..... : **Pass**

**Remarks:**

The results shown in this test report refer only to the sample(s) tested, this test report cannot be reproduced, except in full, without prior written permission of the company. The report would be invalid without specific stamp of test institute and the signatures of compiler and approver.

**Prepared By:**

**Waltek Services (Shenzhen) Co., Ltd.**

Address: 1/F., Fukangtai Building, West Baima Road, Songgang Street, Baoan District, Shenzhen, Guangdong, China

**Test Site/Test Location:**

**Waltek Services (Shenzhen) Co., Ltd.**

Address: 1/F., Fukangtai Building, West Baima Road, Songgang Street, Baoan District, Shenzhen, Guangdong, China

Tel :+86-755-83551033

Fax:+86-755-83552400

Compiled by:

*Robin Zhou*

Robin Zhou / Test Engineer

Approved by:



*Philo Zhong*

Philo Zhong / Manager

## 1 Laboratories Introduction

**Waltek Services Test Group Ltd.** is one of the largest and the most comprehensive third party testing organizations in China, our headquarter located in Shenzhen (CNAS Registration No. L3110, A2LA Certificate Number: 4243.01) and have branches in Foshan (CNAS Registration No. L6478), Dongguan (CNAS Registration No. L9950), Zhongshan, Suzhou (CNAS Registration No. L7754), Ningbo and Hong Kong, Our test capability covered four large fields: safety test. Electronic Magnetic Compatibility(EMC), reliability and energy performance, Chemical test. Meanwhile, Waltek has got recognition as registration and accreditation laboratory from EMSD (Electrical and Mechanical Services Department), and American Energy star, FCC(The Federal Communications Commission), CPSC(Consumer Product Safety Commission), CEC(California energy efficiency), IC(Industry Canada) and ELI(Efficient Lighting Initiative). It's the strategic partner and data recognition laboratory of international authoritative organizations, such as UL, Intertek(ETL-SEMKO), CSA, TÜV Rheinland, TÜV SÜD, etc. As a professional, comprehensive, justice international test organization, we still keep the scientific and rigorous work attitude to help each client satisfy the international standards and assist their product enter into globe market smoothly.

### Waltek Services (Shenzhen) Co., Ltd.

#### A. Accreditations for Conformity Assessment (International)

Country/Region	Accreditation Body	Scope	Note
USA	<b>CNAS</b> (Registration No.: L3110) <b>A2LA</b> (Certificate No.: 4243.01)	FCC ID \ DOC \ VOC	1
Canada		IC ID \ VOC	2
Japan		MIC-T \ MIC-R	-
Europe		EMCD \ RED	-
Taiwan		NCC	-
Hong Kong		OFCA	-
Australia		RCM	-
India	<b>International Services</b>	WPC	-
Thailand		NTC	-
Singapore		IDA	-
Note:			
1. FCC Designation No.: CN1201. Test Firm Registration No.: 523476.			
2. IC Canada Registration No.: 7760A			

#### B. TCBs and Notify Bodies Recognized Testing Laboratory.

Recognized Testing Laboratory of ...	Notify body number
TUV Rheinland	Optional.
Intertek	
TUV SUD	
SGS	
Phoenix Testlab GmbH	0700
Element Materials Technology Warwick Ltd	0891
Timco Engineering, Inc.	1177
Eurofins Product Service GmbH	0681

## 2 Contents

	<b>Page</b>
<b>COVER PAGE</b> .....	<b>1</b>
<b>1 LABORATORIES INTRODUCTION</b> .....	<b>2</b>
<b>2 CONTENTS</b> .....	<b>3</b>
<b>3 REVISION HISTORY</b> .....	<b>5</b>
<b>4 GENERAL INFORMATION</b> .....	<b>6</b>
4.1 GENERAL DESCRIPTION OF E.U.T.....	6
4.2 DETAILS OF E.U.T.....	6
4.3 CHANNEL LIST.....	6
4.4 TEST MODE.....	7
<b>5 EQUIPMENT USED DURING TEST</b> .....	<b>8</b>
5.1 EQUIPMENTS LIST.....	8
5.2 MEASUREMENT UNCERTAINTY.....	9
<b>6 TEST SUMMARY</b> .....	<b>10</b>
<b>7 CONDUCTED EMISSION</b> .....	<b>11</b>
7.1 E.U.T. OPERATION.....	11
7.2 EUT SETUP.....	11
7.3 MEASUREMENT DESCRIPTION.....	11
7.4 CONDUCTED EMISSION TEST RESULT.....	12
<b>8 RADIATED SPURIOUS EMISSIONS</b> .....	<b>14</b>
8.1 EUT OPERATION.....	14
8.2 TEST SETUP.....	15
8.3 SPECTRUM ANALYZER SETUP.....	16
8.4 TEST PROCEDURE.....	17
8.5 CORRECTED AMPLITUDE & MARGIN CALCULATION.....	17
8.6 SUMMARY OF TEST RESULTS.....	18
<b>9 CONDUCTED SPURIOUS EMISSIONS</b> .....	<b>21</b>
9.1 TEST PROCEDURE.....	21
9.2 TEST RESULT.....	22
<b>10 BAND EDGE MEASUREMENT</b> .....	<b>32</b>
10.1 TEST PROCEDURE.....	32
10.2 TEST RESULT.....	33
<b>11 BANDWIDTH MEASUREMENT</b> .....	<b>39</b>
11.1 TEST PROCEDURE.....	39
11.2 TEST RESULT.....	39
<b>12 MAXIMUM PEAK OUTPUT POWER</b> .....	<b>45</b>
12.1 TEST PROCEDURE.....	45
12.2 TEST RESULT.....	45
<b>13 HOPING CHANNEL SEPARATION</b> .....	<b>51</b>
13.1 TEST PROCEDURE.....	51
13.2 TEST RESULT.....	51
<b>14 NUMBER OF HOPPING FREQUENCY</b> .....	<b>57</b>
14.1 TEST PROCEDURE.....	57
14.2 TEST RESULT.....	57
<b>15 DWELL TIME</b> .....	<b>59</b>

15.1	TEST PROCEDURE.....	59
15.2	TEST RESULT .....	59
<b>16</b>	<b>ANTENNA REQUIREMENT .....</b>	<b>65</b>
<b>17</b>	<b>RF EXPOSURE.....</b>	<b>66</b>
<b>18</b>	<b>PHOTOGRAPHS-MODEL IX12 TEST SETUP PHOTOS.....</b>	<b>66</b>
<b>19</b>	<b>PHOTOGRAPHS - CONSTRUCTIONAL DETAILS .....</b>	<b>66</b>
19.1	MODEL IX12-EXTERNAL PHOTOS.....	66
19.2	MODEL IX12-INTERNAL PHOTOS .....	66

### 3 Revision History

Test report No.	Date of Receipt sample	Date of Test	Date of Issue	Purpose	Comment	Approved
WTF17S1092243-2E	2017-10-12	2017-10-13 to 2018-01-04	2018-01-06	original	-	valid

## 4 General Information

### 4.1 General Description of E.U.T

Product	: iX12
Model(s)	: iX12
Model Description	: N/A
Hardware Version	: SOM - UH1-SOM-DX12-REV03
Software Version	: v1.00.03

### 4.2 Details of E.U.T

Bluetooth Classic	
Operation Frequency:	2402-2480MHz
Type of Modulation:	GFSK, $\pi/4$ DQPSK, 8DPSK
2.4G Transmitter Module:	Contains FCC ID: BRWDAMTX12
2.4G Receiver Module:	Contains FCC ID: BRWDASRX20
Antenna installation:	Internal Integral Antenna for Bluetooth Classic
Antenna Gain:	1.5dBi for Bluetooth Classic
Ratings:	DC 3.7V by Transmitter Battery Pack 6000mAh, 22.2Wh Input: 5.0V $\overline{\text{---}}$ , 2A (Powered by Travel charger, Input: 100 240V~, 50/60Hz, 0.4A; Output: 5.0V $\overline{\text{---}}$ , 2A)

### 4.3 Channel List

Bluetooth Classic mode

Channel No.	Frequency (MHz)	Channel No.	Frequency (MHz)	Channel No.	Frequency (MHz)	Channel No.	Frequency (MHz)
0	2402	1	2403	2	2404	3	2405
4	2406	5	2407	6	2408	7	2409
8	2410	9	2411	10	2412	11	2413
12	2414	13	2415	14	2416	15	2417
16	2418	17	2419	18	2420	19	2421
20	2422	21	2423	22	2424	23	2425
24	2426	25	2427	26	2428	27	2429
28	2430	29	2431	30	2432	31	2433
32	2434	33	2435	34	2436	35	2437
36	2438	37	2439	38	2440	39	2441
40	2442	41	2443	42	2444	43	2445
44	2446	45	2447	46	2448	47	2449
48	2450	49	2451	50	2452	51	2453
52	2454	53	2455	54	2456	55	2457
56	2458	57	2459	58	2460	59	2461

Channel No.	Frequency (MHz)	Channel No.	Frequency (MHz)	Channel No.	Frequency (MHz)	Channel No.	Frequency (MHz)
60	2462	61	2463	62	2464	63	2465
64	2466	65	2467	66	2468	67	2469
68	2470	69	2471	70	2472	71	2473
72	2474	73	2475	74	2476	75	2477
76	2478	77	2479	78	2480	N/A	N/A

#### 4.4 Test Mode

All test mode(s) and condition(s) mentioned were considered and evaluated respectively by performing full tests; the worst data were recorded and reported.

Test mode	Low channel	Middle channel	High channel
Charging +Transmitting	2402MHz	2441MHz	2480MHz

## 5 Equipment Used during Test

### 5.1 Equipments List

Conducted Emissions						
Item	Equipment	Manufacturer	Model No.	Serial No.	Last Calibration Date	Calibration Due Date
1	EMI Test Receiver	R&S	ESCI	100947	2017-09-12	2018-09-11
2	LISN	R&S	ENV216	100115	2017-09-12	2018-09-11
3	Cable	Top	TYPE16(3.5M)	-	2017-09-12	2018-09-11
3m Semi-anechoic Chamber for Radiation Emissions						
Item	Equipment	Manufacturer	Model No.	Serial No.	Last Calibration Date	Calibration Due Date
1	Spectrum Analyzer	R&S	FSP30	100091	2017-04-29	2018-04-28
2	Broad-band Horn Antenna(1-18GHz)	SCHWARZBECK	BBHA 9120 D	667	2017-04-09	2018-04-08
3	Broadband Preamplifier	COMPLIANCE DIRECTION	PAP-1G18	2004	2017-04-13	2018-04-12
4	Coaxial Cable (above 1GHz)	Top	1GHz-18GHz	EW02014-7	2017-04-13	2018-04-12
5	Spectrum Analyzer	R&S	FSP40	100501	2017-10-20	2018-10-19
6	Broad-band Horn Antenna(18-40GHz)	SCHWARZBECK	BBHA 9170	BBHA9170651	2017-10-25	2018-10-24
7	Microwave Broadband Preamplifier (18-40GHz)	SCHWARZBECK	BBV 9721	100472	2017-10-25	2018-10-24
8	Cable	Top	18-40GHz	-	2017-10-25	2018-10-24
3m Semi-anechoic Chamber for Radiation Emissions						
Item	Equipment	Manufacturer	Model No.	Serial No	Last Calibration Date	Calibration Due Date
1	Test Receiver	R&S	ESCI	101296	2017-04-13	2018-04-12
2	Trilog Broadband Antenna	SCHWARZBECK	VULB9160	9160-3325	2017-04-13	2018-04-12
3	Active Loop Antenna	Beijing Dazhi	ZN30900A	-	2017-04-09	2018-04-08
4	Amplifier	ANRITSU	MH648A	M43381	2017-04-13	2018-04-12
5	Cable	HUBER+SUHNER	CBL2	525178	2017-04-13	2018-04-12
6	Coaxial Cable (below 1GHz)	Top	TYPE16(13M)	-	2017-09-12	2018-09-11



RF Conducted Testing						
Item	Equipment	Manufacturer	Model No.	Serial No.	Last Calibration Date	Calibration Due Date
1.	Signal Analyzer (9k~26.5GHz)	Agilent	N9010A	MY50520207	2017-09-12	2018-09-11
2	Spectrum Analyzer	R&S	FSL6	100959	2017-09-12	2018-09-11

## 5.2 Measurement Uncertainty

Parameter	Uncertainty
Radio Frequency	$\pm 1 \times 10^{-6}$
RF Power	$\pm 1.0$ dB
RF Power Density	$\pm 2.2$ dB
Radiated Spurious Emissions test	$\pm 5.03$ dB (Bilog antenna 30M~1000MHz)
	$\pm 5.47$ dB (Horn antenna 1000M~25000MHz)
Conducted Emissions test	$\pm 3.64$ dB (AC mains 150KHz~30MHz)
Confidence interval: 95%. Confidence factor:k=2	

## 6 Test Summary

Test Items	Test Requirement	Result
Radiated Spurious Emissions	15.205(a) 15.209 15.247(d)	Pass
Conducted Spurious emissions	15.247(d)	Pass
Band edge	15.247(d) 15.205(a)	Pass
Conduct Emission	15.207	Pass
Bandwidth	15.247(a)(1)	Pass
Maximum Peak Output Power	15.247(b)(1)	Pass
Frequency Separation	15.247(a)(1)	Pass
Number of Hopping Frequency	15.247(a)(1)(iii)	Pass
Dwell time	15.247(a)(1)(iii)	Pass
Antenna Requirement	15.203	Pass
RF Exposure	1.1307(b)(1)	Pass
Note: Pass=Compliance; Fail=Not Compliance; N/A=Not Applicable.		

## 7 Conducted Emission

Test Requirement:	FCC CFR 47 Part 15 Section 15.207
Test Method:	ANSI C63.10:2013
Test Result:	PASS
Frequency Range:	150kHz to 30MHz
Class/Severity:	Class B
Limit:	

Frequency (MHz)	Limit (dB $\mu$ V)	
	Qsi-peak	Average
0.15 to 0.5	66 to 56*	56 to 46*
0.5 to 5	50	60
5 to 30	60	50

### 7.1 E.U.T. Operation

Operating Environment :


Temperature:	22.8 °C
Humidity:	52.6 % RH
Atmospheric Pressure:	101.2kPa

EUT Operation :

The test was performed in Charging + Transmitting mode, the worst test data (GFSK modulation Low channel) were shown in the report.

### 7.2 EUT Setup

The conducted emission tests were performed using the setup accordance with the ANSI C63.10:2013.

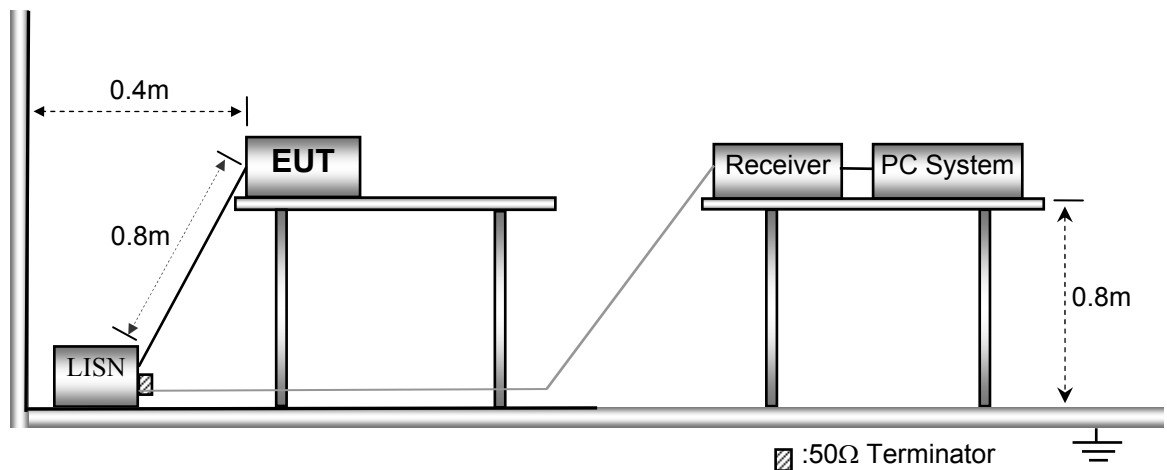


### 7.3 Measurement Description

The maximised peak emissions from the EUT was scanned and measured for both the Live and Neutral Lines. Quasi-peak & average measurements were performed if peak emissions were within 6dB of the average limit line.

### 7.4 Conducted Emission Test Result


Remark: only the worst data (GFSK modulation Low channel mode) were reported

Live line:

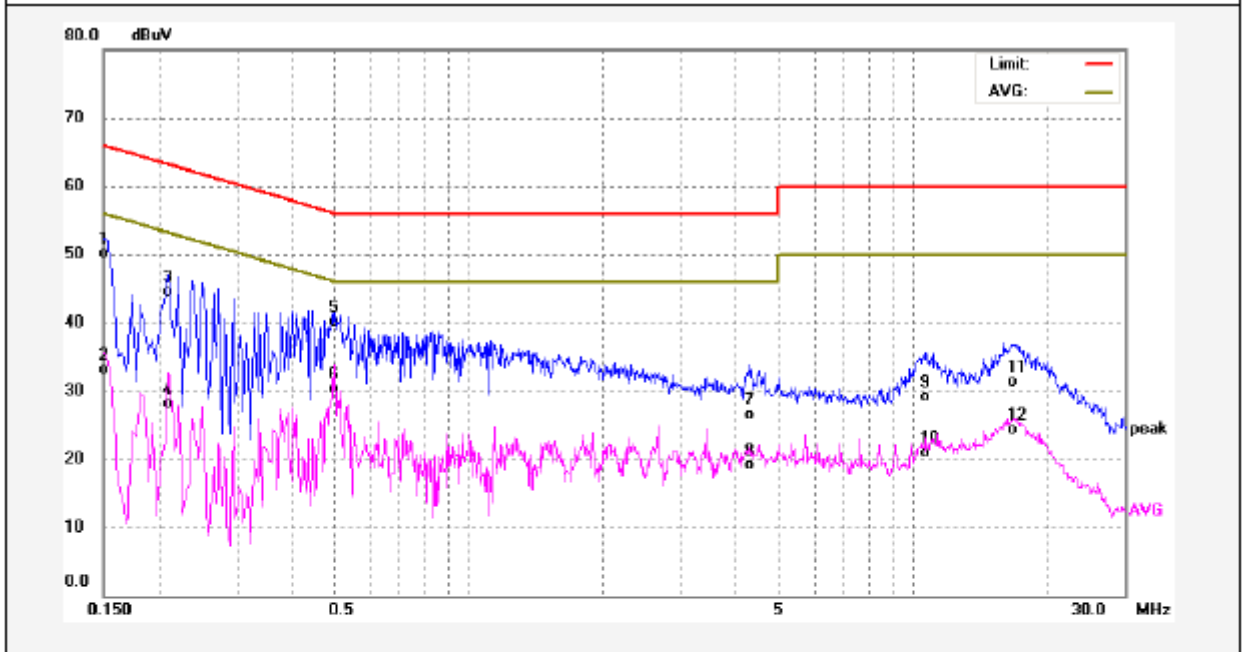

No.	Freq. (MHz)	Reading (dBuV)	Factor (dB)	Result (dBuV)	Limit dBuV	Margin (dB)	Detector	Remark
1	0.1500	40.51	9.64	50.15	65.99	-15.84	QP	
2	0.1500	23.40	9.64	33.04	55.99	-22.95	AVG	
3	0.2100	34.85	9.62	44.47	63.20	-18.73	QP	
4	0.2100	18.51	9.62	28.13	53.20	-25.07	AVG	
5	0.4980	30.50	9.65	40.15	56.03	-15.88	QP	
6	0.4980	20.68	9.65	30.33	46.03	-15.70	AVG	
7	4.3140	16.45	9.97	26.42	56.00	-29.58	QP	
8	4.3140	9.04	9.97	19.01	46.00	-26.99	AVG	
9	10.7100	18.96	10.16	29.12	60.00	-30.88	QP	
10	10.7100	10.65	10.16	20.81	50.00	-29.19	AVG	
11	17.0340	20.99	10.28	31.27	60.00	-28.73	QP	
12	17.0340	14.07	10.28	24.35	50.00	-25.65	AVG	

Neutral line:

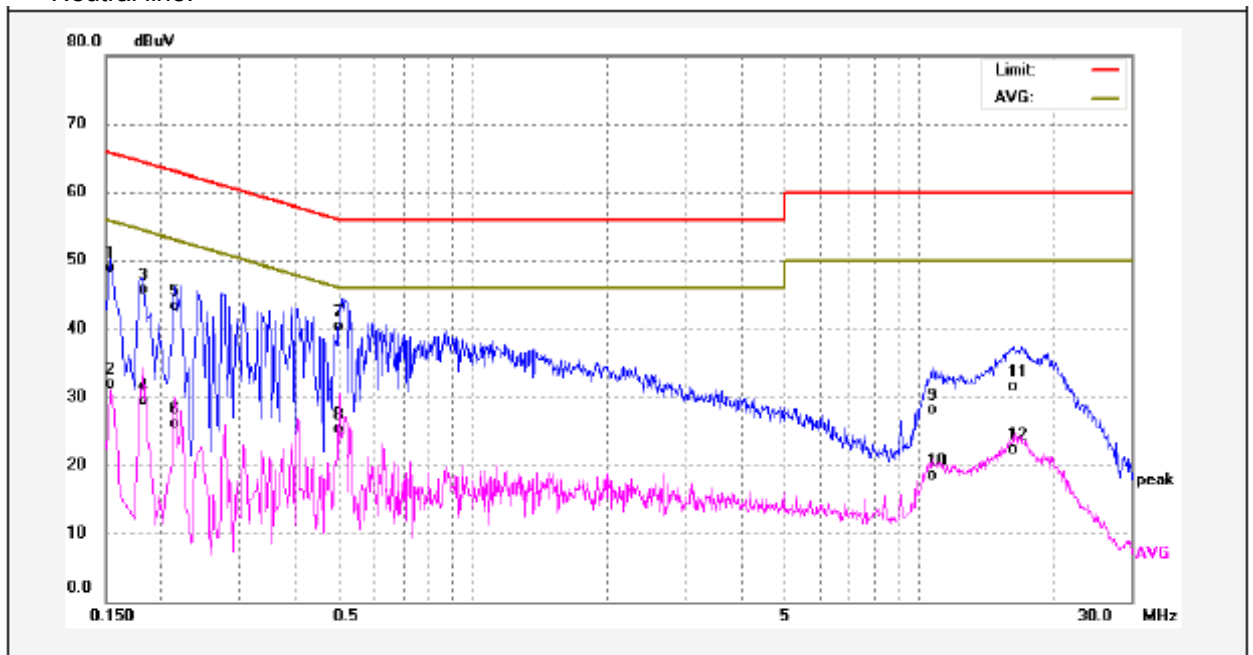

No.	Freq. (MHz)	Reading (dBuV)	Factor (dB)	Result (dBuV)	Limit dBuV	Margin (dB)	Detector	Remark
1	0.1539	39.24	9.64	48.88	65.78	-16.90	QP	
2	0.1539	22.20	9.64	31.84	55.78	-23.94	AVG	
3	0.1819	36.17	9.63	45.80	64.39	-18.59	QP	
4	0.1819	19.79	9.63	29.42	54.39	-24.97	AVG	
5	0.2140	33.74	9.63	43.37	63.04	-19.67	QP	
6	0.2140	16.43	9.63	26.06	53.04	-26.98	AVG	
7	0.5020	30.63	9.65	40.28	56.00	-15.72	QP	
8	0.5020	15.66	9.65	25.31	46.00	-20.69	AVG	
9	10.7340	17.85	10.16	28.01	60.00	-31.99	QP	
10	10.7340	8.44	10.16	18.60	50.00	-31.40	AVG	
11	16.4540	21.28	10.27	31.55	60.00	-28.45	QP	
12	16.4540	12.08	10.27	22.35	50.00	-27.65	AVG	

## 8 Radiated Spurious Emissions

Test Requirement: FCC CFR47 Part 15 Section 15.209 & 15.247

Test Method: ANSI C63.10:2013

Test Result: PASS

Measurement Distance: 3m

Limit:

Frequency (MHz)	Field Strength		Field Strength Limit at 3m Measurement Dist	
	uV/m	Distance (m)	uV/m	dBuV/m
0.009 ~ 0.490	2400/F(kHz)	300	10000 * 2400/F(kHz)	20log <sup>(2400/F(kHz))</sup> + 80
0.490 ~ 1.705	24000/F(kHz)	30	100 * 24000/F(kHz)	20log <sup>(24000/F(kHz))</sup> + 40
1.705 ~ 30	30	30	100 * 30	20log <sup>(30)</sup> + 40
30 ~ 88	100	3	100	20log <sup>(100)</sup>
88 ~ 216	150	3	150	20log <sup>(150)</sup>
216 ~ 960	200	3	200	20log <sup>(200)</sup>
Above 960	500	3	500	20log <sup>(500)</sup>

### 8.1 EUT Operation

Operating Environment :

Temperature: 23.5 °C

Humidity: 51.1 % RH

Atmospheric Pressure: 101.2kPa


EUT Operation :

The test was performed in Charging + Transmitting mode, the worst test data (GFSK modulation) were shown in the report.


## 8.2 Test Setup

The radiated emission tests were performed in the 3m Semi- Anechoic Chamber test site, using the setup accordance with the ANSI C63.10:2013.


The test setup for emission measurement below 30MHz.

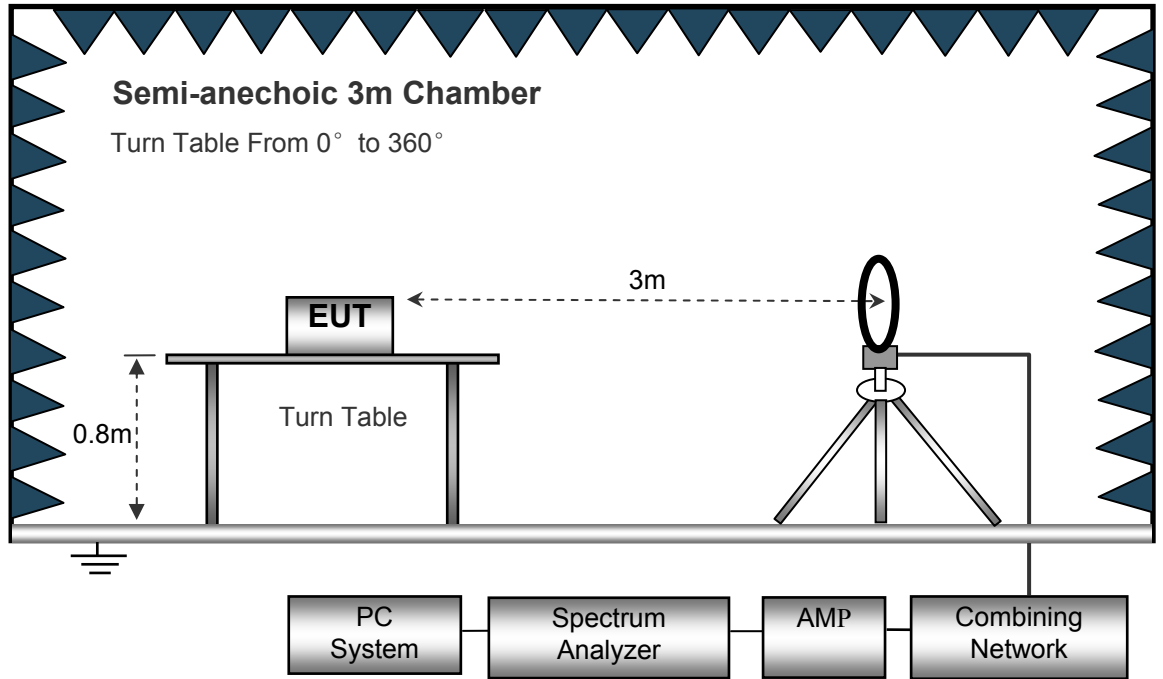

The test setup for emission measurement from 30 MHz to 1 GHz.

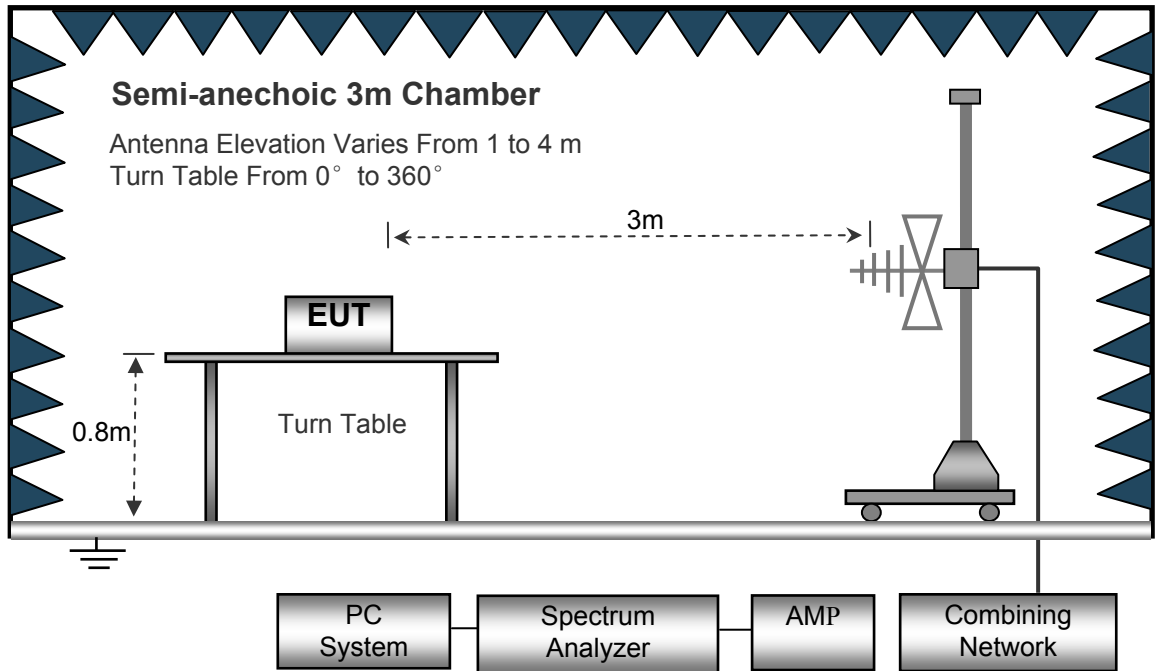

The test setup for emission measurement above 1 GHz.

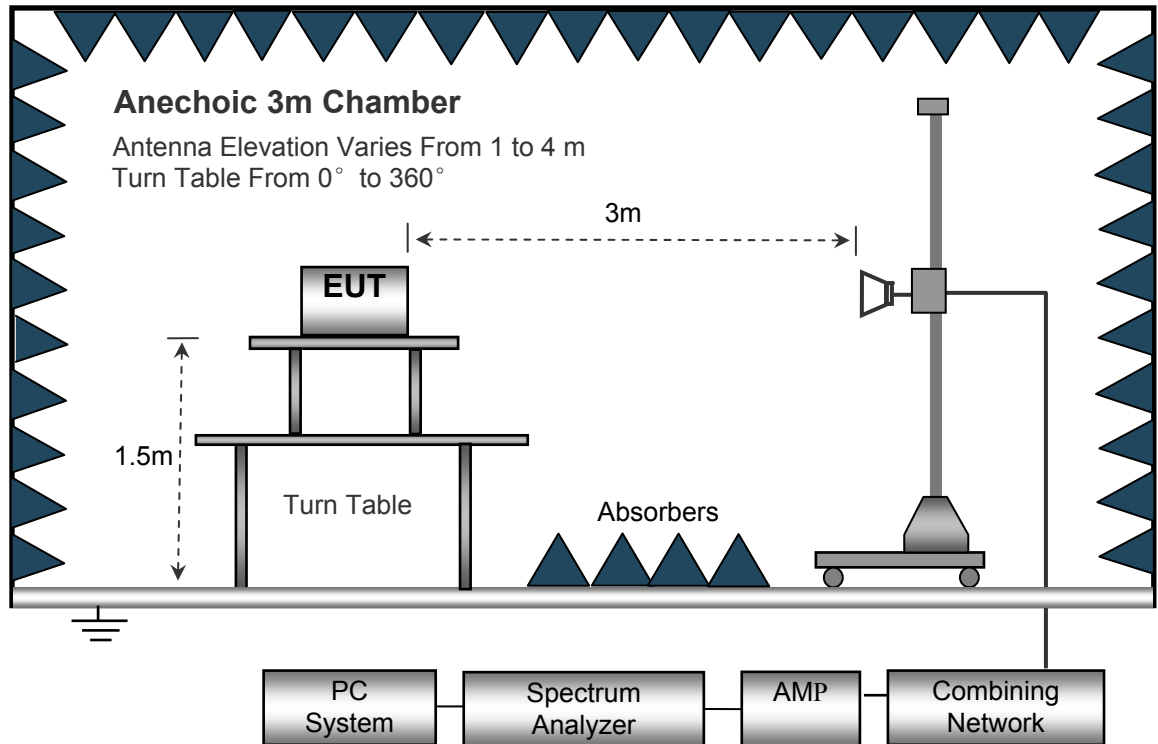

### 8.3 Spectrum Analyzer Setup

Below 30MHz

Sweep Speed ..... Auto  
 IF Bandwidth..... 10kHz  
 Video Bandwidth..... 10kHz  
 Resolution Bandwidth..... 10kHz

30MHz ~ 1GHz

Sweep Speed ..... Auto  
 Detector ..... PK  
 Resolution Bandwidth..... 100kHz  
 Video Bandwidth..... 300kHz

Above 1GHz

Sweep Speed ..... Auto  
 Detector ..... PK  
 Resolution Bandwidth..... 1MHz  
 Video Bandwidth..... 3MHz  
 Detector ..... Ave.  
 Resolution Bandwidth..... 1MHz  
 Video Bandwidth..... 10Hz



## 8.4 Test Procedure

1. The EUT is placed on a turntable, which is 0.8m above ground plane for below 1GHz and 1.5m for above 1GHz.
2. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
3. EUT is set 3m away from the receiving antenna, which is moved from 1m to 4m to find out the maximum emissions. The spectrum was investigated from the lowest radio frequency signal generated in the device, without going below 9 kHz, up to the tenth harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower.
4. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
5. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
6. Repeat above procedures until the measurements for all frequencies are complete.
7. The radiation measurements are tested under 3-axes(X,Y,Z) position(X denotes lying on the table, Y denotes side stand and Z denotes vertical stand), After pre-test, It was found that the worse radiation emission was get at the Z position. So the data shown was the Z position only.

## 8.5 Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and Cable Factor, and subtracting the Amplifier Gain from the Amplitude reading. The basic equation is as follows:

$$\text{Corr. Ampl.} = \text{Indicated Reading} + \text{Antenna Factor} + \text{Cable Factor} - \text{Amplifier Gain}$$

The "Margin" column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of -7dB means the emission is 7dB below the maximum limit for Class B. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Corr. Ampl.} - \text{Limit}$$

## 8.6 Summary of Test Results

### Test Frequency: 9 kHz~30 MHz

The measurements were more than 20 dB below the limit and not reported.

### Test Frequency: 30MHz ~ 18GHz

Remark: only the worst data (GFSK modulation) were reported.

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	Limit	Margin
				Height	Polar				
(MHz)	(dB $\mu$ V)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dB $\mu$ V/m)	(dB $\mu$ V/m)	(dB)
GFSK Low Channel									
36.51	35.29	QP	320	1.6	H	-11.62	23.67	40.00	-16.33
36.51	47.12	QP	315	1.3	V	-11.62	35.50	40.00	-4.50
4804.00	56.17	PK	189	1.9	V	-1.06	55.11	74.00	-18.89
4804.00	43.29	Ave	189	1.9	V	-1.06	42.23	54.00	-11.77
7206.00	54.06	PK	92	1.5	H	1.33	55.39	74.00	-18.61
7206.00	44.18	Ave	92	1.5	H	1.33	45.51	54.00	-8.49
2321.04	46.34	PK	358	1.2	V	-13.19	33.15	74.00	-40.85
2321.04	39.83	Ave	358	1.2	V	-13.19	26.64	54.00	-27.36
2364.73	43.13	PK	192	1.8	H	-13.14	29.99	74.00	-44.01
2364.73	36.75	Ave	192	1.8	H	-13.14	23.61	54.00	-30.39
2490.92	43.54	PK	221	1.6	V	-13.08	30.46	74.00	-43.54
2490.92	37.38	Ave	221	1.6	V	-13.08	24.30	54.00	-29.70

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	Limit	Margin
				Height	Polar				
(MHz)	(dB $\mu$ V)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dB $\mu$ V/m)	(dB $\mu$ V/m)	(dB)
GFSK Middle Channel									
36.51	34.57	QP	36	1.9	H	-11.62	22.95	40.00	-17.05
36.51	46.12	QP	89	1.6	V	-11.62	34.50	40.00	-5.50
4882.00	56.58	PK	215	2.0	V	-0.62	55.96	74.00	-18.04
4882.00	43.77	Ave	215	2.0	V	-0.62	43.15	54.00	-10.85
7323.00	55.45	PK	274	1.4	H	2.21	57.66	74.00	-16.34
7323.00	43.79	Ave	274	1.4	H	2.21	46.00	54.00	-8.00
2344.86	45.94	PK	74	1.3	V	-13.19	32.75	74.00	-41.25
2344.86	37.28	Ave	74	1.3	V	-13.19	24.09	54.00	-29.91
2365.37	44.52	PK	109	1.9	H	-13.14	31.38	74.00	-42.62
2365.37	36.22	Ave	109	1.9	H	-13.14	23.08	54.00	-30.92
2495.36	43.67	PK	193	1.0	V	-13.08	30.59	74.00	-43.41
2495.36	36.99	Ave	193	1.0	V	-13.08	23.91	54.00	-30.09

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	Limit	Margin
				Height	Polar				
(MHz)	(dB $\mu$ V)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dB $\mu$ V/m)	(dB $\mu$ V/m)	(dB)
GFSK High Channel									
36.51	35.46	QP	7	1.0	H	-11.62	23.84	40.00	-16.16
36.51	47.30	QP	350	1.1	V	-11.62	35.68	40.00	-4.32
4960.00	55.32	PK	343	1.9	V	-0.24	55.08	74.00	-18.92
4960.00	45.02	Ave	343	1.9	V	-0.24	44.78	54.00	-9.22
7440.00	54.06	PK	310	1.7	H	2.84	56.90	74.00	-17.10
7440.00	44.07	Ave	310	1.7	H	2.84	46.91	54.00	-7.09
2324.86	45.13	PK	235	1.6	V	-13.19	31.94	74.00	-42.06
2324.86	38.52	Ave	235	1.6	V	-13.19	25.33	54.00	-28.67
2370.93	44.14	PK	161	1.7	H	-13.14	31.00	74.00	-43.00
2370.93	36.68	Ave	161	1.7	H	-13.14	23.54	54.00	-30.46
2483.97	44.09	PK	213	1.9	V	-13.08	31.01	74.00	-42.99
2483.97	36.67	Ave	213	1.9	V	-13.08	23.59	54.00	-30.41

**Test Frequency: 18GHz~25GHz**

The measurements were more than 20 dB below the limit and not recorded

## 9 Conducted Spurious Emissions

Test Requirement: FCC CFR47 Part 15 Section 15.247

Test Method: ANSI C63.10:2013

Test Result: PASS

Limit:

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(c)).

### 9.1 Test Procedure


1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum;
2. Set the spectrum analyzer:  
RBW = 100kHz, VBW = 300kHz, Sweep = auto  
Detector function = peak, Trace = max hold

### 9.2 Test Result


9 kHz - 30MHz

GFSK


Low Channel

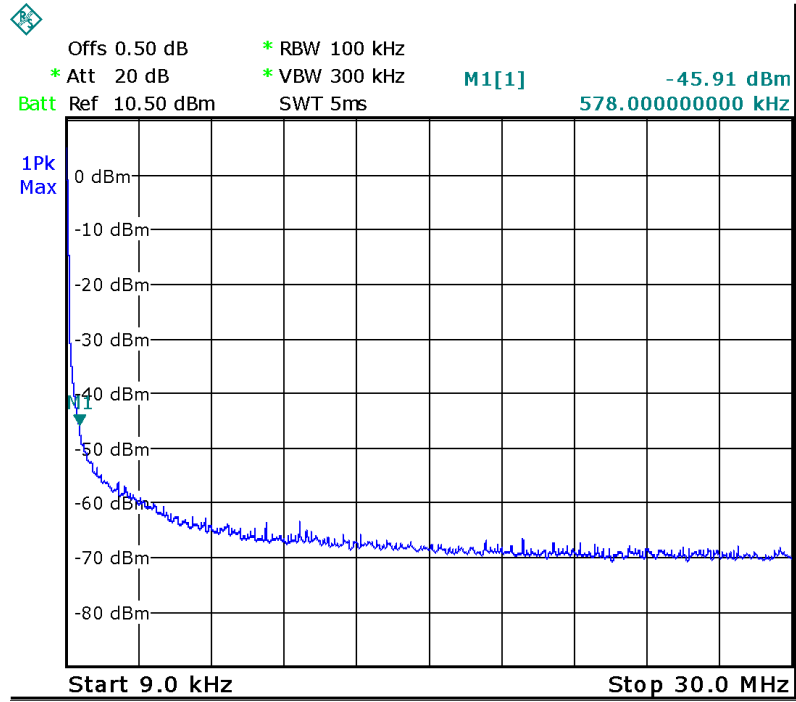

Middle Channel

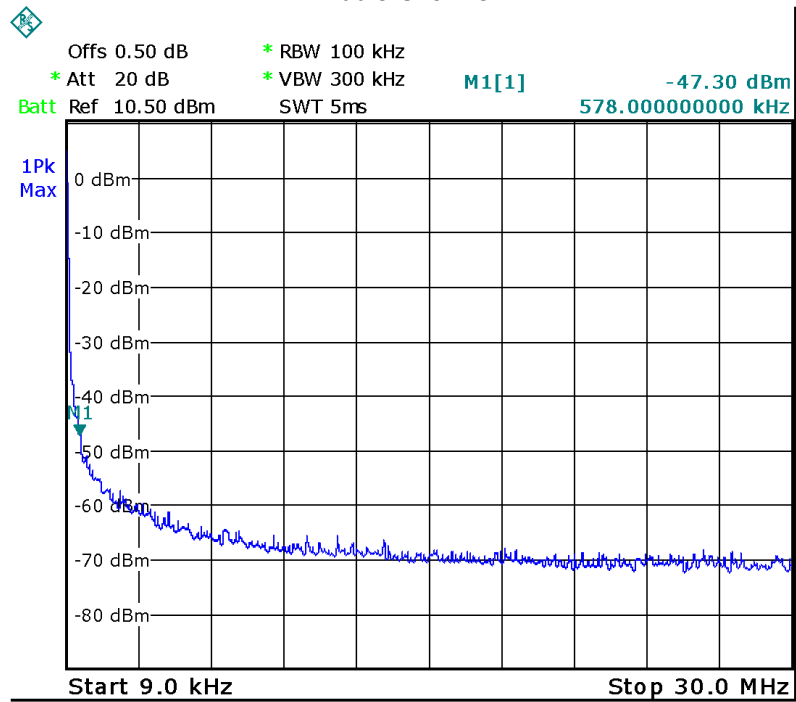


### High Channel

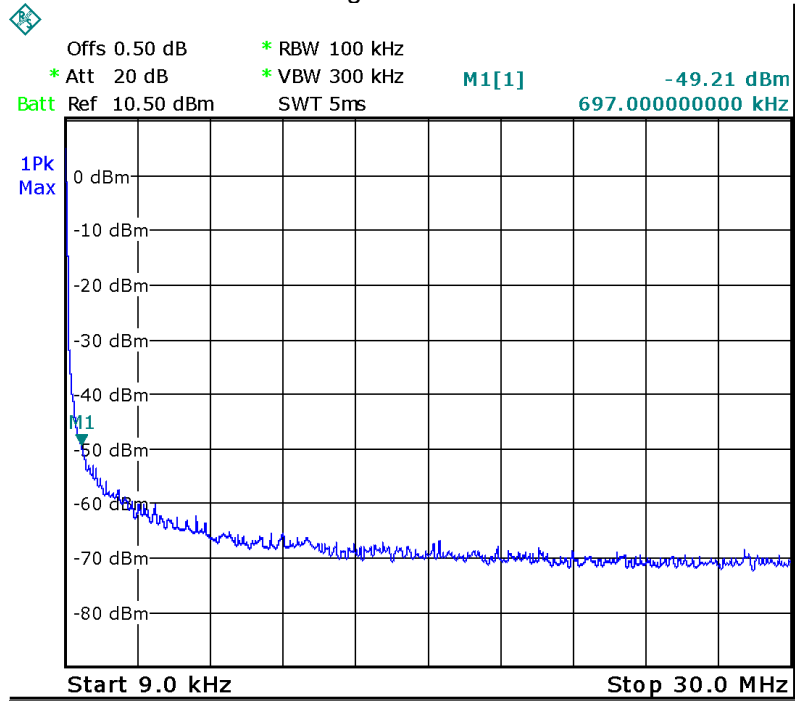


### $\pi/4$ DQPSK


#### Low Channel

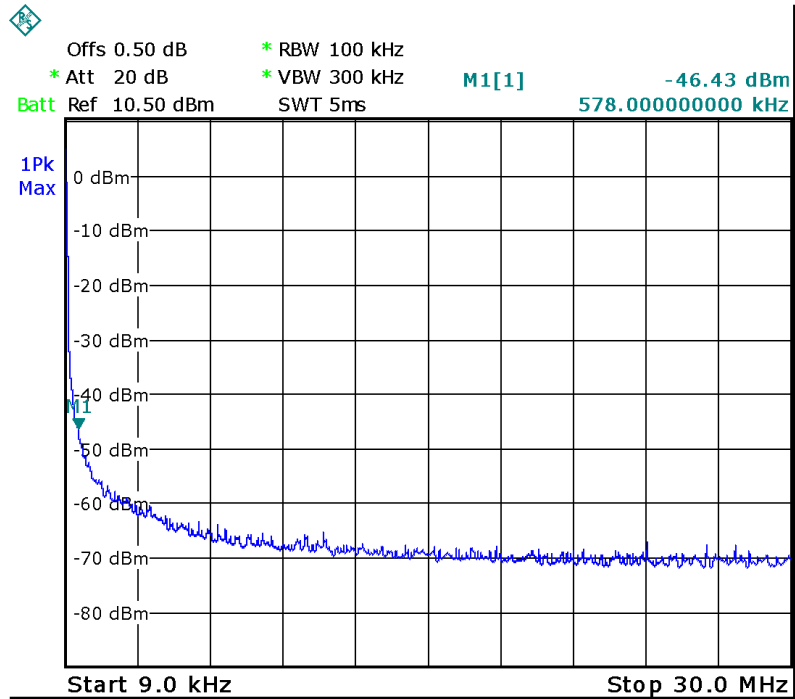

### Middle Channel

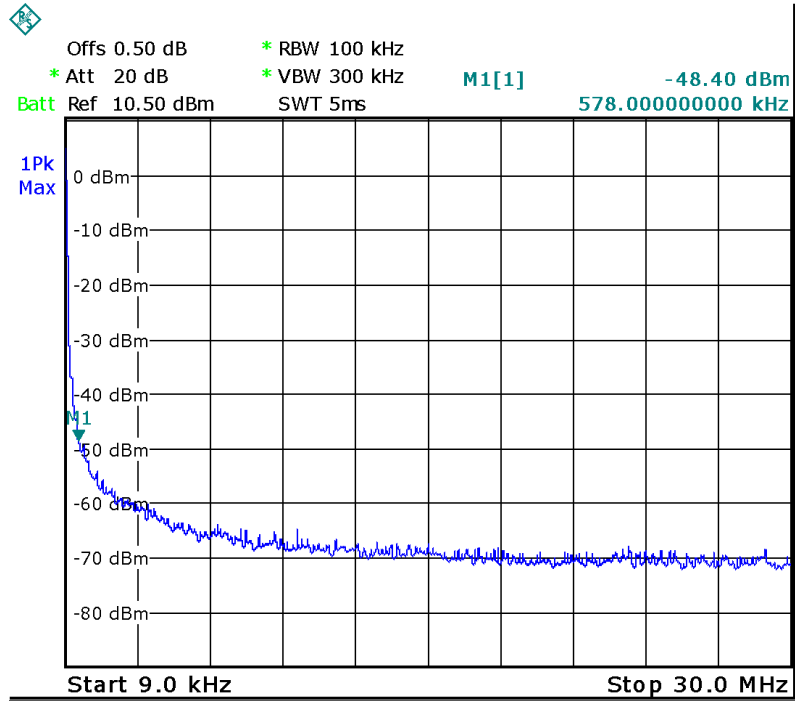


### High Channel

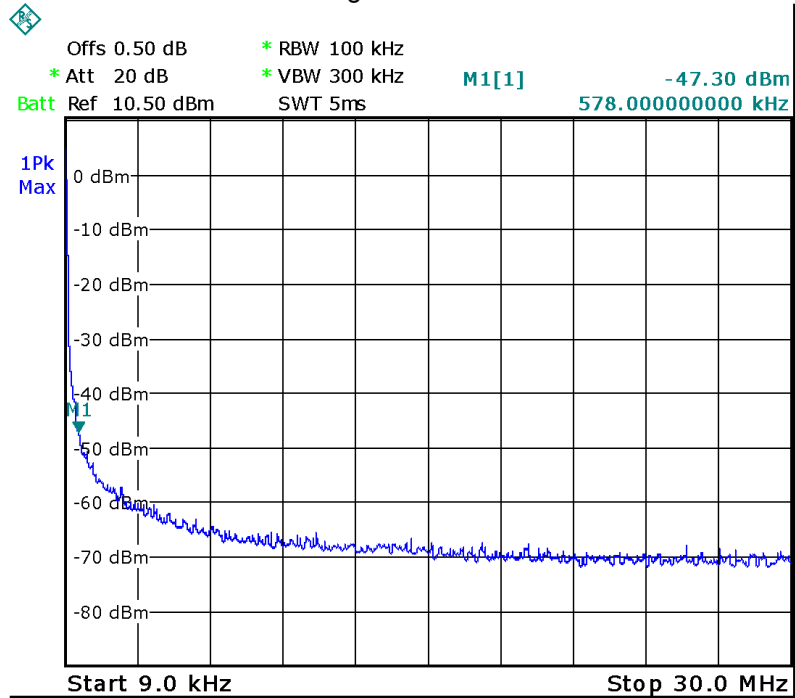





### 8DPSK

#### Low Channel

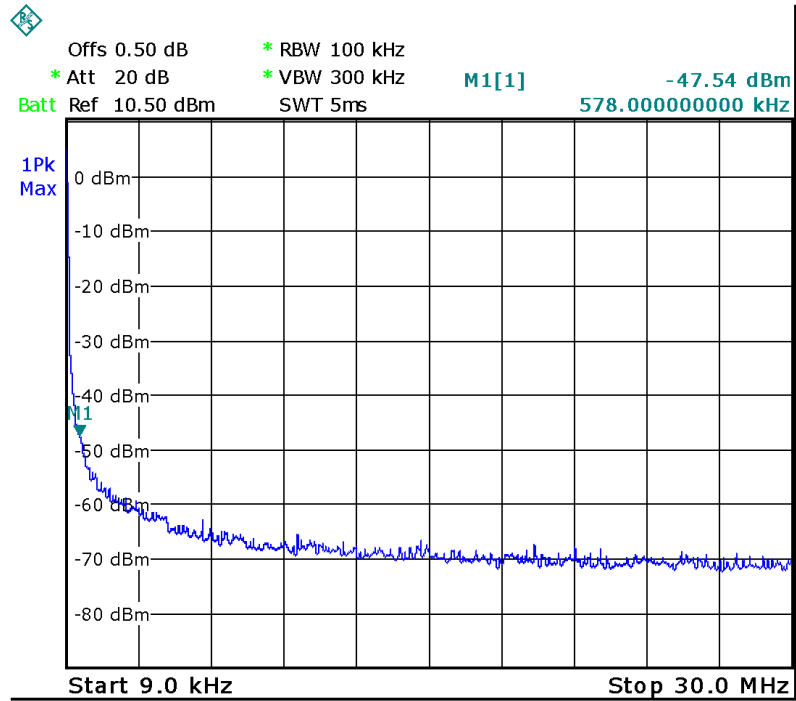


#### Middle Channel

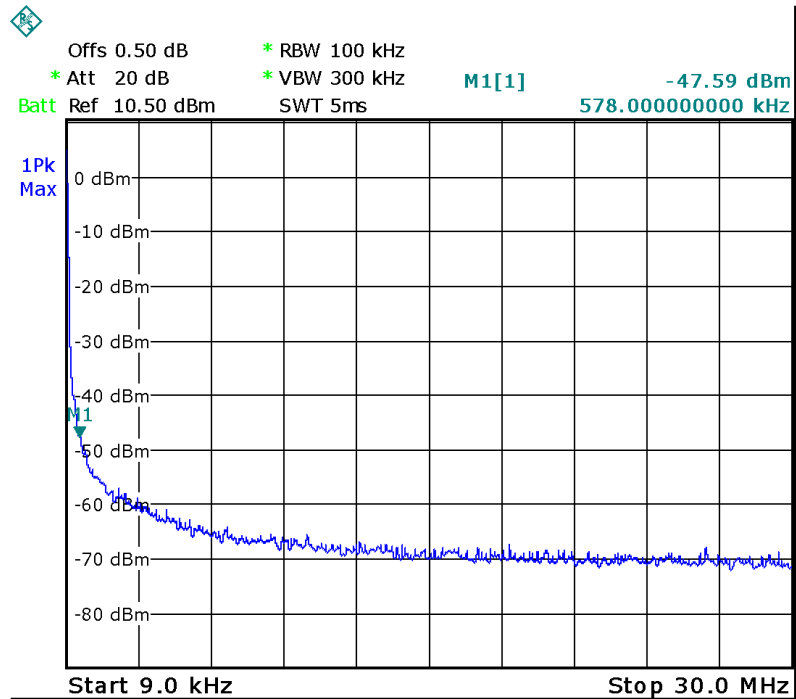

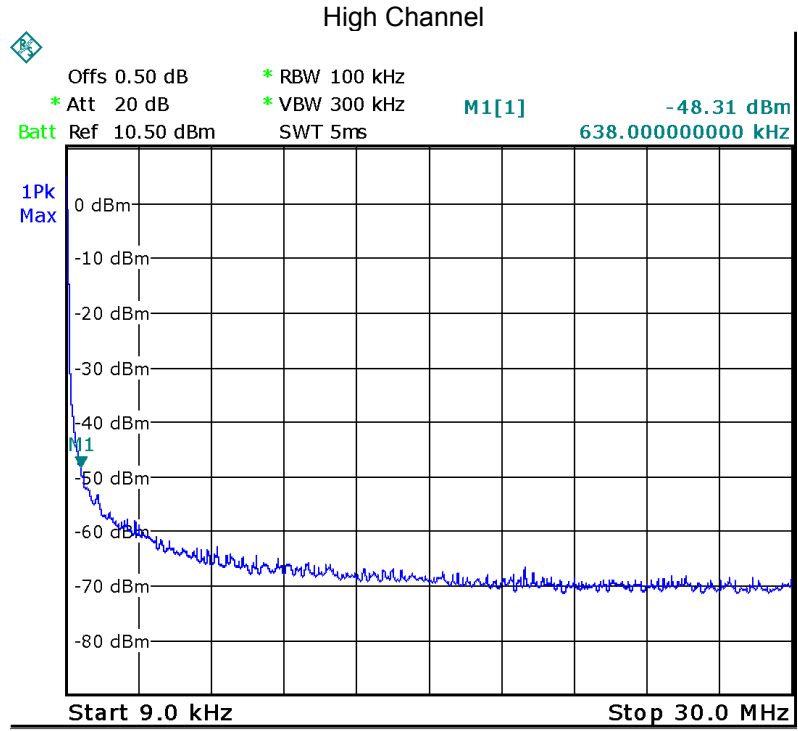


### 30MHz – 25GHz GFSK Low Channel

Fundamental

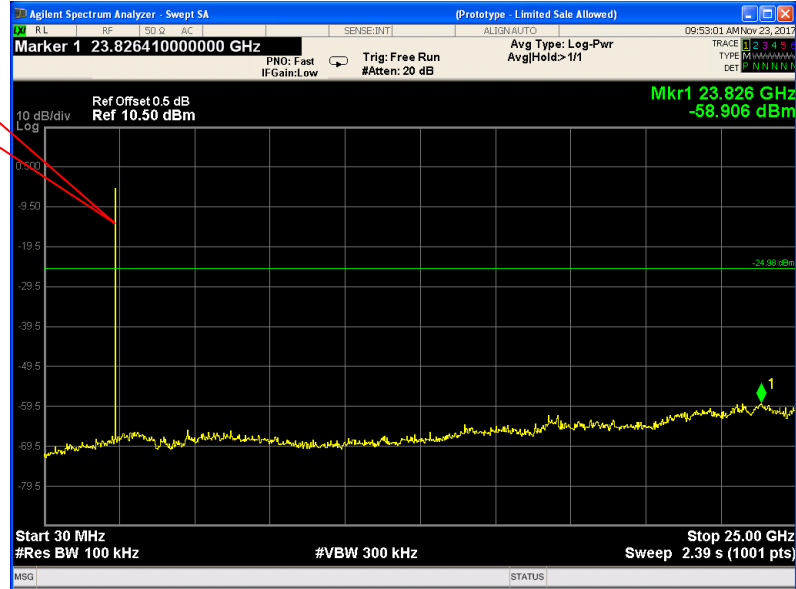


### GFSK Middle Channel

Fundamental

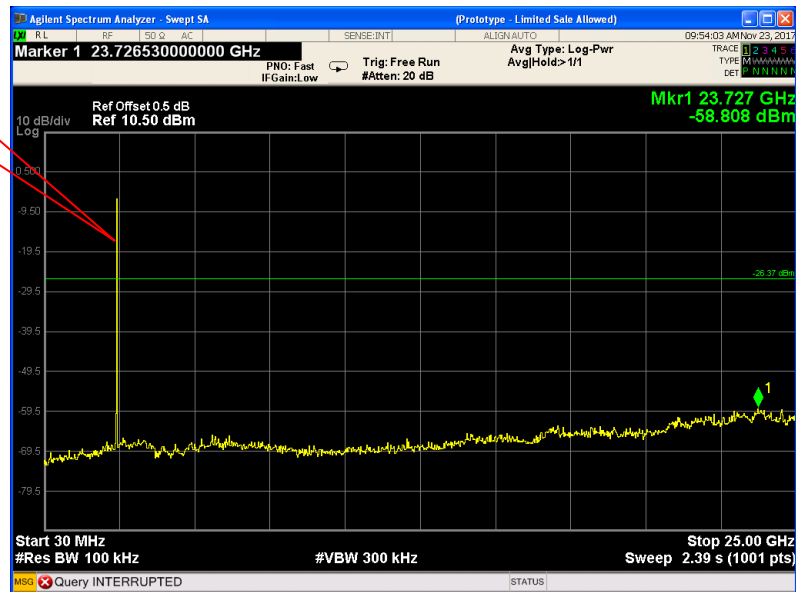

GFSK High Channel

Fundamental

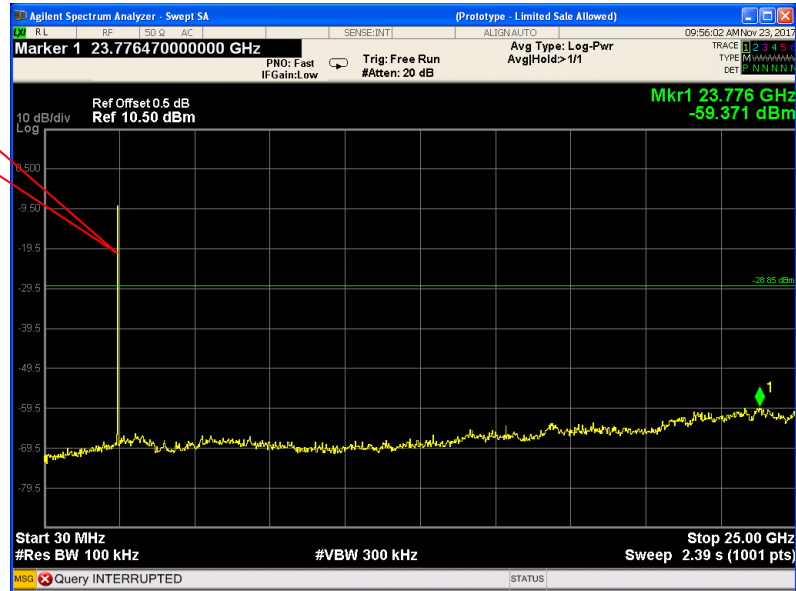


II/4 DQPSK Low Channel

Fundamental




### $\Pi/4$ DQPSK Middle Channel

Fundamental

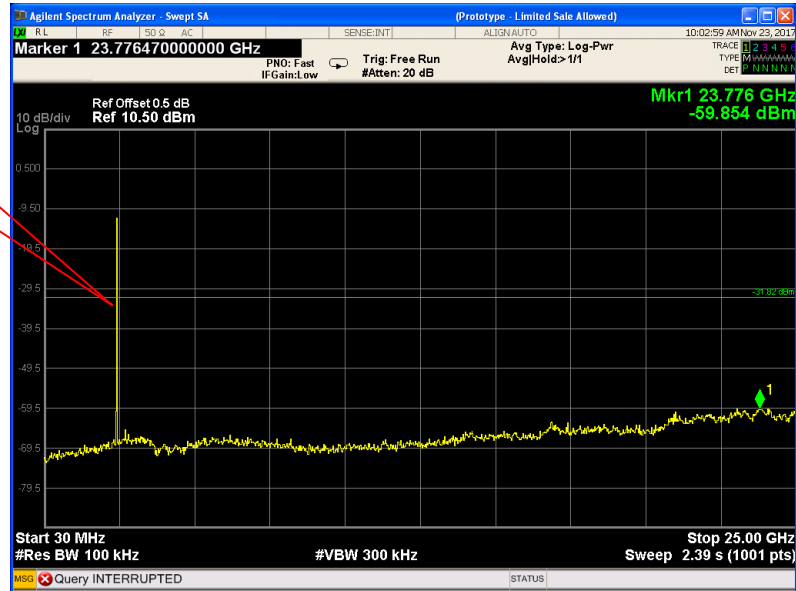


### $\Pi/4$ DQPSK High Channel


Fundamental

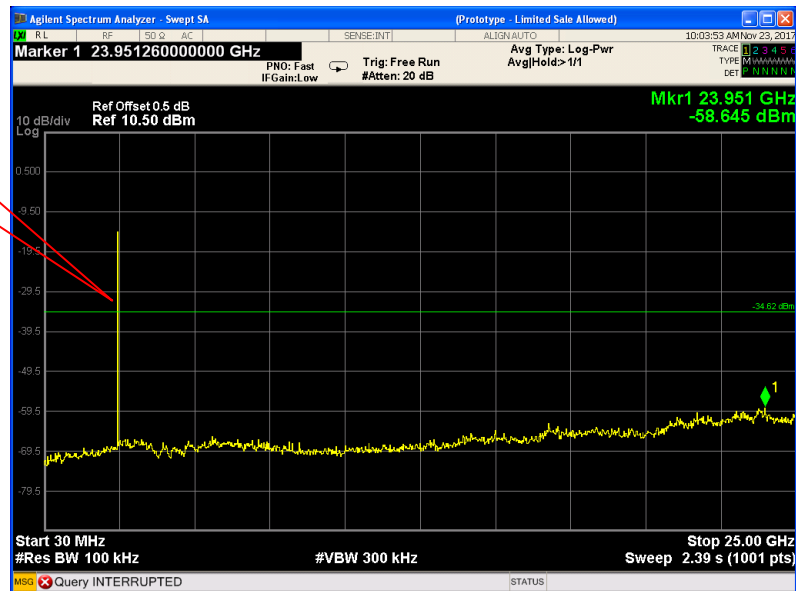

### 8DPSK Low Channel

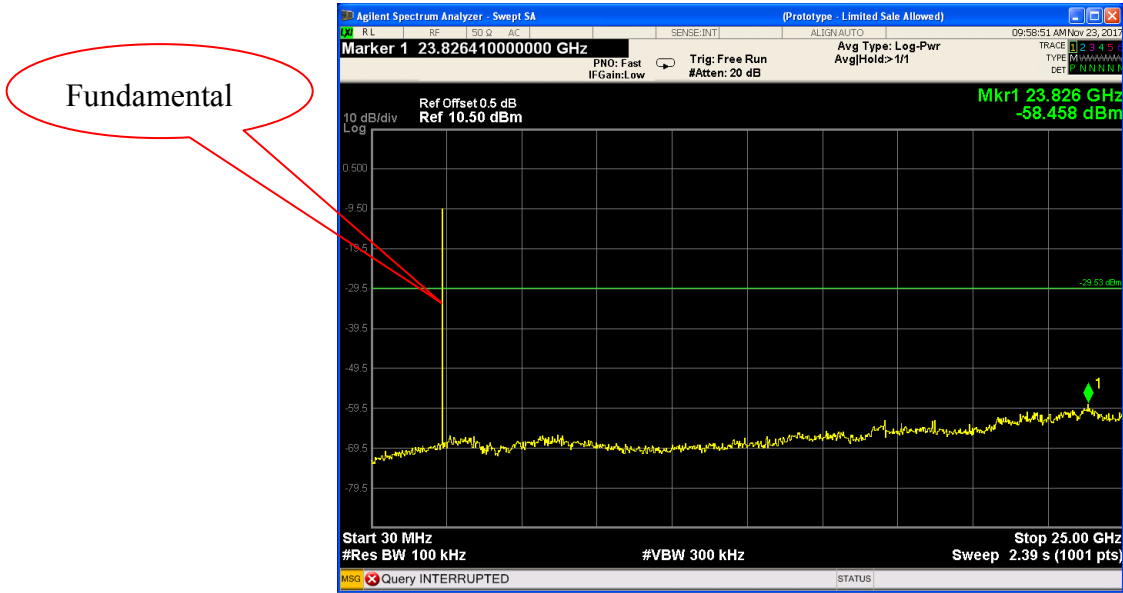

### 8DPSK Middle Channel

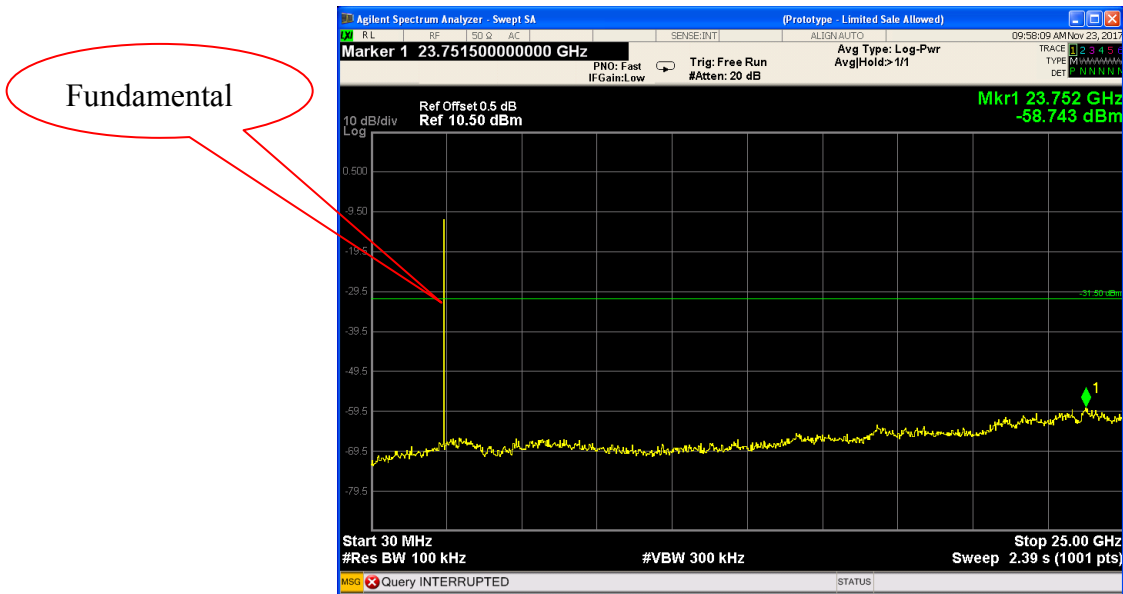

8DPSK High Channel

Fundamental



## 10 Band Edge Measurement



Test Requirement:	Section 15.247(d) In addition, radiated emissions which fall in the restricted bands. as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(c)).
Test Method:	ANSI C63.10:2013
Test Limit:	Regulation 15.247 (d),In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).
Test Mode:	Transmitting



### 10.1 Test Procedure



1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum;
2. Set the spectrum analyzer: RBW = 100kHz, VBW = 300kHz, Sweep = auto  
Detector function = peak, Trace = max hold







### 10.2 Test Result

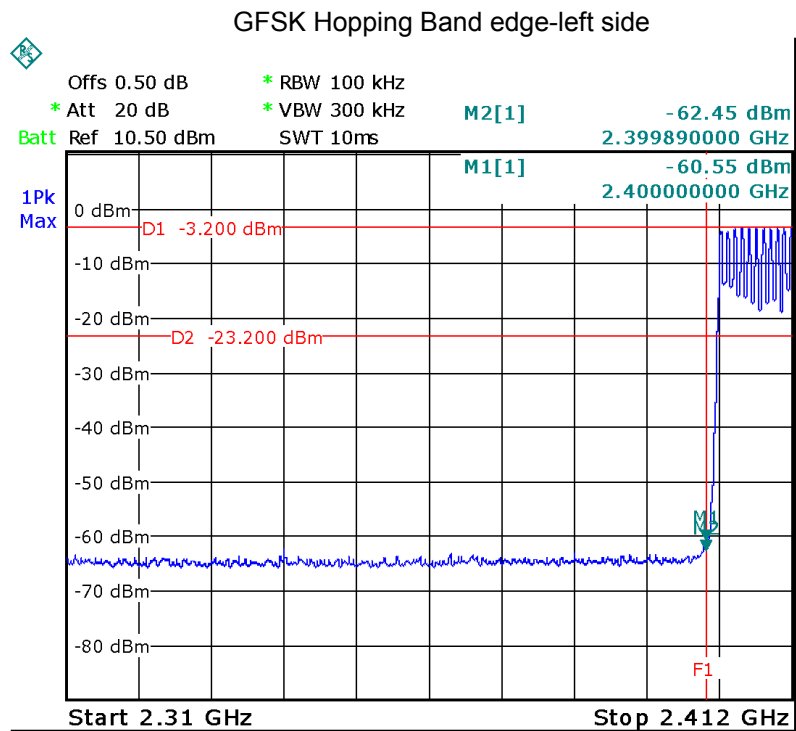
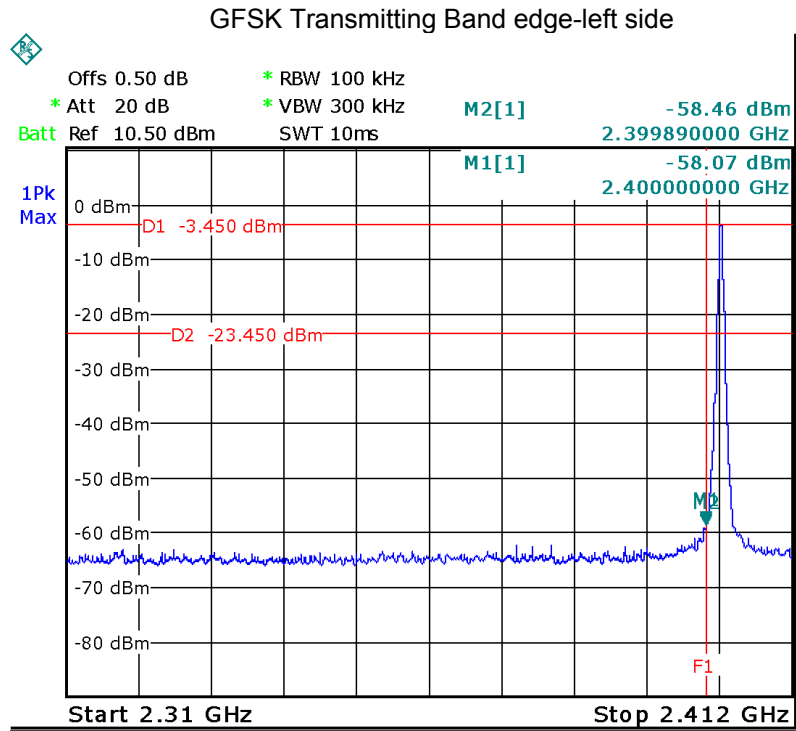


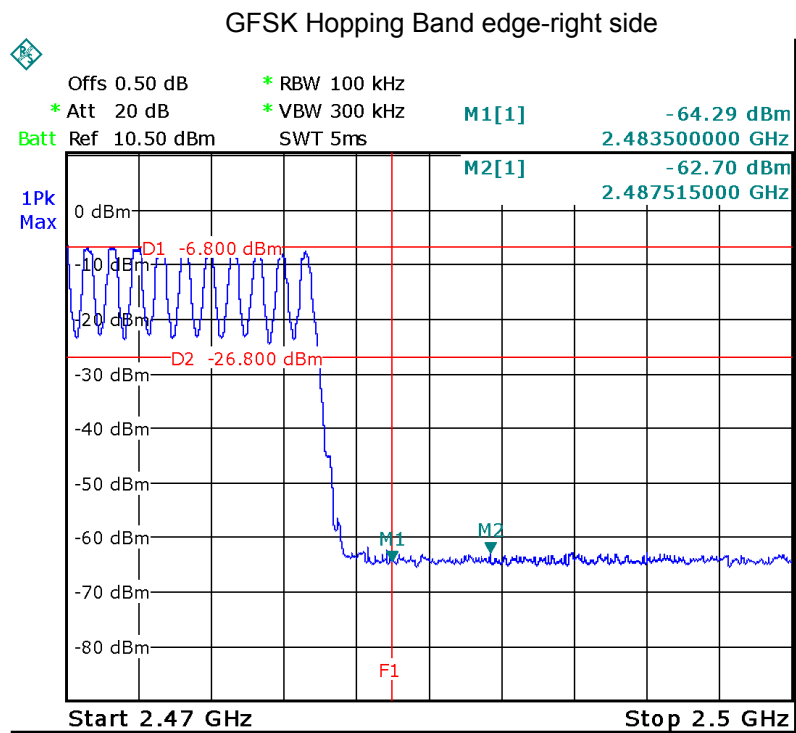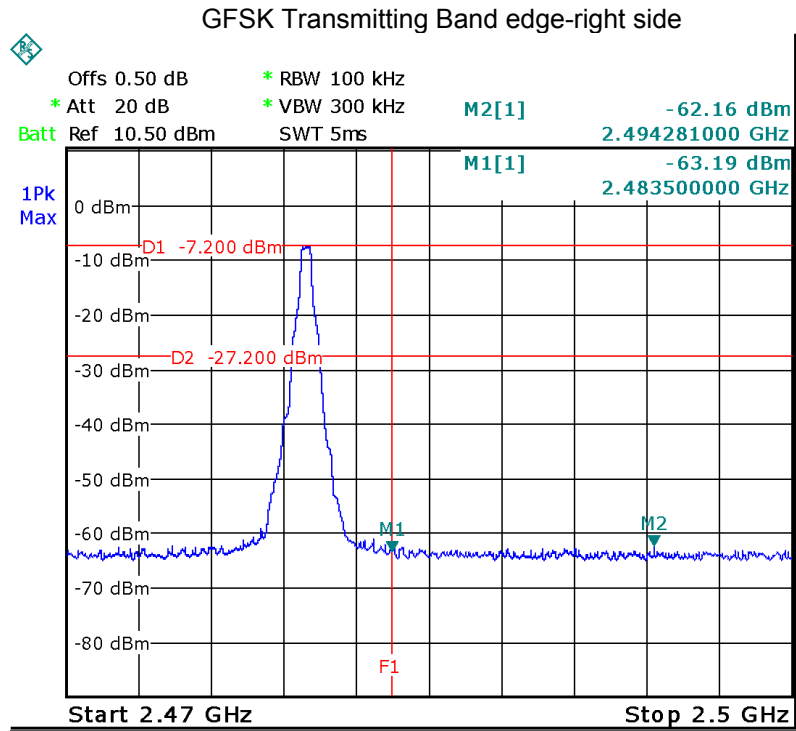

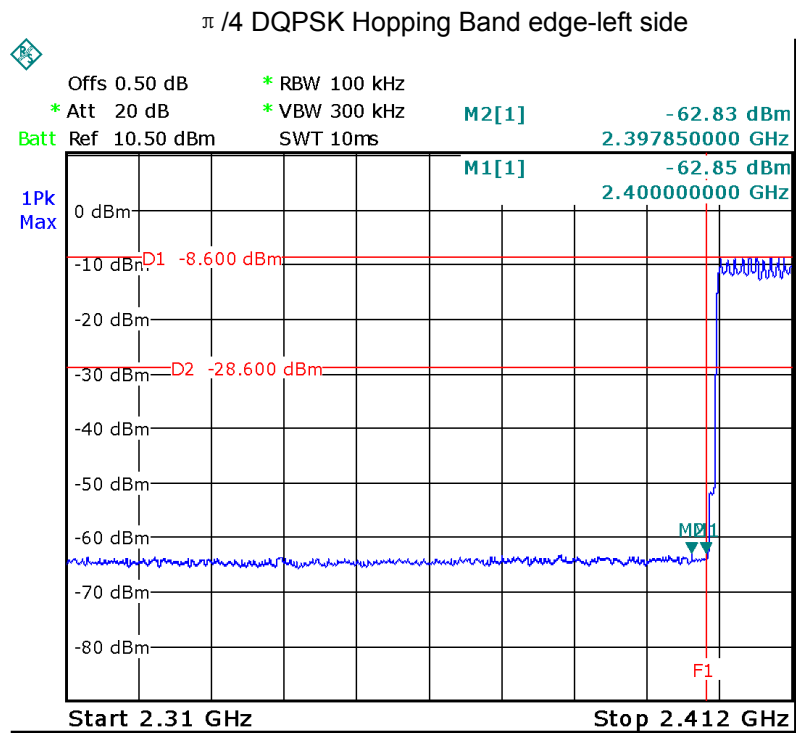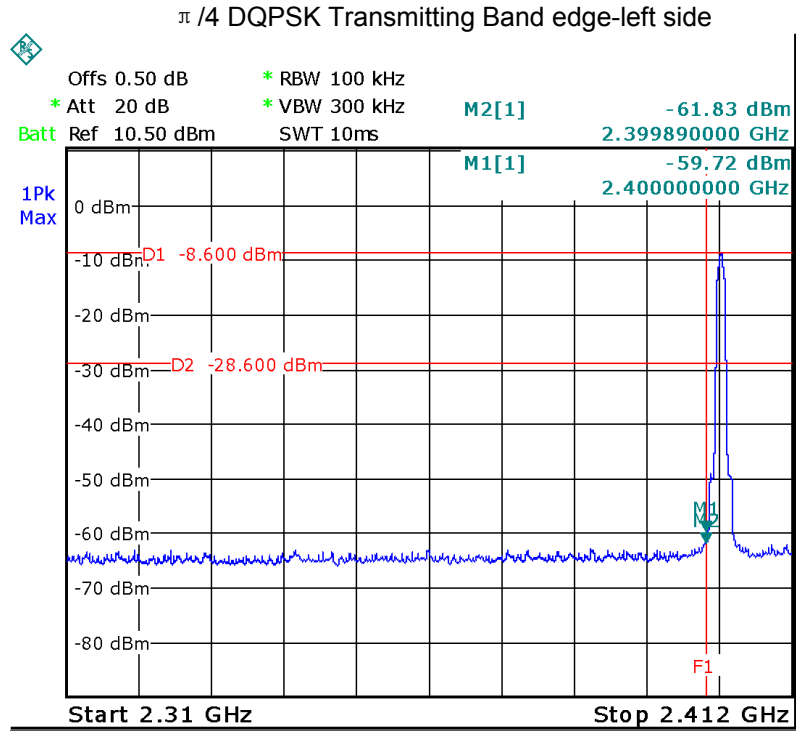

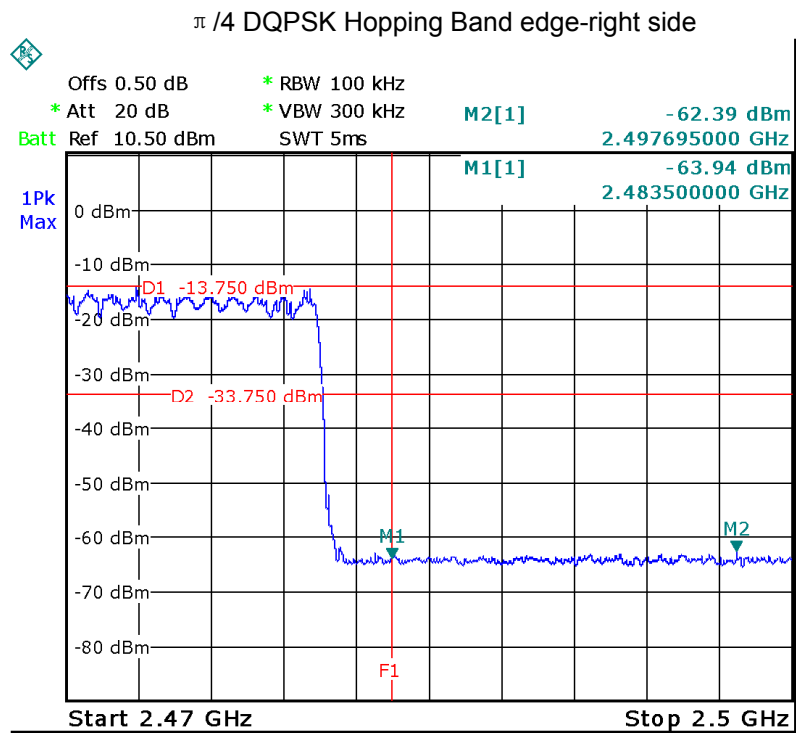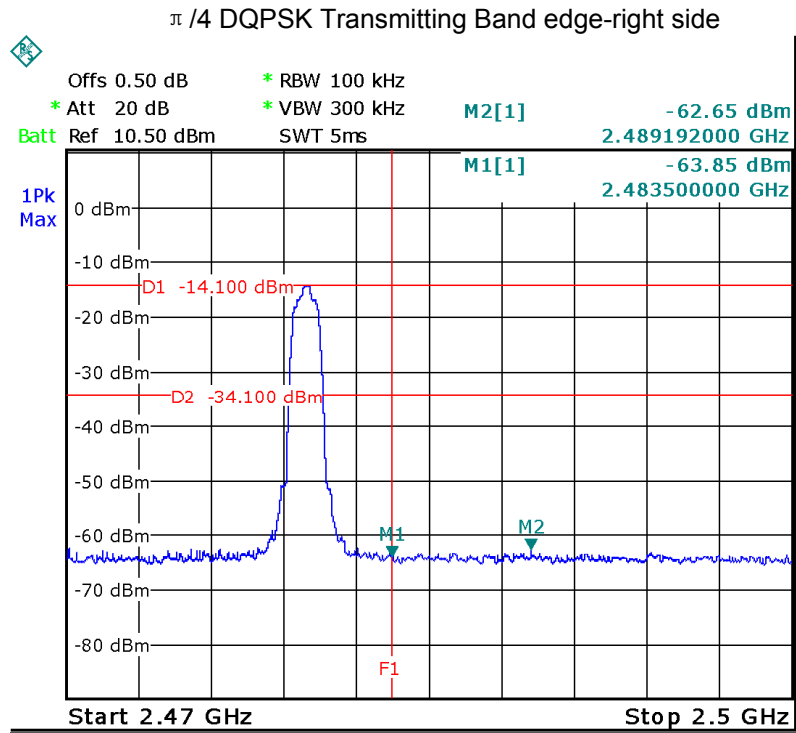

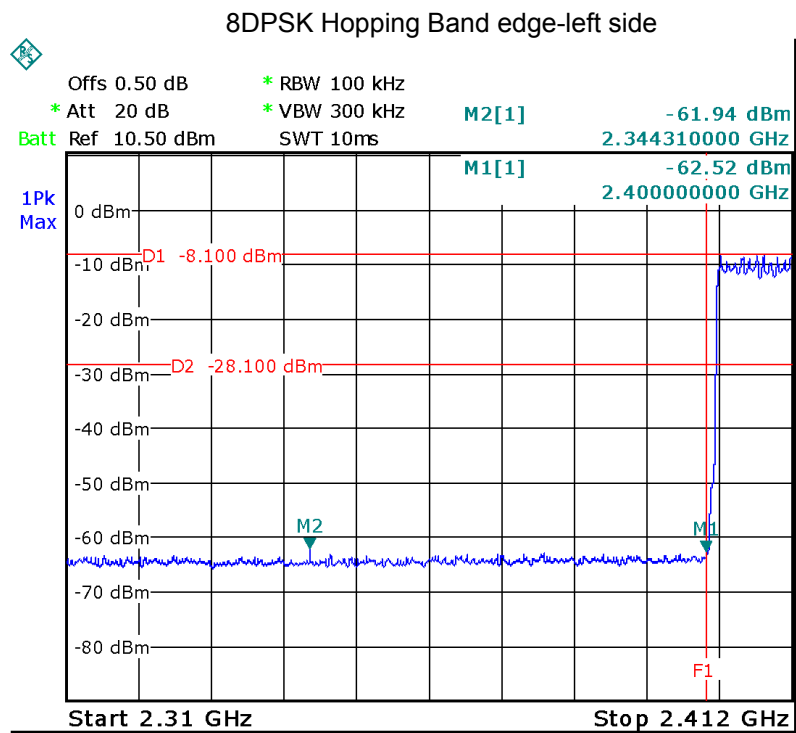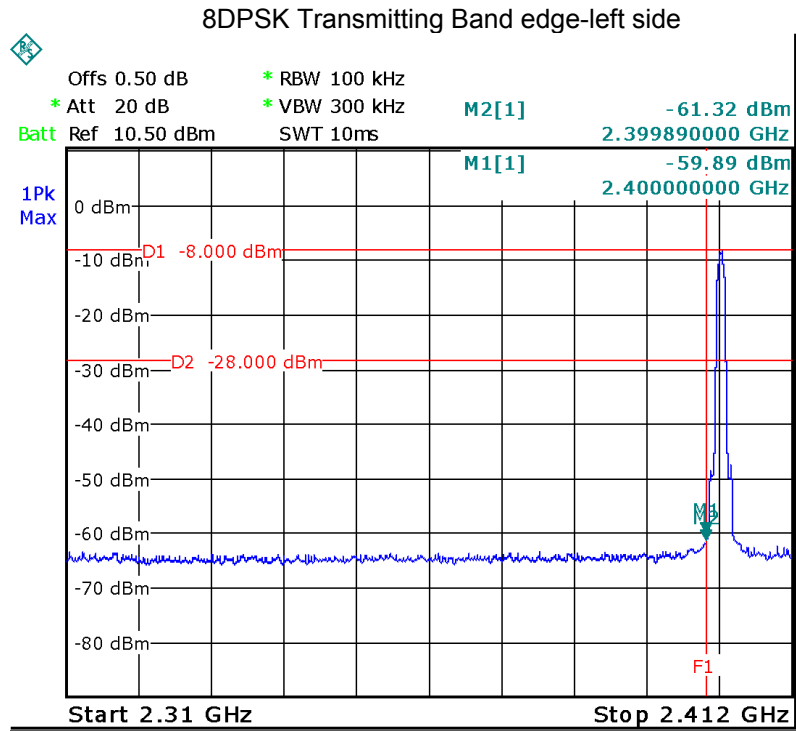

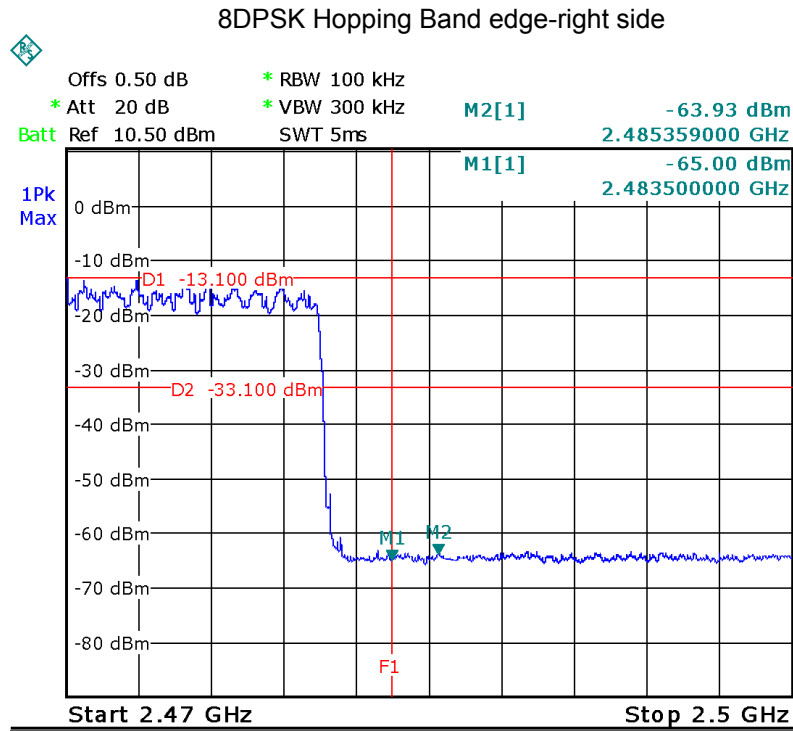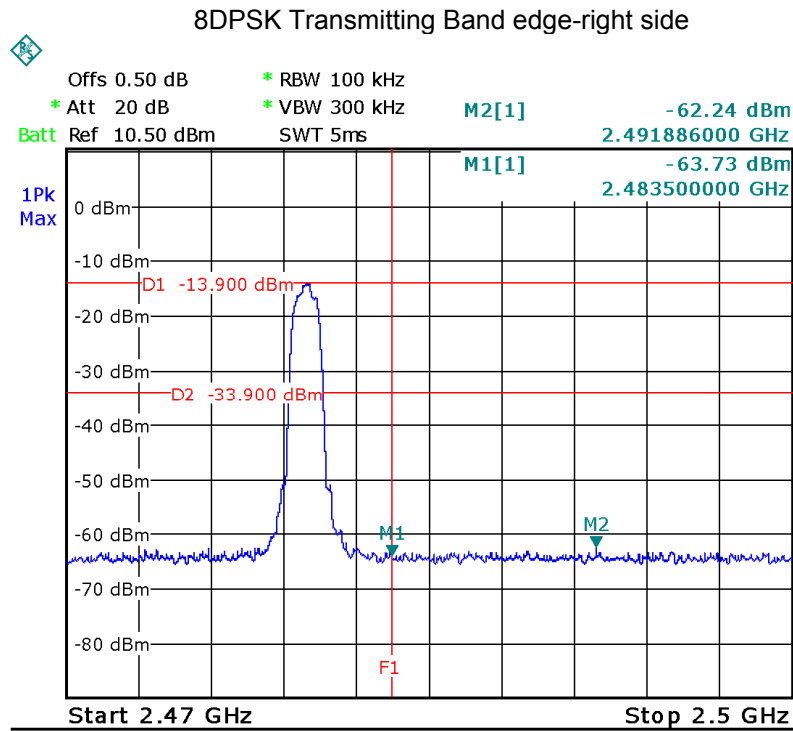

## 11 Bandwidth Measurement

Test Requirement: FCC CFR47 Part 15 Section 15.247  
 Test Method: ANSI C63.10:2013  
 Test Mode: Test in fixing operating frequency at low, Middle, high channel.

### 11.1 Test Procedure


1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum;
2. Set the spectrum analyzer: RBW = 30kHz, VBW = 100kHz

### 11.2 Test Result


Modulation	Test Channel	20dB Bandwidth(MHz)	99% Bandwidth(MHz)
GFSK	Low	1.000	0.892
GFSK	Middle	1.000	0.898
GFSK	High	1.000	0.904
$\pi/4$ DQPSK	Low	1.353	1.204
$\pi/4$ DQPSK	Middle	1.353	1.204
$\pi/4$ DQPSK	High	1.353	1.204
8DPSK	Low	1.317	1.210
8DPSK	Middle	1.317	1.210
8DPSK	High	1.317	1.210

### Test plots

GFSK Low Channel

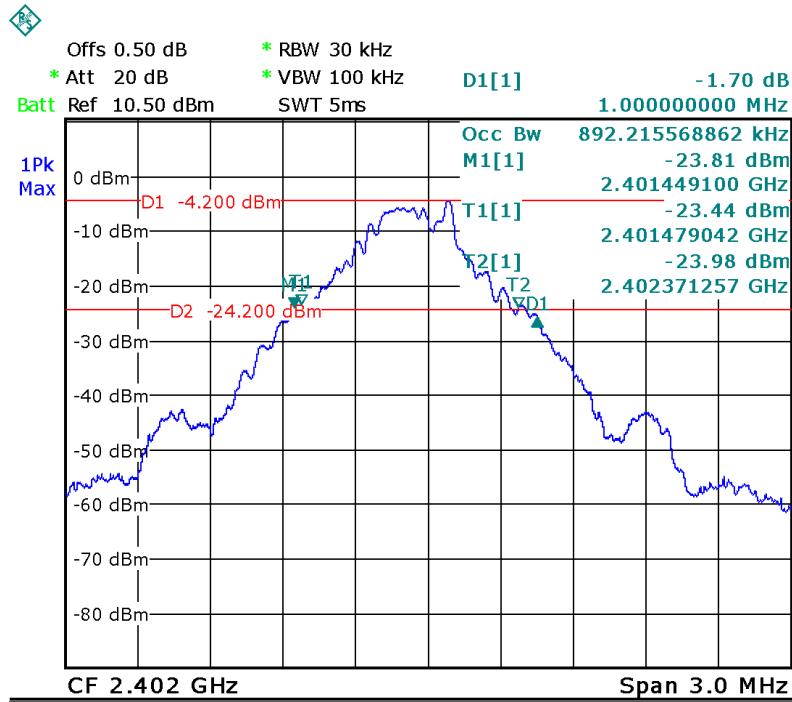


GFSK Middle Channel

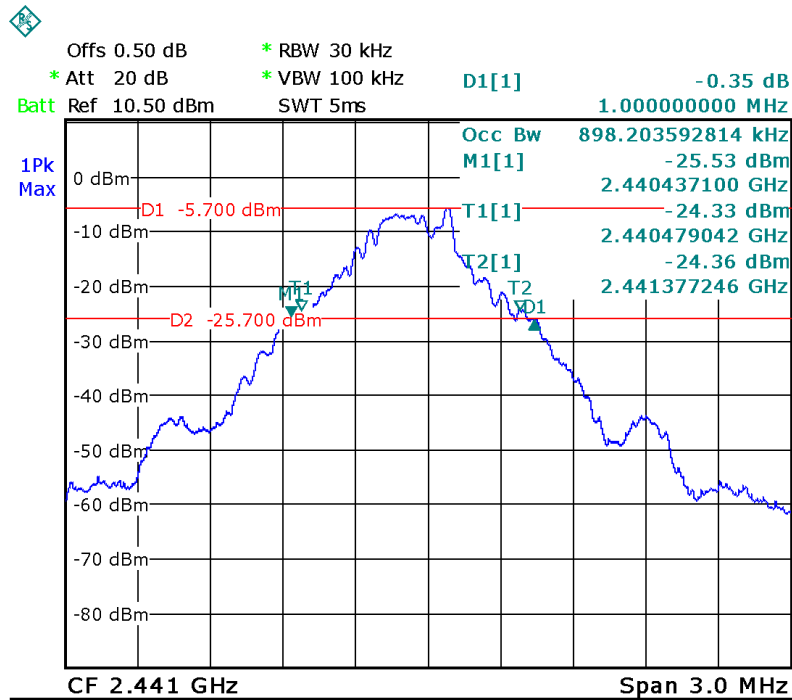





### GFSK High Channel

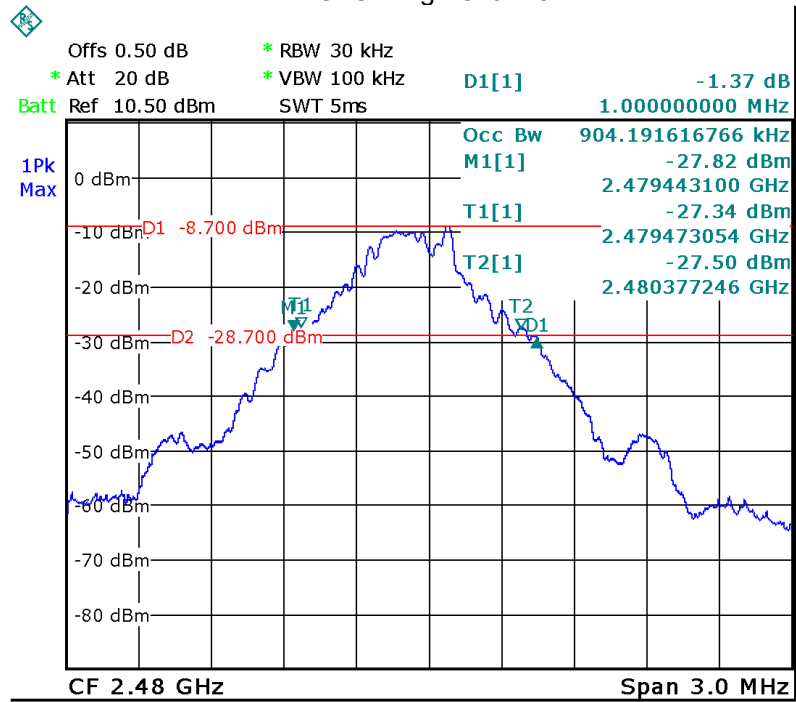


### $\pi/4$ DQPSK Low Channel

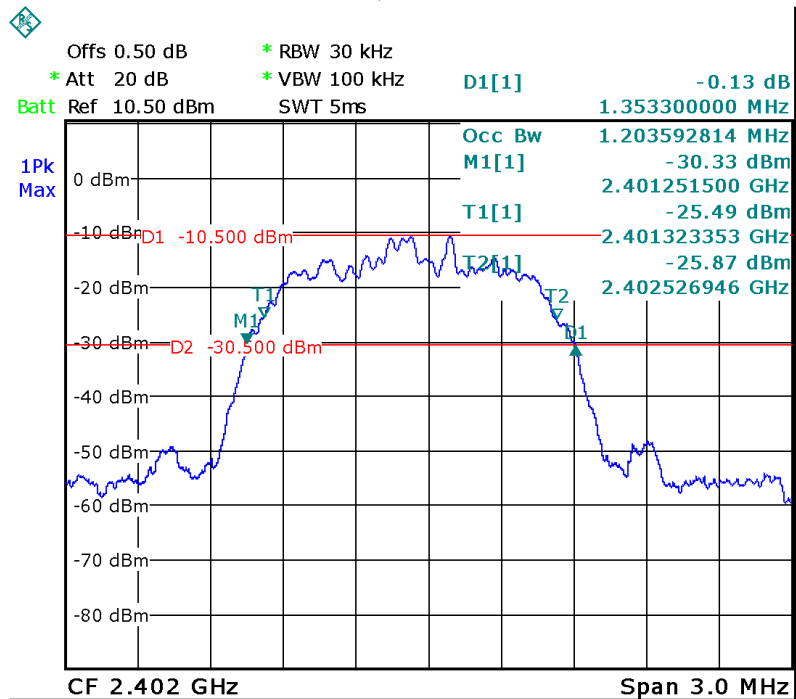


$\pi/4$  DQPSK Middle Channel

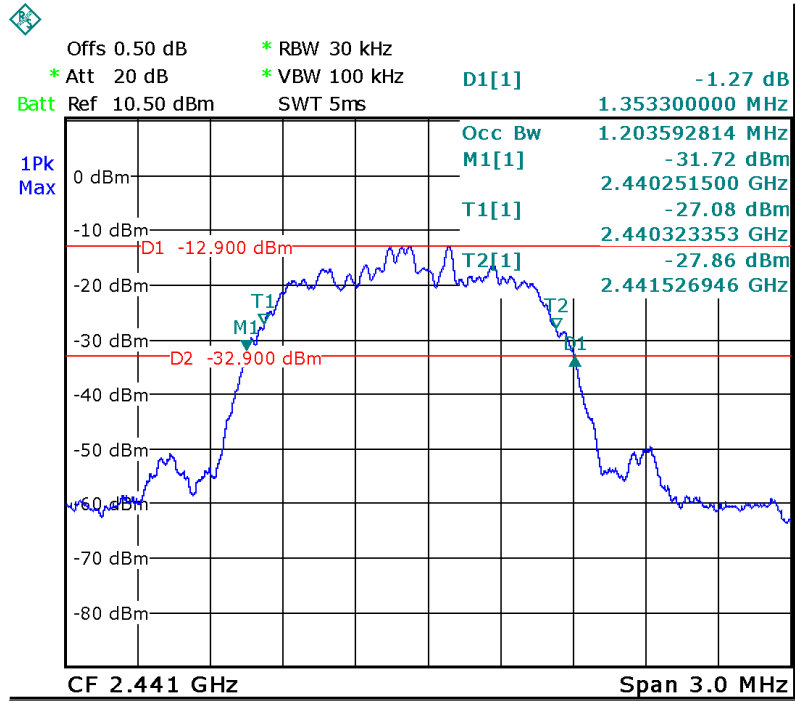


$\pi/4$  DQPSK High Channel

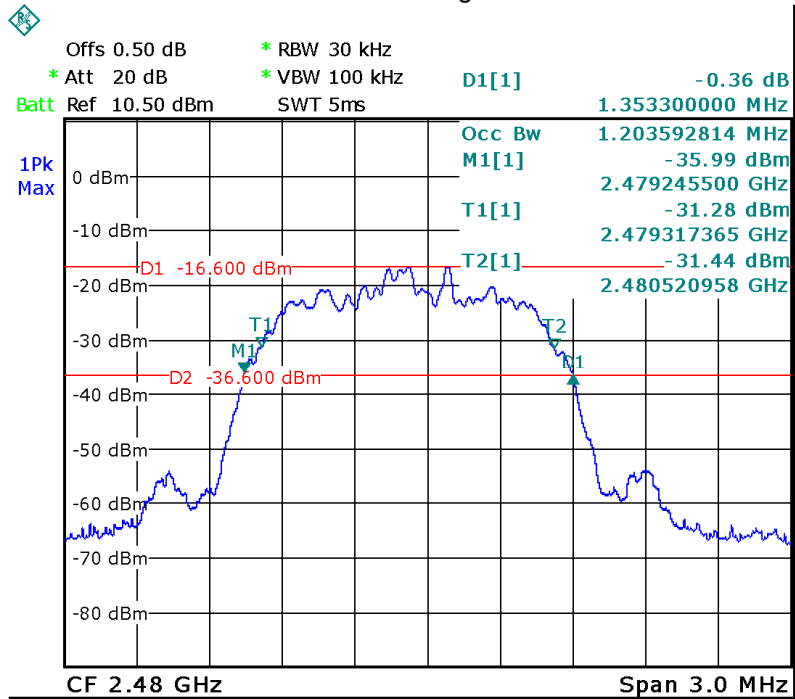


### 8DPSK Low Channel

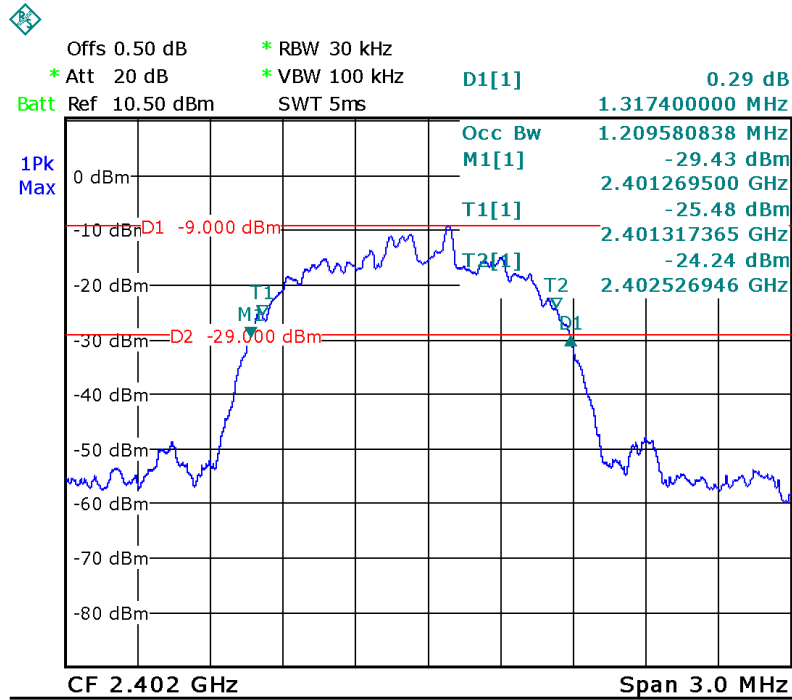

### 8DPSK Middle Channel

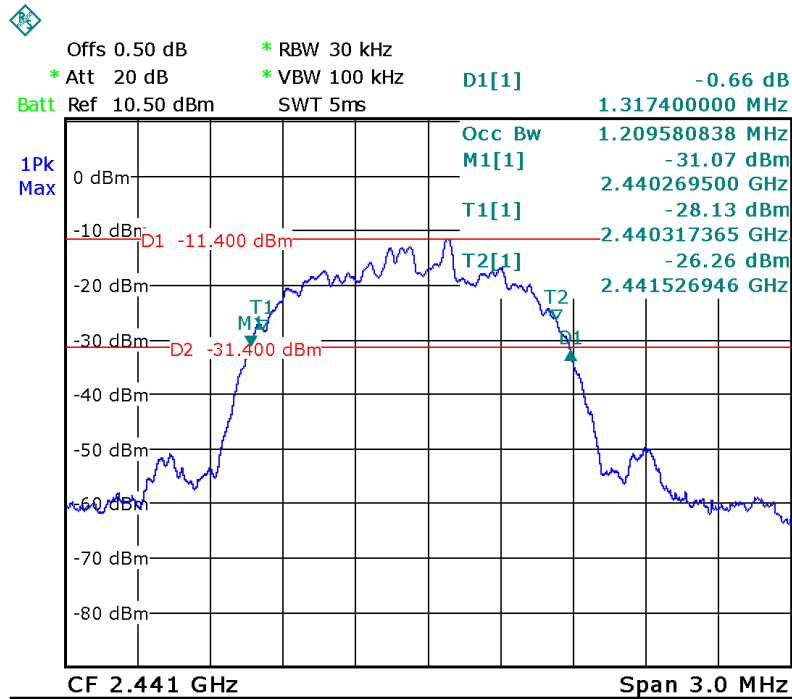

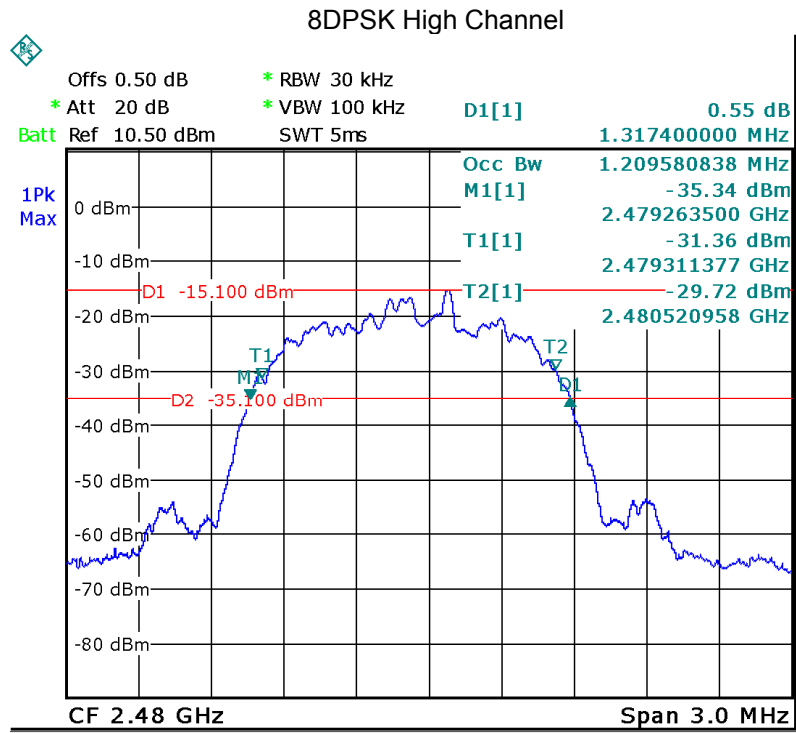

## 12 Maximum Peak Output Power

Test Requirement:	FCC CFR47 Part 15 Section 15.247
Test Method:	ANSI C63.10:2013
Test Limit:	Regulation 15.247 (b)(1), For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725-5850 MHz band: 1 watt. For all other frequency hopping systems in the 2400-2483.5 MHz band: 0.125 watts.
Test mode:	Test in fixing frequency transmitting mode.

### 12.1 Test Procedure


1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
2. Set the spectrum analyzer: RBW = 3MHz. VBW = 3MHz. Sweep = auto; Detector Function = Peak.
3. Keep the EUT in transmitting at lowest, medium and highest channel individually. Record the max value.

### 12.2 Test Result


Modulation	Test Channel	Output Power (dBm)	Limit (dBm)
GFSK	Low	-3.62	30
GFSK	Middle	-4.36	30
GFSK	High	-7.32	30
$\pi/4$ DQPSK	Low	-5.95	21
$\pi/4$ DQPSK	Middle	-7.65	21
$\pi/4$ DQPSK	High	-11.28	21
8DPSK	Low	-5.49	21
8DPSK	Middle	-7.22	21
8DPSK	High	-10.79	21



### Test plots



#### GFSK Low Channel

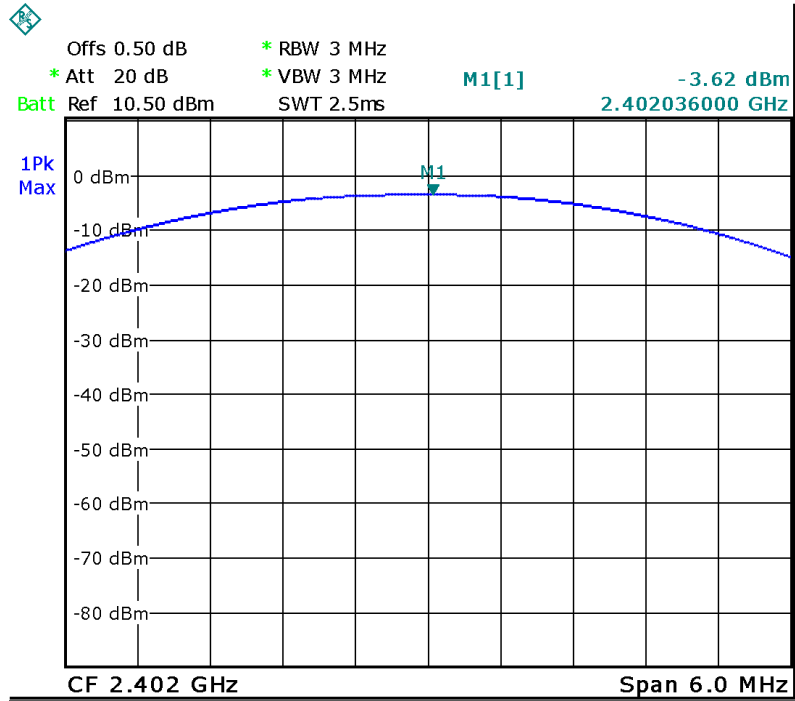

#### GFSK Middle Channel

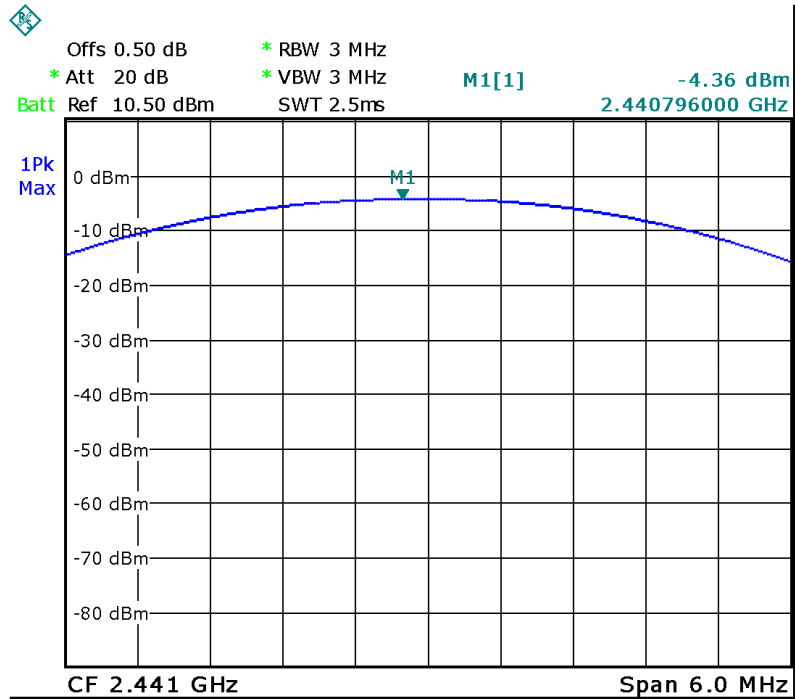


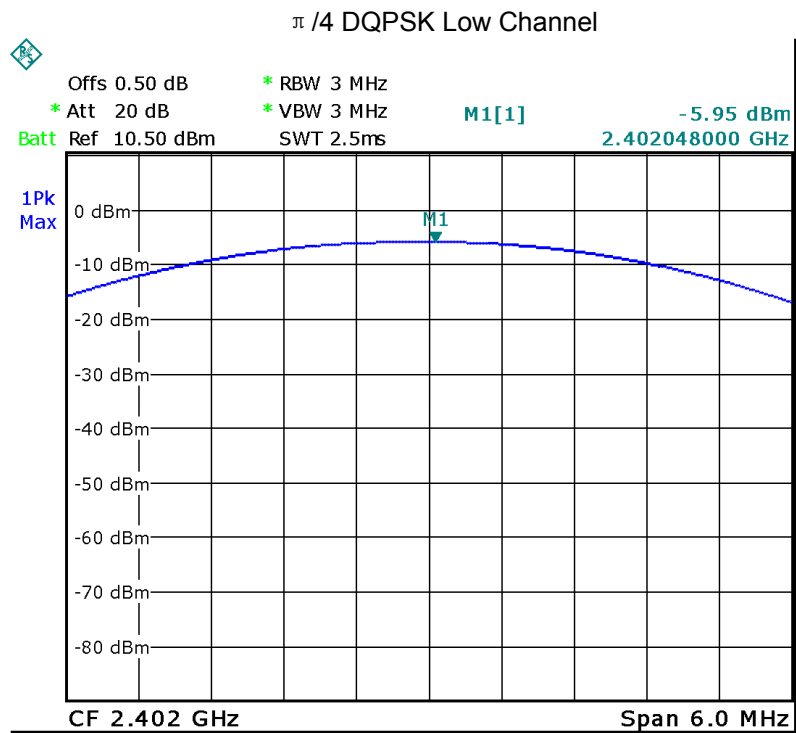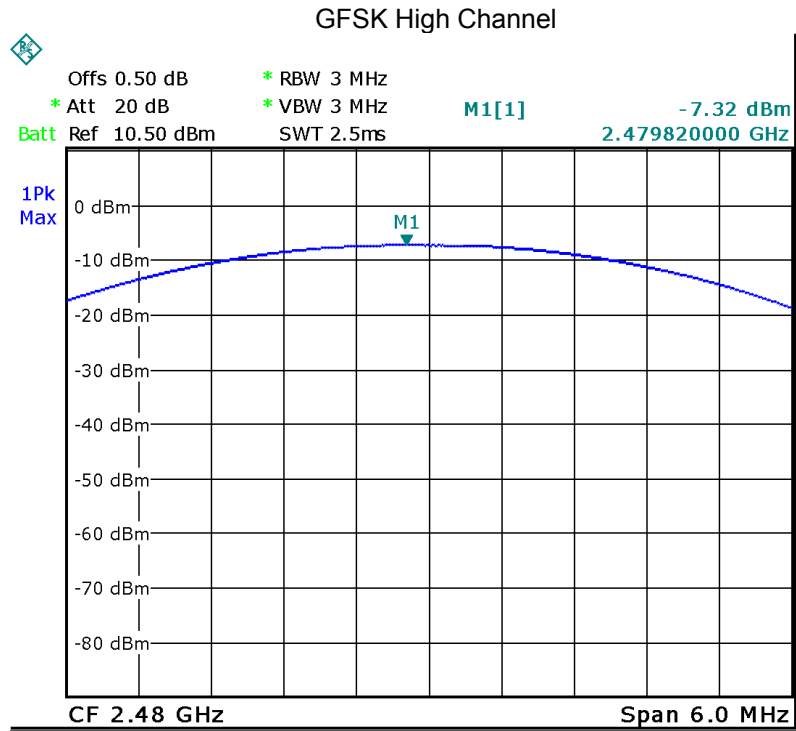

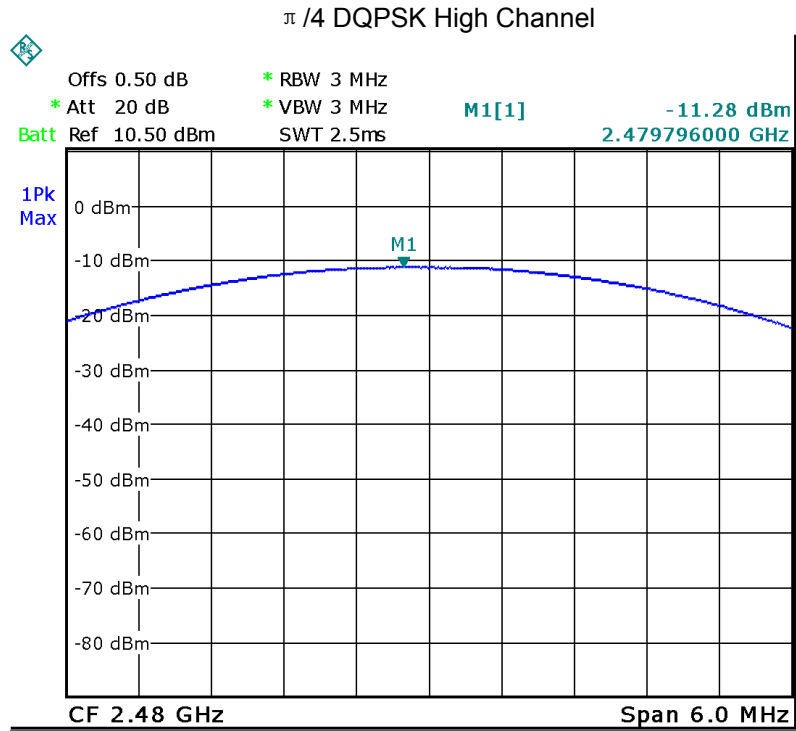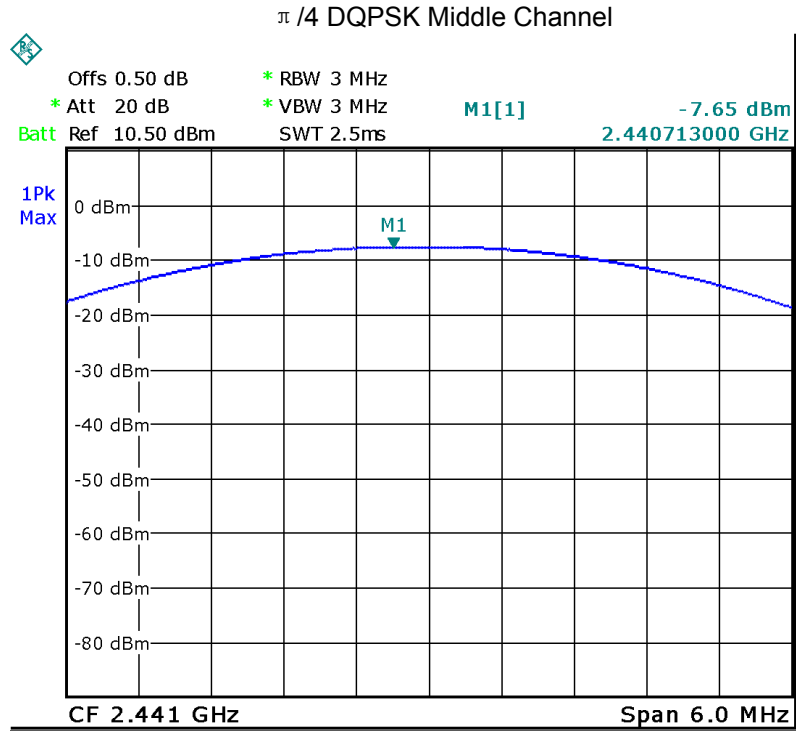





### 8DPSK Low Channel

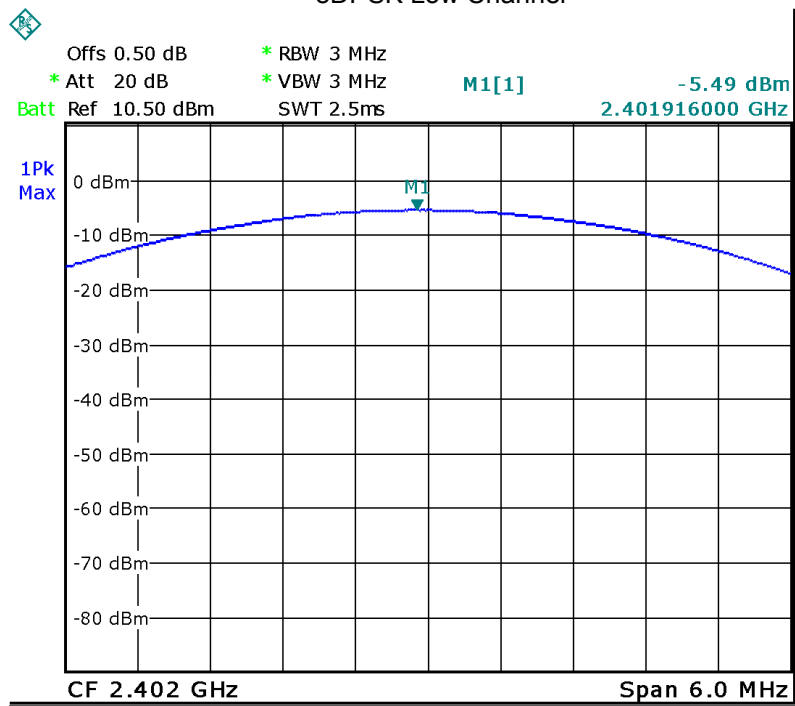

### 8DPSK Middle Channel

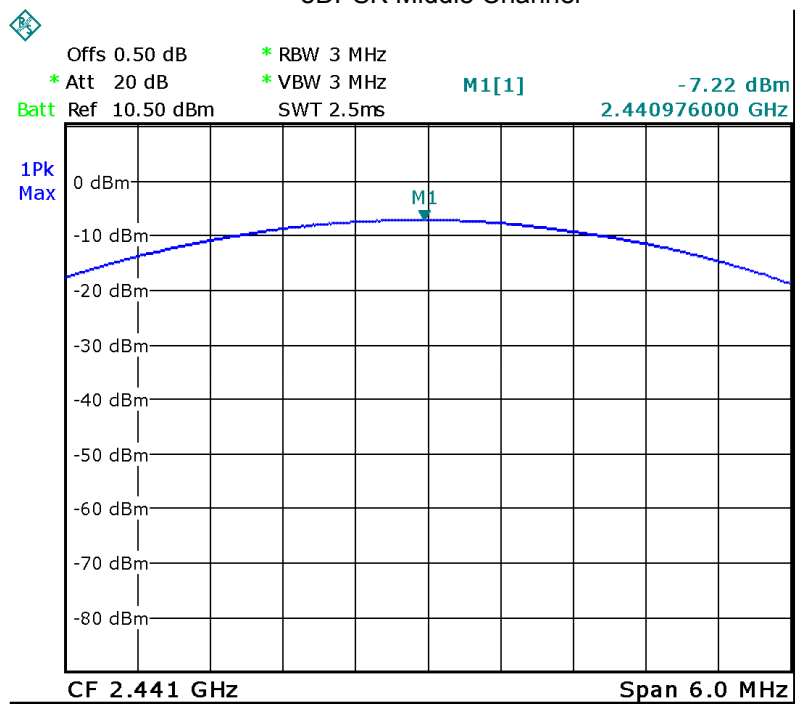

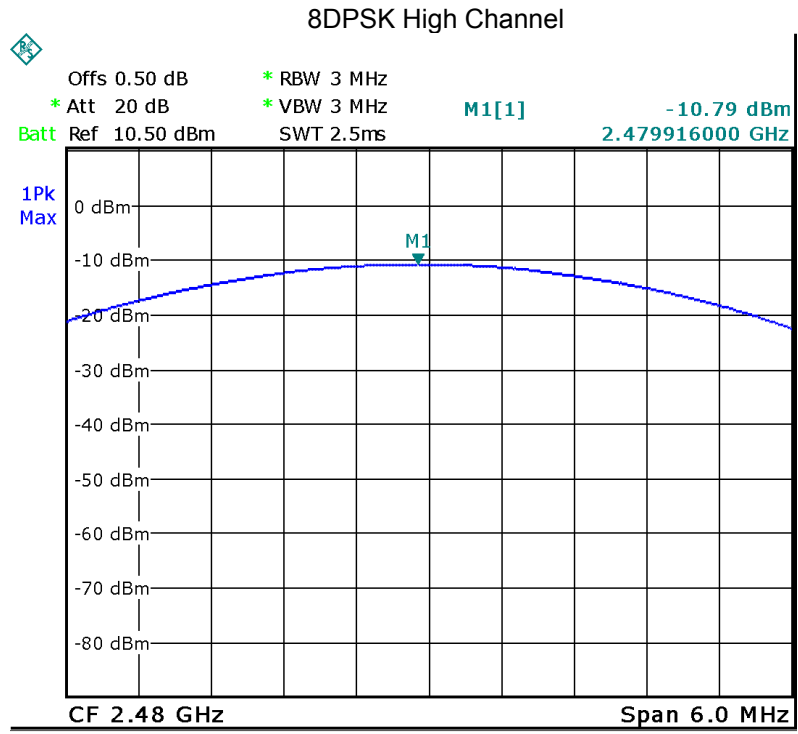

## 13 Hoping Channel Separation

Test Requirement:	FCC CFR47 Part 15 Section 15.247
Test Method:	ANSI C63.10:2013
Test Limit:	Regulation 15.247(a)(1) Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 0.125W.
Test Mode:	Test in hopping transmitting operating mode.

### 13.1 Test Procedure


1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
2. Set the spectrum analyzer: RBW = 30kHz. VBW = 100kHz , Span = 3.0MHz. Sweep = auto; Detector Function = Peak. Trace = Max hold.
3. Allow the trace to stabilize. Use the marker-delta function to determine the separation between the peaks of the adjacent channels. The limit is specified in one of the subparagraphs of this Section Submit this plot.

### 13.2 Test Result


Modulation	Test Channel	Separation (MHz)	Result
GFSK	Low	1.000	PASS
GFSK	Middle	1.000	PASS
GFSK	High	1.000	PASS
$\pi/4$ DQPSK	Low	1.000	PASS
$\pi/4$ DQPSK	Middle	1.000	PASS
$\pi/4$ DQPSK	High	1.000	PASS
8DPSK	Low	1.000	PASS
8DPSK	Middle	1.000	PASS
8DPSK	High	1.000	PASS



### Test plots



#### GFSK Low Channel


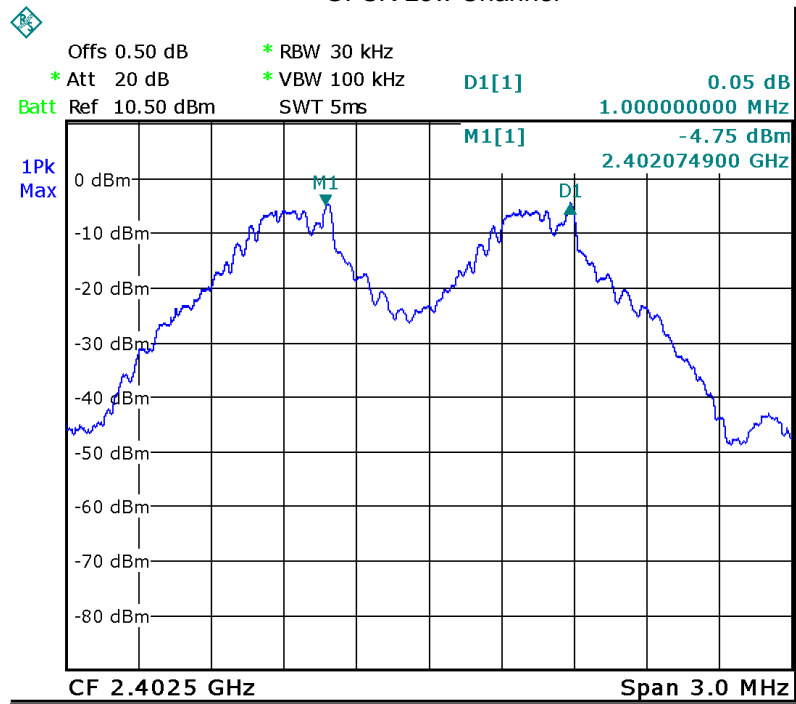



#### GFSK Middle Channel

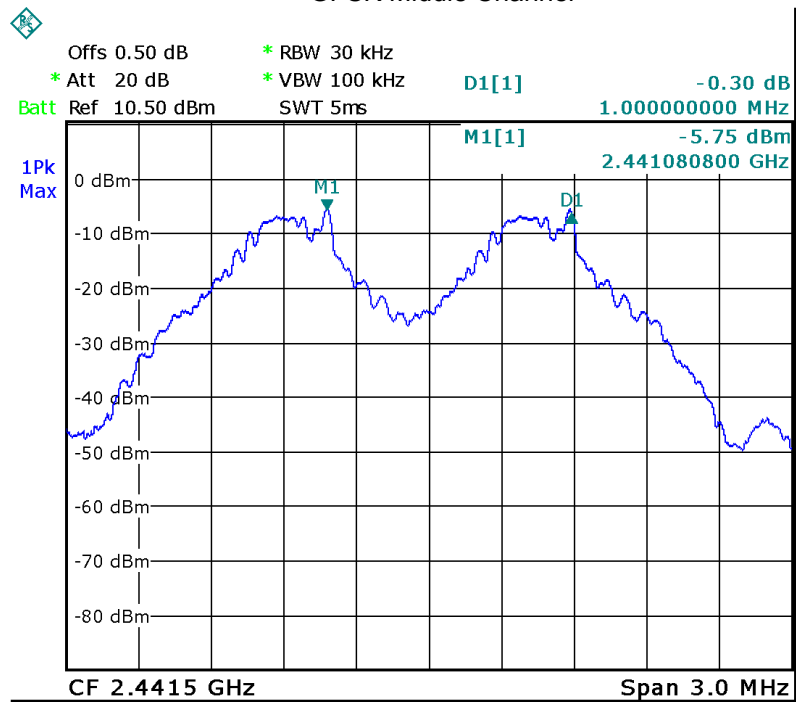

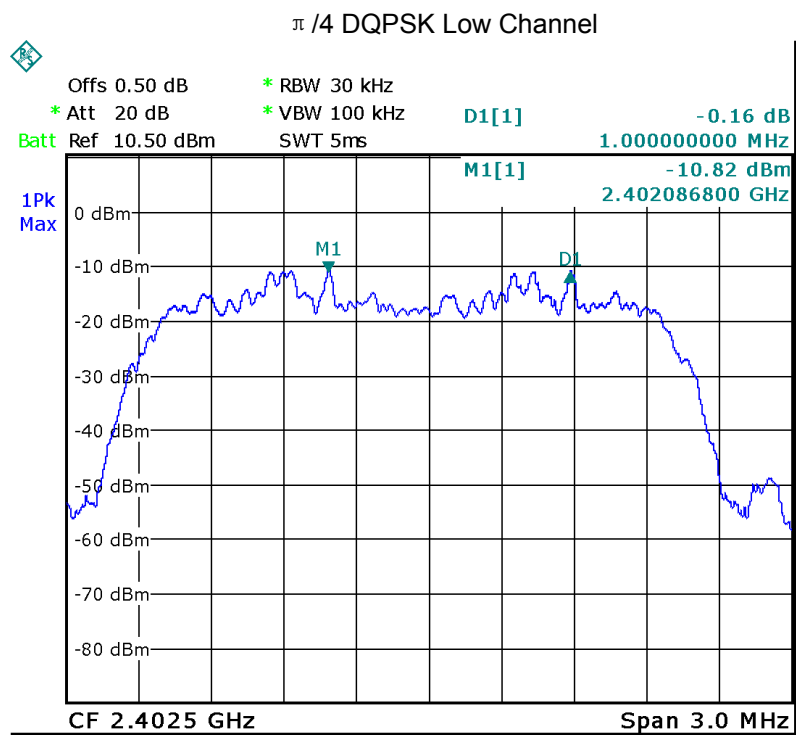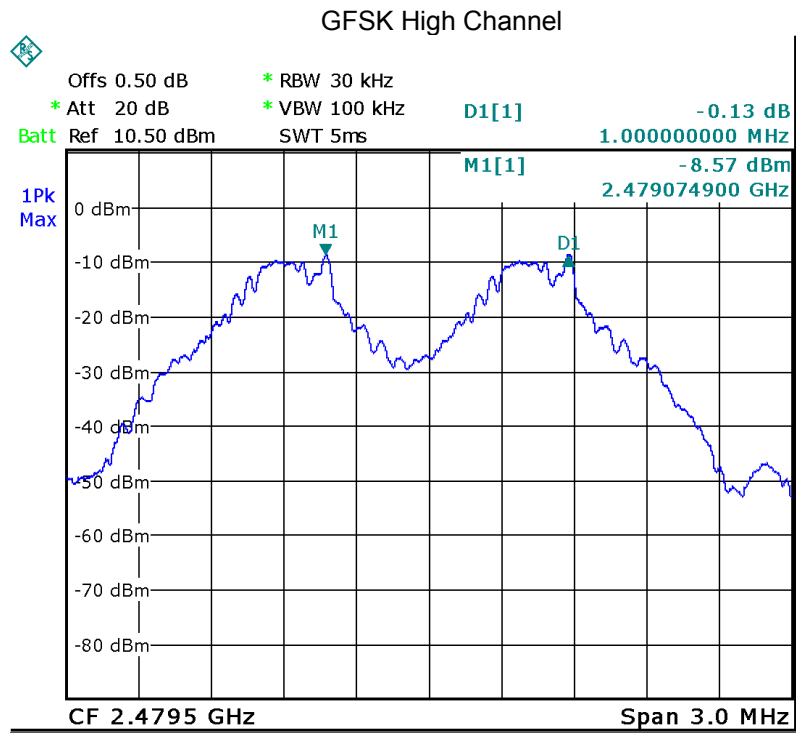

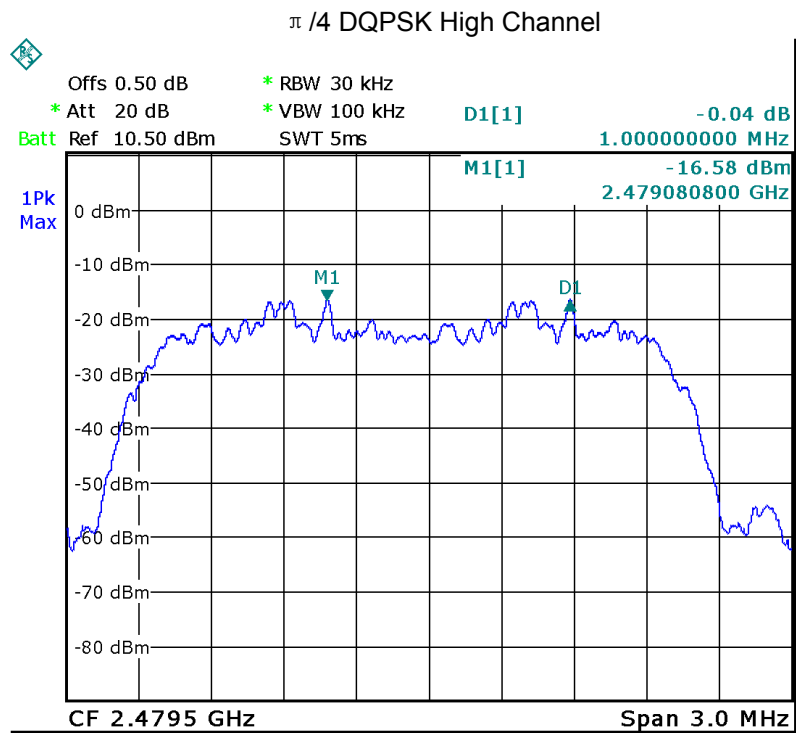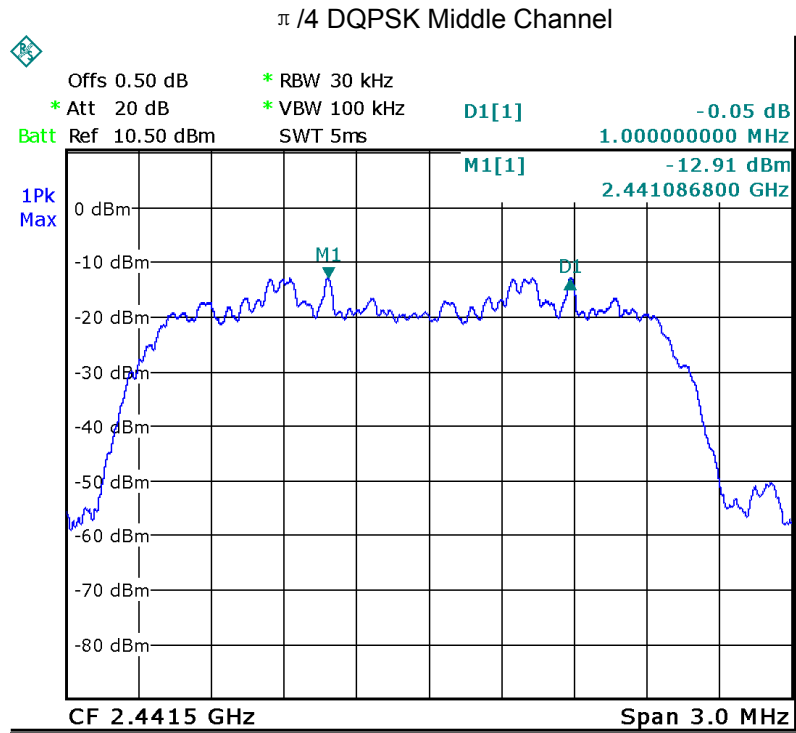

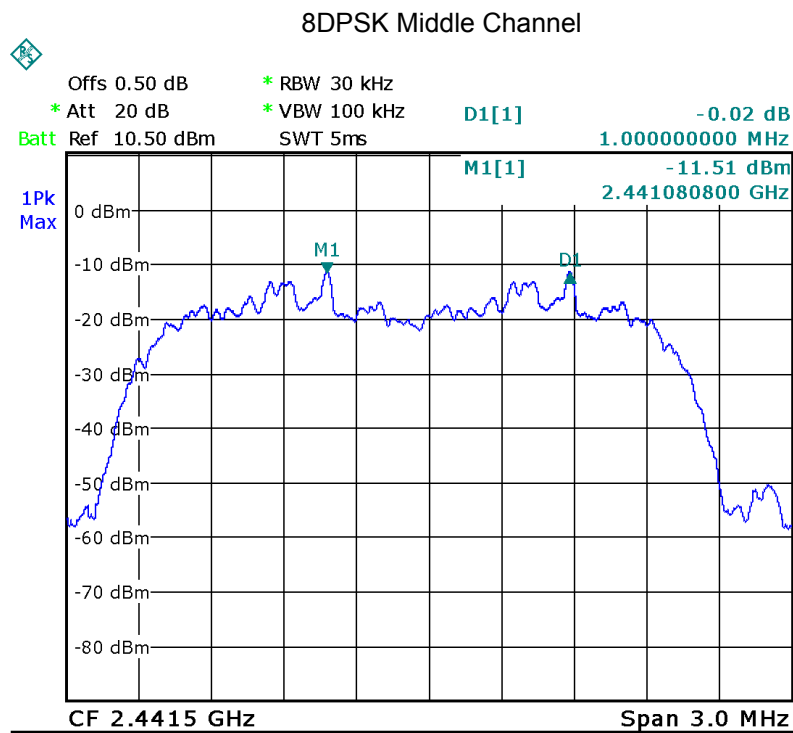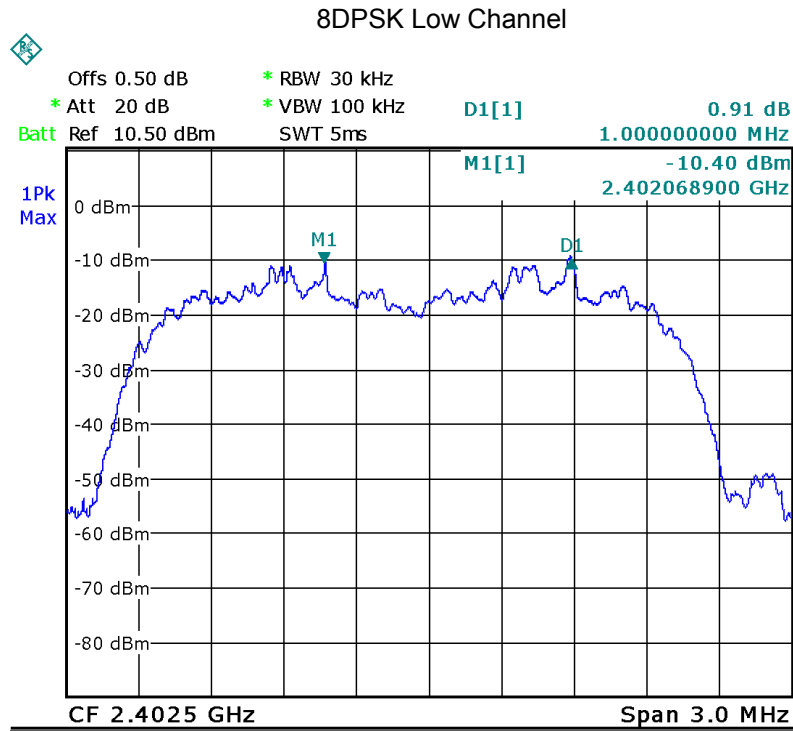

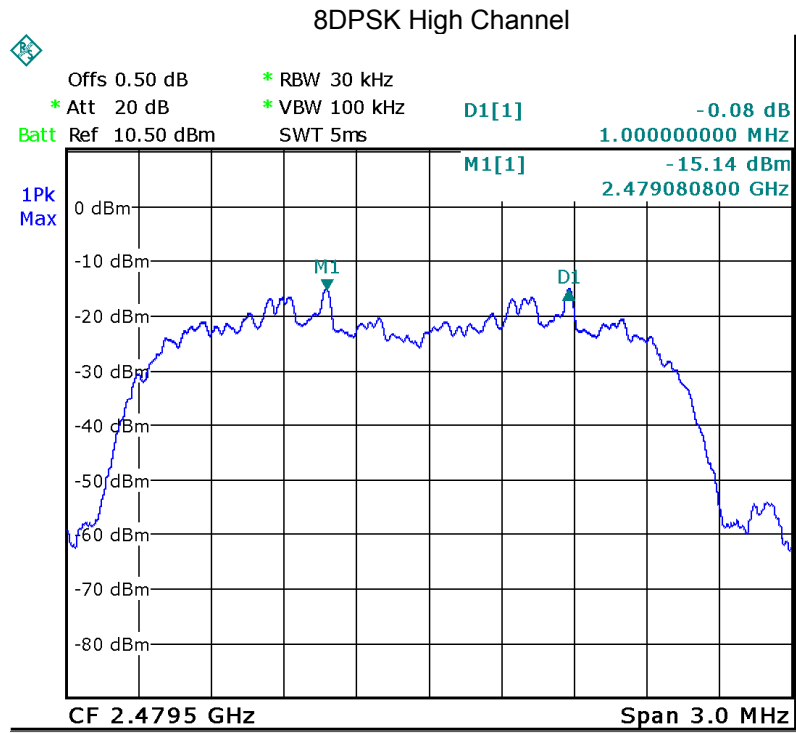




## 14 Number of Hopping Frequency

Test Requirement:	FCC CFR47 Part 15 Section 15.247
Test Method:	ANSI C63.10:2013
Test Limit:	Regulation 15.247 (a)(1)(iii) Frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels.
Test Mode:	Test in hopping transmitting operating mode.


### 14.1 Test Procedure

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
2. Set the spectrum analyzer: RBW = 1 MHz. VBW = 3 MHz. Sweep = auto; Detector Function = Peak. Trace = Max hold.
3. Allow the trace to stabilize. It may prove necessary to break the span up to sections. in order to clearly show all of the hopping frequencies. The limit is specified in one of the subparagraphs of this Section.
4. Set the spectrum analyzer: Start Frequency = 2.4GHz, Stop Frequency = 2.4835GHz. Sweep=auto;


### 14.2 Test Result

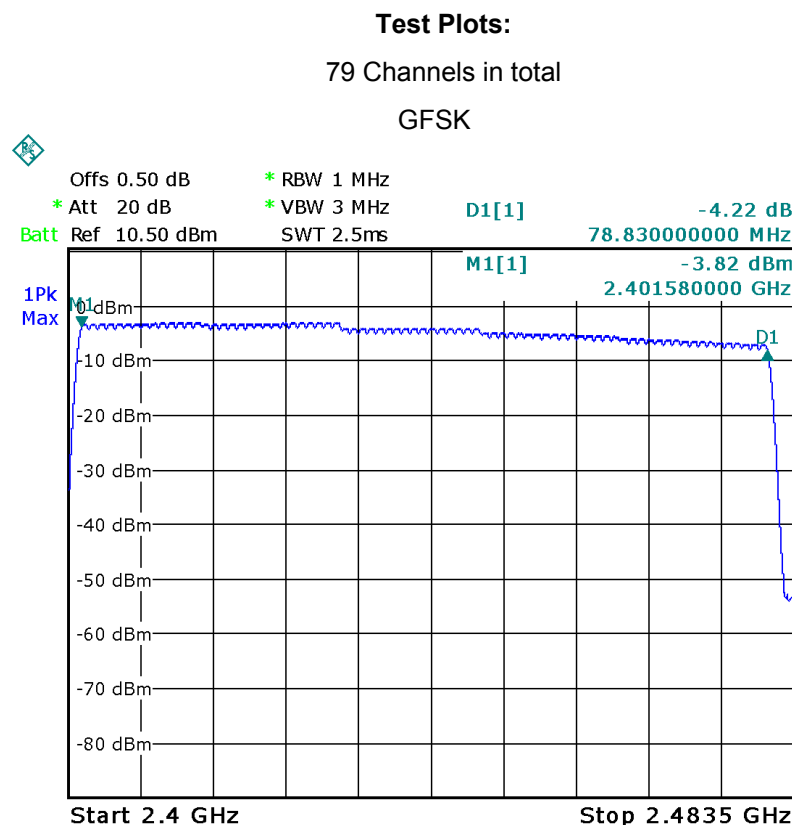

$\pi/4$  DQPSK

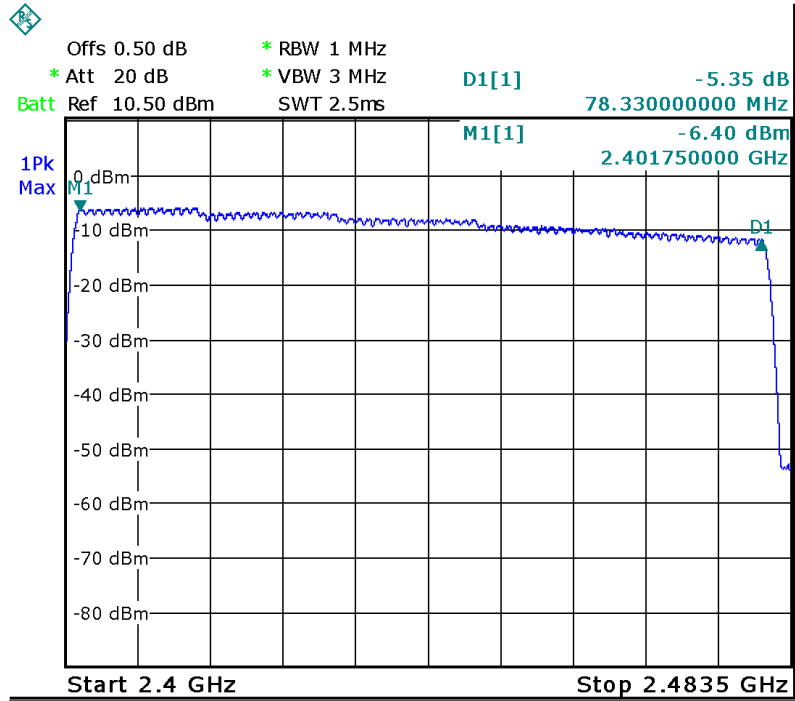

8DPSK

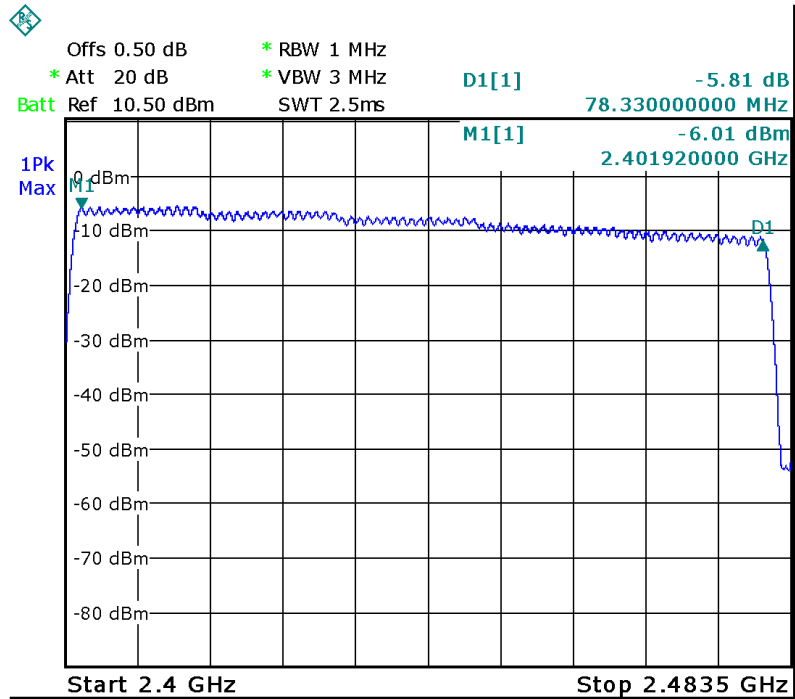

## 15 Dwell Time

Test Requirement:	FCC CFR47 Part 15 Section 15.247
Test Method:	ANSI C63.10:2013
Test Limit:	Regulation 15.247(a)(1)(iii) Frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.
Test Mode:	Test in hopping transmitting operating mode.

### 15.1 Test Procedure

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
2. Set spectrum analyzer span = 0. Centred on a hopping channel;
3. Set RBW = 1MHz and VBW = 3MHz. Sweep = as necessary to capture the entire dwell time per hopping channel. Set the EUT for DH5, DH3 and DH1 packet transmitting.
4. Use the marker-delta function to determine the dwell time. If this value varies with different modes of operation (e.g.. data rate. modulation format. etc.). repeat this test for each variation. The limit is specified in one of the subparagraphs of this Section. Submit this plot(s).

### 15.2 Test Result

DH5 Packet permit maximum  $1600 / 79 / 6$  hops per second in each channel (5 time slots RX, 1 time slot TX).


DH3 Packet permit maximum  $1600 / 79 / 4$  hops per second in each channel (3 time slots RX, 1 time slot TX).

DH1 Packet permit maximum  $1600 / 79 / 2$  hops per second in each channel (1 time slot RX, 1 time slot TX). So, the Dwell Time can be calculated as follows:


Data Packet	Dwell Time(s)
DH5	$1600/79/6*0.4*79*(MkrDelta)/1000$
DH3	$1600/79/4*0.4*79*(MkrDelta)/1000$
DH1	$1600/79/2*0.4*79*(MkrDelta)/1000$
Remark: Mkr Delta is once pulse time.	

Modulation	Data Packet	Channel	pulse time(ms)	Dwell Time(s)	Limits(s)
GFSK	DH5	Low	2.896	0.309	0.4
		middle	2.896	0.309	0.4
		High	2.896	0.309	0.4
$\pi/4$ DQPSK	2DH5	Low	2.896	0.309	0.4
		middle	2.896	0.309	0.4
		High	2.896	0.309	0.4
8DPSK	3DH5	Low	2.896	0.309	0.4
		middle	2.896	0.309	0.4
		High	2.896	0.309	0.4


Remark: Only the worst-case is recorded.

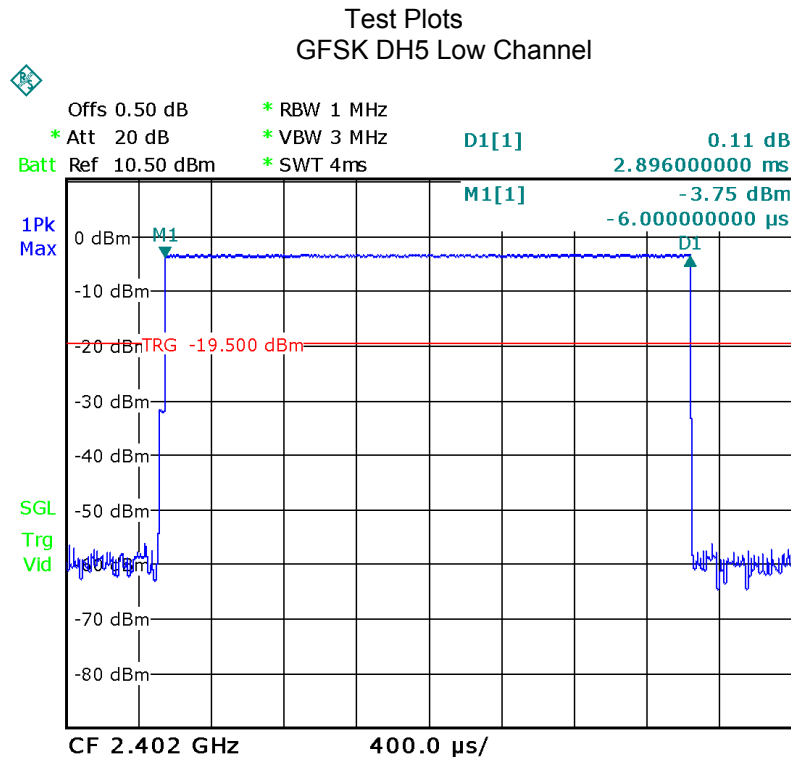


### GFSK DH5 Middle Channel

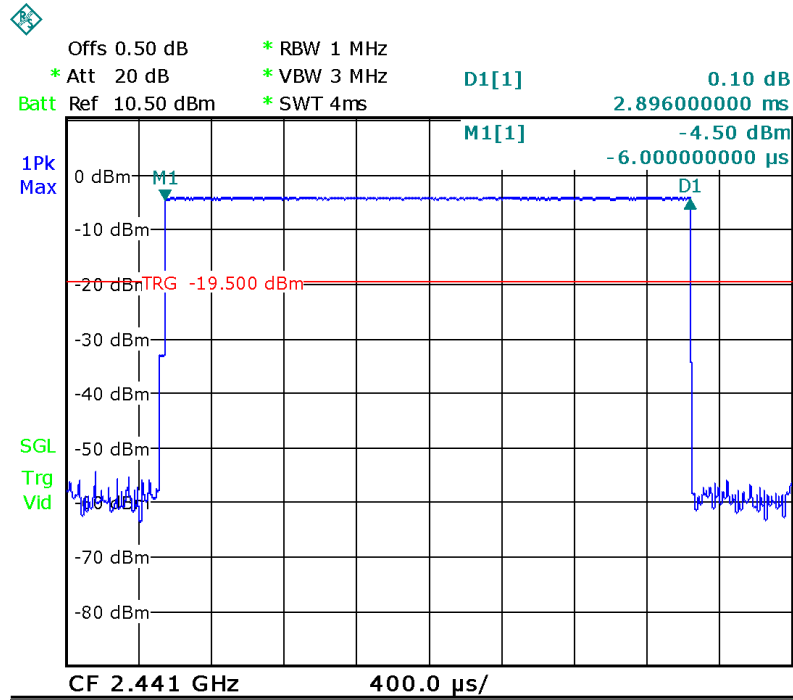


### GFSK DH5 High Channel

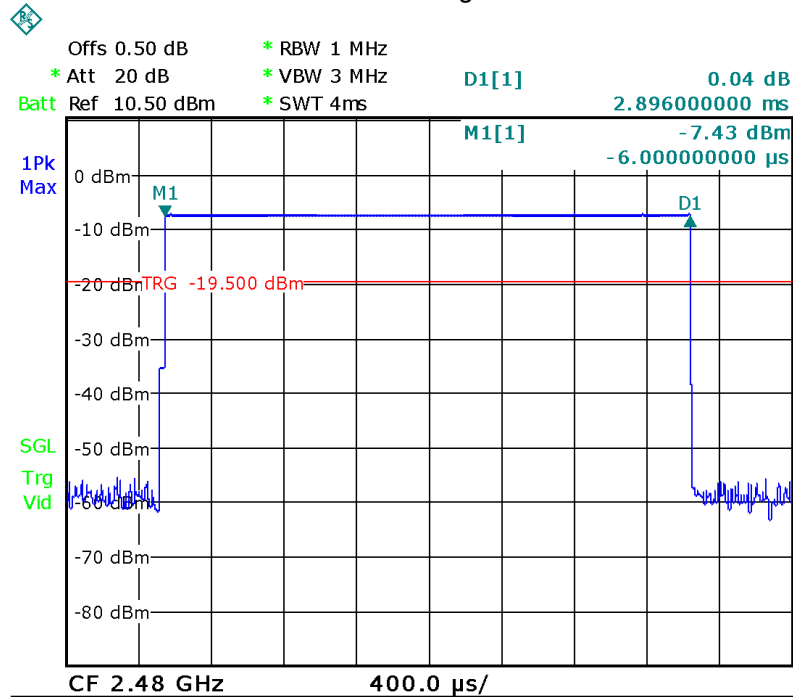


$\pi/4$ DQPSK 2DH5 Low Channel

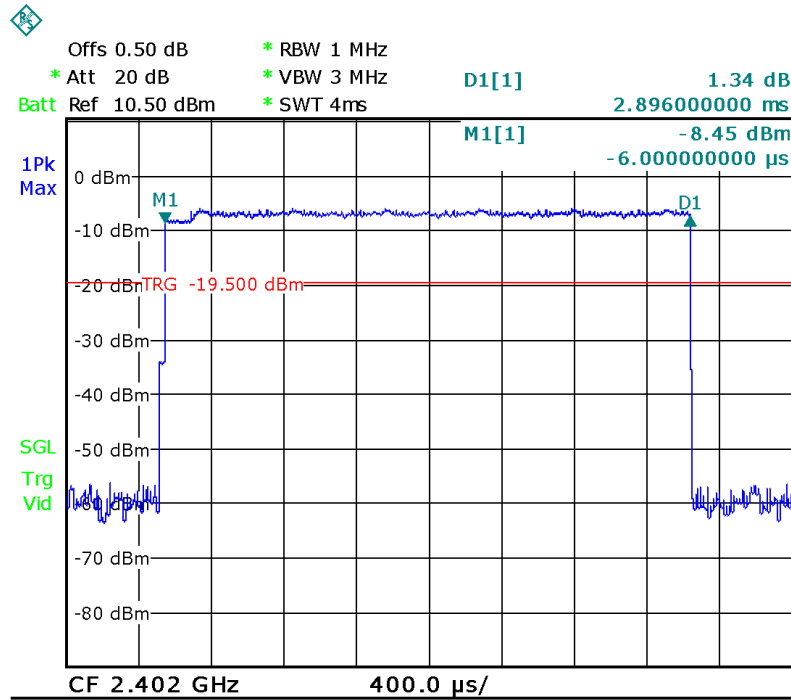


$\pi/4$ DQPSK 2DH5 Middle Channel

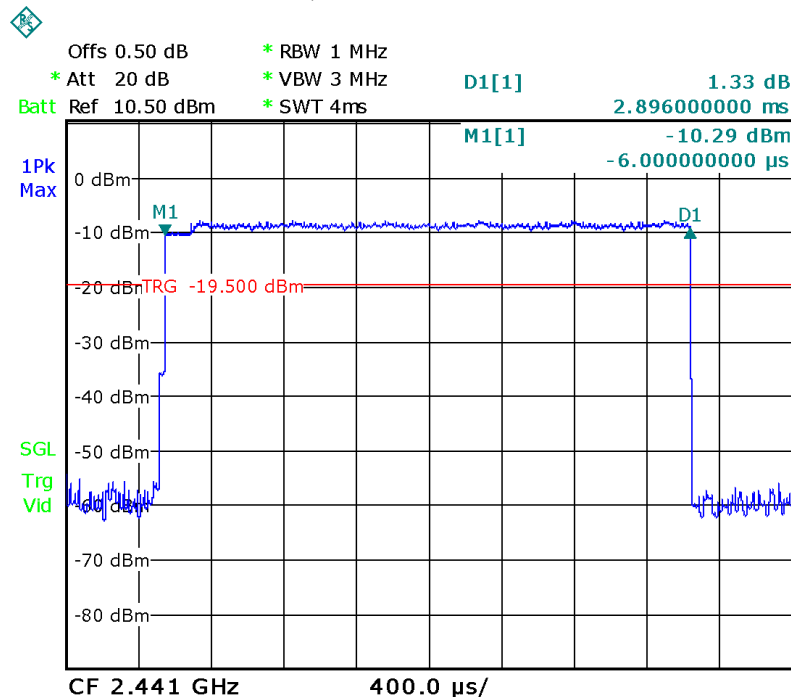


### $\pi/4$ DQPSK 2DH5 High Channel

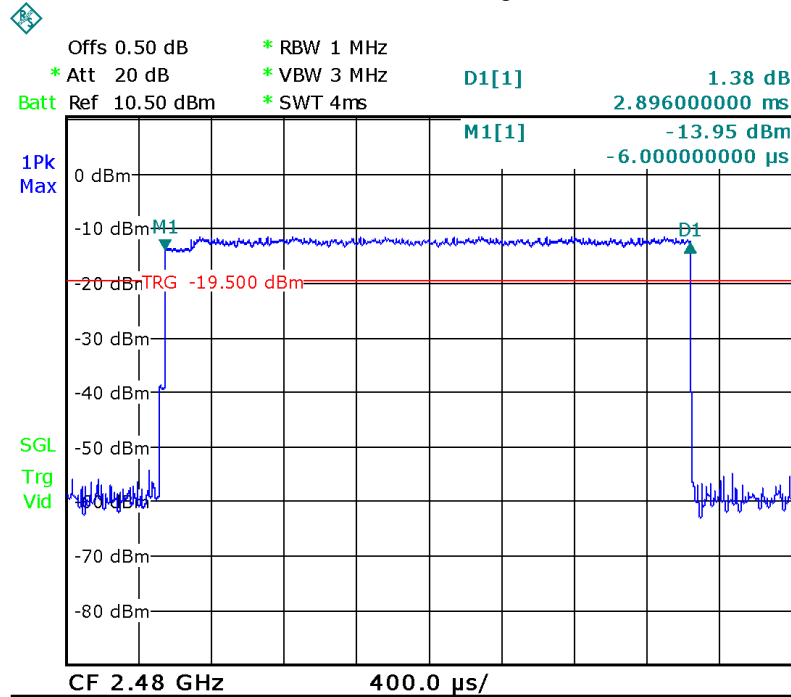


### 8DPSK 3DH5 Low Channel

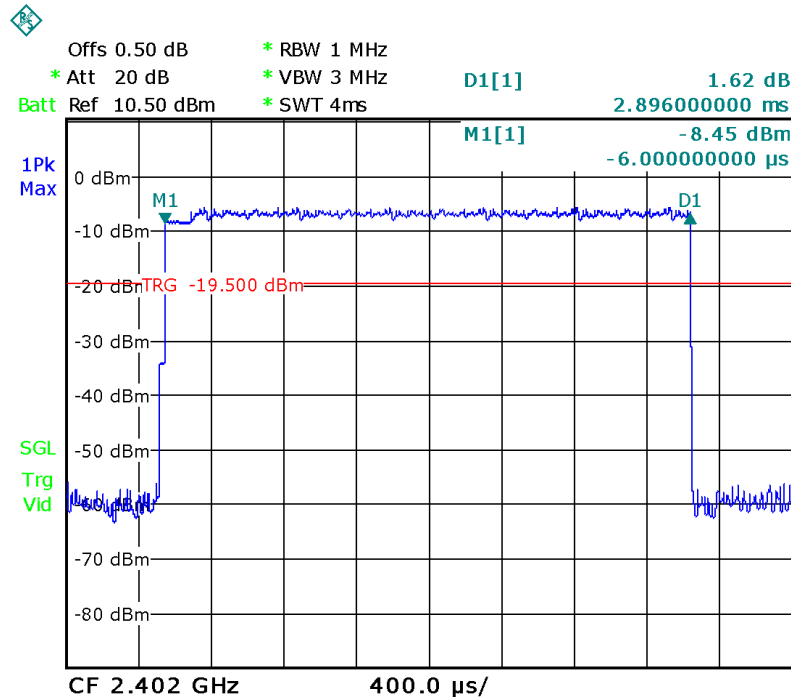

### 8DPSK 3DH5 Middle Channel

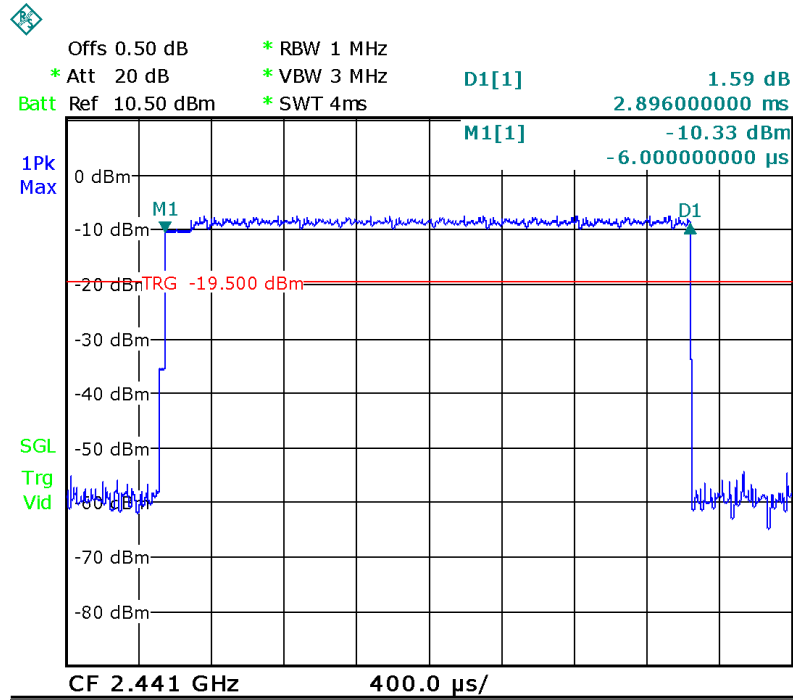

### 8DPSK 3DH5 High Channel

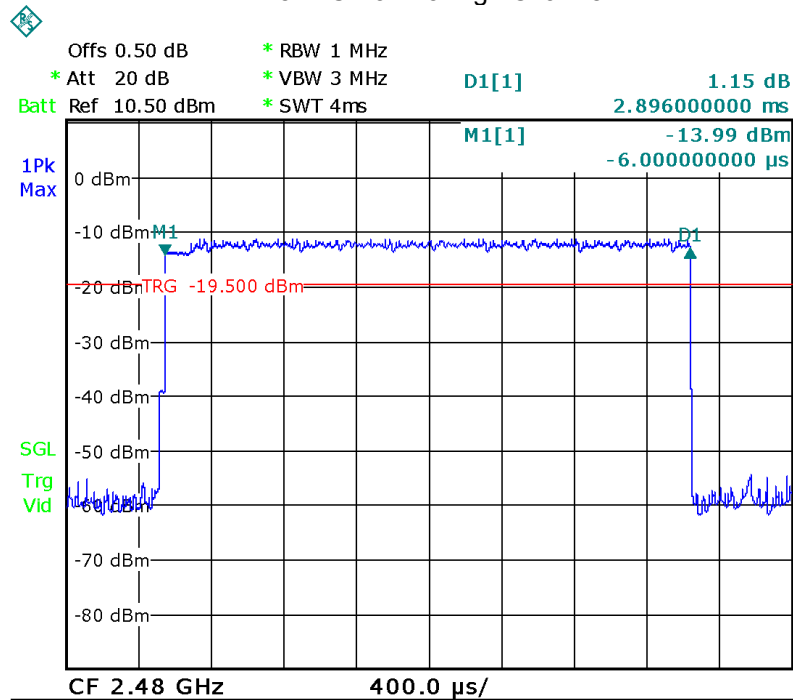




## 16 Antenna Requirement

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of §15.211, §15.213, §15.217, §15.219, or §15.221. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with §15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this part are not exceeded.

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

Result:

The EUT has an Internal Integral Antenna for Bluetooth Classic, Antenna Gain is 1.5dBi. meets the requirements of FCC 15.203.

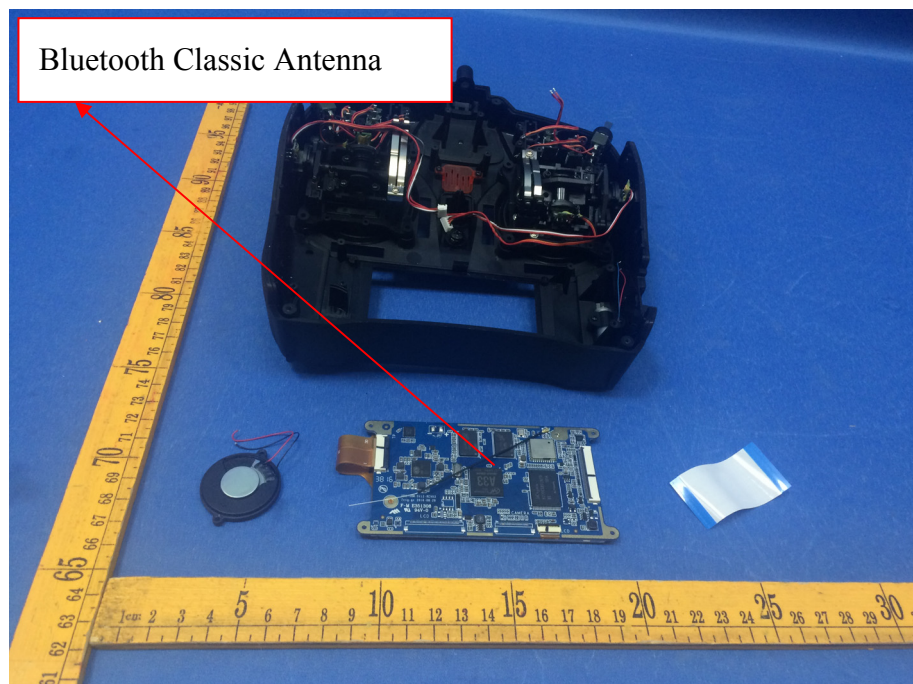

## **17 RF Exposure**

Note: Please refer to SAR Test Report: WTF17S1092181E.

## **18 Photographs-Model iX12 Test Setup Photos**

Note: Please refer to Photos: WTF17S1092243-3E.

## **19 Photographs - Constructional Details**

### **19.1 Model iX12-External Photos**

Note: Please refer to Photos: WTF17S1092243-3E.

### **19.2 Model iX12-Internal Photos**

Note: Please refer to Photos: WTF17S1092243-3E.

====End of Report====