

Designated by Ministry of international Trade and industry

**KANSAI ELECTRONIC INDUSTRY DEVELOPMENT CENTER**

HEAD OFFICE  
6-8-7 NISHITENMA  
KITA-KU OSAKA 530-0047 JAPAN



IKOMA TESTING LABORATORY  
12128 TAKAYAMA-CHO  
IKOMA-CITY NARA 630-0101 JAPAN

Corporate Juridical Person

**TEST REPORT**Report No.A-021-00-C

Date: 21 June 2000

This test report is to certify that the tested device properly complies with the requirements of:

FCC Rules and Regulations Part 95 : Radio Control (R/C) Radio Service.

The tests necessary to show compliance to the requirements were performed and these results met the specifications of requirement. The results of this report should not be construed to imply compliance of equipment other than that, which was tested. Unless the laboratory permission, this report should not be copied in part.

**1. Applicant**

Company Name : JAPAN REMOTE CONTROL CO., LTD.

Mailing Address : 2-2-12, EIWA, HIGASHIOSAKA-CITY, OSAKA, 577-0809 JAPAN

**2. Identification of Tested Device**

Type of Device : Radio Control (R/C) Radio Service.  
 Kind of Equipment Authorization : : DoC : Certification : Verification  
 FCC ID : BRWPYTHON  
 Device Name : AM 2 CHANNEL TRANSMITTER  
 Trade Name : JR PROPO  
 Model Number : PYTHON  
 Serial Number : No.1 : Prototype : Pre-production : Production  
 Date of Manufacture : May, 2000

**3. Test Items and Procedure**

: Measurement of RF Power Output (Substitution Method)  
: Modulation Characteristics  
: Emission Bandwidth  
: Measurement of Field Strength of Spurious Radiation  
: Frequency Stability Measurement

Above all tests were performed under: FCC Part 2 Sec2.1046, Sec2..1047, Sec2.1049, Sec2.1053, Sec2.1055 and Sec2.1057.

: without deviation, : with deviation(details are found inside of this report)

**4. Date of Test**

Receipt of Test Sample : 1 June 2000  
 Test Completed on : 19 June 2000

Eizo Hariya  
General Manager of Ikoma Testing Laboratory

Table of Contents

1. GENERAL INFORMATION.....	3
1.1 Product Description.....	3
1.2 Description for Equipment Authorization .....	3
1.3 Test Facility.....	3
2. TESTED SYSTEM.....	4
2.1 Test Mode .....	4
2.2 Block Diagram of EUT System.....	4
2.3 List of EUT System.....	5
2.4 List of Antenna .....	5
3. RF POWER OUTPUT.....	6
3.1 Reference Rule and Specification.....	6
3.2 Test Configuration .....	6
3.3 Test Procedure.....	7
3.4 Test Results.....	8
4. MODULATION CHARACTERISTICS.....	9
4.1 Reference Rule and Specification.....	9
4.2 Test Results.....	9
5. EMISSION BANDWIDTH .....	10
5.1 Reference Rule and Specification.....	10
5.2 Test Configuration .....	10
5.3 Test Results.....	11
6. FIELD STRENGTH OF SPURIOUS RADIATION .....	14
6.1 Reference Rule and Specification.....	14
6.2 Test Procedure.....	14
6.3 Test Configuration .....	15
6.4 Photographs of EUT System Configuration .....	16
6.5 Test Results.....	18
7. FREQUENCY STABILITY MEASUREMENT .....	19
7.1 Reference Rule and Specification.....	19
7.2 Frequency vs Temperature Test.....	19
7.3 Frequency vs Voltage Test.....	20
8. LIST OF TEST INSTRUMENTS .....	21

## 1. GENERAL INFORMATION

### 1.1 Product Description

The Model No. PYTHON (referred as EUT in this report) is the AM 2 CHANNEL TRANSMITTER.

#### (1) Technical Specifications

Transmitting Frequency : 75.41 ~ 75.99 MHz (75.81 MHz in EUT)  
Designation of Emission : A1D

#### (2) Contained Oscillator

3rd OVER-TONE : 37.905 MHz

#### (3) Rated Power Supply : DC12 V

### 1.2 Description for Equipment Authorization

#### (1) Rules Part(s) under which Equipment operated

FCC Rule Part 95 ; Radio Control(R/C) Radio Service

#### (2) Kind of Equipment Authorization

Certification  Verification

#### (3) Procedure of Application

Original Equipment  Modification

### 1.3 Test Facility

Name : KANSAI ELECTRONIC INDUSTRY DEVELOPMENT CENTER ( KEC )  
IKOMA TESTING LABORATORY  
Open Test Site No.2

Address : 12128, Takayama-cho Ikoma-city, Nara, 630-0101 Japan

This test facility has been filed in FCC under the criteria in ANSI C63.4-1992.  
The laboratory has been accredited by the NVLAP(Lab.Code:200207-0) based on ISO/IEC Guide 25.

## 2. TESTED SYSTEM

### 2.1 Test Mode

The compliance tests were performed under the following operation mode.

- (1) Measurement of Field Strength of Spurious Radiation :

The EUT was continuously transmitted in modulation mode.


- (2) Frequency Stability Measurement :

The EUT was continuously transmitted in non-modulation mode.

- (3) Except above two test items :

See the page of each test items.

### 2.2 Block Diagram of EUT System

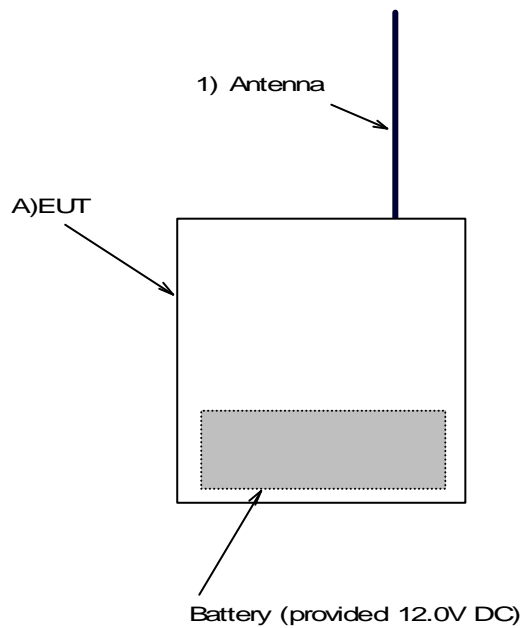

[ Note ]

See 2.3 List of EUT System and 2.4 List of Antenna.

## 2.3 List of EUT System

No	Device Name	Model Number (Serial Number)	FCC ID (Trade Name)	Note	Remark
A	AM 2 CHANNEL TRANSMITTER	PYTHON (No.1)	BRWPYTHON (JR PROPO)	Battery : 12.0V	(1)

[ Remark ]

(1) : EUT

## 2.4 List of Antenna

No	Type	Length ( m )	Note	Remark
1	Built-in Rod Antenna	0.74		(1)

[ Remark ]


(1) : Accessory of EUT

### 3. RF POWER OUTPUT

#### 3.1 Reference Rule and Specification

FCC Rule Part 95 [Section95.639 ] and Part 2 Subpart J [Section2.1046]

#### 3.2 Test Configuration

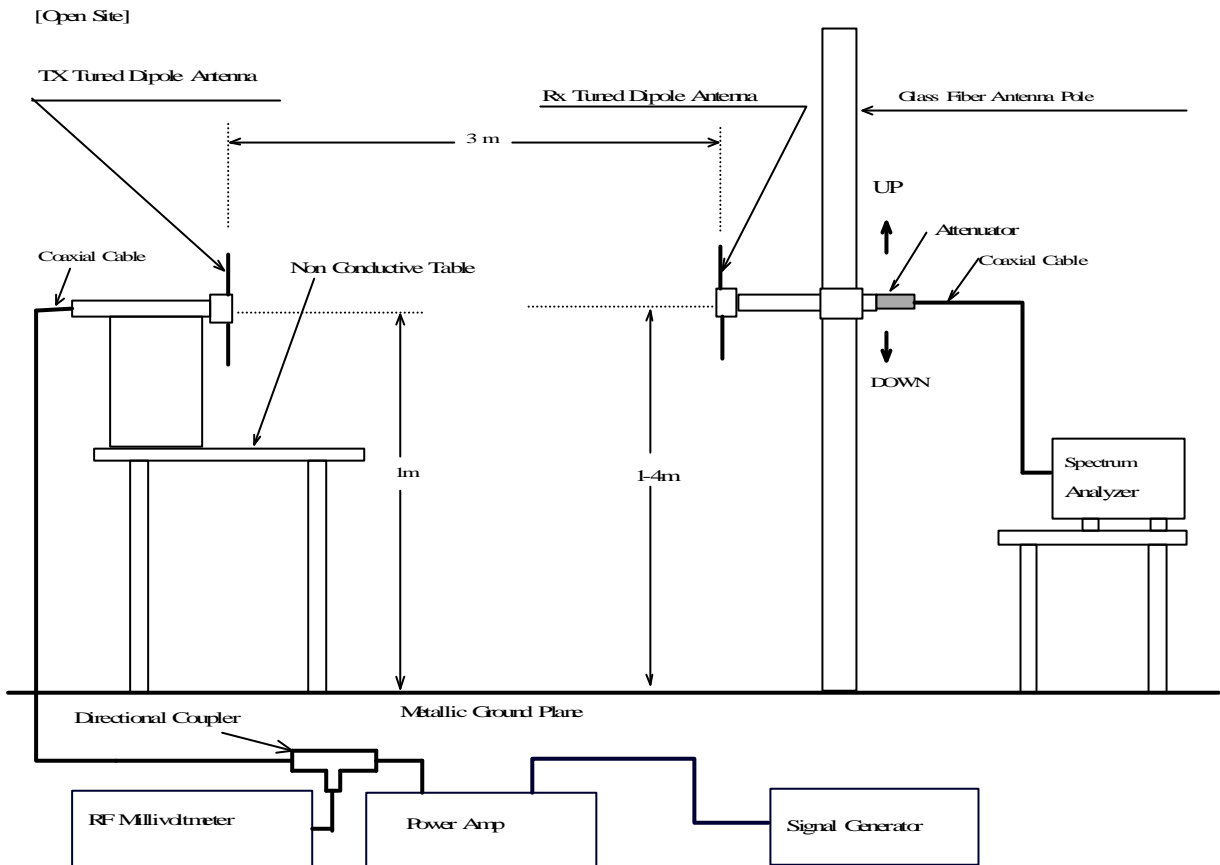

### 3.3 Test Procedure

- (1) Tune-up the transmitter.
- (2) The receiving antenna is adjusted to the correct length for the carrier frequency.
- (3) Raise and lower the receiving antenna to obtain a maximum reading on the Spectrum Analyzer with the antenna at horizontal polarity. Then the turntable is rotated to further increase this maximum reading. Repeat this procedure of raising and lower the antenna and rotating the turntable until the highest possible signal has been obtain.  
Record this maximum reading.
- (4) Repeat step3 with the antenna polarized vertically.
- (5) Remove the transmitter and replace it with the half-wave antenna. The center of these antennas are approximately at the same location as the center of the transmitter.
- (6) Feed the half-wave antenna at the transmitter end with a signal generator connected to the antenna by means of a non-radiating cable.  
With the antennas at both ends horizontally polarized and with the signal generator tuned to the carrier frequency, raise and lower the receiver antenna to obtain a maximum reading at the Spectrum Analyzer. Adjust the level of the signal generator output until the previous recording maximum reading for this set of conditions its obtained.
- (7) Repeat step6 with both antennas vertically polarized.

## 3.4 Test Results

CARRIER FREQUENCY	SPECTRUM ANALYZER READING		RF METER READING		CABLE LOSS	RF OUTPUT POWER	LIMIT
	[dBmV]		[dBm]				
	Horiz.	Vert.	Horiz.	Vert.			
[MHz]					[dB]	[mW]	[mW]
75.810	105.6	102.0	15.9	14.5	0.6	33.9	750.0

The RF Power Output can be calculated from following formula:

$$\text{RF Power (mW)} = 10^{(\text{Mr} - \text{Lo}) \div 10}$$

where,

Mr: RF Meter Reading (dBm)

Lo: Loss of Cable (dB)

[ Environment ]

Temperature : 21 °C Humidity : 56 %

[ Summary of Test Results ]

Above data shows that the test device complies with the requirements.

Minimum margin was 13.4 dB, horizontal polarization.

Tested Date : 6 June 2000

Tester Signature

Yasunari Kawai



#### 4. MODULATION CHARACTERISTICS

##### 4.1 Reference Rule and Specification


FCC Rule Part 2 Subpart J [Section2.1047]

##### 4.2 Test Results

Encoded Waveform

(1) Operation Mode of EUT

Normal Modulation

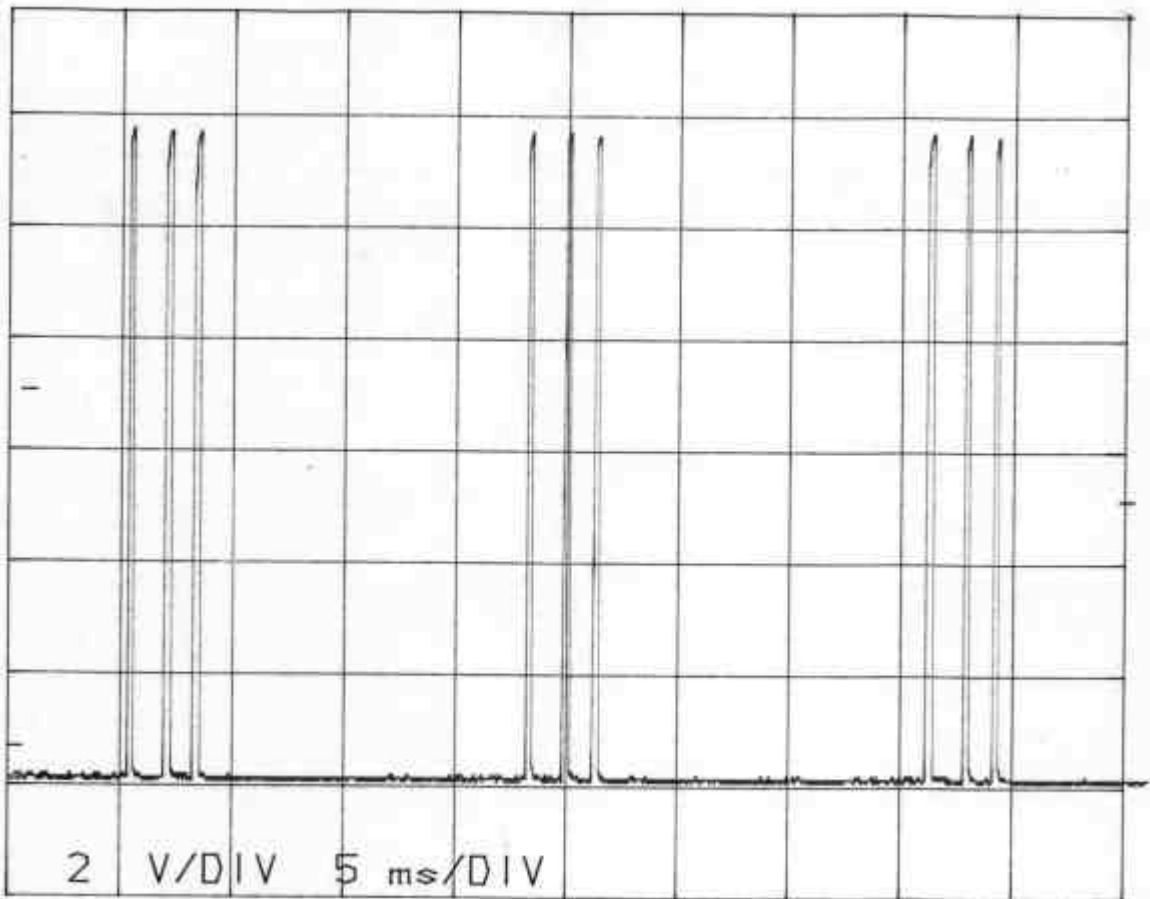


## 5. EMISSION BANDWIDTH

### 5.1 Reference Rule and Specification

FCC Rule Part 95 [Section95.633], [Section95.635] and Part 2 Subpart J [Section2.1049]

### 5.2 Test Configuration

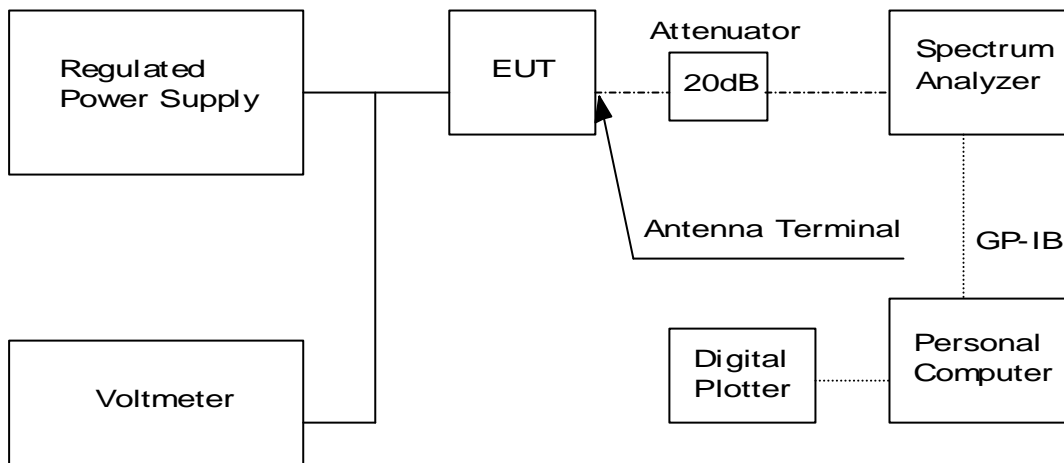

### 5.3 Test Results

See next figure (the picture of spectrum analyzer)

#### Occupied Bandwidth

The OBW was measured by the spectrum analyzer TR4172 which could measure 99% occupied bandwidth (OBW).

There are 1001 data on horizontal axis of display.

One of them is  $V_n$ . Then total power  $P$  can be calculated from the following formula.

$$P = \sum_{n=1}^{1001} \frac{V_n^2}{R} \dots\dots\dots (1)$$

where,  $R$  is input impedance of TR4172.

Let,  $x$  is the point which gives 0.5% of the total power and  $Y$  is the point which gives 99.5% of the total power. Then we can get the following formula.

$$0.005P = \sum_{n=1}^x \frac{V_n^2}{R} \dots\dots\dots (2)$$

$$0.995P = \sum_{n=1}^y \frac{V_n^2}{R} \dots\dots\dots (3)$$

From(1)- (3), OBW becomes .

$$OBW = \frac{F_{span}(Y - X)}{1000}$$

where,  $F_{span}$  is frequency span of the spectrum analyzer.

### Operation Mode of EUT

Normal modulation


EUT was operated the various positions of JOY STICK & OTHER SWITCHES.(Reference level is the unmodulated level.)

Trace mode of Spectrum Analyzer : Maximum Hold

Occupied Bandwidth = 4kHz (99% Power)

M1=75.8081MHz(0.5% Power Point)

M2=75.8121MHz(99.5% Power Point)

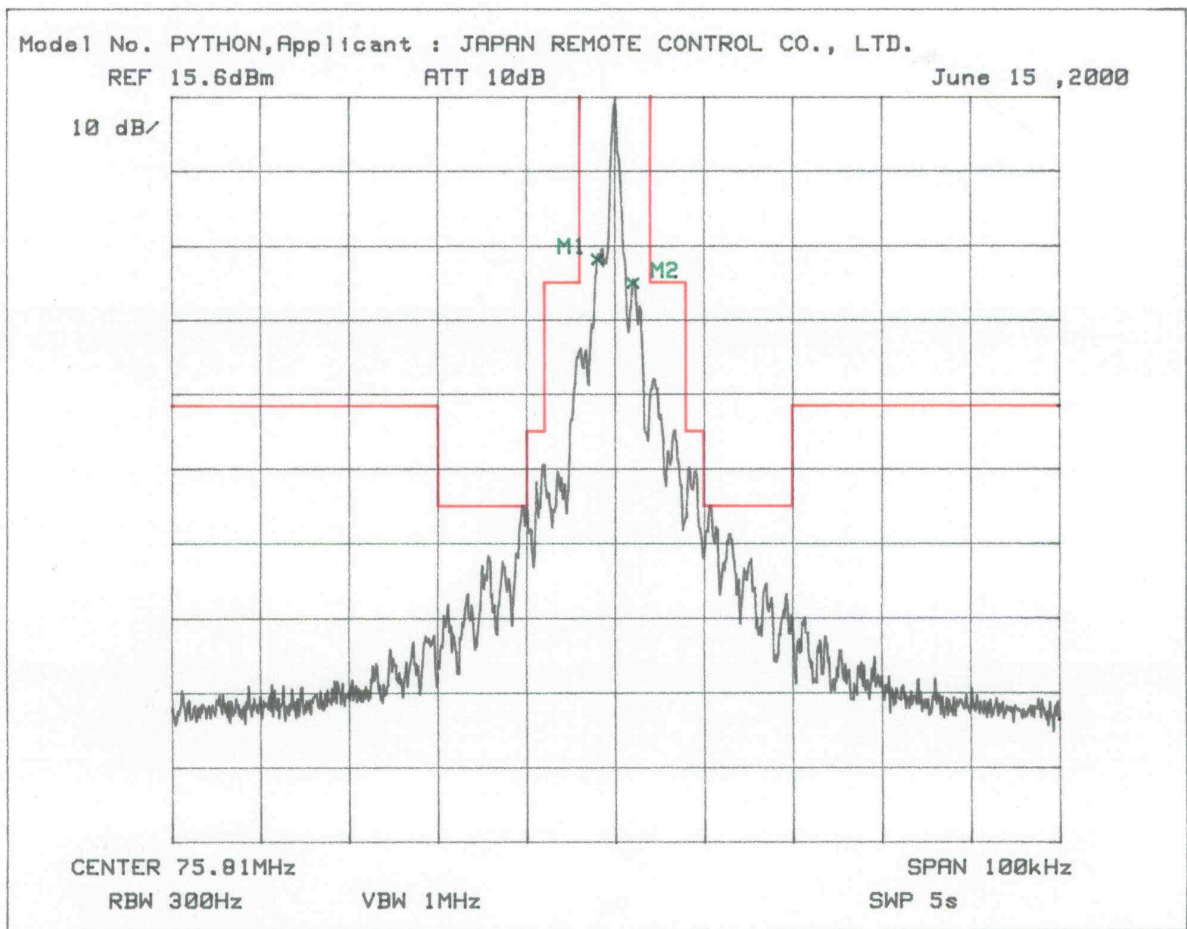


Operation Mode of EUT  
Non modulation

Occupied Bandwidth = 1kHz (99% Power)

M1=75.8096MHz(0.5% Power Point)

M2=75.8106MHz(99.5% Power Point)

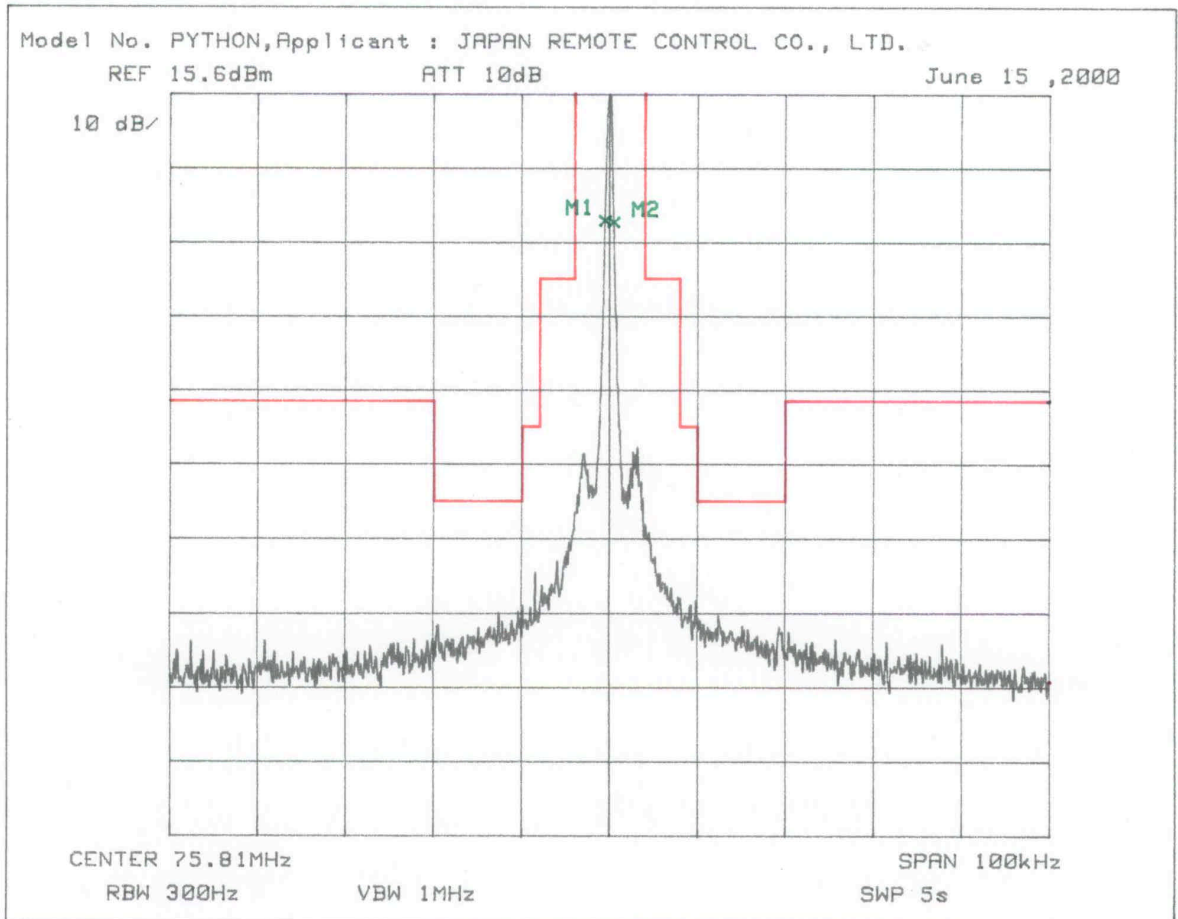

## 6. FIELD STRENGTH OF SPURIOUS RADIATION

### 6.1 Reference Rule and Specification

FCC Rule Part 95 [Section 95.635] and Part 2 Subpart J [Section 2.1053]


### 6.2 Test Procedure

- (1) Tune-up the transmitter(EUT).
- (2) Device Vertical : Place the device so that it's longest axis is vertical.
- (3) For each spurious measurement the receiving antenna is adjusted to the correct length for the frequency involved. These measurements are made from the lowest radio frequency generated in the EUT or 25MHz to the tenth harmonic of the carrier.
- (4) For each spurious frequency, raise and lower the receiving antenna to obtain a maximum reading on the spectrum analyzer with the antenna at horizontal polarity. Then the turntable is rotated to further increase this maximum reading. Repeat this procedure of raising and lower the antenna and rotating the turntable until highest possible signal has been obtain. Record this maximum reading.
- (5) Repeat Step4 for each spurious frequency with the antennae polarized vertically.
- (6) Device Horizontal : Place the device so that it's longest axis is horizontal.
- (7) Repeat Step3, Step4, and Step5
- (8) The attenuation of the spurious in dB can be calculated from the following formula:

$$\begin{array}{rcccl} \text{Spurious Emission} & & \text{Field Strength} & & \text{Field Strength} \\ \text{Attenuation} & = & \text{of Carrier Emission} & - & \text{of Spurious Emission} \\ \text{[dB]} & & \text{[dB}\mu\text{V/m]} & & \text{[dB}\mu\text{V/m]} \end{array}$$

### 6.3 Test Configuration

[ Open Site ]

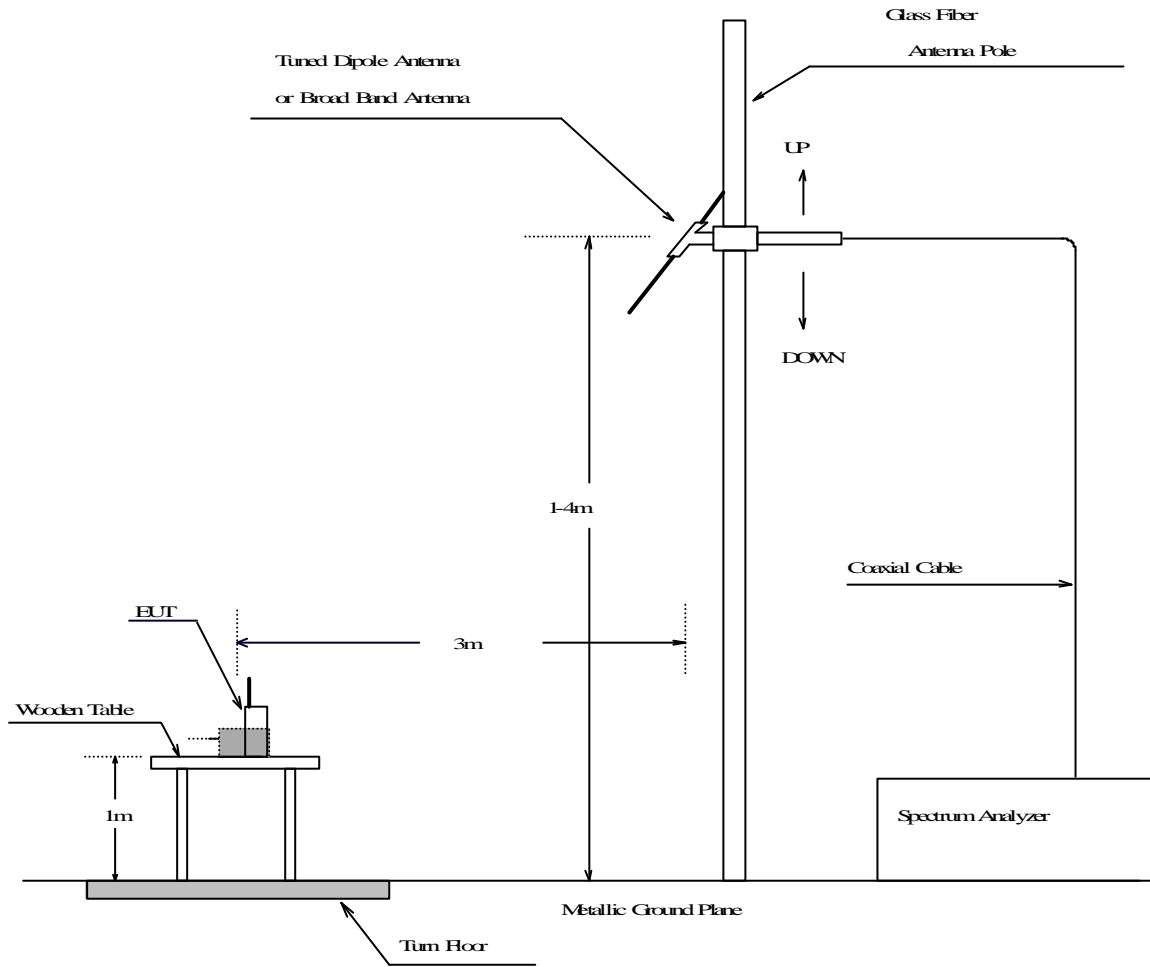


## 6.4 Photographs of EUT System Configuration

### Horizontal Placing





Vertical Placing

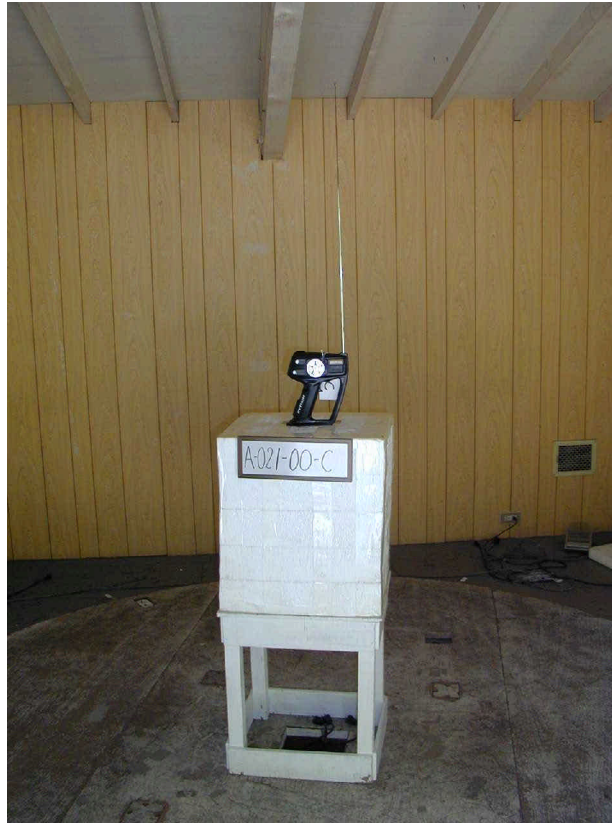

## 6.5 Test Results

Measured Frequency ( MHz )	Antenna Factor ( dB/m )	Meter Reading		Maximum Field Strength ( dBuV/m )	Attenuation From Carrier ( dB )	Limits ( dBuV/m )	Margin for Limits ( dB )
		Horizontal ( dBuV )	Vertical ( dBuV )				
<b>Carrier Emission</b>							
75.81	8.5	105.6	102.0	114.1	-	-	-
<b>Spurious Emission</b>							
113.716	14.3	42.5	41.0	56.8	57.3	41.3	16.0
151.621	17.1	44.2	39.1	61.3	52.8	41.3	11.5
189.526	18.9	<25.0	<25.0	<43.9	>70.2	41.3	>28.9
227.431	20.4	30.8	26.2	51.2	62.9	41.3	21.6
303.241	18.2	24.7	22.6	42.9	71.2	41.3	29.9
341.146	19.1	28.8	27.8	47.9	66.2	41.3	24.9
454.861	21.2	<20.0	<20.0	<41.2	>72.9	41.3	>31.6
492.767	21.9	<20.0	<20.0	<41.9	>72.2	41.3	>30.9
530.672	22.7	<20.0	<20.0	<42.7	>71.4	41.3	>30.1
606.482	24.2	<20.0	<20.0	<44.2	>69.9	41.3	>28.6
682.291	25.8	23.8	20.0	49.6	64.5	41.3	23.2
720.200	26.4	<20.0	<20.0	<46.4	>67.7	41.3	>26.4
758.100	27.0	21.5	<20.0	48.5	65.6	41.3	24.3

[ Note ]

Limit of the attenuation of the spurious in dB:

$$56 + 10\text{Log}(\text{Power}) = 56 + 10\text{Log}(0.0339) = 41.3 \text{ dB}$$

[ Environment ]

Temperature : 20°C Humidity : 53%

[ Summary of Test Results ]

Minimum Margin was 11.5 dB at 151.621 MHz, horizontal polarization.

Tested Date : 6 June 2000

Tester Signature \_\_\_\_\_

Yasunari Kawai


7. FREQUENCY STABILITY MEASUREMENT

7.1 Reference Rule and Specification

FCC Rule Part 95 [Section95.623] and Part 2 Subpart J [Section2.1055]

7.2 Frequency vs Temperature Test

Test Setup Diagram

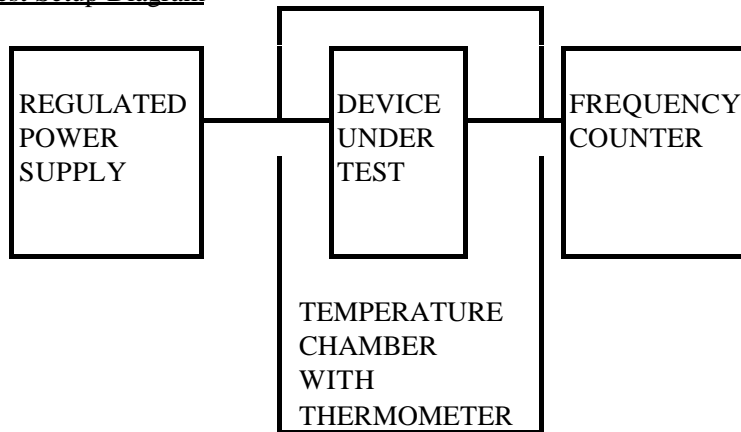

Test Result

Test Voltage: 9.6V

REFERENCE FREQUENCY [MHz]	TEMPERATURE [°C]	FREQUENCY DRIFT [%]	LIMIT [%]
<u>75.81</u>	-30	-0.000620	±0.002
	-20	-0.000152	
	-10	0.000074	
	0	0.000144	
	+10	0.000095	
	+20	0.000007	
	+30	-0.000070	
	+40	-0.000099	
	+50	-0.000001	

## 7.3 Frequency vs Voltage Test

Test Setup Diagram : Same as (1)

Test Result

Temperature : +20°C

REFERENCE FREQUENCY [MHz]	SUPPLIED VOLTAGE [Volt]	FREQUENCY DRIFT [%]	LIMIT [%]
<u>75.81</u>	8.0	-0.000247	±0.002

Note Reduced primary supply voltage to the operating and point which shall be specified by the manufacturer.

[ Environment ] Temperature : 20 °C Humidity : 57 %

[ Summary of Test Results ]

Above data shows that the test device complies with the requirements.

Tested Date : 19 June 2000

Tester Signature

Yasunari Kawai

## 8. LIST OF TEST INSTRUMENTS

Instrument	Manufacturer	Model No	Specifications	KEC Control No.	if used, checked by "X".	Last Cal.	Next Cal.
Spectrum Analyzer	Advantest	TR4172	Frequency Range 50 Hz - 1.8 GHz	SA-27	<input checked="" type="checkbox"/>	1999/7	2000/7
Biconical Antenna	Schwarzbeck	BBA9106	Frequency Range 30 MHz - 300 MHz	AN-80	<input checked="" type="checkbox"/>	2000/2	2001/2
Log-Periodic	Schwarzbeck	UHALP 9107	Frequency Range 300 MHz - 1 GHz	AN-215	<input checked="" type="checkbox"/>	2000/2	2001/2
Tuned Dipole	Kyoritsu	KBA-511S	Frequency Range 25 MHz - 500 MHz	AN-135	<input checked="" type="checkbox"/>	2000/3	2001/3
	Kyoritsu	KBA-611S	Frequency Range 500 MHz - 1 GHz	AN-137	<input checked="" type="checkbox"/>	2000/3	2001/3
Tuned Dipole Antenna	Kyoritsu	KBA-511S	Frequency Range 25 MHz - 500 MHz	AN-134	<input checked="" type="checkbox"/>	2000/3	2001/3
Signal Generator	Anritsu	MG3601A	Frequency Range 0.1 MHz - 1040 MHz	SG-41	<input checked="" type="checkbox"/>	1999/9	2000/9
Power Amp.	ENI	601L	Frequency Range 0.8 MHz - 1 GHz	AM-24	<input checked="" type="checkbox"/>	1999/9	2000/9
RF Millivolt-Meter	Rohde & Schwarz	URV5	Frequency Range 10 kHz - 2 GHz	VV-29	<input checked="" type="checkbox"/>	2000/3	2001/3
Coaxial Cable	Suhner	SUCOFLEX 104	Length : 10m [SMA(p)-SMA(p)]	CL-46	<input checked="" type="checkbox"/>	2000/2	2001/2
Attenuator	Weinschel Engineering	2	Frequency Range 1 MHz - 20 GHz -10 dB	AT-42-1	<input checked="" type="checkbox"/>	2000/3	2001/3
Regurated DC Power Supply	Kikusui	PAB18-3A	Output 0-18V, 3A	PD-32	<input checked="" type="checkbox"/>	-	-
Temperature Chamber With Thermometer	Tabai Mfg.	MC-710	Temperature Range -75 - +100 °C	CH-31	<input checked="" type="checkbox"/>	-	-
Frequency Counter	Advantest	TR5823H	Freq.Range 1 mHz-1300 MHz	CU-17	<input checked="" type="checkbox"/>	2000/5	2001/5
Spectrum Analyzer	Advantest	TR4172	Frequency Range 50 Hz - 1.8 GHz	SA-27	<input checked="" type="checkbox"/>	1999/7	2000/7
Digital Ploterr	Hewlett Packard	7090A	Plot Area A3 size	RE-17	<input checked="" type="checkbox"/>	-	-
Multimeter	John Fluke	37	Volt Range 0.1mV - 1000 V Ampere Range 0.01 mA - 20 A	MM-91	<input checked="" type="checkbox"/>	2000/2	2001/3
Personal Computer	Hewlett Packard	9121	Memory 512kB Language BASIC	PC-38-2	<input checked="" type="checkbox"/>	-	-
Digital Oscilloscope	Matsushita Communication Ind.	VP-5740A	Frequency Range DC -10 MHz	OS-22	<input checked="" type="checkbox"/>	2000/5	2001/5