

Produkte
Products


Prüfbericht - Nr.: 14021549 001		Seite 1 von 15	
<i>Test Report No.:</i>		<i>Page 1 of 15</i>	
Auftraggeber: <i>Client:</i>	D&M Holdings Inc. 1-1 Oikuboyama Shirakawa Fukushima 961-0838 Japan		
Gegenstand der Prüfung: <i>Test Item:</i>	Bluetooth Wireless Receiver		
Bezeichnung: <i>Identification:</i>	RX101	Serien-Nr.: <i>Serial No.:</i>	Engineering sample
Wareneingangs-Nr.: <i>Receipt No.:</i>	090610121	Eingangsdatum: <i>Date of Receipt:</i>	10.06.2009
Prüfört: <i>Testing Location:</i>	TÜV Rheinland Hong Kong Ltd. 9-10/F., Emperor International Square, 7 Wang Tai Road, Kowloon Bay, Kowloon, Hong Kong Hong Kong Productivity Council HKPC Building, 78 Tat Chee Avenue, Kowloon, Hong Kong		
Prüfgrundlage: <i>Test Specification:</i>	FCC Part 15 Subpart C ANSI C63.4-2003 CISPR 22:1997		
Prüfergebnis: <i>Test Results:</i>	Das vorstehend beschriebene Gerät wurde geprüft und entspricht oben genannter Prüfgrundlage. The above mentioned product was tested and passed .		
Prüflaboratorium: <i>Testing Laboratory:</i>	TÜV Rheinland Hong Kong Ltd. 9-10/F., Emperor International Square, 7 Wang Tai Road, Kowloon Bay, Kowloon, Hong Kong		
geprüft/ tested by:	kontrolliert/ reviewed by:		
02.07.2009	Mika Chan Project Engineer		02.07.2009
			Thomas Berns Manager
Datum <i>Date</i>	Name/Stellung <i>Name/Position</i>	Unterschrift <i>Signature</i>	Datum <i>Date</i>
			Name/Stellung <i>Name/Position</i>
			Unterschrift <i>Signature</i>
Sonstiges: Other Aspects	FCCID: BV2-RX101		
Abkürzungen:	P(ass) = entspricht Prüfgrundlage F(ail) = entspricht nicht Prüfgrundlage N/A = nicht anwendbar N/T = nicht getestet	Abbreviations:	P(ass) = passed F(ail) = failed N/A = not applicable N/T = not tested
<p>Dieser Prüfbericht bezieht sich nur auf das o.g. Prüfmuster und darf ohne Genehmigung der Prüfstelle nicht auszugsweise vervielfältigt werden. Dieser Bericht berechtigt nicht zur Verwendung eines Prüfzeichens. <i>This test report relates to the a. m. test sample. Without permission of the test center this test report is not permitted to be duplicated in extracts. This test report does not entitle to carry any safety mark on this or similar products.</i></p>			

Table of Content

	Page
Cover Page	1
Table of Content	2
Product information.....	3
Manufacturers declarations	3
Product function and intended use.....	4
Submitted documents.....	4
Special accessories and auxiliary equipment.....	4
List of Test and Measurement Instruments.....	5
Results FCC Part 15 – Subpart C	6
Subclause 15.203 – Antenna Information	Pass..... 6
Subclause 15.204 – Antenna Information	Pass..... 6
Subclause 15.207 – Disturbance Voltage on AC Mains.....	Pass..... 6
Subclause 15.247 (a)(1) – Carrier Frequency Separation.....	Pass..... 7
Subclause 15.247 (a)(1)(iii) – Number of hopping channels	Pass..... 7
Subclause 15.247 (a)(1)(iii) – Time of Occupancy (Dwell Time)	Pass..... 8
Subclause 15.247 (a) – 20 dB Bandwidth.....	Pass..... 8
Subclause 15.247 (a) – Hopping Sequence	Pass..... 9
Subclause 15.247 (a) – Equal Hopping Frequency Use.....	Pass..... 10
Subclause 15.247 (a) – Receiver Input Bandwidth.....	Pass..... 11
Subclause 15.247 (a) – Receiver Hopping Capability	Pass..... 11
Subclause 15.247 (b)(1) – Peak Output Power	Pass..... 11
Subclause 15.247 (d) – Band edge compliance of conducted emissions	Pass..... 12
Subclause 15.205 – Band edge compliance of radiated emissions	Pass..... 12
Subclause 15.247 (d) – Spurious Conducted Emissions	Pass..... 13
Subclause 15.247 (c) – Spurious Radiated Emissions	Pass..... 14
Appendix 1 – Test protocols	20 pages
Appendix 2 – Test setup	3 pages
Appendix 3 – Photo documentation	5 pages
Appendix 4 – Product documentation	15 pages

www.tuv.com

Product information

Manufacturers declarations

	Transceiver
Operating frequency range	2402 - 2480 MHz
Type of modulation	GFSK; Pi/4 DQPSK; 8 DPSK
Number of channels	79
Channel separation	1 MHz
Type of antenna	Chip Antenna
Antenna gain (dBi)	2
Power level	fix
Type of equipment	stand alone, plug-in radio device
Connection to public utility power line	No
Nominal voltage	V _{nom} : 3.3 V/5V
Independent Operation Modes	Page scan Inquiry scan

www.tuv.com

Product function and intended use

The test item is a Bluetooth Wireless Receiver based on the Bluetooth technology.

Bluetooth is a short-range radio link intended to be a cable replacement between portable and/or fixed electronic devices.

Bluetooth operates in the unlicensed ISM Band at 2.4GHz. With the introduction of the enhanced data rate (EDR) feature, the data rates can be up to 3 Mb/s.

An increase in the peak data rate beyond the basic rate of 1 Mb/s is achieved by modulating the RF carrier using phase shift keying (PSK) techniques, resulting in an increase of two to three times the number of bits per symbol. The 2 Mb/s EDR packets use a Pi/4-DQPSK modulation and the 3 Mb/s EDR packets use 8DPSK modulation.

Submitted documents

Circuit Diagram
Block Diagram
Bill of material
User manual

Remark

Preliminary tests were performed in different data rate to find the worst radiated emission. The data rate shown in the table below is the worst-case rate with respect to the specific test item. Investigation has been done on all the possible configurations for searching the worst cases.

www.tuv.com

List of Test and Measurement Instruments

	Equipment used	Manufacturer	Model No.	S/N	Due Date
<input checked="" type="checkbox"/>	Semi-anechoic Chamber	Frankonia	Nil	Nil	27-Mar-10
<input checked="" type="checkbox"/>	Test Receiver	R & S	ESU26	100050	06-Aug-09
<input checked="" type="checkbox"/>	Bi-conical Antenna	R & S	HK116	100242	22-May-10
<input checked="" type="checkbox"/>	Log Periodic Antenna	R & S	HL223	841516/020	21-May-10
<input checked="" type="checkbox"/>	Coaxial cable 50ohm	Rosenberger	RTK081-05S-05S-10m	LA2-001-10M / 002	15-May-10
<input checked="" type="checkbox"/>	Microwave amplifier 0.5-26.5GHz, 25dB gain	HP	83017A	3950M00241	03-Oct-09
<input checked="" type="checkbox"/>	High Pass Filter (cutoff freq. =1000MHz)	Trilithic	23042	9829213	31-Oct-09
<input checked="" type="checkbox"/>	Horn Antenna	EMCO	3115	9002-3351	27-Feb-10
<input checked="" type="checkbox"/>	Active Loop Antenna	EMCO	6502	9107-2651	20-Dec-09
<input checked="" type="checkbox"/>	Test Receiver	R & S	ESCS 30	100201	22-Dec-09
<input checked="" type="checkbox"/>	Artificial Mains Network	R & S	ESH3-Z5	100230	22-Dec-09
<input checked="" type="checkbox"/>	Pulse Limiter	R & S	ESH3-Z2	100161	22-Dec-09

Results FCC Part 15 – Subpart C

Subclause 15.203 – Antenna Information						Pass
Requirement:	No antenna other than that furnished by the responsible party shall be used with the device					
Results:	Permanent attached antenna					
Verdict:	Pass					
Subclause 15.204 – Antenna Information						Pass
Requirement:	Provide information for every antenna proposed for the use with the EUT					
Results:	a) Antenna type:	Chip Antenna				
	b) Manufacturer and model no:	N.A.				
	c) Gain with reference to an isotropic radiator:	2 dBi				
Verdict:	Pass					
Subclause 15.207 – Disturbance Voltage on AC Mains						Pass
Test Port: AC mains input port of the Marantz Amplifier Applied voltage: 100VAC Applicable only to equipment designed to be connected to the public utility power line.						
1) Mode of operation: Transmitting						
Live measurement						
Frequency range (MHz)	Frequency (MHz)	Quasi-peak dB μ V	Average dB μ V	Limit QP (dB μ V)	Limit AV (dB μ V)	Verdict
0,15 – 0,5	0.168	46.2	29.8	66 - 56	56 - 46	Pass
	0.258	43.1	29.9	66 - 56	56 - 46	Pass
> 0,5 - 5	0.570	38.2	29.3	56	46	Pass
> 5 - 30	-	-	-	60	50	Pass
Neutral measurement						
Frequency range (MHz)	Frequency (MHz)	Quasi-peak dB μ V	Average dB μ V	Limit QP (dB μ V)	Limit AV (dB μ V)	Verdict
0,15 – 0,5	0.174	44.9	29.4	66 - 56	56 - 46	Pass
	0.258	43.6	31.9	66 - 56	56 - 46	Pass
> 0,5 - 5	0.516	39.5	29.9	56	46	Pass
> 5 - 30	-	-	-	60	50	Pass
Results:	The radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150kHz to 30MHz does not exceed the limits. For test Results plots refer to Appendix 1, page 2-3.					

Subclause 15.247 (a)(1) – Carrier Frequency Separation		Pass
Requirement:	Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25kHz or the $2/3 \cdot 20\text{dB}$ bandwidth of the hopping channel, whichever is greater.	
Test Specification	: FCC Part 15 Subpart A – Subclause 15.31	
Mode of operation	: Tx mode (hopping on), GFSK	
Port of testing	: Temporary antenna port	
Detector	: Peak	
RBW/VBW	: 100 kHz / 300 kHz	
Supply voltage	: 3.3VDC from DC power supply	
Temperature	: 23°C	
Humidity	: 50%	
Results:	Pre-scan has been conducted to determine the worst-case mode from all possible combinations between available modulations and packet types. The centre frequencies of the hopping channels are separated by more than the $2/3 \cdot 20\text{dB}$ bandwidth. For test Results plots refer to Appendix 1, page 4.	
Verdict:	Pass	

Subclause 15.247 (a)(1)(iii) – Number of hopping channels		Pass
Requirement:	Frequency hopping systems operating in the 2400MHz-2483.5MHz bands shall use at least 15 hopping frequencies.	
Test Specification	: FCC Part 15 Subpart A – Subclause 15.31	
Mode of operation	: Tx mode (hopping on), GFSK	
Port of testing	: Temporary antenna port	
Detector	: Peak	
RBW/VBW	: 1 MHz / 3 MHz	
Supply voltage	: 3.3VDC from DC power supply	
Temperature	: 23°C	
Humidity	: 50%	
Results:	The total number of hopping frequencies is more than 15. For test Results plots refer to Appendix 1, page 5.	
Verdict:	Pass	

Subclause 15.247 (a)(1)(iii) – Time of Occupancy (Dwell Time)		Pass
Requirement:	Frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed.	
Test Specification	: FCC Part 15 Subpart A – Subclause 15.31	
Mode of operation	: Tx mode (hopping on), DH5 packet	
Port of testing	: Temporary antenna port	
Detector	: Peak	
RBW/VBW	: 1 MHz / 3 MHz	
Supply voltage	: 3.3VDC from DC power supply	
Temperature	: 23°C	
Humidity	: 50%	
Results:	Time period calculation = $0.4 \times 79 = 31.6\text{s}$ Dwell time = $64 \times 2.904 \times 10^{-3} = 185.9 \times 10^{-3}$ $\leq 400 \times 10^{-3} \text{ s}$	
	For test protocols please refer to Appendix 1, page 6-7.	
Verdict:	Pass	


Subclause 15.247 (a) – 20 dB Bandwidth		Pass																
Requirement:	Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25kHz or the $\frac{2}{3} \times 20\text{dB}$ bandwidth of the hopping channel, whichever is greater.																	
Test Specification	: FCC Part 15 Subpart A – Subclause 15.31																	
Mode of operation	: Tx mode (2402MHz, 2441MHz, 2480MHz), (8DPSK)																	
Port of testing	: Temporary antenna port																	
Detector	: Peak																	
RBW/VBW	: 30 kHz / 100 kHz																	
Supply voltage	: 3.3VDC from DC power supply																	
Temperature	: 23°C																	
Humidity	: 50%																	
Results:	Pre-scan has been conducted to determine the worst-case mode from all possible combinations between available modulations and packet types. For test protocols refer to Appendix 1, page 8-9.																	
	<table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th style="text-align: center;">Frequency (MHz)</th> <th style="text-align: center;">20 dB left (MHz)</th> <th style="text-align: center;">20 dB right (MHz)</th> <th style="text-align: center;">20dB bandwidth (MHz)</th> </tr> </thead> <tbody> <tr> <td style="text-align: center;">2402</td> <td style="text-align: center;">0.642</td> <td style="text-align: center;">0.642</td> <td style="text-align: center;">1.284</td> </tr> <tr> <td style="text-align: center;">2441</td> <td style="text-align: center;">0.642</td> <td style="text-align: center;">0.630</td> <td style="text-align: center;">1.272</td> </tr> <tr> <td style="text-align: center;">2480</td> <td style="text-align: center;">0.642</td> <td style="text-align: center;">0.642</td> <td style="text-align: center;">1.284</td> </tr> </tbody> </table>		Frequency (MHz)	20 dB left (MHz)	20 dB right (MHz)	20dB bandwidth (MHz)	2402	0.642	0.642	1.284	2441	0.642	0.630	1.272	2480	0.642	0.642	1.284
Frequency (MHz)	20 dB left (MHz)	20 dB right (MHz)	20dB bandwidth (MHz)															
2402	0.642	0.642	1.284															
2441	0.642	0.630	1.272															
2480	0.642	0.642	1.284															

Subclause 15.247 (a) – Hopping Sequence
Pass

Requirement: The hopping sequence is generated and provided with an example.

Hopping sequence

The channel is represented by a pseudo-random hopping sequence hopping through the 79 RF channels. The hopping sequence is unique for the piconet and is determined by the Bluetooth device address of the master. The X input determines the phase in the 32-hop segment, whereas Y1 and Y2 selects between master-to-slave and slave-to-master transmission. The inputs A to D determine the ordering within the segment, the inputs E and F determine the mapping onto the hop frequencies.

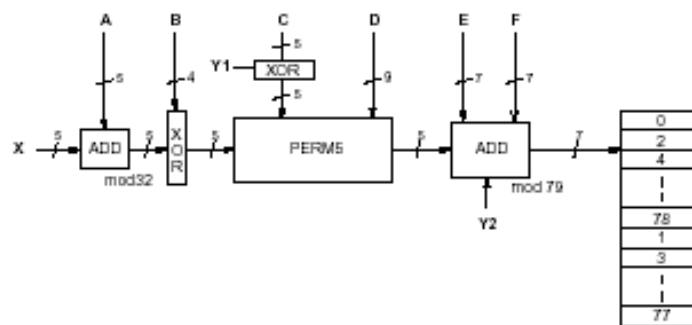

www.tuv.com

Example data:

Hop sequence {k} for CONNECTION STATE:

CLK start: 0x0000010

ULAP: 0x00000000

#ticks: 00 02 | 04 06 | 08 0a | 0c 0e | 10 12 | 14 16 | 18 1a | 1c 1e |

```

0x0000010: 08 66 | 10 70 | 12 19 | 14 23 | 16 01 | 18 05 | 20 33 | 22 37 |
0x0000030: 24 03 | 26 07 | 28 35 | 30 39 | 32 72 | 34 76 | 36 25 | 38 29 |
0x0000050: 40 74 | 42 78 | 44 27 | 46 31 | 48 09 | 50 13 | 52 41 | 54 45 |
0x0000070: 56 11 | 58 15 | 60 43 | 62 47 | 32 17 | 36 19 | 34 49 | 38 51 |
0x0000090: 40 21 | 44 23 | 42 53 | 46 55 | 48 33 | 52 35 | 50 65 | 54 67 |
0x00000b0: 56 37 | 60 39 | 58 69 | 62 71 | 64 25 | 68 27 | 66 57 | 70 59 |
0x00000d0: 72 29 | 76 31 | 74 61 | 78 63 | 01 41 | 05 43 | 03 73 | 07 75 |
0x00000f0: 09 45 | 13 47 | 11 77 | 15 00 | 64 49 | 66 53 | 68 02 | 70 06 |
0x0000110: 01 51 | 03 55 | 05 04 | 07 08 | 72 57 | 74 61 | 76 10 | 78 14 |
0x0000130: 09 59 | 11 63 | 13 12 | 15 16 | 17 65 | 19 69 | 21 18 | 23 22 |
0x0000150: 33 67 | 35 71 | 37 20 | 39 24 | 25 73 | 27 77 | 29 26 | 31 30 |
0x0000170: 41 75 | 43 00 | 45 28 | 47 32 | 17 02 | 21 04 | 19 34 | 23 36 |
0x0000190: 33 06 | 37 08 | 35 38 | 39 40 | 25 10 | 29 12 | 27 42 | 31 44 |
0x00001b0: 41 14 | 45 16 | 43 46 | 47 48 | 49 18 | 53 20 | 51 50 | 55 52 |
0x00001d0: 65 22 | 69 24 | 67 54 | 71 56 | 57 26 | 61 28 | 59 58 | 63 60 |
0x00001f0: 73 30 | 77 32 | 75 62 | 00 64 | 49 34 | 51 42 | 57 66 | 59 74 |
0x0000210: 53 36 | 55 44 | 61 68 | 63 76 | 65 50 | 67 58 | 73 03 | 75 11 |
0x0000230: 69 52 | 71 60 | 77 05 | 00 13 | 02 38 | 04 46 | 10 70 | 12 78 |
0x0000250: 06 40 | 08 48 | 14 72 | 16 01 | 18 54 | 20 62 | 26 07 | 28 15 |
0x0000270: 22 56 | 24 64 | 30 09 | 32 17 | 02 66 | 06 74 | 10 19 | 14 27 |
0x0000290: 04 70 | 08 78 | 12 23 | 16 31 | 18 03 | 22 11 | 26 35 | 30 43 |
0x00002b0: 20 07 | 24 15 | 28 39 | 32 47 | 34 68 | 38 76 | 42 21 | 46 29 |
0x00002d0: 36 72 | 40 01 | 44 25 | 48 33 | 50 05 | 54 13 | 58 37 | 62 45 |
0x00002f0: 52 09 | 56 17 | 60 41 | 64 49 | 34 19 | 36 35 | 50 51 | 52 67 |
0x0000310: 38 21 | 40 37 | 54 53 | 56 69 | 42 27 | 44 43 | 58 59 | 60 75 |
0x0000330: 46 29 | 48 45 | 62 61 | 64 77 | 66 23 | 68 39 | 03 55 | 05 71 |
0x0000350: 70 25 | 72 41 | 07 57 | 09 73 | 74 31 | 76 47 | 11 63 | 13 00 |
0x0000370: 78 33 | 01 49 | 15 65 | 17 02 | 66 51 | 70 67 | 03 04 | 07 20 |
0x0000390: 68 55 | 72 71 | 05 08 | 09 24 | 74 59 | 78 75 | 11 12 | 15 28 |
0x00003b0: 76 63 | 01 00 | 13 16 | 17 32 | 19 53 | 23 69 | 35 06 | 39 22 |
0x00003d0: 21 57 | 25 73 | 37 10 | 41 26 | 27 61 | 31 77 | 43 14 | 47 30 |
0x00003f0: 29 65 | 33 02 | 45 18 | 49 34 | 19 04 | 21 08 | 23 20 | 25 24 |

```

Subclause 15.247 (a) – Equal Hopping Frequency Use

Pass

Requirement: Each of the transmitter's hopping channels is used equally on average.

Equal hopping frequency use

The EUT complies with the Bluetooth RF specifications. For details refer to the Bluetooth standard.

Subclause 15.247 (a) – Receiver Input Bandwidth	Pass
Requirement: The associated receiver(s) complies with the requirement that its input bandwidth matches the bandwidth of the transmitted signal.	
Receiver input bandwidth The receiver bandwidth is equal to the receiver bandwidth in the 79 hopping channel mode, which is 1 MHz. The receiver bandwidth was verified during Bluetooth RF conformance testing.	

Subclause 15.247 (a) – Receiver Hopping Capability	Pass
Requirement: The associated receiver has the ability to shift frequencies in synchronisation with the transmitted signals.	
Receiver hopping Capability The EUT complies with the Bluetooth RF specifications. For details refer to the Bluetooth standard.	

Subclause 15.247 (b)(1) – Peak Output Power	Pass				
Test Specification : FCC Part 15 Subpart A – Subclause 15.31 Mode of operation : Tx mode (2402MHz, 2441MHz, 2480MHz) Port of testing : Temporary antenna port Detector : Peak RBW/VBW : 3 MHz / 10 MHz Supply voltage : 3.3VDC from DC power supply Temperature : 23°C Humidity : 50%					
Requirement: For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 hopping channels, and all frequency hopping systems in the 5725-5850 MHz band: 1 Watt. For all other frequency hopping systems in the 2400 – 2483.5 MHz band: 0.125 Watts.					
Results: For test protocols please refer to Appendix 1, page 9-14.					
GFSK Modulation					
Frequency (MHz)	Maximum peak output power (dBm)	Cable attenuation (dB)	Output power (dBm)	Limit (W/dBm)	Verdict
2402	5.87	3.52	9.390	1 / 30.0	Pass
2441	4.98	3.65	8.630	1 / 30.0	Pass
2480	4.53	3.60	8.130	1 / 30.0	Pass
Pi/4 DQPSK Modulation					
Frequency (MHz)	Maximum peak output power (dBm)	Cable attenuation (dB)	Output power (dBm)	Limit (W/dBm)	Verdict
2402	4.86	3.52	8.380	1 / 30.0	Pass
2441	4.10	3.65	7.750	1 / 30.0	Pass

www.tuv.com

2480	3.46	3.60	7.060	1 / 30.0	Pass
8 DPSK Modulation					
Frequency (MHz)	Maximum peak output power (dBm)	Cable attenuation (dB)	Output power (dBm)	Limit (W/dBm)	Verdict
2402	5.14	3.52	8.660	1 / 30.0	Pass
2441	4.31	3.65	7.960	1 / 30.0	Pass
2480	3.73	3.60	7.330	1 / 30.0	Pass

Subclause 15.247 (d) – Band edge compliance of conducted emissions		Pass
<p>Test Specification : FCC Part 15 Subpart A – Subclause 15.31 Mode of operation : Tx mode (2402MHz, 2480MHz), 8DPSK Port of testing : Temporary antenna port Detector : Peak RBW/VBW : 100 kHz / 300 kHz Supply voltage : 3.3VDC from DC power supply Temperature : 23°C Humidity : 50%</p>		
Requirement:	<p>In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.</p>	
Results:	<p>Pre-scan has been conducted to determine the worst-case mode from all possible combinations between available modulations and packet types.</p> <p>There is no peak found outside any 100 kHz bandwidth of the operating frequency band. For test protocols refer to Appendix 1, page 15-16.</p>	

Subclause 15.205 – Band edge compliance of radiated emissions		Pass
<p>Test Specification : FCC Part 15 Subpart A – Subclause 15.31 Mode of operation : Tx mode (2402MHz, 2480MHz), 8DPSK Port of testing : Temporary antenna port Detector : Peak RBW/VBW : 1 MHz / 3 MHz Supply voltage : 3.3VDC from DC power supply Temperature : 23°C Humidity : 50%</p>		
Requirement:	<p>Radiated emissions which fall in the restricted bands, as defined in 15.205 (a), must also comply with the radiated emission limits specified in 15.209(a).</p>	
Results:	<p>There is no peak found in the restricted bands. For test protocols refer to Appendix 1, page 17-20.</p>	

Subclause 15.247 (d) – Spurious Conducted Emissions		Pass			
Test Specification : FCC Part 15 Subpart A – Subclause 15.31 Mode of operation : Tx mode (2402MHz, 2441MHz, 2480MHz), 8DPSK Port of testing : Temporary antenna port Detector : Peak RBW/VBW : 100 kHz / 300 kHz Supply voltage : 3.3VDC from DC power supply Temperature : 23 °C Humidity : 50 %					
Requirement: In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.					
Results: Pre-scan has been conducted to determine the worst-case mode from all possible combinations between available modulations and packet types. There is no peak found outside any 100kHz bandwidth of the operating frequency band in the three transmit frequency. All three transmit frequency modes comply with the limit stated in subclause 15.247(d). For test protocols refer to Appendix 1, page 21-22.					
Operating frequency (MHz)	Spurious frequency (MHz)	Spurious Level (dBm)	Reference value (dBm)	Delta (dB)	Verdict
2402	1600.000	-45.60	3.59	-49.19	Pass
	4900.000	-43.74	3.59	-49.19	Pass
2441	1600.000	-46.01	0.31	-47.33	Pass
	4850.000	-41.34	0.31	-49.19	Pass
2480	1650.000	-45.49	0.13	-46.32	Pass
	4950.000	-44.57	0.13	-49.19	Pass

Subclause 15.247 (c) – Spurious Radiated Emissions		Pass
Test Specification : ANSI C63.4 – 2003 Mode of operation : Tx mode (2402MHz, 2441MHz, 2480MHz), 8DPSK Port of testing : Enclosure Detector : Peak RBW/VBW : 100 kHz / 300 kHz for f < 1 GHz : 1 MHz / 3 MHz for f > 1 GHz Supply voltage : internal batteries has been activated Temperature : 23°C Humidity : 50%		
Requirement:	In any 100kHz bandwidth outside the frequency band at least 20dB below the highest level of the desired power. In addition, radiated emissions which fall in the restricted bands, as defined in section 15.205(a), must also comply with the radiated emission limits specified in section 15.205(c).	
Results:	Pre-scan has been conducted to determine the worst-case mode from all possible combinations between available modulations and packet types. All three transmit frequency modes comply with the field strength within the restricted bands. There is no spurious found below 30MHz.	

Tx frequency 2402MHz		Vertical Polarization	
Freq MHz	Level dBuV/m	Limit/ Detector dBuV/m	
96.001	30.30	43.5 / QP	
159.990	30.10	43.5 / QP	
287.990	34.70	46 / QP	
399.860	29.80	46 / QP	
1601.923	44.37	74.0 / P	
1601.923	40.25	54.0 / A	
4803.590	60.68	74.0 / P	
4804.006	40.06	54.0 / A	
Tx frequency 2402MHz		Horizontal Polarization	
Freq MHz	Level dBuV/m	Limit/ Detector dBuV/m	
96.000	34.20	43.5 / QP	
159.990	39.80	43.5 / QP	
296.060	29.10	46 / QP	
383.630	37.30	46 / QP	
582.620	22.90	46 / QP	
1602.067	50.51	74.0 / P	
1602.067	48.84	54.0 / A	
4803.926	57.77	74.0 / P	
4803.926	38.71	54.0 / A	
Tx frequency 2441MHz		Vertical Polarization	
Freq MHz	Level dBuV/m	Limit/ Detector dBuV/m	
96.000	24.40	43.5 / QP	
127.990	35.70	43.5 / QP	

www.tuv.com

288.020	30.00	46 / QP
331.970	32.80	46 / QP
1628.141	48.80	74.0 / P
1627.981	46.97	54.0 / A
4882.083	62.38	74.0 / P
4882.083	40.45	54.0 / A
Tx frequency 2441MHz Horizontal Polarization		
Freq MHz	Level dBuV/m	Limit/ Detector dBuV/m
96.000	32.40	43.5 / QP
127.990	39.10	43.5 / QP
336.320	38.30	46 / QP
408.560	34.90	46 / QP
1628.029	52.62	74.0 / P
1628.029	51.45	54.0 / A
4882.051	57.52	74.0 / P
4882.052	39.24	54.0 / A
Tx frequency 2480MHz Vertical Polarization		
Freq MHz	Level dBuV/m	Limit/ Detector dBuV/m
96.000	27.30	43.5 / QP
127.990	36.60	43.5 / QP
287.990	30.80	46 / QP
336.500	33.40	46 / QP
1654.071	48.61	74.0 / P
1654.071	46.71	54.0 / A
4960.229	57.42	74.0 / P
4959.924	39.27	54.0 / A
Tx frequency 2480MHz Horizontal Polarization		
Freq MHz	Level dBuV/m	Limit/ Detector dBuV/m
96.000	32.90	43.5 / QP
127.990	38.20	43.5 / QP
345.350	37.90	46 / QP
410.960	34.60	46 / QP
1653.910	48.66	74.0 / P
1653.990	46.26	54.0 / A
4959.772	56.71	74.0 / P
4959.980	39.19	54.0 / A