





Gakkiku Technology Company
 Flat B, 5/F., Selwyn Factory Building,
 No. 404 Kwun Tong Road,
 Kwun Tong, Kowloon,
 Hong Kong
 Tel: (852) 8113 2281
 Fax: (852) 2797 0192
 Email: info@gakkiku.com

Test Report

Applicant	Scientific Toys Ltd.
Address	Rm. 1108, 11/F., Block B, New Mandarin Plaza, 14 Science Museum Road, TST East, Kowloon, Hong Kong
FCC ID Number	FCC ID: BY32160-49TP
Brand Name(s)	None
Model Number(s)/ Catalog Number(s)	33361, 33360, 33362, BY32160-49TP
Product Description	49.82-49.90 MHz Wireless Remote Control Toy - TX
Operating Frequency	49.860 MHz
Rules/Standards	Part 15.235 of the FCC Rules, RSS-310 Issue 3 and RSS-Gen Issue 3 of the Industry Canada
Received Date	14th May, 2014
Tested Date	15th May, 2014
Approved by	Dick Chan (Director of Gakkiku)
Tested by	 Lahm Peng (Engineer of Shenzhen SEM.Test)
Signed by	 Jandy So (Manager of Shenzhen SEM.Test)
Report Number	GKK201405140A
Test Results	<input checked="" type="checkbox"/> PASSED <input type="checkbox"/> FAILED

GENERAL

The report is written by Gakkiku Technology Company. The tested device complies with the general approval requirements of the FCC Rules and the Industry Canada as identified in this test report.

TEST LOCATION

The tested device was tested at the test site of the Shenzhen SEM.Test Technology Co., Ltd., 1/F, Building A, Hongwei Industrial Park, Liuxian 2nd Road, Bao'an District, Shenzhen, 518101, Guangdong, China. The FCC Recognized 2.948 Listed Test Firm Registration Number is 934118. The Industry Canada IC OATS Filing Number/Assigned Code is 11464A.

TABLE OF CONTENTS

1. GENERAL INFORMATION 4

1.1 PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT) 4

1.2 TEST STANDARDS 4

1.3 RELATED SUBMITTAL(S)/GRANT(S) 4

1.4 TEST METHODOLOGY5

1.5 EUT EXERCISE SOFTWARE5

1.6 ACCESSORIES EQUIPMENT LIST AND DETAILS5

1.7 EUT CABLE LIST AND DETAILS5

2. SUMMARY OF TEST RESULTS..... 6

3. PART 15.203 & RSS-GEN ISSUE 3 §7.1.2 - ANTENNA REQUIREMENT 7

3.1 STANDARD APPLICABLE7

3.2 TEST RESULT7

4. PART 15.235, 15.209, 15.205 & RSS-310 ISSUE 3 §3.8 - RADIATED EMISSION 8

4.1 MEASUREMENT UNCERTAINTY 8

4.2 STANDARD APPLICABLE..... 8

4.3 TEST EQUIPMENT LIST AND DETAILS 8

4.4 TEST PROCEDURE 9

4.5 CORRECTED AMPLITUDE & MARGIN CALCULATION 9

4.6 ENVIRONMENTAL CONDITIONS..... 9

4.7 SUMMARY OF TEST RESULTS/PLOTS10

5. PART 15.235(B) & RSS-310 ISSUE 3 §2.4 - OUT OF BAND EMISSIONS 12

5.1 STANDARD APPLICABLE12

5.2 TEST EQUIPMENT LIST AND DETAILS12

5.3 TEST PROCEDURE12

5.4 ENVIRONMENTAL CONDITIONS.....12

5.5 SUMMARY OF TEST RESULTS/PLOTS13

1. GENERAL INFORMATION

1.1 Product Description for Equipment Under Test (EUT)

Client Information

Applicant: Scientific Toys Ltd.
 Address of applicant: Rm. 1108, 11/F., Block B, New Mandarin Plaza,
 14 Science Museum Road, TST East, Kowloon, Hong Kong

Manufacturer: Scientific Toys Ltd.
 Address of manufacturer: Rm. 1108, 11/F., Block B, New Mandarin Plaza,
 14 Science Museum Road, TST East, Kowloon, Hong Kong

General Description of EUT

Item	Description
Product Description:	49.82-49.90 MHz Wireless Remote Control Toy - TX
Brand Name(s):	None
Model Number(s)/ Catalog Number(s):	33361, 33360, 33362, BY32160-49TP
Power Source:	DC 9V Battery
Frequency Range:	49.860 MHz
Antenna Type:	Fixed Antenna
For more information refer to the circuit diagram form and the user's manual.	

The test data is gathered from a production sample, provided by the manufacturer.

1.2 Test Standards

The following report is prepared on behalf of the Scientific Toys Ltd. in accordance with Part 15 Subpart C, Part 15.235, 15.209, 15.205 & 15.203 of the FCC Rules and RSS-310 Issue 3 & RSS-Gen Issue 3 of the Industry Canada: Spectrum Management Telecommunications Radio Standards Specification, Low-power Licence-exempt Radiocommunication Devices (All Frequency Bands): Category II Equipment sets out standard requirements for Low-power Licence-exempt Radiocommunication Devices that are certification exempt.

The objective is to determine compliance with Part 15 Subpart C, Part 15.235, 15.209, 15.205 & 15.203 of the FCC Rules and RSS-310 Issue 3 & RSS-Gen Issue 3 of the Industry Canada.

Maintenance of compliance is the responsibility of the manufacturer. Any modification of the product, which results in lowering the emission/immunity, should be checked to ensure compliance has been maintained.

1.3 Related Submittal(s)/Grant(s)

No Related Submittal(s).

1.4 Test Methodology

All measurements contained in this report were conducted with ANSI Standard C63.4-2009, American National Standard Institute for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the range of 9 kHz to 40 GHz.

The equipment under test (EUT) was configured to measure its highest possible emission level. The test modes were adapted accordingly in reference to the Operating Instructions.

1.5 EUT Exercise Software

The EUT exercise program used during the testing was designed to exercise the system components. The test software is started while the whole system is on.

1.6 Accessories Equipment List and Details

Description	Manufacturer	Model	Serial Number
/	/	/	/

1.7 EUT Cable List and Details

Cable Description	Length (M)	Shielded/ Unshielded	With Core/ Without Core
/	/	/	/

2. SUMMARY OF TEST RESULTS

FCC RULES INDUSTRY CANADA	DESCRIPTION OF TEST	RESULT
Part 15.203, RSS-Gen Issue 3 §7.1.2	Antenna Requirement	Compliant
Part 15.205, RSS-310 Issue 3 §2.4 & RSS-Gen Issue 3 §7.2.2 Table 3	Restricted Band of Operation	Compliant
Part 15.209, RSS-310 Issue 3 §3.8 & RSS-Gen Issue 3 §7.2.5 Table 5	Radiated Emission Limit	Compliant
Part 15.235(a) RSS-310 Issue 3 §3.8 & RSS-Gen Issue 3 §7.2.5 Table 5	Field Strength	Compliant
Part 15.235(b) RSS-310 Issue 3 §2.4 & RSS-Gen Issue 3 §7.2.2 Table 3	Out of Band Emission	Compliant

3. Part 15.203 & RSS-Gen Issue 3 §7.1.2 - ANTENNA REQUIREMENT

3.1 Standard Applicable

According to Part 15.203 and RSS-Gen Issue 3 §7.1.2, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.

3.2 Test Result

This product has a fixed antenna, fulfill the requirement of this section.

4. Part 15.235, 15.209, 15.205 & RSS-310 Issue 3 §3.8 - RADIATED EMISSION

4.1 Measurement Uncertainty

Based on NIS 81, the Treatment of Uncertainty in EMC Measurements, the best estimate of the uncertainty of a radiation emissions measurement is ± 5.10 dB.

4.2 Standard Applicable

According to Part 15.235(a) of the FCC Rules, the field strength of any emission within this band shall not exceed 10,000 microvolts/meter at 3 meters. The emission limit in this paragraph is based on measurement instrumentation employing an average detector. The provisions in Part 15.35 of the FCC Rules for limiting peak emissions apply.

According to RSS-310 Issue 3 §3.8 of the Industry Canada, the field strength shall not exceed 10 millivolts/m measured at 3 meters (equivalent with an averaging or a CISPR quasi-peak detector (equivalent to 30 μ W e.i.r.p.)).

According to Part 15.235(b) of the FCC Rules, the field strength of any emissions appearing between the band edges and up to 10 kHz above and below the band edges shall be attenuated at least 26 dB below the level of the unmodulated carrier or to the general limits in Part 15.209 of the FCC Rules, whichever permits the higher emission levels. The field strength of any emissions removed by more than 10 kHz from the band edges shall not exceed the general radiated emission limits in Part 15.209 of the FCC Rules. All signals exceeding 20 microvolts/meter at 3 meters shall be reported in the application for certification.

According to RSS-310 Issue 3 §3.8 of the Industry Canada, the field strength of any emissions which appear outside of this band shall apply the limits of RSS-Gen Issue 3 §7.2.2 Table 3.

4.3 Test Equipment List and Details

Description	Manufacturer	Model	Serial Number	Cal. Date	Due. Date
Spectrum Analyzer	R&S	FSP	836079/035	2014-05-07	2015-05-06
EMI Test Receiver	R&S	ESVB	825471/005	2014-05-07	2015-05-06
Positioning Controller	C&C	CC-C-1F	N/A	2014-05-07	2015-05-06
RF Switch	EM	EMSW18	SW060023	2014-05-07	2015-05-06
Pre-amplifier	Agilent	8447F	3113A06717	2014-05-07	2015-05-06
Pre-amplifier	Compliance Direction	PAP-0118	24002	2014-05-07	2015-05-06
Trilog Broadband Antenna	SCHWARZBECK	VULB9163	9163-333	2014-04-20	2015-04-19
Horn Antenna	ETS	3117	00086197	2014-04-20	2015-04-19
Loop Antenna	SCHWARZECK	HFRA 5165	9365	2014-04-20	2015-04-19


Statement of Traceability: All calibrations have been performed per the NVLAP requirements traceable to the NIST.

4.4 Test Procedure

The setup of EUT is according with per ANSI Standard C63.4-2009 measurement procedure. The specification used was with the limits of Part 15.235(a), 15.209 & 15.205 of the FCC Rules and RSS-310 Issue 3 §3.8 of the Industry Canada.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle.

The spacing between the peripherals was 10 cm.

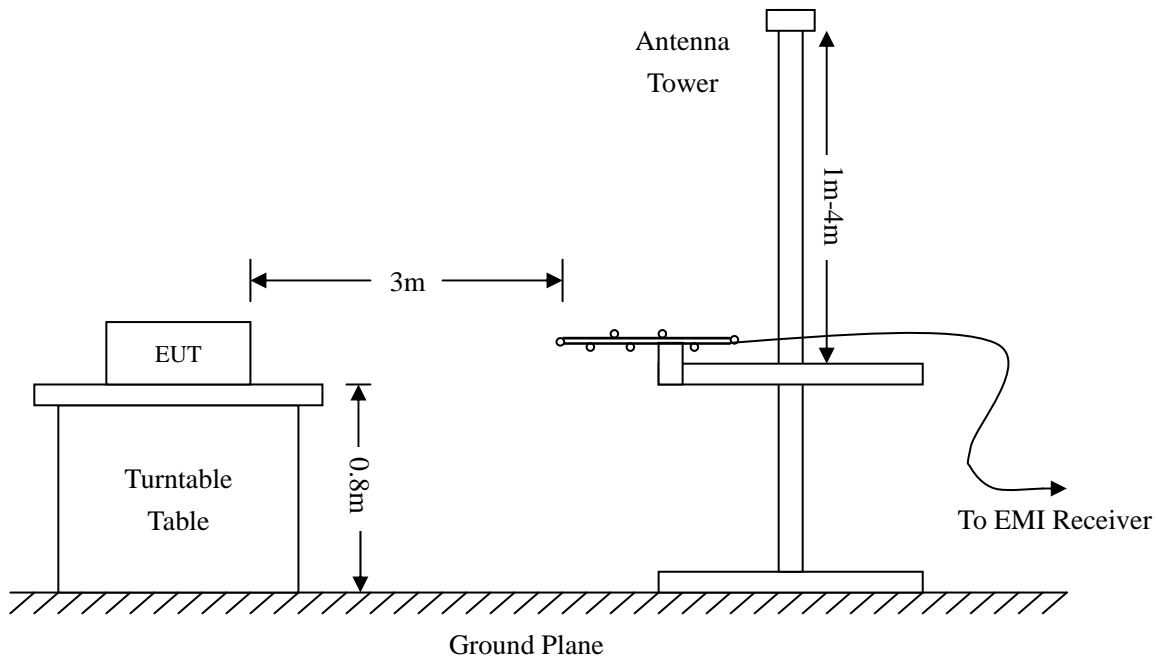

4.5 Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and the Cable Factor, and subtracting the Amplifier Gain from the Amplitude reading. The basic equation is as follows:

$$\text{Corr. Ampl.} = \text{Indicated Reading} - \text{Corr. Factor}$$

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of -6dB μ V means the emission is 6dB μ V below the maximum limit for Part 15. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Corr. Ampl.} - \text{Limit of Part 15 (RSS-310 Issue 3)}$$

4.6 Environmental Conditions

Temperature:	26° C
Relative Humidity:	52%
ATM Pressure:	1012 mbar

4.7 Summary of Test Results/Plots

According to the data below, the standards of Part 15.235, 15.209 & 15.205 of the FCC Rules and RSS-310 Issue 3 of the Industry Canada, and had the worst margin of:


-8.73 dB μ V at 399.0302 MHz in the Vertical polarization, 9 kHz to 1 GHz, 3 Meters

Note: This EUT was tested in 3 orthogonal positions and the worst case position data was reported.

Test Mode: Transmitting

Plot of Radiated Emission Test


Horizontal:

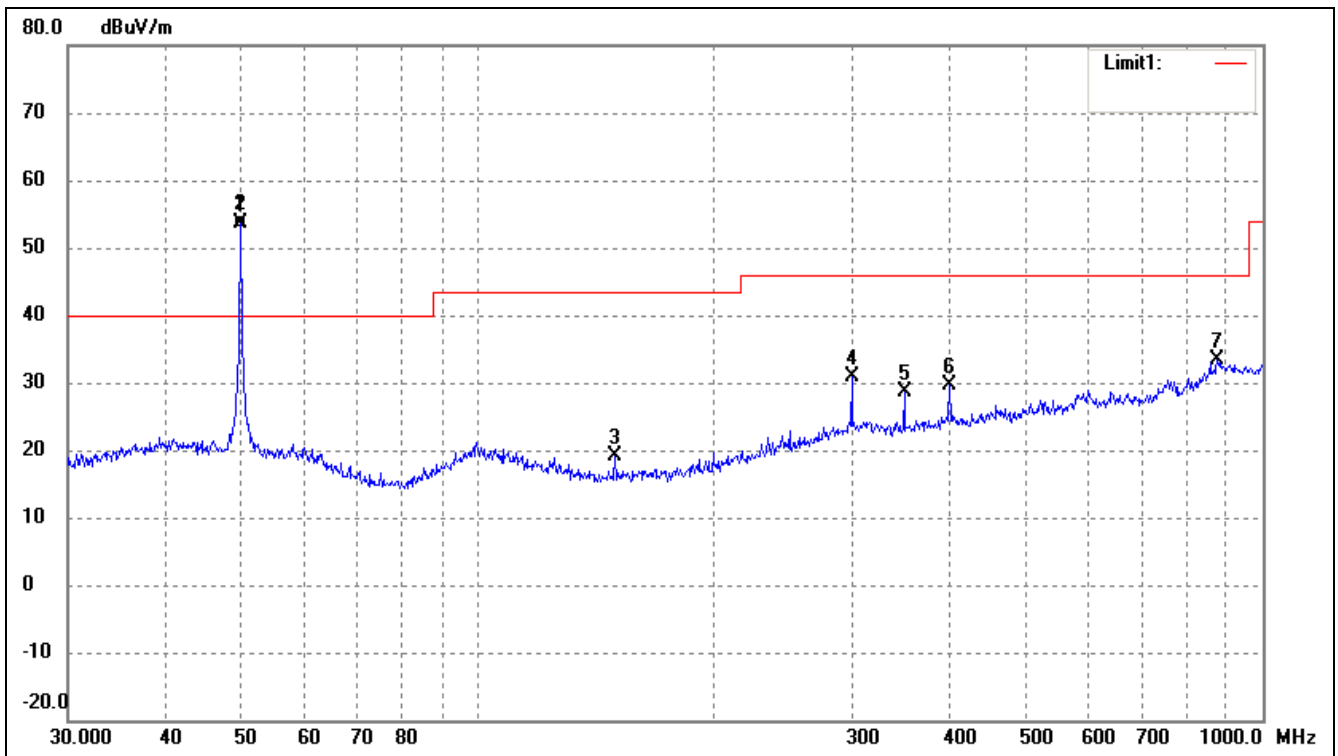

No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor(dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (°)	Height (cm)	Remark
1	49.8813	47.46	6.27	53.73	100.00	-46.27	155	100	Peak
2	49.8814	46.70	6.27	52.97	80.00	-27.03	155	100	Average
3	149.4857	16.62	2.50	19.12	43.50	-24.38	347	100	Peak
4	299.3158	21.70	9.15	30.85	46.00	-15.15	128	100	Peak
5	349.2500	19.72	8.95	28.67	46.00	-17.33	91	100	Peak
6	399.0302	19.57	10.09	29.66	46.00	-16.34	47	100	Peak
7	875.2470	16.57	16.70	33.27	46.00	-12.73	67	100	Peak

Note: Emissions attenuated more than 20 dB below the permissible value are not reported.

Vertical:

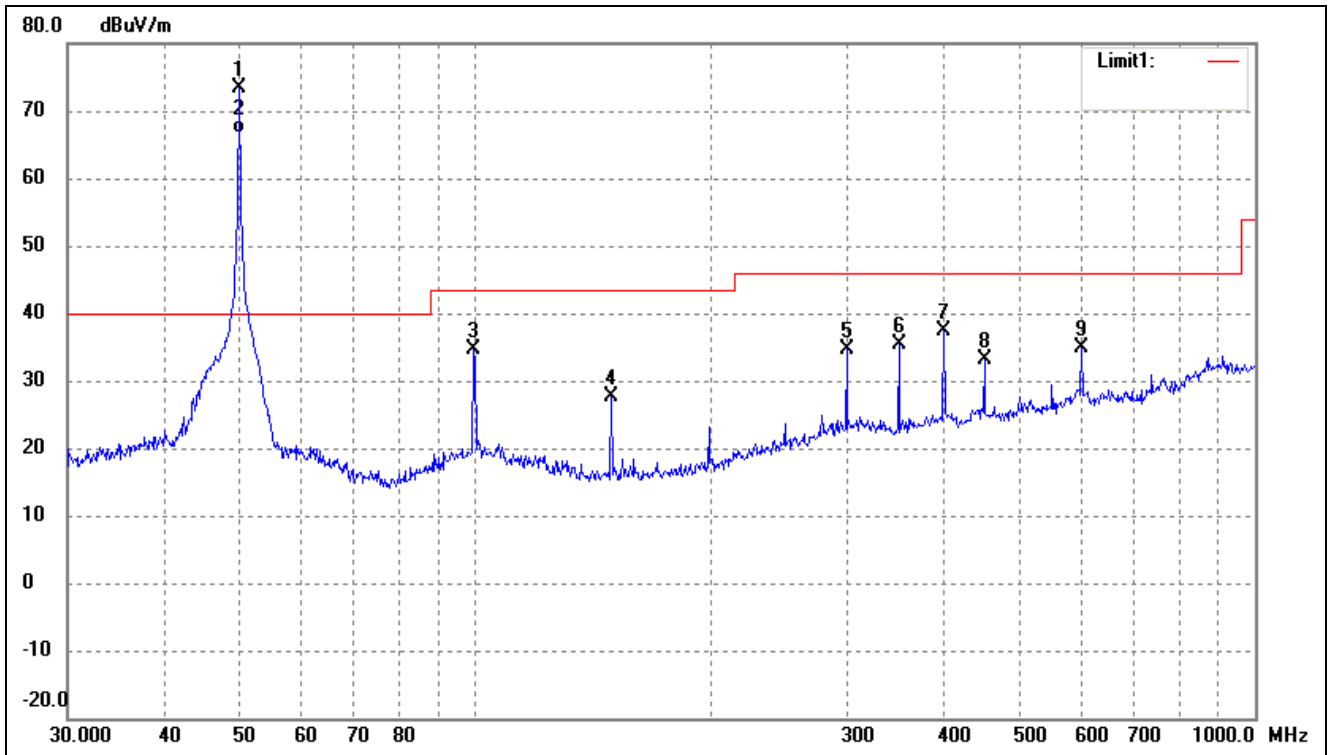

No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor(dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (°)	Height (cm)	Remark
1	49.8814	67.09	6.30	73.39	100.00	-26.61	321	100	Peak
2	49.8814	60.30	6.30	66.60	80.00	-13.40	321	100	Average
3	99.5281	28.51	6.01	34.52	43.50	-8.98	64	100	Peak
4	149.4857	25.07	2.50	27.57	43.50	-15.93	79	100	Peak
5	299.3158	25.48	9.15	34.63	46.00	-11.37	55	100	Peak
6	349.2500	26.39	8.95	35.34	46.00	-10.66	147	100	Peak
7	399.0302	27.18	10.09	37.27	46.00	-8.73	26	100	Peak
8	449.5558	22.73	10.28	33.01	46.00	-12.99	264	100	Peak
9	599.3213	21.65	13.30	34.95	46.00	-11.05	145	100	Peak

Note: Emissions attenuated more than 20 dB below the permissible value are not reported.

5. Part 15.235(b) & RSS-310 Issue 3 §2.4 - OUT OF BAND EMISSIONS

5.1 Standard Applicable

According to Part 15.235(b) of the FCC Rules and RSS-310 Issue 3 §2.4 of the Industry Canada, the field strength of any emissions appearing between the band edges and up to 10 kHz above and below the band edges shall be attenuated at least 26 dB below the level of the unmodulated carrier or to the general limits in Part 15.209 of the FCC Rules, whichever permits the higher emission levels. The field strength of any emissions removed by more than 10 kHz from the band edges shall not exceed the general radiated emission limits in Part 15.209 of the FCC Rules. All signals exceeding 20 microvolts/meter at 3 meters shall be reported in the application for certification.

5.2 Test Equipment List and Details

Description	Manufacturer	Model	Serial Number	Cal. Date	Due. Date
Spectrum Analyzer	R&S	FSP	836079/035	2014-05-07	2015-05-06
EMI Test Receiver	R&S	ESVB	825471/005	2014-05-07	2015-05-06
Positioning Controller	C&C	CC-C-1F	N/A	2014-05-07	2015-05-06
RF Switch	EM	EMSW18	SW060023	2014-05-07	2015-05-06
Pre-amplifier	Agilent	8447F	3113A06717	2014-05-07	2015-05-06
Pre-amplifier	Compliance Direction	PAP-0118	24002	2014-05-07	2015-05-06
Trilog Broadband Antenna	SCHWARZBECK	VULB9163	9163-333	2014-04-20	2015-04-19
Horn Antenna	ETS	3117	00086197	2014-04-20	2015-04-19
Loop Antenna	SCHWARZECK	HFRA 5165	9365	2014-04-20	2015-04-19

Statement of Traceability: All calibrations have been performed per the NVLAP requirements traceable to the NIST.

5.3 Test Procedure

As the radiation test, set the RBW=1kHz VBW=3kHz, observed the outside band of 49.82MHz to 49.90MHz, than mark the higher-level emission for comparing with the FCC Rules.

5.4 Environmental Conditions

Temperature:	26° C
Relative Humidity:	52%
ATM Pressure:	1022 mbar


5.5 Summary of Test Results/Plots

Frequency MHz	Emission dBμV/m	Limit
49.7200	21.04	40 dBμV/m
49.8200	31.89	>26dB
49.8600	61.27	>26dB
49.9000	35.10	>26dB
50.0000	21.26	40 dBμV/m

Test Result: Passed

Refer to the attached plots.


Horizontal:

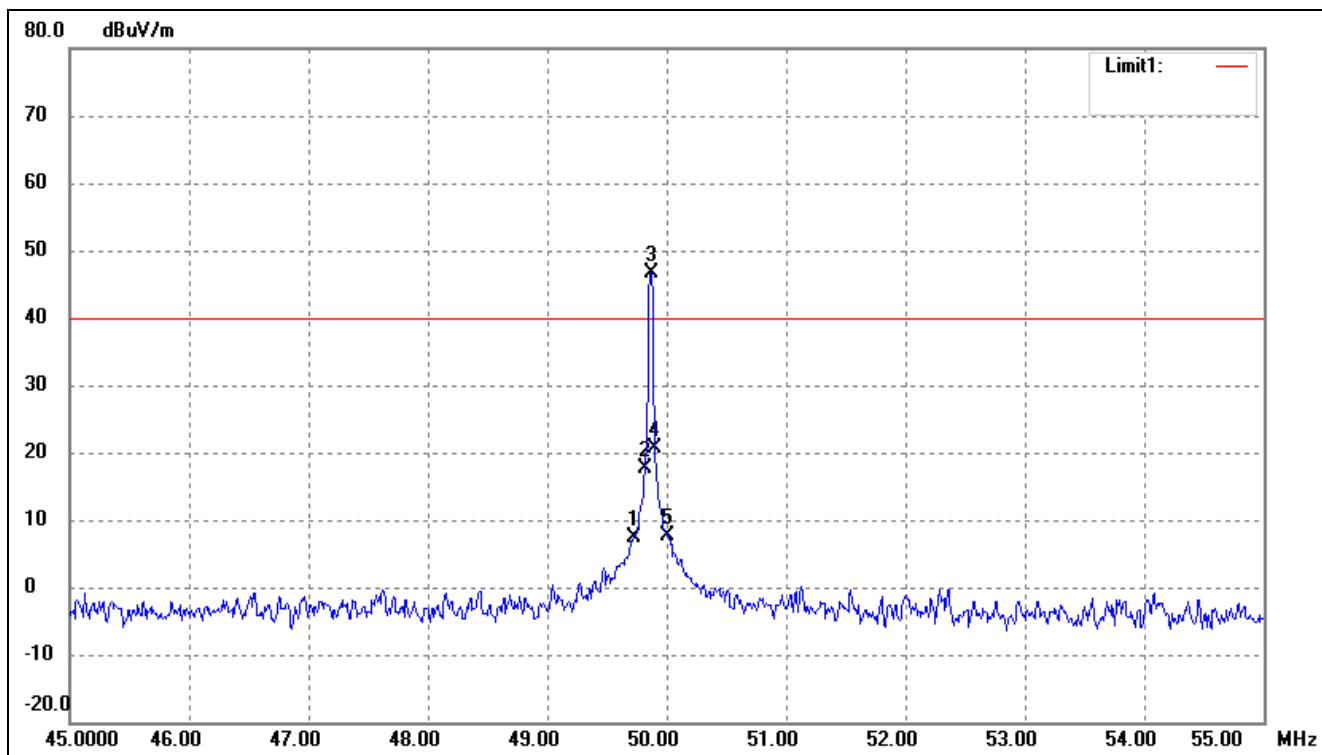

No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor(dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (°)	Height (cm)	Remark
1	49.7200	1.03	6.29	7.32	40.00	-32.68	206	100	Peak
2	49.8200	11.47	6.28	17.75	/	/	47	100	Peak
3	49.8600	40.48	6.27	46.75	/	/	27	100	Peak
4	49.9000	14.34	6.27	20.61	/	/	69	100	Peak
5	50.0000	1.48	6.26	7.74	40.00	-32.26	44	100	Peak

Note: Emissions attenuated more than 20 dB below the permissible value are not reported.

Vertical:

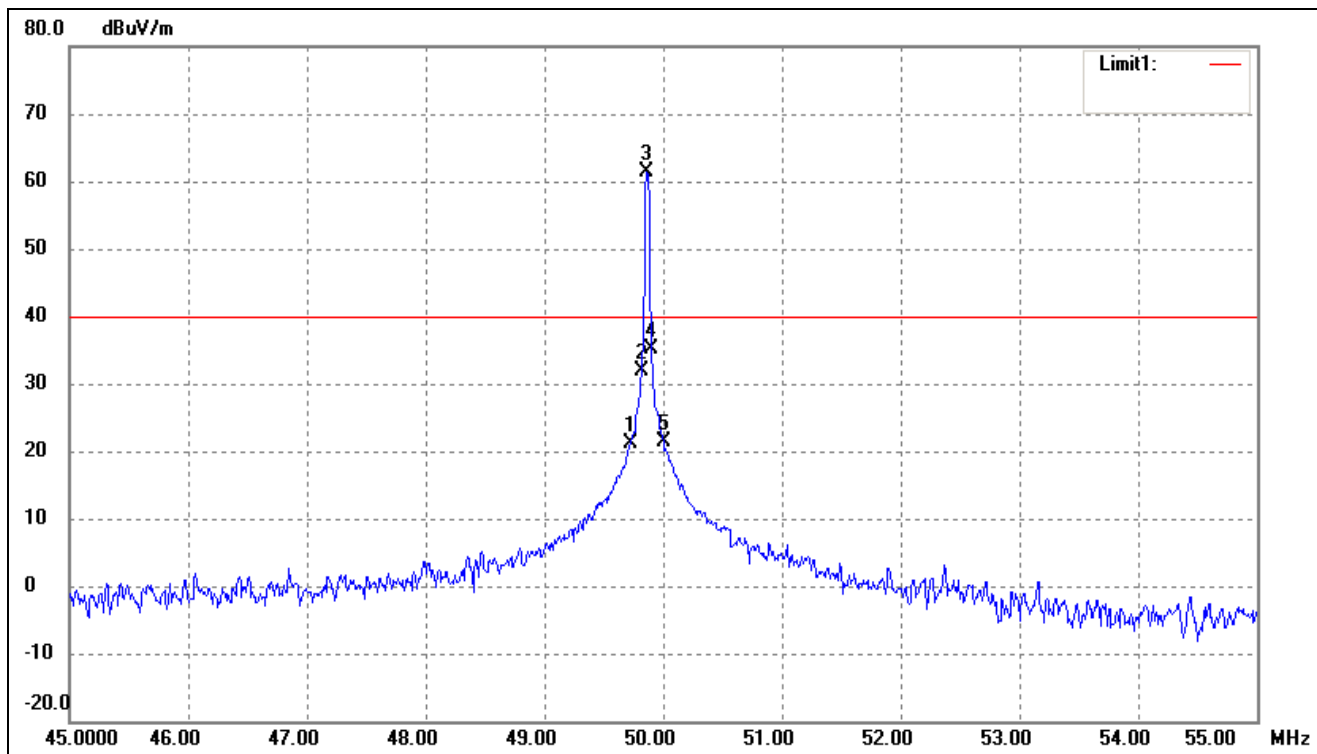

No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor(dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (°)	Height (cm)	Remark
1	49.7200	14.70	6.34	21.04	40.00	-18.96	249	100	Peak
2	49.8200	25.58	6.31	31.89	/	/	24	100	Peak
3	49.8600	54.97	6.30	61.27	/	/	123	100	Peak
4	49.9000	28.81	6.29	35.10	/	/	102	100	Peak
5	50.0000	15.00	6.26	21.26	40.00	-18.74	25	100	Peak

Note: Emissions attenuated more than 20 dB below the permissible value are not reported.

***** END OF REPORT *****