





Gakkiku Technology Company
 Flat B, 5/F., Selwyn Factory Building,
 No. 404 Kwun Tong Road,
 Kwun Tong, Kowloon,
 Hong Kong
 Tel: (852) 8113 2281
 Fax: (852) 2797 0192
 Email: info@gakkiku.com

Test Report

| | |
|---------------------------------------|---|
| Applicant | Scientific Toys Ltd. |
| Address | Rm. 1108, 11/F., Block B, New Mandarin Plaza, 14 Science Museum Road, TST East, Kowloon, Hong Kong |
| FCC ID Number | FCC ID: BY33564-49PP |
| Brand Name(s) | None |
| Model Number(s)/Item Number(s) | 99086, 3564 |
| Product Description | 49.82-49.90 MHz Wireless Remote Control Toy - TX |
| Operating Frequency | 49.860 MHz |
| Rules/Standards | Part 15.235 of the FCC Rules, RSS-310 Issue 3 and RSS-Gen Issue 3 of the Industry Canada |
| Received Date | 8th April, 2013 |
| Tested Date | 10th April, 2013 |
| Approved by | Dick Chan (Director of Gakkiku) |
| Tested by |  Lahm Peng (Engineer of SEM.Test) |
| Signed by |  Jandy So (Manager of SEM.Test) |
| Report Number | GKK201304080C |
| Test Results | <input checked="" type="checkbox"/> PASSED <input type="checkbox"/> FAILED |

GENERAL

The report is written by Gakkiku Technology Company. The tested device complies with the general approval requirements of the FCC Rules and the Industry Canada as identified in this test report.

TEST LOCATION

The tested device was tested at the test site of the SEM.Test Compliance Service Co., Ltd., 3/F, Jinbao Commerce Building, Xin'an Fanshen Road, Bao'an District, Shenzhen, 518101, Guangdong, China. The FCC Recognized 2.948 Listed Test Firm Registration Number is 994117. The Industry Canada IC OATS Filing Number/Assigned Code is 7673A.

TABLE OF CONTENTS

1. GENERAL INFORMATION 4

1.1 PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT) 4

1.2 TEST STANDARDS 4

1.3 RELATED SUBMITTAL(S)/GRANT(S) 4

1.4 TEST METHODOLOGY5

1.5 EUT EXERCISE SOFTWARE5

1.6 ACCESSORIES EQUIPMENT LIST AND DETAILS5

1.7 EUT CABLE LIST AND DETAILS5

2. SUMMARY OF TEST RESULTS..... 6

3. PART 15.203 & RSS-GEN ISSUE 3 §7.1.2 - ANTENNA REQUIREMENT 7

3.1 STANDARD APPLICABLE7

3.2 TEST RESULT7

4. PART 15.235, 15.209, 15.205 & RSS-310 ISSUE 3 §3.8 - RADIATED EMISSION 8

4.1 MEASUREMENT UNCERTAINTY 8

4.2 STANDARD APPLICABLE..... 8

4.3 TEST EQUIPMENT LIST AND DETAILS 8

4.4 TEST PROCEDURE 9

4.5 CORRECTED AMPLITUDE & MARGIN CALCULATION 9

4.6 ENVIRONMENTAL CONDITIONS..... 9

4.7 SUMMARY OF TEST RESULTS/PLOTS10

5. PART 15.235(B) & RSS-310 ISSUE 3 §2.4 - OUT OF BAND EMISSIONS 12

5.1 STANDARD APPLICABLE12

5.2 TEST EQUIPMENT LIST AND DETAILS12

5.3 TEST PROCEDURE12

5.4 ENVIRONMENTAL CONDITIONS.....12

5.5 SUMMARY OF TEST RESULTS/PLOTS13

1. GENERAL INFORMATION

1.1 Product Description for Equipment Under Test (EUT)

Client Information

Applicant: Scientific Toys Ltd.
 Address of applicant: Rm. 1108, 11/F., Block B, New Mandarin Plaza,
 14 Science Museum Road, TST East, Kowloon, Hong Kong

Manufacturer: Scientific Toys Ltd.
 Address of manufacturer: Rm. 1108, 11/F., Block B, New Mandarin Plaza,
 14 Science Museum Road, TST East, Kowloon, Hong Kong

General Description of EUT

| Item | Description |
|---|--|
| Product Description: | 49.82-49.90 MHz Wireless Remote Control Toy - TX |
| Brand Name(s): | None |
| Model Number(s)/Item Number(s): | 99086, 3564 |
| Rated Voltage: | DC 9V Battery |
| Frequency Range: | 49.860 MHz |
| Antenna Type: | Fixed Antenna |
| For more information refer to the circuit diagram form and the user's manual. | |

The test data is gathered from a production sample, provided by the manufacturer.

1.2 Test Standards

The following report is prepared on behalf of the Scientific Toys Ltd. in accordance with Part 15 Subpart C, Part 15.235, 15.209, 15.205 & 15.203 of the FCC Rules and RSS-310 Issue 3 & RSS-Gen Issue 3 of the Industry Canada: Spectrum Management Telecommunications Radio Standards Specification, Low-power Licence-exempt Radiocommunication Devices (All Frequency Bands): Category II Equipment sets out standard requirements for Low-power Licence-exempt Radiocommunication Devices that are certification exempt.

The objective is to determine compliance with Part 15 Subpart C, Part 15.235, 15.209, 15.205 & 15.203 of the FCC Rules and RSS-310 Issue 3 & RSS-Gen Issue 3 of the Industry Canada.

Maintenance of compliance is the responsibility of the manufacturer. Any modification of the product, which results in lowering the emission/immunity, should be checked to ensure compliance has been maintained.

1.3 Related Submittal(s)/Grant(s)

No Related Submittal(s).

1.4 Test Methodology

All measurements contained in this report were conducted with ANSI Standard C63.4-2009, American National Standard Institute for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the range of 9 kHz to 40 GHz.

The equipment under test (EUT) was configured to measure its highest possible emission level. The test modes were adapted accordingly in reference to the Operating Instructions.

1.5 EUT Exercise Software

The EUT exercise program used during the testing was designed to exercise the system components. The test software is started while the whole system is on.

1.6 Accessories Equipment List and Details

| Description | Manufacturer | Model | Serial Number |
|-------------|--------------|-------|---------------|
| / | / | / | / |

1.7 EUT Cable List and Details

| Cable Description | Length (M) | Shielded/ Unshielded | With Core/ Without Core |
|-------------------|------------|-------------------------|----------------------------|
| / | / | / | / |

2. SUMMARY OF TEST RESULTS

| FCC RULES INDUSTRY CANADA | DESCRIPTION OF TEST | RESULT |
|---|------------------------------|-----------|
| Part 15.203, RSS-Gen Issue 3 §7.1.2 | Antenna Requirement | Compliant |
| Part 15.205, RSS-310 Issue 3 §2.4 & RSS-Gen Issue 3 §7.2.2 Table 3 | Restricted Band of Operation | Compliant |
| Part 15.209, RSS-310 Issue 3 §3.8 & RSS-Gen Issue 3 §7.2.5 Table 5 | Radiated Emission Limit | Compliant |
| Part 15.235(a) RSS-310 Issue 3 §3.8 & RSS-Gen Issue 3 §7.2.5 Table 5 | Field Strength | Compliant |
| Part 15.235(b) RSS-310 Issue 3 §2.4 & RSS-Gen Issue 3 §7.2.2 Table 3 | Out of Band Emission | Compliant |

3. Part 15.203 & RSS-Gen Issue 3 §7.1.2 - ANTENNA REQUIREMENT

3.1 Standard Applicable

According to Part 15.203 and RSS-Gen Issue 3 §7.1.2, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.

3.2 Test Result

This product has a fixed antenna, fulfill the requirement of this section.

4. Part 15.235, 15.209, 15.205 & RSS-310 Issue 3 §3.8 - RADIATED EMISSION

4.1 Measurement Uncertainty

Based on NIS 81, the Treatment of Uncertainty in EMC Measurements, the best estimate of the uncertainty of a radiation emissions measurement is ± 5.10 dB.

4.2 Standard Applicable

According to Part 15.235(a) of the FCC Rules, the field strength of any emission within this band shall not exceed 10,000 microvolts/meter at 3 meters. The emission limit in this paragraph is based on measurement instrumentation employing an average detector. The provisions in Part 15.35 of the FCC Rules for limiting peak emissions apply.

According to RSS-310 Issue 3 §3.8 of the Industry Canada, the field strength shall not exceed 10 millivolts/m measured at 3 meters (equivalent with an averaging or a CISPR quasi-peak detector (equivalent to 30 μ W e.i.r.p.)).

According to Part 15.235(b) of the FCC Rules, the field strength of any emissions appearing between the band edges and up to 10 kHz above and below the band edges shall be attenuated at least 26 dB below the level of the unmodulated carrier or to the general limits in Part 15.209 of the FCC Rules, whichever permits the higher emission levels. The field strength of any emissions removed by more than 10 kHz from the band edges shall not exceed the general radiated emission limits in Part 15.209 of the FCC Rules. All signals exceeding 20 microvolts/meter at 3 meters shall be reported in the application for certification.

According to RSS-310 Issue 3 §3.8 of the Industry Canada, the field strength of any emissions which appear outside of this band shall apply the limits of RSS-Gen Issue 3 §7.2.2 Table 3.

4.3 Test Equipment List and Details

| Description | Manufacturer | Model | Serial Number | Cal. Date | Due. Date |
|--------------------------|----------------------|--------------|----------------------|------------------|------------------|
| Spectrum Analyzer | R&S | FSP | 836079/035 | 2013-03-28 | 2014-03-27 |
| EMI Test Receiver | R&S | ESVB | 825471/005 | 2013-03-28 | 2014-03-27 |
| Positioning Controller | C&C | CC-C-1F | N/A | 2013-03-28 | 2014-03-27 |
| RF Switch | EM | EMSW18 | SW060023 | 2013-03-28 | 2014-03-27 |
| Pre-amplifier | Agilent | 8447F | 3113A06717 | 2013-03-28 | 2014-03-27 |
| Pre-amplifier | Compliance Direction | PAP-0118 | 24002 | 2013-03-28 | 2014-03-27 |
| Trilog Broadband Antenna | SCHWARZBECK | VULB9163 | 9163-333 | 2013-02-25 | 2014-02-24 |
| Horn Antenna | ETS | 3117 | 00086197 | 2013-02-25 | 2014-02-24 |
| Loop Antenna | SCHWARZECK | HFRA 5165 | 9365 | 2013-02-25 | 2014-02-24 |


Statement of Traceability: All calibrations have been performed per the NVLAP requirements traceable to the NIST.

4.4 Test Procedure

The setup of EUT is according with per ANSI Standard C63.4-2009 measurement procedure. The specification used was with the limits of Part 15.235(a), 15.209 & 15.205 of the FCC Rules and RSS-310 Issue 3 §3.8 of the Industry Canada.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle.

The spacing between the peripherals was 10 cm.

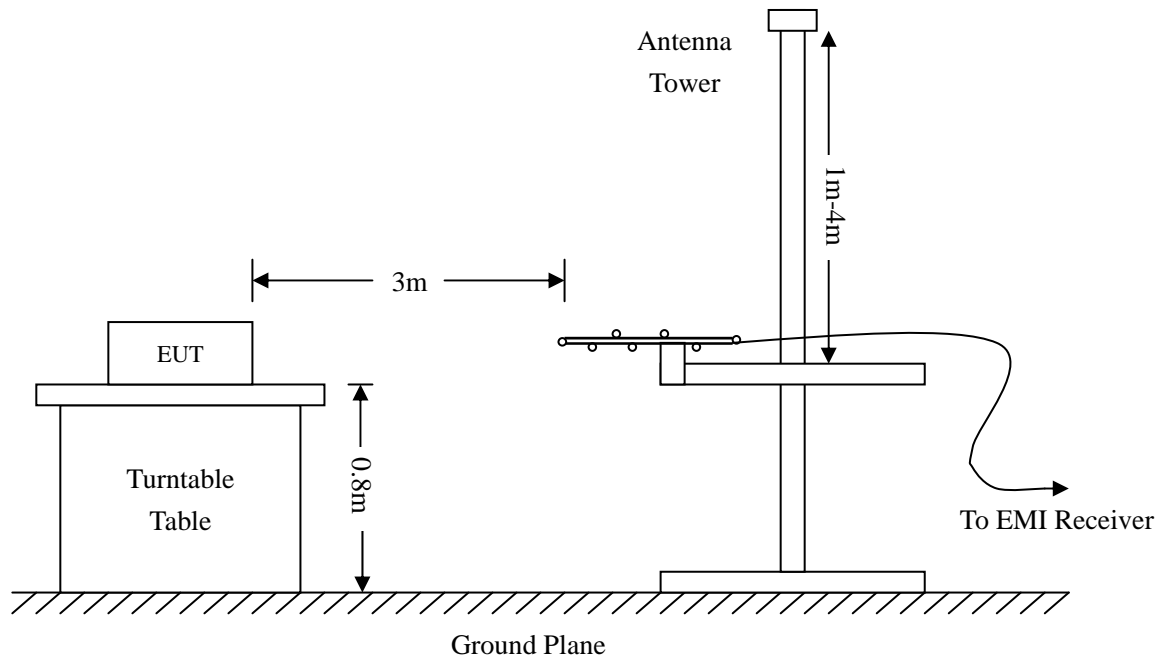

4.5 Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and the Cable Factor, and subtracting the Amplifier Gain from the Amplitude reading. The basic equation is as follows:

$$\text{Corr. Ampl.} = \text{Indicated Reading} - \text{Corr. Factor}$$

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of -6dB μ V means the emission is 6dB μ V below the maximum limit for Part 15. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Corr. Ampl.} - \text{Limit of Part 15 (RSS-310 Issue 3)}$$

4.6 Environmental Conditions

| | |
|--------------------|-----------|
| Temperature: | 26° C |
| Relative Humidity: | 52% |
| ATM Pressure: | 1012 mbar |

4.7 Summary of Test Results/Plots

According to the data below, the standards of Part 15.235, 15.209 & 15.205 of the FCC Rules and RSS-310 Issue 3 of the Industry Canada, and had the worst margin of:


-2.46 dB μ V at 99.5281 MHz in the Vertical polarization, 9 kHz to 1 GHz, 3 Meters

Note: This EUT was tested in 3 orthogonal positions and the worst case position data was reported.

Test Mode: Transmitting


Plot of Radiation Emissions Test

Horizontal:

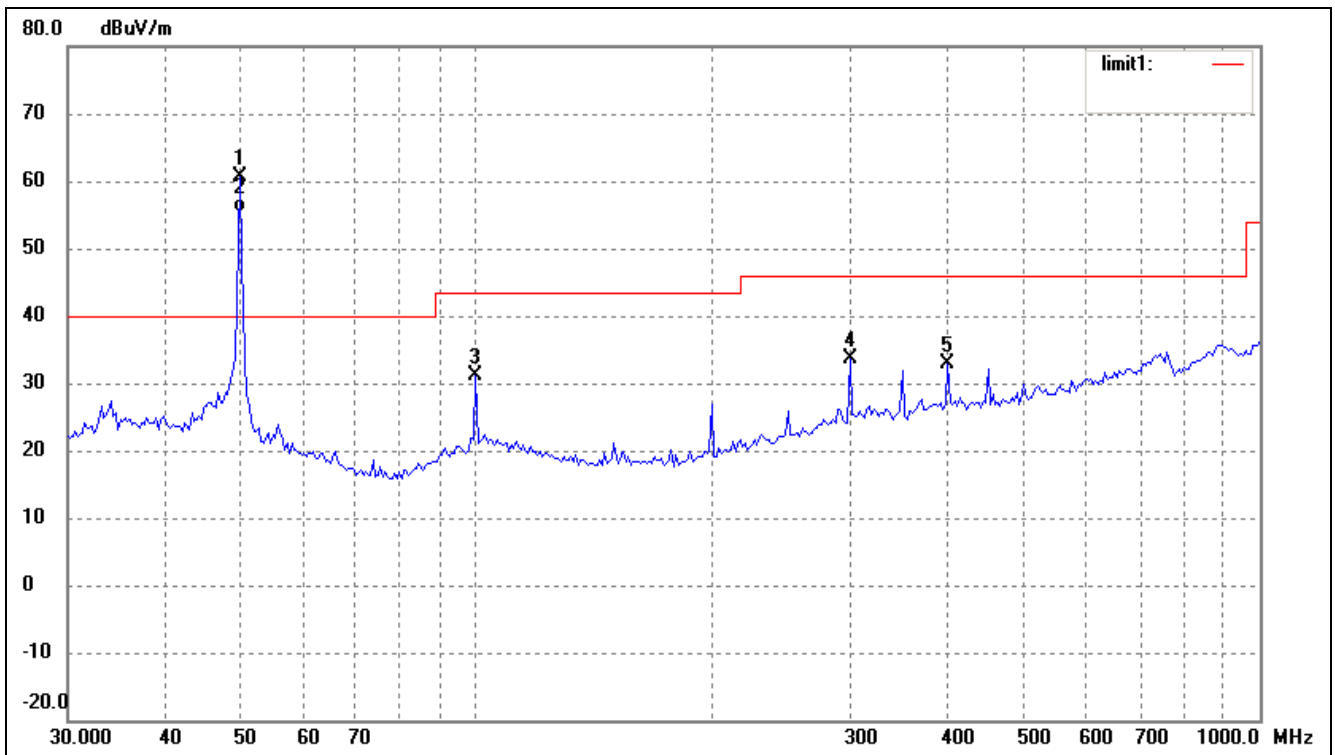

| No. | Frequency (MHz) | Reading (dBuV/m) | Correct (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Degree (°) | Height (cm) | Remark |
|-----|-----------------|------------------|----------------|-----------------|----------------|-------------|------------|-------------|---------|
| 1 | 49.8600 | 53.92 | 6.70 | 60.62 | 100.00 | -39.38 | 360 | 100 | Peak |
| 2 | 49.8600 | 48.70 | 6.70 | 55.40 | 80.00 | -24.60 | 360 | 100 | Average |
| 3 | 99.5281 | 24.32 | 6.72 | 31.04 | 43.50 | -12.46 | 265 | 100 | Peak |
| 4 | 299.3158 | 23.41 | 10.15 | 33.56 | 46.00 | -12.44 | 24 | 100 | Peak |
| 5 | 399.0302 | 21.37 | 11.50 | 32.87 | 46.00 | -13.13 | 44 | 100 | Peak |

Vertical:

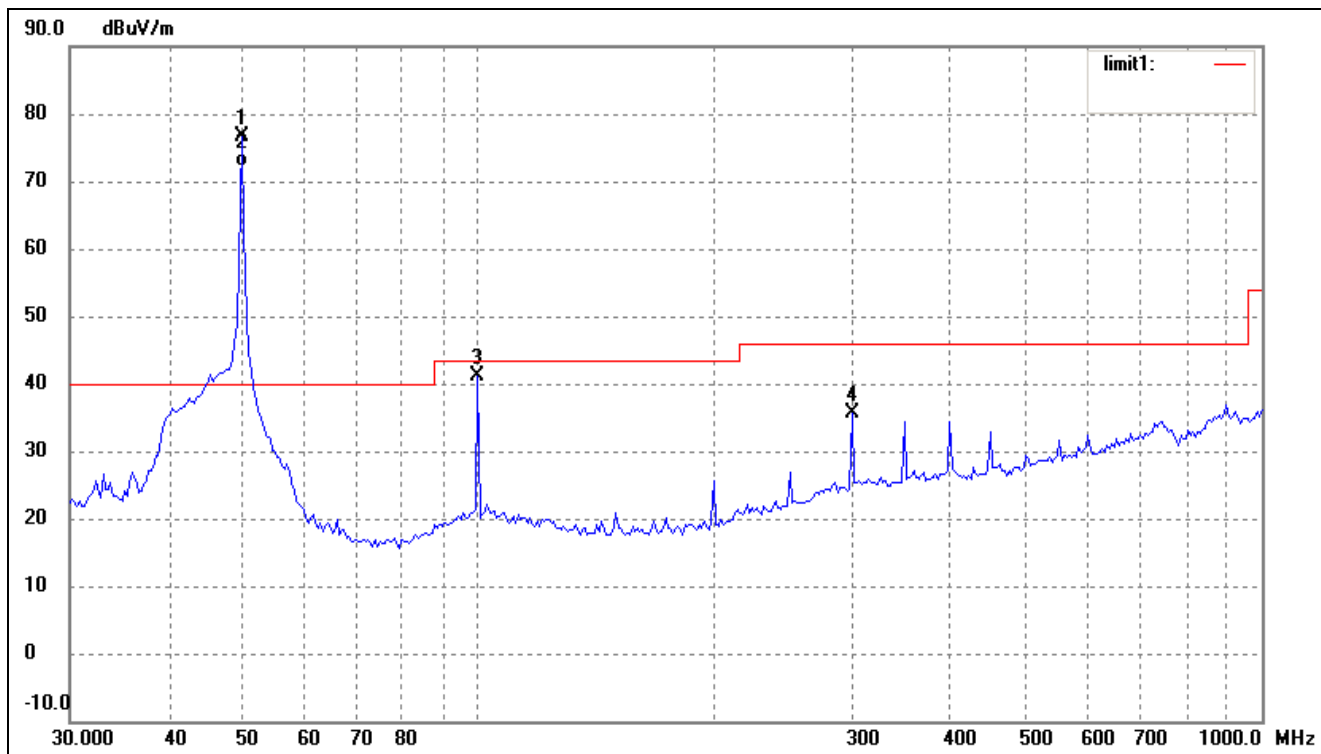

| No. | Frequency (MHz) | Reading (dBuV/m) | Correct (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Degree (°) | Height (cm) | Remark |
|-----|-----------------|------------------|----------------|-----------------|----------------|-------------|------------|-------------|---------|
| 1 | 49.8600 | 70.05 | 6.70 | 76.75 | 100.00 | -23.25 | 236 | 100 | Peak |
| 2 | 49.8600 | 65.40 | 6.70 | 72.10 | 80.00 | -7.90 | 236 | 100 | Average |
| 3 | 99.5281 | 34.32 | 6.72 | 41.04 | 43.50 | -2.46 | 114 | 100 | Peak |
| 4 | 299.3158 | 25.56 | 10.15 | 35.71 | 46.00 | -10.29 | 75 | 100 | Peak |

Note: Emissions attenuated more than 20 dB below the permissible value are not reported.

5. Part 15.235(b) & RSS-310 Issue 3 §2.4 - OUT OF BAND EMISSIONS

5.1 Standard Applicable

According to Part 15.235(b) of the FCC Rules and RSS-310 Issue 3 §2.4 of the Industry Canada, the field strength of any emissions appearing between the band edges and up to 10 kHz above and below the band edges shall be attenuated at least 26 dB below the level of the unmodulated carrier or to the general limits in Part 15.209 of the FCC Rules, whichever permits the higher emission levels. The field strength of any emissions removed by more than 10 kHz from the band edges shall not exceed the general radiated emission limits in Part 15.209 of the FCC Rules. All signals exceeding 20 microvolts/meter at 3 meters shall be reported in the application for certification.

5.2 Test Equipment List and Details

| Description | Manufacturer | Model | Serial Number | Cal. Date | Due. Date |
|--------------------------|----------------------|--------------|----------------------|------------------|------------------|
| Spectrum Analyzer | R&S | FSP | 836079/035 | 2013-03-28 | 2014-03-27 |
| EMI Test Receiver | R&S | ESVB | 825471/005 | 2013-03-28 | 2014-03-27 |
| Positioning Controller | C&C | CC-C-1F | N/A | 2013-03-28 | 2014-03-27 |
| RF Switch | EM | EMSW18 | SW060023 | 2013-03-28 | 2014-03-27 |
| Pre-amplifier | Agilent | 8447F | 3113A06717 | 2013-03-28 | 2014-03-27 |
| Pre-amplifier | Compliance Direction | PAP-0118 | 24002 | 2013-03-28 | 2014-03-27 |
| Trilog Broadband Antenna | SCHWARZBECK | VULB9163 | 9163-333 | 2013-02-25 | 2014-02-24 |
| Horn Antenna | ETS | 3117 | 00086197 | 2013-02-25 | 2014-02-24 |
| Loop Antenna | SCHWARZECK | HFRA 5165 | 9365 | 2013-02-25 | 2014-02-24 |

Statement of Traceability: All calibrations have been performed per the NVLAP requirements traceable to the NIST.

5.3 Test Procedure

As the radiation test, set the RBW=1kHz VBW=3kHz, observed the outside band of 49.82MHz to 49.90MHz, than mark the higher-level emission for comparing with the FCC Rules.

5.4 Environmental Conditions

| | |
|--------------------|-----------|
| Temperature: | 26° C |
| Relative Humidity: | 52% |
| ATM Pressure: | 1022 mbar |


5.5 Summary of Test Results/Plots

| Frequency MHz | Emission dB μ V/m | Limit |
|------------------|--------------------------|-----------------|
| 49.7200 | -1.78 | 40 dB μ V/m |
| 49.8200 | 42.73 | >26dB |
| 49.8600 | 73.70 | >26dB |
| 49.9000 | 43.76 | >26dB |
| 50.0000 | -2.52 | 40 dB μ V/m |

Test Result: Passed


Refer to the attached plots.

Horizontal:

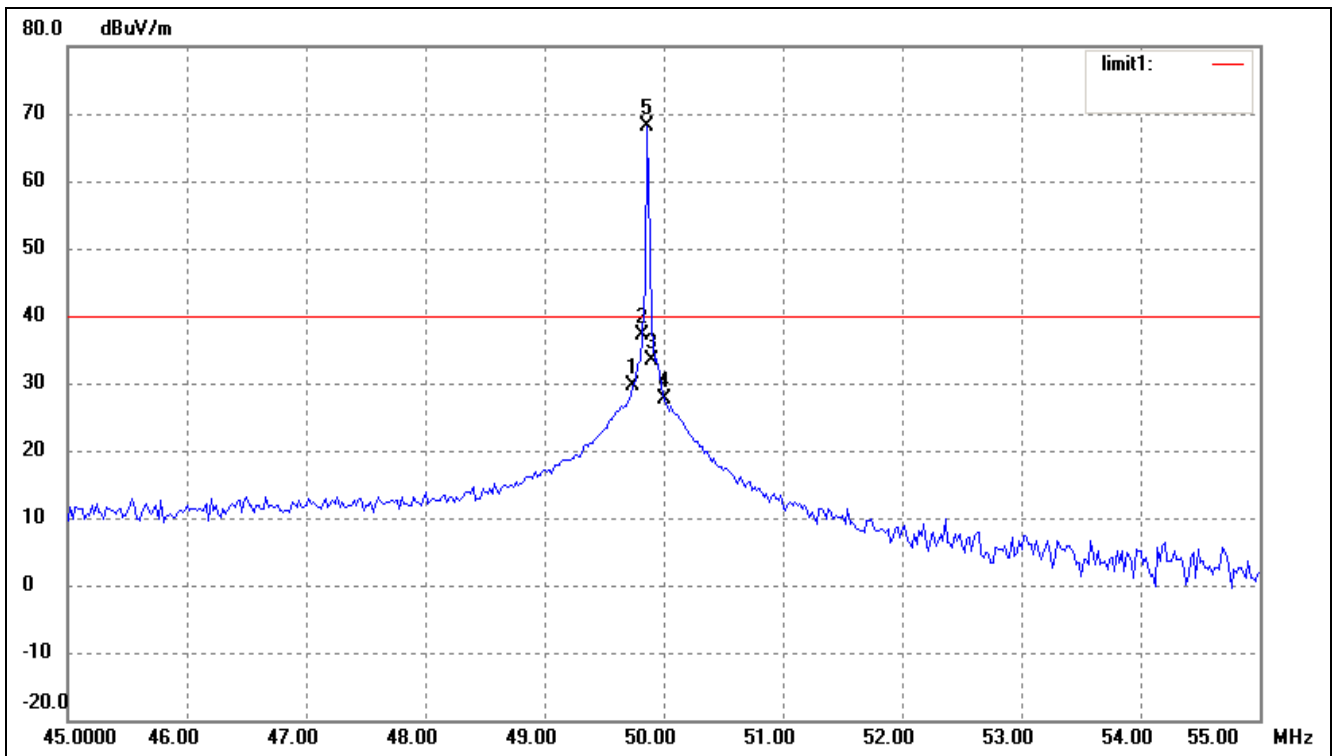

| No. | Frequency (MHz) | Reading (dBuV/m) | Correct Factor(dB) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Degree (°) | Height (cm) | Remark |
|-----|--------------------|---------------------|-----------------------|--------------------|-------------------|----------------|-----------------|----------------|--------|
| 1 | 49.7200 | 22.95 | 6.69 | 29.64 | 40.00 | -10.36 | 246 | 100 | Peak |
| 2 | 49.8200 | 30.57 | 6.66 | 37.23 | / | / | 24 | 100 | Peak |
| 3 | 49.9000 | 26.80 | 6.64 | 33.44 | / | / | 216 | 100 | Peak |
| 4 | 50.0000 | 21.12 | 6.61 | 27.73 | 40.00 | -12.27 | 31 | 100 | Peak |
| 5 | 49.8600 | 61.55 | 6.65 | 68.20 | / | / | 105 | 100 | Peak |

Vertical:

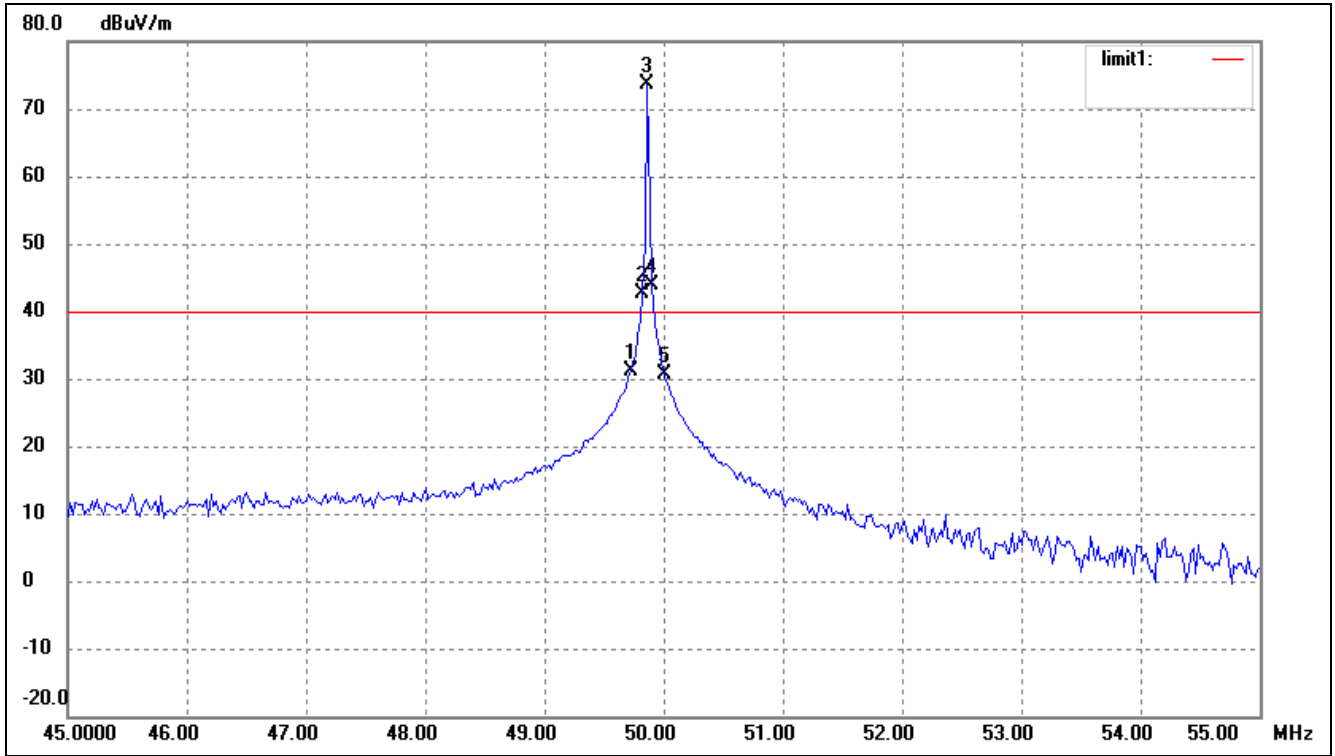

| No. | Frequency (MHz) | Reading (dBuV/m) | Correct Factor(dB) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Degree (°) | Height (cm) | Remark |
|-----|-----------------|------------------|--------------------|-----------------|----------------|-------------|------------|-------------|--------|
| 1 | 49.7200 | 24.43 | 6.69 | 31.12 | 40.00 | -8.88 | 145 | 100 | Peak |
| 2 | 49.8200 | 36.07 | 6.66 | 42.73 | / | / | 72 | 100 | Peak |
| 3 | 49.8600 | 67.05 | 6.65 | 73.70 | / | / | 25 | 100 | Peak |
| 4 | 49.9000 | 37.12 | 6.64 | 43.76 | / | / | 310 | 100 | Peak |
| 5 | 50.0000 | 24.12 | 6.61 | 30.73 | 40.00 | -9.27 | 251 | 100 | Peak |

***** END OF REPORT *****