



<b>Prüfbericht-Nr.:</b> <i>Test report no.:</i>	CN22F021 (P15C-BT) 001	<b>Auftrags-Nr.:</b> <i>Order no.:</i>	238545917	Seite 1 von 29 Page 1 of 29
<b>Kunden-Referenz-Nr.:</b> <i>Client reference no.:</i>	N/A	<b>Auftragsdatum:</b> <i>Order date:</i>	2022-07-06	
<b>Auftraggeber:</b> <i>Client:</i>	Trans Electric Co., Ltd. 771, sec 2, chungshan road, huatan, changhwa, taiwan			
<b>Prüfgegenstand:</b> <i>Test item:</i>	Bluetooth Wireless Transmitter & Receiver			
<b>Bezeichnung / Typ-Nr.:</b> <i>Identification / Type no.:</i>	NS-HPBTAA23, BRX-5200A			
<b>Auftrags-Inhalt:</b> <i>Order content:</i>	FCC Part 15C Test report (BT)			
<b>Prüfgrundlage:</b> <i>Test specification:</i>	FCC 47CFR Part 15: Subpart C Section 15.247			
<b>Wareneingangsdatum:</b> <i>Date of sample receipt:</i>	2022-08-02			
<b>Prüfmuster-Nr.:</b> <i>Test sample no.:</i>	A003311854-012 A003311854-011			
<b>Prüfzeitraum:</b> <i>Testing period:</i>	2022-08-05 - 2022-08-18			
<b>Ort der Prüfung:</b> <i>Place of testing:</i>	EMC/RF Taipei Testing Site			
<b>Prüflaboratorium:</b> <i>Testing laboratory:</i>	Taipei Testing Laboratories			
<b>Prüfergebnis*:</b> <i>Test result*:</i>	Pass			
<b>überprüft von:</b> <i>compiled by:</i>	 Ethan Shao	<b>genehmigt von:</b> <i>authorized by:</i>	 Brenda Chen	
<b>Datum:</b> <i>Date:</i>	2022-08-31	<b>Ausstellungsdatum:</b> <i>Issue date:</i>	2022-08-31	
<b>Stellung / Position:</b>	Assistant Project Engineer	<b>Stellung / Position:</b>	Senior Project Manager	
<b>Sonstiges / Other:</b>				
<b>Zustand des Prüfgegenstandes bei Anlieferung:</b> <i>Condition of the test item at delivery:</i>	Prüfmuster vollständig und unbeschädigt <i>Test item complete and undamaged</i>			
* Legende:	1 = sehr gut P(ass) = entspricht o.g. Prüfgrundlage(n)	2 = gut F(ail) = entspricht nicht o.g. Prüfgrundlage(n)	3 = befriedigend N/A = nicht anwendbar	4 = ausreichend N/T = nicht getestet
* Legend:	1 = very good P(ass) = passed a.m. test specification(s)	2 = good F(ail) = failed a.m. test specification(s)	3 = satisfactory N/A = not applicable	4 = sufficient N/T = not tested
<p><b>Dieser Prüfbericht bezieht sich nur auf das o.g. Prüfmuster und darf ohne Genehmigung der Prüfstelle nicht auszugsweise vervielfältigt werden. Dieser Bericht berechtigt nicht zur Verwendung eines Prüfzeichens.</b>  <i>This test report only relates to the a. m. test sample. Without permission of the test center this test report is not permitted to be duplicated in extracts. This test report does not entitle to carry any test mark.</i></p>				

## TEST SUMMARY

Report Section	FCC Clause	Test Item	Result
5.1.1	15.247(b) & 15.203	Antenna Requirement	Pass
5.1.2	15.247(b)(1)	Peak Output Power	Pass
5.1.3	15.247(a)(1)	20 dB Bandwidth	Pass
5.1.3	2.1049	99% Occupied Bandwidth	Pass
5.1.4	15.247(d)	Conducted Spurious Emission and Band Edges	Pass
5.1.5	15.247(d) & 15.205 & 15.209	Radiated Spurious Emissions and Band Edges	Pass
5.1.6	15.247(a)(1)	Hopping Channel Separation	Pass
5.1.7	15.247(a)(1) (iii)	Number of Hopping Frequency Used	Pass
5.1.8	15.247(a)(1) (iii)	Dwell Time on Each Channel	Pass
5.2.1	15.207	Mains Conducted Emission	Pass

**Note:**

1. If the Frequency Hopping Systems operating in 2400-2483.5 MHz band and the output power less than 125 mW. The hopping channel carrier frequencies separated by a minimum of 25 kHz or two-thirds of the 20 dB bandwidth of hopping channel whichever is greater.
2. Determining compliance based on the results of the compliance measurement, not taking into account measurement instrumentation uncertainty.

## Contents

<b>HISTORY OF THIS TEST REPORT .....</b>	<b>5</b>
<b>1. GENERAL REMARKS .....</b>	<b>6</b>
<b>1.1 COMPLEMENTARY MATERIALS.....</b>	<b>6</b>
<b>1.2 DECISION RULE OF CONFORMITY .....</b>	<b>6</b>
<b>2. TEST SITES .....</b>	<b>7</b>
<b>2.1 TEST LABORATORY .....</b>	<b>7</b>
<b>2.2 TEST FACILITY.....</b>	<b>7</b>
<b>2.3 TRACEABILITY .....</b>	<b>8</b>
<b>2.4 CALIBRATION .....</b>	<b>8</b>
<b>2.5 MEASUREMENT UNCERTAINTY .....</b>	<b>8</b>
<b>3. GENERAL PRODUCT INFORMATION.....</b>	<b>9</b>
<b>3.1 PRODUCT FUNCTION AND INTENDED USE .....</b>	<b>9</b>
<b>3.2 SYSTEM DETAILS AND RATINGS.....</b>	<b>9</b>
<b>3.3 NOISE GENERATING AND NOISE SUPPRESSING PARTS .....</b>	<b>10</b>
<b>3.4 SUBMITTED DOCUMENTS.....</b>	<b>10</b>
<b>4. TEST SET-UP AND OPERATION MODES.....</b>	<b>11</b>
<b>4.1 PRINCIPLE OF CONFIGURATION SELECTION .....</b>	<b>11</b>
<b>4.2 CARRIER FREQUENCY AND CHANNEL.....</b>	<b>11</b>
<b>4.3 TEST OPERATION AND TEST SOFTWARE.....</b>	<b>12</b>
<b>4.4 SPECIAL ACCESSORIES AND AUXILIARY EQUIPMENT .....</b>	<b>13</b>
<b>4.5 TEST SETUP DIAGRAM .....</b>	<b>14</b>
<b>5. TEST RESULTS .....</b>	<b>15</b>
<b>5.1 TRANSMITTER REQUIREMENT &amp; TEST SUITES .....</b>	<b>15</b>
5.1.1 <i>Antenna Requirement .....</i>	<i>15</i>
5.1.2 <i>Peak Output Power .....</i>	<i>16</i>
5.1.3 <i>20 dB Bandwidth and 99% Occupied Bandwidth.....</i>	<i>18</i>
5.1.4 <i>Conducted Spurious Emissions and Frequency Band Edges Measured in 100kHz Bandwidth.....</i>	<i>19</i>
5.1.5 <i>Radiated Spurious Emissions and Band Edges .....</i>	<i>20</i>
5.1.6 <i>Hopping Channel Separation .....</i>	<i>25</i>
5.1.7 <i>Number of Hopping Frequency.....</i>	<i>26</i>
5.1.8 <i>Dwell Time.....</i>	<i>27</i>
<b>5.2 MAINS EMISSION .....</b>	<b>28</b>
5.2.1 <i>Mains Conducted Emission.....</i>	<i>28</i>

**Prüfbericht - Nr.: CN22F021 (P15C-BT) 001**  
Test Report No.

**Seite 4 von 29**  
Page 4 of 29

**APPENDIX A - TEST RESULT OF CONDUCTED**

**APPENDIX B - TEST RESULT OF RADIATED EMISSIONS & MAINS CONDUCTED EMISSION**

**APPENDIX SP - PHOTOGRAPHS TEST SETUP**

**APPENDIX EP - PHOTOGRAPHS OF EUT**

**Prüfbericht - Nr.: CN22F021 (P15C-BT) 001**  
Test Report No.

**Seite 5 von 29**  
Page 5 of 29

### HISTORY OF THIS TEST REPORT

Report No.	Description	Date Issued
CN22F021 (P15C-BT) 001	Original Release	2022-08-31

## 1. General Remarks

### 1.1 Complementary Materials

All attachments are integral parts of this test report. This applies especially to the following appendix:

**Appendix A - Test Result of Conducted**

**Appendix B - Test Result of Radiated Emissions & Mains Conducted Emission**

**Appendix SP - Photographs Test Setup**

**Appendix EP - Photographs of EUT**

### Applied Standard and Test Levels

Radio
FCC 47CFR Part 15: Subpart C Section 15.247
FCC 47CFR Part 2: Subpart J Section 2.1049
ANSI C63.10:2013
KDB 558074 D01 15.247 Meas Guidance v05r02

### 1.2 Decision Rule of Conformity

The decision rule of conformity of this test report is following the requirements of the requested standard in the quotation, and agreed among testing laboratory and manufacturer (applicant) to exclude the consideration of Measurement Uncertainty, unless it is required by the specific standard.

## 2. Test Sites

### 2.1 Test Laboratory

Taipei Testing Laboratories

11F. No.758, Sec. 4, Bade Rd., Songshan Dist.  
Taipei City 105  
Taiwan (R.O.C.)

### 2.2 Test Facility

Taipei Testing Laboratories

No.458-18, Sec. 2, Fenliao Rd., Linkou Dist.,  
New Taipei City 244  
Taiwan (R.O.C.)  
FCC Registration No.: 226631  
ISED Registration No.: 25563

## 2.3 Traceability

All measurement equipment calibrations are traceable to NML(Taiwan)/NIST(USA) or where calibration is performed outside Taiwan, to equivalent nationally recognized standards organizations.

## 2.4 Calibration

Equipment requiring calibration is calibrated periodically in a suitably accredited Calibration Lab. Additionally all equipment is verified for proper performance on a regular basis using in house standards or comparisons.

## 2.5 Measurement Uncertainty

All measurement uncertainty values are shown with a coverage factor of  $k=2$  to indicate a 95% level of confidence.

### Emission Measurement Uncertainty

Parameter	Uncertainty
Radiated Emission (9 kHz ~ 30 MHz)	$\pm 1.15$ dB
Radiated Emission (30 MHz ~ 200 MHz)	$\pm 1.30$ dB
Radiated Emission (200 MHz ~ 1 GHz)	$\pm 1.30$ dB
Radiated Emission (1 GHz ~ 18 GHz)	$\pm 1.54$ dB
Radiated Emission (18 GHz ~ 40 GHz)	$\pm 2.52$ dB
Mains Conducted Emission	$\pm 1.65$ dB



### 3. General Product Information

#### 3.1 Product Function and Intended Use

The EUT is a Bluetooth Wireless Transmitter & Receiver. It contains a Bluetooth compatible module enabling the user to communicate data through a Wireless interface.

For details refer to the User Guide, Data Sheet and Circuit Diagram.

#### 3.2 System Details and Ratings

##### Basic Information of EUT

Item	EUT information
Kind of Equipment/Test Item	Bluetooth Wireless Transmitter & Receiver
Type Identification	NS-HPBTAA23, BRX-5200A
FCC ID	BY4BRX5200A

##### Technical Specification of EUT

Item	EUT information
Operating Frequency	2402 MHz ~ 2480 MHz
Channel Number	79
Operation Voltage	5 Vdc
Modulation	GFSK, $\pi/4$ -DQPSK, 8DPSK
Maximum Output Power (mW)	2.786
Antenna Information	Refer to 5.1.1
Accessory Device	Refer to 4.4

Note:

- All models are listed as below.

Model	Type Identification	Difference
Main	NS-HPBTAA23	All models are electrically identical, different model names are for marketing purpose.
Series	BRX-5200A	

### **3.3 Noise Generating and Noise Suppressing Parts**

Refer to the Circuit Diagram.

### **3.4 Submitted Documents**

- Circuit Diagram
- Instruction Manual
- Rating Label
- Technical Description

## 4. Test Set-up and Operation Modes

### 4.1 Principle of Configuration Selection

The test modes were adapted accordingly in reference to the instructions for use.

During testing, Channel and Power Controlling Software provided by the customer was used to control the operating channel as well as the output power level. The RF output power selection is for the setting of RF output expected by the customer and is going to be fixed on the firmware of the final end product.

**Table for Parameters of Test Software Setting**

Frequency (MHz)	Power Setting		
	GFSK	$\pi/4$ -DQPSK	8DPSK
2402	4	4	4
2441	4	4	4
2480	4	4	4

### 4.2 Carrier Frequency and Channel

Channel	Freq. (MHz)	Channel	Freq. (MHz)	Channel	Freq. (MHz)	Channel	Freq. (MHz)
0	2402	20	2422	40	2442	60	2462
1	2403	21	2423	41	2443	61	2463
2	2404	22	2424	42	2444	62	2464
3	2405	23	2425	43	2445	63	2465
4	2406	24	2426	44	2446	64	2466
5	2407	25	2427	45	2447	65	2467
6	2408	26	2428	46	2448	66	2468
7	2409	27	2429	47	2449	67	2469
8	2410	28	2430	48	2450	68	2470
9	2411	29	2431	49	2451	69	2471
10	2412	30	2432	50	2452	70	2472
11	2413	31	2433	51	2453	71	2473
12	2414	32	2434	52	2454	72	2474
13	2415	33	2435	53	2455	73	2475
14	2416	34	2436	54	2456	74	2476
15	2417	35	2437	55	2457	75	2477
16	2418	36	2438	56	2458	76	2478
17	2419	37	2439	57	2459	77	2479
18	2420	38	2440	58	2460	78	2480
19	2421	39	2441	59	2461		

### 4.3 Test Operation and Test Software

Setup for testing: Test samples are provided with a USB interface which makes it possible to control them through a test software installed on a notebook computer.

This software was running on the laptop computer connected to the EUT. It was used to enable the operation modes listed as below.

Test Software	BT FCC Tool
---------------	-------------

The samples were used as follows:

A003311854-012

A003311854-011

Full test was applied on all test modes, but only worst case was shown.

EUT Configure Mode	Applicable To				Description
	Antenna Port Conducted Measurement	Radiated Spurious Emissions above 1 GHz	Radiated Spurious Emissions below 1 GHz	Mains Conducted Emission	
-	√	√	√	√	-

Note:

1. The EUT had been pre-tested on the positioned of each 3 axis. The worst case was found when position on **Z-plane**.
2. "-" means no effect.

#### Antenna Port Conducted Measurement

- Pre-Scan full test was applied on all test modes, but only worst case was shown.
- Following channel(s) was (were) selected for the final test as listed below.

EUT Configure Mode	Available Frequency (MHz)	Tested Frequency (MHz)	Modulation Type	Packet Type
-	2402 to 2480	2402, 2441, 2480	GFSK	1DH5
-	2402 to 2480	2402, 2441, 2480	8DPSK	3DH5

#### Radiated Spurious Emissions (Above 1 GHz)

- Pre-Scan full test was applied on all test modes, but only worst case was shown.
- Following channel(s) was (were) selected for the final test as listed below.

EUT Configure Mode	Available Frequency (MHz)	Tested Frequency (MHz)	Modulation Type	Packet Type
-	2402 to 2480	2402, 2441, 2480	GFSK	1DH5
-	2402 to 2480	2402, 2441, 2480	8DPSK	3DH5

#### Radiated Spurious Emissions (Below 1 GHz)

- Pre-Scan full test was applied on all test modes, but only worst case was shown.
- Following channel(s) was (were) selected for the final test as listed below.

EUT Configure Mode	Available Frequency (MHz)	Tested Frequency (MHz)	Modulation Type	Packet Type
-	2402 to 2480	2480	8DPSK	3DH5

**Mains Conducted Emission Test**

- Pre-Scan full test was applied on all test modes, but only worst case was shown.
- Following channel(s) was (were) selected for the final test as listed below.

EUT Configure Mode	Available Frequency (MHz)	Tested Frequency (MHz)	Modulation Type	Packet Type
With Type-C Cable	2402 to 2480	2480	8DPSK	3DH5
With Lightning Cable	2402 to 2480	2480	8DPSK	3DH5

**Test Condition**

Test Item	Ambient Temperature	Relative Humidity	Tested by
Conducted Measurement	23.9-24.5 °C	62.6-65 %	Andy Chen
Radiated Spurious Emissions above 1 GHz	21.3-22.8 °C	51-57 %	Blake Wang
Radiated Spurious Emissions below 1 GHz	21.3-22.8 °C	51-57 %	Blake Wang
Mains Conducted Emission	21.9 °C	59 %	Ray Huang

## 4.4 Special Accessories and Auxiliary Equipment

The product has been tested together with the following additional accessories:

**Accessory of EUT**


No.	Product	Brand	Model	Description
A	Audio Cable	PX	F1584G	--
B	USB to Type C Cable	PX	F1585G	--

**Support Unit**


Support Unit								
No	Description	Brand	Model	S/N	Shielded	Ferrite Core (Qty)	Length (cm)	Remark
1	Adapter	OPPO	VC56JACH	N/A	-	-	-	Radiated
2	USB to USB	TUV	TUV-02	N/A	NO	NO	200	
3	Phone	I Phone	TUV-01	N/A	-	-	-	
C	USB Cable	Trans	Trans-03	N/A	NO	NO	100	Mains Conducted
1	Adapter	OPPO	VC56JACH	N/A	-	-	-	
2	Phone	I Phone	TUV-01	N/A	-	-	-	
3	Notebook	Lenovo	81BL	MP1DCD6Y	-	-	-	
4	Lightning Cable	TUV	TUV-02	N/A	NO	NO	150	

## 4.5 Test Setup Diagram


<Radiated Spurious Emissions mode>

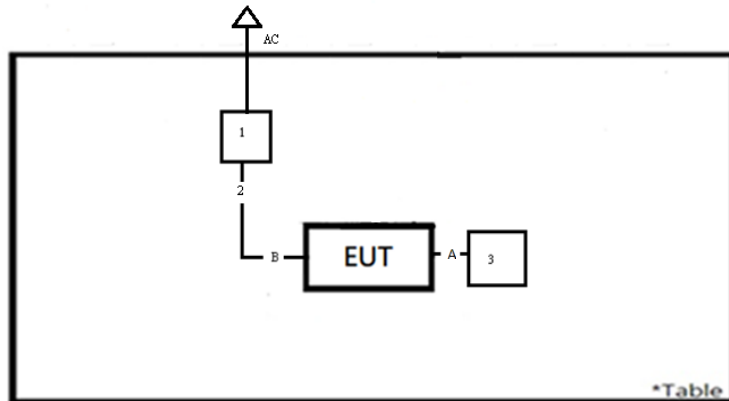

<Mains Conducted Emission mode>  
 With Type-C Cable

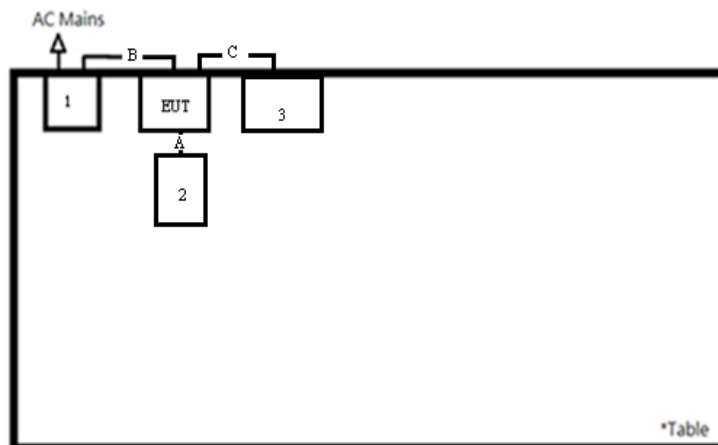

With Lightning Cable

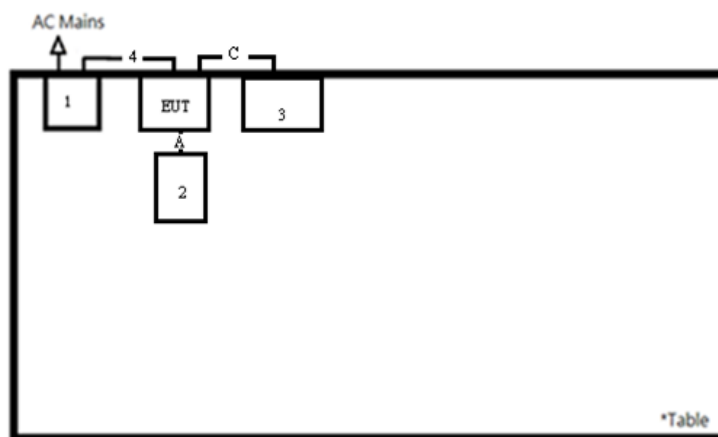

## 5. Test Results

### 5.1 Transmitter Requirement & Test Suites

#### 5.1.1 Antenna Requirement

**Requirement** Use of approved antennas only

According to the manufacturer declaration, the EUT has an antenna with a directional gain of 3 dBi. The antenna is a chip antenna with no possibility of replacement with a non-approved antenna by the end-user. Therefore, the EUT is considered to comply with this provision.

Refer to EUT photo for details.


## 5.1.2 Peak Output Power

### Limit

For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725-5850 MHz band: 1 watt.  
 For all other frequency hopping systems in the 2400-2483.5 MHz band: 0.125 watts.

**Kind of Test Site**                      Shielded room

### Test Setup

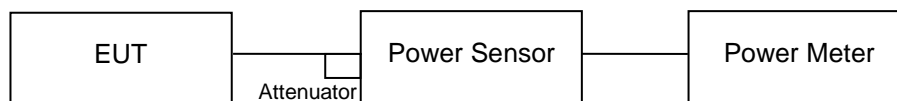

### Test Instruments

Kind of Equipment	Manufacturer	Type	S/N	Calibration Date	Calibration Due Date	Test Date	
						From	Until
Power Meter	Anritsu	ML2495A	1901008	2022/3/15	2023/3/14	2022/8/5	2022/8/9
Power Sensor	Anritsu	MA2411B	1725269	2022/3/15	2023/3/14	2022/8/5	2022/8/9

### Test Procedures

A peak power sensor was used on the output port of the EUT. A power meter was used to read the response of the peak power sensor. Record the power level.

Average power sensor was used to perform output power measurement, trigger and gating function of wide band power meter is enabled to measure max output power of TX on burst. Duty factor is not added to measured value.



**Test Result**
**Peak Output Power**
**<GFSK>**

Channel	Channel Frequency	Peak Output Power		Limit
	(MHz)	(dBm)	(mW)	(mW)
Low Channel	2402	3.45	2.213	125
Middle Channel	2441	2.94	1.968	125
High Channel	2480	2.25	1.679	125

**<8DPSK>**

Channel	Channel Frequency	Peak Output Power		Limit
	(MHz)	(dBm)	(mW)	(mW)
Low Channel	2402	4.45	2.786	125
Middle Channel	2441	3.96	2.489	125
High Channel	2480	3.26	2.118	125

**Average Power**
**<GFSK>**

Channel	Channel Frequency	Average Power	
	(MHz)	(dBm)	(mW)
Low Channel	2402	3.07	2.028
Middle Channel	2441	2.56	1.803
High Channel	2480	1.86	1.535


**<8DPSK>**

Channel	Channel Frequency	Average Power	
	(MHz)	(dBm)	(mW)
Low Channel	2402	1.63	1.455
Middle Channel	2441	1.04	1.271
High Channel	2480	0.34	1.081

### 5.1.3 20 dB Bandwidth and 99% Occupied Bandwidth

**Kind of Test Site**                      Shielded room

**Test Setup**

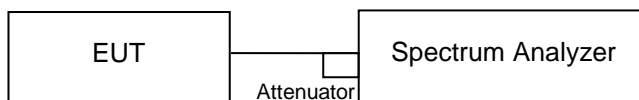

**Test Instruments**

Kind of Equipment	Manufacturer	Type	S/N	Calibration Date	Calibration Due Date	Test Date	
						From	Until
Spectrum Analyzer	R&S	FSV40	101512	2022/2/24	2023/2/23	2022/8/5	2022/8/9

**Test Procedure**

- a. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
- b. Turn on the EUT and connect it to measurement instrument. Then set it to any one convenient frequency within its operating range. Set a reference level on the measuring instrument equal to the highest peak value.
- c. Measure the frequency difference of two frequencies that were attenuated 20 dB from the reference level. Record the frequency difference as the emission bandwidth.
- d. Repeat above procedures until all frequencies measured were complete.
- e. The transmitter output was connected to the spectrum analyzer through an attenuator. The bandwidth of the fundamental frequency was measured by spectrum analyzer with resolution bandwidth in the range of 1 % to 5 % of the anticipated emission bandwidth, and a video bandwidth at least 3x the resolution bandwidth and set the detector to PEAK. The width of a frequency band such that, below the lower and above the upper frequency limits, the mean powers emitted are each equal to a specified percentage 0.5 % of the total mean power of a given emission.

**Test Results**


Please refer to Appendix A.

### 5.1.4 Conducted Spurious Emissions and Frequency Band Edges Measured in 100kHz Bandwidth

**Limit**

20dB (below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power.)

**Kind of Test Site**                      Shielded room

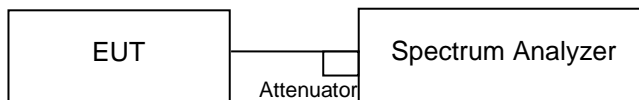**Test Setup**

**Test Instruments**

Kind of Equipment	Manufacturer	Type	S/N	Calibration Date	Calibration Due Date	Test Date	
						From	Until
Spectrum Analyzer	R&S	FSV40	101512	2022/2/24	2023/2/23	2022/8/5	2022/8/9

**Test Procedure**

The transmitter output was connected to the spectrum analyzer via a low lose cable. Set both RBW and VBW of spectrum analyzer to 100 kHz and 300 kHz with suitable frequency span including 100 MHz bandwidth from band edge. The band edges was measured and recorded.

**Test Results**

Please refer to Appendix A.

## 5.1.5 Radiated Spurious Emissions and Band Edges

### Limit


Radiated emissions which fall in the restricted bands, as defined in §15.205(a), must comply with the radiated emission limits specified in §15.209(a).

Emissions radiated outside the restricted and authorized frequency bands must either comply with the radiated emission limits specified for the restricted bands or in §15.247(d).


**Kind of Test Site**                      3m Semi-Anechoic Chamber

### Test Setup


**<Radiated Emissions below 30 MHz>**

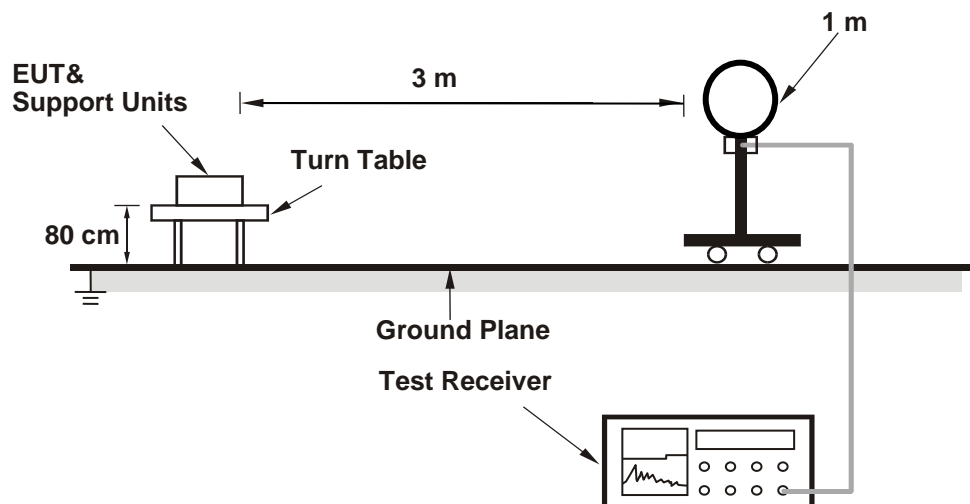

**<Radiated Emissions 30 MHz to 1 GHz>**

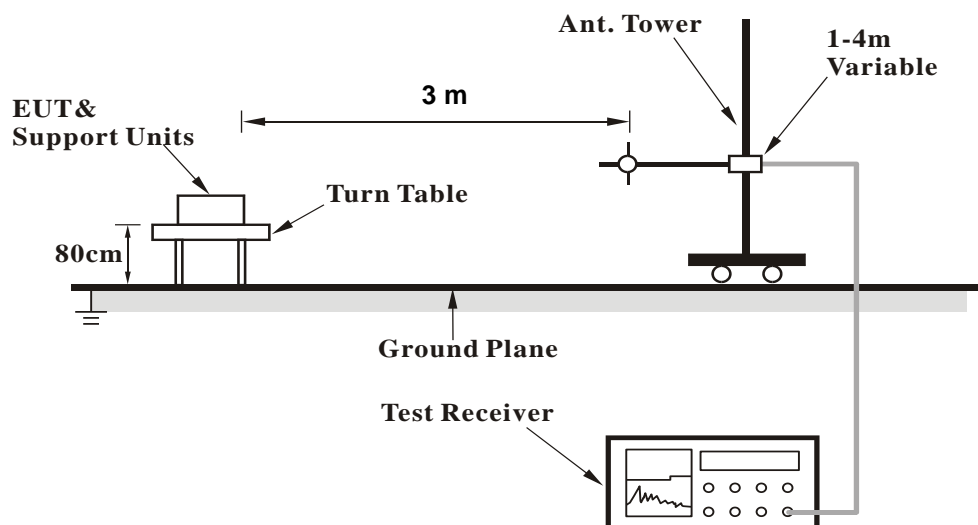

## &lt;Radiated Emissions above 1 GHz&gt;

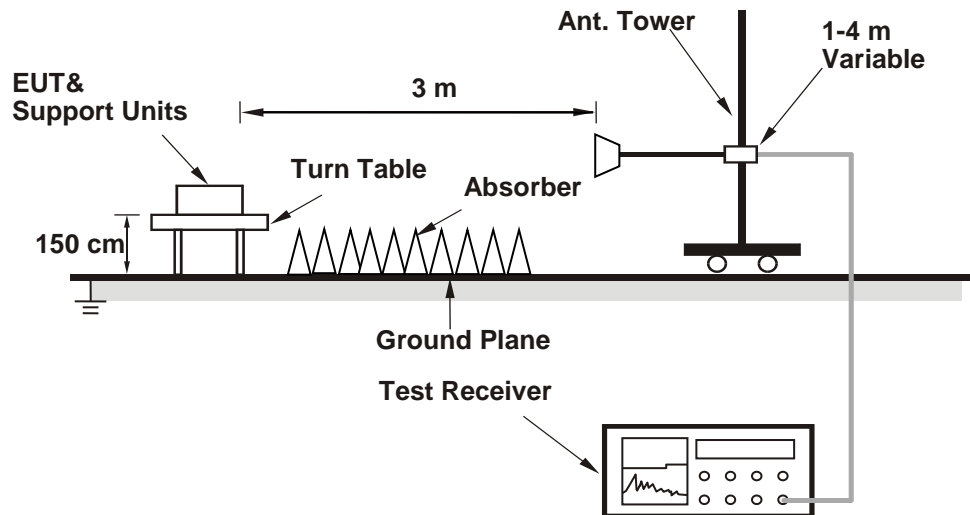

For the actual test configuration, please refer to the attached file (Test Setup Photo).

**Test Instruments**

Kind of Equipment	Manufacturer	Type	S/N	Calibration Date	Calibration Due Date
<b>Above 1 GHz</b>					
Signal Analyzer	R&S	FSV40	101509	2022/4/22	2023/4/21
Horn Antenna	ETS-Lindgren	3117	00218929	2021/11/25	2022/11/24
HF-AMP + AC source	EMCI	EMC051845SE	980635	2022/1/20	2023/1/19
HF-AMP + AC source	EMCI	EMC184045SE	980656	2022/1/20	2023/1/19
Horn Antenna	SCHWARZBECK	BBHA 9170	00887	2022/3/29	2023/3/28
Test Software	Audix E3	15914a_20191106 tuv	PK-001087	N/A	N/A
<b>30 MHz ~ 1 GHz</b>					
Receiver	R&S	ESR7	102109	2022/2/25	2023/2/24
Bilog Antenna	SCHWARZBECK	VULB-9168	00949	2022/5/29	2023/5/28
LF-AMP	Agilent	8447D	2727A05146	2022/2/16	2023/2/15
Test Software	Audix E3	15914a_20191106 tuv	PK-001087	N/A	N/A
<b>Below 30 MHz</b>					
Receiver	R&S	ESR7	102109	2022/2/25	2023/2/24
Microwave Cable	SUCOFLEX 104EA	800056/4EA	804680/4	2022/3/22	2023/3/21
Loop Antenna	SCHWARZBECK	FMZB 1519B	00215	2021/12/8	2022/12/7
Test Software	Audix E3	15914a_20191106 tuv	PK-001087	N/A	N/A

**Test Procedures****For Radiated Emissions below 30 MHz**

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter chamber room. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. Parallel (OPEN), perpendicular (CLOSE), and ground-parallel (GROUND) orientations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Quasi-Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.

## Note:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 9 kHz at frequency below 30 MHz.
2. All modes of operation were investigated and the worst-case emissions are reported.

**For Radiated Emissions above 30 MHz**

- a. The EUT was placed on the top of a rotating table 0.8 meters (for 30 MHz ~ 1 GHz) / 1.5 meters (for above 1 GHz) above the ground at 3 meter chamber room for test. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to quasi-peak detect function and specified bandwidth with maximum hold mode when the test frequency is below 1 GHz.
- f. The test-receiver system was set to peak and average detected function and specified bandwidth with maximum hold mode when the test frequency is above 1 GHz. If the peak reading value also meets average limit, measurement with the average detector is unnecessary.

## Note:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120 kHz for Quasi-peak detection (QP) or Peak detection (PK) at frequency below 1 GHz.
2. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 3 MHz for Peak detection (PK) at frequency above 1 GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is  $\geq 1/T$  (Duty cycle < 98 %) or 10 Hz (Duty cycle  $\geq 98$  %) for Average detection (AV) at frequency above 1 GHz.
4. For fundamental frequency: The average value is "Average = Peak value + 20log(Duty cycle)  
Where the duty factor is calculated from following formula for DH5 packet type which has worst duty factor:  
 $20\log(\text{Duty cycle}) = 20\log(\text{dwell time} / 100\text{ms}) = 20\log(3.125 / 100) = -30.1 \text{ dB}$
5. All modes of operation were investigated and the worst-case emissions are reported.

6. The Radiated Emissions testing was performed in the X(E1), Y(H) and Z(E2) axis orientation. The worst-case Axis orientation is recorded in this test report.

**Test Results**

Factor (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)

Level (dBuV/m) = Reading (dBuV) + Factor (dB/m)

Please refer to Appendix B.




### 5.1.6 Hopping Channel Separation

**Limit**  $\geq 25$  kHz or 2/3 of 20 dB bandwidth, whichever is greater

**Kind of Test Site** Shielded room

#### Test Setup

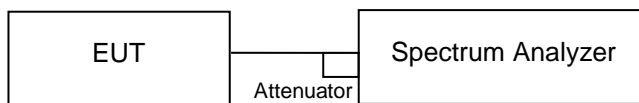

#### Test Instruments

Kind of Equipment	Manufacturer	Type	S/N	Calibration Date	Calibration Due Date	Test Date	
						From	Until
Spectrum Analyzer	R&S	FSV40	101512	2022/2/24	2023/2/23	2022/8/5	2022/8/9

#### Test Procedure

Measurement Procedure REF

- Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
- Turn on the EUT and connect it to measurement instrument. Then set it to any one convenient frequency within its operating range.
- By using the MaxHold function record the separation of two adjacent channels.
- Measure the frequency difference of these two adjacent channels by SA MARK function. And then plot the result on SA screen.
- Repeat above procedures until all frequencies measured were complete.

#### Test Results


Please refer to Appendix A.

### 5.1.7 Number of Hopping Frequency

**Limit**  $\geq 15$  non-overlapping channels

**Kind of Test Site** Shielded room

#### Test Setup

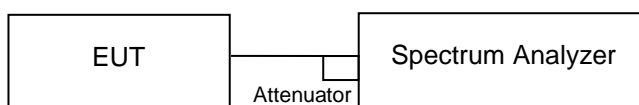

#### Test Instruments

Kind of Equipment	Manufacturer	Type	S/N	Calibration Date	Calibration Due Date	Test Date	
						From	Until
Spectrum Analyzer	R&S	FSV40	101512	2022/2/24	2023/2/23	2022/8/5	2022/8/9

#### Test Procedure

- Check the calibration of the measuring instrument (SA) using either an internal calibrator or a known signal from an external generator.
- Turn on the EUT and connect its antenna terminal to measurement via a low loss cable. Then set it to any one measured frequency within its operating range and make sure the instrument is operated in its linear range.
- Set the SA on MaxHold Mode, and then keep the EUT in hopping mode. Record all the signals from each channel until each one has been recorded.
- Set the SA on View mode and then plot the result on SA screen.
- Repeat above procedures until all frequencies measured were complete.

#### Test Results


Please refer to Appendix A.

### 5.1.8 Dwell Time

**Limit** 0.4s

**Kind of Test Site** Shielded room

**Test Setup**

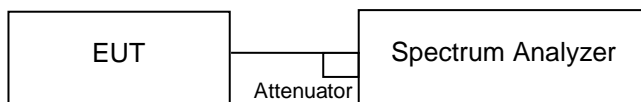

**Test Instruments**

Kind of Equipment	Manufacturer	Type	S/N	Calibration Date	Calibration Due Date	Test Date	
						From	Until
Spectrum Analyzer	R&S	FSV40	101512	2022/2/24	2023/2/23	2022/8/5	2022/8/9

**Test Procedures**

- a. Check the calibration of the measuring instrument (SA) using either an internal calibrator or a known signal from an external generator.
- b. Turn on the EUT and connect its antenna terminal to measurement via a low loss cable. Then set it to any one measured frequency within its operating range and make sure the instrument is operated in its linear range.
- c. Adjust the center frequency of SA on any frequency be measured and set SA to zero span mode. And then, set RBW and VBW of spectrum analyzer to proper value.
- d. Measure the time duration of one transmission on the measured frequency. And then plot the result with time difference of this time duration.
- e. Repeat above procedures until all different time-slot modes have been completed.

**Test Results**

Please refer to Appendix A.

## 5.2 Mains Emission


### 5.2.1 Mains Conducted Emission

#### Limit

Mains Conducted Emission as defined in §15.207 must comply with the mains conducted emission limits.

**Kind of Test Site**                      Shielded room

#### Test Setup

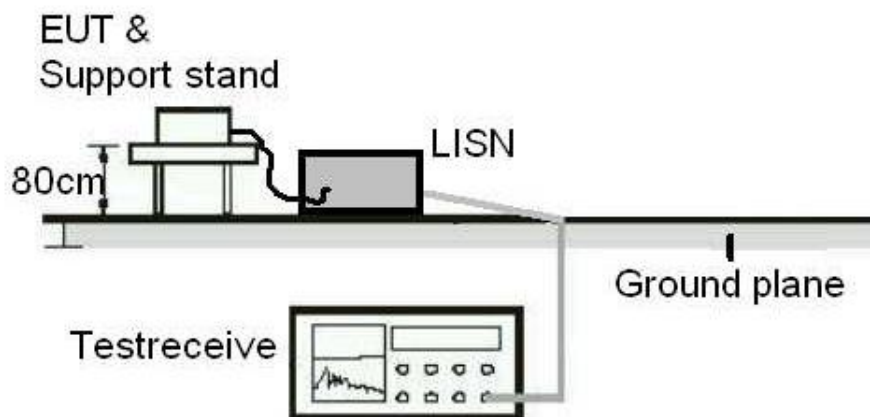

#### Test Instruments

Kind of Equipment	Manufacturer	Type	S/N	Calibration Date	Calibration Due Date
Two-Line V-Network	Rohde & Schwarz	ENV216	101938	2021/9/23	2022/9/22
EMI Test Receiver	R&S	ESCI	1816063	2021/11/15	2022/11/14

#### **Test Procedures**

- a. The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 ohm/50 uH of coupling impedance for the measuring instrument.
- b. Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- c. The frequency range from 150 kHz to 30 MHz was searched. Emission levels under (Limit – 20 dB) was not recorded.

Note: The resolution bandwidth and video bandwidth of test receiver is 9 kHz for quasi-peak detection (QP) and average detection (AV) at frequency 0.15 MHz – 30 MHz.

#### **Test Results**


Please refer to Appendix B.

## Appendix A: Test Results of Conducted Test

### Test Result of 20 dB Bandwidth





#### GFSK

Channel	Channel Frequency (MHz)	20 dB Bandwidth (kHz)	Result
Low Channel	2402	941.10	Pass
Middle Channel	2441	941.10	Pass
High Channel	2480	941.10	Pass

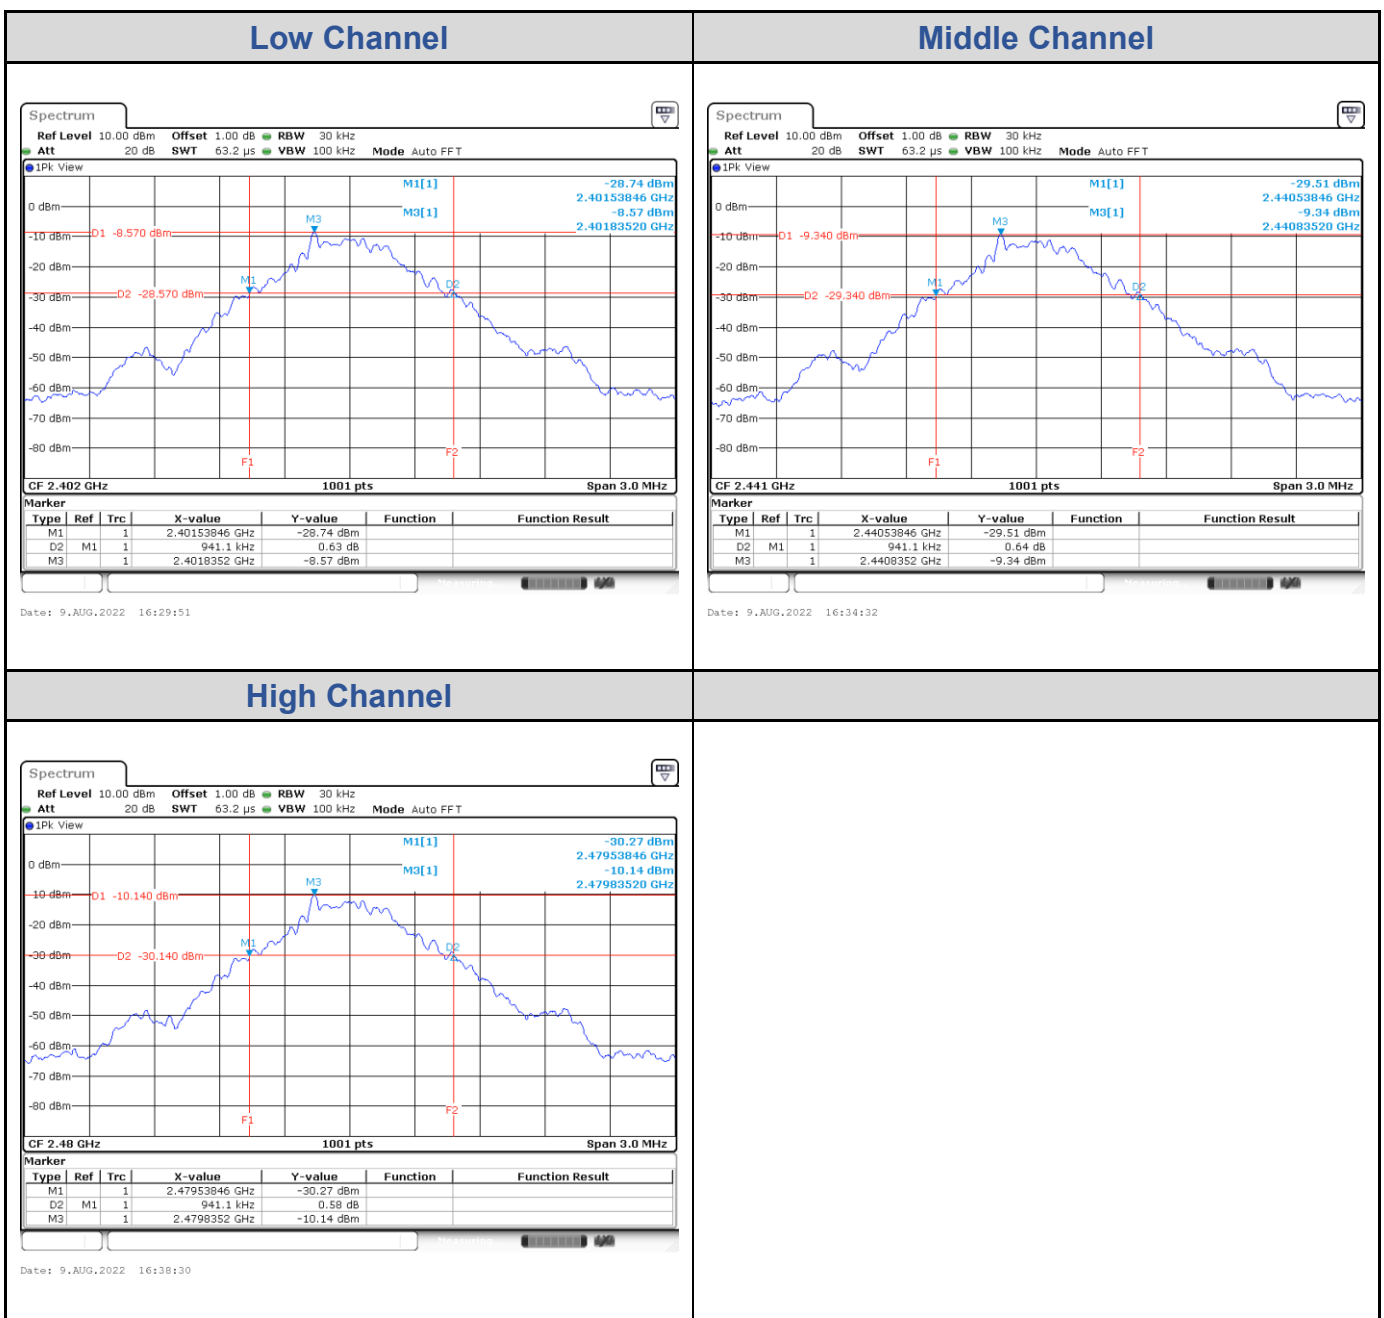

**8DPSK**


Channel	Channel Frequency (MHz)	20 dB Bandwidth (kHz)	Result
Low Channel	2402	1243.80	Pass
Middle Channel	2441	1243.80	Pass
High Channel	2480	1243.80	Pass

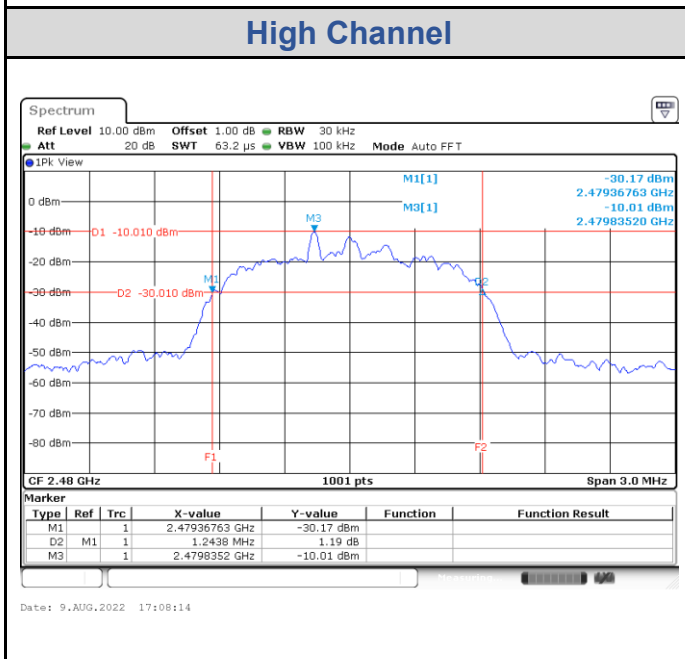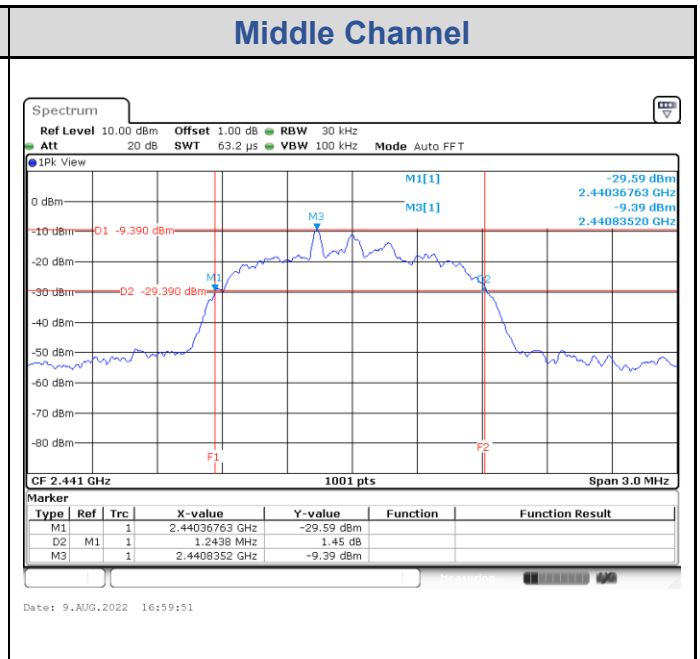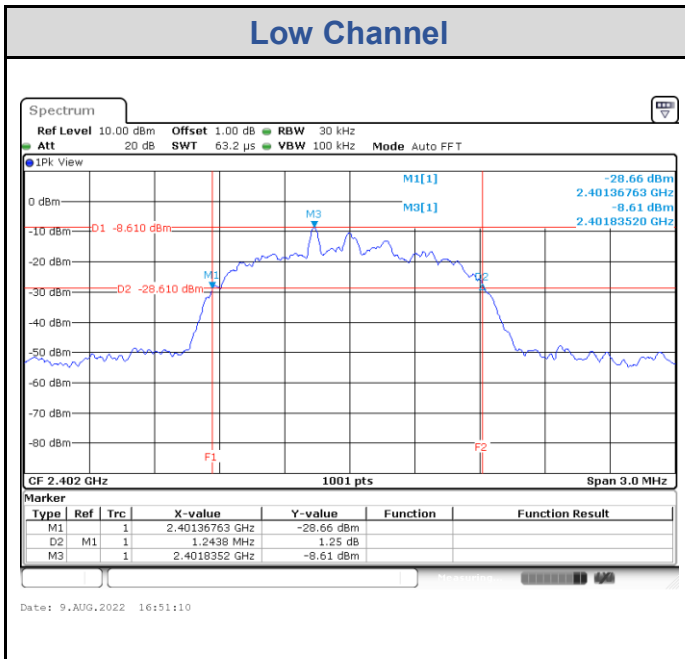

## Test Result of 99% Occupied Bandwidth

### GFSK


Channel	Channel Frequency (MHz)	99% Bandwidth (kHz)
Low Channel	2402	905.09
Middle Channel	2441	905.09
High Channel	2480	905.09

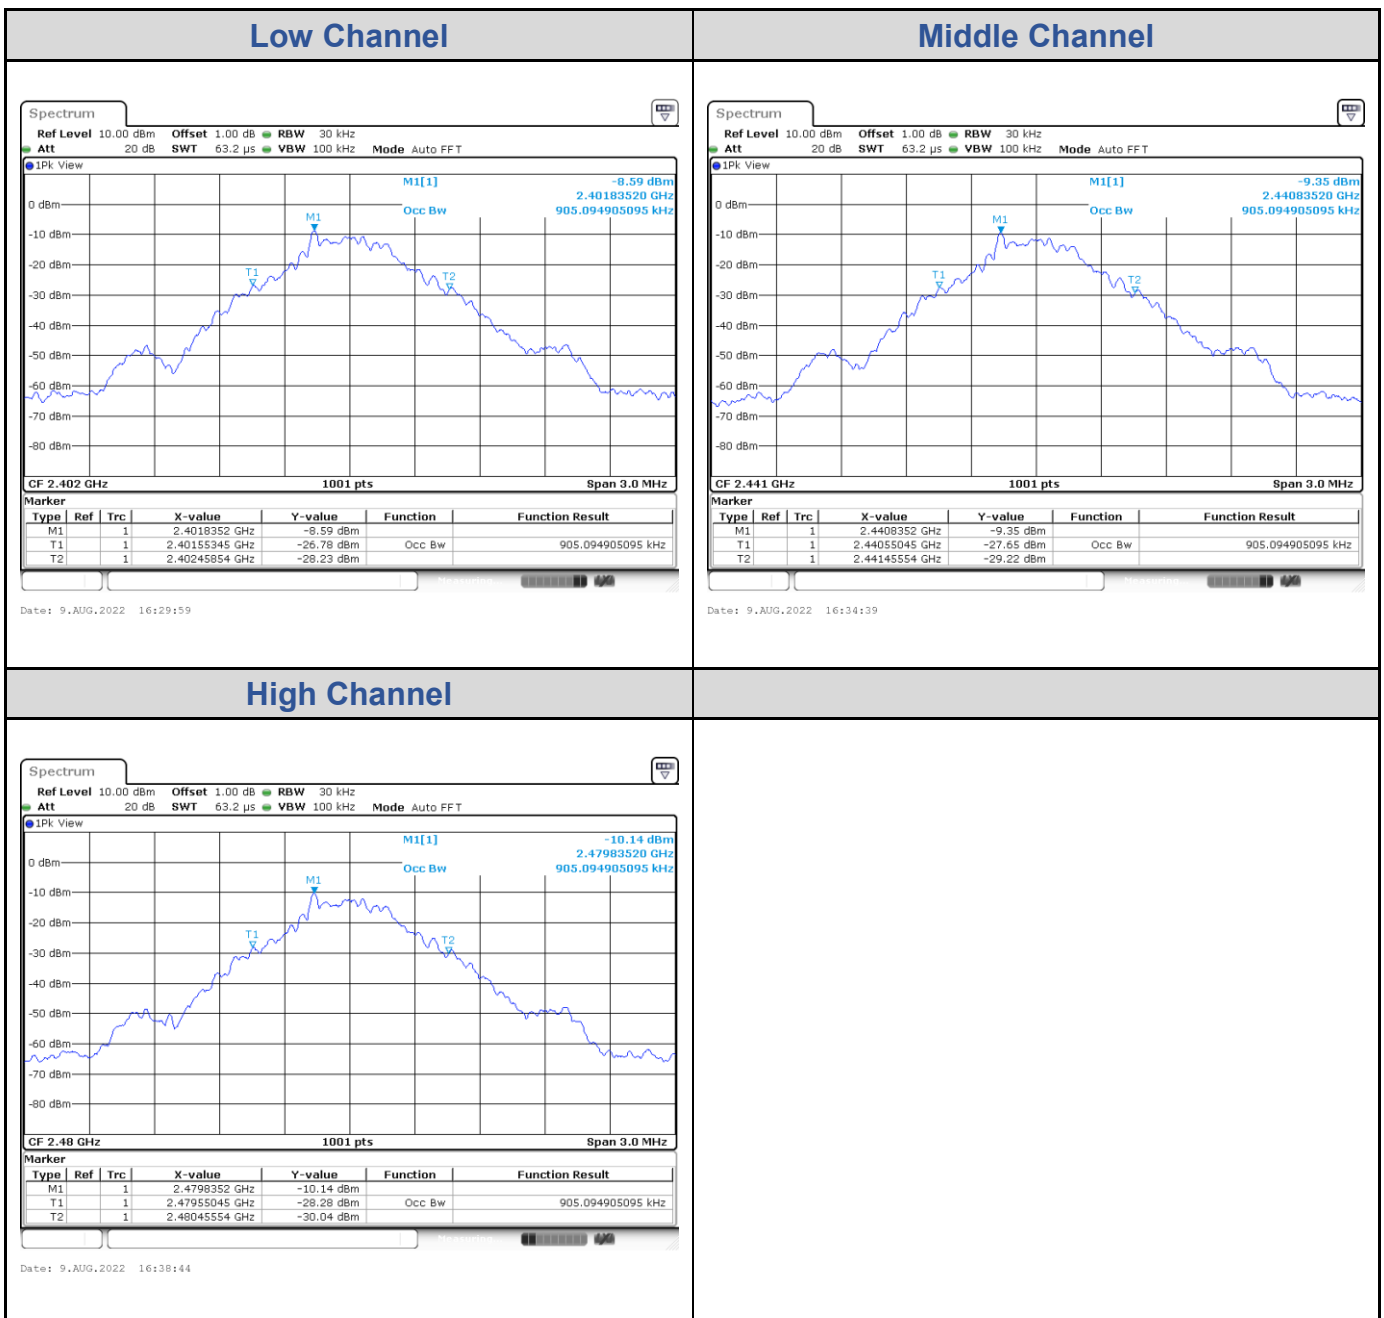




**8DPSK**

Channel	Channel Frequency (MHz)	99% Bandwidth (kHz)
Low Channel	2402	1162.84
Middle Channel	2441	1159.84
High Channel	2480	1159.84

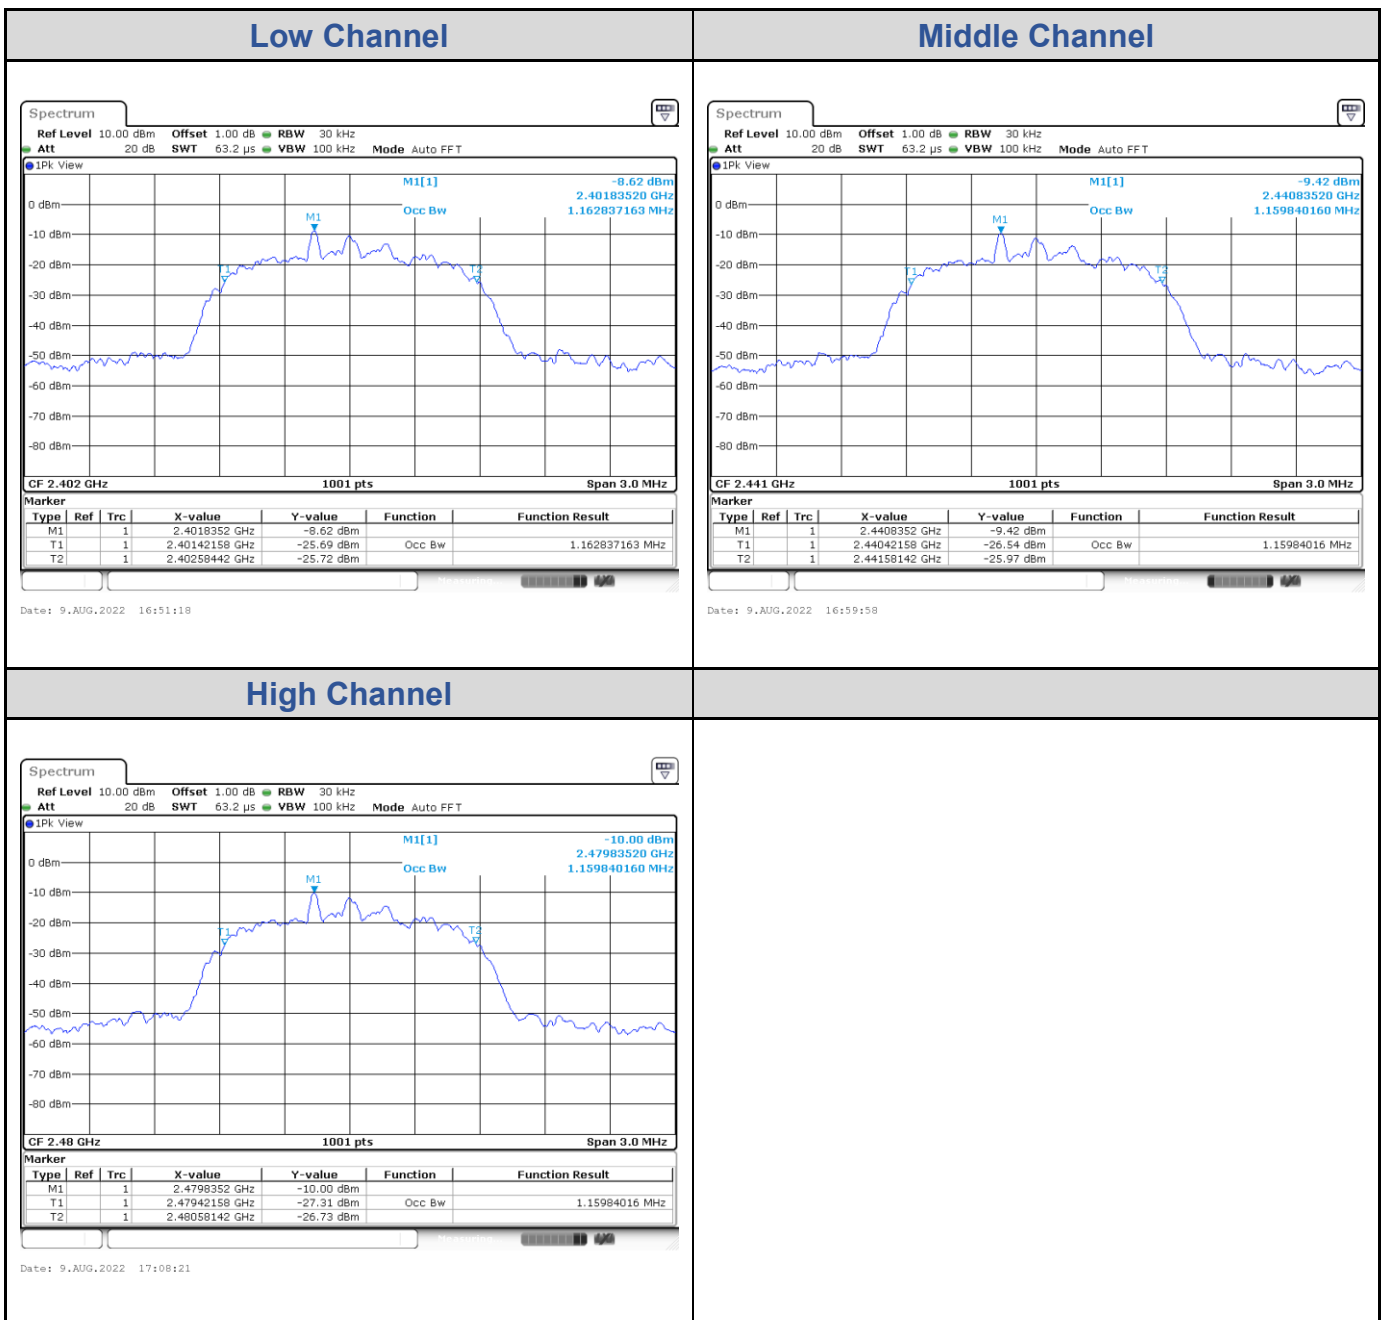


### Test Result of Conducted Spurious Emissions, Tx Mode

#### GFSK

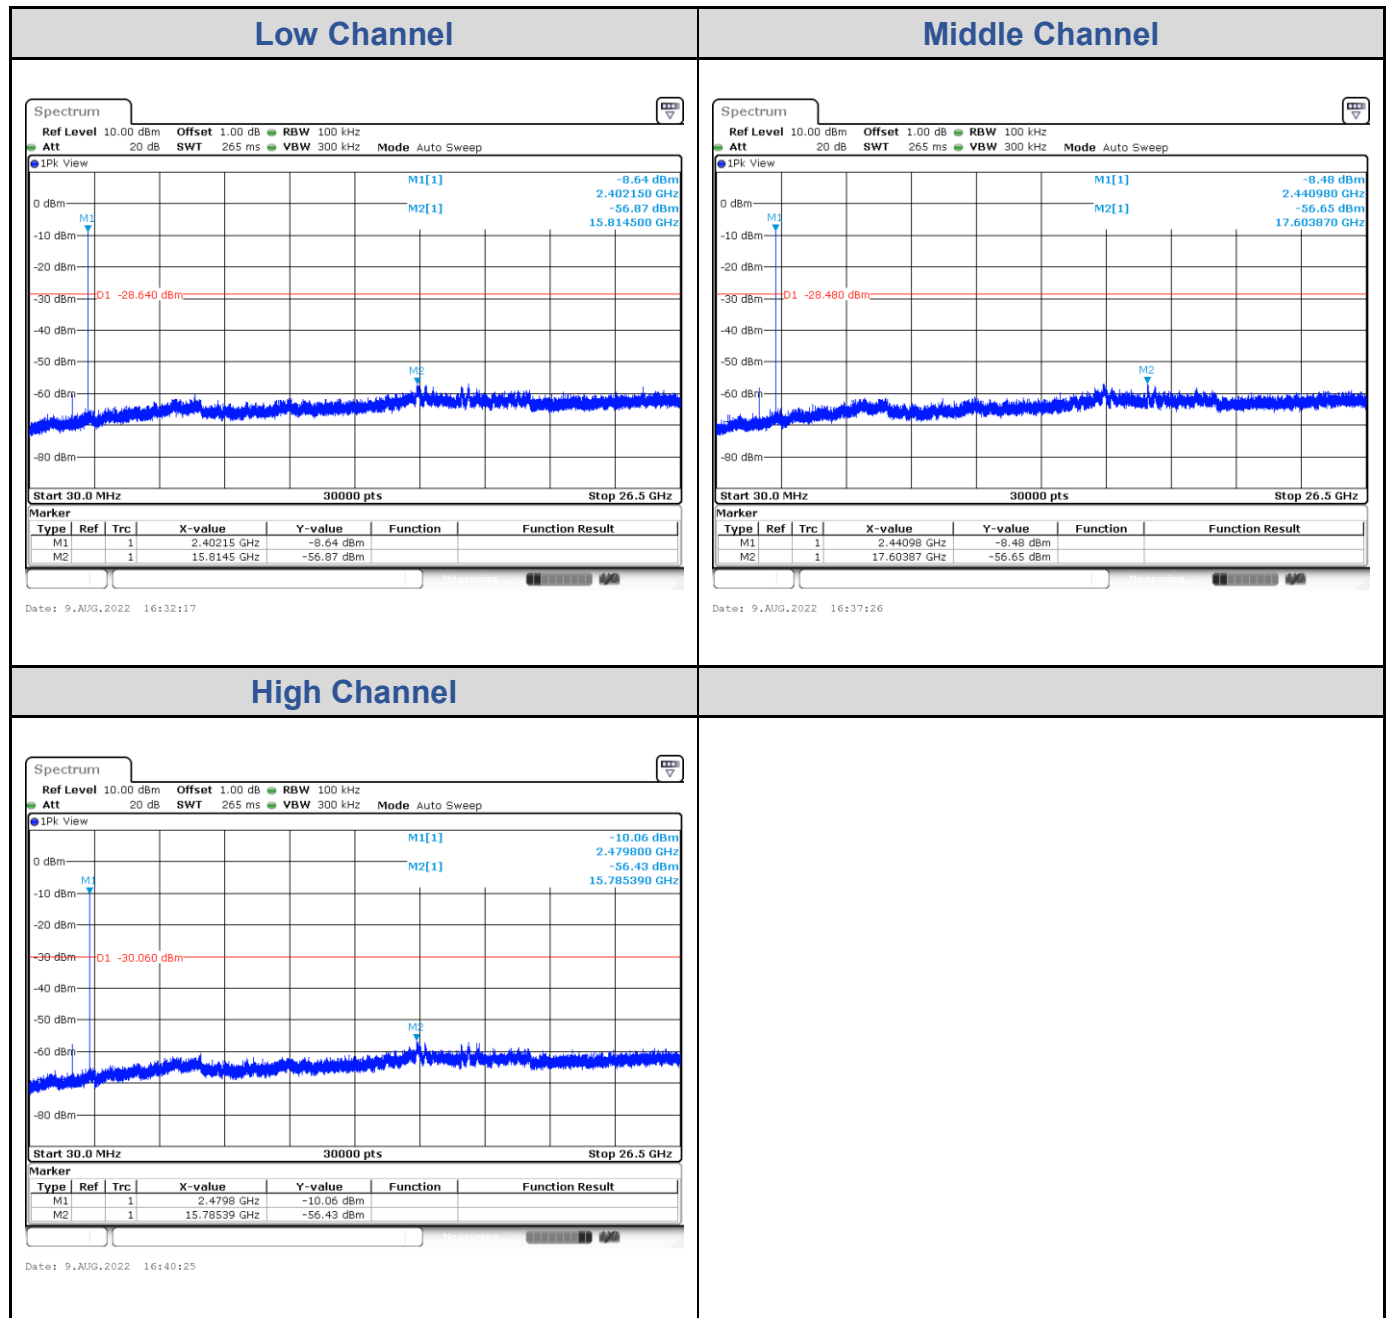


8DPSK

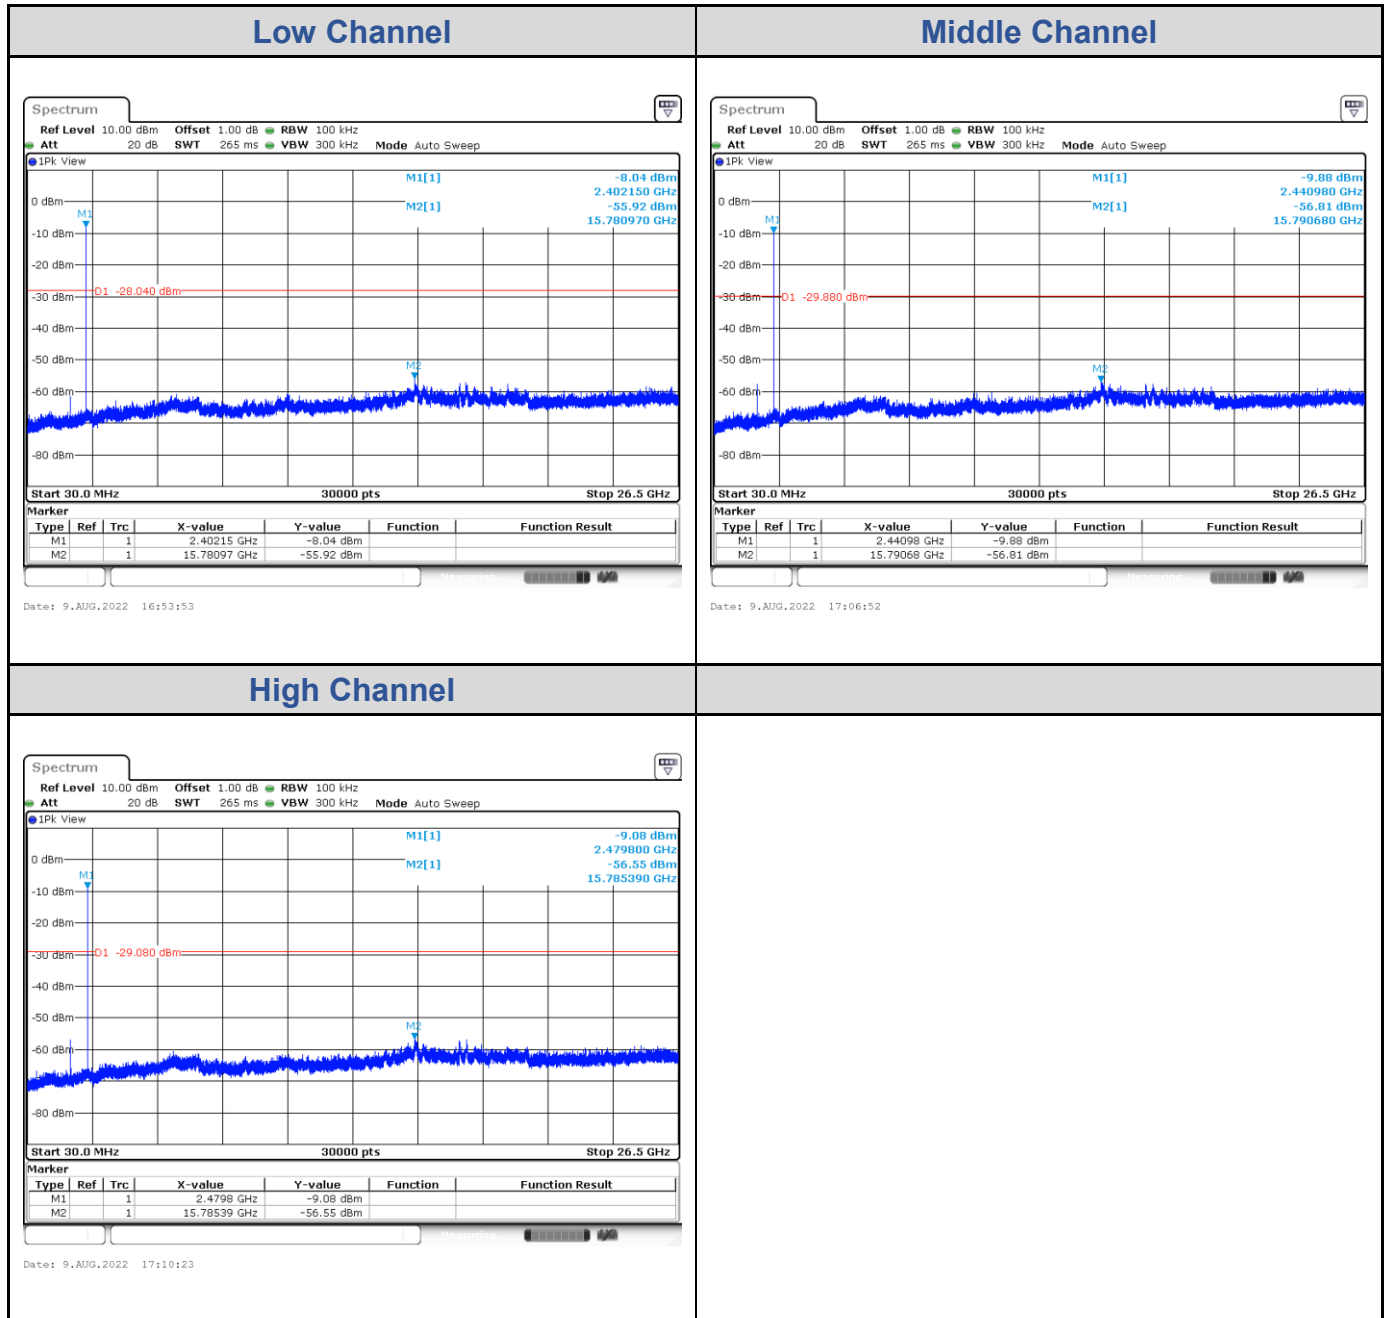


## Test Result of Conducted Band Edge, Tx Mode

### GFSK

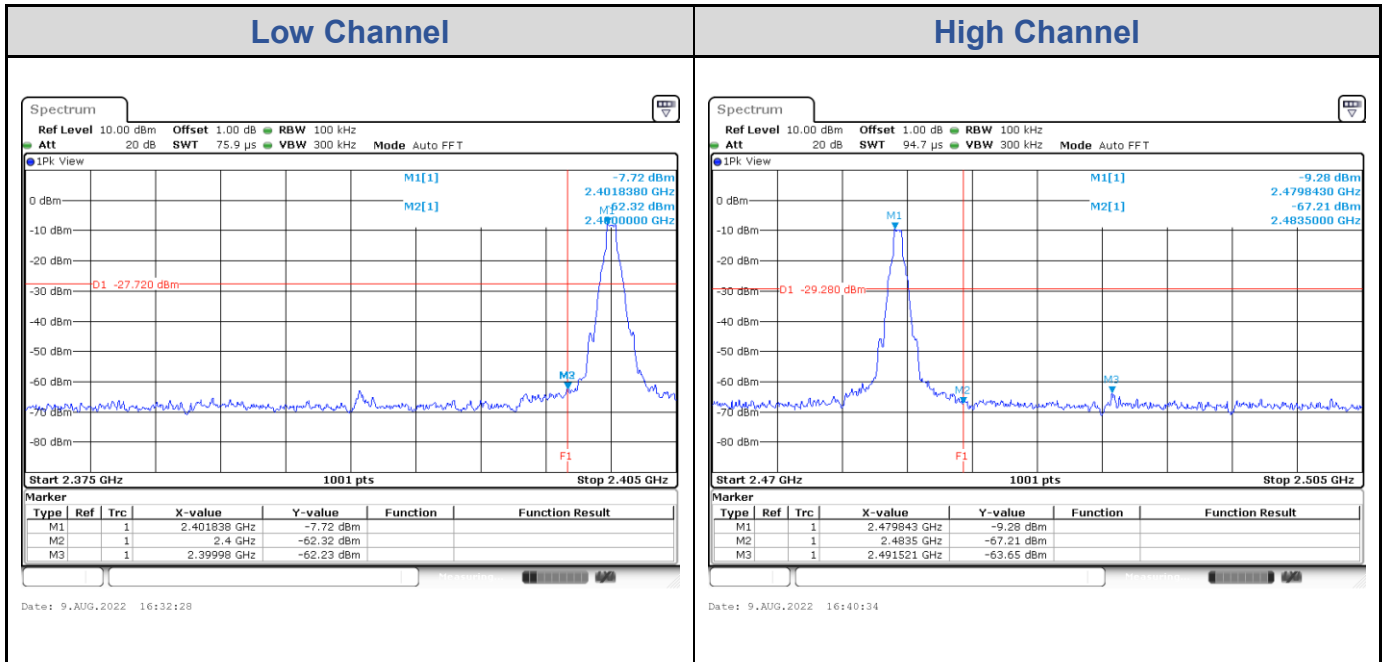


### 8DPSK

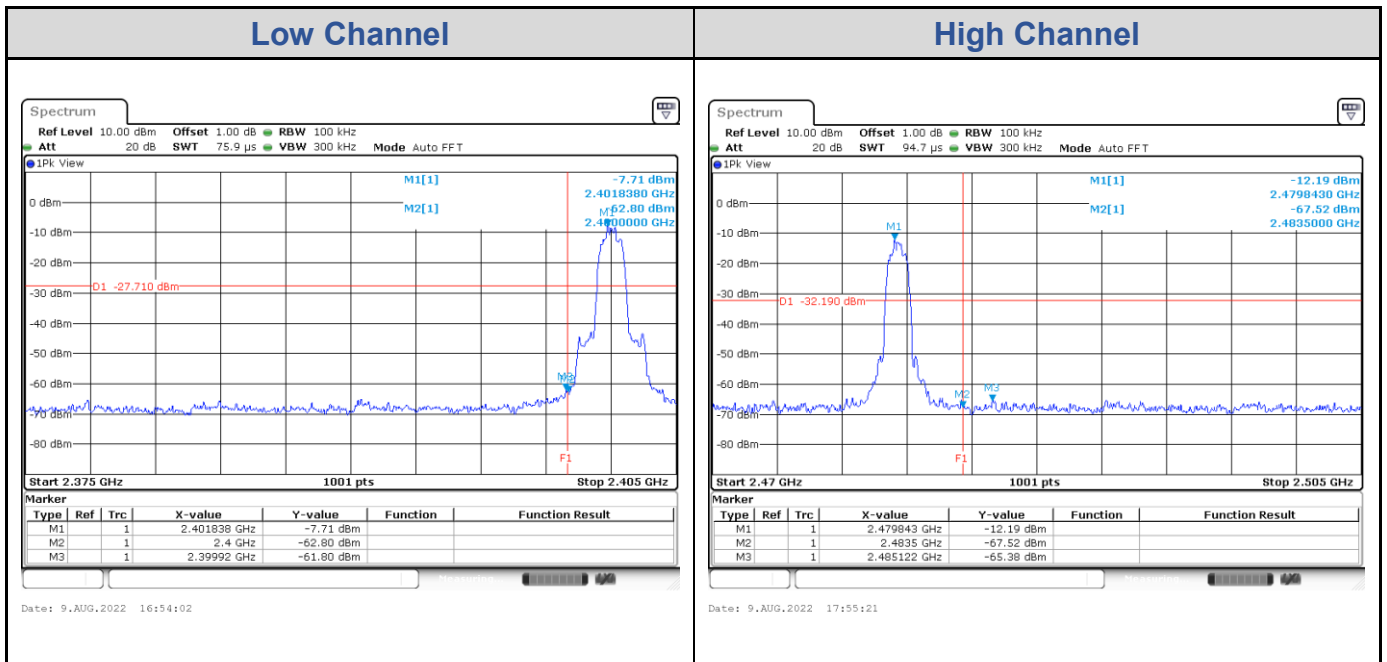


## Test Result of Hopping Band Edge

### GFSK

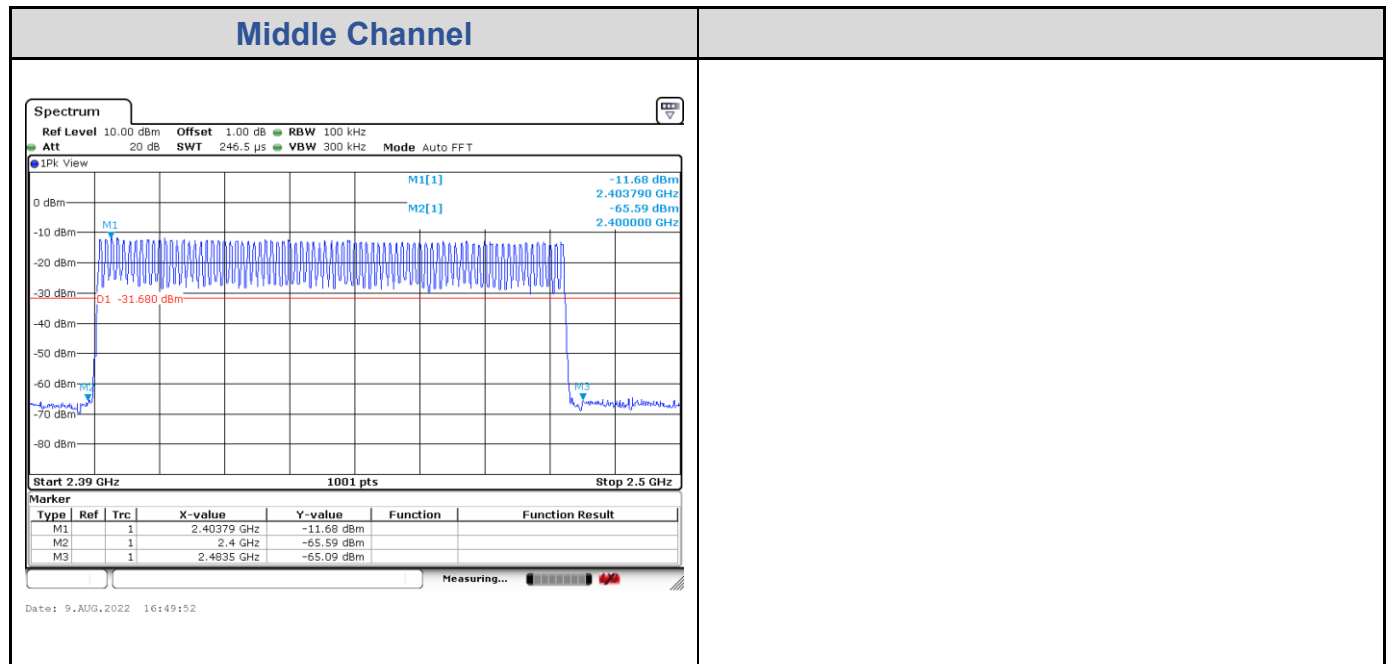



### 8DPSK

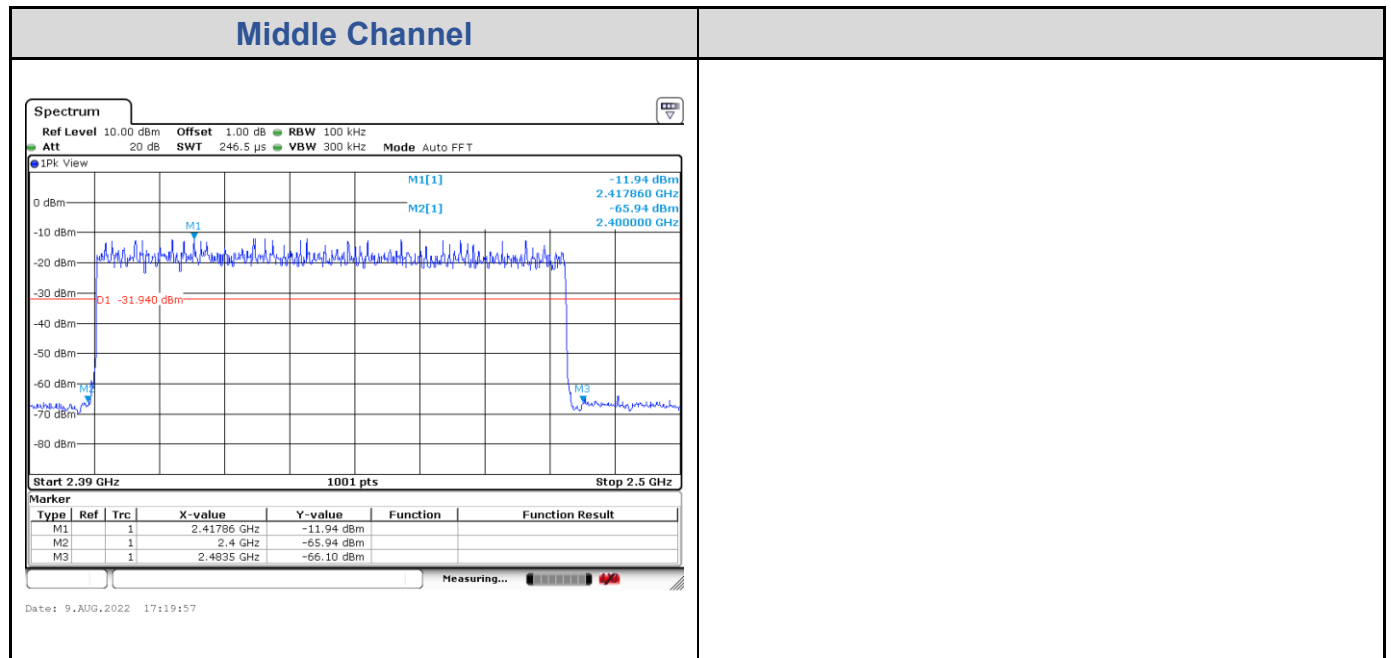

## Test Result of Hopping Channel Separation


### GFSK

Channel	Channel Frequency (MHz)	Adjacent Channel Separation (MHz)	20 dB Bandwidth (kHz)	Minimum Limit (MHz)	Result
0	2402	1.00	941.10	0.627	Pass
39	2441	1.00	941.10	0.627	Pass
78	2480	1.00	941.10	0.627	Pass

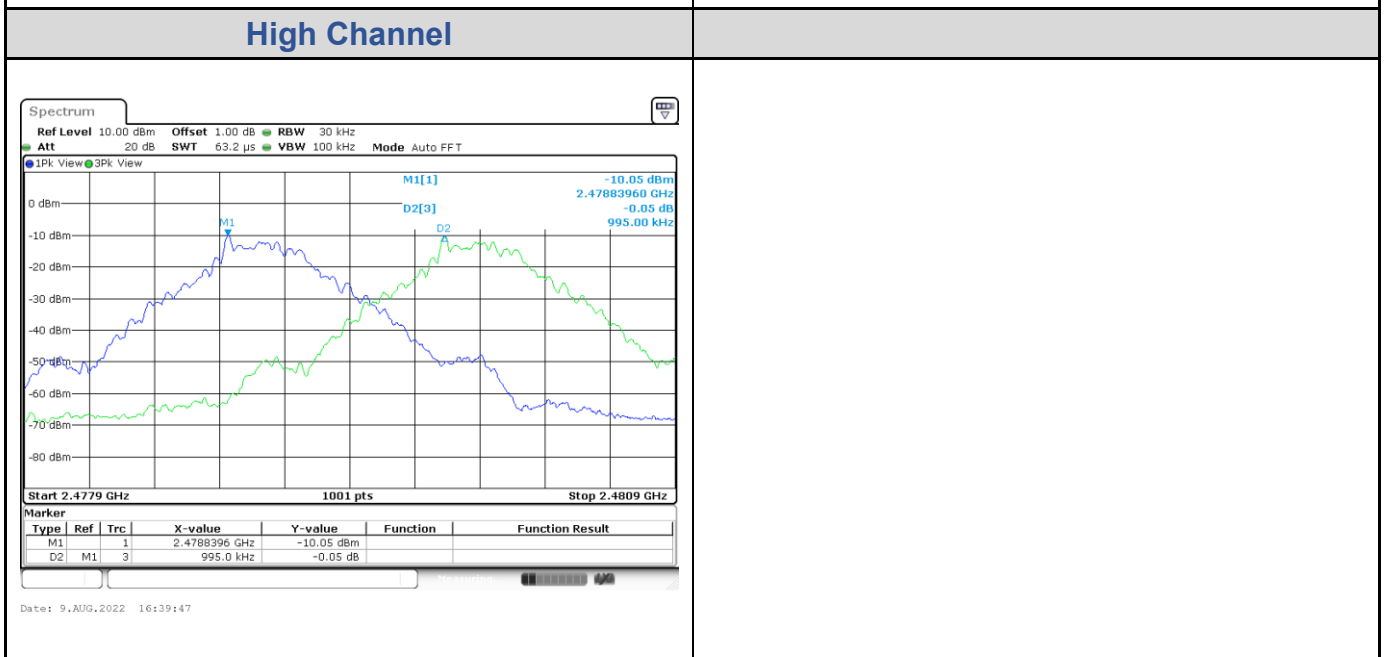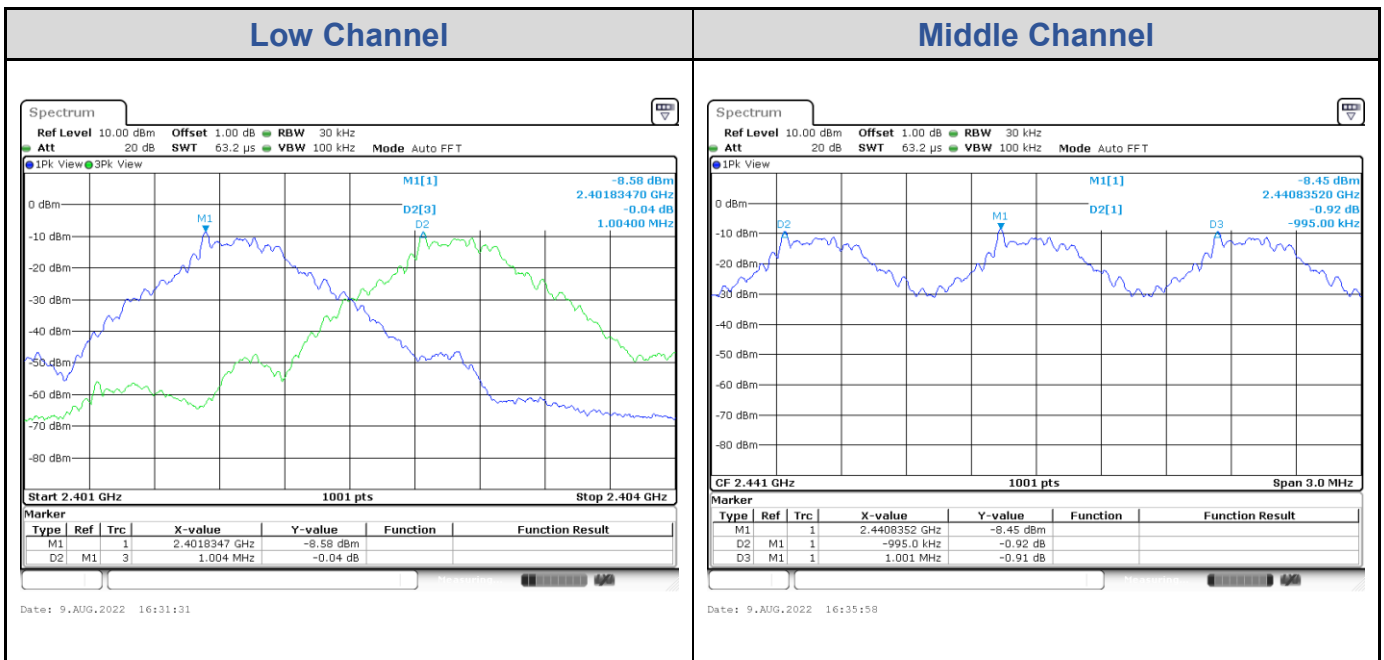



**8DPSK**

Channel	Channel Frequency (MHz)	Adjacent Channel Separation (MHz)	20 dB Bandwidth (kHz)	Minimum Limit (MHz)	Result
0	2402	1.00	1243.80	0.829	Pass
39	2441	1.00	1243.80	0.829	Pass
78	2480	1.00	1243.80	0.829	Pass

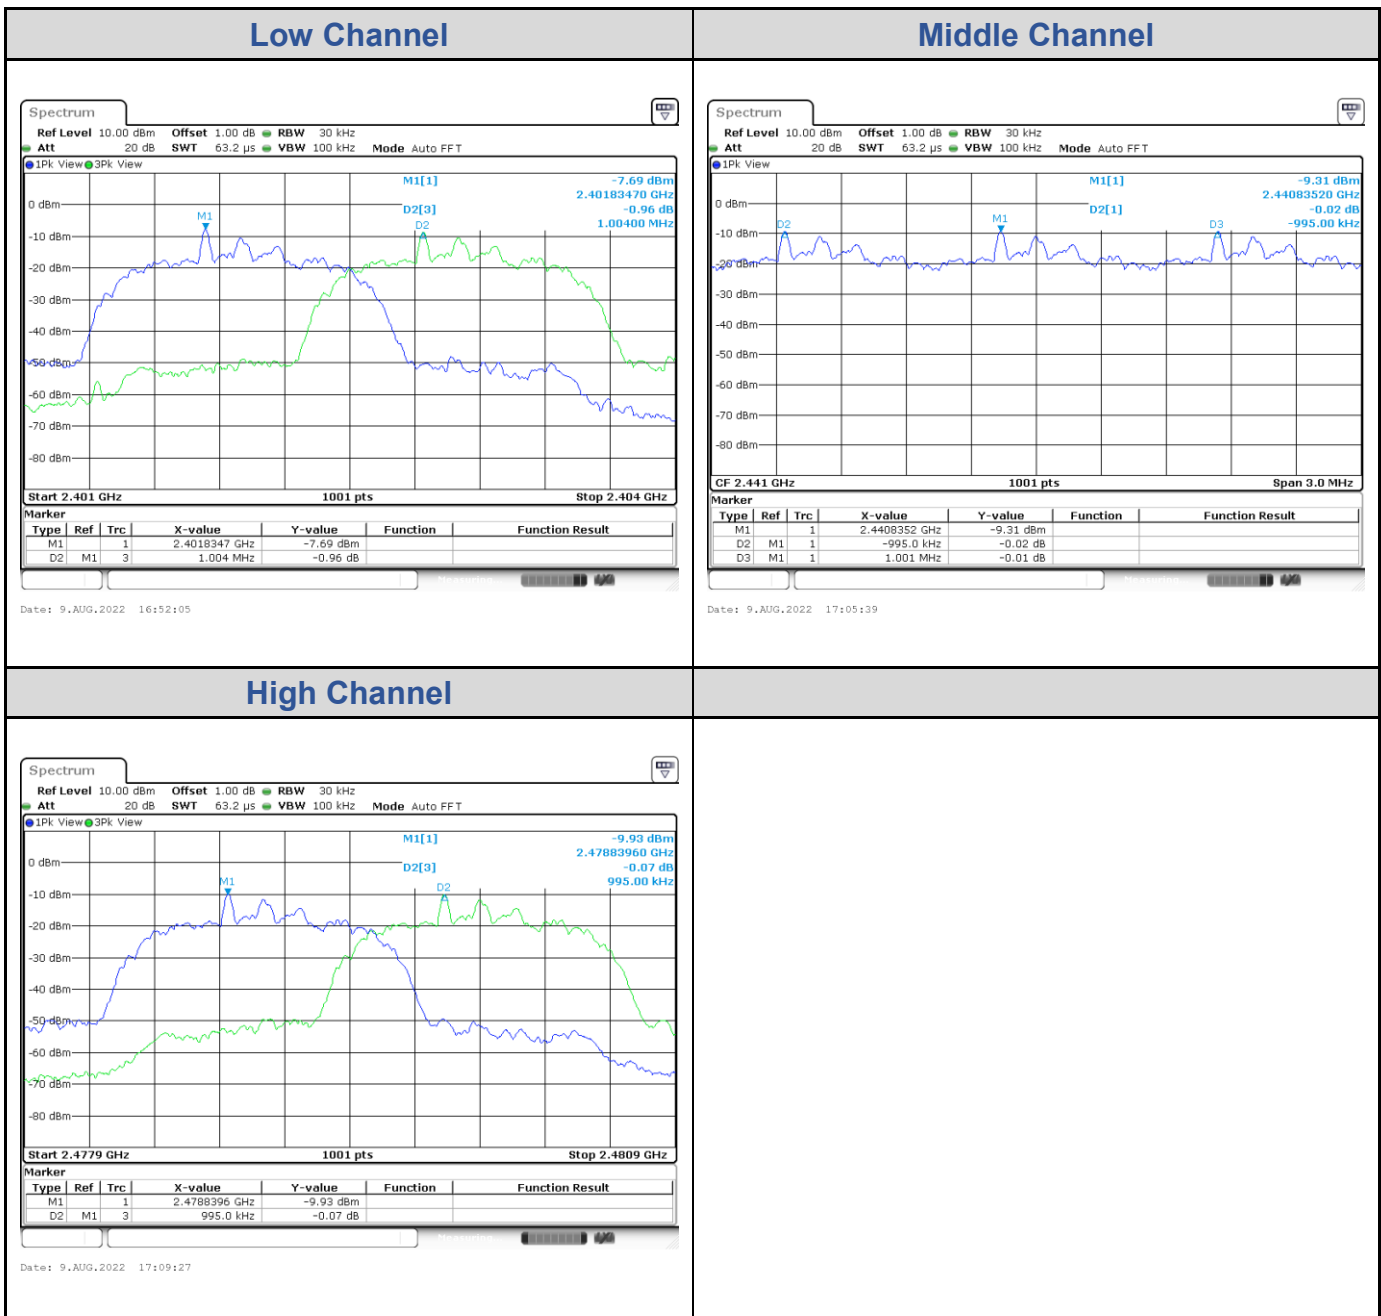

### Test Result of Number of Hopping Frequency

Frequency Range	Measured Quantity of Hopping Channel	Limit	Result
2400 to 2483.5 MHz	79	≥15	Pass

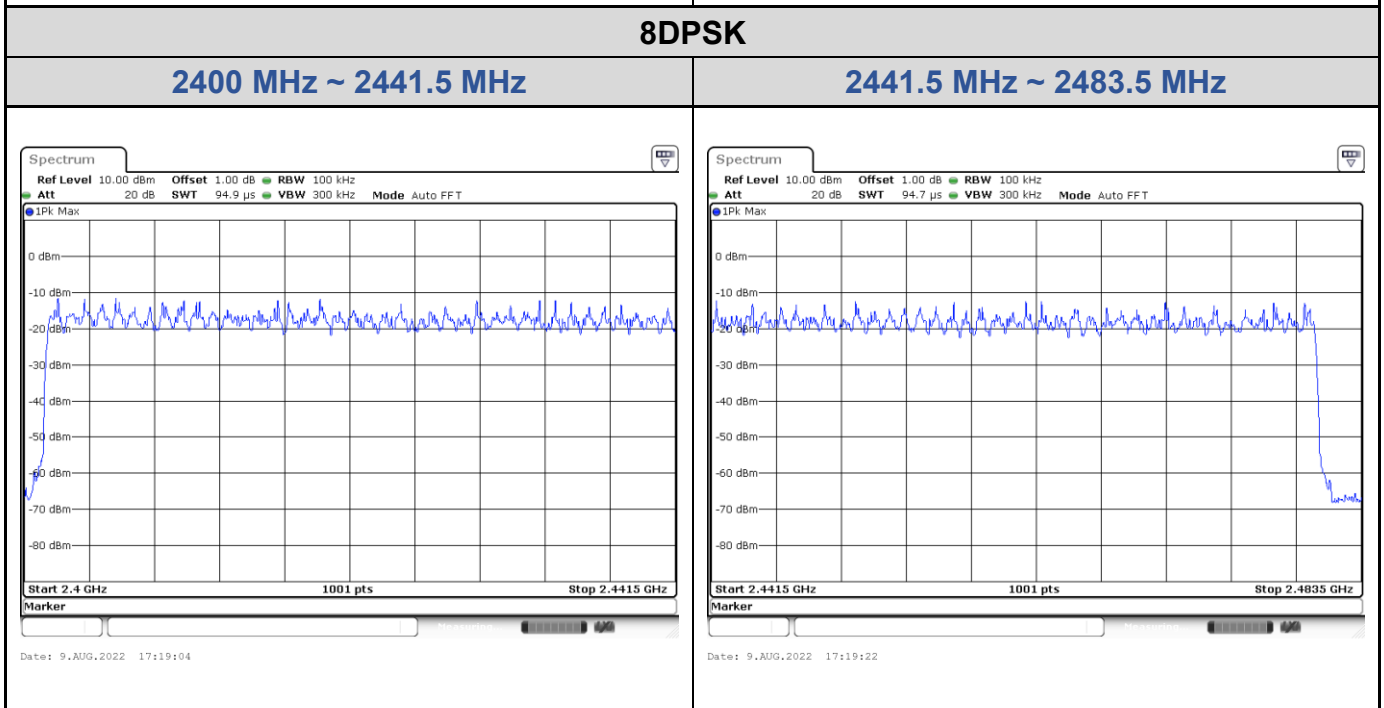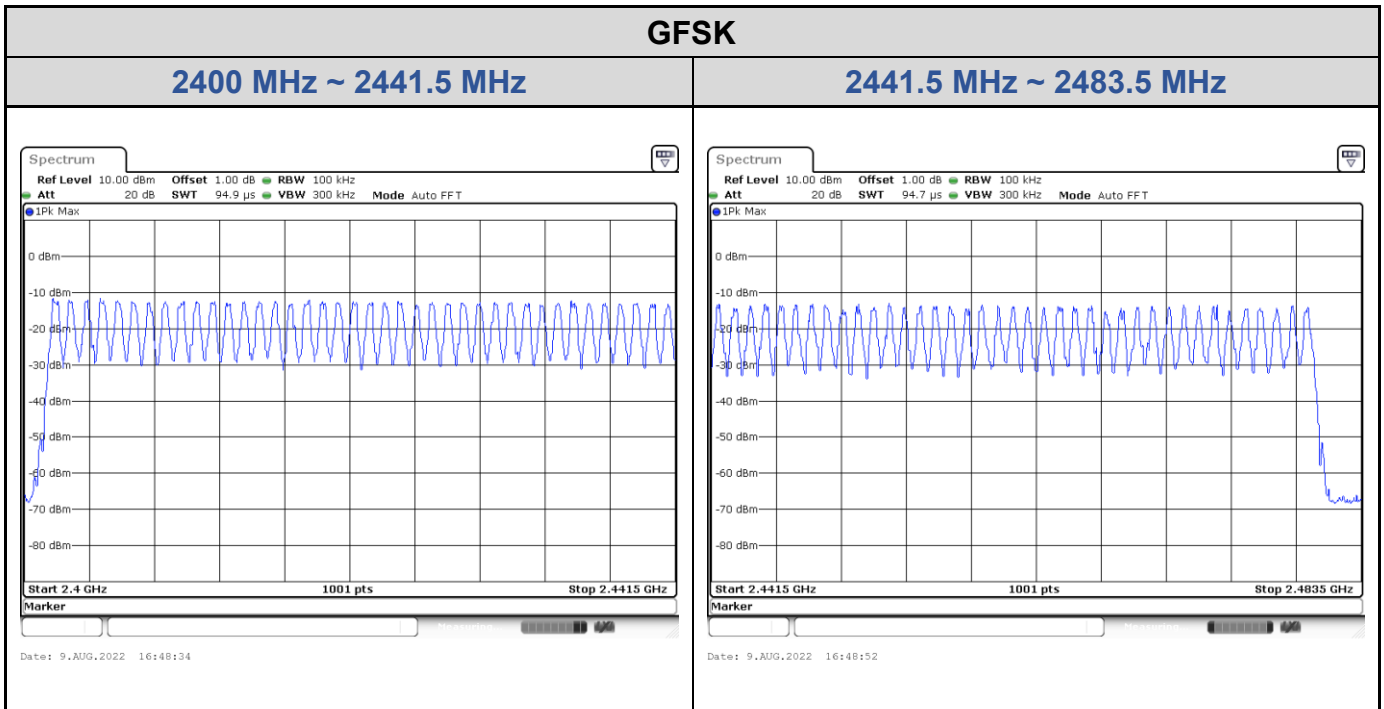




### Test Result of Dwell Time


#### GFSK

Data Mode	Number of transfer in a 31.6 (79Hopping*0.4s)	Package transfer time (msec)	Dwell time (s)	Limit (s)	Result
1DH5	17 (times / 5 sec) * 6.32 = 107.44 times	2.92	0.313725	0.4	Pass

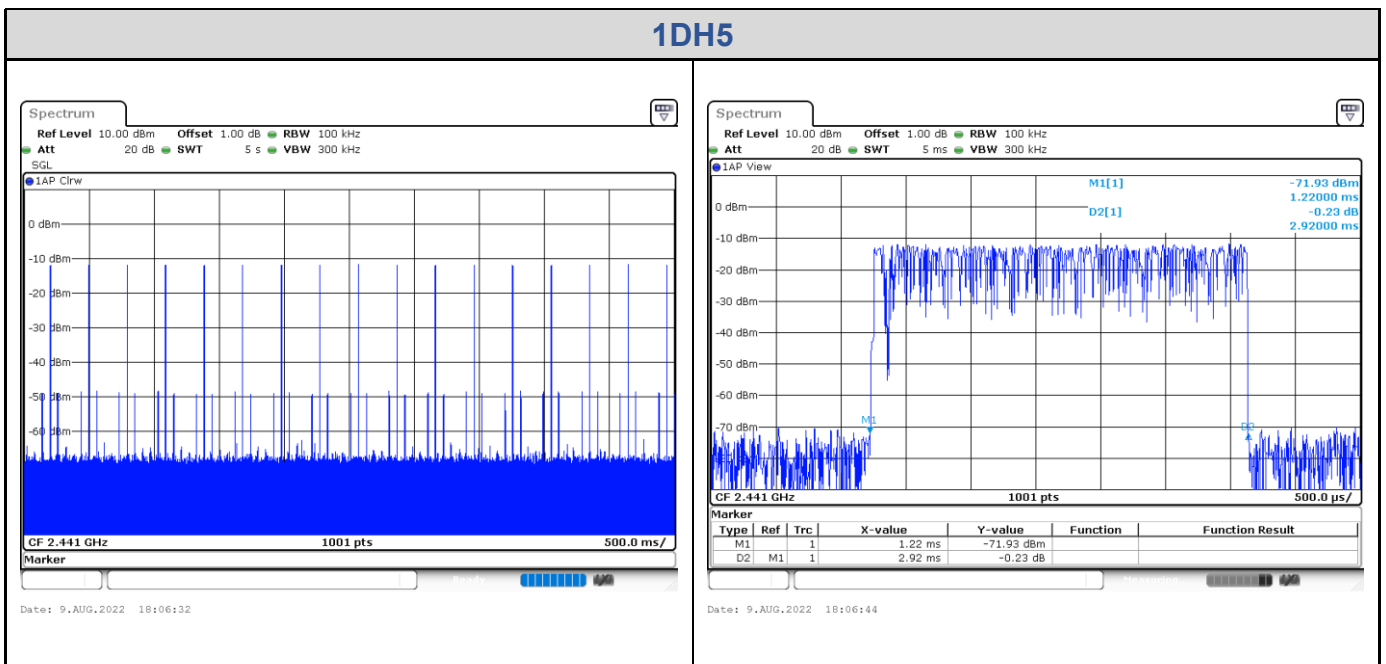

8DPSK

Data Mode	Number of transfer in a 31.6 (79Hopping*0.4s)	Package transfer time (msec)	Dwell time (s)	Limit (s)	Result
3DH5	17 (times / 5 sec) * 6.32 = 107.44 times	2.935	0.315336	0.4	Pass

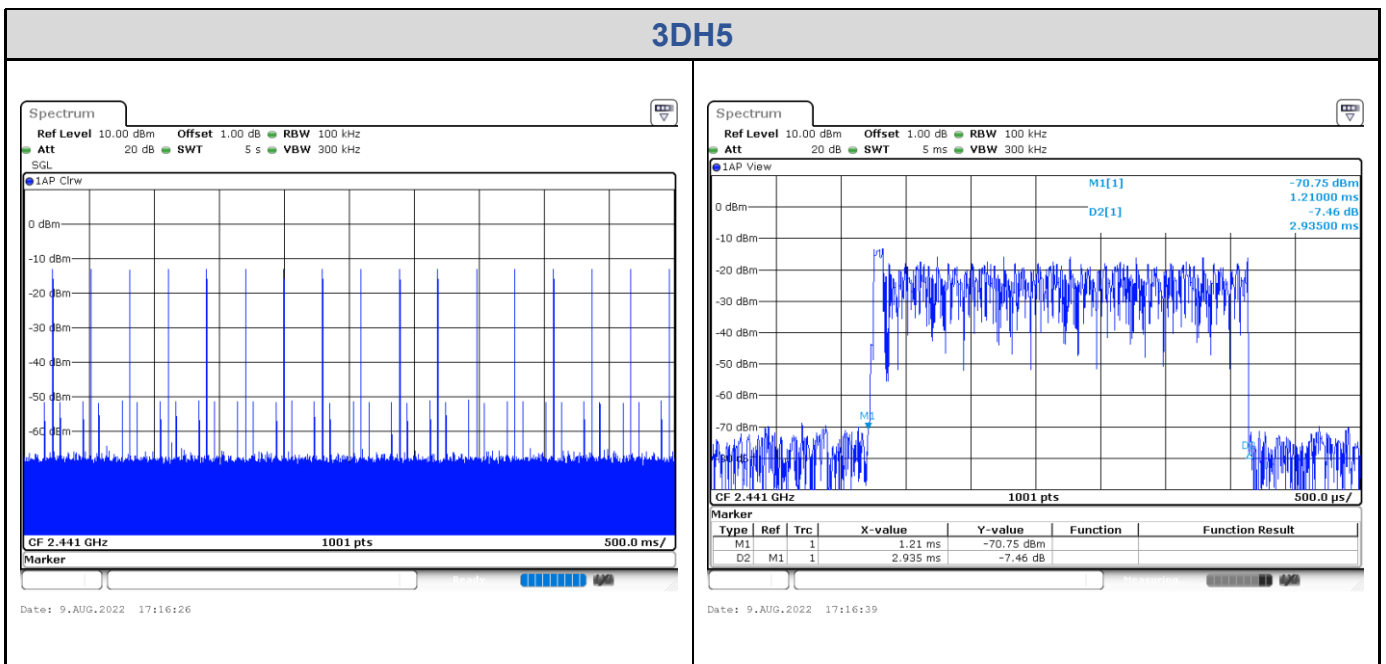

# Appendix B: Test Results of Radiated Spurious Emissions & Mains Conducted Emission Test

## Band Edges, 2.31GHz ~ 2.9GHz


### GFSK

#### Low Channel (Horizontal) Peak & Average

#### Low Channel (Vertical) Peak & Average




TUV Rheinland Taiwan Ltd.  
No. 458-18, Sec 2, Feniiao, Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)  
Tel: +886-2172-1000 Fax: +886-2172-1322

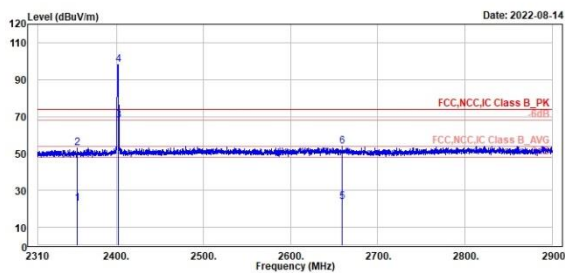

	Freq	Level	Read	Limit	Over	APos	TPos	Remark	Pol/Phase	Note
	MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	cm	deg		
1	2355.19	22.98	-14.42	37.48	54.00	-31.02	277	220 Average	Horizontal	CF
2	2355.19	53.08	15.68	37.48	74.00	-20.92	277	220 Peak	Horizontal	
3 *	2402.00	68.18	30.55	37.63	54.00	14.18	277	220 Average	Horizontal	CF
4 *	2402.00	98.28	60.65	37.63	74.00	24.28	277	220 Peak	Horizontal	
5	2658.93	23.77	-14.23	38.00	54.00	-30.23	277	220 Average	Horizontal	CF
6	2658.93	53.87	15.87	38.00	74.00	-20.13	277	220 Peak	Horizontal	




TUV Rheinland Taiwan Ltd.  
No. 458-18, Sec 2, Feniiao, Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)  
Tel: +886-2172-1000 Fax: +886-2172-1322

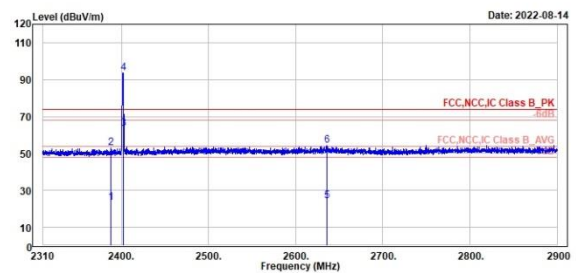

	Freq	Level	Read	Limit	Over	APos	TPos	Remark	Pol/Phase	Note
	MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	cm	deg		
1	2388.35	23.05	-14.52	37.57	54.00	-30.95	170	47 Average	Vertical	CF
2	2388.35	53.15	15.58	37.57	74.00	-20.85	170	47 Peak	Vertical	
3 *	2402.00	63.33	25.70	37.63	54.00	9.33	170	47 Average	Vertical	CF
4 *	2402.00	93.43	55.80	37.63	74.00	19.43	170	47 Peak	Vertical	
5	2635.92	24.28	-13.73	38.01	54.00	-29.72	170	47 Average	Vertical	CF
6	2635.92	54.38	16.37	38.01	74.00	-19.62	170	47 Peak	Vertical	

**GFSK**
**High Channel (Horizontal) Peak & Average**
**High Channel (Vertical) Peak & Average**



TÜV Rheinland Taiwan Ltd.  
 No. 458-18, Sec 2, Feniiao, Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)  
 Tel: +886-2172-1000 Fax: +886-2172-1322

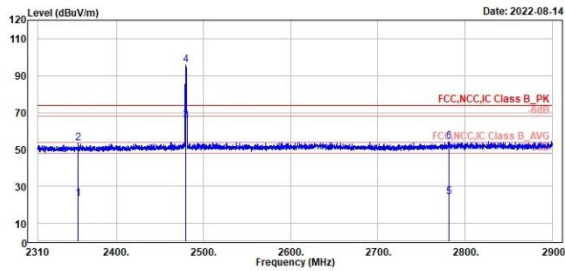

	Read Level	Read Level Factor	Limit Line	Over Limit	APos	TPos	Remark	Pol/Phase	Note
	MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	cm	deg	
1	2355.90	23.09	-14.31	37.40	54.00	-30.91	189	246	Average Horizontal CF
2	2355.90	53.19	15.79	37.40	74.00	-20.81	189	246	Peak Horizontal
3 *	2480.00	65.54	27.75	37.79	54.00	11.54	189	246	Average Horizontal CF
4 *	2480.00	95.64	57.85	37.79	74.00	21.64	189	246	Peak Horizontal
5	2781.53	24.34	-13.84	38.18	54.00	-29.66	189	246	Average Horizontal CF
6	2781.53	54.44	16.26	38.18	74.00	-19.56	189	246	Peak Horizontal




TÜV Rheinland Taiwan Ltd.  
 No. 458-18, Sec 2, Feniiao, Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)  
 Tel: +886-2172-1000 Fax: +886-2172-1322

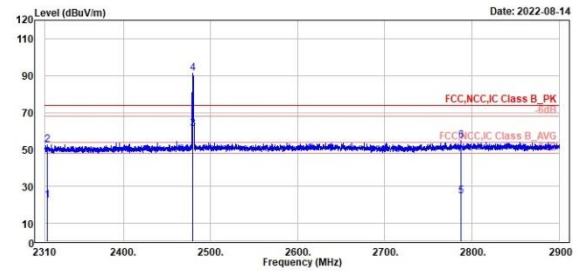

	Read Level	Read Level Factor	Limit Line	Over Limit	APos	TPos	Remark	Pol/Phase	Note
	MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	cm	deg	
1	2312.60	22.44	-14.82	37.26	54.00	-31.56	322	86	Average Vertical CF
2	2312.60	52.54	15.28	37.26	74.00	-21.46	322	86	Peak Vertical
3 *	2480.00	61.16	23.37	37.79	54.00	7.16	322	86	Average Vertical CF
4 *	2480.00	91.26	53.47	37.79	74.00	17.26	322	86	Peak Vertical
5	2787.19	24.48	-13.71	38.19	54.00	-29.52	322	86	Average Vertical CF
6	2787.19	54.58	16.39	38.19	74.00	-19.42	322	86	Peak Vertical

**8DPSK**
**Low Channel (Horizontal) Peak & Average**
**Low Channel (Vertical) Peak & Average**



TÜV Rheinland Taiwan Ltd.  
 No. 458-18, Sec 2, Fenhiao, Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)  
 Tel: +886-2172-1000 Fax: +886-2172-1322

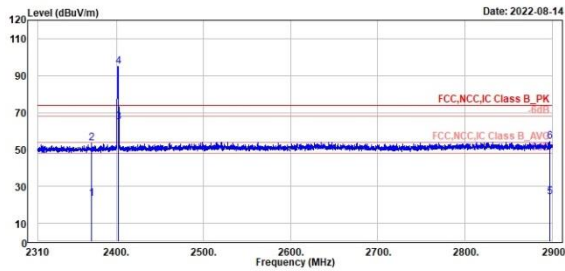

	Read	Limit	Over	APos	TPos	Remark	Pol/Phase	Note		
1	2371.60	23.29	-14.20	37.49	54.00	-30.71	276	233 Average	Horizontal	CF
2	2371.60	53.39	15.90	37.49	74.00	-20.61	276	233 Peak	Horizontal	CF
3 *	2402.00	64.98	27.35	37.63	54.00	10.98	276	233 Average	Horizontal	CF
4 *	2402.00	95.08	57.45	37.63	74.00	21.08	276	233 Peak	Horizontal	CF
5	2897.52	24.16	-14.25	38.41	54.00	-29.84	276	233 Average	Horizontal	CF
6	2897.52	54.26	15.85	38.41	74.00	-19.74	276	233 Peak	Horizontal	CF




TÜV Rheinland Taiwan Ltd.  
 No. 458-18, Sec 2, Fenhiao, Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)  
 Tel: +886-2172-1000 Fax: +886-2172-1322

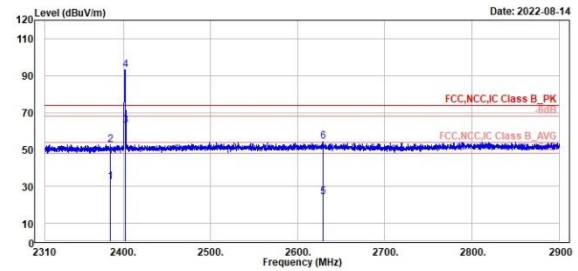

	Read	Limit	Over	APos	TPos	Remark	Pol/Phase	Note		
1	2385.40	32.56	-4.99	37.55	54.00	-21.44	172	48 Average	Vertical	CF
2	2385.40	52.66	15.11	37.55	74.00	-21.34	172	48 Peak	Vertical	CF
3 *	2402.00	62.90	25.27	37.63	54.00	8.90	172	48 Average	Vertical	CF
4 *	2402.00	93.00	55.37	37.63	74.00	19.00	172	48 Peak	Vertical	CF
5	2629.19	24.23	-13.77	38.00	54.00	-29.77	172	48 Average	Vertical	CF
6	2629.19	54.33	16.33	38.00	74.00	-19.67	172	48 Peak	Vertical	CF

**8DPSK**
**High Channel (Horizontal) Peak & Average**
**High Channel (Vertical) Peak & Average**



TÜV Rheinland Taiwan Ltd.  
 No. 458-18, Sec 2, Feniiao, Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)  
 Tel: +886-2172-1000 Fax: +886-2172-1322

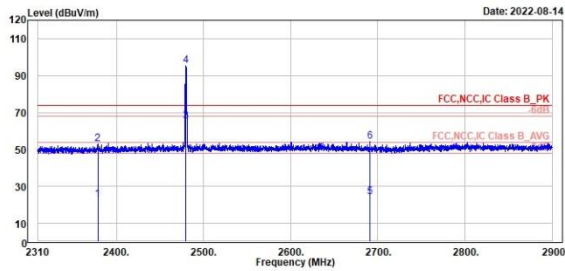

No.	Freq	Level	Read		Limit		Over	APos	TPos	Remark	Pol/Phase	Note
			dBuV/m	dBuV	dB/m	dBuV/m						
1	2378.79	22.87	-14.66	37.53	54.00	-31.13	310	72	Average	Horizontal	CF	
2	2378.79	52.97	15.44	37.53	74.00	-21.03	310	72	Peak	Horizontal		
3 *	2480.00	65.38	27.59	37.79	54.00	11.38	310	72	Average	Horizontal	CF	
4 *	2480.00	95.48	57.69	37.79	74.00	21.48	310	72	Peak	Horizontal		
5	2690.55	24.17	-13.74	37.91	54.00	-29.83	310	72	Average	Horizontal	CF	
6	2690.55	54.27	16.36	37.91	74.00	-19.73	310	72	Peak	Horizontal		



TÜV Rheinland Taiwan Ltd.  
 No. 458-18, Sec 2, Feniiao, Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)  
 Tel: +886-2172-1000 Fax: +886-2172-1322

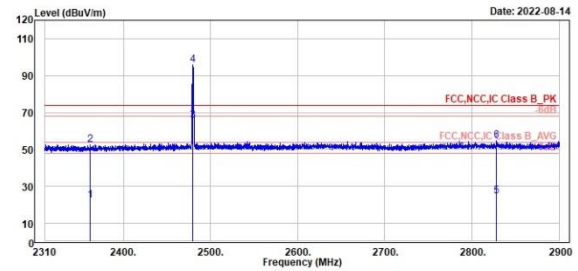

No.	Freq	Level	Read		Limit		Over	APos	TPos	Remark	Pol/Phase	Note
			dBuV/m	dBuV	dB/m	dBuV/m						
1	2361.68	22.39	-15.05	37.44	54.00	-31.61	282	70	Average	Vertical	CF	
2	2361.68	52.49	15.05	37.44	74.00	-21.51	282	70	Peak	Vertical		
3 *	2480.00	65.51	27.72	37.79	54.00	11.51	282	70	Average	Vertical	CF	
4 *	2480.00	95.61	57.82	37.79	74.00	21.61	282	70	Peak	Vertical		
5	2827.90	24.59	-13.59	38.18	54.00	-29.41	282	70	Average	Vertical	CF	
6	2827.90	54.69	16.51	38.18	74.00	-19.31	282	70	Peak	Vertical		

Spurious Emissions, Tx Mode, 9kHz ~ 30MHz


8DPSK

High Channel(Open) 9kHz~150kHz

High Channel(Open) 150kHz~30MHz




TUV Rheinland Taiwan Ltd.  
No. 458-18, Sec 2, Feniiao, Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)  
Tel: +886-2172-1000 Fax: +886-2172-1322

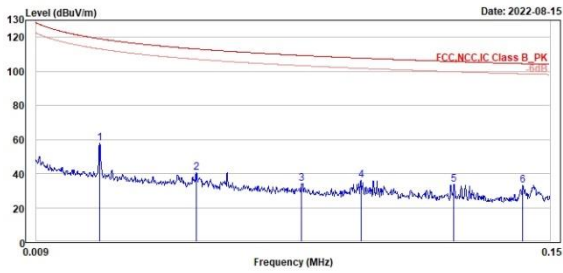

Peak	Freq (MHz)	Level (dBuV/m)	Read Level (dBuV)	Level Factor (dB/m)	Limit Line (dBuV/m)	Over Limit (dB)	APos (cm)	TPos (deg)	Remark	Pol/Phase	Note
1	0.03	57.78	38.59	19.19	119.13	-61.35	100	290	QP	Open	
2	0.05	40.74	21.50	19.24	113.11	-72.37	100	158	QP	Open	
3	0.08	34.34	15.73	18.61	109.34	-75.00	100	174	QP	Open	
4	0.10	35.93	17.67	18.26	107.76	-71.83	100	157	QP	Open	
5	0.12	33.40	15.10	18.30	105.75	-72.35	100	133	QP	Open	
6	0.14	33.33	14.96	18.37	104.52	-71.19	100	51	QP	Open	




TUV Rheinland Taiwan Ltd.  
No. 458-18, Sec 2, Feniiao, Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)  
Tel: +886-2172-1000 Fax: +886-2172-1322

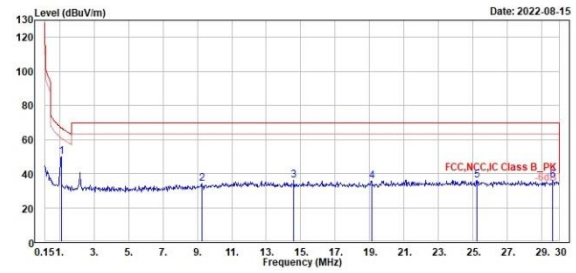

Peak	Freq (MHz)	Level (dBuV/m)	Read Level (dBuV)	Level Factor (dB/m)	Limit Line (dBuV/m)	Over Limit (dB)	APos (cm)	TPos (deg)	Remark	Pol/Phase	Note
1	1.11	49.82	30.54	19.28	66.74	-16.92	100	137	QP	Open	
2	9.25	34.01	12.88	21.13	69.50	-35.49	100	328	QP	Open	
3	14.60	36.11	14.28	21.83	69.50	-33.39	100	205	QP	Open	
4	19.10	35.74	13.60	22.14	69.50	-33.76	100	179	QP	Open	
5	25.22	36.21	13.77	22.44	69.50	-33.29	100	87	QP	Open	
6	29.64	35.96	13.33	22.63	69.50	-33.54	100	210	QP	Open	

**Spurious Emissions, Tx Mode, 30MHz ~ 1GHz**
**8DPSK**
**High Channel (Horizontal)**
**High Channel (Vertical)**



TÜV Rheinland Taiwan Ltd.  
 No. 458-18, Sec 2, Fenliao, Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)  
 Tel: +886-2172-1000 Fax: +886-2172-1322

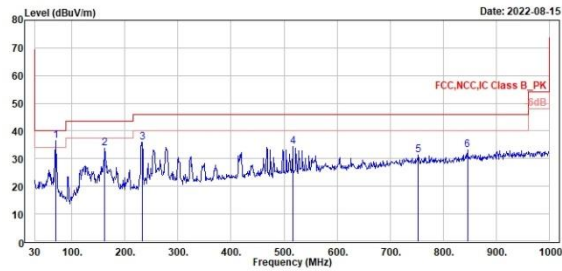

No.	Freq	Level	Read	Limit	Over	APos	TPos	Remark	Pol/Phase	Note
1	69.77	36.37	44.93	-8.56	40.00	-3.63	150	204 QP	Horizontal	
2	161.92	33.83	39.77	-5.94	43.50	-9.67	150	259 QP	Horizontal	
3	232.73	36.03	43.03	-7.00	46.00	-9.97	150	177 QP	Horizontal	
4	515.97	34.50	35.93	-1.43	46.00	-11.50	150	84 QP	Horizontal	
5	753.62	31.36	28.70	2.66	46.00	-14.64	150	68 QP	Horizontal	
6	845.77	33.09	29.36	3.73	46.00	-12.91	150	102 QP	Horizontal	



TÜV Rheinland Taiwan Ltd.  
 No. 458-18, Sec 2, Fenliao, Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)  
 Tel: +886-2172-1000 Fax: +886-2172-1322

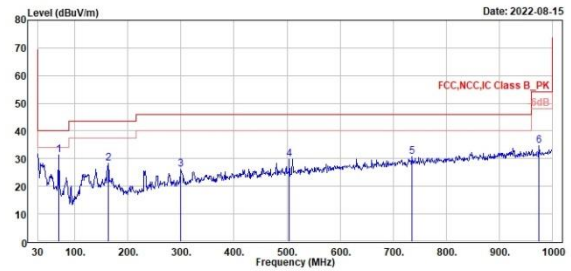

No.	Freq	Level	Read	Limit	Over	APos	TPos	Remark	Pol/Phase	Note
1	69.77	31.36	39.92	-8.56	40.00	-8.64	150	348 QP	Vertical	
2	162.89	28.41	34.35	-5.94	43.50	-15.09	150	277 QP	Vertical	
3	299.66	26.28	31.01	-4.73	46.00	-19.72	150	100 QP	Vertical	
4	504.33	29.86	31.62	-1.76	46.00	-16.14	150	132 QP	Vertical	
5	736.16	30.59	28.42	2.17	46.00	-15.41	150	36 QP	Vertical	
6	975.75	34.74	28.95	5.79	54.00	-19.26	150	245 QP	Vertical	



Spurious Emissions, Tx Mode, 1GHz ~ 26.5GHz


GFSK

Low Channel (Horizontal)

Low Channel (Vertical)




TUV Rheinland Taiwan Ltd.  
No. 458-18, Sec 2, Feniiao, Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)  
Tel: +886-2172-1000 Fax: +886-2172-1322

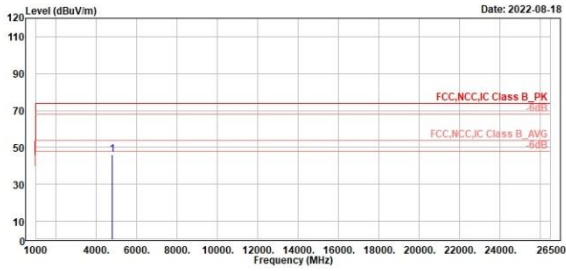

Read	Limit	Over	APos	TPos	Remark	Pol/Phase	Note
Freq	Level	Level Factor	Line	Limit			
MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	cm	deg
1	4884.00	46.24	56.11	-9.87	74.00	-27.76	284 33 Peak Horizontal



TUV Rheinland Taiwan Ltd.  
No. 458-18, Sec 2, Feniiao, Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)  
Tel: +886-2172-1000 Fax: +886-2172-1322

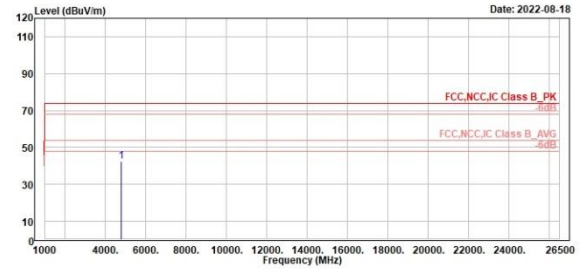

Read	Limit	Over	APos	TPos	Remark	Pol/Phase	Note
Freq	Level	Level Factor	Line	Limit			
MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	cm	deg
1	4884.00	42.40	52.27	-9.87	74.00	-31.60	300 72 Peak Vertical


GFSK

Middle Channel (Horizontal)

Middle Channel (Vertical)




TUV Rheinland Taiwan Ltd.  
No. 458-18, Sec 2, Feniiao, Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)  
Tel: +886-2172-1000 Fax: +886-2172-1322

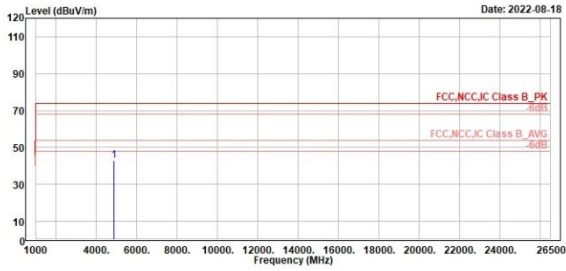

Read	Limit	Over	APos	TPos	Remark	Pol/Phase	Note		
Freq	Level	Level Factor	Line	Limit					
MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	cm	deg		
1	4882.00	42.95	52.73	-9.78	74.00	-31.05	100	173 Peak	Horizontal



TUV Rheinland Taiwan Ltd.  
No. 458-18, Sec 2, Feniiao, Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)  
Tel: +886-2172-1000 Fax: +886-2172-1322

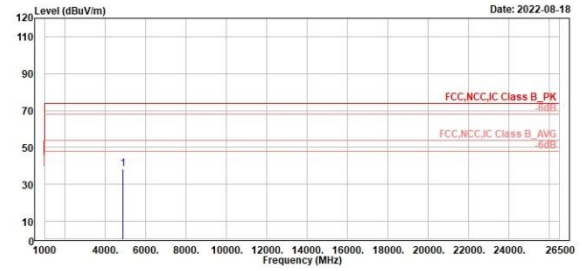

Read	Limit	Over	APos	TPos	Remark	Pol/Phase	Note		
Freq	Level	Level Factor	Line	Limit					
MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	cm	deg		
1	4882.00	38.15	47.93	-9.78	74.00	-35.85	300	124 Peak	Vertical


GFSK

High Channel (Horizontal)

High Channel (Vertical)




TUV Rheinland Taiwan Ltd.  
No. 458-18, Sec 2, Feniiao, Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)  
Tel: +886-2172-1000 Fax: +886-2172-1322

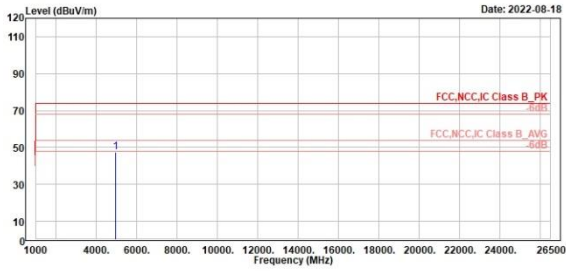

1	4968.00	47.29	56.83	-9.54	74.00	-26.71	300	312	Peak	Horizontal
---	---------	-------	-------	-------	-------	--------	-----	-----	------	------------



TUV Rheinland Taiwan Ltd.  
No. 458-18, Sec 2, Feniiao, Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)  
Tel: +886-2172-1000 Fax: +886-2172-1322

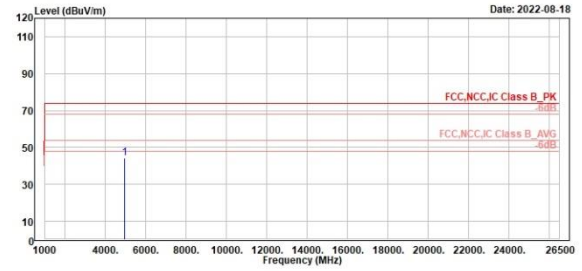

1	4968.00	44.36	53.90	-9.54	74.00	-29.64	400	260	Peak	Vertical
---	---------	-------	-------	-------	-------	--------	-----	-----	------	----------


8DPSK

Low Channel (Horizontal)

Low Channel (Vertical)




TUV Rheinland Taiwan Ltd.  
No. 458-18, Sec 2, Feniiao, Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)  
Tel: +886-2172-1000 Fax: +886-2172-1322

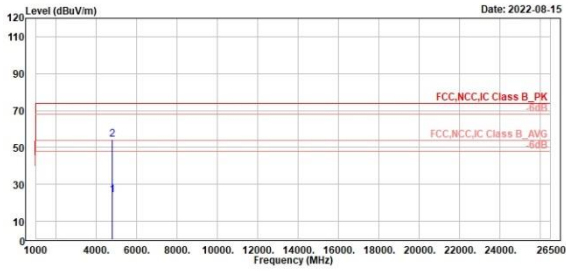

Read	Limit	Over	APos	TPos	Remark	Pol/Phase	Note		
Freq	Level	Level Factor	Line	Limit					
MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	cm	deg		
1	4884.00	24.04	33.91	-9.87	54.00	-29.96	150	7 Average	Horizontal CF
2	4884.00	54.14	64.01	-9.87	74.00	-19.86	150	7 Peak	Horizontal



TUV Rheinland Taiwan Ltd.  
No. 458-18, Sec 2, Feniiao, Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)  
Tel: +886-2172-1000 Fax: +886-2172-1322

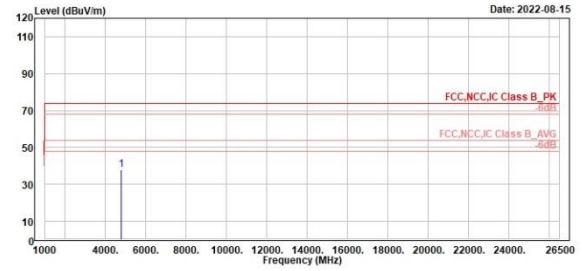

Read	Limit	Over	APos	TPos	Remark	Pol/Phase	Note		
Freq	Level	Level Factor	Line	Limit					
MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	cm	deg		
1	4884.00	37.75	47.62	-9.87	74.00	-36.25	300	205 Peak	Vertical


8DPSK

Middle Channel (Horizontal)

Middle Channel (Vertical)




TUV Rheinland Taiwan Ltd.  
No. 458-18, Sec 2, Feniiao, Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)  
Tel: +886-2172-1000 Fax: +886-2172-1322

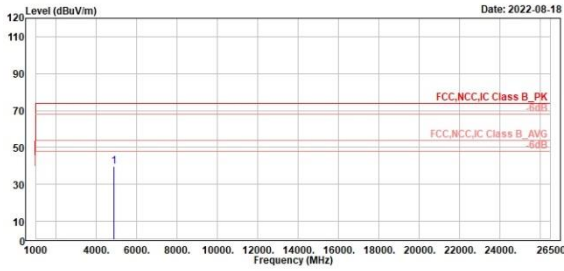

Read	Limit	Over	APos	TPos	Remark	Pol/Phase	Note
Freq	Level	Level	Line	Limit			
MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	cm	deg
1	4882.00	39.59	49.37	-9.78	74.00	-34.41	300 92 Peak Horizontal



TUV Rheinland Taiwan Ltd.  
No. 458-18, Sec 2, Feniiao, Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)  
Tel: +886-2172-1000 Fax: +886-2172-1322

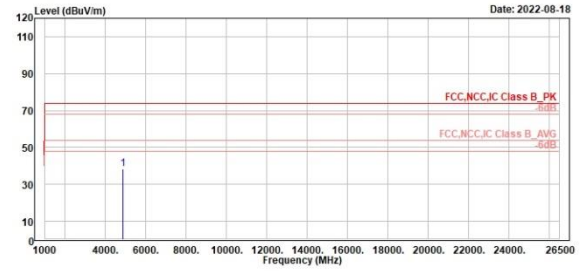

Read	Limit	Over	APos	TPos	Remark	Pol/Phase	Note
Freq	Level	Level	Line	Limit			
MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	cm	deg
1	4882.00	38.40	48.18	-9.78	74.00	-35.60	347 360 Peak Vertical


8DPSK

High Channel (Horizontal)

High Channel (Vertical)




TUV Rheinland Taiwan Ltd.  
No. 458-18, Sec 2, Feniiao, Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)  
Tel: +886-2172-1000 Fax: +886-2172-1322

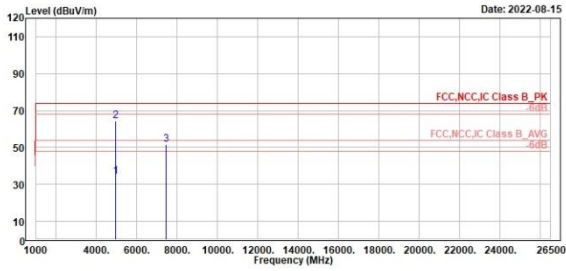

Line	Freq	Level	Read Level	Factor	Limit	Over	APos	TPos	Remark	Pol/Phase	Note
	MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	cm	deg			
1	4968.00	34.21	43.75	-9.54	54.00	-19.79	200	194	Average	Horizontal	cf
2	4968.00	64.31	73.85	-9.54	74.00	-9.69	200	194	Peak	Horizontal	
3	7448.00	51.64	58.99	-7.35	74.00	-22.36	200	194	Peak	Horizontal	



TUV Rheinland Taiwan Ltd.  
No. 458-18, Sec 2, Feniiao, Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)  
Tel: +886-2172-1000 Fax: +886-2172-1322

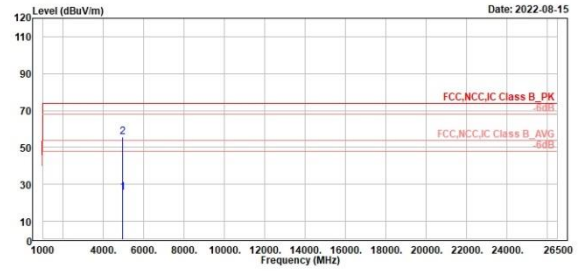

Line	Freq	Level	Read Level	Factor	Limit	Over	APos	TPos	Remark	Pol/Phase	Note
	MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	cm	deg			
1	4968.00	25.37	34.91	-9.54	54.00	-28.63	200	50	Average	Vertical	cf
2	4968.00	55.47	65.01	-9.54	74.00	-18.53	200	50	Peak	Vertical	

Mains Conducted Emission, 150kHz ~ 30MHz


EUT with Type-C Cable

(Line)

(Neutral)



TÜV Rheinland Taiwan Ltd.  
No. 458-18, Sec. 2, Fenhiao, Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)  
Tel: +886-2112-1000 Fax: +886-2112-1322

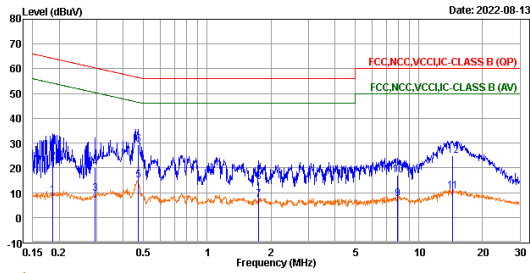


Trace: 1

	Freq	Level	Read Level	Factor	Limit	Over	Limit	Remark	Pol/Phase	Note
	MHz	dBuV	dBuV	dB	dBuV	dB	dB			
1	0.19	8.98	-0.63	9.61	54.22	-45.24	Average	line1		
2	0.19	22.51	12.90	9.61	64.22	-41.71	QP	line1		
3	0.30	9.35	-0.26	9.61	50.37	-41.02	Average	line1		
4	0.30	20.04	10.43	9.61	60.37	-40.33	QP	line1		
5	0.47	14.83	5.21	9.62	46.48	-31.65	Average	line1		
6	0.47	29.44	19.82	9.62	56.48	-27.04	QP	line1		
7	1.75	7.27	-2.38	9.65	46.00	-38.73	Average	line1		
8	1.75	14.42	4.77	9.65	56.00	-41.58	QP	line1		
9	7.93	7.41	-2.30	9.71	50.00	-42.59	Average	line1		
10	7.93	16.99	7.28	9.71	60.00	-43.01	QP	line1		
11	14.42	10.61	0.88	9.73	50.00	-39.39	Average	line1		
12	14.42	24.81	15.08	9.73	60.00	-35.19	QP	line1		



TÜV Rheinland Taiwan Ltd.  
No. 458-18, Sec. 2, Fenhiao, Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)  
Tel: +886-2112-1000 Fax: +886-2112-1322

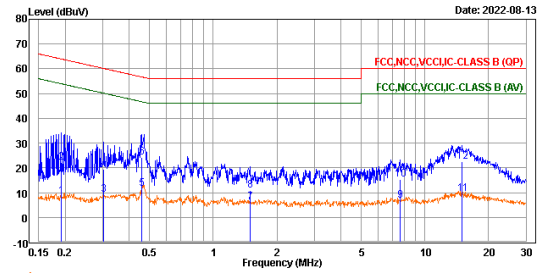

Trace: 1

	Freq	Level	Read Level	Factor	Limit	Over	Limit	Remark	Pol/Phase	Note
	MHz	dBuV	dBuV	dB	dBuV	dB	dB			
1	0.19	8.46	-1.13	9.59	53.97	-45.51	Average	neutral		
2	0.19	22.15	12.56	9.59	63.97	-41.82	QP	neutral		
3	0.30	9.13	-0.46	9.59	50.12	-40.99	Average	neutral		
4	0.30	19.40	9.81	9.59	60.12	-40.72	QP	neutral		
5	0.46	11.46	1.86	9.60	46.73	-35.27	Average	neutral		
6	0.46	24.20	14.60	9.60	56.73	-32.53	QP	neutral		
7	1.50	6.25	-3.37	9.62	46.00	-39.75	Average	neutral		
8	1.50	10.81	1.19	9.62	56.00	-45.19	QP	neutral		
9	7.62	6.91	-2.81	9.72	50.00	-43.09	Average	neutral		
10	7.62	15.25	5.53	9.72	60.00	-44.75	QP	neutral		
11	15.00	9.66	-0.12	9.78	50.00	-40.34	Average	neutral		
12	15.00	22.46	12.68	9.78	60.00	-37.54	QP	neutral		

EUT with Lightning Cable

(Line)


(Neutral)



TÜV Rheinland Taiwan Ltd.  
No. 458-18, Sec. 2, Fenhiao, Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)  
Tel: +886-2112-1000 Fax: +886-2112-1322




TÜV Rheinland Taiwan Ltd.  
No. 458-18, Sec. 2, Fenhiao, Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)  
Tel: +886-2112-1000 Fax: +886-2112-1322

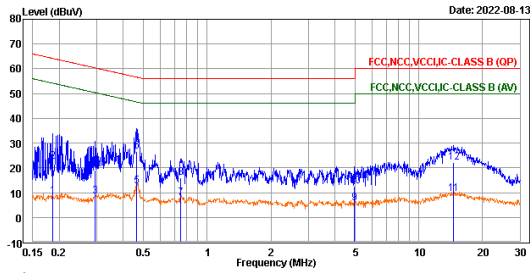

Trace: 1

	Freq	Level	Read Level	Factor	Limit Line	Over Limit	Remark	Pol/Phase	Note
	MHz	dBuV	dBuV	dB	dBuV	dB			
1	0.19	8.36	-1.25	9.61	54.22	-45.86	Average	line1	
2	0.19	22.51	12.90	9.61	64.22	-41.71	QP	line1	
3	0.30	8.47	-1.14	9.61	50.37	-41.90	Average	line1	
4	0.30	18.98	9.37	9.61	60.37	-41.39	QP	line1	
5	0.47	12.73	3.11	9.62	46.60	-33.87	Average	line1	
6	0.47	26.51	16.89	9.62	56.60	-30.09	QP	line1	
7	0.75	7.72	-1.91	9.63	46.00	-38.28	Average	line1	
8	0.75	16.10	6.47	9.63	56.00	-39.90	QP	line1	
9	4.96	5.58	-4.11	9.69	46.00	-40.42	Average	line1	
10	4.96	12.47	2.78	9.69	56.00	-43.53	QP	line1	
11	14.56	9.41	-0.32	9.73	50.00	-40.59	Average	line1	
12	14.56	22.30	12.57	9.73	60.00	-37.70	QP	line1	

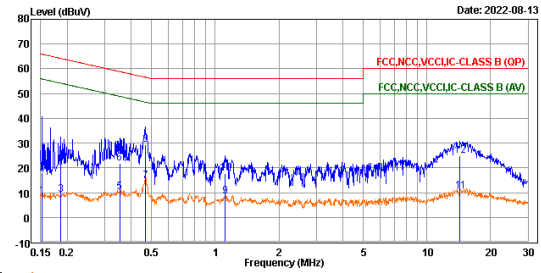

Trace: 1

	Freq	Level	Read Level	Factor	Limit Line	Over Limit	Remark	Pol/Phase	Note
	MHz	dBuV	dBuV	dB	dBuV	dB			
1	0.15	8.52	-1.07	9.59	55.88	-47.36	Average	neutral	
2	0.15	18.06	8.47	9.59	65.88	-47.82	QP	neutral	
3	0.19	9.00	-0.59	9.59	54.18	-45.18	Average	neutral	
4	0.19	22.17	12.58	9.59	64.18	-42.01	QP	neutral	
5	0.35	10.17	0.57	9.60	48.88	-38.71	Average	neutral	
6	0.35	21.95	12.35	9.60	58.88	-36.93	QP	neutral	
7	0.47	14.73	5.13	9.60	46.56	-31.83	Average	neutral	
8	0.47	29.50	19.90	9.60	56.56	-27.06	QP	neutral	
9	1.12	8.39	-1.21	9.60	46.00	-37.61	Average	neutral	
10	1.12	17.55	7.95	9.60	56.00	-38.45	QP	neutral	
11	14.35	10.68	0.90	9.78	50.00	-39.32	Average	neutral	
12	14.35	24.80	15.02	9.78	60.00	-35.20	QP	neutral	