



Nemko Test Report: 2014_248302_FCC_15247

Applicant: HM Electronics, Inc.
14110 Stowe Drive
Poway, CA 92064
USA

**Equipment Under Test:
(E.U.T.)** 1402

FCC Identifier: BYM1402

IC Identifier: 1860A-1402

In Accordance With: **FCC Part 15, Subpart C, 15.247 and
Industry Canada RSS-210, Issue 8**
Frequency Hopping Transmitters

Tested By: Nemko USA, Inc.
2210 Faraday Ave. Ste 150
Carlsbad, CA 92008
USA

TESTED BY:

A handwritten signature in black ink, appearing to read "David Light".

David Light, Wireless Engineer

DATE:

31 January 2014

APPROVED BY:

A handwritten signature in black ink, appearing to read "BKetterling".

Bruce Ketterling, Reviewer

DATE:

28 March 2014

Total Number of Pages: 38

Table of Contents

SECTION 1.	SUMMARY OF TEST RESULTS	3
SECTION 2.	EQUIPMENT UNDER TEST (E.U.T.)	5
SECTION 3.	CHANNEL SEPARATION	6
SECTION 4.	TIME OF OCCUPANCY	11
SECTION 5.	PEAK POWER OUTPUT	16
SECTION 6.	SPURIOUS EMISSIONS (CONDUCTED)	20
SECTION 7.	SPURIOUS EMISSIONS (RADIATED)	25
SECTION 8.	TEST EQUIPMENT LIST	27
ANNEX A - TEST DETAILS		28
ANNEX B - TEST DIAGRAMS		36

Section 1. Summary of Test Results

Manufacturer: HM Electronics, Inc.

Model No.: 1402

Serial No.: None

General: **All measurements are traceable to national standards.**

These tests were conducted on a sample of the equipment for the purpose of demonstrating compliance with Part 15, Subpart C, Paragraph 15.247 and Industry Canada RSS-210, Issue 8 for Frequency Hopping Spread Spectrum devices. Radiated tests were conducted in accordance with ANSI C63.4-2003. Radiated emissions are made on an open area test site. A description of the test facility is on file with the FCC and Industry Canada.



New Submission



Production Unit



Class II Permissive Change



Pre-Production Unit

THIS TEST REPORT RELATES ONLY TO THE ITEM(S) TESTED.

THE FOLLOWING DEVIATIONS FROM, ADDITIONS TO, OR EXCLUSIONS FROM THE TEST SPECIFICATIONS HAVE BEEN MADE.

See " Summary of Test Data".



NVLAP Lab Code 200116-0

This report must not be used to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the Federal Government. Nemko USA, Inc. is a NVLAP accredited laboratory.

Nemko USA Inc. authorizes the above named company to reproduce this report provided it is reproduced in its entirety and for use by the company's employees only.

Any use which a third party makes of this report, or any reliance on or decisions to be made based on it, are the responsibility of such third parties. Nemko USA Inc. accepts no responsibility for damages, if any, suffered by any third party as a result of decisions made or actions based on this report. This report applies only to the items tested.

Summary Of Test Data

NAME OF TEST	PARA. NO.	RESULT
Powerline Conducted Emissions	15.207(a) / RSS-Gen 7.2.4	NA
Channel Separation	15.247(a)(1) / RSS-210 A8.1(b)	Complies
Time of Occupancy	15.247(a)(1) / RSS-210 A8.1(d)	Complies
20 dB Occupied Bandwidth	15.247(a)(1) / RSS-210 A8.1(a)	Complies
Peak Power Output	15.247(b) / RSS-210 A8.4(2)	Complies
Spurious Emissions (Conducted)	15.247(d) / RSS-210 A8.5	Complies
Spurious Emissions (Radiated)	15.247(d) / RSS-Gen 7.2.2	Complies

Footnotes:

The EUT is powered by a 3.7 V lithium battery.

Section 2. Equipment Under Test (E.U.T.)

General Equipment Information

Frequency Band: 902 – 928 MHz
 2400 – 2483.5 MHz
 5725 – 5850 MHz

Operating Frequency Range: 2401.9 to 2481.4 MHz

Number of Channels: 47

Channel Spacing: 1.72 MHz

User Frequency Adjustment: Software controlled

Description of EUT

The 1402 is a 2.4 GHz FHSS wireless headset transceiver designed to operate with a base station transceiver.

Section 3. Channel Separation

NAME OF TEST: Channel Separation	PARA. NO.: 15.247(a)(1)
TESTED BY: David Light	DATE: 04 December 2013

Test Results: Complies.

Measurement Data: See 20 dB BW plot

Measured 20 dB bandwidth: 1.28 MHz
Channel Separation: 1.72 MHz


Equipment Used: 1036-1082-1472

Measurement Uncertainty: 1X10⁻⁷ppm

Temperature: 20 °C

Relative Humidity: 30 %


Test Data – Channel Separation

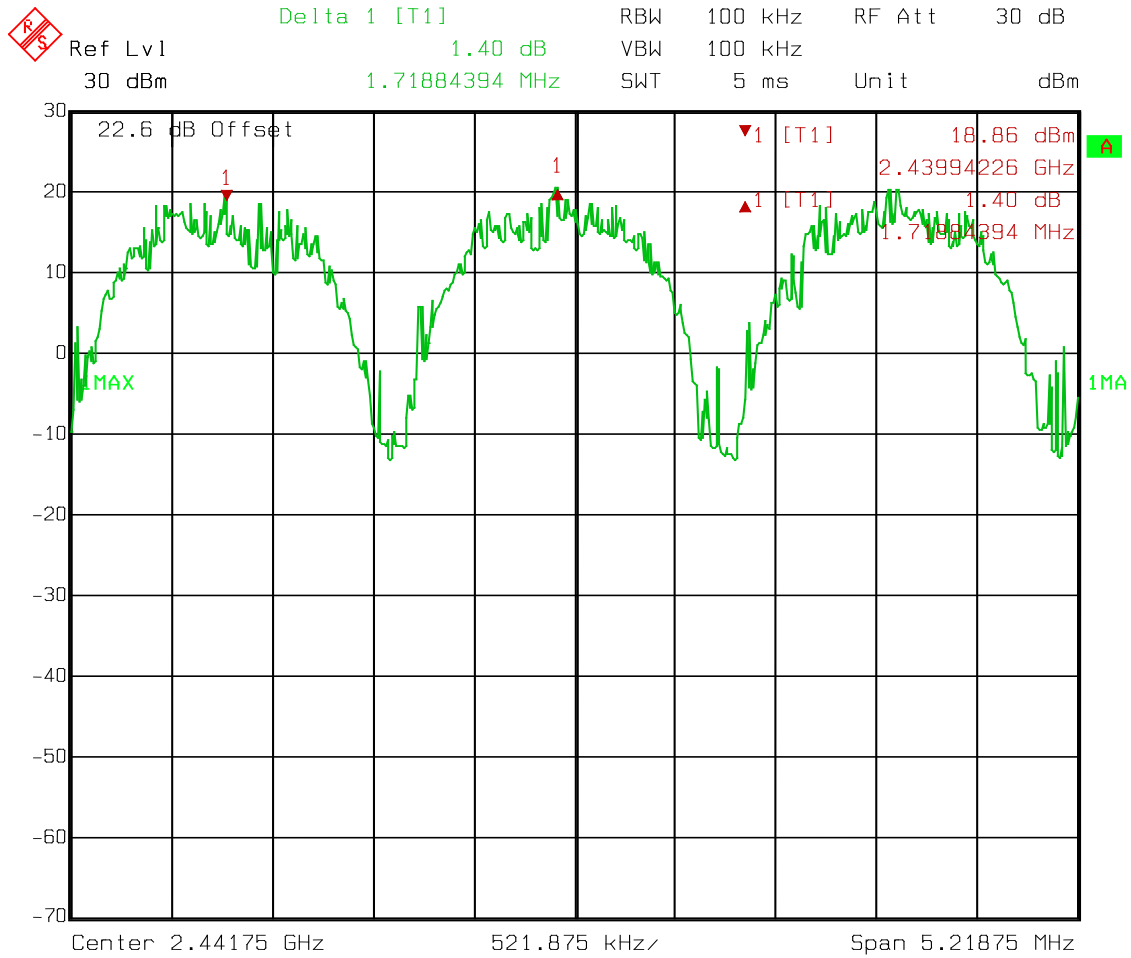

Date: 04.DEC.2013 13:30:49

Test Data – 20 dB Bandwidth


Low Channel

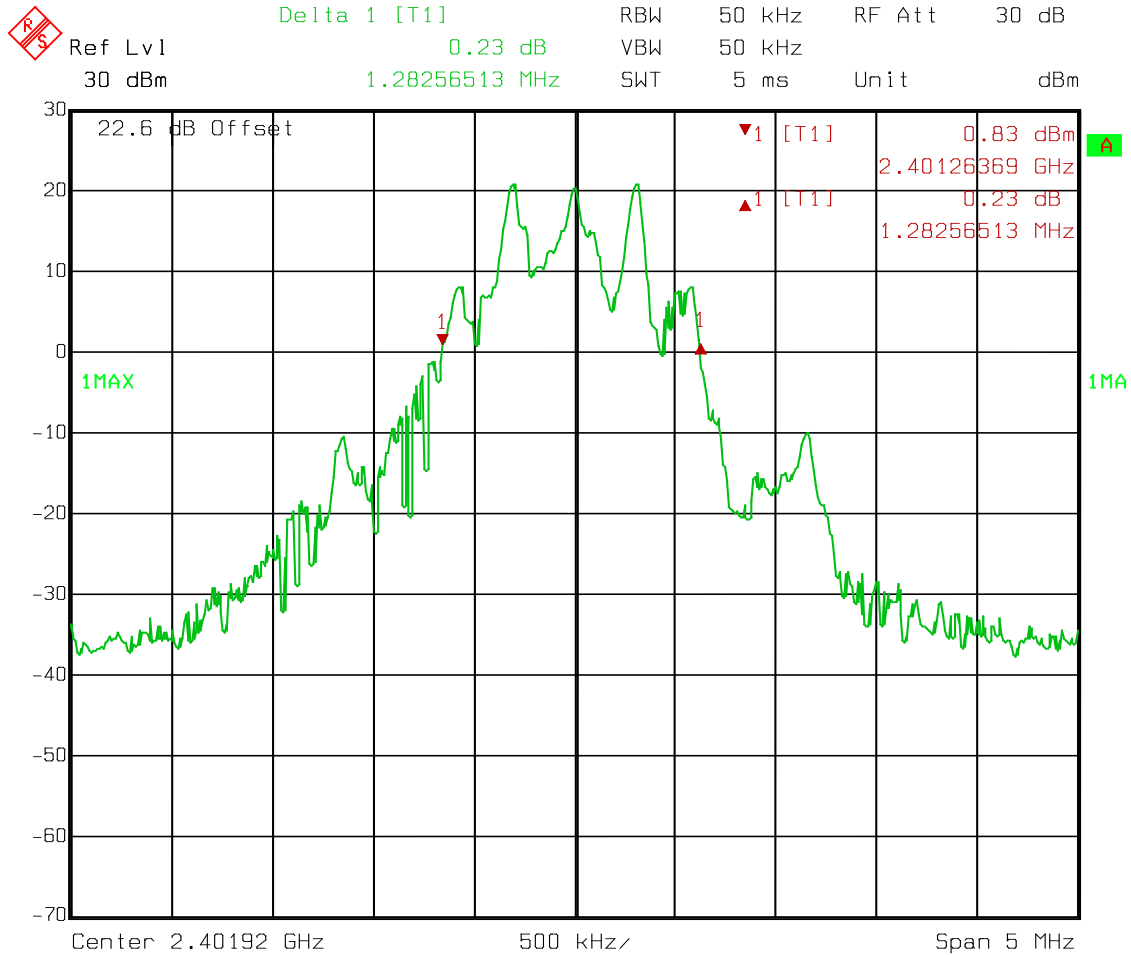

Date: 04.DEC.2013 15:59:28


Test Data – 20 dB Bandwidth

Mid Channel

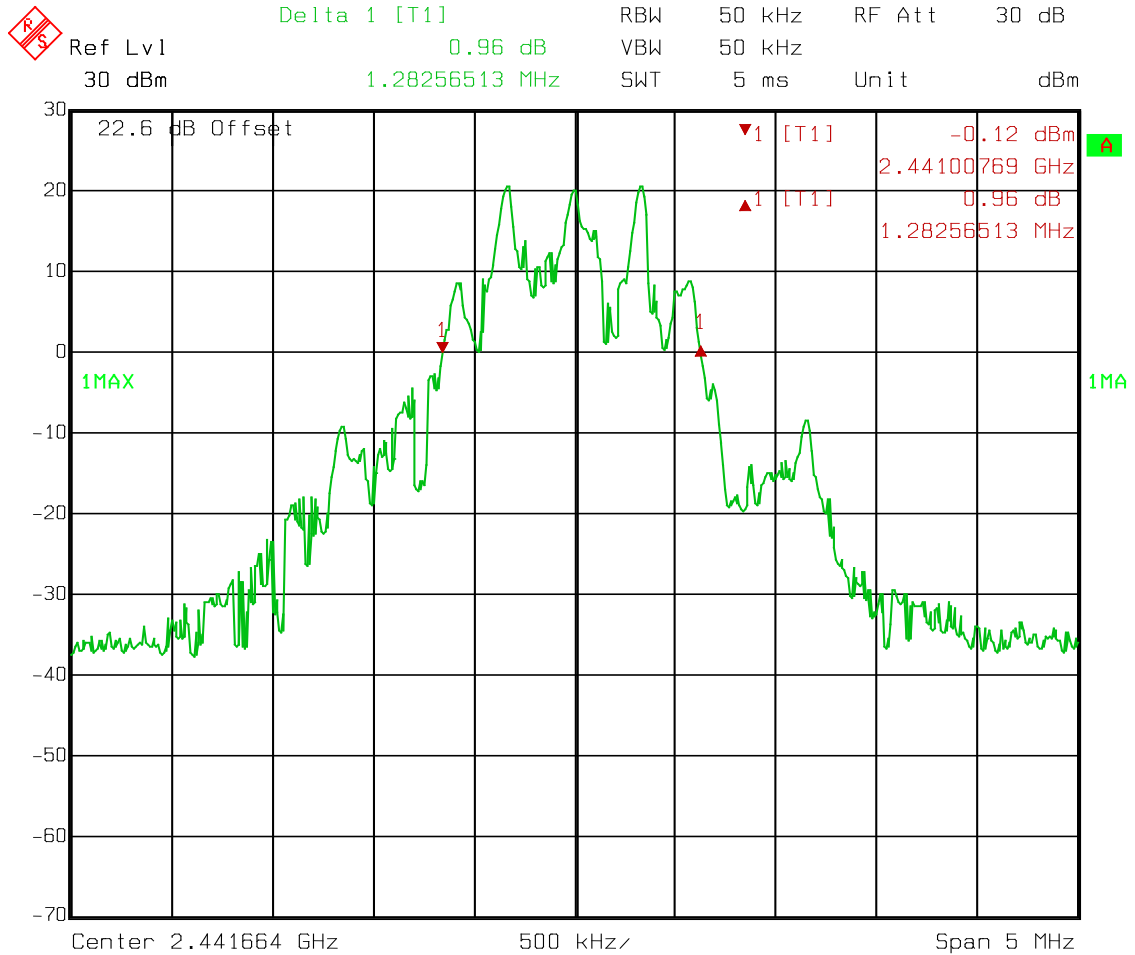

Date: 04.DEC.2013 16:00:42

Test Data – 20 dB Bandwidth
High Channel

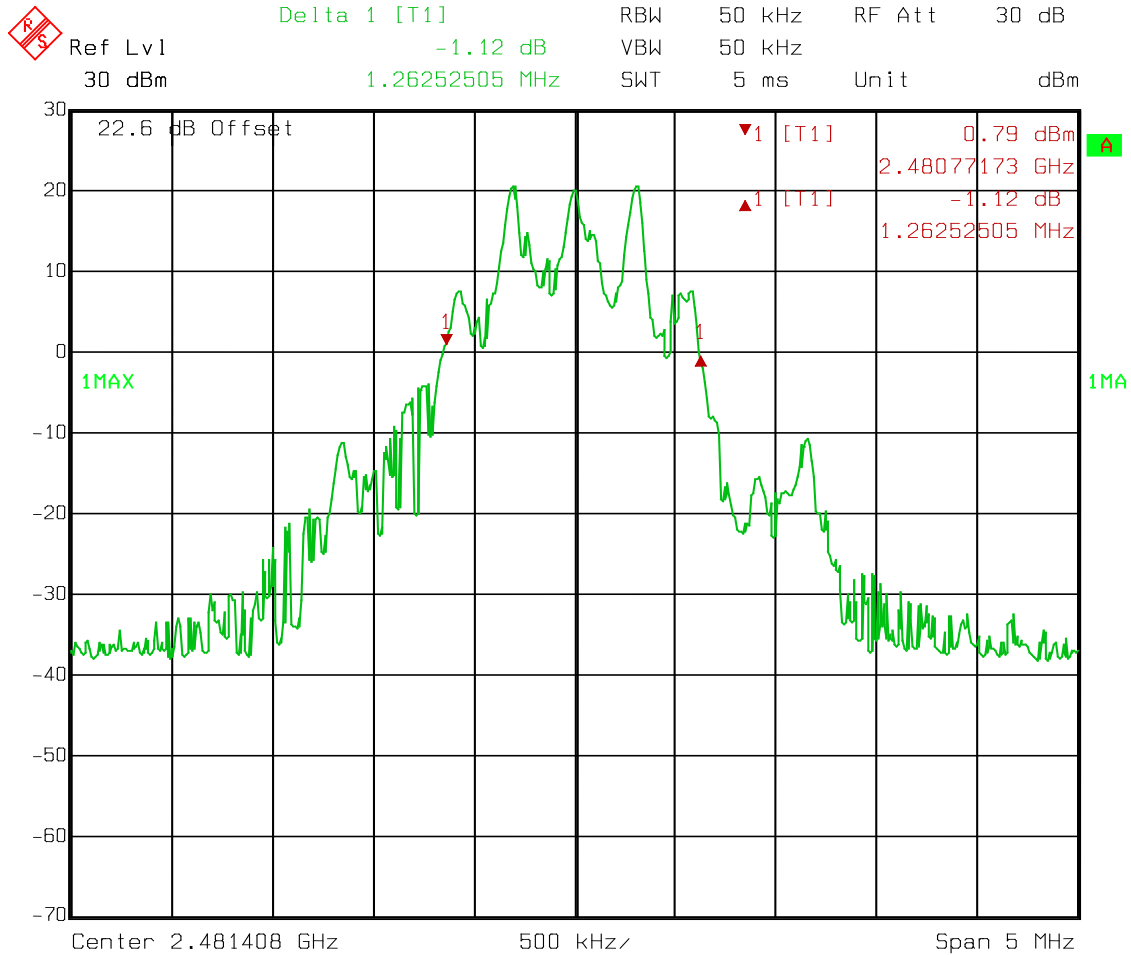

Date: 04.DEC.2013 16:01:52

Section 4. Time of Occupancy

NAME OF TEST: Time of Occupancy	PARA. NO.: 15.247(a)(1)
TESTED BY: David Light	DATE: 04 December 2013

Test Results: Complies.

Measurement Data:

Maximum Dwell Time On Any Channel: 16.64 ms in 19 seconds

Equipment Used: 1036-1082-1472


Measurement Uncertainty: 1X10⁻⁷ppm

Temperature: 20 °C

Relative Humidity: 30 %

Test Data – Time of Occupancy


Pulse Width

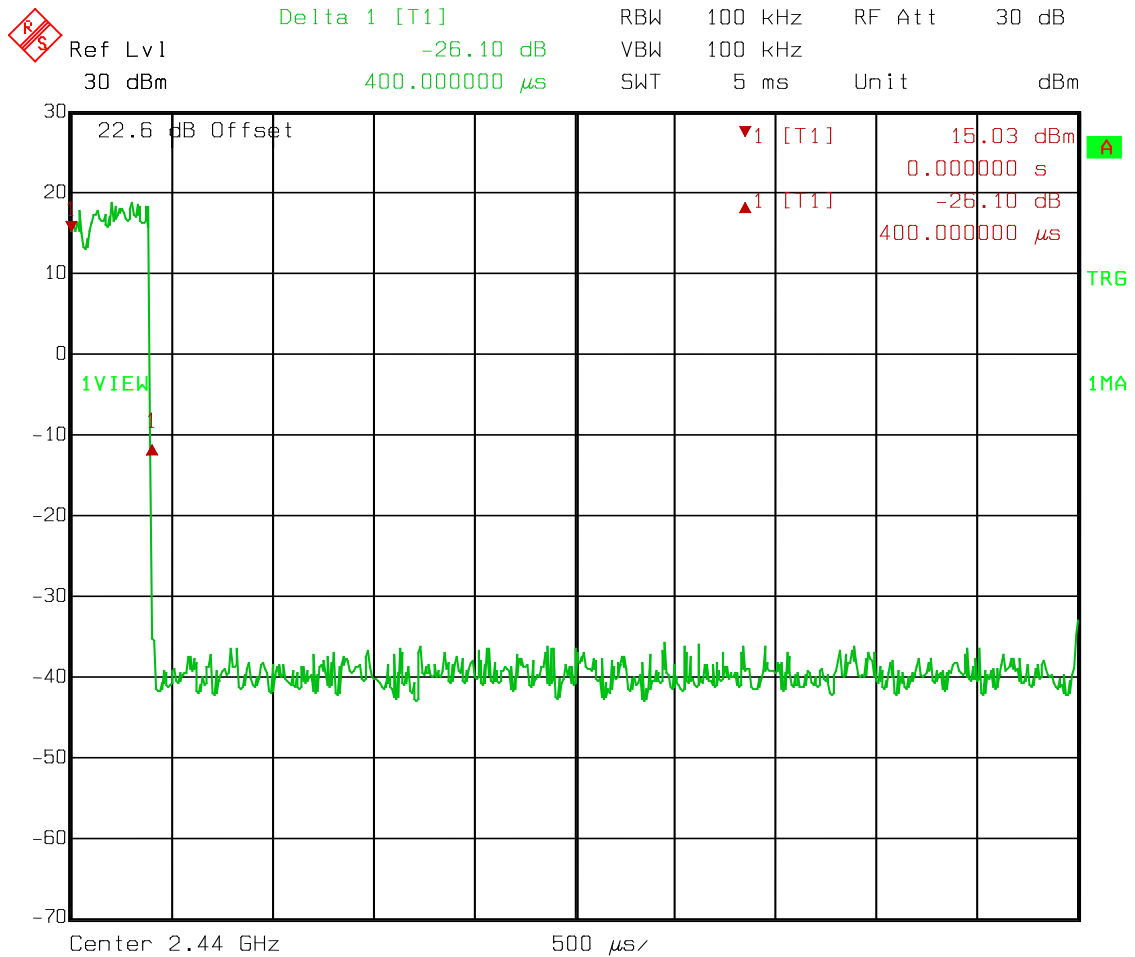

Date: 04.DEC.2013 13:32:42

Test Data – Time of Occupancy

Number of hopping channels

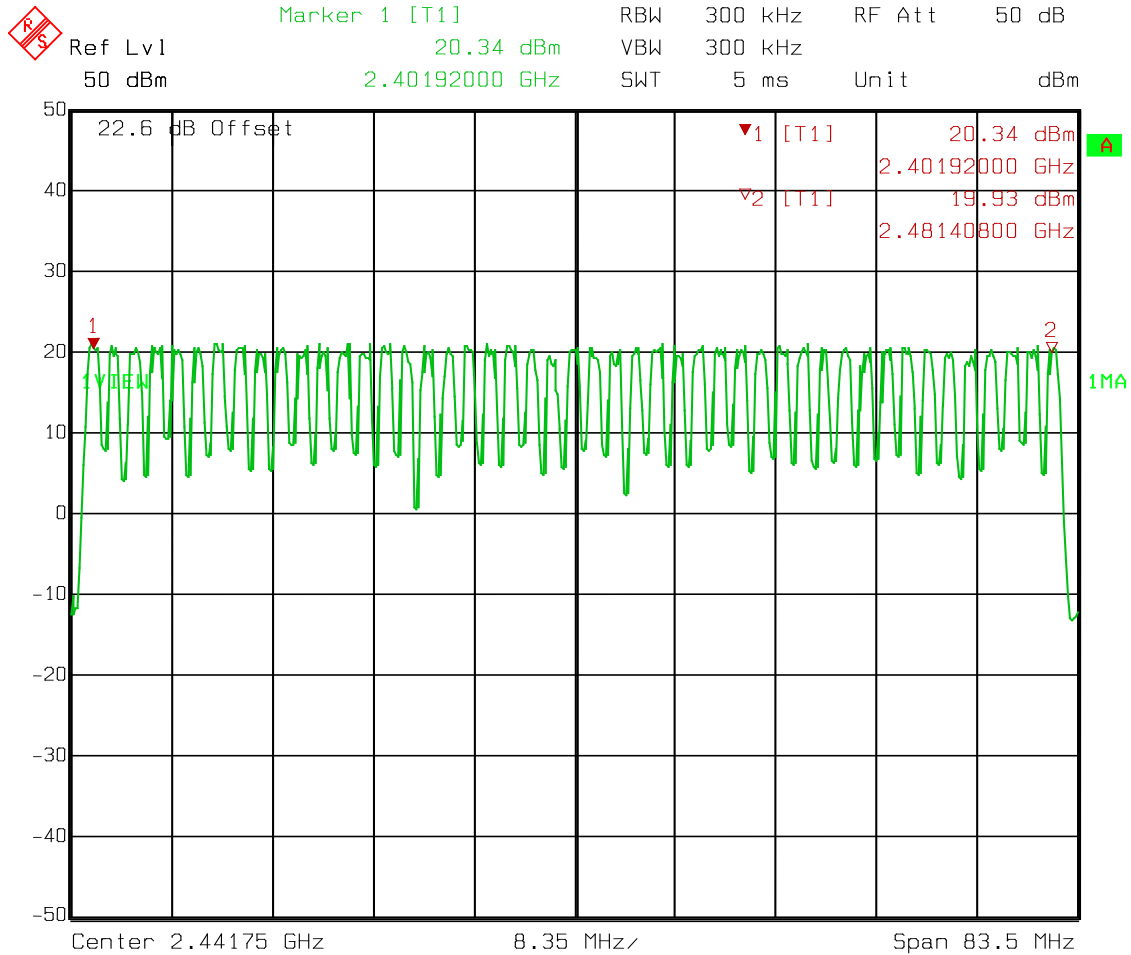

Date: 04.DEC.2013 13:46:11


Test Data – Time of Occupancy

41 x 400 us = 16.4 ms



Ref Lvl
50 dBm


RBW 100 kHz RF Att 50 dB
VBW 100 kHz
SWT 19 s Unit dBm

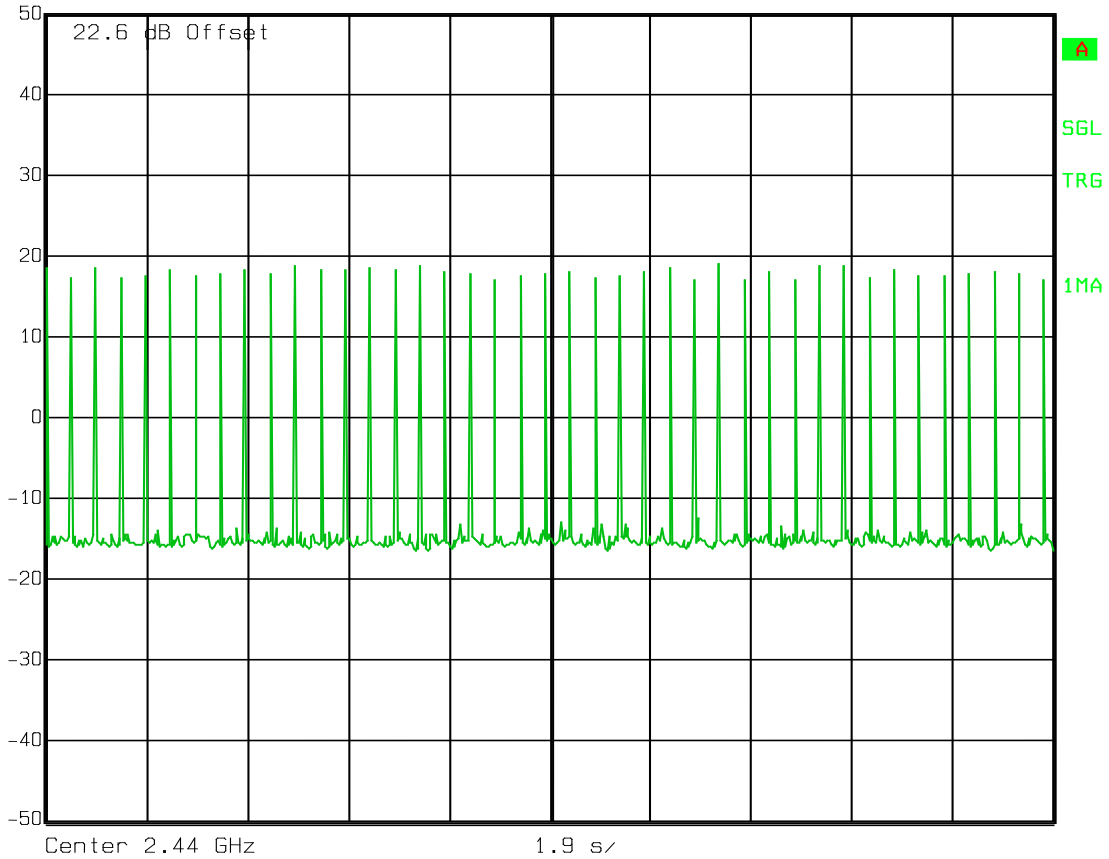

Date: 04.DEC.2013 13:49:49

Test Data – Time of Occupancy

Transmit time in 100 mS (For duty cycle calculation)

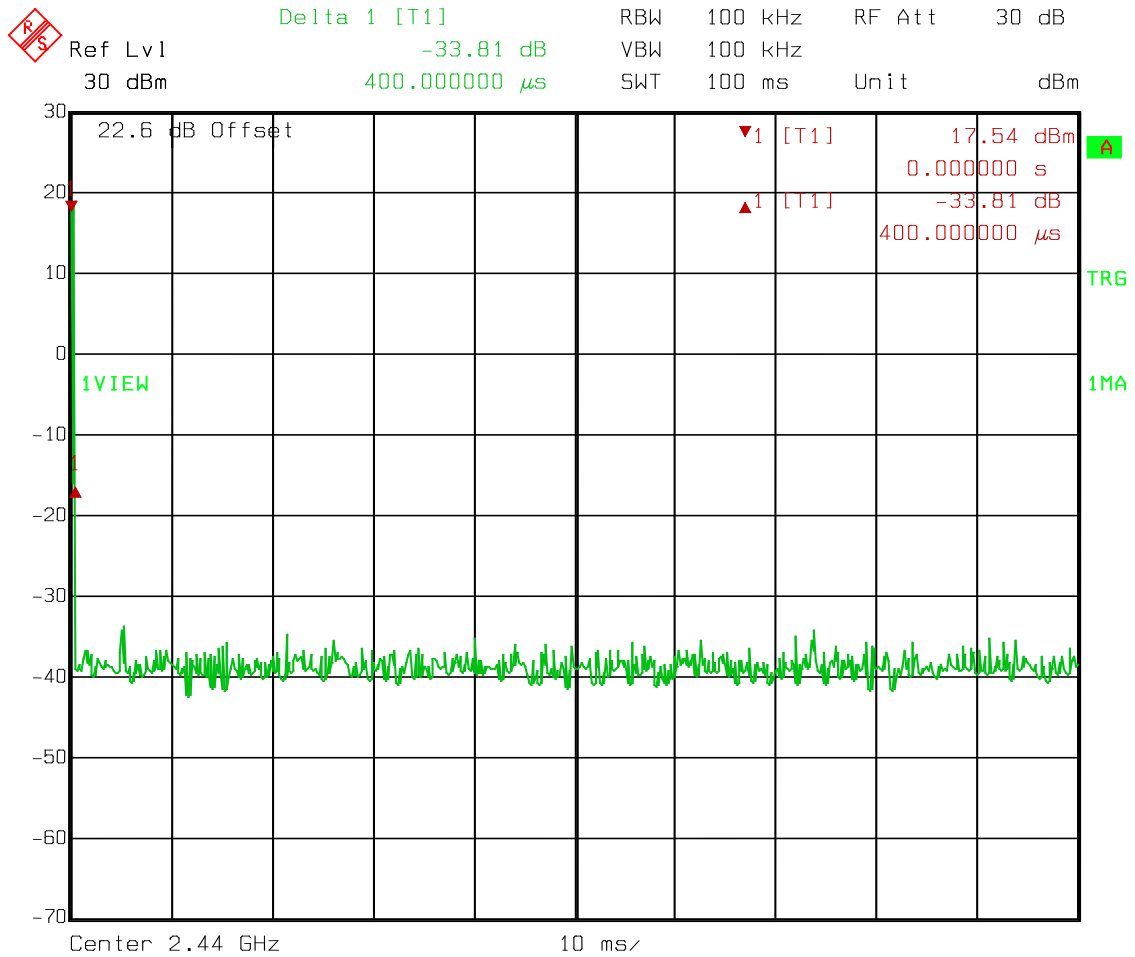

Date: 04.DEC.2013 13:33:24

Duty Cycle = $20 \log (0.4/100) = -48 \text{ dB}$

Section 5. Peak Power Output

NAME OF TEST: Peak Power Output	PARA. NO.: 15.247 (b)
TESTED BY: David Light	DATE: 4 Dec. 2013

Test Results: Complies.

Measurement Data: See attached plots.
Detachable antenna? Yes No

Frequency (MHz)	Peak Power (dBm)	Peak Power (W)	Antenna Type	Gain (dBi)	E.I.R.P. (dBm)	E.I.R.P. (W)
2401.9	20.9	0.123	Inverted F	-6.0	14.9	0.031
2441.6	20.8	0.120	Inverted F	-6.0	14.8	0.030
2481.4	20.9	0.123	Inverted F	-6.0	14.9	0.031
Maximum EIRP (W): 0.031						

Frequency (MHz)	*Avg. Power (dBm)	Avg Power (W)
2401.9	17.5	0.123
2441.6	17.4	0.120
2481.4	17.4	0.123

*Measured with an average detector with 100% duty cycle (no frequency hopping).

- This device was tested at +/- 15% input power per 15.31(e), with no variation in output power.
- For battery powered equipment, the device was tested with a fresh battery per 15.31(e).
- The device was tested on three channels per 15.31(l).
- This test was performed radiated.


Equipment Used: 1036-1082-1472

Measurement Uncertainty: 1.7 dB

Temperature: 20 °C


Relative Humidity: 30 %

Test Data – Peak Power Output

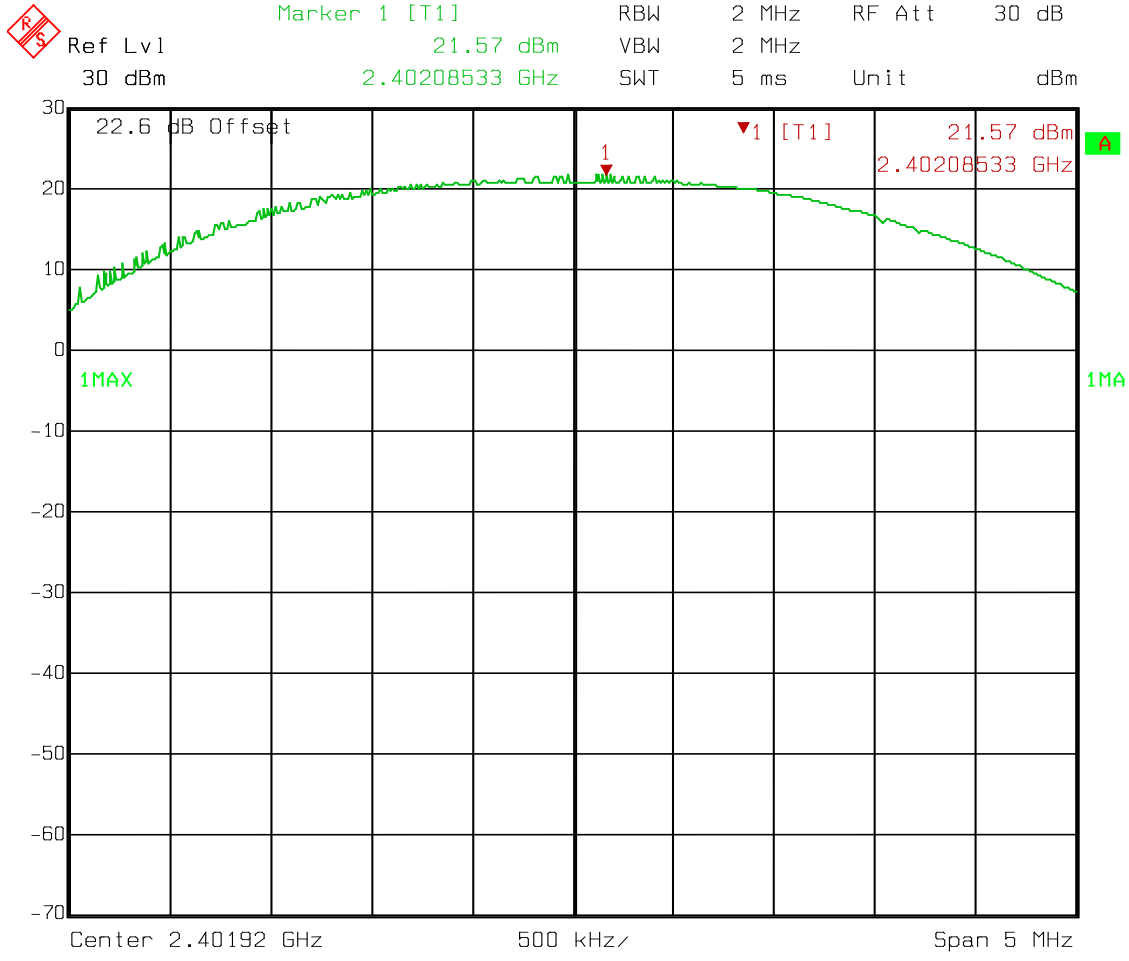


Date: 04.DEC.2013 15:57:48

Test Data – Peak Power Output

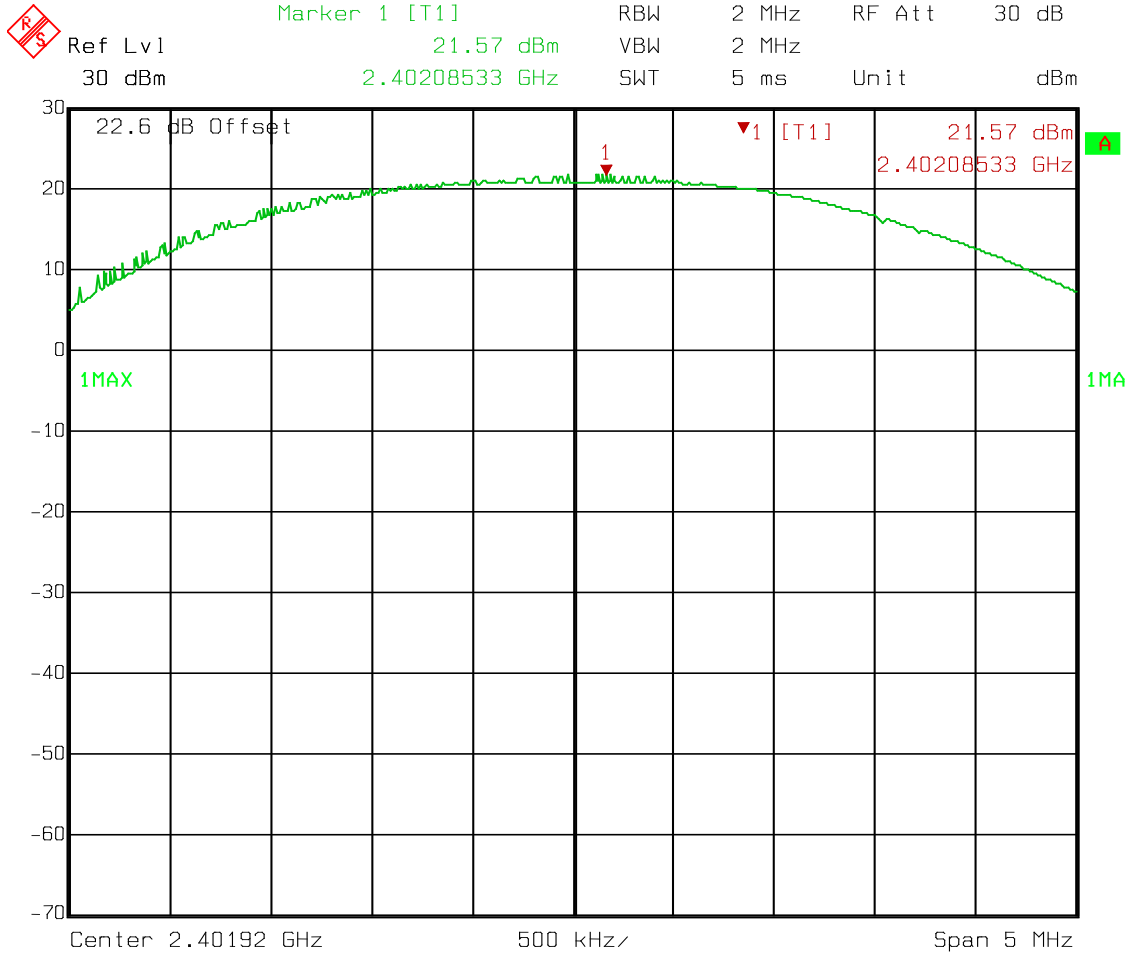

Date: 04.DEC.2013 15:57:48

Test Data – Peak Power Output

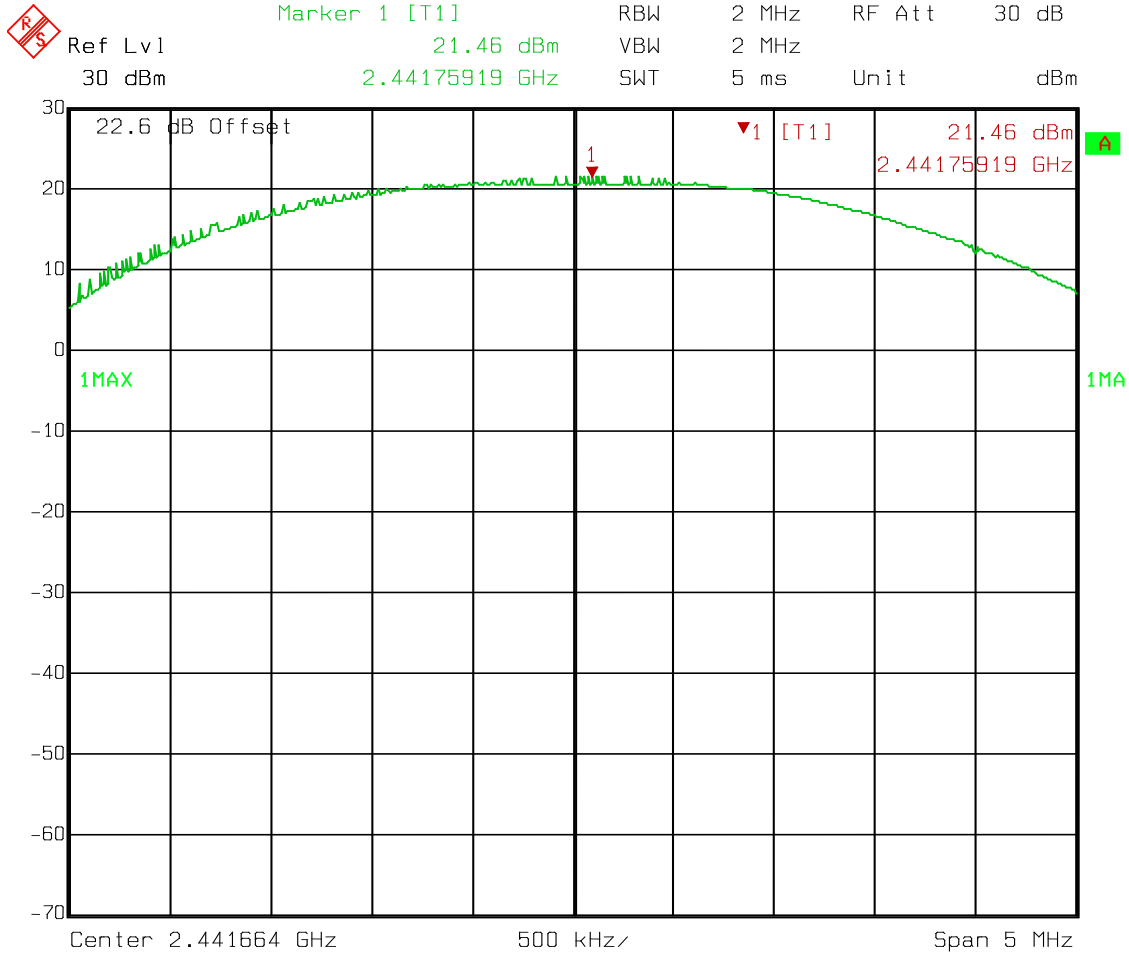

Date: 04.DEC.2013 15:57:07

Section 6. Spurious Emissions (Conducted)

NAME OF TEST: Spurious Emissions (Conducted)	PARA. NO.: 15.247(d)
TESTED BY: David Light	DATE: 04 December 2013

Test Results: Complies.

Measurement Data: See attached plots.


Equipment Used: 1036-1082-1472

Measurement Uncertainty: 1X10⁻⁷ppm

Temperature: 20 °C


Relative Humidity: 30 %

Test Data – Spurious Emissions at Antenna Terminals
Lower Band Edge

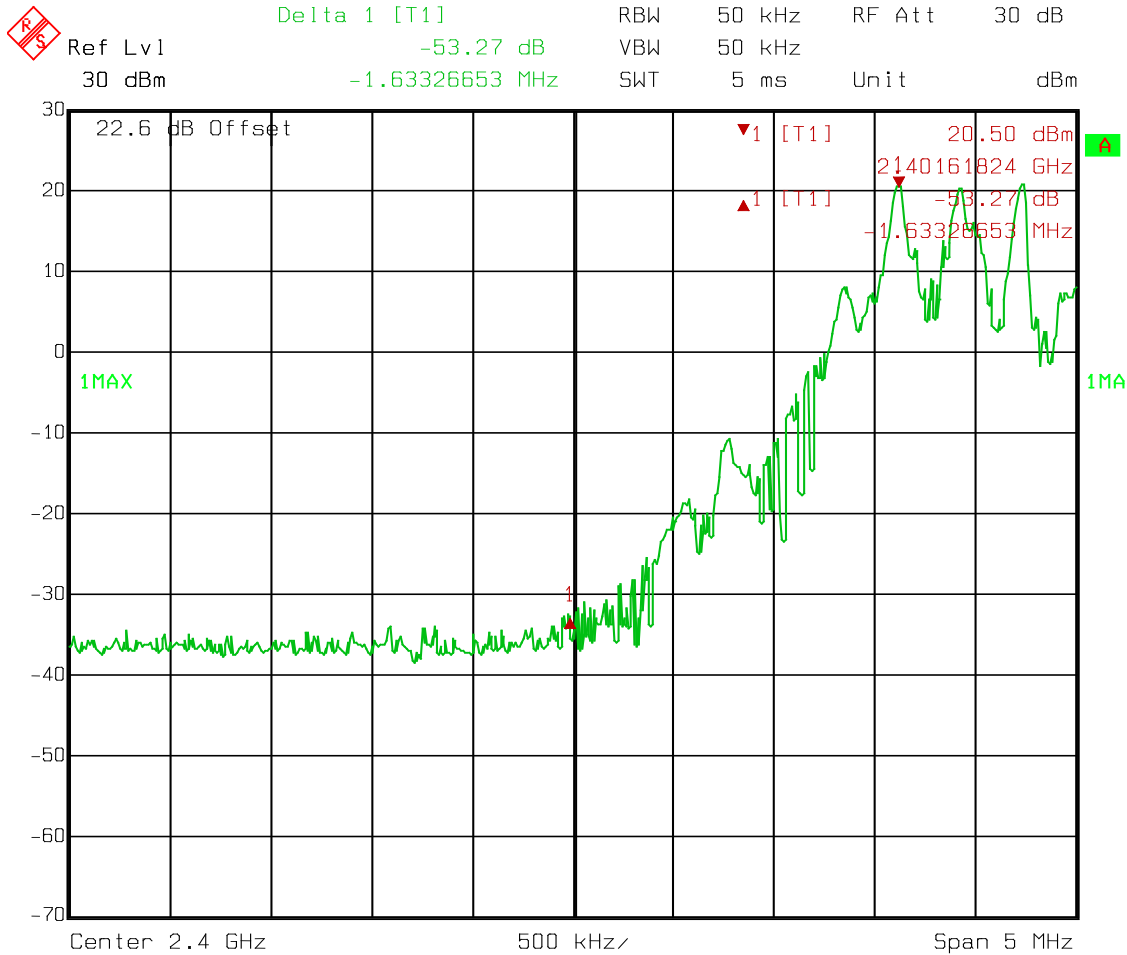


Date: 04.DEC.2013 16:03:03

Test Data – Spurious Emissions at Antenna Terminals
Spurs – Low Channel

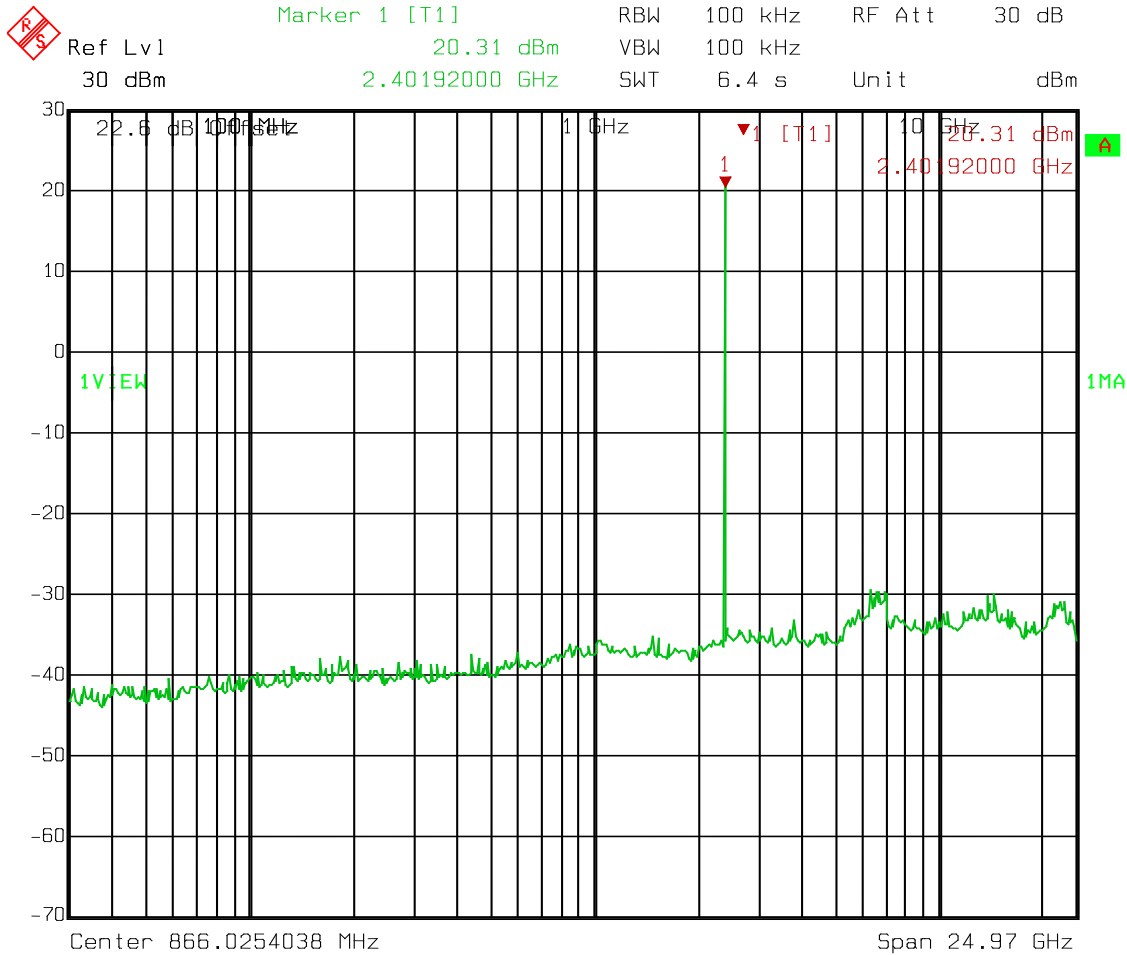


Date: 04.DEC.2013 15:44:53

Test Data – Spurious Emissions at Antenna Terminals
Spurs – Mid Channel

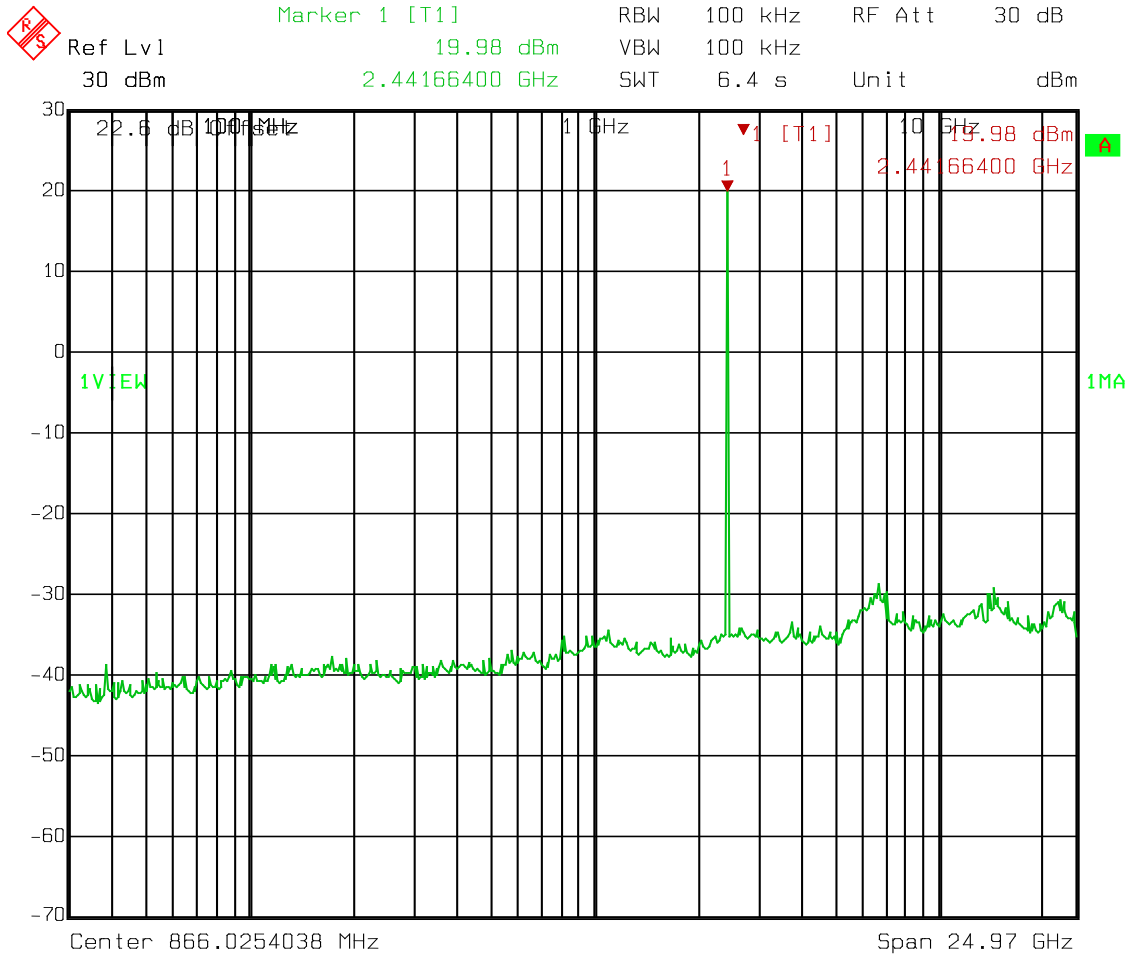

Date: 04.DEC.2013 15:52:53

Test Data – Spurious Emissions at Antenna Terminals
Spurs – High Channel

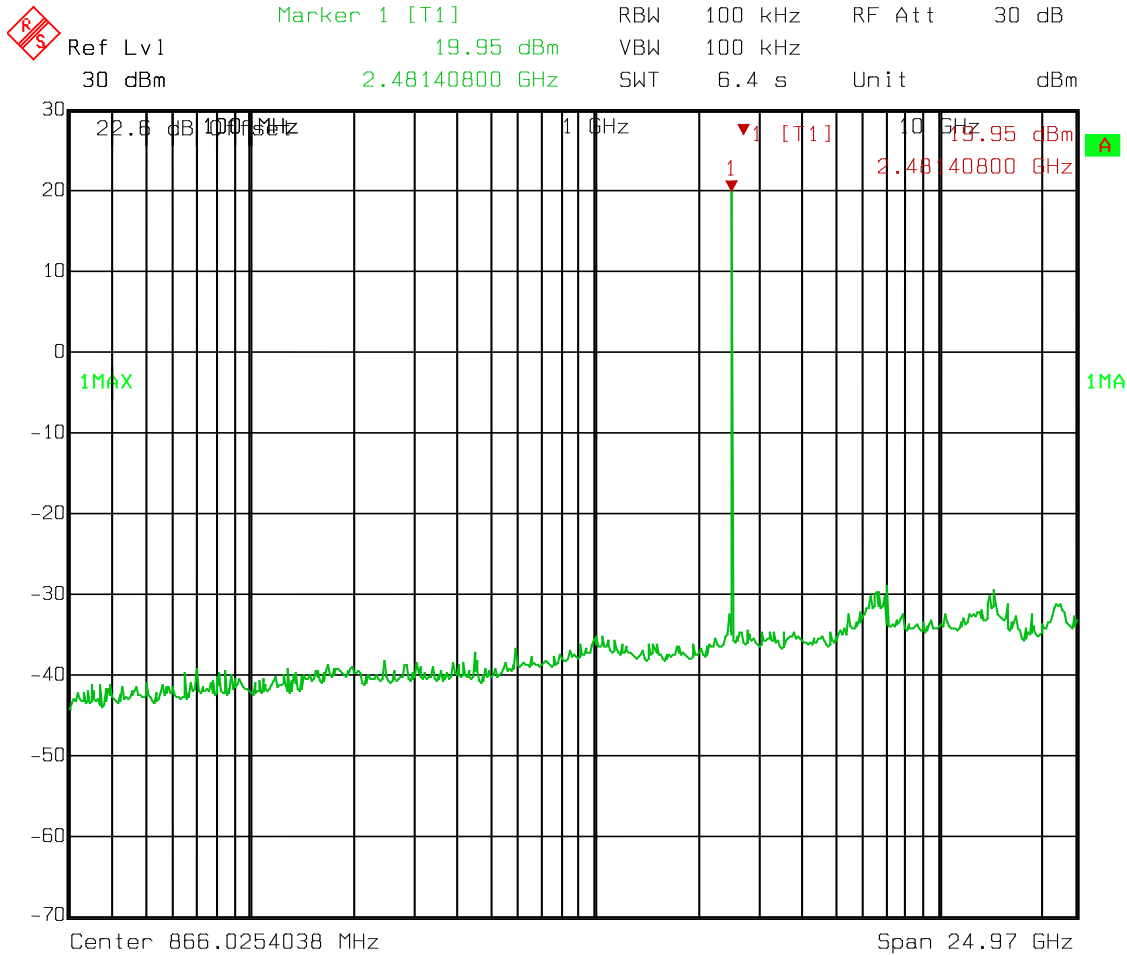

Date: 04.DEC.2013 15:54:18

Section 7. Spurious Emissions (Radiated)

NAME OF TEST: Spurious Emissions (Radiated)	PARA. NO.: 15.247(d)
TESTED BY: David Light	DATE: 09 December 2013

Test Results: Complies. The worst case emission was 51.3 dBµV/m at 2483.5 MHz. This is 2.7 dB below the specification limit of 54 dBµV/m.

Measurement Data: See attached table.

Duty Cycle Calculation:

Duty Cycle correction factor(dB) = 20 log (rf_{ON} in ms/100ms)

Notes:

- For handheld devices, the EUT was tested on three orthogonal axis'
- The device was tested from 30 MHz to the tenth harmonic of the highest fundamental frequency per 15.33
- The device was tested on three channels per 15.31(l).
- No emissions were detected within 20 dB of the specification limit therefore none are reported per 15.31(o). Band edge data is presented below.

Equipment Used: 1763-752-1016-827-1036

Measurement Uncertainty: +/-3.6 dB

Temperature: 21 °C

Relative Humidity: 28 %

Test Data - Radiated Emissions

Meas. Freq. (MHz)	Ant. Pol. (H/V)	Duty Cycle (dB)	Meter Reading (dBuV)	Antenna Factor (dB)	Path Loss (dB)	RF Gain (dB)	Corrected Reading (dBuV/m)	Spec. limit (dBuV/m)	CR/SL Diff. (dB)	Pass Fail Unc.	Comment
											TX Highest Channel
2483.500	H	0.0	33.2	28.7	9.4	0.0	71.3	74.0	-2.7	Pass	
2483.500	H	-20.0	33.2	28.7	9.4	0.0	51.3	54.0	-2.7	Pass	
2483.500	V	0.0	32.5	28.7	9.4	0.0	70.6	74.0	-3.4	Pass	
2483.500	V	-20.0	32.4	28.7	9.4	0.0	50.5	54.0	-3.5	Pass	

Section 8. Test Equipment List

Asset	Description	Manufacturer	Model	Cal Date	Due Date
1036	Spectrum Analyzer	Rohde & Schwartz	FSEK30	14-Jul-2014	15-Jul-2016
1082	Cable	Astrolab	NA	Verify before use	NA
1472	Attenuator	Mini-Circuits	DB20	Verify before use	NA
1763	Antenna, Bilog	Schaffner	CBL 6111D	6-Mar-2013	7-Mar-2014
752	Antenna, DRWG	EMCO	3115	2-Jan-2013	3-Jan-2014
1016	Preamplifier	Hewlett Packard	8449A	19-Aug-2013	20-Aug-2014
827	Preamplifier	Com-Power	PA-103	13-Jul-2013	14-Jul-2014

Nemko USA, Inc.

FCC PART 15, SUBPART C and
Industry Canada RSS-210 Issue 8

FREQUENCY HOPPING SPREAD SPECTRUM TRANSMITTER

EQUIPMENT: 1402

PROJECT NO.: 2014_248302_FCC_15247

ANNEX A - TEST DETAILS

NAME OF TEST: Channel Separation

PARA. NO.: 15.247(a)(1)
RSS-210 A8.1(b)

Minimum Standard:

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.

NAME OF TEST: Time of Occupancy	PARA. NO.: 15.247(a)(1) RSS-210 A8.1(d)
---------------------------------	--

Minimum Standard:

Frequency Band (MHz)	20 dB Bandwidth	No. of Hopping Channels	Average Time of Occupancy
902 - 928	<250 kHz	50	=<0.4 sec. in 20 sec.
902 - 928	=>250 kHz	25	=<0.4 sec. in 10 sec.
2400 - 2483.5	-----	75	=<0.4 sec. in 0.4 seconds multiplied by the number of hopping channels employed.
5725 - 5850	-----	75	=<0.4 sec. in 30 sec.

Method Of Measurement:

The spectrum analyzer is set as follows:

- RBW: 1 MHz
- VBW: = RBW
- Span: 0 Hz
- LOG dB/div.: 10 dB
- Sweep: Sufficient to see one hop time sequence.
- Trigger: Video

The occupancy time of one hop is measured as above. The average time of occupancy is calculated over the appropriate period of time from above table

Avg. time of occupancy = (period from table/duration of one hop)/no. of channels multiplied by the duration of one hop.

For instance:

If a 2.4 GHz system has a measured hop duration time of 1 msec. and uses 75 channels, then the average time of occupancy would be:

$$(30 \text{ sec.} / .001 \text{ sec.}) / 75 \text{ chan.} = 400 \times 1 \text{ msec.} = 400 \text{ msec. or } 0.4 \text{ sec. in } 30 \text{ sec.}$$

NAME OF TEST: Occupied Bandwidth	PARA. NO.: 15.247(a)(1) RSS-210 A8.1(a)
----------------------------------	--

Minimum Standard:

Frequency Band (MHz)	Maximum 20 dB Bandwidth
902 - 928	500 kHz
2400 – 2483.5	Not defined
5725 – 5850	1 MHz

Method Of Measurement:

The spectrum analyzer is set as follows:

RBW: At least 1% of span/div.

VBW: >RBW

Span: Sufficient to display 20 dB bandwidth

LOG dB/div.: 10 dB

Sweep: Auto

Number of channels tested:

Tuning range	Number of channels tested	Channel location in band
1 MHz or less	1	middle
1 to 10 MHz	2	top and bottom
more than 10 MHz	3	top, middle, bottom

NAME OF TEST: Peak Power Output

PARA. NO.: 15.247(b)
RSS-210 A8.4(2)

Minimum Standard:

Frequency Band (MHz)	No. of Hopping Channels	Maximum Peak Power Output at Antenna Port
902 - 928	at least 50	1 watt
902 – 928	25 - 49	0.25 watts
2400 – 2483.5	75	1 watt
5725 – 5850	75	1 watt

If transmitting antennas of directional gain greater than 6 dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

Systems operating in the 2400-2483.5 MHz band that are used exclusively for fixed, point to point operation may employ transmitting antennas with directional gain greater than 6 dBi provided the maximum peak output power is reduced by 1 dB for every 3 dB that the directional gain of the antenna exceed 6 dBi.

Systems operating in the 5725 – 5850 MHz band that are used exclusively for fixed, point-to-point operation may employ transmitting antennas with directional gain greater than 6 dBi without any corresponding reduction in transmitter peak output power.

Direct Measurement Method For Detachable Antennas:

If the antenna is detachable, a peak power meter is used to measure the power output with the transmitter operating into a 50 ohm load. The dBi gain of the antenna(s) employed shall be reported.

Calculation Of EIRP For Integral Antenna:

If the antenna is not detachable from the circuit then the Peak Power Output is derived from the peak radiated field strength of the fundamental emission by using the plane wave relation $GP/4\pi R^2 = E^2/120\pi$ and proceeding as follows:

$$P = \frac{E^2 R^2}{30G} = \frac{E^2 3^2}{30G}$$

where,

P = the equivalent isotropic radiated power in watts

E = the maximum measured field strength in V/m

R = the measurement range (3 meters)

G = the numeric gain of the transmit antenna in relation to an isotropic radiator

The RBW of the spectrum analyzer shall be set to a value greater than the measured 20 dB occupied bandwidth of the E.U.T.

Number of channels tested:

Tuning range	Number of channels tested	Channel location in band
1 MHz or less	1	middle
1 to 10 MHz	2	top and bottom
more than 10 MHz	3	top, middle, bottom

NAME OF TEST: Spurious Emissions at Antenna Terminals PARA. NO.: 15.247(d)
RSS-210 A8.5

Minimum Standard: In any 100kHz bandwidth outside the frequency band in which the transmitter is operating, emissions shall be at least 20 dB below the fundamental emission or shall not exceed the following field strength limits. Emissions falling in the restricted bands of 15.205 shall not exceed the following field strength limits:

Frequency (MHz)	Field Strength (µV/m @ 3m)	Field Strength (dB @ 3m)
30 - 88	100	40.0
88 - 216	150	43.5
216 - 960	200	46.0
Above 960	500	54.0

THE SPECTRUM WAS SEARCHED TO THE 10th HARMONIC

Method Of Measurement:

30 MHz - 10th harmonic plot

RBW: 100 kHz

VBW: 300 kHz

Sweep: Auto

Display line: -20 dBc

Lower Band Edge

RBW: At least 1% of span/div.

VBW: >RBW

Span: As necessary to display any spurious at band edge.

Sweep: Auto

Center Frequency: 902 MHz, 2400 MHz, or 5725 MHz

Marker: Peak of fundamental emission

Marker Δ: Peak of highest spurious level below center frequency.

Upper Band Edge

RBW: At least 1% of span/div.

VBW: >RBW

Span: As necessary to display any spurious at band edge.

Sweep: Auto

Center Frequency: 928 MHz, 2483.5 MHz, or 5850 MHz

Marker: Peak of fundamental emission

Marker Δ: Peak of highest spurious level above center frequency.

Number of channels tested:

Tuning range	Number of channels tested	Channel location in band
1 MHz or less	1	middle
1 to 10 MHz	2	top and bottom
more than 10 MHz	3	top, middle, bottom

NAME OF TEST: Radiated Spurious Emissions

PARA. NO.: 15.247(d)

RSS-Gen 7.2.2

Minimum Standard:

Emissions falling in the restricted bands shall not exceed the following field strength limits:

Frequency (MHz)	Field Strength ($\mu\text{V/m}$ @ 3m)	Field Strength (dB @ 3m)
30 - 88	100	40.0
88 - 216	150	43.5
216 - 960	200	46.0
Above 960	500	54.0

THE SPECTRUM WAS SEARCHED TO THE 10th HARMONIC

15.205 Restricted Bands


MHz	MHz	MHz	GHz
0.09-0.11	16.42-16.423	399.9-410	4.5-5.25
0.495-0.505	16.69475-16.69525	608-614	5.35-5.46
2.1735-2.1905	16.80425-16.80475	960-1240	7.25-7.75
4.125-4.128	25.5-25.67	1300-1427	8.025-8.5
4.17725-4.17775	37.5-38.25	1435-1626.5	9.0-9.2
4.20725-4.20775	73-74.6	1645.5-1646.5	9.3-9.5
6.125-6.218	74.8-75.2	1660-1710	10.6-12.7
6.26775-6.26825	108-121.94	1718.8-1722.2	13.25-13.4
6.31175-6.31225	123-138	2200-2300	14.47-14.5
8.291-8.294	149.9-150.05	2310-2390	15.35-16.2
8.362-8.366	156.52475-156.52525	2483.5-2500	17.7-21.4
8.37625-8.38675	156.7-156.9	2655-2900	22.01-23.12
8.41425-8.41475	162.0125-167.17	3260-3267	23.6-24.0
12.29-12.293	167.72-173.2	3332-3339	31.2-31.8
12.51975-12.52025	240-285	3345.8-3358	36.43-36.5
12.57675-12.57725	322-335.4	3600-4400	Above 38.6
13.36-13.41	1718		

Number of channels tested:


Tuning range	Number of channels tested	Channel location in band
1 MHz or less	1	middle
1 to 10 MHz	2	top and bottom
more than 10 MHz	3	top, middle, bottom

ANNEX B - TEST DIAGRAMS

Test Site For Radiated Emissions

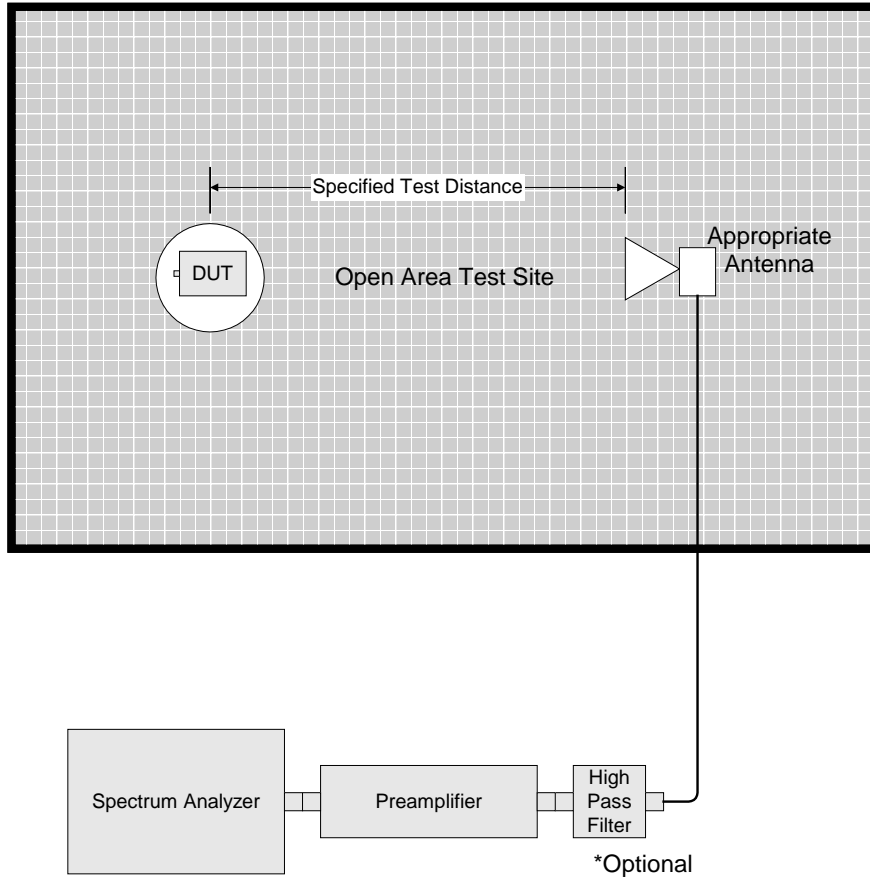

Conducted Emissions

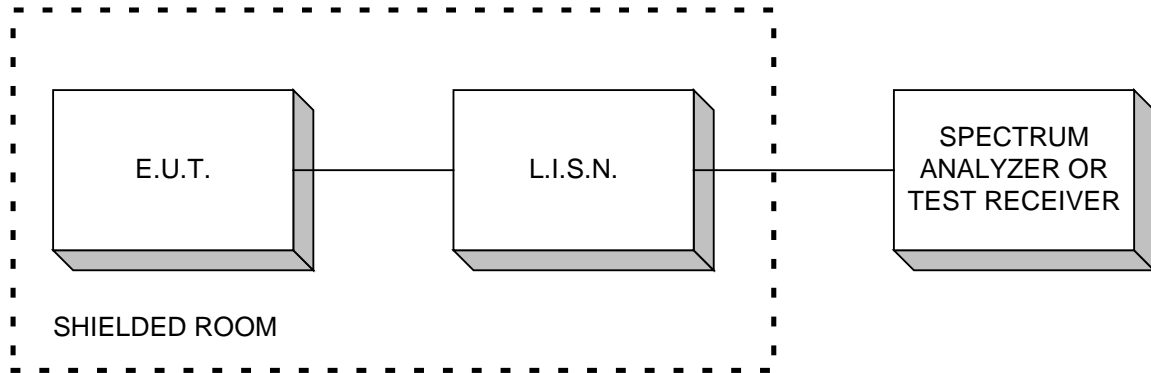

Measurements at Antenna Terminals

