



849 NW STATE ROAD 45
NEWBERRY, FL 32669 USA
PH: 888.472.2424 OR 352.472.5500
FAX: 352.472.2030
EMAIL: INFO@TIMCOENGR.COM
[HTTP://WWW.TIMCOENGR.COM](http://WWW.TIMCOENGR.COM)

**FCC PART 74
AND INDUSTRY CANADA RSS-123
WIRELESS MICROPHONE
TEST REPORT**

APPLICANT	AZDEN CORPORATION
	1-12-17 KAMI-RENJAKU MITAKA, TOKYO, 181 JAPAN
FCC ID	BZB30HT
IC CERT #	2817A-30HT
MODEL NUMBER	30HT
PRODUCT DESCRIPTION	HANDHELD WIRELESS MICROPHONE
DATE SAMPLE RECEIVED	8/20/2007
DATE TESTED	8/21/2007
TESTED BY	NAM NGUYEN
APPROVED BY	NAM NGUYEN
TIMCO REPORT NO.	2863AUT7TestReport.doc
TEST RESULTS	<input checked="" type="checkbox"/> PASS <input type="checkbox"/> FAIL

**THE ATTACHED REPORT SHALL NOT BE REPRODUCED EXCEPT IN FULL
WITHOUT THE WRITTEN APPROVAL OF TIMCO ENGINEERING, INC.**



Certificate # 0955-01



Certificate # 0955-01

TABLE OF CONTENTS

STATEMENT OF COMPLIANCE..... 3

GENERAL INFORMATION 4

TEST PROCEDURES 6

RF POWER OUTPUT 7

MODULATION CHARACTERISTICS..... 8

VOICE MODULATED COMMUNICATION EQUIPMENT 9

OCCUPIED BANDWIDTH..... 11

SPURIOUS EMISSIONS AT ANTENNA TERMINALS (CONDUCTED)..... 13

FIELD STRENGTH OF SPURIOUS EMISSIONS..... 14

FREQUENCY STABILITY..... 16

EMC EQUIPMENT LIST 17



Certificate # 0955-01

STATEMENT OF COMPLIANCE

This equipment has been tested in accordance with the standards identified in the referenced test report. To the best of my knowledge and belief, these tests were performed using the measurement procedures described in this report and demonstrate that the equipment complies with the appropriate standards. No modifications were made to the equipment during testing in order to demonstrate compliance with these standards.

I attest that the necessary measurements were made by me or under my supervision, at Timco Engineering, Inc. located at 849 N.W. State Road 45, Newberry, Florida 32669 USA.

Authorized by: NAM NGUYEN
Signature: <Nam Nguyen>
Function: Engineer Tech.
Date: **August 21, 2007**



Certificate # 0955-01

GENERAL INFORMATION
RULES PART 2.1033, RSS-123

DUT TECHNICAL DESCRIPTION

The test results relate only to the items tested.	
DUT Description	HANDHELD WIRELESS MICROPHONE
FCC ID	BZB30HT
Model Number	30HT
Modulation	FM
Type of Emission	130KOF3E Bn = 2M+2DK M = 17,500 D = 47.5kHz (Peak Deviation) K = 1 Bn = 2(17.5k) + 2(47.5k)(1) = 130k
Allowed Authorized Bandwidth	200 kHz
Frequency Range	794.000 - 806.000 MHz
Test Frequencies	794.00 MHz, 800.00 MHz, and 806.00 MHz
Power range and controls	DUT has no controls
Maximum Output Power	0.010 Watts ERP
DUT Power Source	<input type="checkbox"/> 110-120Vac/50- 60Hz
	<input type="checkbox"/> DC Power
	<input checked="" type="checkbox"/> Battery Operated Exclusively
Test Item	<input type="checkbox"/> Prototype
	<input checked="" type="checkbox"/> Pre-Production
	<input type="checkbox"/> Production
Type of Equipment	<input type="checkbox"/> Fixed
	<input type="checkbox"/> Mobile
	<input checked="" type="checkbox"/> Portable



Certificate # 0955-01

GENERAL INFORMATION

Test Facility	Timco Engineering, Inc. 849 NW State Road 45, Newberry, FL 32669
Test Condition	The temperature was 26°C with a relative humidity of 50%.
Modifications	None
Test Exercise (e.g software description, test signal, etc.)	The DUT was placed in continuous transmit mode of operation.
Applicable Standards	TIA 603, FCC CFR 47 Parts 2 and 74

Applicant: AZDEN CORPORATION

FCC ID: BZB30HT

Report: W:\A\AZDEN_BZB\2863AUT7\2863AUT7TestReport.doc



Certificate # 0955-01

TEST PROCEDURES

Power Line Conducted Interference: The procedure used was TIA 603 using a 50uH LISN. Both lines were observed with the UUT transmitting. The bandwidth of the spectrum analyzer was 10 kHz with an appropriate sweep speed.

Bandwidth 20 dB: The measurements were made with the spectrum analyzer's resolution bandwidth (RBW) = 1 MHz and the video bandwidth (VBW) = 3 MHz and the span set as shown on plot.

Power Output: For a device with a fixed antenna, RF power is measured as ERP as the antenna is permanently attached. The substitution method was used as described in TIA-603-C.

Antenna Conducted Emissions: The RBW = 100 kHz, VBW = 300 kHz and the span set to 10.0 MHz and the spectrum was scanned from 30 MHz to the 10th Harmonic of the fundamental. Above 1 GHz the resolution bandwidth was 1 MHz and the VBW = 3 MHz and the span to 50 MHz.

Radiation Interference: The test procedure used was TIA 603 using an Agilent spectrum receiver with pre-selector. The bandwidth (RBW) of the spectrum TIA 603 receiver was 100 kHz up to 1 GHz and 1 MHz above 1 GHz with an appropriate sweep speed. The VBW above 1 GHz was 3 MHz. The analyzer was calibrated in dB above a microvolt at the output of the antenna. The ambient temperature of the UUT was 76°F with a humidity of 55%.


RF POWER OUTPUT

Rule Part No.: Part 2.1046(a), Part 74.861, RSS-123 Section 5.7

Test Requirements: The maximum transmitter power which will be authorized is 1 watt.

Method of Measurement: For a device has a fixed antenna, RF power is measured as ERP as the antenna is permanently attached. The substitution method was used. With a nominal battery voltage, and the transmitter properly adjusted the RF output measures:

Test Setup Diagram:

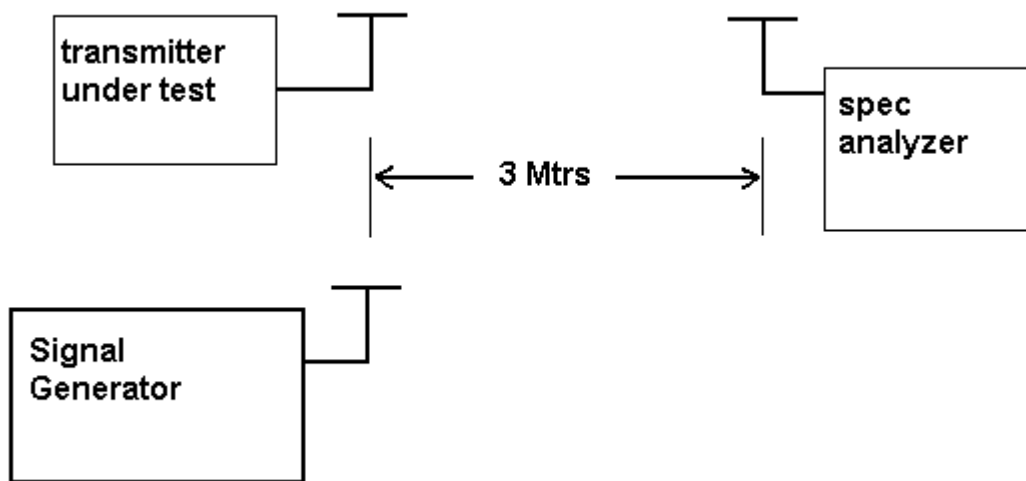

Test Data:

OUTPUT POWER: 0.010 WATTS ERP

Part 2.1033 (C)(8) DC Input into the final amplifier

INPUT POWER: $(3.0V)(0.13A) = 0.39$ Watts



Certificate # 0955-01

MODULATION CHARACTERISTICS

Rule Part No.: Part 2.1047(a)(b), RSS-123 Section 5.5

Test Requirements:


Method of Measurement:

Audio frequency response

The audio frequency response was measured in accordance with TIA/EIA Specification 603 with no exception. A curve or equivalent data showing the frequency response of the audio modulating circuit over a range of 100 – 5000Hz shall be submitted. The audio frequency response curve is shown below.

AUDIO FREQUENCY RESPONSE PLOT

Audio Frequency Response Plot

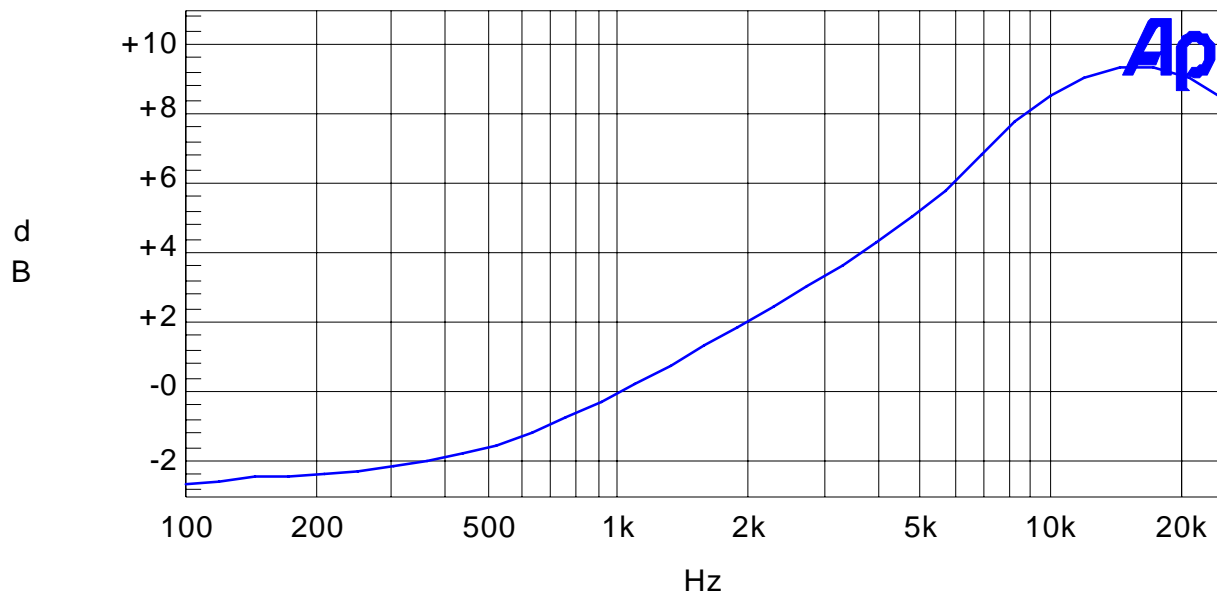

Color	Line Style	Thick	Data	Axis
Blue	Solid	1	Anlr.Level A!Normalize	Left

MaxFreq.at1




Certificate # 0955-01

VOICE MODULATED COMMUNICATION EQUIPMENT

Part 2.1047(a) Voice modulated communication equipment: For equipment required to have an audio low-pass filter, a curve showing the frequency response of the filter, or of all the circuitry installed between the modulation limiter and the modulated stage shall be submitted.

Audio Low Pass Filter

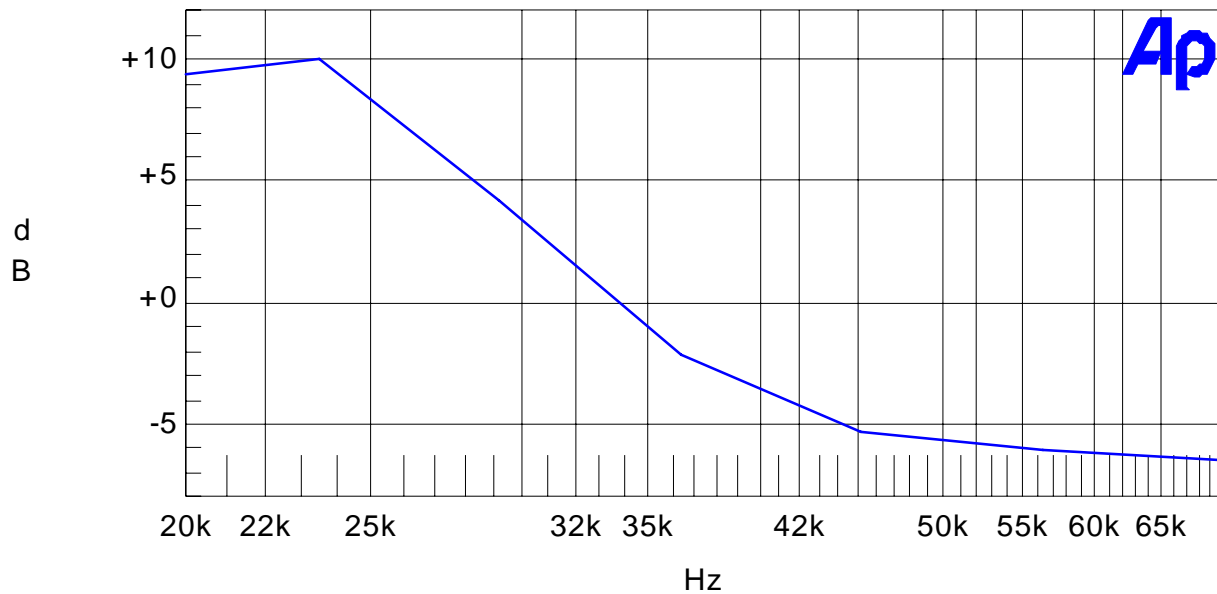

Color	Line Style	Thick	Data	Axis
Blue	Solid	1	Anlr.Level A!Normalize	Left

MaxFreq.at1



Certificate # 0955-01

AUDIO INPUT VERSUS MODULATION


Rule Part No.: Part 2.1047(b) & 74, RSS-123 Section 5.5

Test Requirements:

Method of Measurement: **Modulation cannot exceed 100%**, The audio input level needed for a particular percentage of modulation was measured in accordance with TIA/EIA Specification 603. The audio input curves versus modulation are shown below. Curves are provided for audio input frequencies of 300, 1000, and 3000 Hz.

Test data:

Modulation Limiting Plots:
15.0 KHz (Green), 3.0 KHz (Blue), and 300 Hz (Yellow)

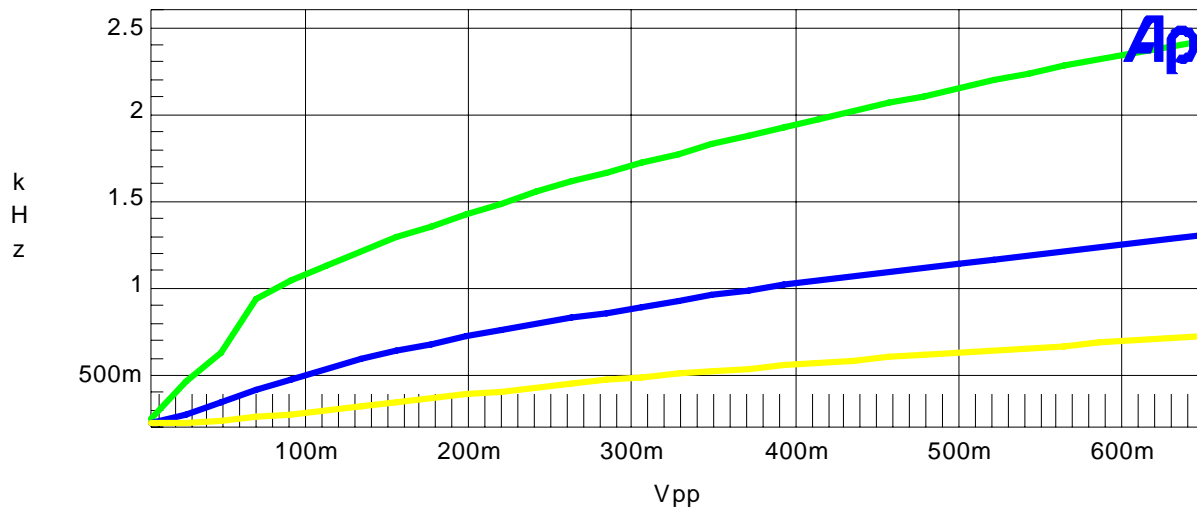


Color	Line Style	Thick	Data	Axis
Green	Solid	3	Anlr.Level A	Left
Blue	Solid	3	Anlr.Level A	Left
Yellow	Solid	3	Anlr.Level A	Left

modulation limiting.at2

OCCUPIED BANDWIDTH

Data in the plots show that all sidebands between 50 & 100% for the authorized bandwidth are attenuated by at least 25dB. From 100 to 250% of the authorized bandwidth they are attenuated by at least 35dB and beyond 250% 43 log(Po) dB. The plot shows the transmitter modulated with 15000 Hz(the highest modulation frequency), adjusted for 50% modulation plus 16 dB. The spectrum analyzer was set with the unmodulated carrier at the top of the screen. The test procedure diagram and occupied bandwidth plot follows.

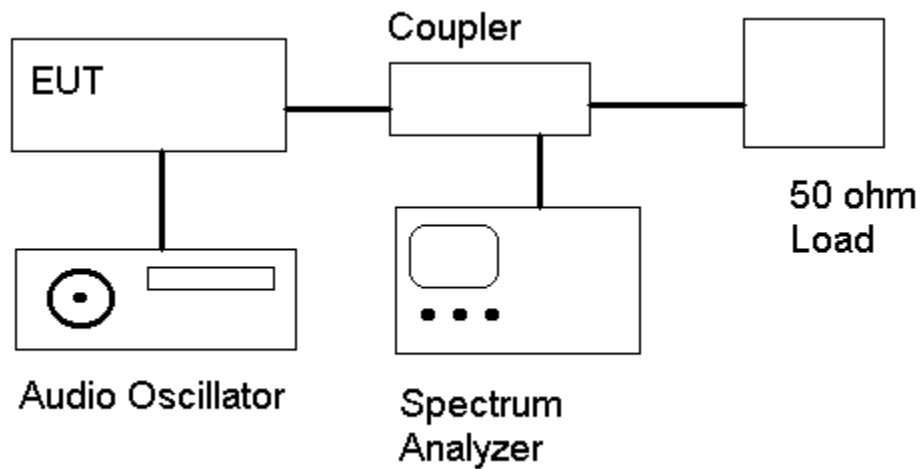

OCCUPIED BANDWIDTH MEASUREMENT




Certificate # 0955-01

OCCUPIED BANDWIDTH PLOT

NOTES:

AZDEN CORPORATION - FCC ID: BZB30HT
OCCUPIED BANDWIDTH PLOT

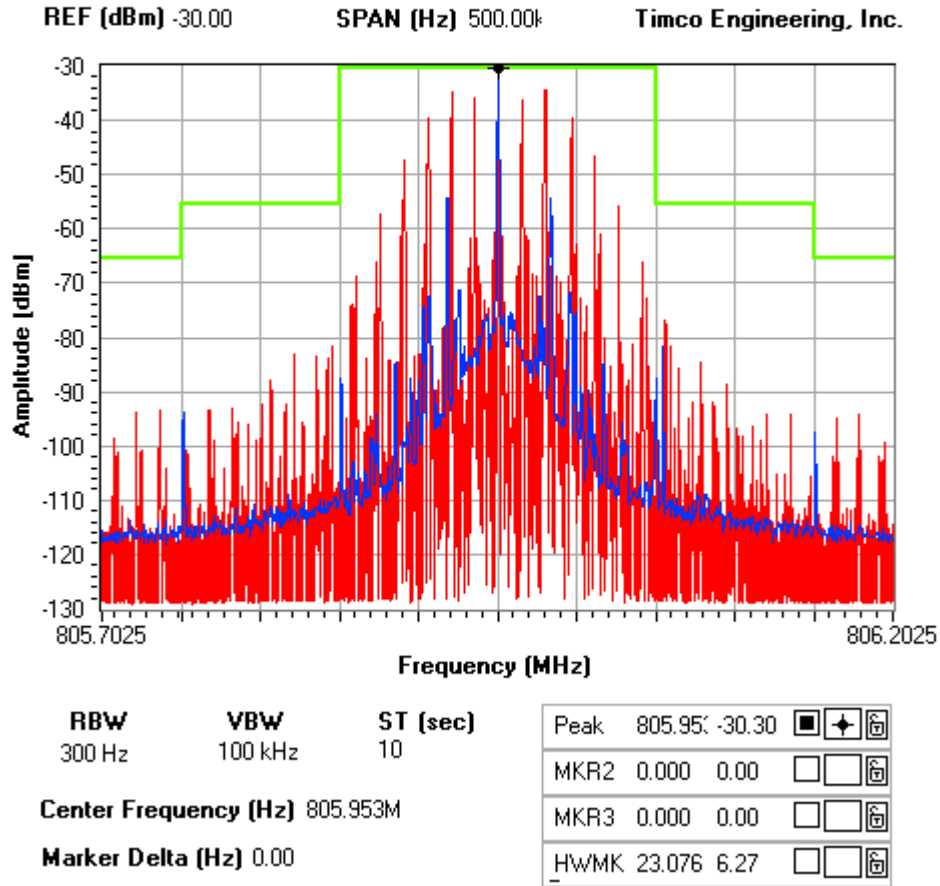



Certificate # 0955-01

SPURIOUS EMISSIONS AT ANTENNA TERMINALS (CONDUCTED)

Not Applicable no antenna connector.



Certificate # 0955-01

FIELD STRENGTH OF SPURIOUS EMISSIONS


Rule Parts. No.: Part 2.1053, RSS-123 Section 6.3

Requirements: Emissions must be $43 + 10\log(P_o)$ dB below the mean power output of the transmitter.

$$43 + 10 \log(0.010) = 23.00\text{dB}$$

METHOD OF MEASUREMENT: The tabulated data shows the results of the radiated field strength emissions test. The spectrum was scanned from 30 MHz to at least the tenth harmonic of the fundamental. This test was conducted per ANSI/TIA 603-C:2004 using the substitution method. Measurements were made at the test site of Timco Engineering, Inc. located at 849 NW State Road 45, Newberry, FL 32669.

Test Setup Diagram:

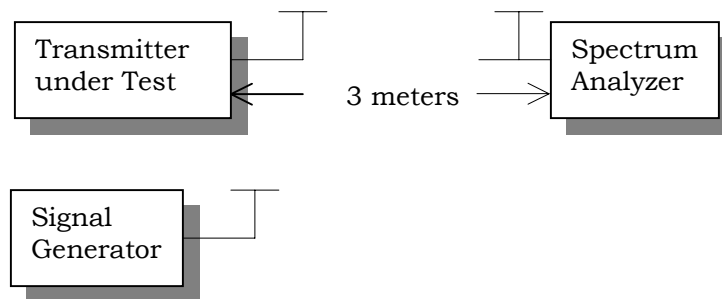

Test Data:

Emission Frequency MHz	Ant. Polarity	dB Below Carrier (dBc)
794.00	V	0
1588.00	V	52.71
2382.00	V	50.18
3176.00	V	52.72
3970.00	V	49.27
4764.00	V	33.32
5558.00	V	41.15
6352.00	V	53.28
7146.00	V	55.09
7940.00	V	52.86



Certificate # 0955-01

TEST DATA CONTD.

Emission Frequency MHz	Ant. Polarity	dB Below Carrier (dBc)
800.00	V	0
1600.00	V	54.61
2400.00	V	45.82
3200.00	V	45.82
4000.00	V	41.87
4800.00	V	33.87
5600.00	V	38.3
6400.00	V	53.61
7200.00	V	47.55
8000.00	V	49.44

Emission Frequency MHz	Ant. Polarity	dB Below Carrier (dBc)
806.00	V	0
1612.00	V	57.7
2418.00	V	44.26
3224.00	V	45.11
4030.00	V	37.73
4836.00	V	28.21
5642.00	V	42.15
6448.00	V	52.35
7254.00	V	47.21
8060.00	V	53.29



Certificate # 0955-01

FREQUENCY STABILITY

Rule Parts. No.: Part 2.1055, Part 74.861, RSS-123 Section 7

Requirements: Temperature and voltage tests were performed to verify that the frequency remains within the .0050%,(50 ppm)

Method of Measurements: TIA/EIA 603.

The test was conducted as follows: The transmitter was placed in the temperature chamber at 25 °C and allowed to stabilize for one hour. The transmitter was keyed ON for one minute during which four frequency readings were recorded at 15-second intervals. The worse case number used in the table below. The assigned channel frequency was considered to be the reference frequency. The temperature was then reduced to -30 °C after which the transmitter was again allowed to stabilize for one hour. The transmitter was keyed ON for one minute, and again frequency readings were noted at 15-second intervals. The worst-case number was again used in the table below. This procedure was repeated in 10-degree increments up to + 50 degrees C.

Test Data:

Assigned Frequency (Ref. Frequency) (MHz)		
Temperature (°C)	Frequency (MHz)	Frequency Stability (PPM)
-30		****
-20	799.946254	-4.29
-10	799.949796	0.14
0	799.952050	2.95
+10	799.952478	3.49
+20	799.951666	2.47
+30	799.950214	0.66
+40	799.948915	-0.97
+50	799.948818	-1.87

Assigned Frequency (Ref. Frequency) (MHz)		
% Battery	Frequency (MHz)	Frequency Stability (PPM)
-15%	799.951658	2.46
0		
+15%	799.951687	2.50

******Note – This device does not work under -20°C.**



Certificate # 0955-01

EMC EQUIPMENT LIST

Device	Manufacturer	Model	Serial Number	Cal/Char Date	Due Date
3/10-Meter OATS	TEI	N/A	N/A	Listed 3/20/07	3/19/10
3-Meter OATS	TEI	N/A	N/A	Listed 1/11/06	1/10/09
3-Meter Semi-Anechoic Chamber	Panashield	N/A	N/A	Listed 5/11/07	5/10/10
Biconnical Antenna	Eaton	94455-1	1057	CAL 12/12/05	12/12/07
Biconnical Antenna	Eaton	94455-1	1096	CAL 8/17/06	8/17/08
Tan Tower Quasi-Peak Adapter	HP	85650A	3303AO1690	CAL 12/8/05	12/8/07
Tan Tower RF Preselector	HP	85685A	32211A01400	CAL 12/7/05	12/7/07
Tan Tower Spectrum Analyzer	HP	8566B Opt 462	3138A07786 3144A20661	CAL 12/7/05	12/7/07
LISN	Electro-Metrics	ANS-25/2	2604	CAL 8/27/06	8/27/08
Log-Periodic Antenna	Eaton	96005	1243	CAL 12/14/05	12/14/07