

TABLE OF CONTENTS LIST

APPLICANT: AZDEN CORPORATION

FCC ID: BZB32BTH

TEST REPORT:

PAGE 1.....COVER SHEET - GENERAL INFORMATION & TECHNICAL DESCR.
PAGE 2.....RF POWER OUTPUT
PAGE 3.....MODULATION CHARACTERISTICS & OCCUPIED BANDWIDTH
PAGE 4.....OCCUPIED BANDWIDTH CONTINUED
PAGE 5-6....FIELD STRENGTH OF SPURIOUS EMISSIONS
PAGE 7.....FREQUENCY STABILITY
PAGE 8.....LIST OF TEST EQUIPMENT

EXHIBITS:

EXHIBIT 1.....POWER OF ATTORNEY LETTER
EXHIBIT 2.....FCC ID LABEL SAMPLE
EXHIBIT 3.....SKETCH OF FCC ID LABEL LOCATION
EXHIBIT 4A.....EXTERNAL FRONT VIEW PHOTOGRAPH
EXHIBIT 4B.....EXTERNAL REAR VIEW PHOTOGRAPH
EXHIBIT 4C.....INTERNAL COMPONENT SIDE PHOTOGRAPH
EXHIBIT 4E.....INTERNAL SOLDER SIDE PHOTOGRAPH
EXHIBIT 5.....BLOCK DIAGRAM
EXHIBIT 6.....SCHEMATIC
EXHIBIT 7.....LIST OF ACTIVE DEVICES
EXHIBIT 7A.....CRYSTAL SPECIFICATION
EXHIBIT 8A-8D....USER'S MANUAL
EXHIBIT 9A-9B....TUNING PROCEDURE
EXHIBIT 10A-10C...AUDIO FREQUENCY RESPONSE GRAPH
EXHIBIT 11A.....MODULATION LIMITING - 300 Hz
EXHIBIT 11B.....MODULATION LIMITING - 1000 Hz
EXHIBIT 11C.....MODULATION LIMITING - 15000 Hz
EXHIBIT 12A.....OCCUPIED BANDWIDTH CW PLOT
EXHIBIT 12B.....OCCUPIED BANDWIDTH 2.5 kHz DEVIATION PLOT
EXHIBIT 12C.....OCCUPIED BANDWIDTH 15 kHz DEVIATION PLOT

APPLICANT: AZDEN CORPORATION

FCC ID: BZB32BTH

DATE: APRIL 7, 2000

REPORT #: T:\CUS\A\AZDEN\AZD59A0\59A0.RPT

PAGE: TABLE OF CONTENTS

GENERAL INFORMATION REQUIRED
FOR TYPE ACCEPTANCE

2.1033 (C)(1)(2) AZDEN CORPORATION will manufacture the BZB32BTH in quantity, for use under FCC RULES PART 74.801, LOW POWER AUXILIARY STATIONS.

2.1033 (C)(1) TECHNICAL DESCRIPTION

(4) Type of Emission: 50K0F3E

Bn = 2M + 2DK

M = 1000

D = 10.0KHz (Peak Deviation)

K = 1

Bn = 2(1K) + 2(10.0K)(1) = 2K + 20.0K = 22.0KHz

M = 15,000

D = 10KHz

K = 1

Bn = 2(15K) + 2(10K) = 30 + 20 = 50KHz

74.861(e)(5) ALLOWED AUTHORIZED BANDWIDTH = 200KHz.

(5) Frequency Range: Part 74: 161.625-161.775MHz & 174-216MHz

TEST FREQ = 184.020MHz.

(6) Power Range and Controls: UNIT has no power controls.

(7) Maximum Output Power Rating: 1.0 MilliWatts ERP.

(8) DC Voltages and Current into Final Amplifier:

FINAL AMPLIFIER ONLY

9.0V BATTERY

Vce = 8.9 Volts

Ice = 5.9mA.

Pce = 53.14mW

(9) Tune-up procedure. The tune-up procedure is given in EXHIBIT #: 8.

2.1033(C) (10) Complete Circuit Diagrams: The circuit diagram is included as EXHIBIT 6. The block diagram is included as EXHIBIT 5.

(11) The equipment label is included at exhibit 2 and the sketch of the label location is Exhibit #3.

(12) Photographs of the equipment are included as exhibit #4.

(13) Digital modulation. This unit does not use digital modulation.

FCC ID: BZB32BTH

DATE: APRIL 7, 2000

REPORT #: T:\CUS\A\AZDEN\AZD59A0\59A0.RPT

PAGE: 1

2.1033(C)(14) The data required by 2.1046 through 2.1057 is submitted below.


2.1046 RF power output.

ERP was measured by the method described later in this report. The input power to the final stage was measured with a 9.0V supply connected in place of the 1.5V battery.

INPUT POWER: FOR 9.0 V OPERATION
(8.9V)(0.0059A) = 53.14MilliWatts

OUTPUT POWER: FOR 9.0 V OPERATION
15.0 mWATTS ERP

R.F. POWER OUTPUT

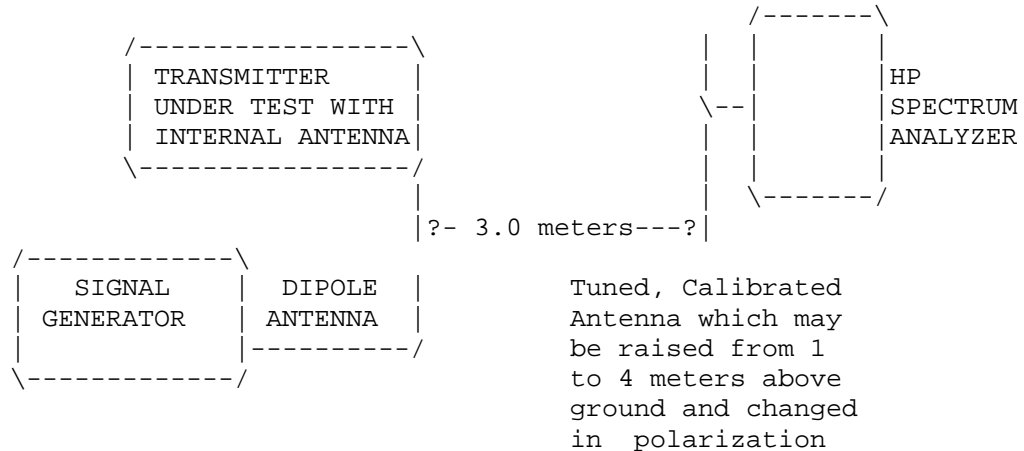


Equipment placed 1 meter above ground on a rotatable platform. The center of the Dipole antenna at the center of the platform and the output of the signal generator adjusted to produce the same meter reading as measured for the fundamental in the radiated emissions test.

2.1047 Modulation characteristics:

(a) AUDIO FREQUENCY RESPONSE

The audio frequency response was measured in accordance with TIA/EIA Specification 603 S2.2.6.2.1. with the following exceptions;

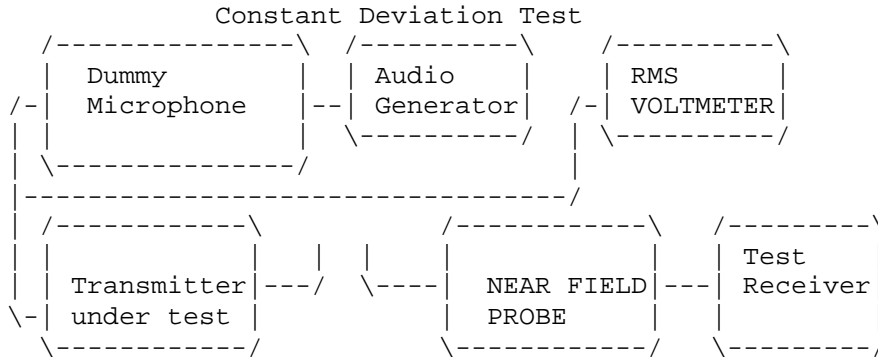

1. The test receiver audio bandwidth was <50Hz to >20,000Hz.
2. Apply a 1000Hz tone and adjust the audio generator to produce 10% of the rated system deviation.
3. Measure frequency response over the frequency range from 100Hz to 20,000Hz.


The audio frequency response curve is shown in EXHIBIT # 10.

(b) MODULATION LIMITING

2.1049 (c) Occupied bandwidth: Using TIA/EIA 2.2.10 Accoustic Microphone Sensitivity test procedure to determine if the UUT could be put into modulation limiting and limiting could not be reached, the maximum deviation was only +40KHz. Using this test procedure the frequency of maximum sensitivity was determined to be 500Hz.

a.

Test procedure diagram
OCCUPIED BANDWIDTH MEASUREMENT

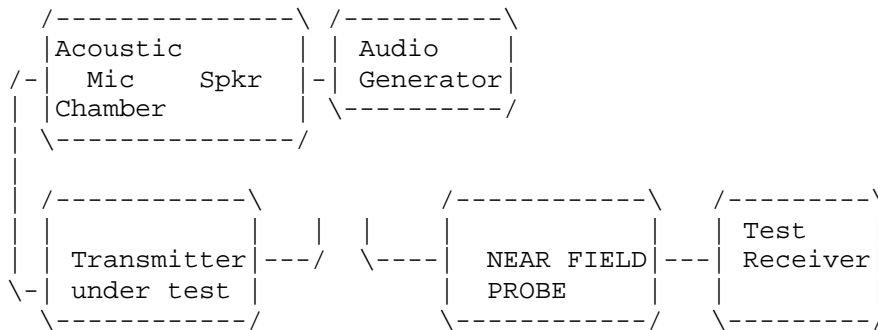


2.1049 Occupied Bandwidth (cont)

b. Since the UUT could not be put into modulation limiting with an acoustic coupling a dummy microphone was used to connect to the UUT and a test procedure similar to TIA/EIA-603 S2.2.11 was used to measure the occupied bandwidth. Plots were made of the frequency of maximum sensitivity, at 10KHz and at the highest frequency for the UUT. Data in the plots show that all sidebands beyond the authorized bandwidth are less than 0.5% of the unmodulated carrier. The plot show the transmitter modulated with 10,000 Hz(the highest modulation frequency), adjusted for 50% modulation plus 16 dB. The spectrum analyzer was set with the unmodulated carrier at the top of the screen. The test procedure diagram and occupied bandwidth plots follow.

Test procedure diagram

OCCUPIED BANDWIDTH MEASUREMENT

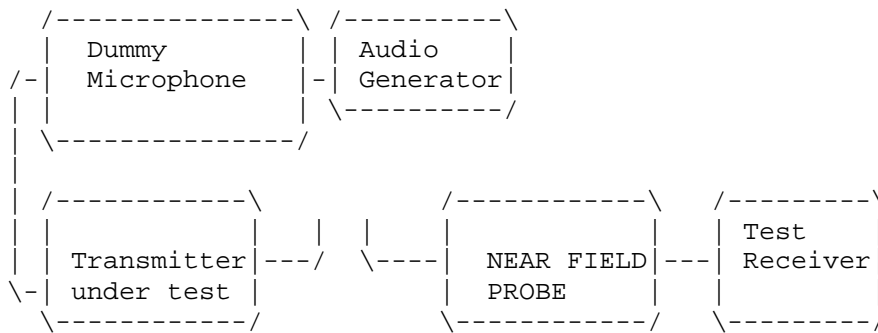

REQUIREMENT: PART 74: 200kHz EMISSION BANDWIDTH.

2.1051 Spurious Emissions at antenna Terminals.

APPLICANT: AZDEN CORPORATION

FCC ID: BZB32BTH

DATE: APRIL 7, 2000

REPORT #: T:\CUS\A\AZDEN\AZD59A0\59A0.RPT

PAGE: 4

2.1053(a)(b) Field strength of spurious emissions:

NAME OF TEST: RADIATED SPURIOUS EMISSIONS

REQUIREMENTS: Emissions must be 43 +10log(Po) dB below the mean power output of the transmitter.

$$43 + 10 \log(0.015) = 43 - 18.2 = 25.0 \text{ dB}$$

TEST DATA:

EMISSION FREQUENCY MHz	ATT. LEVEL dBuV/m	MARGIN dB
184.02	0.00	00.00
368.00	55.15	30.15
552.10	57.30	32.30
736.10	55.23	30.23
920.10	56.80	31.80
1104.10	70.80	45.80
1288.20	74.37	49.37
1472.20	73.43	48.43

METHOD OF MEASUREMENT: The procedure used was TIA/EIA 603 paragraph 2.2.12. The spectrum was scanned from 30 to at least the tenth harmonic of the fundamental using a HP model 8566B spectrum analyzer, an Eaton model 94455-1 Biconical Antenna, ElectroMetrics antennas models TDA, TDS-25-1, TDS-25-2 RGA 180. Measurements were made at the open field test site of TIMCO ENGINEERING INC. located at 849 NW SR 45 ROAD, NEWBERRY, FL. 32669.

APPLICANT: AZDEN CORPORATION

FCC ID: BZB32BTH


DATE: APRIL 7, 2000

REPORT #: T:\CUS\A\AZDEN\AZD59A0\59A0.RPT

PAGE: 5

2.1053(a)(b) Field strength of spurious emissions:

Method of Measuring Radiated Spurious Emissions

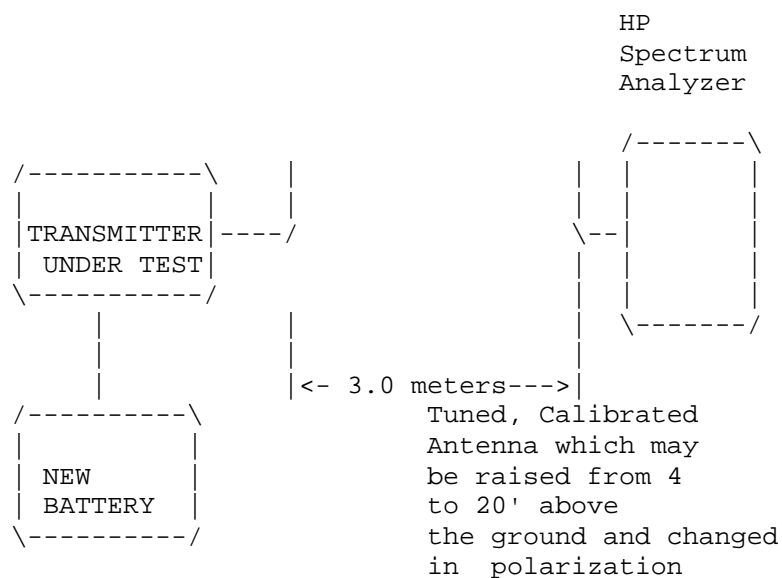

Equipment placed 4' above ground on a rotatable platform.

APPLICANT: AZDEN CORPORATION
FCC ID: BZB32BTH
DATE: APRIL 7, 2000
REPORT #: T:\CUS\A\AZDEN\AZD59A0\59A0.RPT
PAGE: 6

2.1055(a)(b)(d) Frequency stability:

Temperature and voltage tests were performed to verify that the frequency remains within the .0050%, (50 ppm) specification limit.

The test was conducted as follows: The transmitter was placed in the temperature chamber at 25 degrees C and allowed to stabilize for one hour. The transmitter was keyed ON for one minute during which four frequency readings were recorded at 15 second intervals. The worse case number was taken for temperature plotting. The assigned channel frequency was considered to be the reference frequency. The temperature was then reduced to -30 degrees C after which the transmitter was again allowed to stabilize for one hour. The transmitter was keyed ON for one minute, and again frequency readings were noted at 15 second intervals. The worst case number was recorded for temperature plotting. This procedure was repeated in 10 degree increments up to + 50 degrees C.

MEASUREMENT DATA:

Assigned Frequency (Ref. Frequency): 184.025 100MHz

TEMPERATURE_C	FREQUENCY_MHz	PPM
-30	184.027 147	+11.10
-20	184.027 413	+12.55
-10	184.027 458	+12.79
0	184.027 231	+11.56
10	184.026 781	+ 9.11
20	184.026 035	+ 5.06
30	184.025 120	+ 1.17
40	184.024 512	- 3.22
50	184.023 610	- 8.12

25c END BATT. Volt(9.0)= 7.65VDC 184.025 117 + 0.07

RESULTS OF MEASUREMENTS: The maximum frequency variation over the temperature range was - 8.12 to +12.79 ppm. The maximum frequency variation at the battery end-point was +0.07 ppm.

APPLICANT: AZDEN CORPORATION

FCC ID: BZB32BTH

DATE: APRIL 7, 2000

REPORT #: T:\CUS\A\AZDEN\AZD59A0\59A0.RPT

PAGE: 7

TEST EQUIPMENT LIST

1. X Spectrum Analyzer: HP 8566B-Opt 462, S/N 3138A07786, w/
preselector HP 85685A, S/N 3221A01400, Quasi-Peak Adapter
HP 85650A, S/N 3303A01690 & Preamplifier HP 8449B-OPT H02,
S/N 3008A00372 Cal. 10/17/99
2. X Signal Generator: HP 8640B, S/N 2308A21464 Cal. 9/23/99
3. ___ Signal Generator: HP 8614A, S/N 2015A07428 Cal. 5/29/99
4. ___ Passive Loop Antenna: EMCO Model 6512, 9KHz to 30MHz, S/N
9706-1211 Cal. 6/23/97
5. X Biconnical Antenna: Eaton Model 94455-1, S/N 1057
6. X Log-Periodic Antenna: Electro-Metrics Model EM-6950, S/N 632
7. ___ Dipole Antenna Kit: Electro-Metrics Model TDA-30/1-4, S/N 153
Cal. 11/24/99
8. X Double-Ridged Horn Antenna: Electro-Metrics Model RGA-180,
1-18 GHz, S/N 2319 Cal. 4/27/99
9. ___ Horn 40-60GHz: ATM Part #19-443-6R
10. ___ Line Impedance Stabilization Network: Electro-Metrics Model
ANS-25/2, S/N 2604 Cal. 2/9/00
11. X Temperature Chamber: Tenney Engineering Model TTRC, S/N 11717-7
12. X AC Voltmeter: HP Model 400FL, S/N 2213A14499 Cal. 9/21/99
13. ___ Digital Multimeter: Fluke Model 8012A, S/N 4810047 Cal 9/21/99
14. ___ Digital Multimeter: Fluke Model 77, S/N 43850817 Cal 9/21/99
15. ___ Oscilloscope: Tektronix Model 2230, S/N 300572 Cal 9/23/99
16. ___ Frequency Counter: HP Model 5385A, S/N 3242A07460 Cal 10/6/99

APPLICANT: AZDEN CORPORATION

FCC ID: BZB32BTH

DATE: APRIL 7, 2000

REPORT #: T:\CUS\A\AZDEN\AZD59A0\59A0.RPT

PAGE #: 8