

# FCC TEST REPORT

**REPORT NO.:** RF930310A04A

**MODEL NO.:** 1067

**RECEIVED:** Dec. 20, 2005

**TESTED:** Dec. 22 ~ 29, 2005

**ISSUED:** Jan. 2, 2006

**APPLICANT:** MICROSOFT CORPORATION

**ADDRESS:** ONE MICROSOFT WAY REDMOND,  
WA 98052-6399, U.S.A

**ISSUED BY:** Advance Data Technology Corporation

**LAB ADDRESS:** No. 47, 14<sup>th</sup> Ling, Chia Pau Tsuen, Lin Kou  
Hsiang 244, Taipei Hsien, Taiwan, R.O.C.

This test report consists of 31 pages in total. It may be duplicated completely for legal use with the approval of the applicant. It should not be reproduced except in full, without the written approval of our laboratory. The client should not use it to claim product endorsement by CNLA, A2LA or any government agencies. The test results in the report only apply to the tested sample.



No. 2177-01



0528



## Table of Contents

1	CERTIFICATION.....	3
2	SUMMARY OF TEST RESULTS.....	4
2.1	MEASUREMENT UNCERTAINTY .....	4
3	GENERAL INFORMATION .....	5
3.1	GENERAL DESCRIPTION OF EUT.....	5
3.1	DESCRIPTION OF TEST MODES.....	6
3.2	CONFIGURATION OF SYSTEM UNDER TEST .....	6
3.2.1	TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL .....	7
3.3	GENERAL DESCRIPTION OF APPLIED STANDARDS .....	8
3.4	DESCRIPTION OF SUPPORT UNITS.....	8
4	TEST PROCEDURE AND RESULT .....	9
4.1	CONDUCTED EMISSION MEASUREMENT .....	9
4.2	RADIATED EMISSION MEASUREMENT .....	9
4.2.1	LIMITS OF RADIATED EMISSION MEASUREMENT.....	9
4.2.2	TEST INSTRUMENT.....	10
4.2.3	TEST PROCEDURE .....	11
4.2.4	TEST SETUP .....	12
4.2.5	EUT OPERATING CONDITION .....	12
4.2.6	TEST RESULT .....	13
5	PHOTOGRAPHS OF THE TEST CONFIGURATION.....	28
6	INFORMATION ON THE TESTING LABORATORIES .....	30
APPENDIX-A .....		A-1

## 1 CERTIFICATION

**PRODUCT:** Microsoft® Wireless Optical Mouse 2000  
**BRAND NAME:** Microsoft®  
**MODEL NO.:** 1067  
**APPLICANT:** MICROSOFT CORPORATION  
**TEST SAMPLE:** ENGINEERING SAMPLE  
**TESTED:** Dec. 22 ~ 29, 2005  
**STANDARDS:** FCC Part 15, Subpart C (Section 15.227),  
ANSI C63.4 -2003

The above equipment has been tested by **Advance Data Technology Corporation**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's EMC characteristics under the conditions specified in this report.

**PREPARED BY :** Annie Chang , **DATE:** Jan. 2, 2006  
( Annie Chang )

**TECHNICAL**  
**ACCEPTANCE :** Ken Liu , **DATE:** Jan. 2, 2006  
Responsible for RF  
( Ken Liu )

**APPROVED BY :** Gary Chang , **DATE:** Jan. 2, 2006  
( Gary Chang / Supervisor )

## 2 SUMMARY OF TEST RESULTS

The EUT has been tested according to the following specifications:

APPLIED STANDARD: FCC Part 15, Subpart C			
STANDARD PARAGRAPH	TEST TYPE	RESULT	REMARK
15.207	Conducted Emission Test	N/A	Power supply is 1.5Vdc from battery
15.227 15.209	Radiated Emission Test	PASS	Minimum passing margin is -6.35dB at 359.80MHz

### 2.1 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4:

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of  $k=2$ .

Measurement	Frequency	Uncertainty
Radiated emissions	30MHz ~ 200MHz (Horizontal)	3.47 dB
	30MHz ~ 200MHz (Vertical)	3.62 dB
	200MHz ~1000MHz (Horizontal)	3.64 dB
	200MHz ~1000MHz (Vertical)	3.62 dB

### 3 GENERAL INFORMATION

#### 3.1 GENERAL DESCRIPTION OF EUT

<b>PRODUCT</b>	Microsoft® Wireless Optical Mouse 2000
<b>MODEL NO.</b>	1067
<b>POWER SUPPLY</b>	1.5Vdc from battery
<b>MODULATION TYPE</b>	FSK
<b>CARRIER FREQUENCY OF EACH CHANNEL</b>	27.045, 27.145 MHz
<b>NUMBER OF CHANNEL</b>	2
<b>ANTENNA TYPE</b>	Loop antenna
<b>DATA CABLE</b>	NA
<b>I/O PORTS</b>	NA
<b>ASSOCIATED DEVICES</b>	NA

**NOTE:**

1. The EUT is a Wireless Optical Mouse which is a transmitter
2. The above EUT information was declared by manufacturer and for more detailed features description, please refer to the manufacturer's specifications or User's Manual.

### 3.1 DESCRIPTION OF TEST MODES

Two channels were provided to this EUT


Channel	Frequency (MHz)
0	27.045MHz
1	27.145MHz

Three sets of identical samples are tested and presented in the report.


Mouse Serial Number
0081
0082
0083

### 3.2 CONFIGURATION OF SYSTEM UNDER TEST

For operating mode:

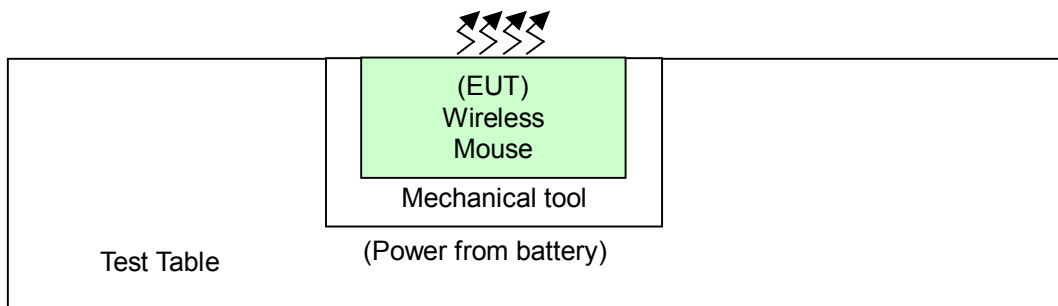

For Standby mode:

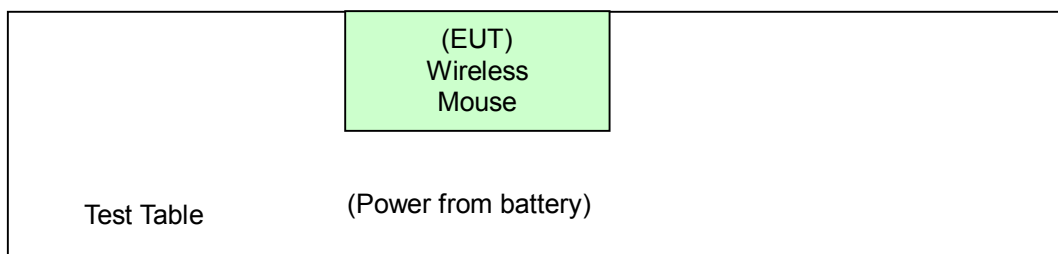



### 3.2.1 TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL

EUT configure mode	Applicable to		Description
	PLC	RE<1G	
A	Note	√	Mouse serial number: 0081 (operating@27.045)
B	Note	√	Mouse serial number: 0081 (operating@27.145)
C	Note	√	Mouse serial number: 0081 (standby@27.045)
D	Note	√	Mouse serial number: 0082 (operating@27.045)
E	Note	√	Mouse serial number: 0082 (operating@27.145)
F	Note	√	Mouse serial number: 0082 (standby@27.045)
G	Note	√	Mouse serial number: 0083 (operating@27.045)
H	Note	√	Mouse serial number: 0083 (operating@27.145)
I	Note	√	Mouse serial number: 0083 (standby@27.145)

Where PLC: Power Line Conducted Emission RE<1G RE: Radiated Emission below 1GHz

Note: No need to concern of Conducted Emission due to the EUT is powered by battery.

**Radiated Emission Test (Below 1 GHz):**

Following channel(s) was (were) selected for the final test as listed below.

EUT configure mode	OPERATING STATE	Available Channel	Tested Channel	Modulation Type
A	Operating	0, 1	0	FSK
B	Operating	0, 1	1	FSK
C	Standby	0, 1	0	FSK
D	Operating	0, 1	0	FSK
E	Operating	0, 1	1	FSK
F	Standby	0, 1	0	FSK
G	Operating	0, 1	0	FSK
H	Operating	0, 1	1	FSK
I	Standby	0, 1	1	FSK

### 3.3 GENERAL DESCRIPTION OF APPLIED STANDARDS

The EUT is a RF product. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

**FCC Part 15, Subpart C. (15.227)**  
**ANSI C63.4 -2003**

All test items have been performed and recorded as per the above standards.

### 3.4 DESCRIPTION OF SUPPORT UNITS

NO.	PRODUCT	BRAND	MODEL NO.	SERIAL NO.	FCC ID
1	MECHANICAL TOOL	ADT	N/A	N/A	N/A



## 4 TEST PROCEDURE AND RESULT

### 4.1 CONDUCTED EMISSION MEASUREMENT

NA

### 4.2 RADIATED EMISSION MEASUREMENT

#### 4.2.1 LIMITS OF RADIATED EMISSION MEASUREMENT

According to 15.227 the field strength of Emissions from intentional radiators operated under these frequencies bands shall not exceed the following:

Fundamental Frequency (MHz)	Field Strength of Fundamental (dBuV/m)	
	Peak	Average
26.96-27.28	100	80

Field strength limits are at the distance of 3 meters, Emissions radiated outside of the specified bands, shall be according to the general radiated limits in 15.209 as following:

Frequencies (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

As shown in 15.35(b), for frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.



## 4.2.2 TEST INSTRUMENT

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED UNTIL
Test Receiver ROHDE & SCHWARZ	ESMI	839013/007 839379/002	Feb. 03, 2006
Spectrum Analyzer ROHDE & SCHWARZ	FSEK30	100049	Aug. 14, 2006
BILOG Antenna SCHWARZBECK	VULB9163	121	Jun. 01, 2006
HORN Antenna SCHWARZBECK	BBHA 9120D	9120D-407	Jan. 06, 2006
HORN Antenna SCHWARZBECK	BBHA 9170	BBHA 9170242	Jan. 23, 2006
Loop Antenna	HFH2-Z2	100070	Nov. 28, 2007
Preamplifier Agilent	8449B	3008A01911	Sep. 22, 2006
RF signal cable HUBER+SUHNNER	SUCOFLEX 104	218188/218189 /231134	Apr. 19, 2006
RF signal cable Worken	8D-FB	CABLE-HYCH5-02	Apr. 21, 2006
Software ADT.	ADT_Radiated_ V7.6.01	NA	NA
Antenna Tower EMCO	2070/2080	512.835.4684	NA
Antenna Tower Controller EMCO	2090	NA	NA
Turn Table EMCO	2087-2.03	NA	NA
Turn Table Controller EMCO	2090	NA	NA

- NOTE:**
1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
  2. The test was performed in HwaYa Chamber 4.
  3. The horn antenna and HP preamplifier (model: 8449B) are used only for the measurement of emission frequency above 1GHz if tested.
  4. The IC Site Registration No. is IC4924-4.


### 4.2.3 TEST PROCEDURE

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna is a broadband antenna, and its height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions would be re-tested one by one using peak, quasi-peak method or average method as specified and then reported in data sheet.

**NOTE:**

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Quasi-peak detection at frequency below 1GHz.
2. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 1 MHz for Peak detection (PK) at frequency above 1GHz.

#### 4.2.4 TEST SETUP

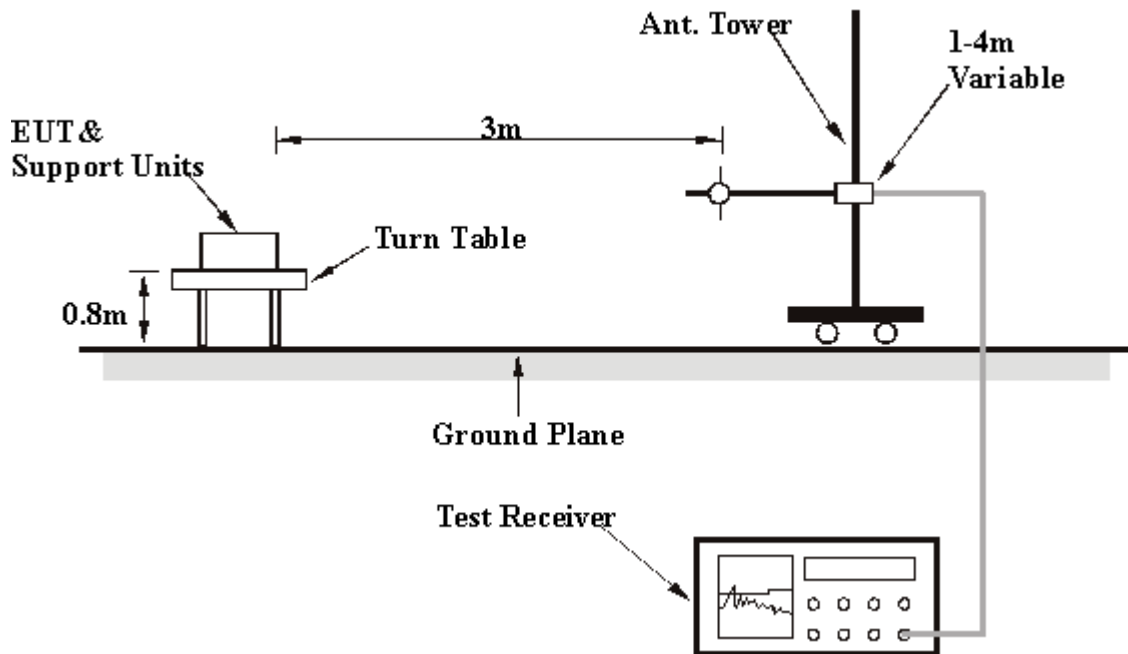

For the actual test configuration, please refer to the related item in this test report - Photographs of the Test Configuration.

#### 4.2.5 EUT OPERATING CONDITION

Set the EUT under transmission condition continuously at specific channel frequency.

## 4.2.6 TEST RESULT

<b>EUT</b>	Microsoft® Wireless Optical Mouse 2000	<b>MEASUREMENT DETAIL</b>	
<b>MODEL NO.</b>	1067	<b>SERIAL NO.</b>	0081
<b>INPUT POWER</b>	1.5Vdc	<b>FREQUENCY RANGE</b>	Below 1000MHz
<b>ENVIRONMENTAL CONDITIONS</b>	22deg. C, 62% RH, 1012hPa	<b>DETECTOR FUNCTION</b>	Peak / Average
<b>TEST MODE</b>	A	<b>OPERATING STATE</b>	Operating
<b>TESTED BY</b>	Jamison Chan		

<b>TEST DISTANCE: 3 M</b>								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*27.045	47.52PK	100.00	-52.48	1.68	108	36.87	10.65
2	*27.045	46.00AV	80.00	-34.00	1.68	108	35.35	10.65

### REMARKS:

- 1 Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
- 2 Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
- 3 The other emission levels were very low against the limit.
- 4 Margin value = Emission level – Limit value.
- 5 "\*"= Fundamental frequency.
- 6 Loop antenna was used for all radiated emission below 30MHz.

<b>EUT</b>	Microsoft® Wireless Optical Mouse 2000	<b>MEASUREMENT DETAIL</b>	
<b>MODEL NO.</b>	1067	<b>SERIAL NO.</b>	0081
<b>INPUT POWER</b>	1.5Vdc	<b>FREQUENCY RANGE</b>	Below 1000MHz
<b>ENVIRONMENTAL CONDITIONS</b>	22deg. C, 62% RH, 1012hPa	<b>DETECTOR FUNCTION</b>	Quasi-Peak
<b>TEST MODE</b>	A	<b>OPERATING STATE</b>	Operating
<b>TESTED BY</b>	Jamison Chan		

#### ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	176.58	30.93 QP	43.50	-12.57	1.25 H	4	21.81	9.13
2	211.07	30.33 QP	43.50	-13.17	1.25 H	292	19.26	11.07
3	375.97	34.57 QP	46.00	-11.43	1.00 H	346	18.39	16.19
4	408.30	34.95 QP	46.00	-11.05	1.50 H	214	18.13	16.82
5	694.99	35.31 QP	46.00	-10.69	1.00 H	238	13.88	21.43
6	959.04	36.71 QP	46.00	-9.29	1.00 H	250	11.32	25.39

#### ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	142.09	36.16 QP	43.50	-7.34	1.25 V	304	27.80	8.35
2	189.51	31.97 QP	43.50	-11.53	1.00 V	352	22.02	9.96
<b>3</b>	<b>359.80</b>	<b>39.65 QP</b>	<b>46.00</b>	<b>-6.35</b>	<b>1.00 V</b>	<b>208</b>	<b>23.87</b>	<b>15.78</b>
4	416.92	35.48 QP	46.00	-10.52	1.00 V	232	18.62	16.86
5	631.40	37.11 QP	46.00	-8.89	1.00 V	220	16.06	21.05
6	668.04	33.61 QP	46.00	-12.39	1.50 V	214	12.22	21.39

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
  2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
  3. The other emission levels were very low against the limit.
  4. Margin value = Emission level – Limit value.

<b>EUT</b>	Microsoft® Wireless Optical Mouse 2000	<b>MEASUREMENT DETAIL</b>	
<b>MODEL NO.</b>	1067	<b>SERIAL NO.</b>	0081
<b>INPUT POWER</b>	1.5Vdc	<b>FREQUENCY RANGE</b>	Below 1000MHz
<b>ENVIRONMENTAL CONDITIONS</b>	22deg. C, 62% RH, 1012hPa	<b>DETECTOR FUNCTION</b>	Peak / Average
<b>TEST MODE</b>	B	<b>OPERATING STATE</b>	Operating
<b>TESTED BY</b>	Jamison Chan		

<b>TEST DISTANCE: 3 M</b>								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*27.145	47.35PK	100.00	-52.65	1.86	68	36.70	10.65
2	*27.145	46.06AV	80.00	-33.94	1.86	68	35.41	10.65

**REMARKS:**

- 1 Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
- 2 Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
- 3 The other emission levels were very low against the limit.
- 4 Margin value = Emission level – Limit value.
- 5 "\*"= Fundamental frequency.
- 6 Loop antenna was used for all radiated emission below 30MHz.

<b>EUT</b>	Microsoft® Wireless Optical Mouse 2000	<b>MEASUREMENT DETAIL</b>	
<b>MODEL NO.</b>	1067	<b>SERIAL NO.</b>	0081
<b>INPUT POWER</b>	1.5Vdc	<b>FREQUENCY RANGE</b>	Below 1000MHz
<b>ENVIRONMENTAL CONDITIONS</b>	22deg. C, 62% RH, 1012hPa	<b>DETECTOR FUNCTION</b>	Quasi-Peak
<b>TEST MODE</b>	B	<b>OPERATING STATE</b>	Operating
<b>TESTED BY</b>	Jamison Chan		

#### ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	144.24	25.14 QP	43.50	-18.36	1.00 H	280	14.89	10.25
2	414.77	32.46 QP	46.00	-13.54	2.00 H	10	14.19	18.27
3	723.01	29.09 QP	46.00	-16.91	1.75 H	94	5.81	23.28
4	761.81	31.43 QP	46.00	-14.57	1.50 H	58	7.26	24.16
5	868.51	31.29 QP	46.00	-14.71	1.25 H	82	6.05	25.24
6	941.80	33.42 QP	46.00	-12.58	1.25 H	82	7.35	26.07

#### ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	145.32	24.73 QP	43.50	-18.77	1.75 V	10	14.49	10.25
2	768.28	27.50 QP	46.00	-18.50	1.25 V	280	3.37	24.14
3	848.03	28.98 QP	46.00	-17.02	1.25 V	10	3.73	25.25
4	884.68	27.48 QP	46.00	-18.52	1.25 V	196	2.28	25.20
5	918.09	28.70 QP	46.00	-17.30	1.50 V	184	3.15	25.55
6	954.73	29.14 QP	46.00	-16.86	1.25 V	178	3.00	26.14

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
  2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
  3. The other emission levels were very low against the limit.
  4. Margin value = Emission level – Limit value.



<b>EUT</b>	Microsoft® Wireless Optical Mouse 2000	<b>MEASUREMENT DETAIL</b>	
<b>MODEL NO.</b>	1067	<b>SERIAL NO.</b>	0081
<b>INPUT POWER</b>	1.5Vdc	<b>FREQUENCY RANGE</b>	Below 1000MHz
<b>ENVIRONMENTAL CONDITIONS</b>	22deg. C, 62% RH, 1012hPa	<b>DETECTOR FUNCTION</b>	Quasi-Peak
<b>TEST MODE</b>	C	<b>OPERATING STATE</b>	Standby
<b>TESTED BY</b>	Jamison Chan		

**ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M**

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	206.76	28.08 QP	43.50	-15.42	1.25 H	244	17.16	10.92
2	400.76	34.50 QP	46.00	-11.50	1.75 H	262	17.71	16.79
3	646.49	29.85 QP	46.00	-16.15	3.00 H	250	8.54	21.31
4	683.13	30.58 QP	46.00	-15.42	1.75 H	250	9.17	21.41
5	909.47	31.73 QP	46.00	-14.27	1.25 H	70	6.92	24.81
6	957.97	29.67 QP	46.00	-16.33	1.75 H	268	4.26	25.41

**ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M**

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	94.67	31.46 QP	43.50	-12.04	1.00 V	298	19.42	12.04
2	133.47	33.73 QP	43.50	-9.77	1.00 V	298	25.20	8.53
3	200.29	34.64 QP	43.50	-8.86	1.00 V	226	23.94	10.70
4	330.70	31.97 QP	46.00	-14.03	1.50 V	316	16.84	15.12
5	393.21	36.70 QP	46.00	-9.30	1.00 V	244	20.08	16.62
6	887.91	33.84 QP	46.00	-12.16	1.50 V	286	9.20	24.63

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
  2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
  3. The other emission levels were very low against the limit.
  4. Margin value = Emission level – Limit value.

<b>EUT</b>	Microsoft® Wireless Optical Mouse 2000	<b>MEASUREMENT DETAIL</b>	
<b>MODEL NO.</b>	1067	<b>SERIAL NO.</b>	0082
<b>INPUT POWER</b>	1.5Vdc	<b>FREQUENCY RANGE</b>	Below 1000MHz
<b>ENVIRONMENTAL CONDITIONS</b>	22deg. C, 62% RH, 1012hPa	<b>DETECTOR FUNCTION</b>	Peak / Average
<b>TEST MODE</b>	D	<b>OPERATING STATE</b>	Operating
<b>TESTED BY</b>	Jamison Chan		

<b>TEST DISTANCE: 3 M</b>								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*27.045	47.73PK	100.00	-52.27	2.07	0	37.09	10.65
2	*27.045	46.28AV	80.00	-33.72	2.07	0	35.64	10.65

**REMARKS:**

- 1 Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
- 2 Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
- 3 The other emission levels were very low against the limit.
- 4 Margin value = Emission level – Limit value.
- 5 "\*"= Fundamental frequency.
- 6 Loop antenna was used for all radiated emission below 30MHz.

<b>EUT</b>	Microsoft® Wireless Optical Mouse 2000	<b>MEASUREMENT DETAIL</b>	
<b>MODEL NO.</b>	1067	<b>SERIAL NO.</b>	0082
<b>INPUT POWER</b>	1.5Vdc	<b>FREQUENCY RANGE</b>	Below 1000MHz
<b>ENVIRONMENTAL CONDITIONS</b>	22deg. C, 62% RH, 1012hPa	<b>DETECTOR FUNCTION</b>	Quasi-Peak
<b>TEST MODE</b>	D	<b>OPERATING STATE</b>	Operating
<b>TESTED BY</b>	Jamison Chan		

#### ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	163.64	27.73 QP	43.50	-15.77	1.50 H	304	19.24	8.49
2	242.32	28.98 QP	46.00	-17.02	1.25 H	64	16.83	12.16
3	401.83	33.13 QP	46.00	-12.87	1.75 H	334	16.33	16.80
4	668.04	35.01 QP	46.00	-10.99	1.00 H	220	13.62	21.39
5	908.39	31.51 QP	46.00	-14.49	1.50 H	250	6.72	24.79
6	946.11	30.57 QP	46.00	-15.43	2.00 H	226	5.05	25.51

#### ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	40.78	26.54 QP	40.00	-13.46	3.00 V	310	12.75	13.79
2	129.16	27.42 QP	43.50	-16.08	2.00 V	184	18.78	8.64
3	152.87	32.16 QP	43.50	-11.34	1.75 V	208	23.84	8.33
4	202.44	24.23 QP	43.50	-19.27	1.00 V	298	13.46	10.77
5	222.92	25.96 QP	46.00	-20.04	1.75 V	256	14.47	11.48
6	349.02	33.92 QP	46.00	-12.08	1.75 V	208	18.40	15.51
7	640.02	32.24 QP	46.00	-13.76	1.75 V	208	11.04	21.20
8	680.98	34.36 QP	46.00	-11.64	1.75 V	208	12.95	21.41

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
  2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
  3. The other emission levels were very low against the limit.
  4. Margin value = Emission level – Limit value.

<b>EUT</b>	Microsoft® Wireless Optical Mouse 2000	<b>MEASUREMENT DETAIL</b>	
<b>MODEL NO.</b>	1067	<b>SERIAL NO.</b>	0082
<b>INPUT POWER</b>	1.5Vdc	<b>FREQUENCY RANGE</b>	Below 1000MHz
<b>ENVIRONMENTAL CONDITIONS</b>	22deg. C, 62% RH, 1012hPa	<b>DETECTOR FUNCTION</b>	Peak / Average
<b>TEST MODE</b>	E	<b>OPERATING STATE</b>	Operating
<b>TESTED BY</b>	Jamison Chan		

<b>TEST DISTANCE: 3 M</b>								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*27.145	47.61PK	100.00	-52.39	1.77	20	36.96	10.65
2	*27.145	46.37AV	80.00	-33.63	1.77	20	35.72	10.65

**REMARKS:**

- 1 Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
- 2 Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
- 3 The other emission levels were very low against the limit.
- 4 Margin value = Emission level – Limit value.
- 5 "\*"= Fundamental frequency.
- 6 Loop antenna was used for all radiated emission below 30MHz.

<b>EUT</b>	Microsoft® Wireless Optical Mouse 2000	<b>MEASUREMENT DETAIL</b>	
<b>MODEL NO.</b>	1067	<b>SERIAL NO.</b>	0082
<b>INPUT POWER</b>	1.5Vdc	<b>FREQUENCY RANGE</b>	Below 1000MHz
<b>ENVIRONMENTAL CONDITIONS</b>	22deg. C, 62% RH, 1012hPa	<b>DETECTOR FUNCTION</b>	Quasi-Peak
<b>TEST MODE</b>	E	<b>OPERATING STATE</b>	Operating
<b>TESTED BY</b>	Jamison Chan		

#### ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	144.24	24.12 QP	43.50	-19.38	1.00 H	352	13.87	10.25
2	374.89	28.95 QP	46.00	-17.05	2.00 H	52	11.34	17.62
3	427.70	32.45 QP	46.00	-13.55	2.00 H	172	14.15	18.30
4	535.48	28.43 QP	46.00	-17.57	1.50 H	202	8.29	20.14
5	742.41	30.61 QP	46.00	-15.39	1.75 H	70	6.66	23.95
6	936.41	34.52 QP	46.00	-11.48	1.25 H	88	8.57	25.95

#### ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	144.24	25.32 QP	43.50	-18.18	1.00 V	64	15.06	10.25
2	427.70	27.05 QP	46.00	-18.95	2.00 V	70	8.74	18.30
3	754.27	27.83 QP	46.00	-18.17	1.25 V	340	3.64	24.19
4	869.59	27.84 QP	46.00	-18.16	2.00 V	274	2.60	25.24
5	907.31	27.83 QP	46.00	-18.17	2.00 V	136	2.52	25.31
6	949.34	29.24 QP	46.00	-16.76	1.75 V	10	3.01	26.24

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
  2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
  3. The other emission levels were very low against the limit.
  4. Margin value = Emission level – Limit value.

<b>EUT</b>	Microsoft® Wireless Optical Mouse 2000	<b>MEASUREMENT DETAIL</b>	
<b>MODEL NO.</b>	1067	<b>SERIAL NO.</b>	0082
<b>INPUT POWER</b>	1.5Vdc	<b>FREQUENCY RANGE</b>	Below 1000MHz
<b>ENVIRONMENTAL CONDITIONS</b>	22deg. C, 62% RH, 1012hPa	<b>DETECTOR FUNCTION</b>	Quasi-Peak
<b>TEST MODE</b>	F	<b>OPERATING STATE</b>	Standby
<b>TESTED BY</b>	Jamison Chan		

#### ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	147.48	26.97 QP	43.50	-16.53	1.75 H	28	18.63	8.34
2	183.04	28.47 QP	43.50	-15.03	2.00 H	298	18.97	9.51
3	363.03	28.96 QP	46.00	-17.04	1.75 H	214	13.10	15.86
4	558.11	29.77 QP	46.00	-16.23	1.50 H	4	10.42	19.35
5	664.81	31.37 QP	46.00	-14.63	1.75 H	244	9.98	21.39
6	936.41	31.92 QP	46.00	-14.08	1.75 H	256	6.59	25.33

#### ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	103.29	28.38 QP	43.50	-15.12	1.25 V	316	16.66	11.72
2	147.48	29.54 QP	43.50	-13.96	1.00 V	16	21.20	8.34
3	199.21	32.26 QP	43.50	-11.24	1.25 V	298	21.63	10.63
4	413.69	39.04 QP	46.00	-6.96	1.25 V	316	22.19	16.84
5	925.63	32.56 QP	46.00	-13.44	1.25 V	292	7.44	25.12
6	957.97	28.89 QP	46.00	-17.11	3.00 V	268	3.47	25.41

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
  2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
  3. The other emission levels were very low against the limit.
  4. Margin value = Emission level – Limit value.

<b>EUT</b>	Microsoft® Wireless Optical Mouse 2000	<b>MEASUREMENT DETAIL</b>	
<b>MODEL NO.</b>	1067	<b>SERIAL NO.</b>	0083
<b>INPUT POWER</b>	1.5Vdc	<b>FREQUENCY RANGE</b>	Below 1000MHz
<b>ENVIRONMENTAL CONDITIONS</b>	22deg. C, 62% RH, 1012hPa	<b>DETECTOR FUNCTION</b>	Peak / Average
<b>TEST MODE</b>	G	<b>OPERATING STATE</b>	Operating
<b>TESTED BY</b>	Jamison Chan		

<b>TEST DISTANCE: 3 M</b>								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*27.045	47.24PK	100.00	-52.76	2.14	19	36.60	10.65
2	*27.045	46.05AV	80.00	-33.95	2.14	19	35.41	10.65

**REMARKS:**

- 1 Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
- 2 Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
- 3 The other emission levels were very low against the limit.
- 4 Margin value = Emission level – Limit value.
- 5 "\*"= Fundamental frequency.
- 6 Loop antenna was used for all radiated emission below 30MHz.

<b>EUT</b>	Microsoft® Wireless Optical Mouse 2000	<b>MEASUREMENT DETAIL</b>	
<b>MODEL NO.</b>	1067	<b>SERIAL NO.</b>	0083
<b>INPUT POWER</b>	1.5Vdc	<b>FREQUENCY RANGE</b>	Below 1000MHz
<b>ENVIRONMENTAL CONDITIONS</b>	22deg. C, 62% RH, 1012hPa	<b>DETECTOR FUNCTION</b>	Quasi-Peak
<b>TEST MODE</b>	G	<b>OPERATING STATE</b>	Operating
<b>TESTED BY</b>	Jamison Chan		

#### ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	145.32	23.92 QP	43.50	-19.58	1.00 H	46	13.67	10.25
2	374.89	31.90 QP	46.00	-14.10	2.50 H	88	14.28	17.62
3	427.70	32.73 QP	46.00	-13.27	1.75 H	340	14.43	18.30
4	720.86	31.04 QP	46.00	-14.96	1.75 H	70	7.84	23.20
5	855.58	31.69 QP	46.00	-14.31	1.25 H	70	6.40	25.28
6	948.27	31.55 QP	46.00	-14.45	1.25 H	100	5.34	26.21

#### ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	144.24	24.55 QP	43.50	-18.95	1.75 V	94	14.30	10.25
2	209.99	26.73 QP	43.50	-16.77	1.75 V	16	13.92	12.81
3	790.91	27.59 QP	46.00	-18.41	1.75 V	202	3.54	24.05
4	855.58	29.86 QP	46.00	-16.14	1.25 V	46	4.57	25.28
5	900.84	28.10 QP	46.00	-17.90	3.00 V	358	2.93	25.17
6	953.66	29.06 QP	46.00	-16.94	2.00 V	40	2.90	26.16

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
  2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
  3. The other emission levels were very low against the limit.
  4. Margin value = Emission level – Limit value.



<b>EUT</b>	Microsoft® Wireless Optical Mouse 2000	<b>MEASUREMENT DETAIL</b>	
<b>MODEL NO.</b>	1067	<b>SERIAL NO.</b>	0083
<b>INPUT POWER</b>	1.5Vdc	<b>FREQUENCY RANGE</b>	Below 1000MHz
<b>ENVIRONMENTAL CONDITIONS</b>	22deg. C, 62% RH, 1012hPa	<b>DETECTOR FUNCTION</b>	Peak / Average
<b>TEST MODE</b>	H	<b>OPERATING STATE</b>	Operating
<b>TESTED BY</b>	Jamison Chan		

<b>TEST DISTANCE: 3 M</b>								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*27.145	47.41PK	100.00	-52.59	2.01	359	36.76	10.65
2	*27.145	46.19AV	80.00	-33.81	2.01	359	35.54	10.65

**REMARKS:**

- 1 Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
- 2 Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
- 3 The other emission levels were very low against the limit.
- 4 Margin value = Emission level – Limit value.
- 5 "\*"= Fundamental frequency.
- 6 Loop antenna was used for all radiated emission below 30MHz.

<b>EUT</b>	Microsoft® Wireless Optical Mouse 2000	<b>MEASUREMENT DETAIL</b>	
<b>MODEL NO.</b>	1067	<b>SERIAL NO.</b>	0083
<b>INPUT POWER</b>	1.5Vdc	<b>FREQUENCY RANGE</b>	Below 1000MHz
<b>ENVIRONMENTAL CONDITIONS</b>	22deg. C, 62% RH, 1012hPa	<b>DETECTOR FUNCTION</b>	Quasi-Peak
<b>TEST MODE</b>	H	<b>OPERATING STATE</b>	Operating
<b>TESTED BY</b>	Jamison Chan		

#### ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	76.34	22.22 QP	40.00	-17.78	1.50 H	316	13.63	8.59
2	217.53	26.08 QP	46.00	-19.92	1.50 H	4	14.79	11.30
3	316.69	26.06 QP	46.00	-19.94	2.00 H	274	11.23	14.82
4	355.49	34.57 QP	46.00	-11.43	1.00 H	220	18.90	15.67
5	488.06	28.09 QP	46.00	-17.91	1.00 H	196	10.03	18.06
6	878.21	37.25 QP	46.00	-8.75	2.00 H	244	12.62	24.64
7	943.96	37.60 QP	46.00	-8.40	1.00 H	220	12.13	25.47

#### ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	38.62	22.72 QP	40.00	-17.28	2.00 V	358	9.40	13.32
2	52.63	21.19 QP	40.00	-18.81	1.50 V	346	8.37	12.81
3	91.43	30.81 QP	43.50	-12.69	1.00 V	244	18.92	11.89
4	130.23	31.92 QP	43.50	-11.58	1.00 V	244	23.31	8.61
5	191.67	33.33 QP	43.50	-10.17	1.50 V	208	23.22	10.11
6	207.83	24.26 QP	43.50	-19.24	2.00 V	352	13.31	10.96
7	294.06	27.63 QP	46.00	-18.37	2.00 V	310	13.42	14.21

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
  2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
  3. The other emission levels were very low against the limit.
  4. Margin value = Emission level – Limit value.

<b>EUT</b>	Microsoft® Wireless Optical Mouse 2000	<b>MEASUREMENT DETAIL</b>	
<b>MODEL NO.</b>	1067	<b>SERIAL NO.</b>	0083
<b>INPUT POWER</b>	1.5Vdc	<b>FREQUENCY RANGE</b>	Below 1000MHz
<b>ENVIRONMENTAL CONDITIONS</b>	22deg. C, 62% RH, 1012hPa	<b>DETECTOR FUNCTION</b>	Quasi-Peak
<b>TEST MODE</b>	I	<b>OPERATING STATE</b>	Standby
<b>TESTED BY</b>	Jamison Chan		

#### ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	77.42	20.00 QP	40.00	-20.00	1.00 H	208	11.37	8.62
2	112.99	23.50 QP	43.50	-20.00	2.00 H	94	13.43	10.07
3	225.08	26.01 QP	46.00	-19.99	3.00 H	328	14.46	11.56
4	615.23	32.22 QP	46.00	-13.78	2.00 H	238	11.44	20.78
5	669.12	32.17 QP	46.00	-13.83	1.00 H	208	10.77	21.39
6	705.77	30.27 QP	46.00	-15.73	1.00 H	280	8.62	21.65
7	739.18	30.87 QP	46.00	-15.13	1.00 H	286	7.98	22.89
8	905.16	30.06 QP	46.00	-15.94	2.00 H	274	5.33	24.73

#### ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	52.63	23.27 QP	40.00	-16.73	2.00 V	220	10.46	12.81
2	83.89	27.81 QP	40.00	-12.19	1.25 V	274	17.90	9.91
3	125.92	32.16 QP	43.50	-11.34	1.25 V	268	23.44	8.72
4	172.27	27.58 QP	43.50	-15.92	1.25 V	274	18.67	8.91
5	197.06	24.91 QP	43.50	-18.59	1.50 V	226	14.43	10.48
6	619.54	34.54 QP	46.00	-11.46	1.50 V	298	13.68	20.85
7	688.52	33.36 QP	46.00	-12.64	1.50 V	220	11.94	21.42

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
  2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
  3. The other emission levels were very low against the limit.
  4. Margin value = Emission level – Limit value.

## 5 PHOTOGRAPHS OF THE TEST CONFIGURATION

### RADIATED EMISSION TEST (Operating Mode)



**RADIATED EMISSION TEST (Standby Mode)**



## 6 INFORMATION ON THE TESTING LABORATORIES

We, ADT Corp., were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are accredited and approved by the following approval agencies according to ISO/IEC 17025

<b>USA</b>	FCC, NVLAP, UL , A2LA
<b>Germany</b>	TUV Rheinland
<b>Japan</b>	VCCI
<b>Norway</b>	NEMKO
<b>Canada</b>	INDUSTRY CANADA , CSA
<b>R.O.C.</b>	CNLA, BSMI, DGT
<b>Netherlands</b>	Telefication
<b>Singapore</b>	PSB , GOST-ASIA(MOU)
<b>Russia</b>	CERTIS(MOU)

Copies of accreditation certificates of our laboratories obtained from approval agencies can be downloaded from our web site: [www.adt.com.tw/index.5/phtml](http://www.adt.com.tw/index.5/phtml).

If you have any comments, please feel free to contact us at the following:

**Linko EMC/RF Lab:**

Tel: 886-2-26052180

Fax: 886-2-26052943

**Hsin Chu EMC/RF Lab:**

Tel: 886-3-5935343

Fax: 886-3-5935342

**Hwa Ya EMC/RF/Safety/Telecom Lab:**

Tel: 886-3-3183232

Fax: 886-3-3185050

**Linko RF Lab.**

Tel: 886-3-3270910

Fax: 886-3-3270892

**Web Site:** [www.adt.com.tw](http://www.adt.com.tw)

The address and road map of all our labs can be found in our web site also.



## **APPENDIX-A**

### **MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB**

No any modifications are made to the EUT by the lab during the test.