

FCC Test Report

Report No.: RF160627D06

FCC ID: C3K1786

Test Model: 1786

Received Date: Jun. 27, 2016

Test Date: Jun. 30 ~ Jul. 4, 2016

Issued Date: Jul. 7, 2016

Applicant: MICROSOFT CORPORATION

Address: ONE MICROSOFT WAY REDMOND, WA 98052-6399, U.S.A

Issued By: Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch

Lab Address: No. 47-2, 14th Ling, Chia Pau Vil., Lin Kou Dist., New Taipei City, Taiwan (R.O.C.)



This report is for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence, provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents. Unless specific mention, the uncertainty of measurement has been explicitly taken into account to declare the compliance or non-compliance to the specification. The report must not be used by the client to claim product certification, approval, or endorsement by TAF or any government agencies.

Table of Contents

Release Control Record	4
1 Certificate of Conformity	5
2 Summary of Test Results	6
2.1 Measurement Uncertainty	6
2.2 Modification Record	6
3 General Information	7
3.1 General Description of EUT	7
3.2 Description of Test Modes	8
3.2.1 Test Mode Applicability and Tested Channel Detail	9
3.3 Duty cycle of test signal	10
3.4 Description of Support Units	11
3.4.1 Configuration of System under Test	11
3.5 General Description of Applied Standards	11
4 Test Types and Results	12
4.1 Radiated Emission and Bandedge Measurement.....	12
4.1.1 Limits of Radiated Emission and Bandedge Measurement	12
4.1.2 Test Instruments	13
4.1.3 Test Procedures.....	14
4.1.4 Deviation from Test Standard	14
4.1.5 Test Set Up	15
4.1.6 EUT Operating Conditions.....	15
4.1.7 Test Results	16
4.2 6dB Bandwidth Measurement.....	28
4.2.1 Limits of 6dB Bandwidth Measurement.....	28
4.2.2 Test Setup.....	28
4.2.3 Test Instruments	28
4.2.4 Test Procedure	28
4.2.5 Deviation from Test Standard	28
4.2.6 EUT Operating Conditions.....	28
4.2.7 Test Result.....	29
4.3 Conducted Output Power Measurement.....	30
4.3.1 Limits OF Conducted Output Power Measurement	30
4.3.2 Test Setup.....	30
4.3.3 Test Instruments	30
4.3.4 Test Procedures.....	30
4.3.5 Deviation from Test Standard	30
4.3.6 EUT Operating Conditions.....	30
4.3.7 Test Results	30
4.4 Power Spectral Density Measurement.....	31
4.4.1 Limits of Power Spectral Density Measurement.....	31
4.4.2 Test Setup.....	31
4.4.3 Test Instruments	31
4.4.4 Test Procedure	31
4.4.5 Deviation from Test Standard	31
4.4.6 EUT Operating Condition	31
4.4.7 Test Results	32
4.5 Conducted Out of Band Emission Measurement.....	33
4.5.1 Limits of Conducted Out of Band Emission Measurement.....	33
4.5.2 Test Setup.....	33
4.5.3 Test Instruments	33
4.5.4 Test Procedure	33

4.5.5 Deviation from Test Standard	33
4.5.6 EUT Operating Condition	33
4.5.7 TEST RESULTS	34
5 Pictures of Test Arrangements	36
Appendix – Information on the Testing Laboratories	37

Release Control Record

Issue No.	Description	Date Issued
RF160627D06	Original release.	Jul. 7, 2016

1 Certificate of Conformity

Product: Microsoft Bluetooth Keyboard

Brand: Microsoft

Test Model: 1786

Sample Status: Engineering sample

Applicant: MICROSOFT CORPORATION

Test Date: Jun. 30 ~ Jul. 4, 2016

Standards: 47 CFR FCC Part 15, Subpart C (Section 15.247)
ANSI C63.10: 2013

The above equipment has been tested by **Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's EMC characteristics under the conditions specified in this report.

Prepared by : Annie Chang , **Date:** Jul. 7, 2016
Annie Chang / Senior Specialist

Approved by : Rex Lai , **Date:** Jul. 7, 2016
Rex Lai / Assistant Manager

2 Summary of Test Results

47 CFR FCC Part 15, Subpart C (SECTION 15.247)			
FCC Clause	Test Item	Result	Remarks
15.207	AC Power Conducted Emission	N/A	Power supply is 3Vdc from batteries
15.205 / 15.209 / 15.247(d)	Radiated Emissions and Band Edge Measurement	PASS	Meet the requirement of limit. Minimum passing margin is -8.2dB at 746.78MHz.
15.247(d)	Antenna Port Emission	PASS	Meet the requirement of limit.
15.247(a)(2)	6dB bandwidth	PASS	Meet the requirement of limit.
15.247(b)	Conducted power	PASS	Meet the requirement of limit.
15.247(e)	Power Spectral Density	PASS	Meet the requirement of limit.
15.203	Antenna Requirement	PASS	No antenna connector is used

2.1 Measurement Uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

Measurement	Frequency	Expanded Uncertainty (k=2) (\pm)
Radiated Emissions up to 1 GHz	30MHz ~ 1000MHz	4.00 dB
Radiated Emissions above 1 GHz	1GHz ~ 40GHz	3.36 dB

2.2 Modification Record

There were no modifications required for compliance.

3 General Information

3.1 General Description of EUT

Product	Microsoft Bluetooth Keyboard
Brand	Microsoft
Test Model	1786
Status of EUT	Engineering sample
Power Supply Rating	3Vdc from batteries
Modulation Type	GFSK
Transfer Rate	1Mbps
Operating Frequency	2402-2480MHz
Number of Channel	40
Output Power	1.119mW
Antenna Type	PCB antenna with 1.59dBi gain
Antenna Connector	N/A
Accessory Device	N/A
Data Cable Supplied	N/A

Note:

- The EUT has serial samples, which are defined as their serial numbers as follows:
 - ◇ Serial No.: 045
 - ◇ Serial No.: 114
 - ◇ Serial No.: 116
 - ◇ Serial No.: 119
- The above EUT information is declared by manufacturer and for more detailed features description, please refer to the manufacturer's specifications or user's manual.

3.2 Description of Test Modes

40 channels are provided to this EUT:

CHANNEL	FREQ. (MHz)	CHANNEL	FREQ. (MHz)	CHANNEL	FREQ. (MHz)	CHANNEL	FREQ. (MHz)
0	2402	10	2422	20	2442	30	2462
1	2404	11	2424	21	2444	31	2464
2	2406	12	2426	22	2446	32	2466
3	2408	13	2428	23	2448	33	2468
4	2410	14	2430	24	2450	34	2470
5	2412	15	2432	25	2452	35	2472
6	2414	16	2434	26	2454	36	2474
7	2416	17	2436	27	2456	37	2476
8	2418	18	2438	28	2458	38	2478
9	2420	19	2440	29	2460	39	2480

3.2.1 Test Mode Applicability and Tested Channel Detail

EUT CONFIGURE MODE	APPLICABLE TO				DESCRIPTION
	RE≥1G	RE<1G	PLC	APCM	
-	√	√	Note 1	√	-

Where **RE≥1G**: Radiated Emission above 1GHz **RE<1G**: Radiated Emission below 1GHz
PLC: Power Line Conducted Emission **APCM**: Antenna Port Conducted Measurement

NOTE 1: No need to concern of Conducted Emission due to the EUT is powered by batteries

NOTE 2: The EUT had been pre-tested on the positioned of each 3 axis. The worst case was found when positioned on **X-plane**.

Radiated Emission Test (Above 1GHz):

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TYPE	DATA RATE (Mbps)	Serial No.
-	0 to 39	0, 19, 39	GFSK	1	114, 116, 119

Radiated Emission Test (Below 1GHz):

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TYPE	DATA RATE (Mbps)	Serial No.
-	0 to 39	0	GFSK	1	114, 116, 119

Antenna Port Conducted Measurement:

- This item includes all test value of each mode, but only includes spectrum plot of worst value of each mode.
- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TYPE	DATA RATE (Mbps)	Serial No.
-	0 to 39	0, 19, 39	GFSK	1	045


Test Condition:

APPLICABLE TO	ENVIRONMENTAL CONDITIONS	INPUT POWER	TESTED BY
RE≥1G	27deg. C, 63%RH	3Vdc	Aaron You
RE<1G	27deg. C, 63%RH	3Vdc	Aaron You
APCM	20deg. C, 70%RH	3Vdc	Saxon Lee

3.3 Duty cycle of test signal

Duty cycle of test signal is < 98%


Duty cycle = 0.423/0.628 = 0.674, Duty factor = 10 * log(1/0.674) = 1.71

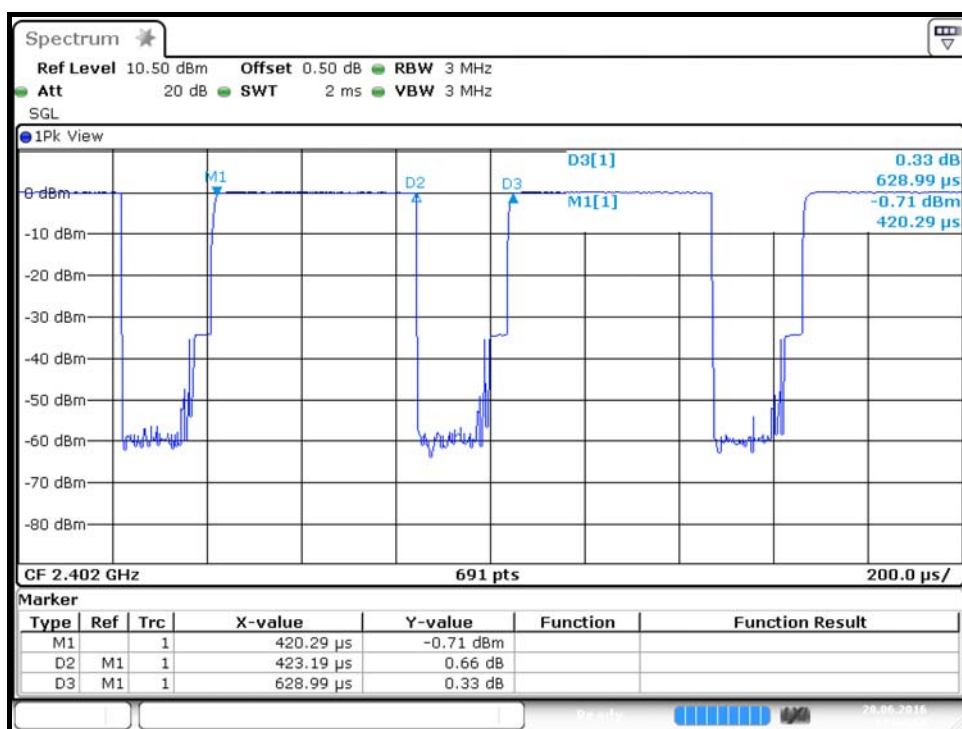

3.4 Description of Support Units

The EUT has been tested as an independent unit together without other necessary accessories or support units.

3.4.1 Configuration of System under Test

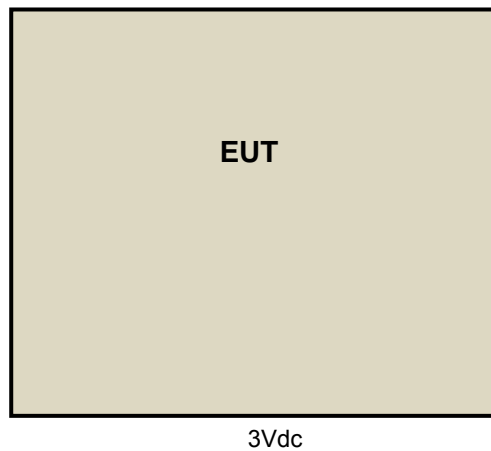

3.5 General Description of Applied Standards

The EUT is a RF Product. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

FCC Part 15, Subpart C (15.247)
558074 D01 DTS Meas Guidance v03r05
ANSI C63.10-2013

All test items have been performed and recorded as per the above standards.

4 Test Types and Results

4.1 Radiated Emission and Bandedge Measurement

4.1.1 Limits of Radiated Emission and Bandedge Measurement

Radiated emissions which fall in the restricted bands must comply with the radiated emission limits specified as below table. Other emissions shall be at least 20dB below the highest level of the desired power:

Frequencies (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 ~ 0.490	2400/F(kHz)	300
0.490 ~ 1.705	24000/F(kHz)	30
1.705 ~ 30.0	30	30
30 ~ 88	100	3
88 ~ 216	150	3
216 ~ 960	200	3
Above 960	500	3

NOTE:

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = 20 log Emission level (uV/m).
3. For frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.

4.1.2 Test Instruments

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
HP Preamplifier	8447D	2432A03504	Feb. 26, 2016	Feb. 25, 2017
HP Preamplifier	8449B	3008A01201	Feb. 26, 2016	Feb. 25, 2017
MITEQ Preamplifier	AMF-6F-260400-33-8P	892164	Mar. 01, 2016	Feb. 28, 2017
Agilent TEST RECEIVER	N9038A	MY51210129	Feb. 02, 2016	Feb. 01, 2017
Schwarzbeck Antenna	VULB 9168	139	Jan. 04, 2016	Jan. 03, 2017
Schwarzbeck Antenna	VHBA 9123	480	May 29, 2015	May 28, 2017
Schwarzbeck Horn Antenna	BBHA-9170	212	Jan. 08, 2016	Jan. 07, 2017
Schwarzbeck Horn Antenna	BBHA 9120-D1	D130	Jan. 21, 2016	Jan. 20, 2017
ADT. Turn Table	TT100	0306	NA	NA
ADT. Tower	AT100	0306	NA	NA
Software	Radiated_V7.6.15.9.4	NA	NA	NA
SUHNER RF cable With 4dB PAD	SF104	CABLE-CH6	Aug. 15, 2015	Aug. 14, 2016
SUHNER RF cable With 3dB PAD	SF102	Cable-CH8-3.6m	Aug. 15, 2015	Aug. 14, 2016
KEYSIGHT MIMO Powermeasurement Test set	U2021XA	U2021XA-001	May 25, 2016	May 24, 2017
KEYSIGHT Spectrum Analyzer	N9030A	MY54490260	Jul. 14, 2015	Jul. 13, 2016
EMCO Horn Antenna	3115	00028257	Jan. 19, 2016	Jan. 18, 2017
Highpass filter Wainwright Instruments	WHK 3.1/18G-10SS	SN 8	NA	NA
ROHDE & SCHWARZ Spectrum Analyzer	FSV40	101042	Sep. 23, 2015	Sep. 22, 2016
Anritsu Power Sensor	MA2411B	0738404	Apr. 28, 2016	Apr. 27, 2017
Anritsu Power Meter	ML2495A	0842014	Apr. 28, 2016	Apr. 27, 2017

- NOTE:**
1. The calibration interval of the above test instruments is 12/24 months. And the calibrations are traceable to NML/ROC and NIST/USA.
 2. The horn antenna and HP preamplifier (model: 8449B) are used only for the measurement of emission frequency above 1GHz if tested.
 3. The test was performed in Chamber No. 6.
 4. The Industry Canada Reference No. IC 7450E-6.
 5. The FCC Site Registration No. is 447212.

4.1.3 Test Procedures

- a. The EUT was placed on the top of a rotating table 0.8 meters (for below 1GHz) / 1.5 meters (for above 1GHz) above the ground at 3 meter chamber room for test. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to quasi-peak detect function and specified bandwidth with maximum hold mode when the test frequency is below 1 GHz.
- f. The test-receiver system was set to peak and average detect function and specified bandwidth with maximum hold mode when the test frequency is above 1 GHz. If the peak reading value also meets average limit, measurement with the average detector is unnecessary.

Note:


1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Quasi-peak detection (QP) at frequency below 1GHz.
2. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 3 MHz for Peak detection (PK) at frequency above 1GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is 3MHz for RMS Average (Duty cycle < 98%) for Average detection (AV) at frequency above 1GHz, then the measurement results was added to a correction factor ($10 \log(1/\text{duty cycle})$).
4. All modes of operation were investigated and the worst-case emissions are reported.

4.1.4 Deviation from Test Standard


No deviation.

4.1.5 Test Set Up

<Frequency Range below 1GHz>

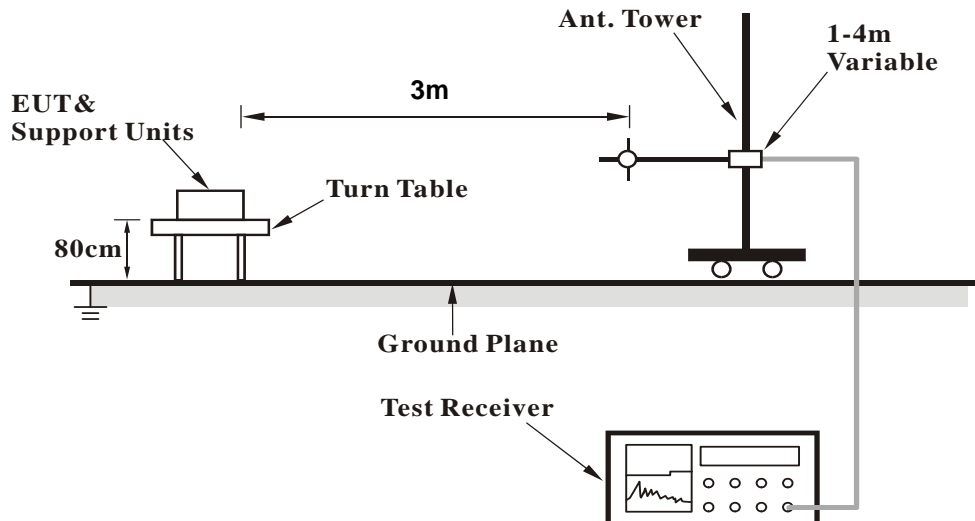

<Frequency Range above 1GHz>

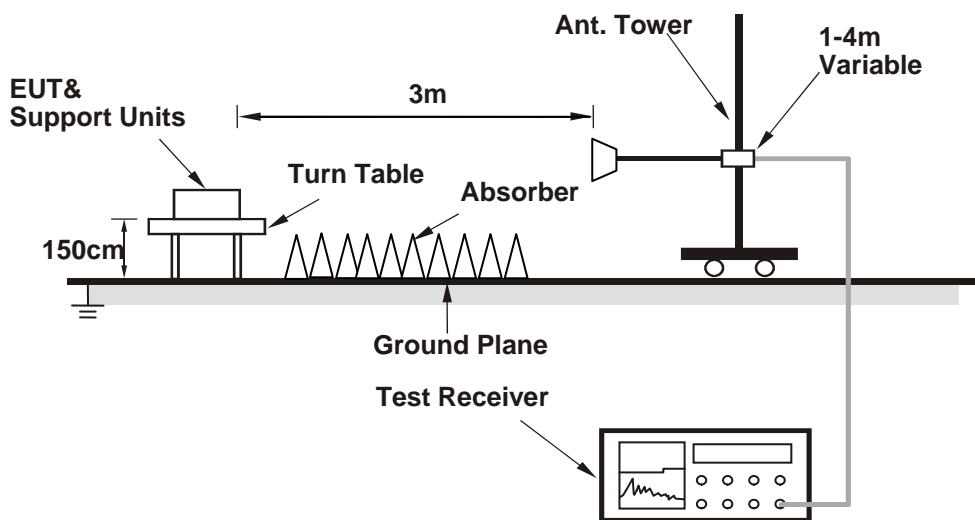

For the actual test configuration, please refer to the attached file (Test Setup Photo).

4.1.6 EUT Operating Conditions

- Placed the EUT on the testing table.
- Set the EUT under transmission condition continuously at specific channel frequency.

4.1.7 Test Results

Above 1GHz Data :

Serial No.: 114

CHANNEL	TX Channel 0	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	62.6 PK	74.0	-11.4	1.28 H	46	62.9	-0.3
2	2390.00	40.6 AV	54.0	-13.4	1.28 H	46	40.9	-0.3
3	*2402.00	97.3 PK			1.28 H	46	97.6	-0.2
4	*2402.00	96.3 AV			1.28 H	46	96.6	-0.2
5	4804.00	48.1 PK	74.0	-25.9	1.41 H	84	42.0	6.1
6	4804.00	39.5 AV	54.0	-14.5	1.41 H	84	33.4	6.1
7	#7206.00	52.9 PK	74.0	-21.1	1.31 H	86	39.5	13.4
8	#7206.00	42.6 AV	54.0	-11.5	1.31 H	86	29.1	13.4
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	58.1 PK	74.0	-15.9	3.72 V	4	58.4	-0.3
2	2390.00	40.4 AV	54.0	-13.6	3.72 V	4	40.7	-0.3
3	*2402.00	94.0 PK			3.72 V	4	94.3	-0.2
4	*2402.00	93.0 AV			3.72 V	4	93.2	-0.2
5	4804.00	46.4 PK	74.0	-27.6	2.60 V	228	40.3	6.1
6	4804.00	38.1 AV	54.0	-15.9	2.60 V	228	32.1	6.1
7	#7206.00	53.8 PK	74.0	-20.2	1.49 V	273	40.4	13.4
8	#7206.00	43.3 AV	54.0	-10.7	1.49 V	273	29.9	13.4

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

CHANNEL	TX Channel 19	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2440.00	97.6 PK			1.40 H	47	97.6	0.0
2	*2440.00	96.6 AV			1.40 H	47	96.6	0.0
3	4880.00	47.9 PK	74.0	-26.1	1.45 H	80	41.8	6.1
4	4880.00	39.6 AV	54.0	-14.4	1.45 H	80	33.5	6.1
5	7320.00	53.5 PK	74.0	-20.5	1.29 H	84	40.0	13.5
6	7320.00	43.5 AV	54.0	-10.5	1.29 H	84	30.0	13.5

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2440.00	92.7 PK			3.63 V	3	92.7	0.0
2	*2440.00	91.7 AV			3.63 V	3	91.7	0.0
3	4880.00	46.4 PK	74.0	-27.6	2.58 V	211	40.3	6.1
4	4880.00	38.2 AV	54.0	-15.8	2.58 V	211	32.1	6.1
5	7320.00	54.0 PK	74.0	-20.0	1.48 V	271	40.5	13.5
6	7320.00	43.6 AV	54.0	-10.4	1.48 V	271	30.1	13.5

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.

CHANNEL	TX Channel 39	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2480.00	97.4 PK			1.54 H	61	97.2	0.3
2	*2480.00	96.8 AV			1.54 H	61	96.5	0.3
3	2483.50	64.9 PK	74.0	-9.1	1.54 H	61	64.6	0.3
4	2483.50	41.5 AV	54.0	-12.5	1.54 H	61	41.2	0.3
5	4960.00	47.8 PK	74.0	-26.2	1.39 H	76	41.5	6.3
6	4960.00	41.1 AV	54.0	-12.9	1.39 H	76	34.8	6.3
7	7440.00	53.5 PK	74.0	-20.5	1.34 H	85	39.6	13.9
8	7440.00	43.2 AV	54.0	-10.8	1.34 H	85	29.3	13.9

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2480.00	92.8 PK			3.96 V	2	92.5	0.3
2	*2480.00	91.7 AV			3.96 V	2	91.5	0.3
3	2483.50	59.7 PK	74.0	-14.3	3.96 V	2	59.4	0.3
4	2483.50	41.0 AV	54.0	-13.0	3.96 V	2	40.7	0.3
5	4960.00	47.2 PK	74.0	-26.8	2.53 V	230	40.9	6.3
6	4960.00	38.6 AV	54.0	-15.4	2.53 V	230	32.3	6.3
7	7440.00	54.4 PK	74.0	-19.6	1.51 V	280	40.5	13.9
8	7440.00	44.4 AV	54.0	-9.6	1.51 V	280	30.5	13.9

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.

Serial No.: 116

CHANNEL	TX Channel 0	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	4804.00	48.3 PK	74.0	-25.7	1.54 H	78	42.3	6.1
2	4804.00	40.3 AV	54.0	-13.7	1.54 H	78	34.3	6.1
3	#7206.00	52.5 PK	74.0	-21.5	1.16 H	46	39.1	13.4
4	#7206.00	44.1 AV	54.0	-9.9	1.16 H	46	30.7	13.4

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	4804.00	47.8 PK	74.0	-26.3	1.51 V	243	41.7	6.1
2	4804.00	39.3 AV	54.0	-14.7	1.51 V	243	33.2	6.1
3	#7206.00	53.5 PK	74.0	-20.5	1.32 V	271	40.1	13.4
4	#7206.00	45.2 AV	54.0	-8.8	1.32 V	271	31.8	13.4

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. "#": The radiated frequency is out of the restricted band.

CHANNEL	TX Channel 19	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	4880.00	48.4 PK	74.0	-25.6	1.40 H	87	42.3	6.1
2	4880.00	40.1 AV	54.0	-13.9	1.40 H	87	34.0	6.1
3	7320.00	55.4 PK	74.0	-18.6	1.76 H	43	41.9	13.5
4	7320.00	45.3 AV	54.0	-8.7	1.76 H	43	31.8	13.5

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	4880.00	47.7 PK	74.0	-26.3	1.50 V	237	41.6	6.1
2	4880.00	39.6 AV	54.0	-14.4	1.50 V	237	33.5	6.1
3	7320.00	55.5 PK	74.0	-18.5	1.48 V	262	42.0	13.5
4	7320.00	45.6 AV	54.0	-8.4	1.48 V	262	32.1	13.5

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value

CHANNEL	TX Channel 39	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	4960.00	48.2 PK	74.0	-25.8	1.43 H	90	41.9	6.3
2	4960.00	41.8 AV	54.0	-12.2	1.43 H	90	35.5	6.3
3	7440.00	53.4 PK	74.0	-20.6	1.34 H	87	39.5	13.9
4	7440.00	44.0 AV	54.0	-10.0	1.34 H	87	30.1	13.9

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	4960.00	47.8 PK	74.0	-26.3	1.30 V	253	41.5	6.3
2	4960.00	38.8 AV	54.0	-15.2	1.30 V	253	32.5	6.3
3	7440.00	54.9 PK	74.0	-19.1	1.42 V	266	41.0	13.9
4	7440.00	44.9 AV	54.0	-9.1	1.42 V	266	31.0	13.9

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value

Serial No.: 119

CHANNEL	TX Channel 0	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 12.5GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	4804.00	48.1 PK	74.0	-25.9	1.35 H	72	42.0	6.1
2	4804.00	39.9 AV	54.0	-14.1	1.35 H	72	33.8	6.1
3	#7206.00	53.3 PK	74.0	-20.7	1.33 H	95	39.9	13.4
4	#7206.00	43.6 AV	54.0	-10.4	1.33 H	95	30.1	13.4

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	4804.00	47.3 PK	74.0	-26.7	1.52 V	243	41.2	6.1
2	4804.00	39.8 AV	54.0	-14.2	1.52 V	243	33.7	6.1
3	#7206.00	54.9 PK	74.0	-19.1	1.01 V	277	41.5	13.4
4	#7206.00	45.5 AV	54.0	-8.5	1.01 V	277	32.1	13.4

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. "#": The radiated frequency is out of the restricted band.

CHANNEL	TX Channel 19	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 12.5GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	4880.00	48.2 PK	74.0	-25.8	1.33 H	76	42.1	6.1
2	4880.00	39.8 AV	54.0	-14.2	1.33 H	76	33.7	6.1
3	7320.00	53.7 PK	74.0	-20.3	1.31 H	91	40.2	13.5
4	7320.00	43.6 AV	54.0	-10.4	1.31 H	91	30.1	13.5

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	4880.00	47.3 PK	74.0	-26.8	1.50 V	241	41.1	6.1
2	4880.00	39.2 AV	54.0	-14.8	1.50 V	241	33.0	6.1
3	7320.00	54.7 PK	74.0	-19.3	1.00 V	269	41.2	13.5
4	7320.00	45.3 AV	54.0	-8.8	1.00 V	269	31.7	13.5

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value

CHANNEL	TX Channel 39	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 12.5GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	4960.00	48.2 PK	74.0	-25.8	1.41 H	88	41.9	6.3
2	4960.00	41.3 AV	54.0	-12.7	1.41 H	88	35.0	6.3
3	7440.00	53.6 PK	74.0	-20.4	1.35 H	90	39.7	13.9
4	7440.00	44.0 AV	54.0	-10.0	1.35 H	90	30.1	13.9

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	4960.00	47.2 PK	74.0	-26.8	1.40 V	69	40.9	6.3
2	4960.00	38.4 AV	54.0	-15.6	1.40 V	69	32.1	6.3
3	7440.00	54.9 PK	74.0	-19.1	1.40 V	89	41.0	13.9
4	7440.00	45.1 AV	54.0	-8.9	1.40 V	89	31.2	13.9

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value

BELOW 1GHZ WORST-CASE DATA

Serial No.: 114

CHANNEL	TX Channel 0	DETECTOR FUNCTION	Quasi-Peak (QP)
FREQUENCY RANGE	30MHz ~ 1GHz		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	36.45	18.4 QP	40.0	-21.6	4.00 H	229	29.4	-11.0
2	191.94	19.0 QP	43.5	-24.5	4.00 H	207	30.8	-11.8
3	243.45	25.5 QP	46.0	-20.5	4.00 H	43	35.5	-10.0
4	589.01	27.5 QP	46.0	-18.5	2.01 H	11	29.2	-1.7
5	878.12	30.5 QP	46.0	-15.5	1.00 H	74	27.9	2.6
6	988.17	33.6 QP	54.0	-20.4	1.00 H	258	28.8	4.9

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	36.11	21.6 QP	40.0	-18.4	1.53 V	0	32.6	-11.1
2	159.20	19.4 QP	43.5	-24.1	1.00 V	203	28.7	-9.3
3	372.99	22.3 QP	46.0	-23.7	1.77 V	187	28.5	-6.2
4	562.68	27.5 QP	46.0	-18.5	2.64 V	192	30.0	-2.6
5	746.40	36.9 QP	46.0	-9.1	2.96 V	163	36.0	0.9
6	997.09	34.4 QP	54.0	-19.6	2.00 V	314	29.5	4.9

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value

Serial No.: 116

CHANNEL	TX Channel 0	DETECTOR FUNCTION	Quasi-Peak (QP)
FREQUENCY RANGE	30MHz ~ 1GHz		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	52.07	19.1 QP	40.0	-20.9	4.00 H	96	28.7	-9.6
2	208.04	18.7 QP	43.5	-24.9	4.00 H	83	30.6	-11.9
3	246.31	25.5 QP	46.0	-20.5	4.00 H	302	35.4	-9.9
4	633.05	27.5 QP	46.0	-18.5	1.24 H	4	28.2	-0.7
5	851.88	31.5 QP	46.0	-14.5	1.00 H	345	29.3	2.2
6	959.99	33.0 QP	46.0	-13.0	1.00 H	185	28.2	4.8

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	61.57	21.7 QP	40.0	-18.3	1.23 V	262	32.0	-10.3
2	141.36	21.2 QP	43.5	-22.3	1.00 V	144	31.1	-10.0
3	581.69	27.3 QP	46.0	-18.7	1.62 V	29	29.3	-2.0
4	746.57	30.6 QP	46.0	-15.4	2.17 V	194	29.7	0.9
5	808.72	31.3 QP	46.0	-14.8	2.23 V	141	29.4	1.9
6	990.40	34.2 QP	54.0	-19.8	2.08 V	202	29.3	4.9

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value

Serial No.: 119

CHANNEL	TX Channel 0	DETECTOR FUNCTION	Quasi-Peak (QP)
FREQUENCY RANGE	30MHz ~ 1GHz		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	34.51	19.8 QP	40.0	-20.2	4.00 H	214	30.7	-10.9
2	207.95	24.2 QP	43.5	-19.3	4.00 H	241	36.1	-11.9
3	248.54	26.4 QP	46.0	-19.7	2.27 H	0	36.1	-9.8
4	457.19	24.9 QP	46.0	-21.1	2.03 H	273	29.6	-4.7
5	622.72	28.4 QP	46.0	-17.6	1.19 H	0	29.4	-1.0
6	801.15	31.5 QP	46.0	-14.5	1.00 H	284	29.8	1.7

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	35.92	21.9 QP	40.0	-18.1	1.24 V	6	33.0	-11.1
2	141.36	21.4 QP	43.5	-22.1	1.00 V	360	31.4	-10.0
3	580.14	27.7 QP	46.0	-18.3	2.22 V	338	29.8	-2.1
4	746.78	37.8 QP	46.0	-8.2	2.48 V	110	36.9	0.9
5	947.09	34.0 QP	46.0	-12.0	1.97 V	55	29.4	4.6
6	989.91	34.7 QP	54.0	-19.3	2.03 V	74	29.8	4.9

REMARKS:


1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value

4.2 6dB Bandwidth Measurement

4.2.1 Limits of 6dB Bandwidth Measurement

The minimum of 6dB Bandwidth Measurement is 0.5 MHz.

4.2.2 Test Setup



4.2.3 Test Instruments

Refer to section 4.1.2 to get information of above instrument.

4.2.4 Test Procedure

- a. Set resolution bandwidth (RBW) = 100kHz
- b. Set the video bandwidth (VBW) $\geq 3 \times$ RBW, Detector = Peak.
- c. Trace mode = max hold.
- d. Sweep = auto couple.
- e. Measure the maximum width of the emission that is constrained by the frequencies associated with the two amplitude points (upper and lower) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission

4.2.5 Deviation from Test Standard

No deviation.

4.2.6 EUT Operating Conditions


The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.

4.3 Conducted Output Power Measurement

4.3.1 Limits OF Conducted Output Power Measurement

For systems using digital modulation in the 2400–2483.5 MHz bands: 1 Watt (30dBm)

4.3.2 Test Setup

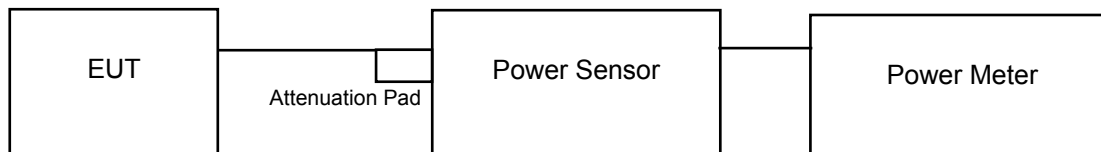

4.3.3 Test Instruments

Refer to section 4.1.2 to get information of above instrument.

4.3.4 Test Procedures

A peak power sensor was used on the output port of the EUT. A power meter was used to read the response of the peak power sensor. Record the power level.

4.3.5 Deviation from Test Standard

No deviation.

4.3.6 EUT Operating Conditions

Same as Item 4.2.6.

4.3.7 Test Results

Serial No.: 045


CHANNEL	FREQUENCY (MHz)	PEAK POWER (mW)	PEAK POWER (dBm)	LIMIT (dBm)	PASS/FAIL
0	2402	1.099	0.41	30	PASS
19	2440	1.119	0.49	30	PASS
39	2480	0.998	-0.01	30	PASS

4.4 Power Spectral Density Measurement

4.4.1 Limits of Power Spectral Density Measurement

The Maximum of Power Spectral Density Measurement is 8dBm.

4.4.2 Test Setup



4.4.3 Test Instruments

Refer to section 4.1.2 to get information of above instrument.

4.4.4 Test Procedure

- a. Set analyzer center frequency to DTS channel center frequency.
- b. Set the span to 1.5 times the DTS bandwidth.
- c. Set the RBW to: $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$.
- d. Set the VBW $\geq 3 \times \text{RBW}$.
- e. Detector = peak.
- f. Sweep time = auto couple.
- g. Trace mode = max hold.
- h. Allow trace to fully stabilize.
- i. Use the peak marker function to determine the maximum amplitude level within the RBW.

4.4.5 Deviation from Test Standard

No deviation.


4.4.6 EUT Operating Condition

Same as Item 4.2.6

4.4.7 Test Results

Serial No.: 045

Channel	Freq. (MHz)	PSD (dBm/3kHz)	Limit (dBm/3kHz)	PASS /FAIL
0	2402	-12.51	8	PASS
19	2440	-12.71	8	PASS
39	2480	-14.49	8	PASS

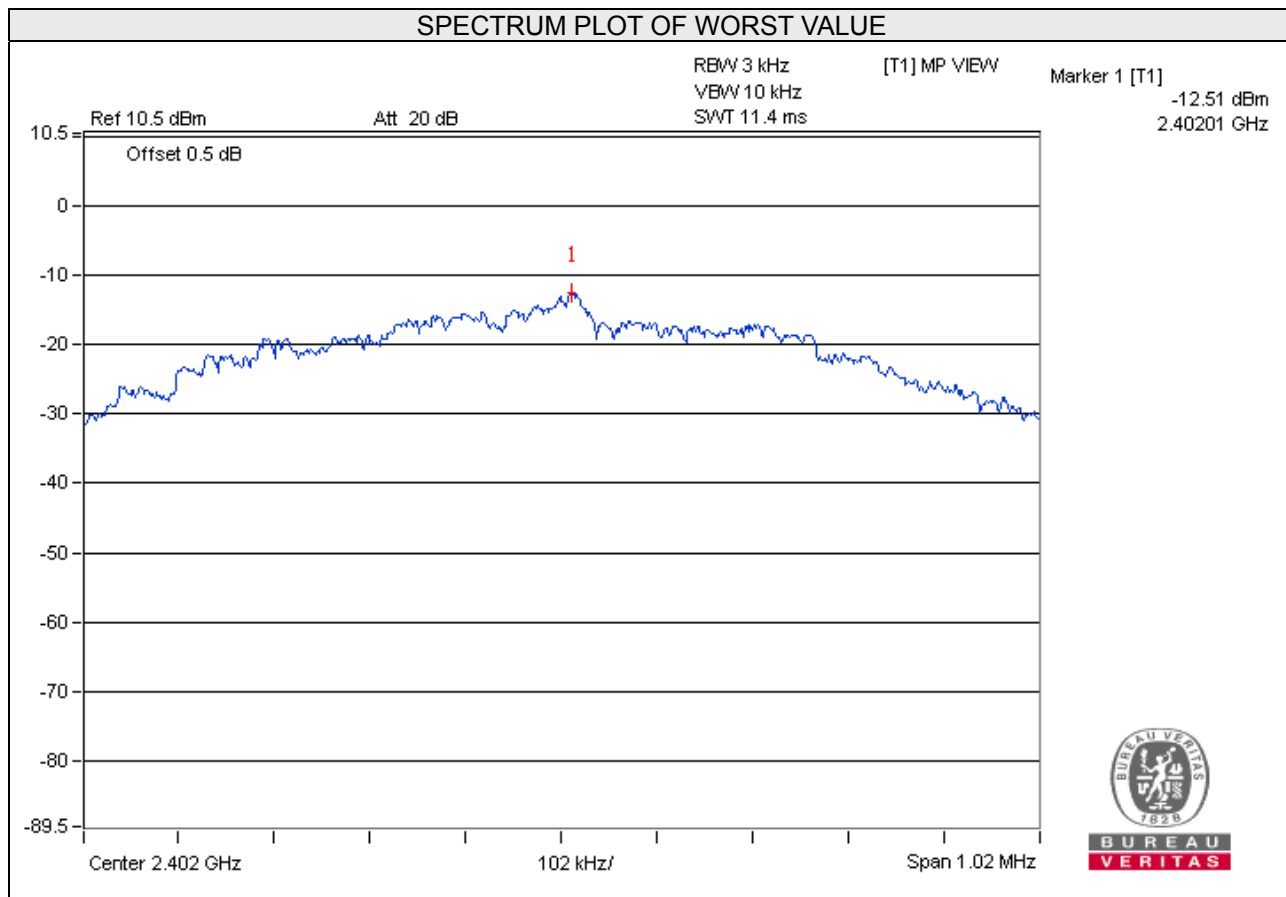


4.5 Conducted Out of Band Emission Measurement

4.5.1 Limits of Conducted Out of Band Emission Measurement

Below -20dB of the highest emission level of operating band (in 100kHz Resolution Bandwidth).

4.5.2 Test Setup



4.5.3 Test Instruments

Refer to section 4.1.2 to get information of above instrument.

4.5.4 Test Procedure

MEASUREMENT PROCEDURE REF

1. Set the RBW = 100 kHz.
2. Set the VBW \geq 300 kHz.
3. Detector = peak.
4. Sweep time = auto couple.
5. Trace mode = max hold.
6. Allow trace to fully stabilize.
7. Use the peak marker function to determine the maximum power level in any 100 kHz band segment within the fundamental EBW.

MEASUREMENT PROCEDURE OOB

1. Set RBW = 100 kHz.
2. Set VBW \geq 300 kHz.
3. Detector = peak.
4. Sweep = auto couple.
5. Trace Mode = max hold.
6. Allow trace to fully stabilize.
7. Use the peak marker function to determine the maximum amplitude level.

4.5.5 Deviation from Test Standard


No deviation.

4.5.6 EUT Operating Condition

Same as Item 4.2.6


4.5.7 TEST RESULTS

Serial No.: 045

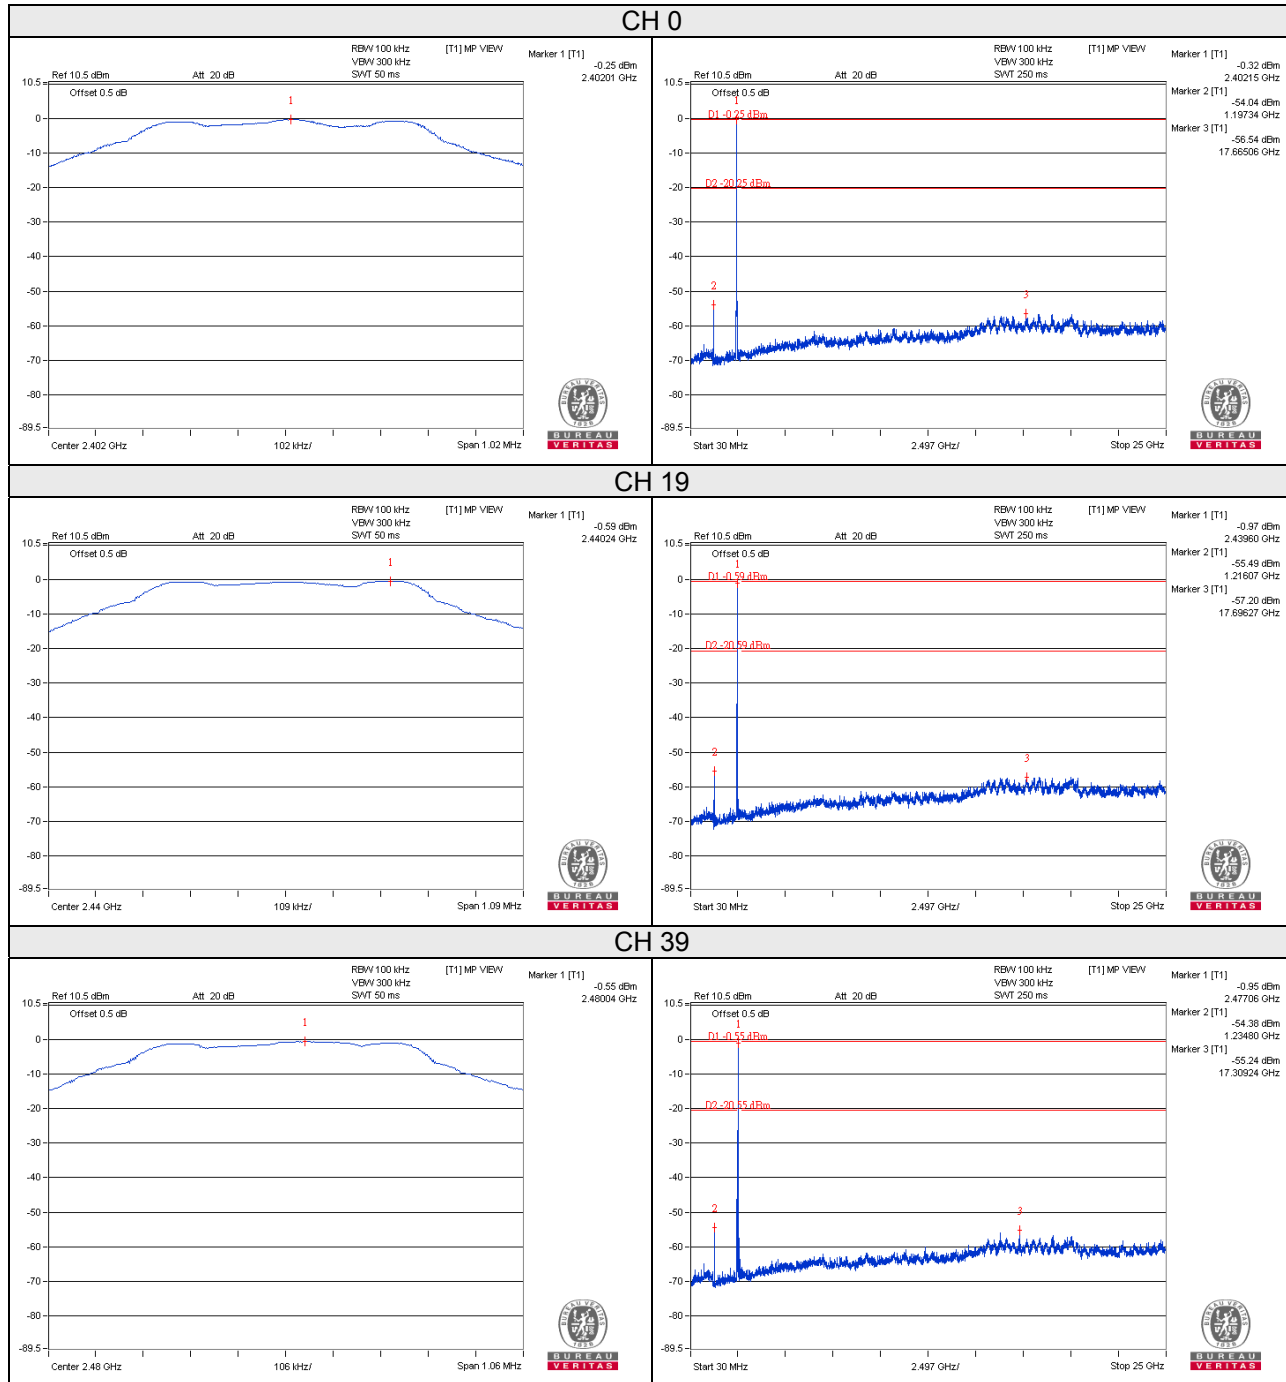




CH 0 Band edge

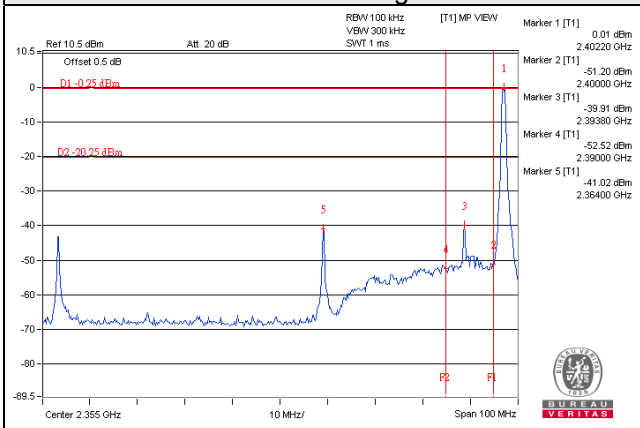

CH 39 Band edge

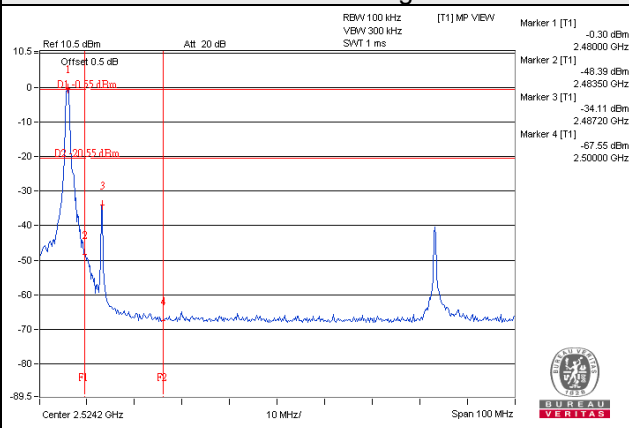

5 Pictures of Test Arrangements

Please refer to the attached file (Test Setup Photo).

Appendix – Information on the Testing Laboratories

We, Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch, were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are accredited and approved according to ISO/IEC 17025.

If you have any comments, please feel free to contact us at the following:

Linko EMC/RF Lab

Tel: 886-2-26052180

Fax: 886-2-26051924

Hsin Chu EMC/RF Lab/Telecom Lab

Tel: 886-3-6668565

Fax: 886-3-6668323

Hwa Ya EMC/RF/Safety

Tel: 886-3-3183232

Fax: 886-3-3270892

Email: service.adt@tw.bureauveritas.com

Web Site: www.bureauveritas-adt.com

The address and road map of all our labs can be found in our web site also.

--- END ---