

FCC Test Report

Report No.: RFBBXY-WTW-P22040459

FCC ID: C3K1915

Test Model: 1915

Received Date: Apr. 06, 2022

Test Date: Apr. 20 ~ May 05, 2022

Issued Date: May 12, 2022

Applicant: Microsoft Corporation

Address: One Microsoft Way Redmond, WA 98052-6399

Issued By: Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch
Lin Kou Laboratories

Lab Address: No. 47-2, 14th Ling, Chia Pau Vil., Lin Kou Dist., New Taipei City, Taiwan

Test Location (1): No.19, Hwa Ya 2nd Rd., Wen Hwa Vil., Kwei Shan Dist., Taoyuan City 33383, Taiwan

Test Location (2): No. 70, Wenming Rd., Guishan Dist., Taoyuan City 333, Taiwan

FCC Registration / 788550 / TW0003

Designation Number: 281270 / TW0032



This report is for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence, provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents. Unless specific mention, the uncertainty of measurement has been explicitly taken into account to declare the compliance or non-compliance to the specification.

Table of Contents

Release Control Record	3
1 Certificate of Conformity	4
2 Summary of Test Results	5
2.1 Measurement Uncertainty.....	5
2.2 Modification Record.....	5
3 General Information	6
3.1 General Description of EUT.....	6
3.2 Description of Test Modes	7
3.2.1 Test Mode Applicability and Tested Channel Detail.....	7
3.3 Description of Support Units.....	9
3.3.1 Configuration of System under Test	9
3.4 General Description of Applied Standards and references	10
4 Test Types and Results	11
4.1 Radiated Emission Measurement.....	11
4.1.1 Limits of Radiated Emission Measurement	11
4.1.2 Test Instruments	12
4.1.3 Test Procedures.....	13
4.1.4 Deviation from Test Standard	13
4.1.5 Test Set Up	14
4.1.6 EUT Operating Conditions.....	15
4.1.7 Test Results	15
4.2 Conducted Emission Measurement.....	32
4.2.1 Limits of Conducted Emission Measurement	32
4.2.2 Test Instruments	32
4.2.3 Test Procedures.....	33
4.2.4 Deviation from Test Standard	33
4.2.5 Test Setup.....	33
4.2.6 EUT Operating Conditions.....	33
4.2.7 Test Results	34
4.3 Frequency Stability	42
4.3.1 Limits of Frequency Stability Measurement	42
4.3.2 Test Setup.....	42
4.3.3 Test Instruments	42
4.3.4 Test Procedure	42
4.3.5 Deviation from Test Standard	42
4.3.6 EUT Operating Conditions.....	42
4.3.7 Test Results	43
4.4 20 dB Bandwidth.....	44
4.4.1 Limits of 20 dB Bandwidth Measurement.....	44
4.4.2 Test Setup.....	44
4.4.3 Test Instruments	44
4.4.4 Test Procedures.....	44
4.4.5 Deviation from Test Standard	44
4.4.6 EUT Operating Conditions.....	44
4.4.7 Test Results	45
5 Pictures of Test Arrangements	46
Appendix – Information of the Testing Laboratories	47

Release Control Record

Issue No.	Description	Date Issued
RFBBXY-WTW-P22040459	Original Release	May 12, 2022

1 Certificate of Conformity

Product: Wireless charger

Brand: Microsoft

Test Model: 1915

Sample Status: Engineering Sample

Applicant: Microsoft Corporation

Test Date: Apr. 20 ~ May 05, 2022

Standards: 47 CFR FCC Part 15, Subpart C (Section 15.225)
47 CFR FCC Part 15, Subpart C (Section 15.215)
ANSI C63.10:2013

The above equipment has been tested by **Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's RF characteristics under the conditions specified in this report.

Prepared by :

Gina Liu

Gina Liu / Specialist

Date:

May 12, 2022

Approved by :

Jeremy Lin

Jeremy Lin / Project Engineer

Date:

May 12, 2022

2 Summary of Test Results

47 CFR FCC Part 15, Subpart C (Section 15.225, 15.215)			
FCC Clause	Test Item	Result	Remarks
15.207	Conducted emission test	Pass	Meet the requirement of limit. Minimum passing margin is -5.79 dB at 0.47000 MHz.
15.225 (a)	The field strength of any emissions within the band 13.553-13.567 MHz	Pass	Meet the requirement of limit. Minimum passing margin is -87.04 dB at 13.56 MHz.
15.225 (b)	The field strength of any emissions within the bands 13.410-13.553 MHz and 13.567-13.710 MHz	Pass	Meet the requirement of limit.
15.225 (c)	The field strength of any emissions within the bands 13.110-13.410 MHz and 13.710-14.010 MHz	Pass	Meet the requirement of limit.
15.225 (d)	The field strength of any emissions appearing outside of the 13.110-14.010 MHz band	Pass	Meet the requirement of limit. Minimum passing margin is -7.89 dB at 407.33 MHz.
15.225 (e)	The frequency tolerance	Pass	Meet the requirement of limit.
15.215 (c)	20 dB Bandwidth	Pass	Meet the requirement of limit.
15.203	Antenna Requirement	Pass	No antenna connector is used.

Note: Determining compliance based on the results of the compliance measurement, not taking into account measurement instrumentation uncertainty.

2.1 Measurement Uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

Measurement	Frequency	Expanded Uncertainty (k=2) (±)
Conducted Emissions at mains ports	150 kHz ~ 30 MHz	2.79 dB
Radiated Emissions up to 1 GHz	9 kHz ~ 30 MHz	3.00 dB
	30 MHz ~ 200 MHz	2.91 dB
	200 MHz ~ 1000 MHz	2.92 dB

2.2 Modification Record

There were no modifications required for compliance.

3 General Information

3.1 General Description of EUT

Product	Wireless charger
Brand	Microsoft
Test Model	1915
Status of EUT	Engineering Sample
Power Supply Rating	5Vdc, 200mA
Modulation Type	ASK
Data Rate	106 kbit/s
Operating Frequency	13.56 MHz
Field Strength (Maximum)	-3.04 dBuV/m (30m)
Antenna Type	NFC FPC loop antenna
Accessory Device	N/A
Data Cable Supplied	USB to type C shielded cable (0.45m)

Note:

1. This report is issued as a supplementary report to BV CPS report no. RF190716C36. The difference compared with original report are adding U2 Second source and removal of the zero-ohm resistors outlined, therefore the EUT is re-tested in this report.
2. The above Antenna information is declared by manufacturer and for more detailed features description, please refer to the manufacturer's specifications, the laboratory shall not be held responsible.
3. The above EUT information is declared by manufacturer and for more detailed features description, please refers to the manufacturer's specifications or user's manual.

3.2 Description of Test Modes

One channel was provided to this EUT:

Channel	Frequency (MHz)
1	13.56

3.2.1 Test Mode Applicability and Tested Channel Detail

EUT Configure Mode	Applicable To				Description
	RE	PLC	FS	EB	
A	√	√	√	√	Charging with full load mode with notebook
B	√	√	-	-	Charging with full load mode with Adapter
C	√	√	-	-	Standby mode with notebook
D	√	√	-	-	Standby mode with adapter

Where **RE:** Radiated Emission **PLC:** Power Line Conducted Emission
FS: Frequency Stability **EB:** 20 dB Bandwidth measurement

NOTE: The EUT had been pre-tested on the positioned of each 3 axis. The worst case was found when positioned on **X-plane**.

NOTE: "-" means no effect.

NOTE: The worst emission level was found when the EUT tested under EUT charging with full load, therefore only its test data was recorded in this report.

Radiated Emission Test:

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

EUT Configure Mode	Available Channel	Tested Channel	Modulation Type	Axis
A-D	1	1	ASK	X

Power Line Conducted Emission Test:

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

EUT Configure Mode	Available Channel	Tested Channel	Modulation Type	Axis
A~D	1	1	ASK	X

Frequency Stability:

- This item includes all test value of each mode, but only includes spectrum plot of worst value of each mode.
- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

EUT Configure Mode	Available Channel	Tested Channel	Modulation Type	Axis
A	1	1	ASK	X

20 dB Bandwidth:

- This item includes all test value of each mode, but only includes spectrum plot of worst value of each mode.
- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

EUT Configure Mode	Available Channel	Tested Channel	Modulation Type	Axis
A	1	1	ASK	X

Test Condition:

Applicable To	Environmental Conditions	Input Power	Tested By
RE	23 deg. C, 67 % RH	120 Vac, 60 Hz	Wade Huang
FS	25 deg. C, 65 % RH	5 Vdc	Wade Huang
PLC	25 deg. C, 75 % RH	120 Vac, 60 Hz	Edison Lee
EB	25 deg. C, 68 % RH	120 Vac, 60 Hz	Wade Huang

3.3 Description of Support Units


The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

No.	Product	Brand	Model No.	Serial No.	FCC ID	Remarks
A.	Tablet	Micorsoft	1866	NA	NA	Supplied by applicant
B.	Pen	Micorsoft	1962	NA	NA	Supplied by applicant
C.	Adapter	Liteon	PA-1050-39	NA	NA	Provided by Lab
D.	Earphone	APPLE	MB77PFEB	NA	NA	Provided by Lab
E.	Type C USB Flash	SanDisk	SDDDC3-032G	NA	NA	Provided by Lab
F.	Adapter	NA	NA	NA	NA	Supplied by applicant
G.	Keyboard	NA	NA	NA	NA	Supplied by applicant


ID	Cable Descriptions	Qty.	Length (m)	Shielding (Yes/No)	Cores (Qty.)	Remarks
1.	USB to type C	1	0.45	Y	0	Supplied by applicant

3.3.1 Configuration of System under Test

Mode A, C

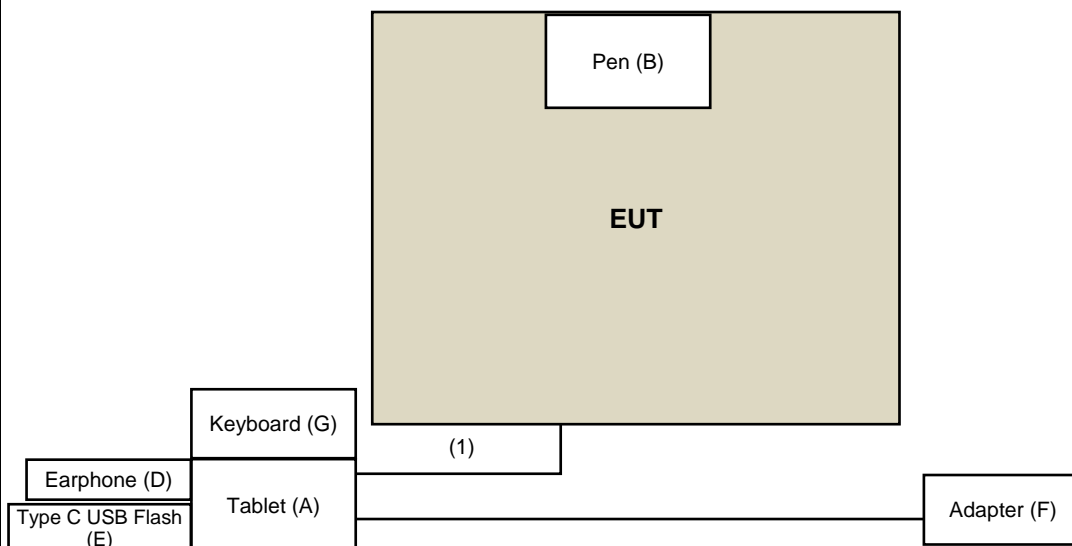

Mode B, D

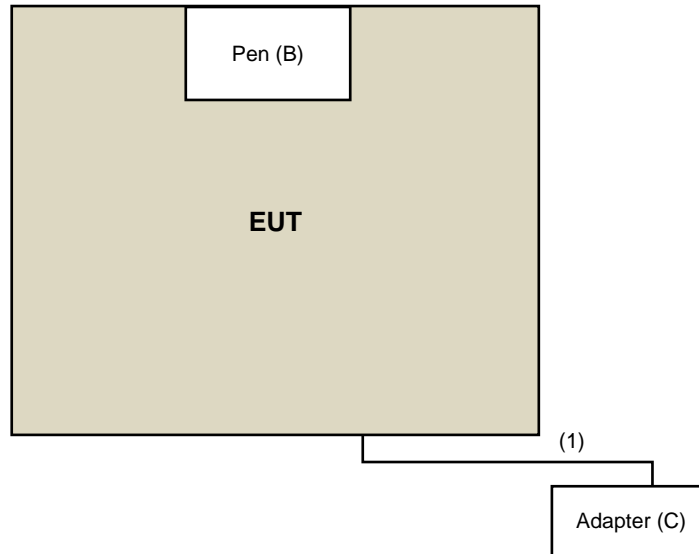

3.4 General Description of Applied Standards and references

The EUT is a RF Product. According to the specifications of the manufacturer, it must comply with the requirements of the following standards and references:

FCC Part 15, Subpart C (15.225)

FCC Part 15, Subpart C (15.215)

ANSI C63.10-2013

All test items have been performed and recorded as per the above standards.

References Test Guidance :

KDB 414788 D01 Radiated Test Site v01r01

All test items have been performed as a reference to the above KDB test guidance.

4 Test Types and Results

4.1 Radiated Emission Measurement

4.1.1 Limits of Radiated Emission Measurement

- a. The field strength of any emissions within the band 13.553-13.567 MHz shall not exceed 15,848 microvolts/meter at 30 meters.
- b. Within the bands 13.410-13.553 MHz and 13.567-13.710 MHz, the field strength of any emissions shall not exceed 334 microvolts/meter at 30 meters.
- c. Within the bands 13.110-13.410 MHz and 13.710-14.010 MHz the field strength of any emissions shall not exceed 106 microvolts/meter at 30 meters.
- d. The field strength of any emissions appearing outside of the 13.110-14.010 MHz band shall not exceed the general radiated emission limits in §15.209 as below table:

Frequencies (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 ~ 0.490	2400/F (kHz)	300
0.490 ~ 1.705	24000/F (kHz)	30
1.705 ~ 30.0	30	30
30 ~ 88	100	3
88 ~ 216	150	3
216 ~ 960	200	3
Above 960	500	3

NOTE:

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = 20 log Emission level (uV/m).
3. For frequencies above 1000 MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20 dB under any condition of modulation.

4.1.2 Test Instruments

Description & Manufacturer	Model No.	Serial No.	Cal. Date	Cal. Due
Test Receiver Rohde & Schwarz	ESR3	102579	Jul. 05, 2021	Jul. 04, 2022
Spectrum Analyzer KEYSIGHT	N9020B	MY60110462	Dec. 21, 2021	Dec. 20, 2022
BILOG Antenna SCHWARZBECK	VULB9168	995	Oct. 28, 2021	Oct. 27, 2022
HORN Antenna SCHWARZBECK	BBHA 9120 D	9120D-404	Nov. 14, 2021	Nov. 13, 2022
HORN Antenna SCHWARZBECK	BBHA 9170	995	Nov. 14, 2021	Nov. 13, 2022
Loop Antenna EMCI	EM-6879	269	Sep. 16, 2021	Sep. 15, 2022
Loop Antenna TESEQ	HLA 6121	45745	Jul. 21, 2021	Jul. 20, 2022
Preamplifier EMCI	EMC330N	980783	Jan. 17, 2022	Jan. 16, 2023
Preamplifier EMCI	EMC118A45SE	980810	Dec. 30, 2021	Dec. 29, 2022
Preamplifier EMCI	EMC184045SE	980787	Jan. 17, 2022	Jan. 16, 2023
RF signal cable EMCI	EMC104-SM-SM-(900 0+2000+1000)	201230+ 201242+ 210101	Jan. 17, 2022	Jan. 16, 2023
RF signal cable EMCI	EMCCFD400-NM-NM -(9000+300+500)	201252+ 201250+ 201245	Jan. 17, 2022	Jan. 16, 2023
RF signal cable EMCI	EMC101G-KM-KM-(5 000+3000+2000)	201261+201258+ 201249	Jan. 17, 2022	Jan. 16, 2023
Software BV CPS	ADT_Radiated_V7.6.1 5.9.5	NA	NA	NA
Turn Table Max-Full	MFT-151SS-0.5T	NA	NA	NA
Turn Table Controller Max-Full	MF-7802BS	MF780208675	NA	NA
Antenna Tower KaiTuo	NA	NA	NA	NA
Antenna Tower Controller KaiTuo	KT-2000	NA	NA	NA
USB Wideband Power Sensor KEYSIGHT	U2021XA	MY55050005/MY55190004 /MY55190007/MY5521000 5	Jul. 12, 2021	Jul. 11, 2022

Note: 1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. The test was performed in WM Chamber 7.

4.1.3 Test Procedures

For Radiated Emission below 30 MHz

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter chamber room. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. Parallel, perpendicular, and ground-parallel orientations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Quasi-Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.

Note:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 9 kHz at frequency below 30 MHz.
2. There is a comparison data of both open-field test site and semi-Anechoic chamber, and the result came out very similar.

For Radiated Emission above 30 MHz

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at 3 meter chamber room for test. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to quasi-peak detect function and specified bandwidth with maximum hold mode when the test frequency is below 1 GHz.
- f. The test-receiver system was set to peak and average detected function and specified bandwidth with maximum hold mode when the test frequency is above 1 GHz. If the peak reading value also meets average limit, measurement with the average detector is unnecessary.

Note:


1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120 kHz for Quasi-peak detection (QP) or Peak detection (PK) at frequency below 1 GHz.
2. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 3 MHz for Peak detection (PK) at frequency above 1 GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is $\geq 1/T$ (Duty cycle $< 98\%$) or 10 Hz (Duty cycle $\geq 98\%$) for Average detection (AV) at frequency above 1 GHz.
4. All modes of operation were investigated and the worst-case emissions are reported.

4.1.4 Deviation from Test Standard


No deviation.

4.1.5 Test Set Up

<Radiated Emission below 30 MHz>

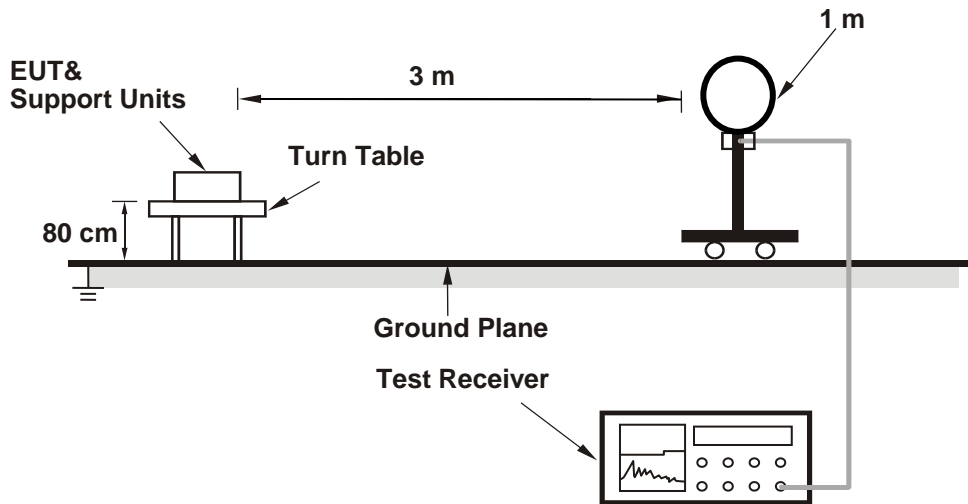

<Radiated Emission 30 MHz to 1 GHz>

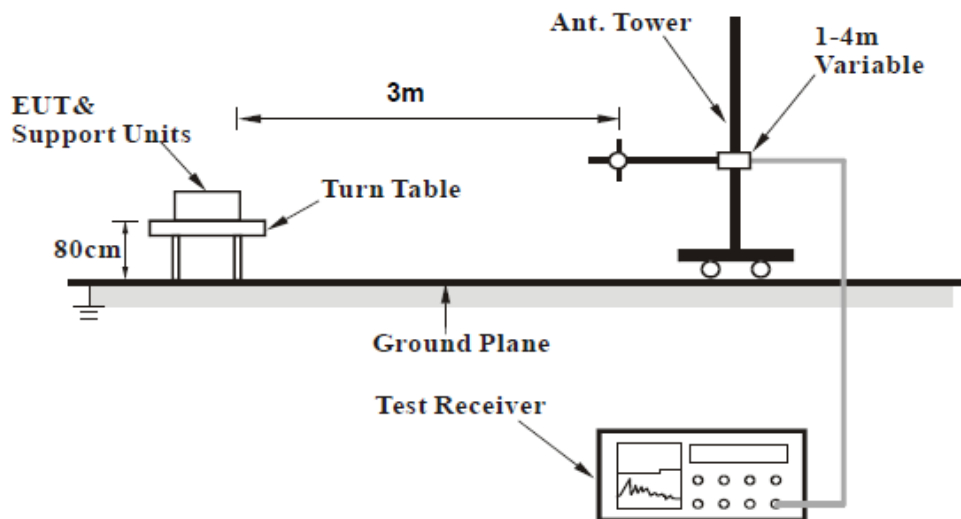

For the actual test configuration, please refer to the attached file (Test Setup Photo).

KDB 414788 OFS and Chamber Correlation Justification

- Base on FCC 15.31 (f) (2): measurements may be performed at a distance closer than that specified in the regulations; however, an attempt should be made to avoid making measurements in the near field.
- Open-field site and chamber correlation testing had been performed and chamber measured test result is the worst case test result.

4.1.6 EUT Operating Conditions

- Placed the EUT on the testing table.
- Set the EUT under transmission condition continuously at specific channel frequency.

4.1.7 Test Results

Mode A

RF Mode	NFC-13.56MHz	Channel	CH 1 : 13.56 MHz
Frequency Range	13.11 MHz ~ 14.01 MHz	Detector Function & Bandwidth	Quasi-Peak (QP), 9 kHz
Input Power	120 Vac, 60 Hz	Environmental Conditions	23°C, 67% RH
Test Date	Wade Huang	Tested By	2022/4/20


Antenna Polarity : Parallel

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*13.56	-3.04 QP	84.00	-87.04	1.00	129	14.95	-17.99

Remarks:

- Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
- Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB) + Distance Factor
- Margin value = Emission Level – Limit value
- The other emission levels were very low against the limit.
- " * " : Fundamental frequency.
- Above limits have been translated by the formula

The measured field strength was extrapolated to distance 30 meters, using the formula that the limit of field strength varies as the inverse distance square (40dB per decade of distance)

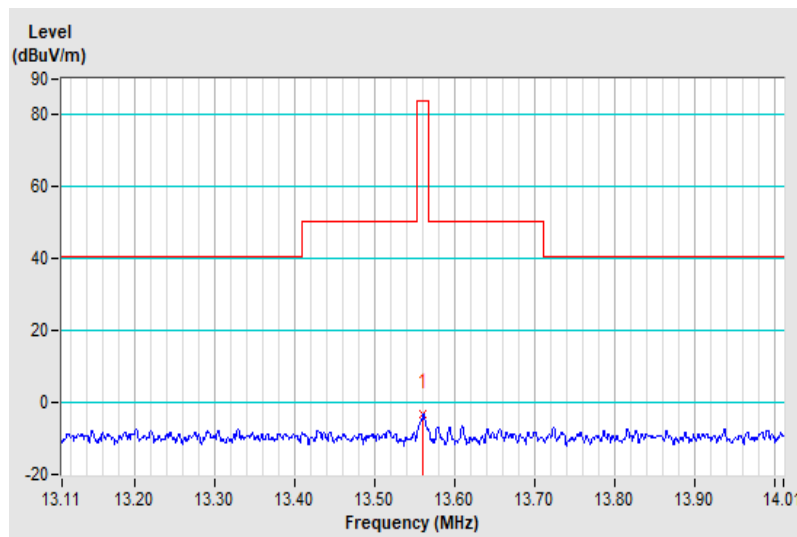

RF Mode	NFC-13.56MHz	Channel	CH 1 : 13.56 MHz
Frequency Range	13.11 MHz ~ 14.01 MHz	Detector Function & Bandwidth	Quasi-Peak (QP), 9 kHz
Input Power	120 Vac, 60 Hz	Environmental Conditions	23°C, 67% RH
Test Date	Wade Huang	Tested By	2022/4/20


Antenna Polarity : Perpendicular

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*13.56	-4.53 QP	84.00	-88.53	1.00	210	13.46	-17.99

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB) + Distance Factor
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency.
6. Above limits have been translated by the formula

The measured field strength was extrapolated to distance 30 meters, using the formula that the limit of field strength varies as the inverse distance square (40dB per decade of distance)

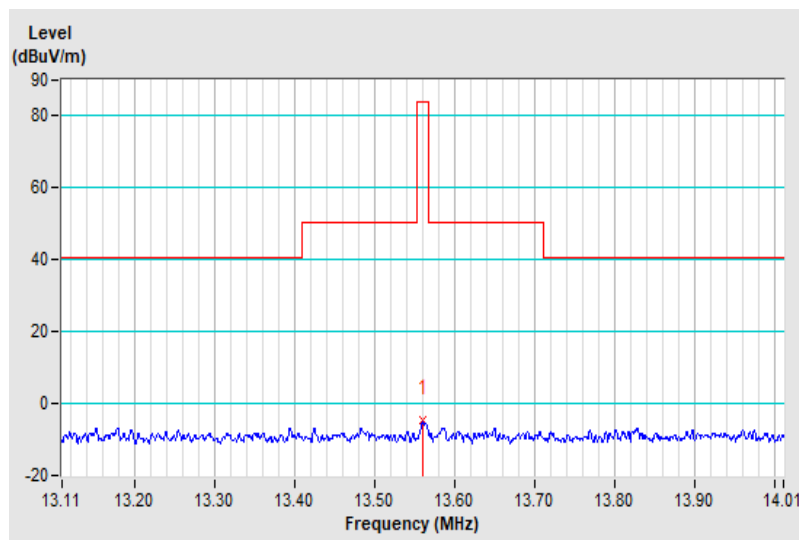

RF Mode	NFC-13.56MHz	Channel	CH 1 : 13.56 MHz
Frequency Range	13.11 MHz ~ 14.01 MHz	Detector Function & Bandwidth	Quasi-Peak (QP), 9 kHz
Input Power	120 Vac, 60 Hz	Environmental Conditions	23°C, 67% RH
Test Date	Wade Huang	Tested By	2022/4/20


Antenna Polarity : Ground-parallel

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*13.56	-3.99 QP	84.00	-87.99	1.00	136	14.00	-17.99

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB) + Distance Factor
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency.
6. Above limits have been translated by the formula

The measured field strength was extrapolated to distance 30 meters, using the formula that the limit of field strength varies as the inverse distance square (40dB per decade of distance)

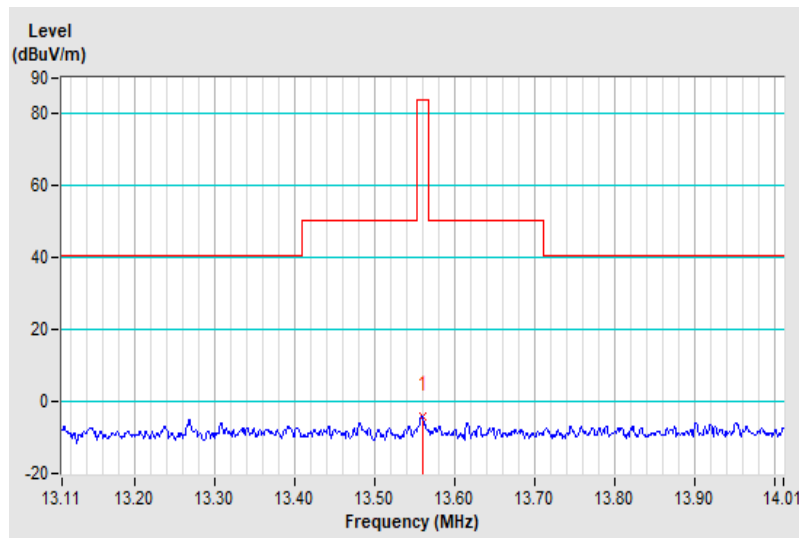

Mode A


RF Mode	NFC-13.56MHz	Channel	CH 1 : 13.56 MHz
Frequency Range	9 kHz ~ 30 MHz	Detector Function & Bandwidth	Peak (PK), 9 kHz
Input Power	120 Vac, 60 Hz	Environmental Conditions	23°C, 67% RH
Test Date	Wade Huang	Tested By	2022/4/20

Antenna Polarity : Parallel

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	6.46	-7.73 PK	29.54	-37.27	1.00	12	11.57	-19.30
2	8.65	-6.88 PK	29.54	-36.42	1.00	56	11.68	-18.56
3	12.88	-5.39 PK	29.54	-34.93	1.00	64	12.62	-18.01
4	16.23	-5.64 PK	29.54	-35.18	1.00	52	12.27	-17.91
5	24.60	-7.54 PK	29.54	-37.08	1.00	310	10.35	-17.89
6	27.12	-10.09 PK	29.54	-39.63	1.00	150	7.85	-17.94

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB) + Distance Factor
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. The measured field strength was extrapolated to distance 30 meters, using the formula that the limit of field strength varies as the inverse distance square (40dB per decade of distance)

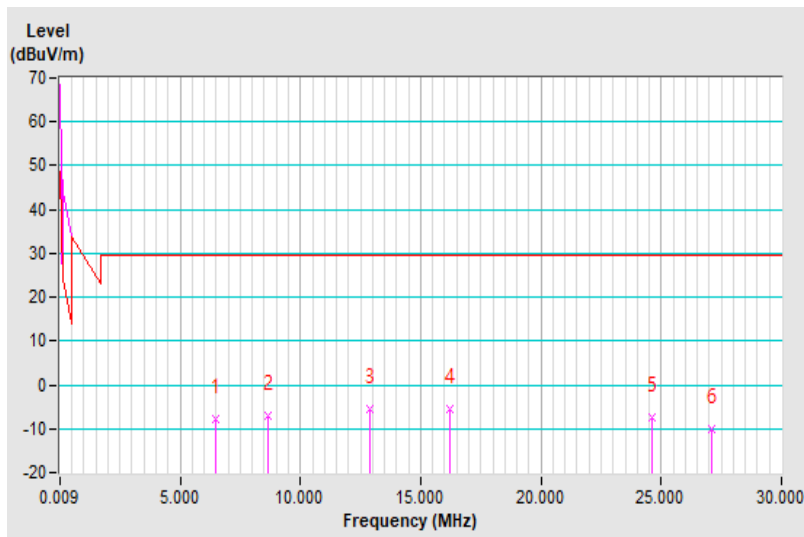


RF Mode	NFC-13.56MHz	Channel	CH 1 : 13.56 MHz
Frequency Range	9 kHz ~ 30 MHz	Detector Function & Bandwidth	Peak (PK), 9 kHz
Input Power	120 Vac, 60 Hz	Environmental Conditions	23°C, 67% RH
Test Date	Wade Huang	Tested By	2022/4/20

Antenna Polarity : Perpendicular

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	8.77	-5.67 PK	29.54	-35.21	1.00	74	12.85	-18.52
2	10.54	-6.60 PK	29.54	-36.14	1.00	251	11.48	-18.08
3	15.12	-5.75 PK	29.54	-35.29	1.00	328	12.20	-17.95
4	17.19	-6.75 PK	29.54	-36.29	1.00	102	11.13	-17.88
5	17.79	-6.37 PK	29.54	-35.91	1.00	209	11.50	-17.87
6	27.12	-10.03 PK	29.54	-39.57	1.00	5	7.91	-17.94

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB) + Distance Factor
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. The measured field strength was extrapolated to distance 30 meters, using the formula that the limit of field strength varies as the inverse distance square (40dB per decade of distance)

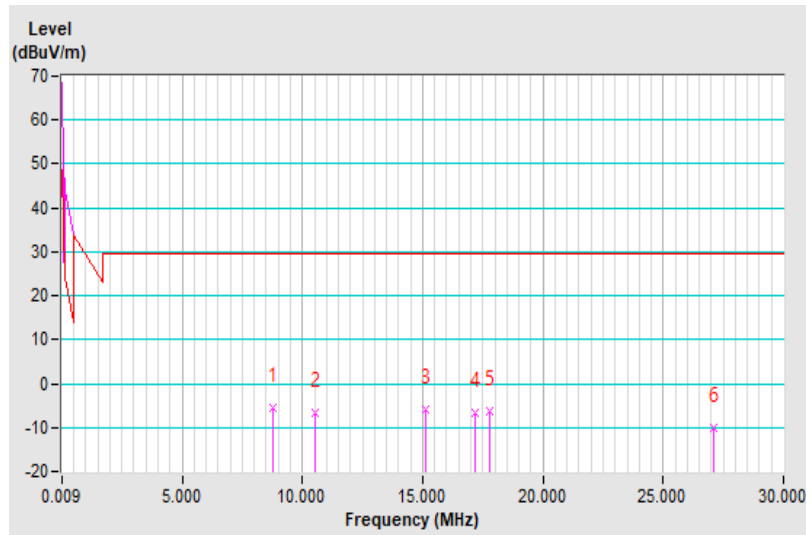


RF Mode	NFC-13.56MHz	Channel	CH 1 : 13.56 MHz
Frequency Range	9 kHz ~ 30 MHz	Detector Function & Bandwidth	Peak (PK), 9 kHz
Input Power	120 Vac, 60 Hz	Environmental Conditions	23°C, 67% RH
Test Date	Wade Huang	Tested By	2022/4/20

Antenna Polarity : Ground-parallel

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5.29	-8.97 PK	29.54	-38.51	1.00	5	10.73	-19.70
2	8.11	-6.68 PK	29.54	-36.22	1.00	301	12.06	-18.74
3	9.13	-5.64 PK	29.54	-35.18	1.00	188	12.76	-18.40
4	17.91	-7.18 PK	29.54	-36.72	1.00	10	10.68	-17.86
5	18.81	-7.11 PK	29.54	-36.65	1.00	320	10.73	-17.84
6	27.12	-7.88 PK	29.54	-37.42	1.00	352	10.06	-17.94

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB) + Distance Factor
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. The measured field strength was extrapolated to distance 30 meters, using the formula that the limit of field strength varies as the inverse distance square (40dB per decade of distance)

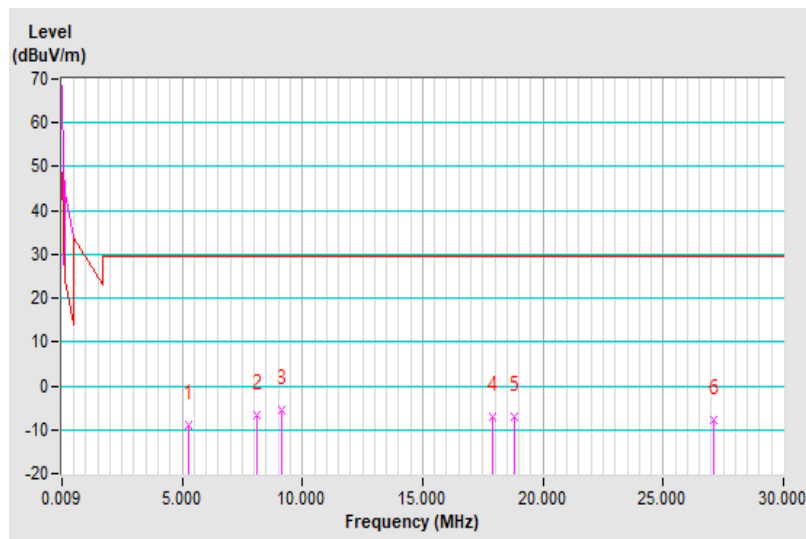

Mode C


RF Mode	NFC-13.56MHz	Channel	CH 1 : 13.56 MHz
Frequency Range	9 kHz ~ 30 MHz	Detector Function & Bandwidth	Peak (PK), 9 kHz
Input Power	120 Vac, 60 Hz	Environmental Conditions	23°C, 67% RH
Test Date	Wade Huang	Tested By	2022/4/20

Antenna Polarity : Parallel

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4.78	-9.22 PK	29.54	-38.76	1.00	138	10.60	-19.82
2	8.62	-7.22 PK	29.54	-36.76	1.00	128	11.35	-18.57
3	15.81	-6.04 PK	29.54	-35.58	1.00	338	11.89	-17.93
4	18.12	-6.58 PK	29.54	-36.12	1.00	17	11.28	-17.86
5	24.39	-8.00 PK	29.54	-37.54	1.00	357	9.89	-17.89
6	25.41	-8.39 PK	29.54	-37.93	1.00	273	9.52	-17.91

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB) + Distance Factor
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. The measured field strength was extrapolated to distance 30 meters, using the formula that the limit of field strength varies as the inverse distance square (40dB per decade of distance)

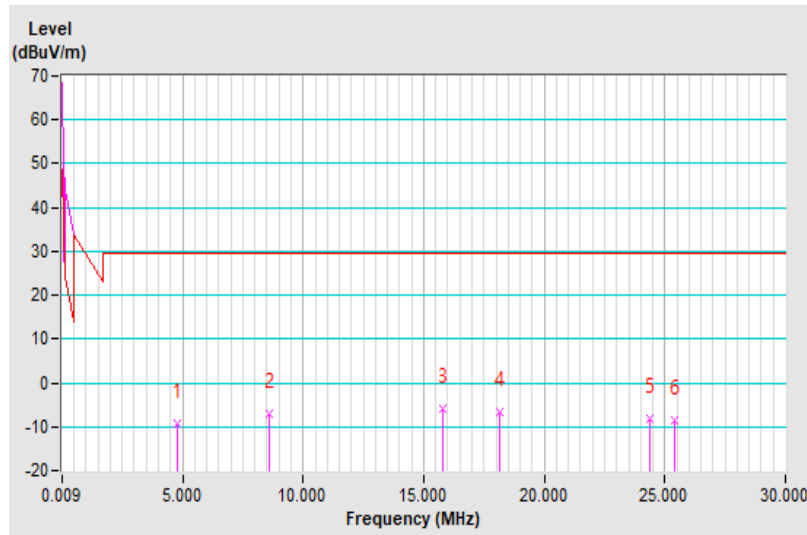


RF Mode	NFC-13.56MHz	Channel	CH 1 : 13.56 MHz
Frequency Range	9 kHz ~ 30 MHz	Detector Function & Bandwidth	Peak (PK), 9 kHz
Input Power	120 Vac, 60 Hz	Environmental Conditions	23°C, 67% RH
Test Date	Wade Huang	Tested By	2022/4/20

Antenna Polarity : Perpendicular

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4.66	-9.53 PK	29.54	-39.07	1.00	229	10.30	-19.83
2	8.38	-7.41 PK	29.54	-36.95	1.00	3	11.24	-18.65
3	15.87	-7.64 PK	29.54	-37.18	1.00	167	10.28	-17.92
4	17.25	-6.45 PK	29.54	-35.99	1.00	357	11.43	-17.88
5	23.85	-7.13 PK	29.54	-36.67	1.00	178	10.75	-17.88
6	25.53	-8.36 PK	29.54	-37.90	1.00	53	9.55	-17.91

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB) + Distance Factor
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. The measured field strength was extrapolated to distance 30 meters, using the formula that the limit of field strength varies as the inverse distance square (40dB per decade of distance)

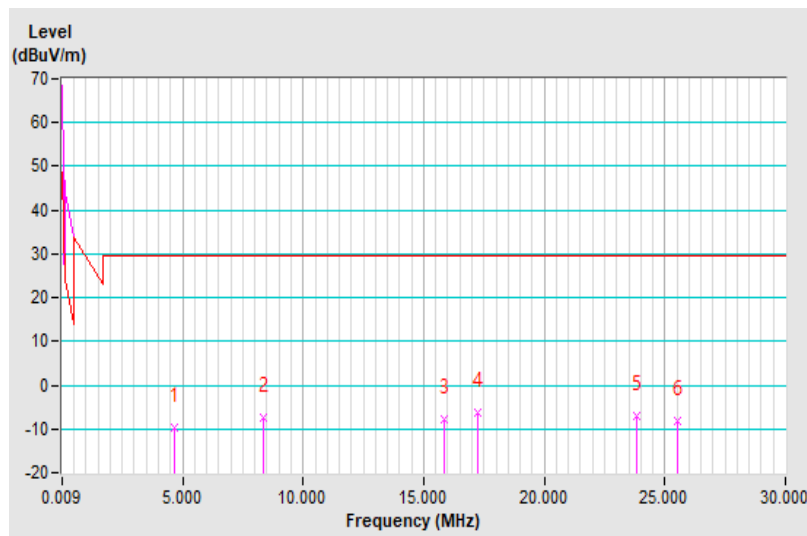


RF Mode	NFC-13.56MHz	Channel	CH 1 : 13.56 MHz
Frequency Range	9 kHz ~ 30 MHz	Detector Function & Bandwidth	Peak (PK), 9 kHz
Input Power	120 Vac, 60 Hz	Environmental Conditions	23°C, 67% RH
Test Date	Wade Huang	Tested By	2022/4/20

Antenna Polarity : Ground-parallel

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4.81	-8.59 PK	29.54	-38.13	1.00	252	11.23	-19.82
2	5.41	-7.83 PK	29.54	-37.37	1.00	312	11.83	-19.66
3	8.92	-6.00 PK	29.54	-35.54	1.00	12	12.47	-18.47
4	15.51	-5.14 PK	29.54	-34.68	1.00	34	12.79	-17.93
5	17.85	-5.71 PK	29.54	-35.25	1.00	88	12.15	-17.86
6	24.09	-6.07 PK	29.54	-35.61	1.00	102	11.81	-17.88

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB) + Distance Factor
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. The measured field strength was extrapolated to distance 30 meters, using the formula that the limit of field strength varies as the inverse distance square (40dB per decade of distance)

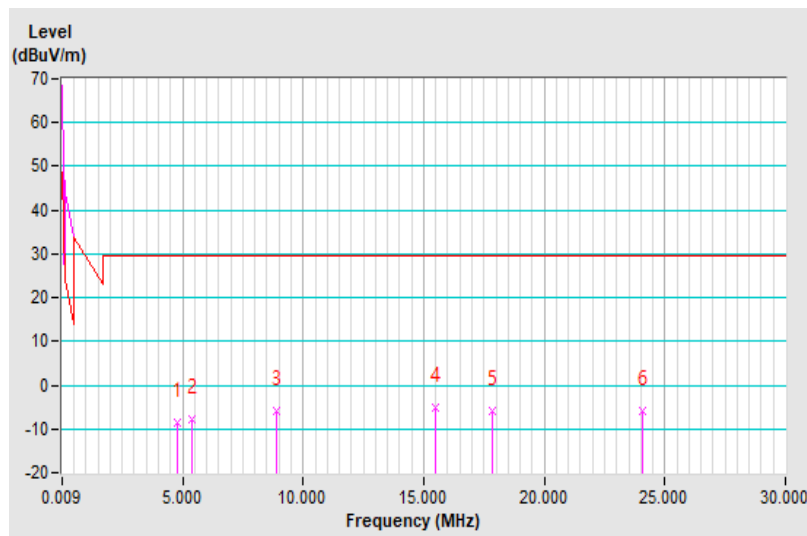

Mode A


RF Mode	TX NFC-13.56MHz	Channel	CH 1 : 13.56 MHz
Frequency Range	30 MHz ~ 1 GHz	Detector Function & Bandwidth	(QP) RB = 120kHz
Input Power	120 Vac, 60 Hz	Environmental Conditions	23°C, 67% RH
Tested By	Wade Huang	Test Date	2022/4/20

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBUV)	Correction Factor (dB/m)
1	108.57	34.37 QP	43.50	-9.13	1.49 H	148	50.80	-16.43
2	203.63	28.30 QP	43.50	-15.20	1.49 H	209	45.22	-16.92
3	306.45	33.53 QP	46.00	-12.47	1.49 H	18	46.40	-12.87
4	407.33	38.11 QP	46.00	-7.89	1.99 H	250	48.40	-10.29
5	468.44	32.95 QP	46.00	-13.05	1.01 H	78	41.71	-8.76
6	520.82	31.12 QP	46.00	-14.88	1.01 H	40	38.83	-7.71

Remarks:

1. Emission Level(dBUV/m) = Raw Value(dBUV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit of frequency range 30 MHz ~ 1 GHz.
5. The emission levels were very low against the limit of frequency range 9 kHz ~ 30 MHz: the amplitude of spurious emissions attenuated more than 20 dB below the permissible value to be report.

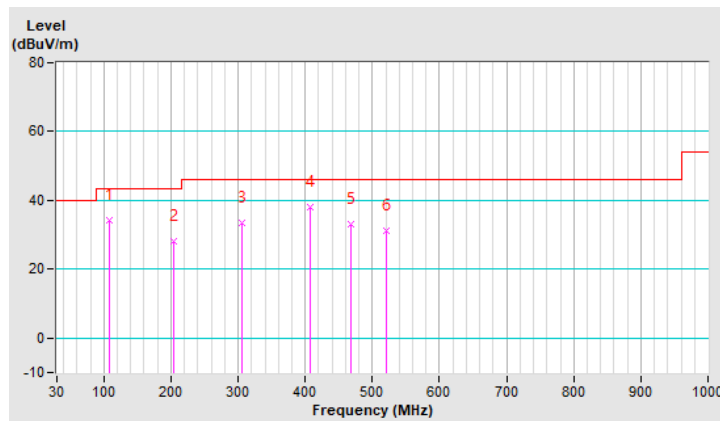


RF Mode	TX NFC-13.56MHz	Channel	CH 1 : 13.56 MHz
Frequency Range	30 MHz ~ 1 GHz	Detector Function & Bandwidth	(QP) RB = 120kHz
Input Power	120 Vac, 60 Hz	Environmental Conditions	23°C, 67% RH
Tested By	Wade Huang	Test Date	2022/4/20

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBUV)	Correction Factor (dB/m)
1	54.25	28.17 QP	40.00	-11.83	1.01 V	326	41.66	-13.49
2	108.57	26.58 QP	43.50	-16.92	1.99 V	223	43.01	-16.43
3	171.62	29.60 QP	43.50	-13.90	1.01 V	79	43.45	-13.85
4	201.69	30.36 QP	43.50	-13.14	1.50 V	199	47.25	-16.89
5	301.60	27.93 QP	46.00	-18.07	1.99 V	183	40.93	-13.00
6	407.33	33.33 QP	46.00	-12.67	1.51 V	151	43.62	-10.29

Remarks:

1. Emission Level(dBUV/m) = Raw Value(dBUV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit of frequency range 30 MHz ~ 1 GHz.
5. The emission levels were very low against the limit of frequency range 9 kHz ~ 30 MHz: the amplitude of spurious emissions attenuated more than 20 dB below the permissible value to be report.

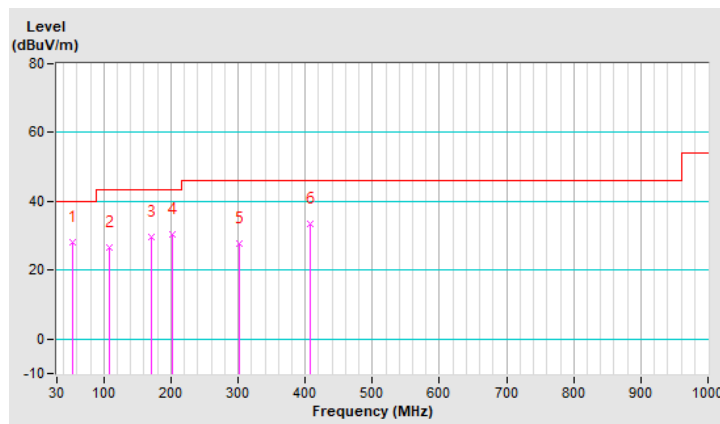

Mode B


RF Mode	TX NFC-13.56MHz	Channel	CH 1 : 13.56 MHz
Frequency Range	30 MHz ~ 1 GHz	Detector Function & Bandwidth	(QP) RB = 120kHz
Input Power	120 Vac, 60 Hz	Environmental Conditions	23°C, 67% RH
Tested By	Wade Huang	Test Date	2022/4/20

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBUV)	Correction Factor (dB/m)
1	135.73	27.40 QP	43.50	-16.10	1.99 H	136	41.35	-13.95
2	190.05	26.47 QP	43.50	-17.03	1.49 H	278	42.39	-15.92
3	380.17	21.60 QP	46.00	-24.40	1.01 H	240	32.51	-10.91
4	457.77	23.20 QP	46.00	-22.80	1.01 H	183	32.06	-8.86
5	532.46	24.53 QP	46.00	-21.47	1.49 H	21	32.09	-7.56
6	569.32	25.37 QP	46.00	-20.63	1.49 H	130	32.14	-6.77

Remarks:

1. Emission Level(dBUV/m) = Raw Value(dBUV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit of frequency range 30 MHz ~ 1 GHz.
5. The emission levels were very low against the limit of frequency range 9 kHz ~ 30 MHz: the amplitude of spurious emissions attenuated more than 20 dB below the permissible value to be report.

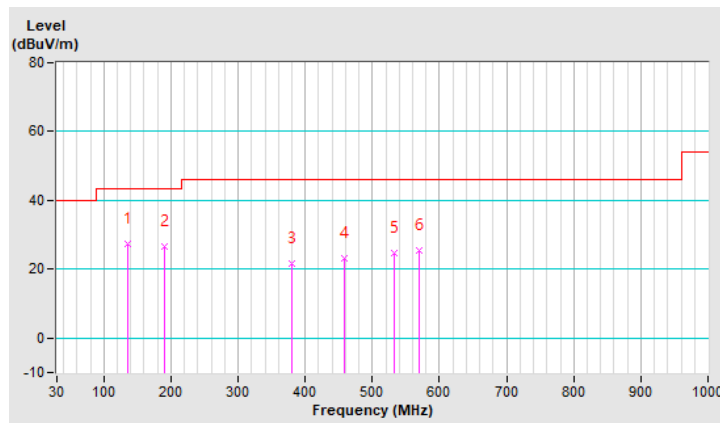


RF Mode	TX NFC-13.56MHz	Channel	CH 1 : 13.56 MHz
Frequency Range	30 MHz ~ 1 GHz	Detector Function & Bandwidth	(QP) RB = 120kHz
Input Power	120 Vac, 60 Hz	Environmental Conditions	23°C, 67% RH
Tested By	Wade Huang	Test Date	2022/4/20

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	40.67	28.05 QP	40.00	-11.95	1.01 V	142	41.66	-13.61
2	87.23	22.36 QP	40.00	-17.64	1.01 V	244	41.58	-19.22
3	190.05	26.50 QP	43.50	-17.00	1.01 V	272	42.42	-15.92
4	384.05	22.54 QP	46.00	-23.46	1.51 V	155	33.31	-10.77
5	471.35	23.20 QP	46.00	-22.80	1.99 V	223	31.90	-8.70
6	640.13	26.55 QP	46.00	-19.45	1.99 V	212	31.79	-5.24

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit of frequency range 30 MHz ~ 1 GHz.
5. The emission levels were very low against the limit of frequency range 9 kHz ~ 30 MHz: the amplitude of spurious emissions attenuated more than 20 dB below the permissible value to be report.

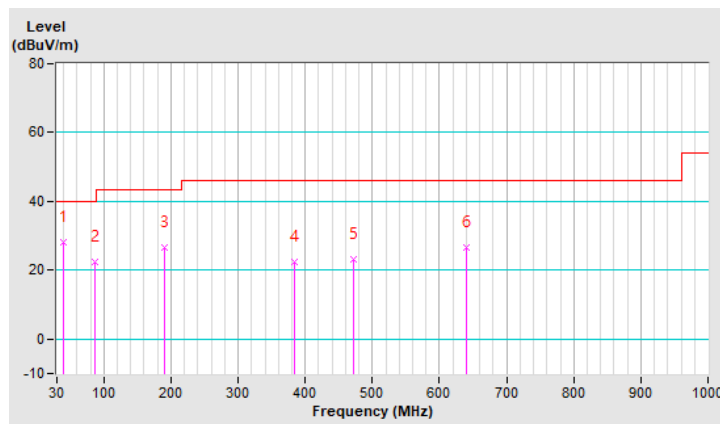

Mode C


RF Mode	TX NFC-13.56MHz	Channel	CH 1 : 13.56 MHz
Frequency Range	30 MHz ~ 1 GHz	Detector Function & Bandwidth	(QP) RB = 120kHz
Input Power	120 Vac, 60 Hz	Environmental Conditions	23°C, 67% RH
Tested By	Wade Huang	Test Date	2022/4/20

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBUV)	Correction Factor (dB/m)
1	203.63	30.33 QP	43.50	-13.17	1.01 H	273	47.25	-16.92
2	256.01	29.20 QP	46.00	-16.80	1.01 H	247	43.79	-14.59
3	307.42	33.02 QP	46.00	-12.98	1.01 H	230	45.86	-12.84
4	402.48	31.80 QP	46.00	-14.20	1.51 H	249	42.20	-10.40
5	411.21	30.68 QP	46.00	-15.32	1.99 H	257	40.89	-10.21
6	527.61	28.71 QP	46.00	-17.29	1.01 H	48	36.30	-7.59

Remarks:

1. Emission Level(dBUV/m) = Raw Value(dBUV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit of frequency range 30 MHz ~ 1 GHz.
5. The emission levels were very low against the limit of frequency range 9 kHz ~ 30 MHz: the amplitude of spurious emissions attenuated more than 20 dB below the permissible value to be report.

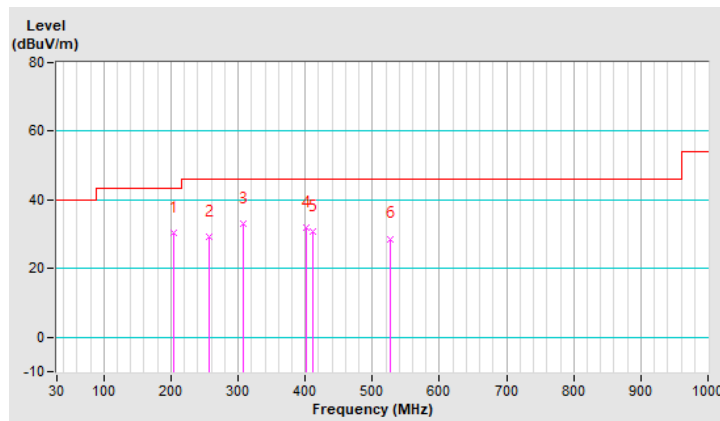


RF Mode	TX NFC-13.56MHz	Channel	CH 1 : 13.56 MHz
Frequency Range	30 MHz ~ 1 GHz	Detector Function & Bandwidth	(QP) RB = 120kHz
Input Power	120 Vac, 60 Hz	Environmental Conditions	23°C, 67% RH
Tested By	Wade Huang	Test Date	2022/4/20

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	203.63	29.20 QP	43.50	-14.30	1.00 V	169	46.12	-16.92
2	298.69	27.12 QP	46.00	-18.88	1.50 V	176	40.20	-13.08
3	408.30	27.20 QP	46.00	-18.80	1.50 V	359	37.48	-10.28
4	505.30	27.58 QP	46.00	-18.42	1.00 V	244	35.63	-8.05
5	566.41	27.64 QP	46.00	-18.36	2.00 V	178	34.48	-6.84
6	609.09	30.51 QP	46.00	-15.49	1.00 V	170	36.18	-5.67

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit of frequency range 30 MHz ~ 1 GHz.
5. The emission levels were very low against the limit of frequency range 9 kHz ~ 30 MHz: the amplitude of spurious emissions attenuated more than 20 dB below the permissible value to be report.

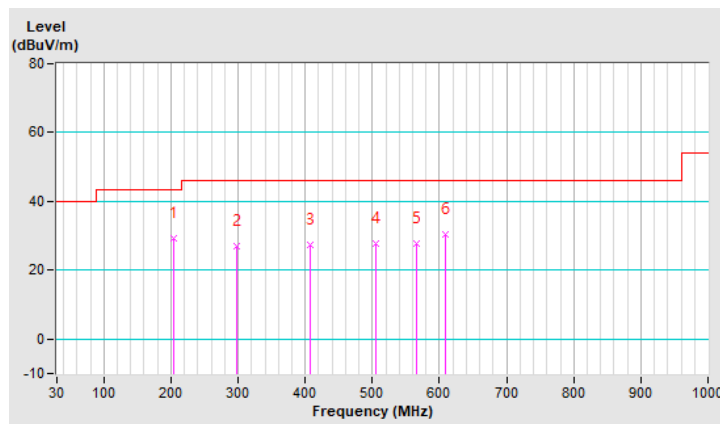

Mode D


RF Mode	TX NFC-13.56MHz	Channel	CH 1 : 13.56 MHz
Frequency Range	30 MHz ~ 1 GHz	Detector Function & Bandwidth	(QP) RB = 120kHz
Input Power	120 Vac, 60 Hz	Environmental Conditions	23°C, 67% RH
Tested By	Wade Huang	Test Date	2022/4/20

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBUV)	Correction Factor (dB/m)
1	125.06	19.22 QP	43.50	-24.28	1.99 H	94	34.20	-14.98
2	189.08	18.60 QP	43.50	-24.90	1.99 H	132	34.37	-15.77
3	251.16	17.90 QP	46.00	-28.10	1.01 H	303	32.61	-14.71
4	440.31	22.38 QP	46.00	-23.62	1.99 H	178	31.54	-9.16
5	529.55	24.42 QP	46.00	-21.58	1.51 H	297	32.00	-7.58
6	575.14	24.76 QP	46.00	-21.24	1.99 H	350	31.34	-6.58

Remarks:

1. Emission Level(dBUV/m) = Raw Value(dBUV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit of frequency range 30 MHz ~ 1 GHz.
5. The emission levels were very low against the limit of frequency range 9 kHz ~ 30 MHz: the amplitude of spurious emissions attenuated more than 20 dB below the permissible value to be report.

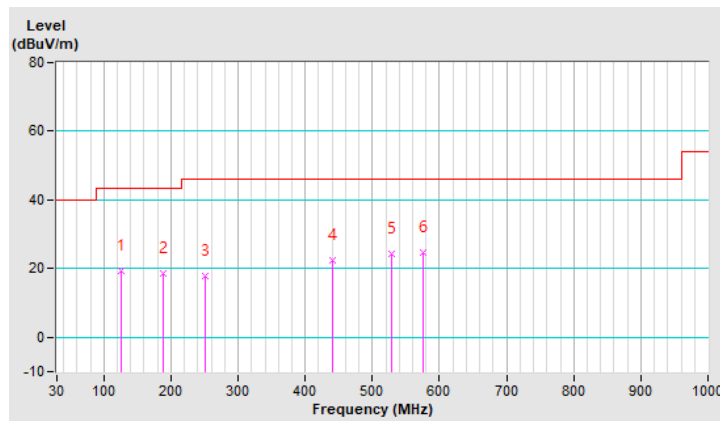


RF Mode	TX NFC-13.56MHz	Channel	CH 1 : 13.56 MHz
Frequency Range	30 MHz ~ 1 GHz	Detector Function & Bandwidth	(QP) RB = 120kHz
Input Power	120 Vac, 60 Hz	Environmental Conditions	23°C, 67% RH
Tested By	Wade Huang	Test Date	2022/4/21

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	40.67	22.39 QP	40.00	-17.61	1.49 V	112	36.00	-13.61
2	64.92	24.61 QP	40.00	-15.39	1.01 V	22	39.48	-14.87
3	183.26	18.68 QP	43.50	-24.82	1.01 V	62	33.89	-15.21
4	384.05	22.13 QP	46.00	-23.87	1.49 V	138	32.90	-10.77
5	491.72	23.86 QP	46.00	-22.14	1.99 V	338	32.25	-8.39
6	570.29	24.50 QP	46.00	-21.50	1.49 V	18	31.25	-6.75

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit of frequency range 30 MHz ~ 1 GHz.
5. The emission levels were very low against the limit of frequency range 9 kHz ~ 30 MHz: the amplitude of spurious emissions attenuated more than 20 dB below the permissible value to be report.

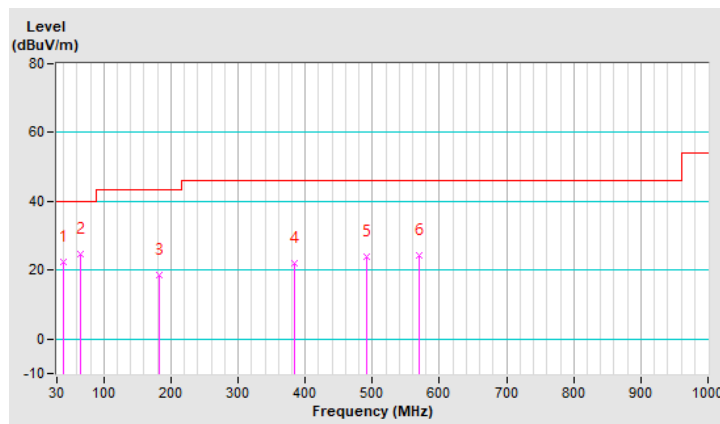

4.2 Conducted Emission Measurement

4.2.1 Limits of Conducted Emission Measurement

Frequency (MHz)	Conducted Limit (dBuV)	
	Quasi-Peak	Average
0.15 - 0.5	66 - 56	56 - 46
0.50 - 5.0	56	46
5.0 - 30.0	60	50

Note:

1. The lower limit shall apply at the transition frequencies.
2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50 MHz.
3. All emanations from a class A/B digital device or system, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strengths specified above.

4.2.2 Test Instruments

Description & Manufacturer	Model No.	Serial No.	Date of Calibration	Due Date of Calibration
Test Receiver ROHDE & SCHWARZ	ESCI	100613	Dec. 03, 2021	Dec. 02, 2022
RF signal cable Woken	5D-FB	Cable-cond1-01	Jan. 15, 2022	Jan. 14, 2023
V-LISN SCHWARZBECK (EUT)	NNBL 8226-2	8226-142	Aug. 20, 2021	Aug. 19, 2022
LISN ROHDE & SCHWARZ (Peripheral)	ESH3-Z5	100311	Sep. 07, 2021	Sep. 06, 2022
Software ADT	BV ADT_Cond_ V7.3.7.4	NA	NA	NA

- Note: 1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. The test was performed in HwaYa Shielded Room 1.
 3. The VCCI Site Registration No. is C-12040.

4.2.3 Test Procedures


- a. The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 ohm/50 uH of coupling impedance for the measuring instrument.
- b. Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- c. The frequency range from 150 kHz to 30 MHz was searched. Emission levels under (Limit – 20 dB) was not recorded.

Note: The resolution bandwidth and video bandwidth of test receiver is 9 kHz for quasi-peak detection (QP) and average detection (AV) at frequency 0.15 MHz - 30 MHz.

4.2.4 Deviation from Test Standard

No deviation.

4.2.5 Test Setup

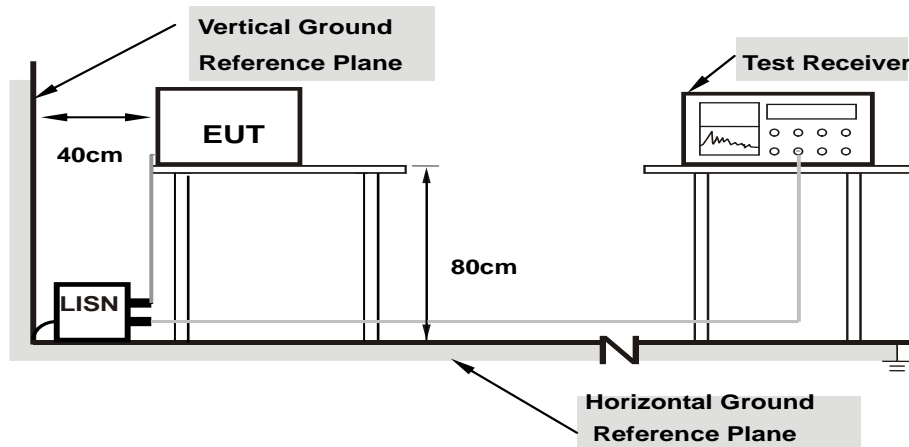

- Note:**
1. Support units were connected to second LISN.
 2. Both of LISNs (AMN) are 80 cm from EUT and at least 80 cm from other units and other metal planes

For the actual test configuration, please refer to the attached file (Test Setup Photo).

4.2.6 EUT Operating Conditions

- a. Placed the EUT on the testing table.
- b. Set the EUT under transmission condition continuously at specific channel frequency.

4.2.7 Test Results

Mode A


Frequency Range	150 kHz ~ 30 MHz	Detector Function & Resolution Bandwidth	Quasi-Peak (QP) / Average (AV), 9kHz
Input Power	120 Vac, 60 Hz	Environmental Conditions	25°C, 75% RH
Tested by	Edison Lee	Test Date	2022/4/20

Phase Of Power : Line (L)

No	Frequency (MHz)	Correction Factor (dB)	Reading Value (dBuV)		Emission Level (dBuV)		Limit (dBuV)		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.20083	9.72	23.66	11.11	33.38	20.83	63.58	53.58	-30.20	-32.75
2	0.74008	9.82	11.42	6.24	21.24	16.06	56.00	46.00	-34.76	-29.94
3	1.10013	9.85	8.43	2.69	18.28	12.54	56.00	46.00	-37.72	-33.46
4	1.46767	9.87	8.86	2.10	18.73	11.97	56.00	46.00	-37.27	-34.03
5	4.52920	9.96	13.98	0.69	23.94	10.65	56.00	46.00	-32.06	-35.35
6	13.56130	10.10	20.89	20.88	30.99	30.98	60.00	50.00	-29.01	-19.02

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level – Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

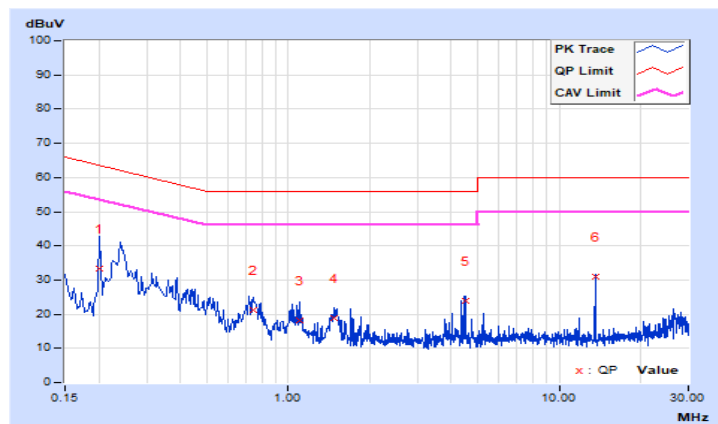


Frequency Range	150 kHz ~ 30 MHz	Detector Function & Resolution Bandwidth	Quasi-Peak (QP) / Average (AV), 9kHz
Input Power	120 Vac, 60 Hz	Environmental Conditions	25°C, 75% RH
Tested by	Edison Lee	Test Date	2022/4/20

Phase Of Power : Neutral (N)										
No	Frequency (MHz)	Correction Factor (dB)	Reading Value (dBuV)		Emission Level (dBuV)		Limit (dBuV)		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.21256	9.73	20.83	16.40	30.56	26.13	63.10	53.10	-32.54	-26.97
2	0.26730	9.75	24.26	18.25	34.01	28.00	61.20	51.20	-27.19	-23.20
3	0.33768	9.78	16.36	0.16	26.14	9.94	59.26	49.26	-33.12	-39.32
4	1.48722	9.89	10.15	3.97	20.04	13.86	56.00	46.00	-35.96	-32.14
5	4.53311	9.98	16.78	0.81	26.76	10.79	56.00	46.00	-29.24	-35.21
6	13.56130	10.11	20.91	19.92	31.02	30.03	60.00	50.00	-28.98	-19.97

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level – Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

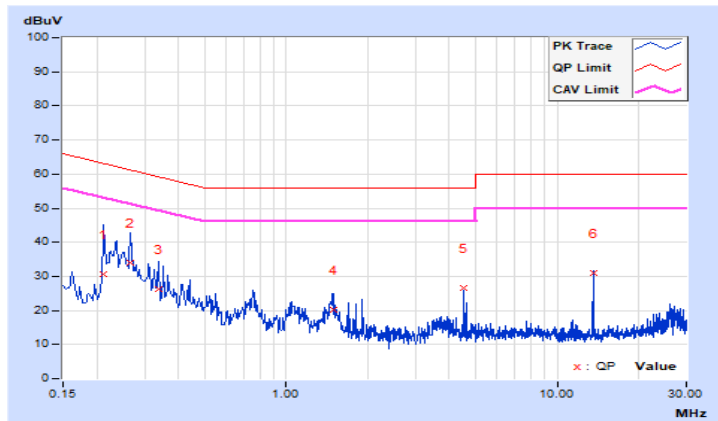


Mode B

Frequency Range	150 kHz ~ 30 MHz	Detector Function & Resolution Bandwidth	Quasi-Peak (QP) / Average (AV), 9kHz
Input Power	120 Vac, 60 Hz	Environmental Conditions	25°C, 75% RH
Tested by	Edison Lee	Test Date	2022/4/20

Phase Of Power : Line (L)											
No	Frequency (MHz)	Correction Factor (dB)	Reading Value (dBuV)		Emission Level (dBuV)		Limit (dBuV)		Margin (dB)		
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	
1	0.17400	9.70	27.11	11.32	36.81	21.02	64.77	54.77	-27.96	-33.75	
2	0.24200	9.74	24.85	11.29	34.59	21.03	62.03	52.03	-27.44	-31.00	
3	0.46200	9.80	22.30	20.58	32.10	30.38	56.66	46.66	-24.56	-16.28	
4	4.43400	9.96	15.88	4.59	25.84	14.55	56.00	46.00	-30.16	-31.45	
5	13.56200	10.10	21.22	17.17	31.32	27.27	60.00	50.00	-28.68	-22.73	
6	21.76600	10.17	12.25	4.53	22.42	14.70	60.00	50.00	-37.58	-35.30	

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level – Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

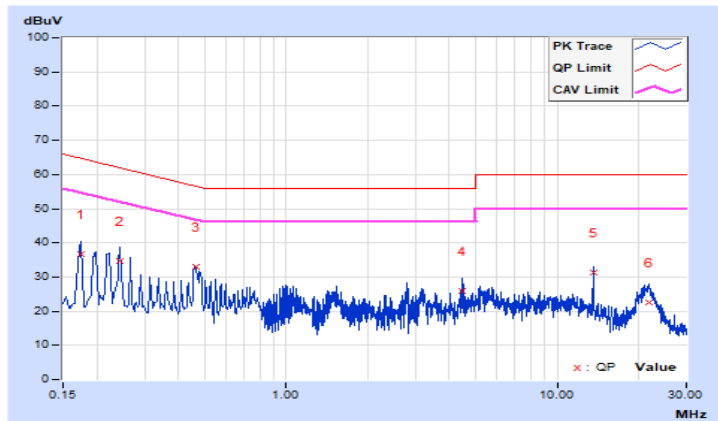


Frequency Range	150 kHz ~ 30 MHz	Detector Function & Resolution Bandwidth	Quasi-Peak (QP) / Average (AV), 9kHz
Input Power	120 Vac, 60 Hz	Environmental Conditions	25°C, 75% RH
Tested by	Edison Lee	Test Date	2022/4/20

Phase Of Power : Neutral (N)										
No	Frequency (MHz)	Correction Factor (dB)	Reading Value (dBuV)		Emission Level (dBuV)		Limit (dBuV)		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.15800	9.69	27.42	16.63	37.11	26.32	65.57	55.57	-28.46	-29.25
2	0.17800	9.70	25.49	14.09	35.19	23.79	64.58	54.58	-29.39	-30.79
3	0.47000	9.82	30.91	30.90	40.73	40.72	56.51	46.51	-15.78	-5.79
4	2.29400	9.93	15.81	7.25	25.74	17.18	56.00	46.00	-30.26	-28.82
5	13.55800	10.11	13.07	10.61	23.18	20.72	60.00	50.00	-36.82	-29.28
6	21.39000	10.20	6.45	0.45	16.65	10.65	60.00	50.00	-43.35	-39.35

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level – Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

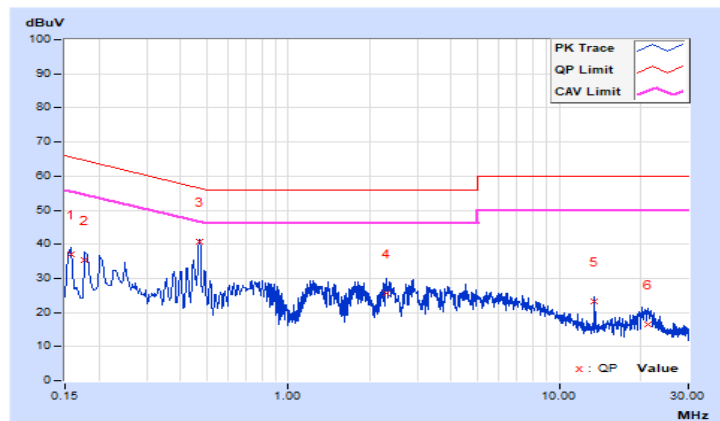


Mode C

Frequency Range	150 kHz ~ 30 MHz	Detector Function & Resolution Bandwidth	Quasi-Peak (QP) / Average (AV), 9kHz
Input Power	120 Vac, 60 Hz	Environmental Conditions	25°C, 75% RH
Tested by	Edison Lee	Test Date	2022/4/20

Phase Of Power : Line (L)										
No	Frequency (MHz)	Correction Factor (dB)	Reading Value (dBuV)		Emission Level (dBuV)		Limit (dBuV)		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.15782	9.69	28.14	10.67	37.83	20.36	65.58	55.58	-27.75	-35.22
2	0.17346	9.70	29.37	9.63	39.07	19.33	64.79	54.79	-25.72	-35.46
3	0.28685	9.75	11.73	3.49	21.48	13.24	60.62	50.62	-39.14	-37.38
4	0.38460	9.79	14.89	12.84	24.68	22.63	58.18	48.18	-33.50	-25.55
5	4.43536	9.96	14.69	0.47	24.65	10.43	56.00	46.00	-31.35	-35.57
6	27.34405	10.20	11.27	4.78	21.47	14.98	60.00	50.00	-38.53	-35.02

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level – Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

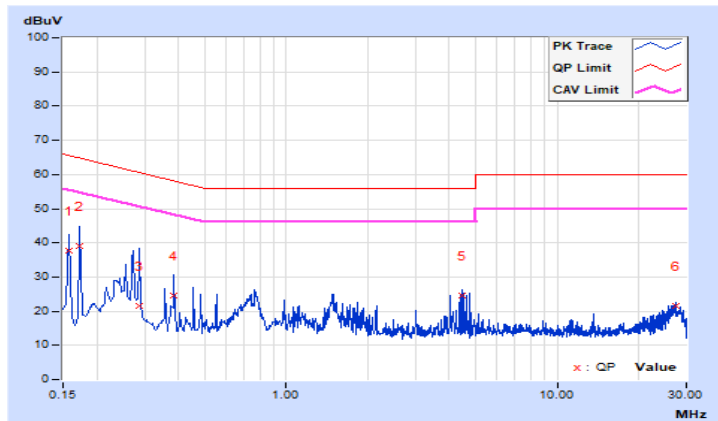


Frequency Range	150 kHz ~ 30 MHz	Detector Function & Resolution Bandwidth	Quasi-Peak (QP) / Average (AV), 9kHz
Input Power	120 Vac, 60 Hz	Environmental Conditions	25°C, 75% RH
Tested by	Edison Lee	Test Date	2022/4/20

Phase Of Power : Neutral (N)										
No	Frequency (MHz)	Correction Factor (dB)	Reading Value (dBuV)		Emission Level (dBuV)		Limit (dBuV)		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.25166	9.74	11.28	6.18	21.02	15.92	61.70	51.70	-40.68	-35.78
2	0.75984	9.84	12.20	6.49	22.04	16.33	56.00	46.00	-33.96	-29.67
3	1.47549	9.89	10.10	3.12	19.99	13.01	56.00	46.00	-36.01	-32.99
4	4.53311	9.98	19.35	2.53	29.33	12.51	56.00	46.00	-26.67	-33.49
5	10.86731	10.07	8.56	5.71	18.63	15.78	60.00	50.00	-41.37	-34.22
6	27.23457	10.20	10.96	4.79	21.16	14.99	60.00	50.00	-38.84	-35.01

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level – Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

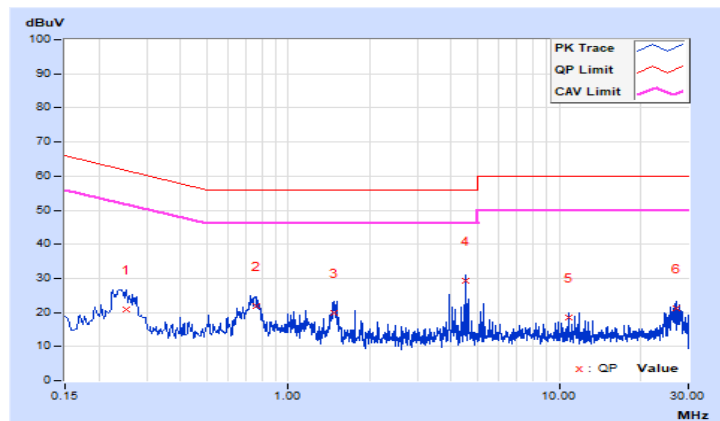


Mode D

Frequency Range	150 kHz ~ 30 MHz	Detector Function & Resolution Bandwidth	Quasi-Peak (QP) / Average (AV), 9kHz
Input Power	120 Vac, 60 Hz	Environmental Conditions	25°C, 75% RH
Tested by	Edison Lee	Test Date	2022/4/20

Phase Of Power : Line (L)										
No	Frequency (MHz)	Correction Factor (dB)	Reading Value (dBuV)		Emission Level (dBuV)		Limit (dBuV)		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.46600	9.80	22.18	18.52	31.98	28.32	56.58	46.58	-24.60	-18.26
2	1.88200	9.89	10.44	2.47	20.33	12.36	56.00	46.00	-35.67	-33.64
3	4.53800	9.96	11.50	0.88	21.46	10.84	56.00	46.00	-34.54	-35.16
4	6.13800	9.99	11.70	2.70	21.69	12.69	60.00	50.00	-38.31	-37.31
5	11.89400	10.08	10.06	5.05	20.14	15.13	60.00	50.00	-39.86	-34.87
6	13.25000	10.10	12.43	3.00	22.53	13.10	60.00	50.00	-37.47	-36.90

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level – Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

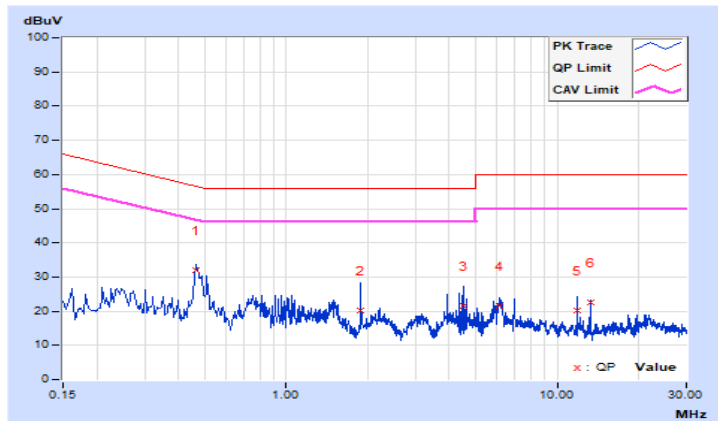


Frequency Range	150 kHz ~ 30 MHz	Detector Function & Resolution Bandwidth	Quasi-Peak (QP) / Average (AV), 9kHz
Input Power	120 Vac, 60 Hz	Environmental Conditions	25°C, 75% RH
Tested by	Edison Lee	Test Date	2022/4/20

Phase Of Power : Neutral (N)										
No	Frequency (MHz)	Correction Factor (dB)	Reading Value (dBuV)		Emission Level (dBuV)		Limit (dBuV)		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.47000	9.82	27.17	25.67	36.99	35.49	56.51	46.51	-19.52	-11.02
2	1.50200	9.89	11.83	7.63	21.72	17.52	56.00	46.00	-34.28	-28.48
3	2.07800	9.92	10.34	7.78	20.26	17.70	56.00	46.00	-35.74	-28.30
4	4.03000	9.97	12.91	5.83	22.88	15.80	56.00	46.00	-33.12	-30.20
5	4.73400	9.98	11.97	4.32	21.95	14.30	56.00	46.00	-34.05	-31.70
6	6.28200	10.00	9.62	0.12	19.62	10.12	60.00	50.00	-40.38	-39.88

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level – Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

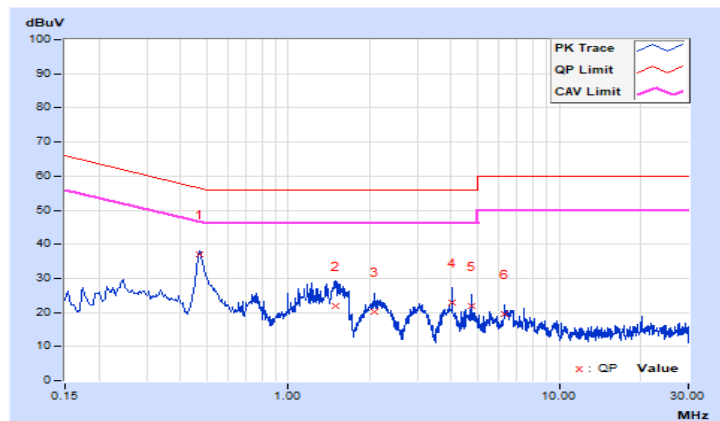


4.3 Frequency Stability

4.3.1 Limits of Frequency Stability Measurement

The frequency tolerance of the carrier signal shall be maintained within +/- 0.01 % of the operating frequency over a temperature variation of -20 degrees to 50 degrees C at normal supply voltage, and for a variation in the primary supply voltage from 85 % to 115 % of the rated supply voltage at a temperature of 20 degrees C.

4.3.2 Test Setup

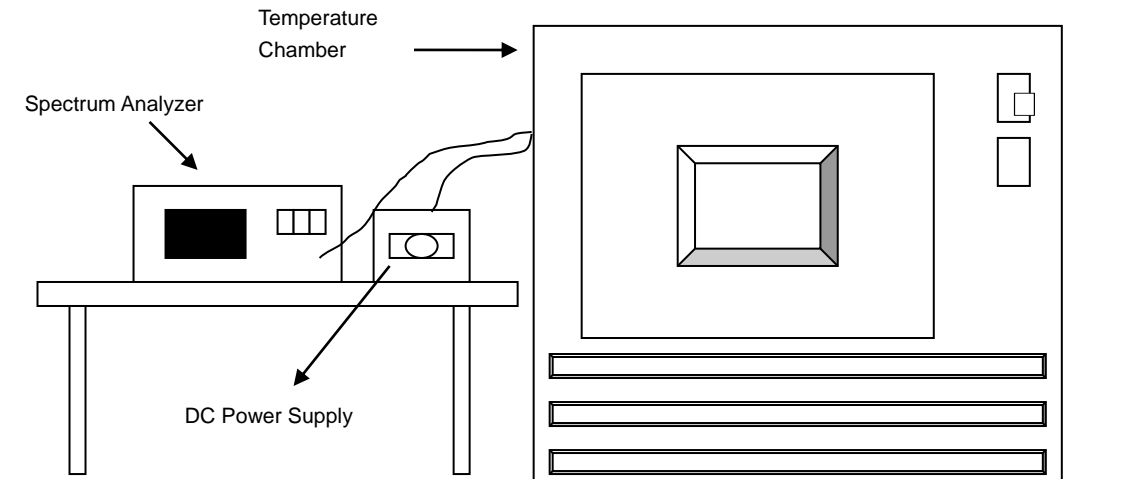

4.3.3 Test Instruments

Refer to section 4.1.2 to get information of above instrument.

4.3.4 Test Procedure

- a. The EUT was placed inside the environmental test chamber and powered by nominal DC voltage.
- b. Turned the EUT on and coupled its output to a spectrum analyzer.
- c. Turned the EUT off and set the chamber to the highest temperature specified.
- d. Allowed sufficient time (approximately 30 min) for the temperature of the chamber to stabilize then turned the EUT on and measured the operating frequency after 2, 5, and 10 minutes.
- e. Repeated step c and d with the every 10 degrees reduction until the lowest temperature achieved.
- f. The test chamber was allowed to stabilize at +20 degree C for a minimum of 30 minutes. The supply voltage was then adjusted on the EUT from 85 % to 115 % and the frequency record.

4.3.5 Deviation from Test Standard

No deviation.

4.3.6 EUT Operating Conditions

- a. Placed the EUT on the testing table.
- b. Set the EUT under transmission condition continuously at specific channel frequency.

4.3.7 Test Results

Frequency Stability Versus Temperature									
Temp. (°C)	Power Supply (Vdc)	0 Minute		2 Minute		5 Minute		10 Minute	
		Measured Frequency	Frequency Drift	Measured Frequency	Frequency Drift	Measured Frequency	Frequency Drift	Measured Frequency	Frequency Drift
		(MHz)	%	(MHz)	%	(MHz)	%	(MHz)	%
50	5	13.56002	0.00015	13.56002	0.00015	13.56002	0.00015	13.56003	0.00022
40	5	13.55997	-0.00022	13.55997	-0.00022	13.55996	-0.00029	13.55997	-0.00022
30	5	13.55998	-0.00015	13.55998	-0.00015	13.55998	-0.00015	13.55998	-0.00015
20	5	13.56003	0.00022	13.56002	0.00015	13.56003	0.00022	13.56003	0.00022
10	5	13.55998	-0.00015	13.55997	-0.00022	13.55998	-0.00015	13.55998	-0.00015
0	5	13.55995	-0.00037	13.55995	-0.00037	13.55995	-0.00037	13.55996	-0.00029
-10	5	13.55998	-0.00015	13.55999	-0.00007	13.55998	-0.00015	13.55998	-0.00015
-20	5	13.55995	-0.00037	13.55995	-0.00037	13.55994	-0.00044	13.55994	-0.00044

Frequency Stability Versus Voltage									
Temp. (°C)	Power Supply (Vdc)	0 Minute		2 Minute		5 Minute		10 Minute	
		Measured Frequency	Frequency Drift	Measured Frequency	Frequency Drift	Measured Frequency	Frequency Drift	Measured Frequency	Frequency Drift
		(MHz)	%	(MHz)	%	(MHz)	%	(MHz)	%
20	5.75	13.56003	0.00022	13.56002	0.00015	13.56003	0.00022	13.56003	0.00022
	5	13.56003	0.00022	13.56002	0.00015	13.56003	0.00022	13.56003	0.00022
	4.25	13.56003	0.00022	13.56002	0.00015	13.56003	0.00022	13.56003	0.00022

4.4 20 dB Bandwidth

4.4.1 Limits of 20 dB Bandwidth Measurement

The 20 dB bandwidth shall be specified in operating frequency band.

4.4.2 Test Setup

Refer to section 4.1.5.

4.4.3 Test Instruments

Refer to section 4.1.2 to get information of above instrument.

4.4.4 Test Procedures

The bandwidth of the fundamental frequency was measured by spectrum analyzer with 1 kHz RBW and 3 kHz VBW. The 20 dB bandwidth is defined as the total spectrum the power of which is higher than peak power minus 20 dB.

4.4.5 Deviation from Test Standard


No deviation.

4.4.6 EUT Operating Conditions

- a. Placed the EUT on the testing table.
- b. Set the EUT under transmission condition continuously at specific channel frequency.

4.4.7 Test Results

20 dBc Point (Low)	20 dBc Point (High)	Operating Frequency Band (MHz)	20 dBc Bandwidth (kHz)	Pass / Fail
13.55127 MHz	13.55870 MHz	13.553~13.567	2.54	Pass

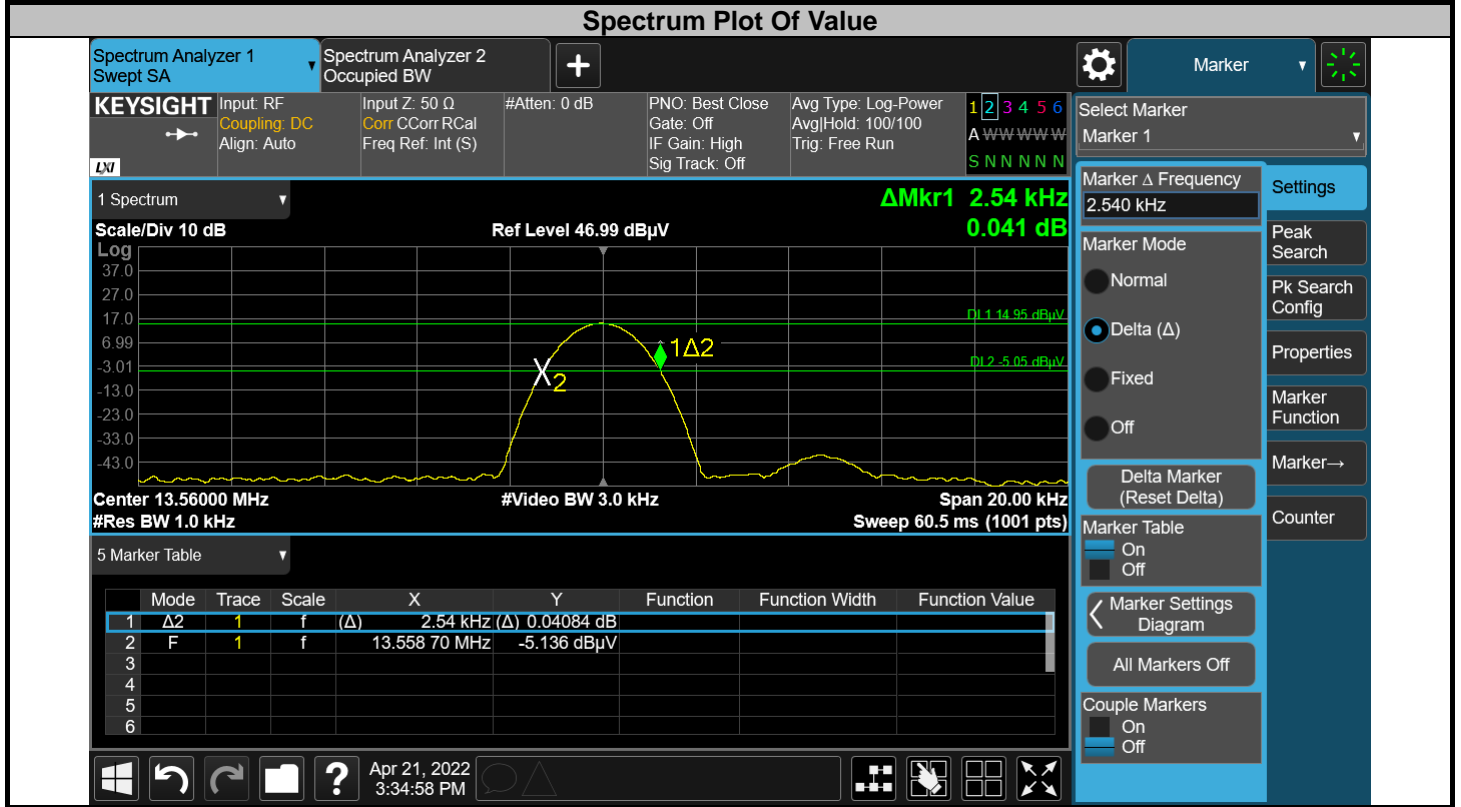

Note: The signal look like CW signal, so RBW can't be match 1~5 % OBW.

5 Pictures of Test Arrangements

Please refer to the attached file (Test Setup Photo).

Appendix – Information of the Testing Laboratories

We, Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch, were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are FCC recognized accredited test firms and accredited according to ISO/IEC 17025.

If you have any comments, please feel free to contact us at the following:

Lin Kou EMC/RF Lab

Tel: 886-2-26052180

Fax: 886-2-26051924

Hsin Chu EMC/RF/Telecom Lab

Tel: 886-3-6668565

Fax: 886-3-6668323

Hwa Ya EMC/RF/Safety Lab

Tel: 886-3-3183232

Fax: 886-3-3270892

Email: service.adt@tw.bureauveritas.com

Web Site: www.bureauveritas-adt.com

The address and road map of all our labs can be found in our web site also.

--- END ---