


Plot 7-123. Band Edge Plot (Bluetooth with Hopping Enabled, 3 Mbps)

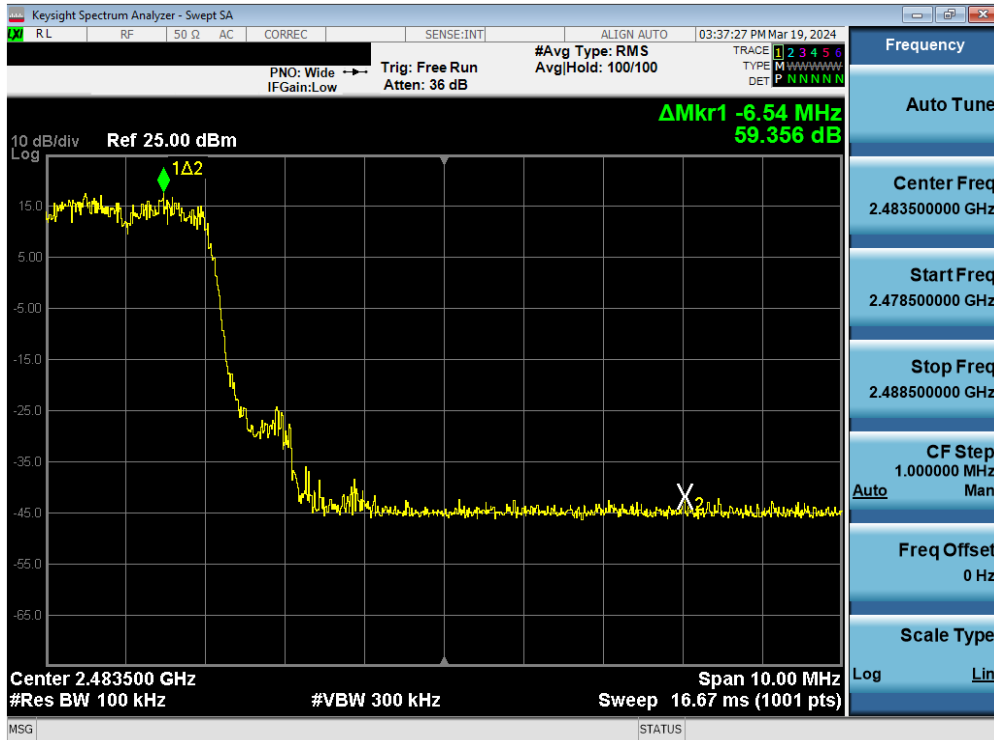

Plot 7-124. Band Edge Plot (Bluetooth with Hopping Enabled, 3 Mbps)

FCC ID: C3K2077 IC: 3048A-2077	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2312040120-15.C3K	Test Dates: 12/14/2023 - 03/18/2024	EUT Type: Portable Computing Device	Page 81 of 137

7.5 Carrier Frequency Separation

§15.247 (a.1); RSS-247 [5.1(2)]

Test Overview and Limit

Measurement is made with EUT operating in hopping mode. ***The minimum permissible channel separation for this system is 2/3 the value of the 20dB BW.***

Test Procedure Used

ANSI C63.10-2013 – Section 7.8.2

Test Settings

1. Span = Wide enough to capture peaks of two adjacent channels
2. RBW = 30% of channel spacing. Adjust as necessary to best identify center of each individual channel
3. VBW \geq RBW
4. Sweep = Auto
5. Detector = Peak
6. Trace mode = max hold
7. The trace was allowed to stabilize.
8. Marker-delta function used to determine separation between peaks of the adjacent channels

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.



Figure 7-4. Test Instrument & Measurement Setup


Test Notes

The EUT complies with the minimum channel separation requirement when it is operating in 1x/EDR mode using 79 channels and when operating in AFH mode using 20 channels.

FCC ID: C3K2077 IC: 3048A-2077	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2312040120-15.C3K	Test Dates: 12/14/2023 - 03/18/2024	EUT Type: Portable Computing Device	Page 82 of 137

Frequency [MHz]	Data Rate [Mbps]	Mod.	Channel No.	Min. Channel Separation [MHz]
2402	1.0	GFSK	0	0.626
2441	1.0	GFSK	39	0.629
2480	1.0	GFSK	78	0.621
2402	2.0	$\pi/4$ -DQPSK	0	0.894
2441	2.0	$\pi/4$ -DQPSK	39	0.887
2480	2.0	$\pi/4$ -DQPSK	78	0.867
2402	3.0	8DPSK	0	0.855
2441	3.0	8DPSK	39	0.878
2480	3.0	8DPSK	78	0.862

Table 7-9. Minimum Channel Separation – SISO ANT1

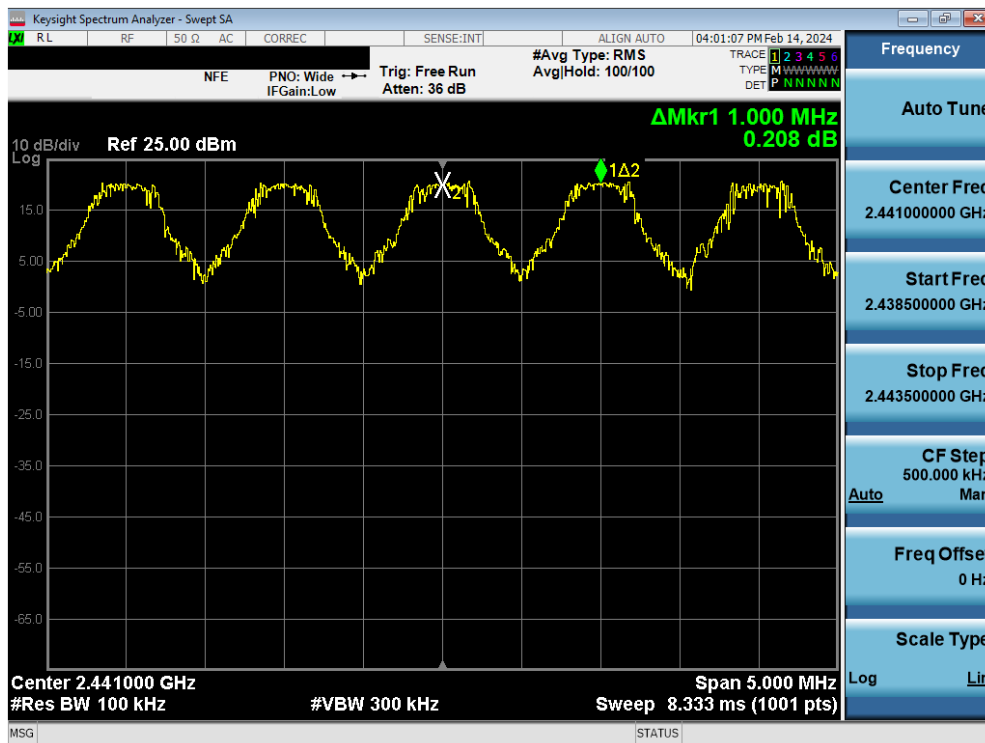


Plot 7-125. Channel Spacing Plot (Bluetooth) – SISO ANT1

FCC ID: C3K2077 IC: 3048A-2077	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2312040120-15.C3K	Test Dates: 12/14/2023 - 03/18/2024	EUT Type: Portable Computing Device	Page 83 of 137

Frequency [MHz]	Data Rate [Mbps]	Mod.	Channel No.	Min. Channel Separation [MHz]
2402	1.0	GFSK	0	0.619
2441	1.0	GFSK	39	0.622
2480	1.0	GFSK	78	0.576
2402	2.0	$\pi/4$ -DQPSK	0	0.889
2441	2.0	$\pi/4$ -DQPSK	39	0.897
2480	2.0	$\pi/4$ -DQPSK	78	0.884
2402	3.0	8DPSK	0	0.848
2441	3.0	8DPSK	39	0.895
2480	3.0	8DPSK	78	0.882

Table 7-10. Minimum Channel Separation – SISO ANT2

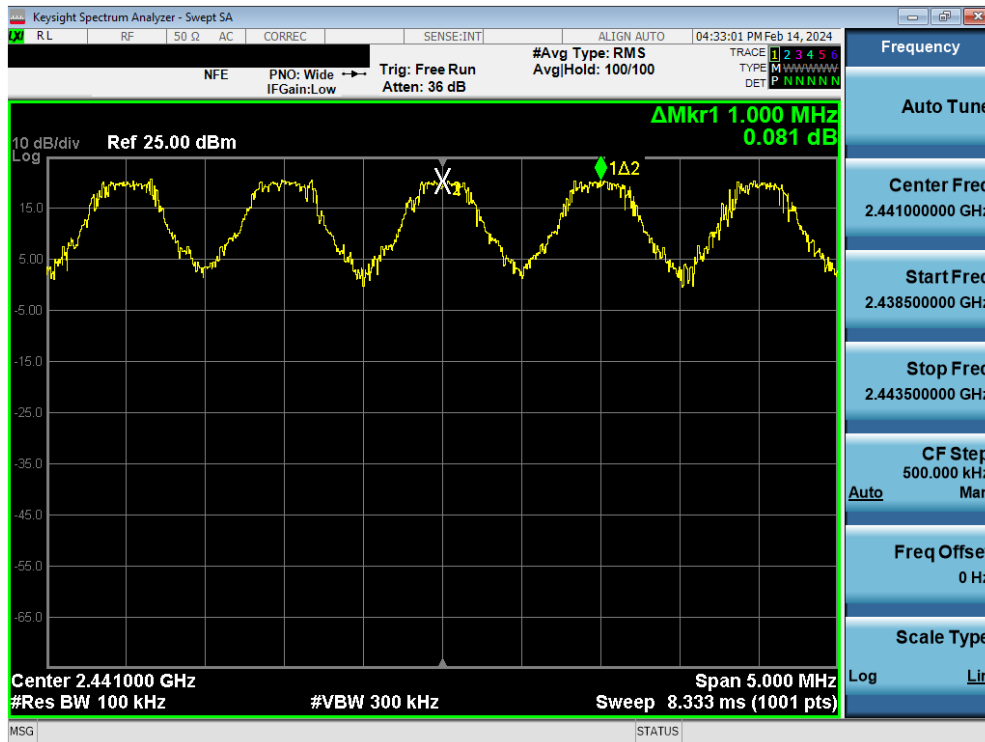


Plot 7-126. Channel Spacing Plot (Bluetooth) – SISO ANT2

FCC ID: C3K2077 IC: 3048A-2077	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2312040120-15.C3K	Test Dates: 12/14/2023 - 03/18/2024	EUT Type: Portable Computing Device	Page 84 of 137

Frequency [MHz]	Data Rate [Mbps]	Mod.	Channel No.	Min. Channel Separation [MHz]
2402	1.0	GFSK	0	0.612
2441	1.0	GFSK	39	0.627
2480	1.0	GFSK	78	0.615
2402	2.0	$\pi/4$ -DQPSK	0	0.919
2441	2.0	$\pi/4$ -DQPSK	39	0.909
2480	2.0	$\pi/4$ -DQPSK	78	0.914
2402	3.0	8DPSK	0	0.903
2441	3.0	8DPSK	39	0.903
2480	3.0	8DPSK	78	0.895

Table 7-11. Minimum Channel Separation – DUAL ANT1

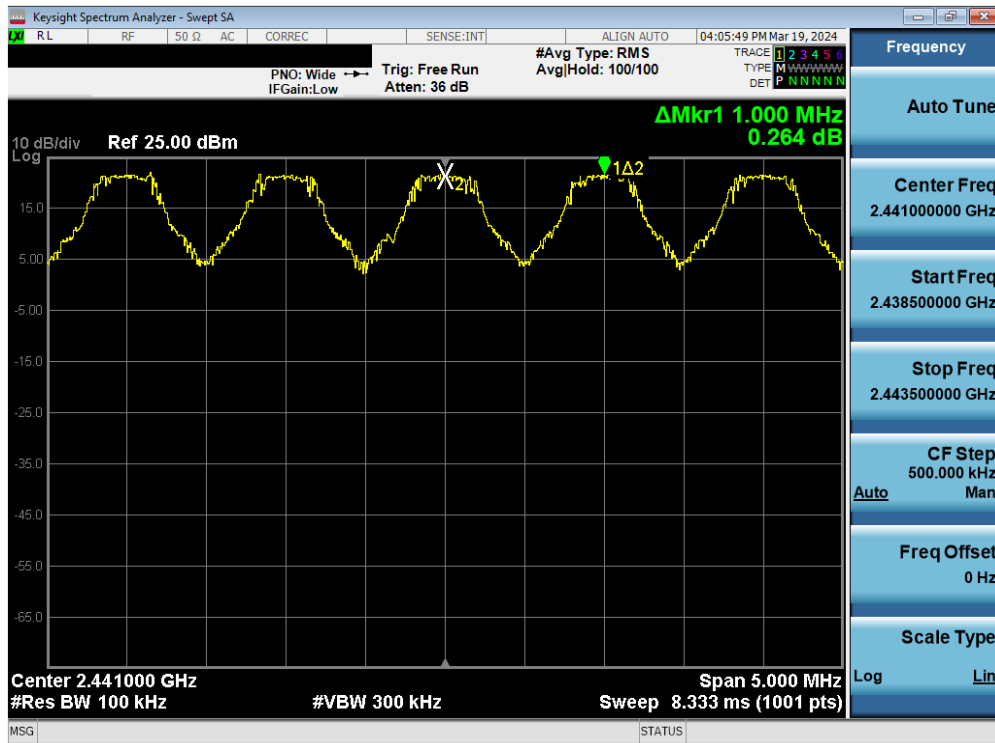


Plot 7-127. Channel Spacing Plot (Bluetooth) – ANT1

FCC ID: C3K2077 IC: 3048A-2077	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2312040120-15.C3K	Test Dates: 12/14/2023 - 03/18/2024	EUT Type: Portable Computing Device	Page 85 of 137



Frequency [MHz]	Data Rate [Mbps]	Mod.	Channel No.	Min. Channel Separation [MHz]
2402	1.0	GFSK	0	0.621
2441	1.0	GFSK	39	0.627
2480	1.0	GFSK	78	0.577
2402	2.0	$\pi/4$ -DQPSK	0	0.909
2441	2.0	$\pi/4$ -DQPSK	39	0.911
2480	2.0	$\pi/4$ -DQPSK	78	0.905
2402	3.0	8DPSK	0	0.911
2441	3.0	8DPSK	39	0.909
2480	3.0	8DPSK	78	0.903

Table 7-12. Minimum Channel Separation – DUAL ANT2

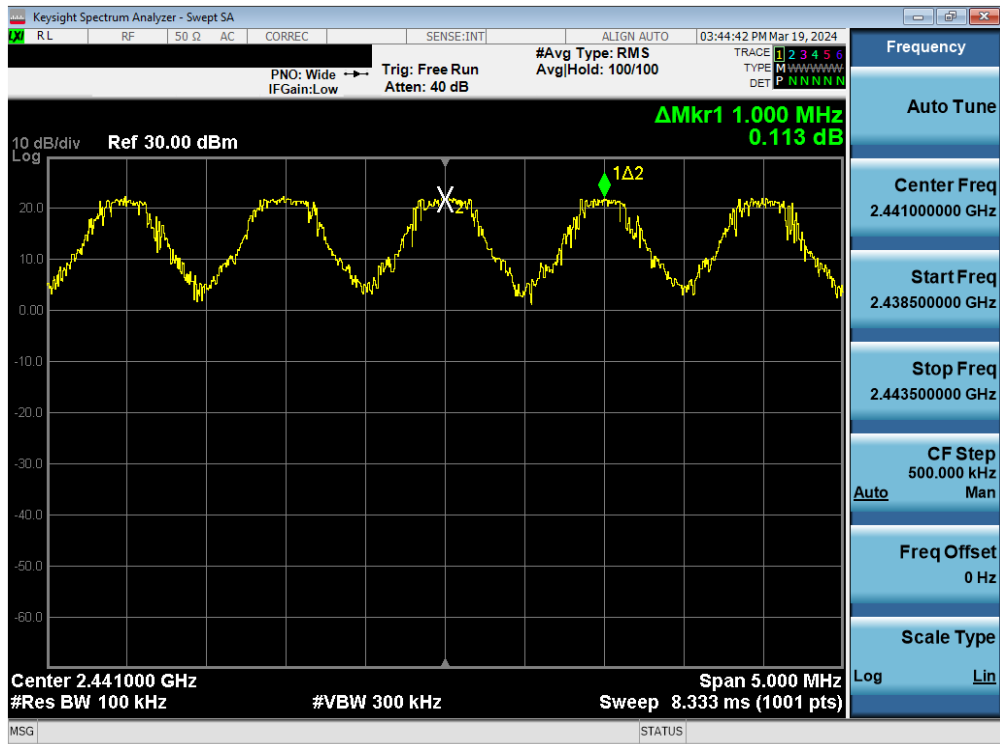

Plot 7-128. Channel Spacing Plot (Bluetooth) – DUAL ANT2

FCC ID: C3K2077 IC: 3048A-2077	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2312040120-15.C3K	Test Dates: 12/14/2023 - 03/18/2024	EUT Type: Portable Computing Device	Page 86 of 137

7.6 Time of Occupancy

§15.247 (a.1.iii); RSS-247 [5.1(4)]

Test Overview and Limit

Measurement is made while EUT is operating in hopping mode with the spectrum analyzer set to zero span. **The maximum permissible time of occupancy is 400 ms within a period of 400ms multiplied by the number of hopping channels employed.**

Test Procedure Used

ANSI C63.10-2013 – Section 7.8.4

Test Settings

1. Span = zero span, centered on a hopping channel
2. RBW \leq channel spacing and $\gg 1/T$, where T is expected dwell time per channel
3. Sweep = as necessary to capture entire dwell time. Second plot may be required to demonstrate two successive hops on a channel
4. Trigger is set with appropriate trigger delay to place pulse near the center of the plot
5. Detector = peak
6. Trace mode = max hold
7. Marker-delta function used to determine transmit time per hop

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

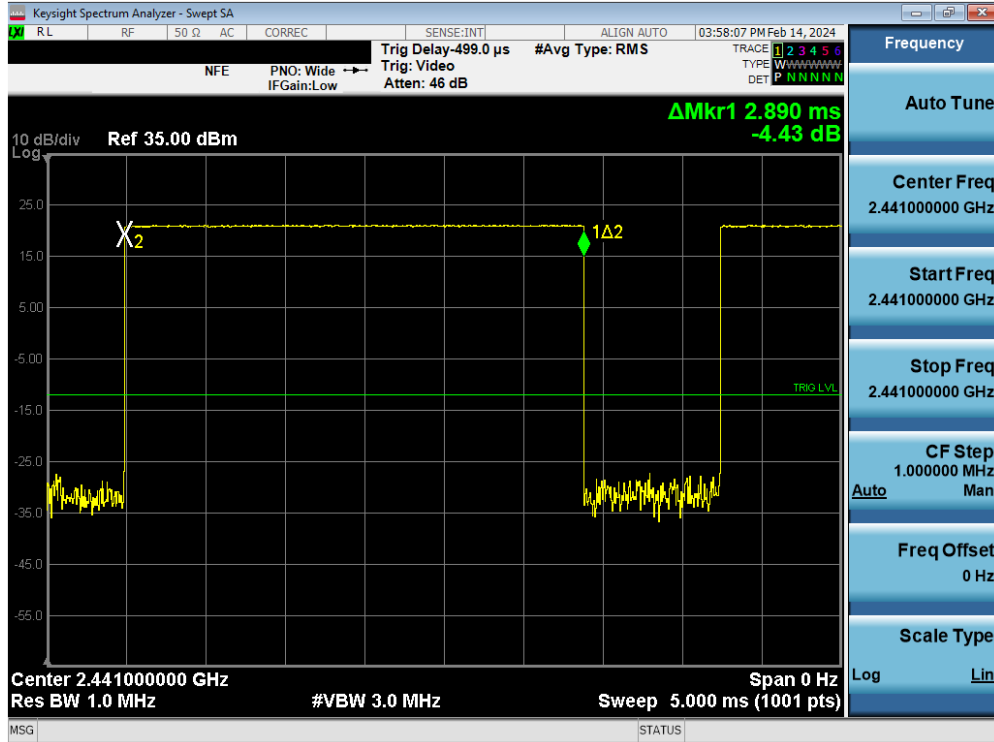


Figure 7-5. Test Instrument & Measurement Setup


Test Notes

None

FCC ID: C3K2077 IC: 3048A-2077	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2312040120-15.C3K	Test Dates: 12/14/2023 - 03/18/2024	EUT Type: Portable Computing Device	Page 87 of 137



Plot 7-129. Time of Occupancy Plot (Bluetooth) – SISO ANT1

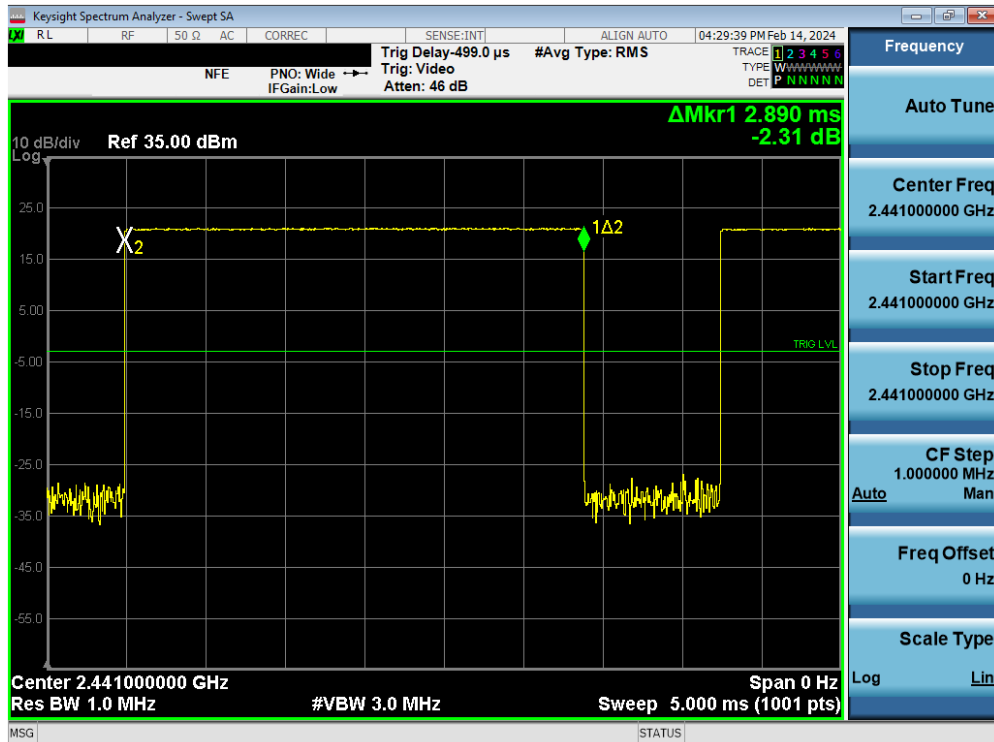

Plot 7-130. Time of Occupancy Plot (Bluetooth) – SISO ANT2

FCC ID: C3K2077 IC: 3048A-2077	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2312040120-15.C3K	Test Dates: 12/14/2023 - 03/18/2024	EUT Type: Portable Computing Device	Page 88 of 137



Bluetooth Time of Occupancy Calculation


Typically, Bluetooth 1x/EDR mode has a channel hopping rate of 1600 hops/s. Since 1x/EDR modes use 5 transmit and 1 receive slot, for a total of 6 slots, the Bluetooth transmitter is actually hopping at a rate of $1600 / 6 = 266.67$ hops/s/slot

- $400\text{ms} \times 79$ hopping channels = 31.6 sec (Time of Occupancy Limit)
- Worst case BT has 266.67 hops/second (for 1x/EDR modes with DH5 operation)
- 266.67 hops/second / 79 channels = 3.38 hops/second (# of hops/second on one channel)
- 3.38 hops/second/channel x 31.6 seconds = 106.67 hops (# hops over a 31.6 second period)
- 106.67 hops x 2.890 ms/channel = 308.28 ms (worst case dwell time for one channel in 1x/EDR modes)


With AFH, the number of channels is reduced to a minimum of 20 channels and the channel hopping rate is reduced by 50% to 800 hops/s. AFH mode also uses 6 total slots so the Bluetooth transmitter hops at a rate of $800 / 6 = 133.3$ hops/s/slot

- $400\text{ms} \times 20$ hopping channels = 8 sec (Time of Occupancy Limit)
- Worst case BT has 133.3 hops/second/slot (for AFH mode with DH5 operation)
- 133.3 hops/s / 20 channels = 6.67 hops/second (# of hops/second on one channel)
- 6.67 hops/s / channel x 8 seconds = 53.34 hops (# hops over a 8 second period)
- 53.34 hops x 2.890 ms/channel = 154.15 ms (worst case dwell time for one channel in AFH mode)

FCC ID: C3K2077 IC: 3048A-2077	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2312040120-15.C3K	Test Dates: 12/14/2023 - 03/18/2024	EUT Type: Portable Computing Device	Page 89 of 137

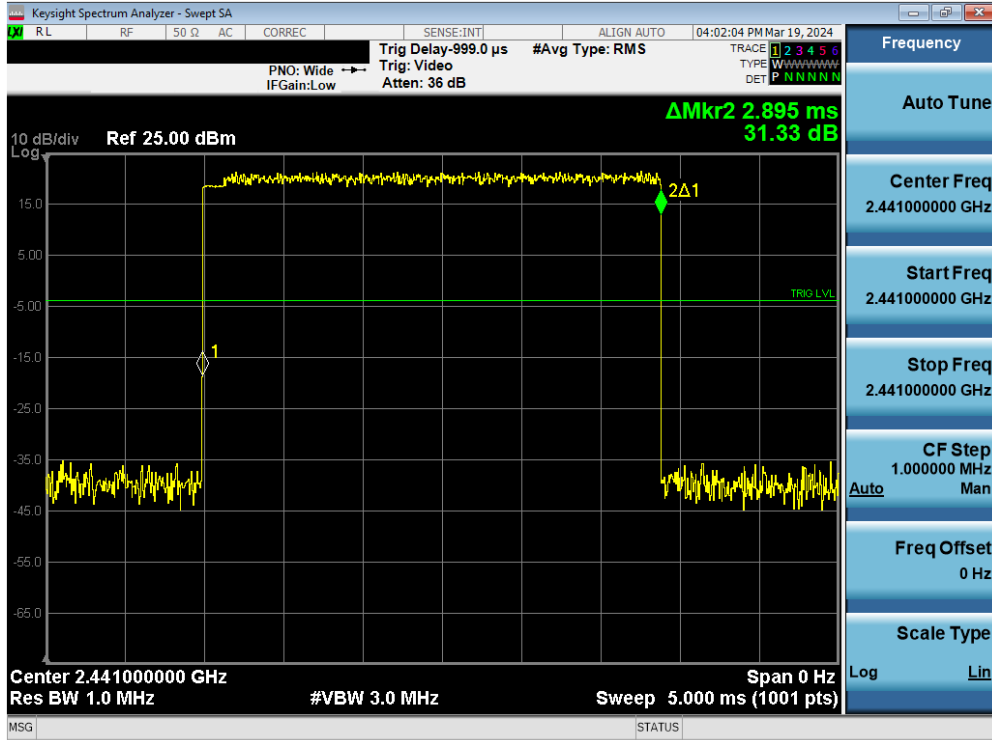

Plot 7-131. Time of Occupancy Plot (Bluetooth) – DUAL ANT1

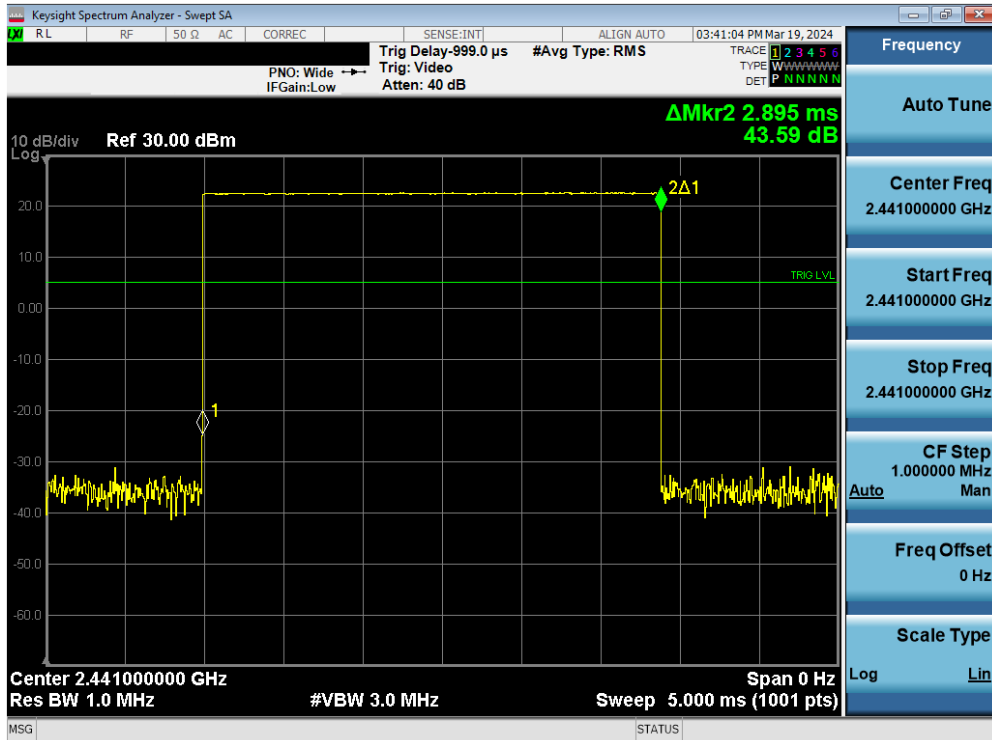

Plot 7-132. Time of Occupancy Plot (Bluetooth) – DUAL ANT2

FCC ID: C3K2077 IC: 3048A-2077		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2312040120-15.C3K	Test Dates: 12/14/2023 - 03/18/2024	EUT Type: Portable Computing Device		Page 90 of 137



Bluetooth Time of Occupancy Calculation

Typically, Bluetooth 1x/EDR mode has a channel hopping rate of 1600 hops/s. Since 1x/EDR modes use 5 transmit and 1 receive slot, for a total of 6 slots, the Bluetooth transmitter is actually hopping at a rate of $1600 / 6 = 266.67$ hops/s/slot

- $400\text{ms} \times 79$ hopping channels = 31.6 sec (Time of Occupancy Limit)
- Worst case BT has 266.67 hops/second (for 1x/EDR modes with DH5 operation)
- 266.67 hops/second / 79 channels = 3.38 hops/second (# of hops/second on one channel)
- 3.38 hops/second/channel x 31.6 seconds = 106.67 hops (# hops over a 31.6 second period)
- 106.67 hops x 2.895 ms/channel = 308.81 ms (worst case dwell time for one channel in 1x/EDR modes)

With AFH, the number of channels is reduced to a minimum of 20 channels and the channel hopping rate is reduced by 50% to 800 hops/s. AFH mode also uses 6 total slots so the Bluetooth transmitter hops at a rate of $800 / 6 = 133.3$ hops/s/slot

- $400\text{ms} \times 20$ hopping channels = 8 sec (Time of Occupancy Limit)
- Worst case BT has 133.3 hops/second/slot (for AFH mode with DH5 operation)
- 133.3 hops/s / 20 channels = 6.67 hops/second (# of hops/second on one channel)
- 6.67 hops/s / channel x 8 seconds = 53.34 hops (# hops over a 8 second period)
- 53.34 hops x 2.895 ms/channel = 154.42 ms (worst case dwell time for one channel in AFH mode)

FCC ID: C3K2077 IC: 3048A-2077	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2312040120-15.C3K	Test Dates: 12/14/2023 - 03/18/2024	EUT Type: Portable Computing Device	Page 91 of 137

7.7 Number of Hopping Channels

§15.247 (a.1.iii); RSS-247 [5.1(4)]

Test Overview and Limit

Measurement is made while EUT is operating in hopping mode. ***This frequency hopping system must employ a minimum of 15 hopping channels.***

Test Procedure Used

ANSI C63.10-2013 – Section 7.8.3

Test Settings

1. Span = frequency of band of operation (divided into two plots)
2. RBW < 30% of channel spacing or 20dB bandwidth, whichever is smaller
3. VBW ≥ RBW
4. Sweep = auto
5. Detector = peak
6. Trace mode = max hold
7. Trace was allowed to stabilize

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.




Figure 7-6. Test Instrument & Measurement Setup

Test Notes


The frequency spectrum was broken up into two sub-ranges to clearly show all the hopping frequencies. In AFH mode, this device operates using 20 channels so the requirement for minimum number of hopping channels is satisfied.

FCC ID: C3K2077 IC: 3048A-2077	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2312040120-15.C3K	Test Dates: 12/14/2023 - 03/18/2024	EUT Type: Portable Computing Device	Page 92 of 137

SISO ANT1

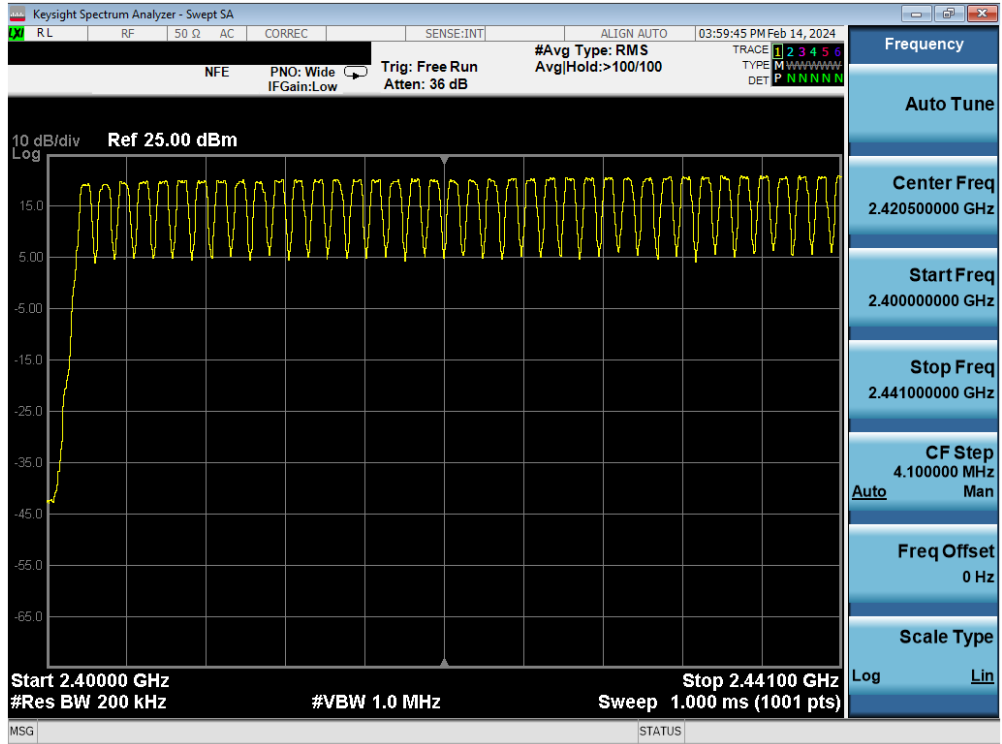


Plot 7-133. Low End Spectrum Channel Hopping Plot (Bluetooth)

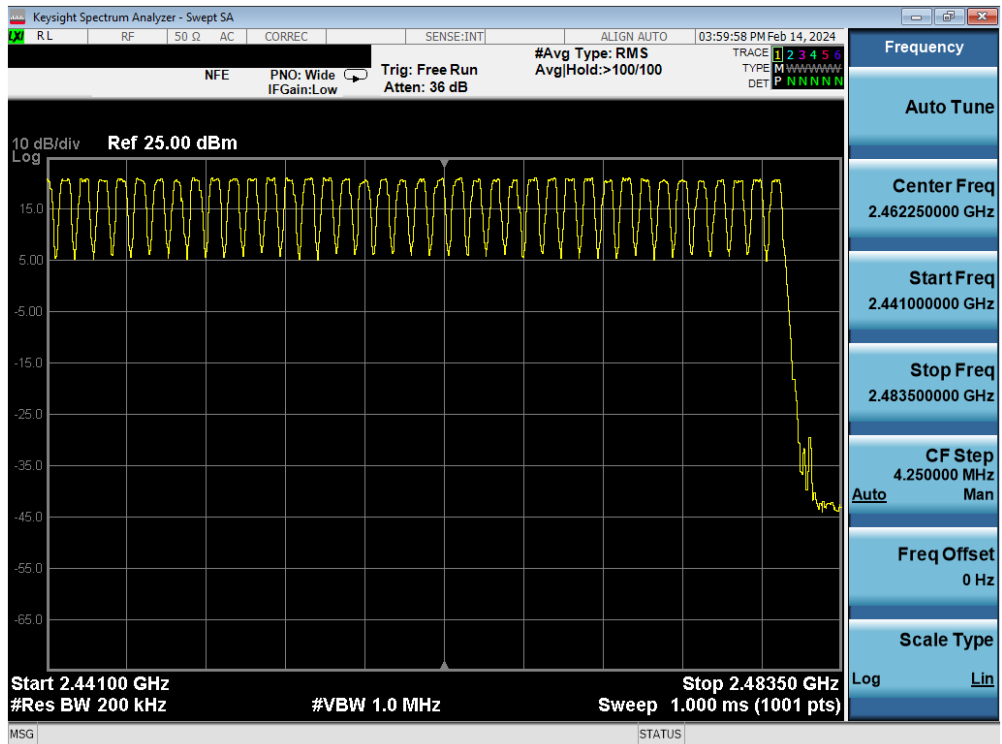


Plot 7-134. High End Spectrum Channel Hopping Plot (Bluetooth)

FCC ID: C3K2077 IC: 3048A-2077	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2312040120-15.C3K	Test Dates: 12/14/2023 - 03/18/2024	EUT Type: Portable Computing Device	Page 93 of 137

SISO ANT2

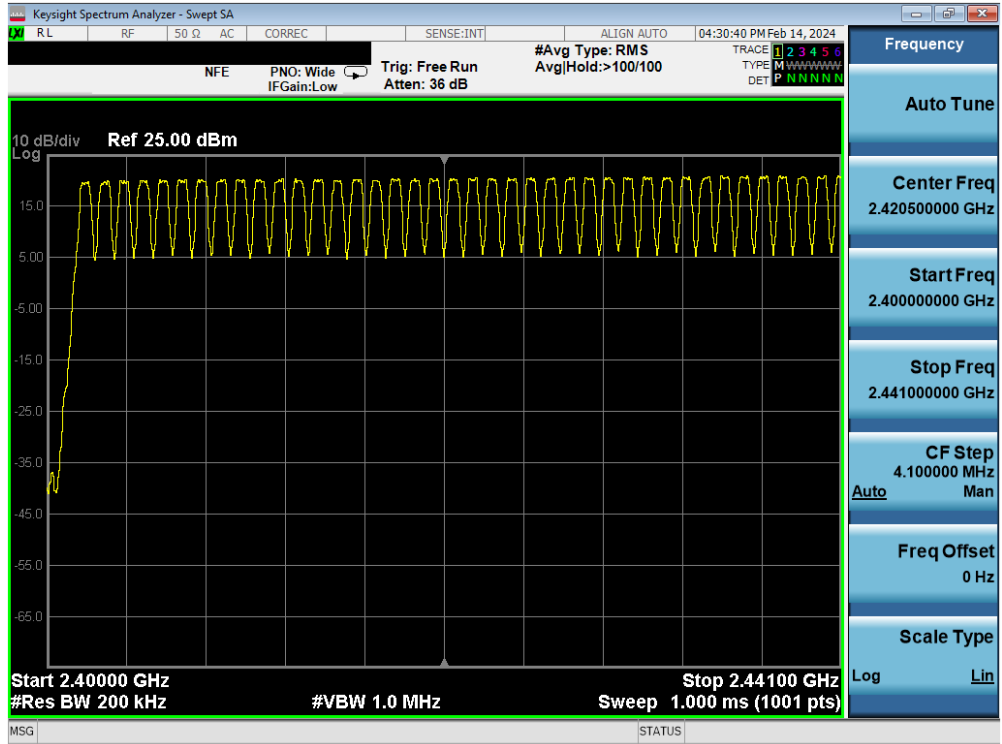


Plot 7-135. Low End Spectrum Channel Hopping Plot (Bluetooth)

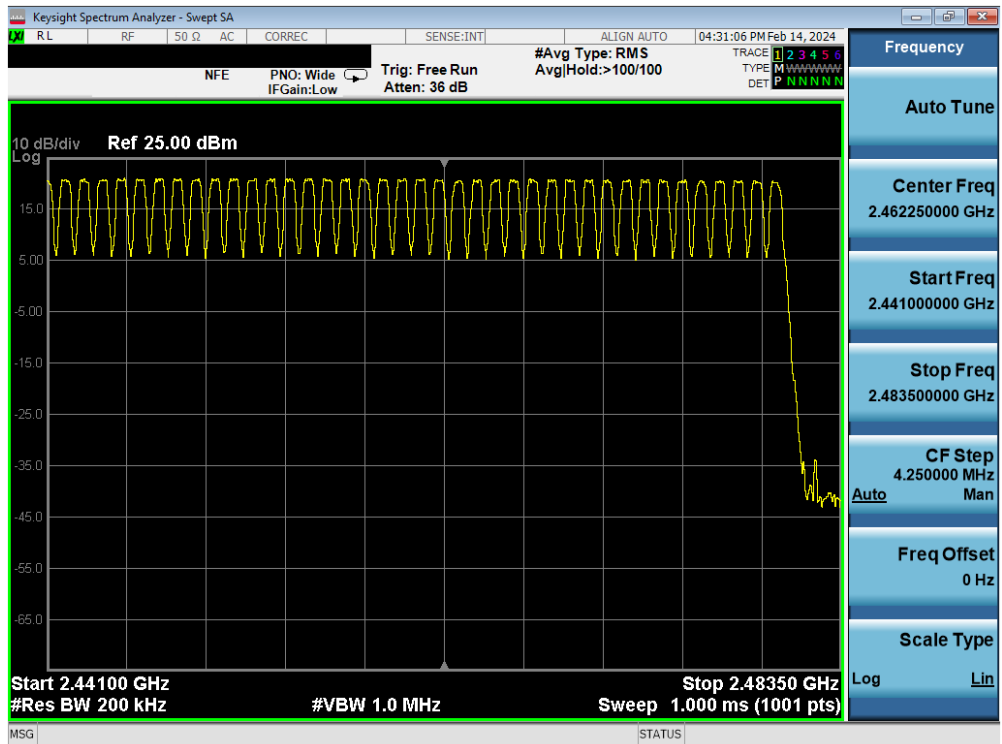


Plot 7-136. High End Spectrum Channel Hopping Plot (Bluetooth)

FCC ID: C3K2077 IC: 3048A-2077	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2312040120-15.C3K	Test Dates: 12/14/2023 - 03/18/2024	EUT Type: Portable Computing Device	Page 94 of 137

DUAL ANT1

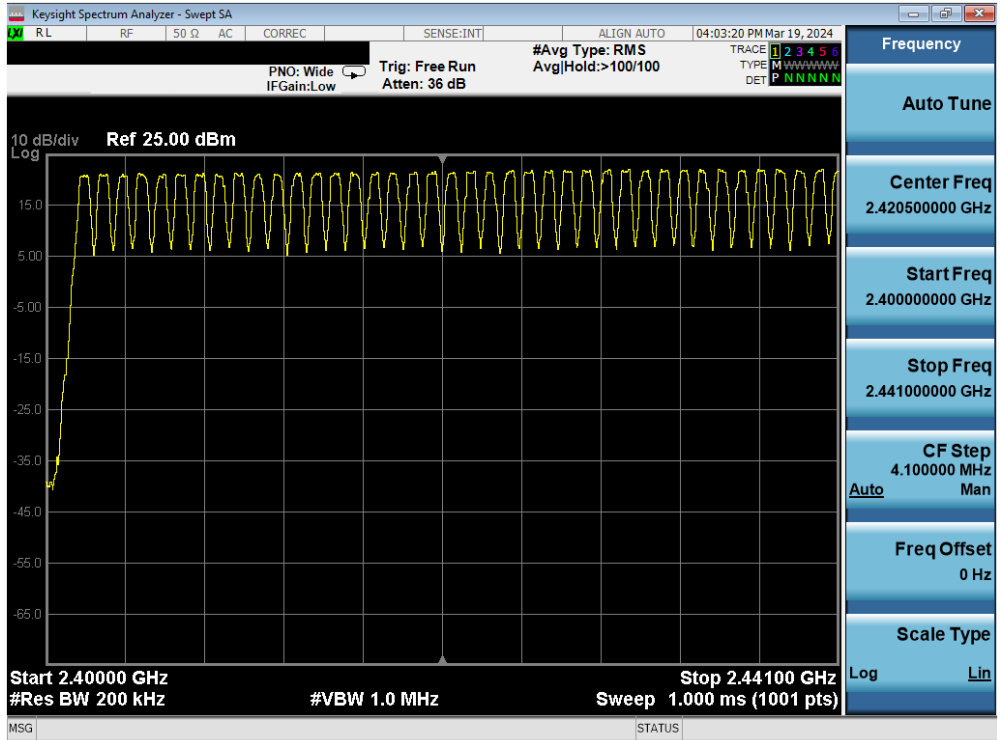


Plot 7-137. Low End Spectrum Channel Hopping Plot (Bluetooth)

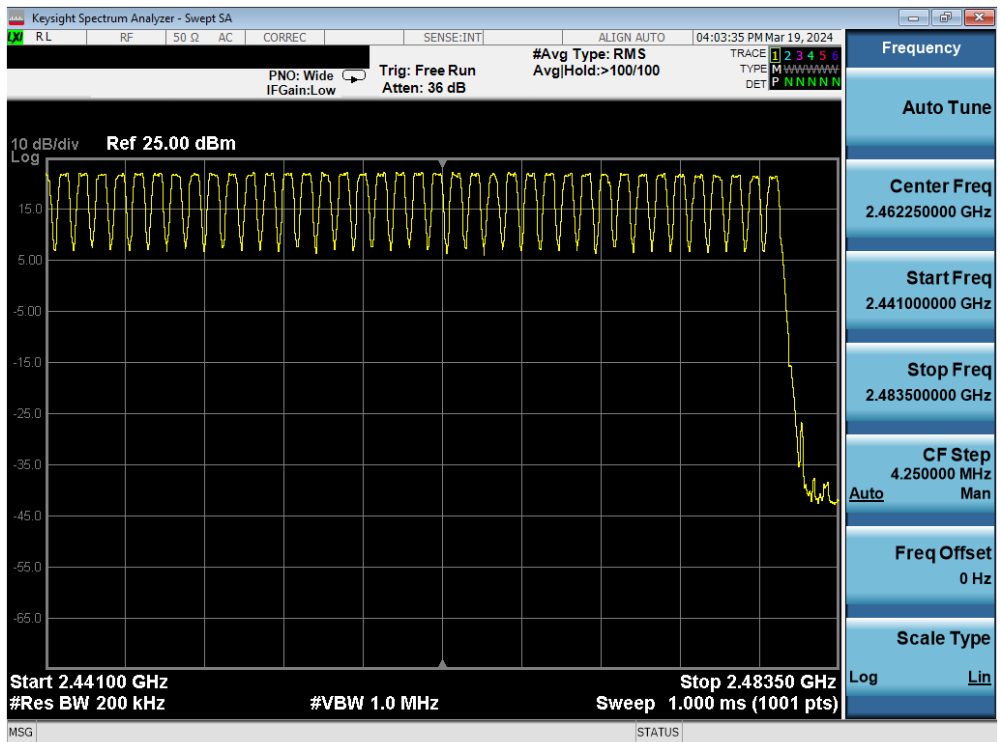


Plot 7-138. High End Spectrum Channel Hopping Plot (Bluetooth)

FCC ID: C3K2077 IC: 3048A-2077		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2312040120-15.C3K	Test Dates: 12/14/2023 - 03/18/2024	EUT Type: Portable Computing Device		Page 95 of 137

DUAL ANT2

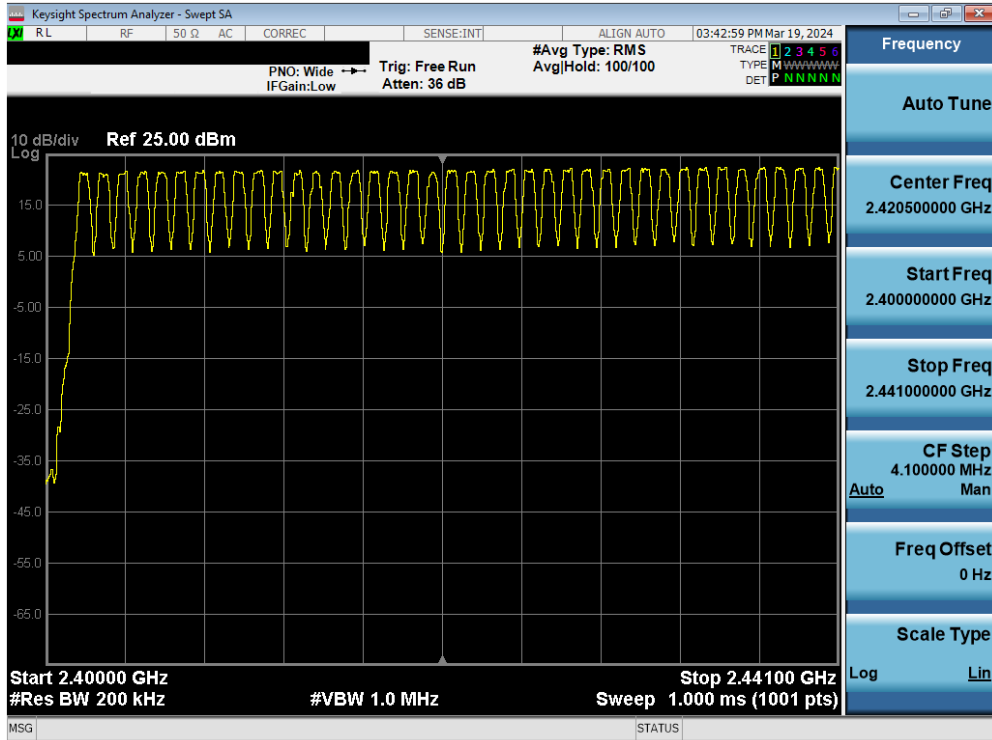

Plot 7-139. Low End Spectrum Channel Hopping Plot (Bluetooth)

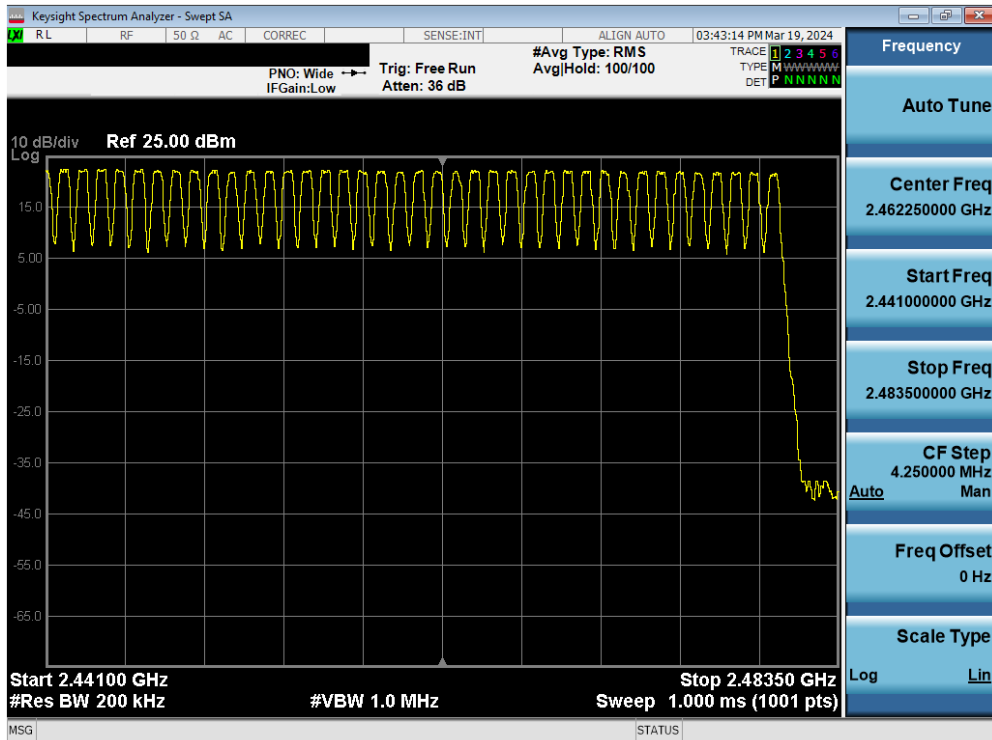

Plot 7-140. High End Spectrum Channel Hopping Plot (Bluetooth)

FCC ID: C3K2077 IC: 3048A-2077	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2312040120-15.C3K	Test Dates: 12/14/2023 - 03/18/2024	EUT Type: Portable Computing Device	Page 96 of 137

7.8 Conducted Spurious Emissions

§15.247 (d); RSS-247 [5.5]

Test Overview and Limit

Conducted out-of-band spurious emissions were investigated from 30MHz up to 25GHz to include the 10th harmonic of the fundamental transmit frequency. **The maximum permissible out-of-band emission level is 20 dBc.**

Test Procedure Used

ANSI C63.10-2013 – Section 7.8.8

Test Settings

1. Start frequency was set to 30MHz and stop frequency was set to 25GHz (separated into two plots per channel)
2. RBW = 1MHz* (See note below)
3. VBW = 3MHz
4. Detector = Peak
5. Trace mode = max hold
6. Sweep time = auto couple
7. The trace was allowed to stabilize

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.




Figure 7-7. Test Instrument & Measurement Setup

Test Notes


Out-of-band conducted spurious emissions were investigated for all data rates and the worst-case emissions were found with the EUT transmitting at 3Mbps. The display line shown in the following plots is the limit at 20dB below the fundamental emission level measured in a 100kHz bandwidth. However, the traces in the following plots are measured with a 1MHz RBW to reduce test time, so the display line may not necessarily appear to be 20dB below the level of the fundamental in a 1MHz bandwidth.

FCC ID: C3K2077 IC: 3048A-2077	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2312040120-15.C3K	Test Dates: 12/14/2023 - 03/18/2024	EUT Type: Portable Computing Device	Page 97 of 137

SISO ANT1

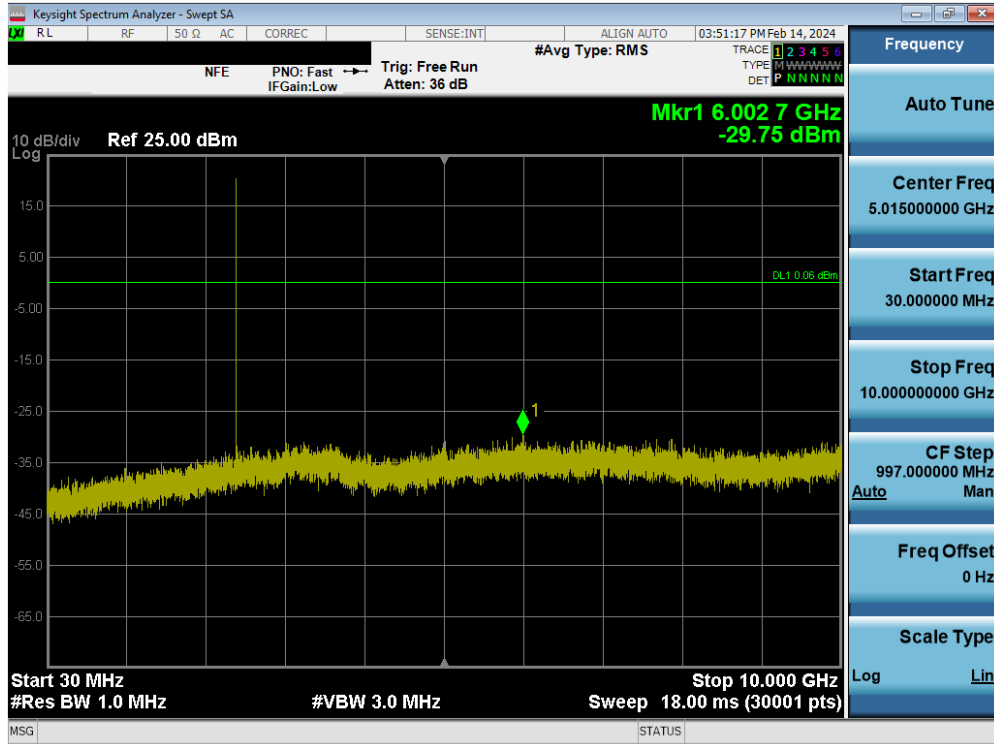


Plot 7-141. Conducted Spurious Plot (Bluetooth, 3Mbps – Ch. 0)

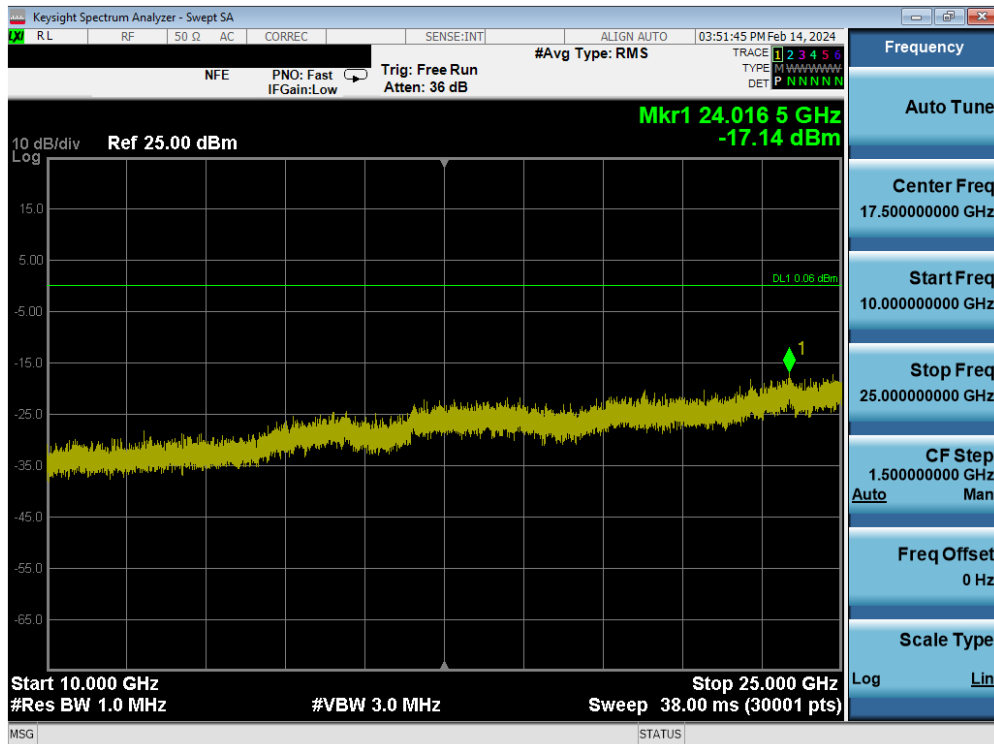


Plot 7-142. Conducted Spurious Plot (Bluetooth, 3Mbps – Ch. 0)

FCC ID: C3K2077 IC: 3048A-2077	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2312040120-15.C3K	Test Dates: 12/14/2023 - 03/18/2024	EUT Type: Portable Computing Device	Page 98 of 137

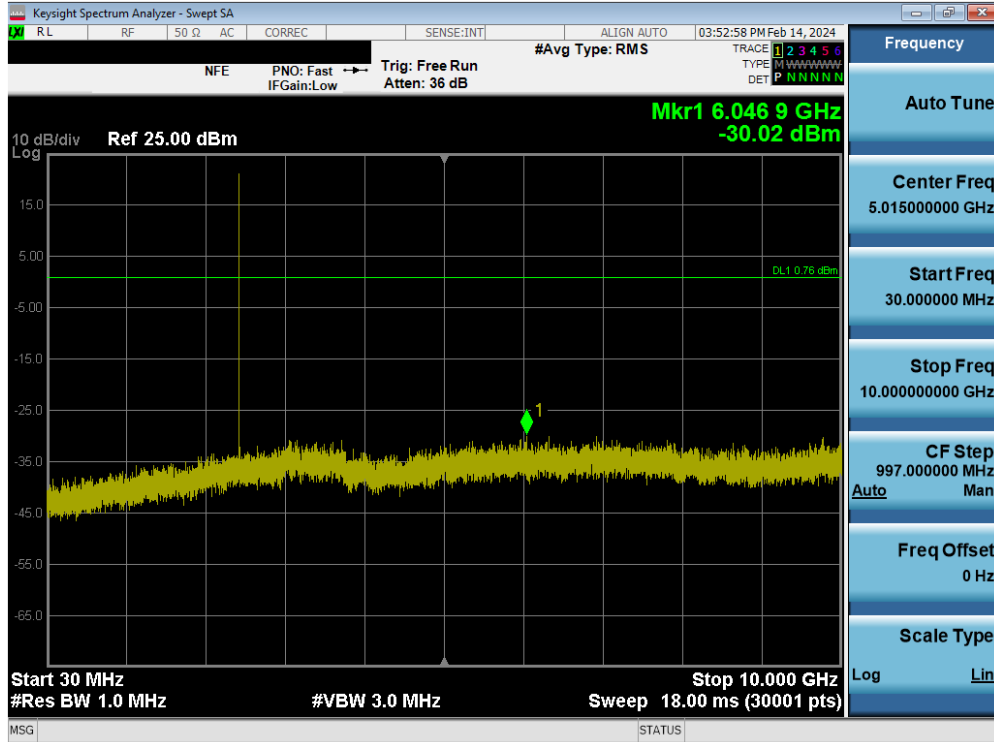


Plot 7-143. Conducted Spurious Plot (Bluetooth, 3Mbps – Ch. 39)

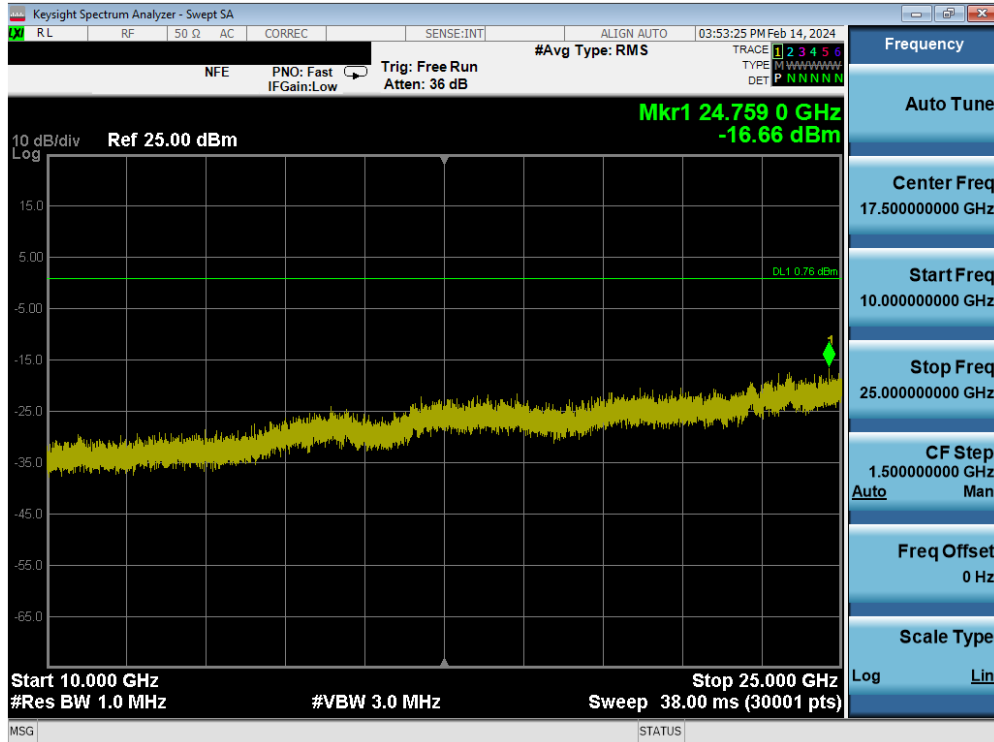


Plot 7-144. Conducted Spurious Plot (Bluetooth, 3Mbps – Ch. 39)

FCC ID: C3K2077 IC: 3048A-2077	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2312040120-15.C3K	Test Dates: 12/14/2023 - 03/18/2024	EUT Type: Portable Computing Device	Page 99 of 137

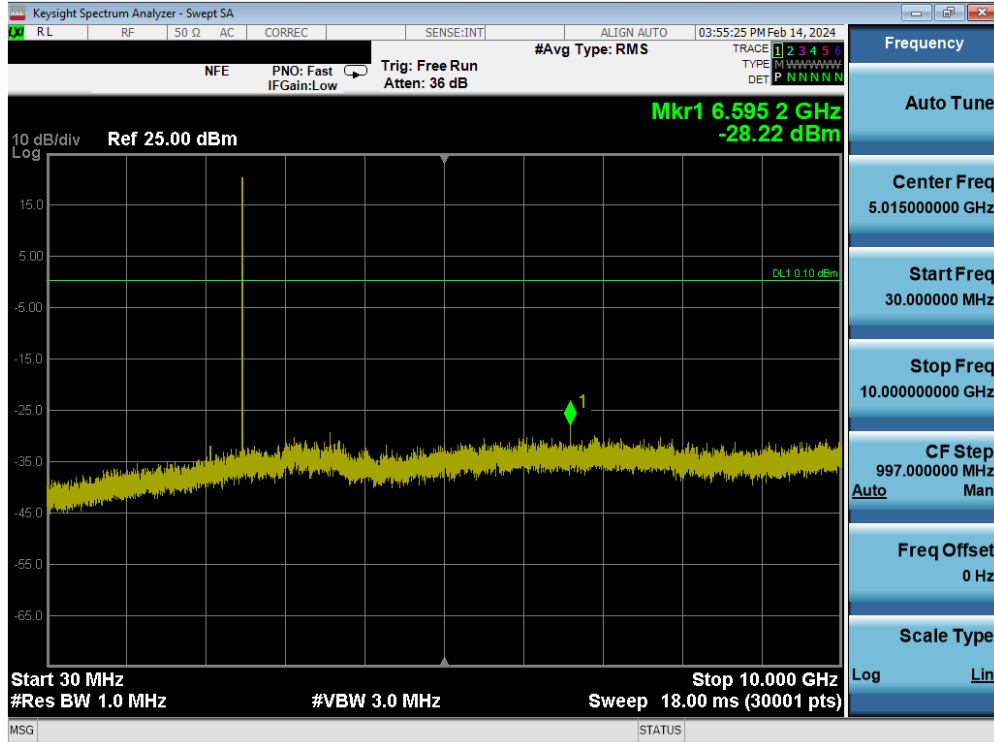


Plot 7-145. Conducted Spurious Plot (Bluetooth, 3Mbps – Ch. 78)

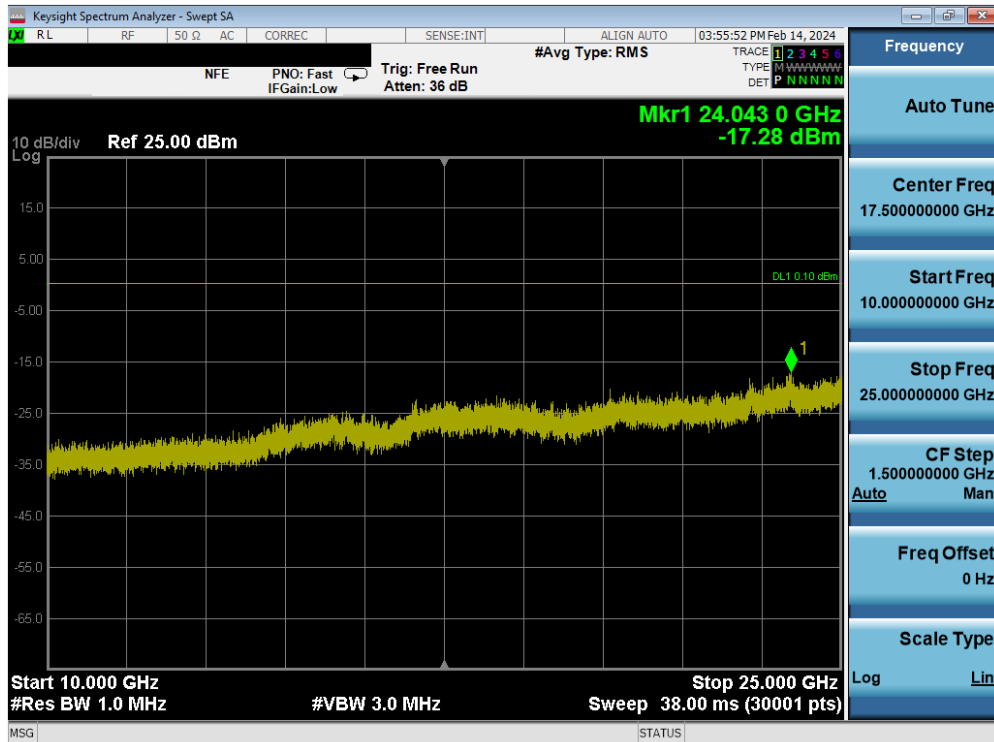

Plot 7-146. Conducted Spurious Plot (Bluetooth, 3Mbps – Ch. 78)

FCC ID: C3K2077 IC: 3048A-2077	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2312040120-15.C3K	Test Dates: 12/14/2023 - 03/18/2024	EUT Type: Portable Computing Device	Page 100 of 137

SISO ANT2

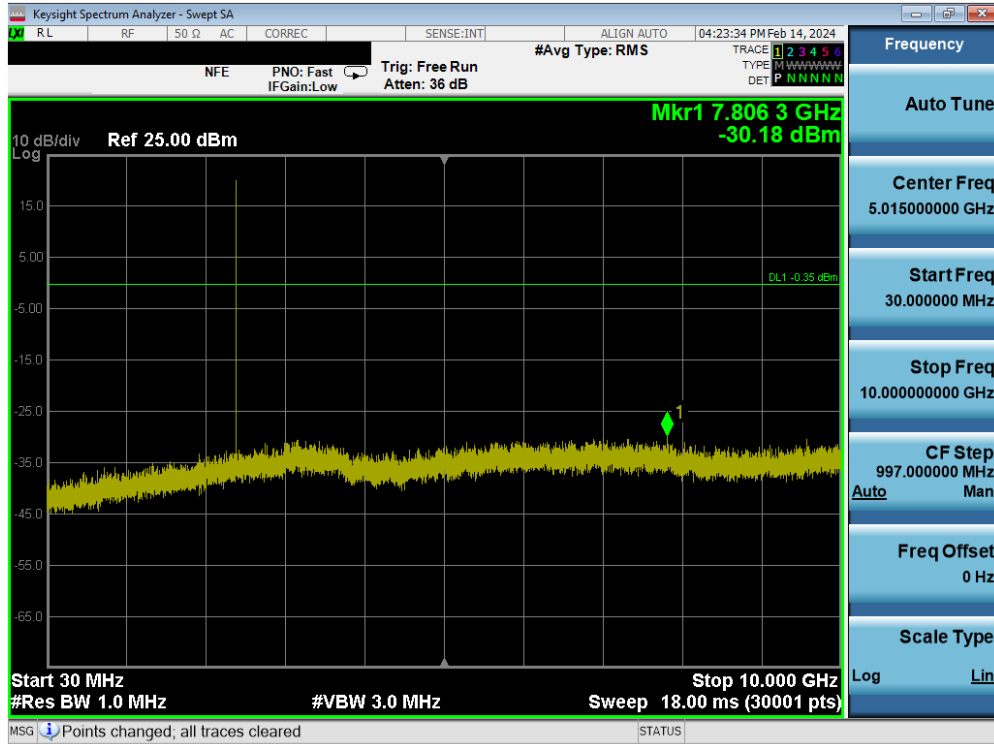


Plot 7-147. Conducted Spurious Plot (Bluetooth, 3Mbps – Ch. 0)




Plot 7-148. Conducted Spurious Plot (Bluetooth, 3Mbps – Ch. 0)

FCC ID: C3K2077 IC: 3048A-2077	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2312040120-15.C3K	Test Dates: 12/14/2023 - 03/18/2024	EUT Type: Portable Computing Device	Page 101 of 137

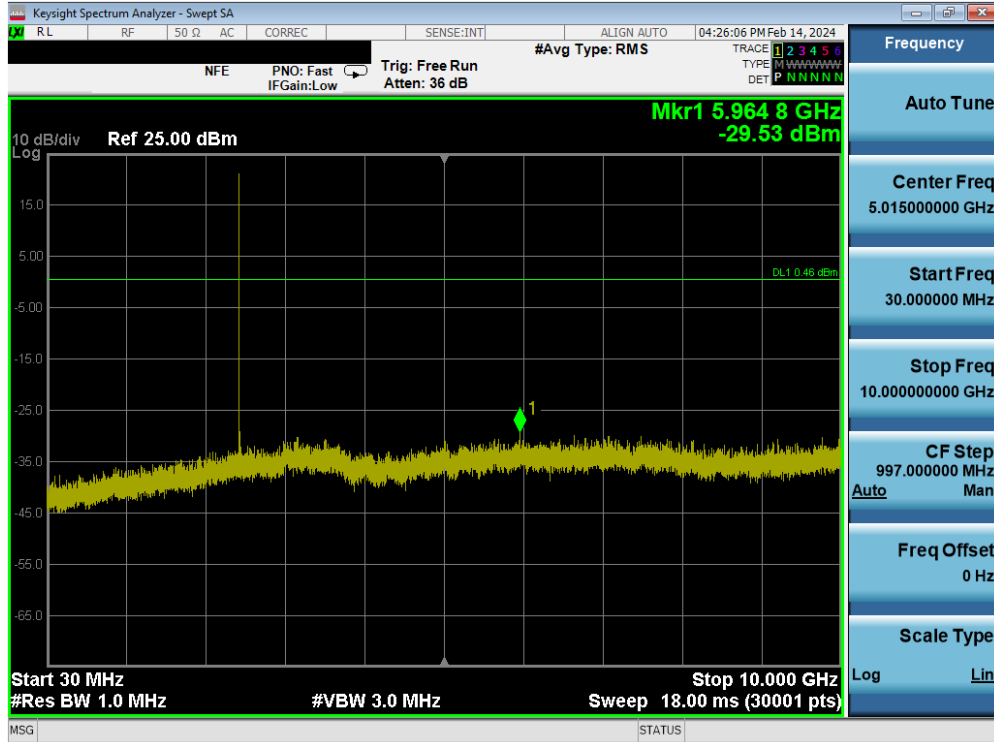


Plot 7-149. Conducted Spurious Plot (Bluetooth, 3Mbps – Ch. 39)

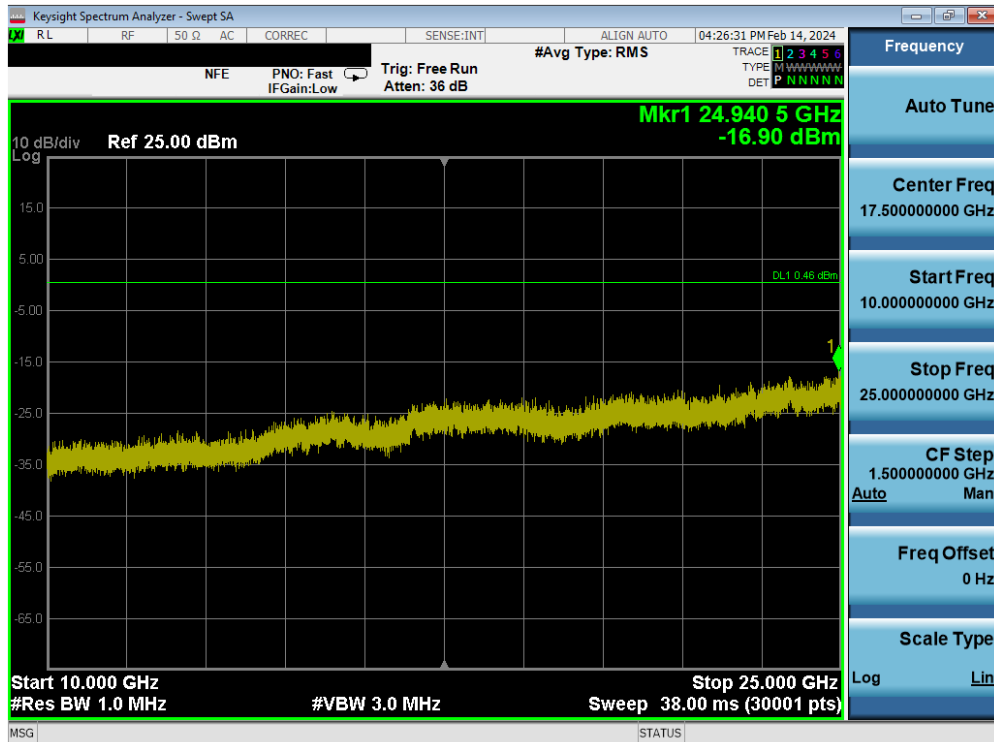


Plot 7-150. Conducted Spurious Plot (Bluetooth, 3Mbps – Ch. 39)

FCC ID: C3K2077 IC: 3048A-2077	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2312040120-15.C3K	Test Dates: 12/14/2023 - 03/18/2024	EUT Type: Portable Computing Device	Page 102 of 137

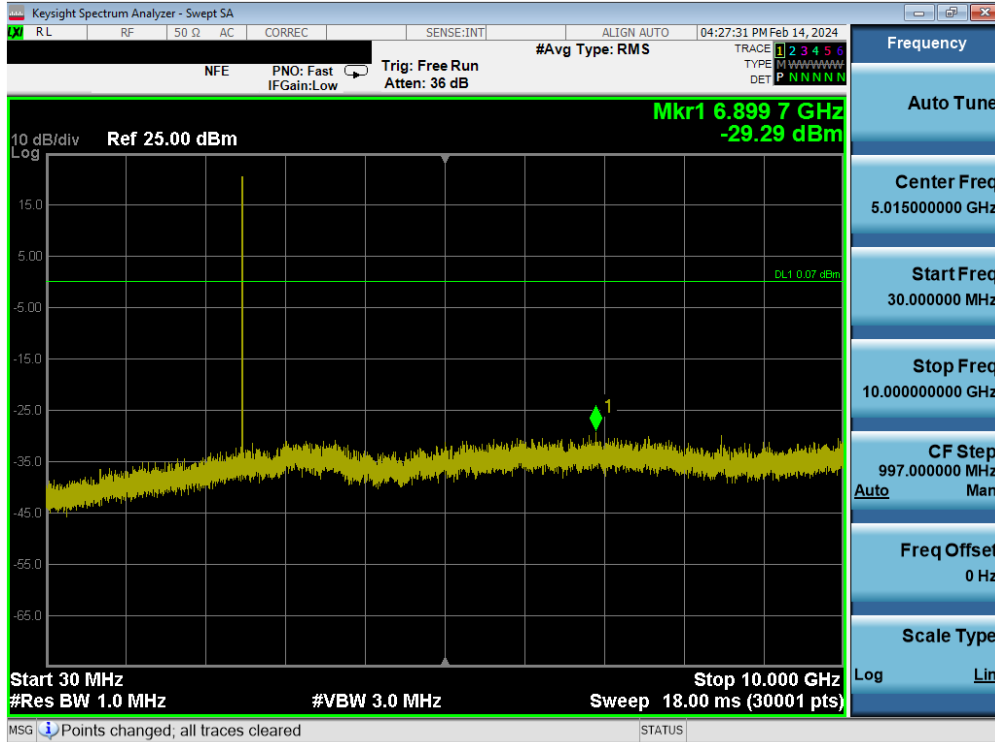


Plot 7-151. Conducted Spurious Plot (Bluetooth, 3Mbps – Ch. 78)

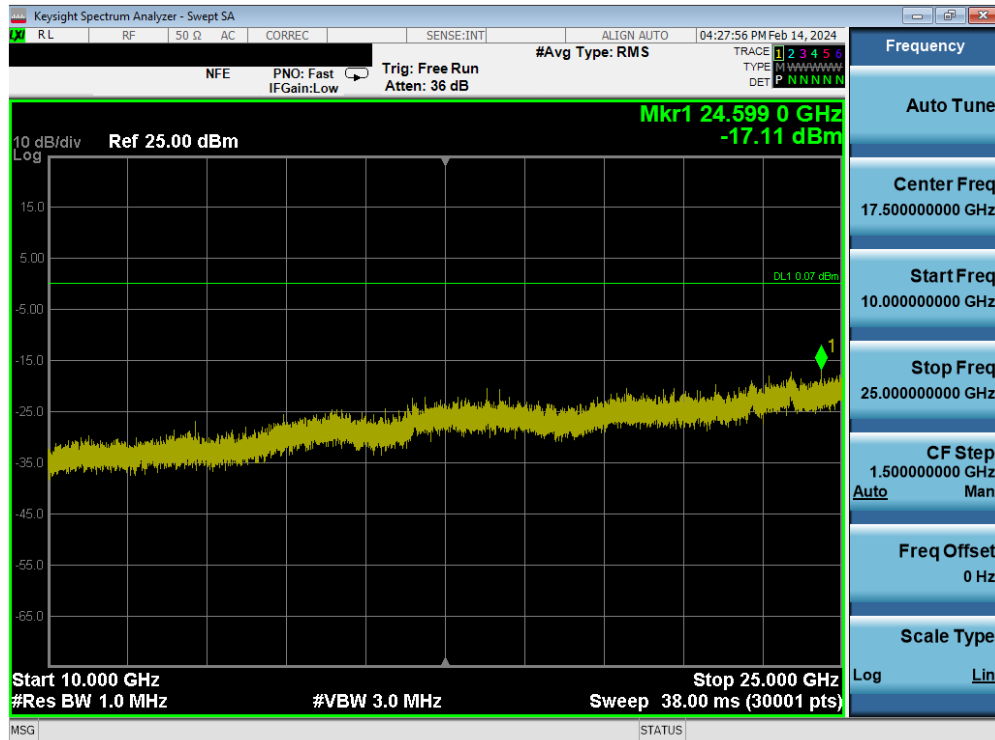


Plot 7-152. Conducted Spurious Plot (Bluetooth, 3Mbps – Ch. 78)

FCC ID: C3K2077 IC: 3048A-2077	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2312040120-15.C3K	Test Dates: 12/14/2023 - 03/18/2024	EUT Type: Portable Computing Device	Page 103 of 137

DUAL ANT1

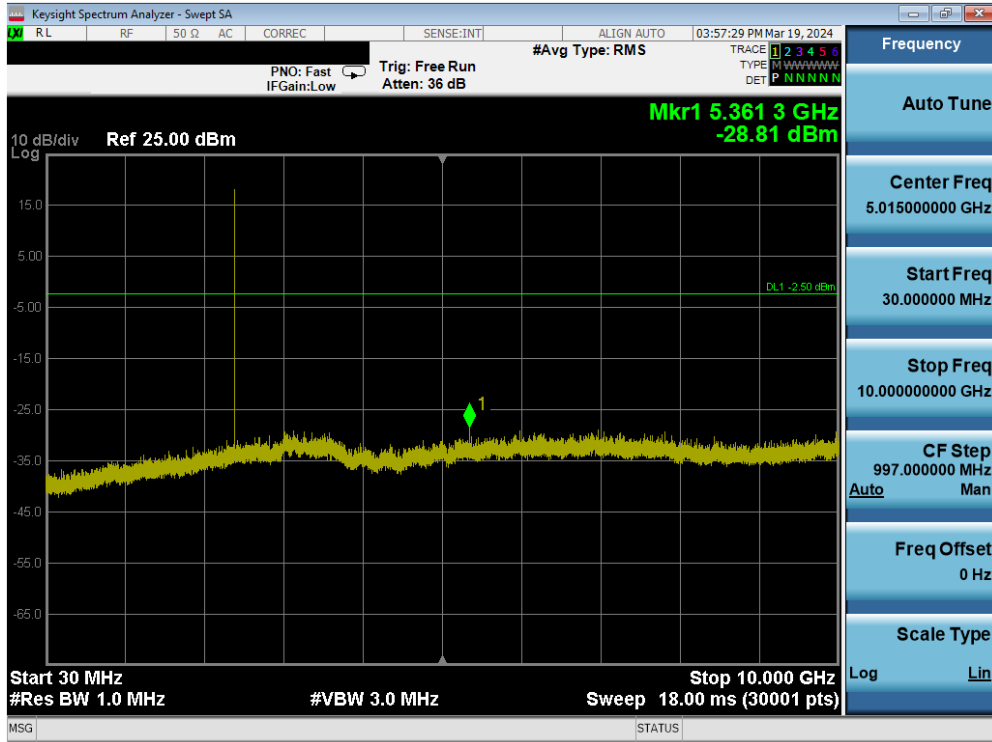


Plot 7-153. Conducted Spurious Plot (Bluetooth, 3Mbps – Ch. 0)

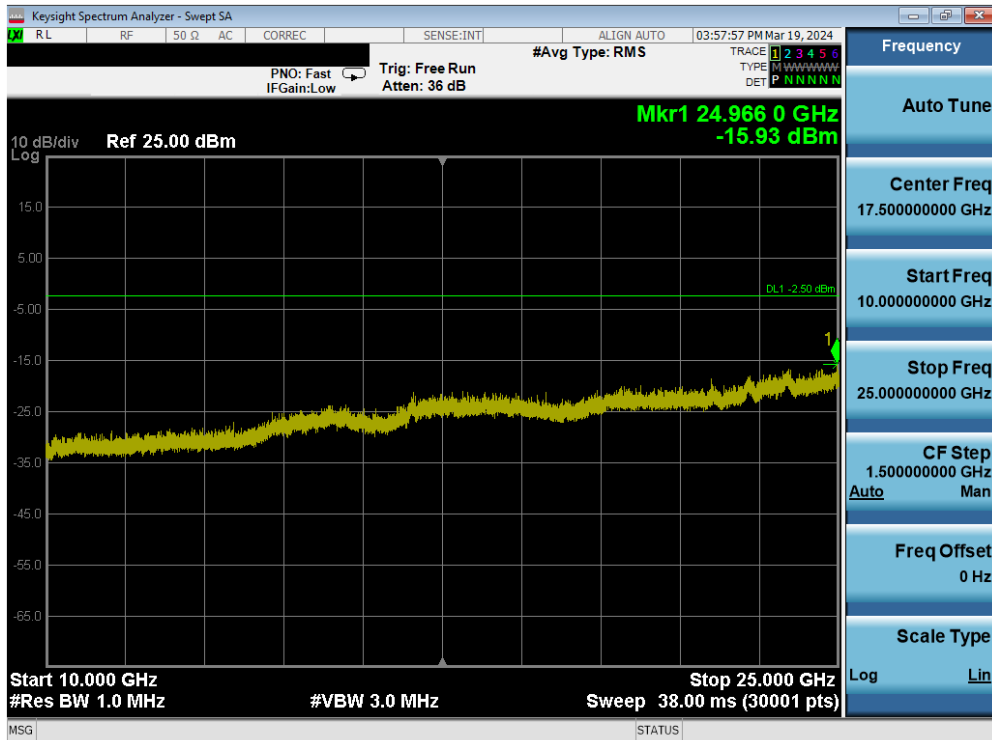


Plot 7-154. Conducted Spurious Plot (Bluetooth, 3Mbps – Ch. 0)

FCC ID: C3K2077 IC: 3048A-2077	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2312040120-15.C3K	Test Dates: 12/14/2023 - 03/18/2024	EUT Type: Portable Computing Device	Page 104 of 137

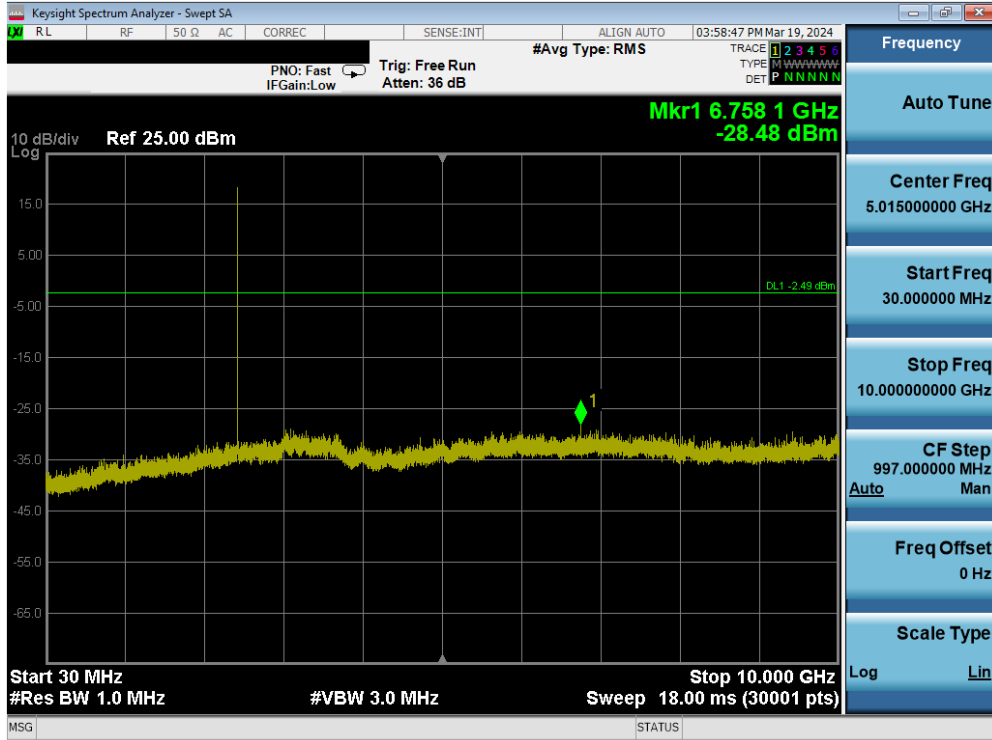


Plot 7-155. Conducted Spurious Plot (Bluetooth, 3Mbps – Ch. 39)

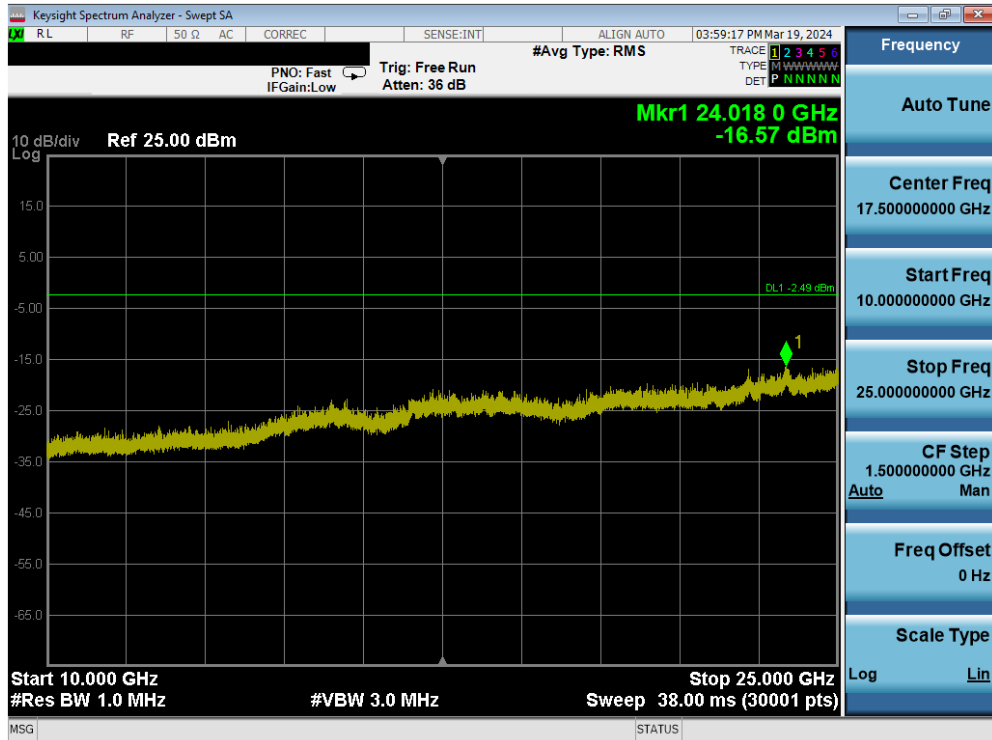


Plot 7-156. Conducted Spurious Plot (Bluetooth, 3Mbps – Ch. 39)

FCC ID: C3K2077 IC: 3048A-2077	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2312040120-15.C3K	Test Dates: 12/14/2023 - 03/18/2024	EUT Type: Portable Computing Device	Page 105 of 137

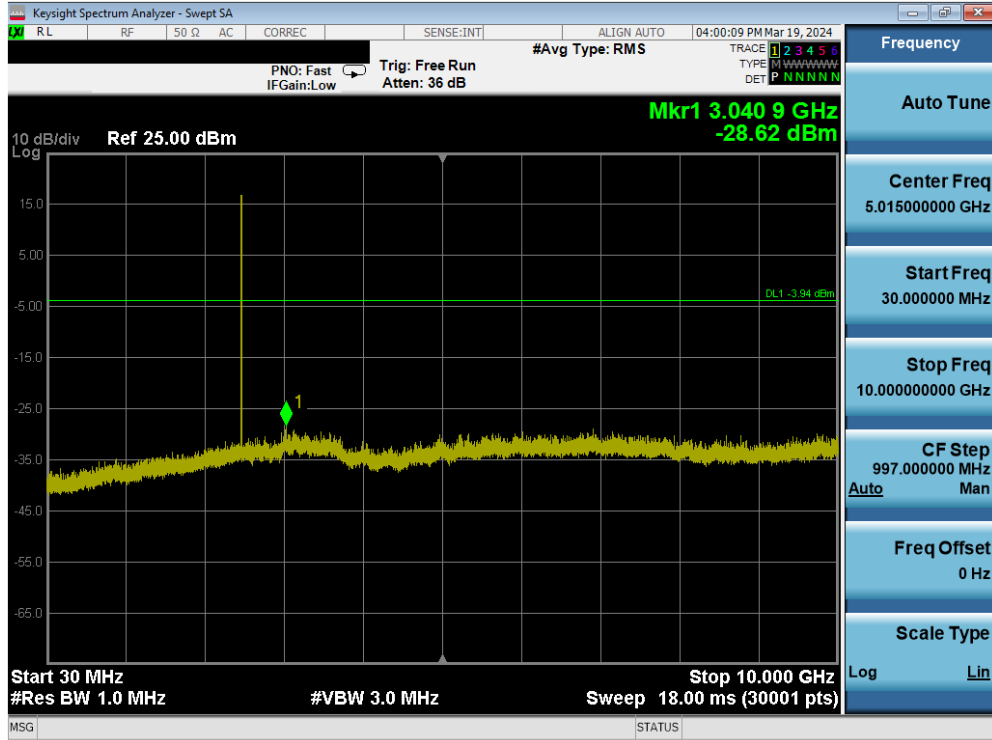


Plot 7-157. Conducted Spurious Plot (Bluetooth, 3Mbps – Ch. 78)

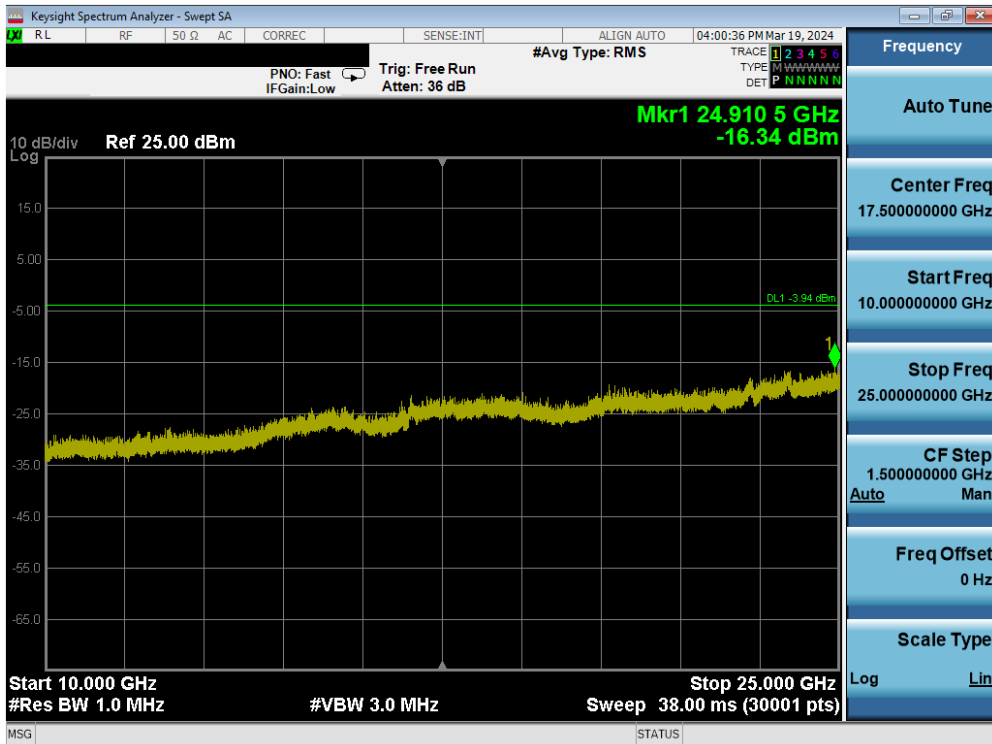


Plot 7-158. Conducted Spurious Plot (Bluetooth, 3Mbps – Ch. 78)

FCC ID: C3K2077 IC: 3048A-2077	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2312040120-15.C3K	Test Dates: 12/14/2023 - 03/18/2024	EUT Type: Portable Computing Device	Page 106 of 137

DUAL ANT2

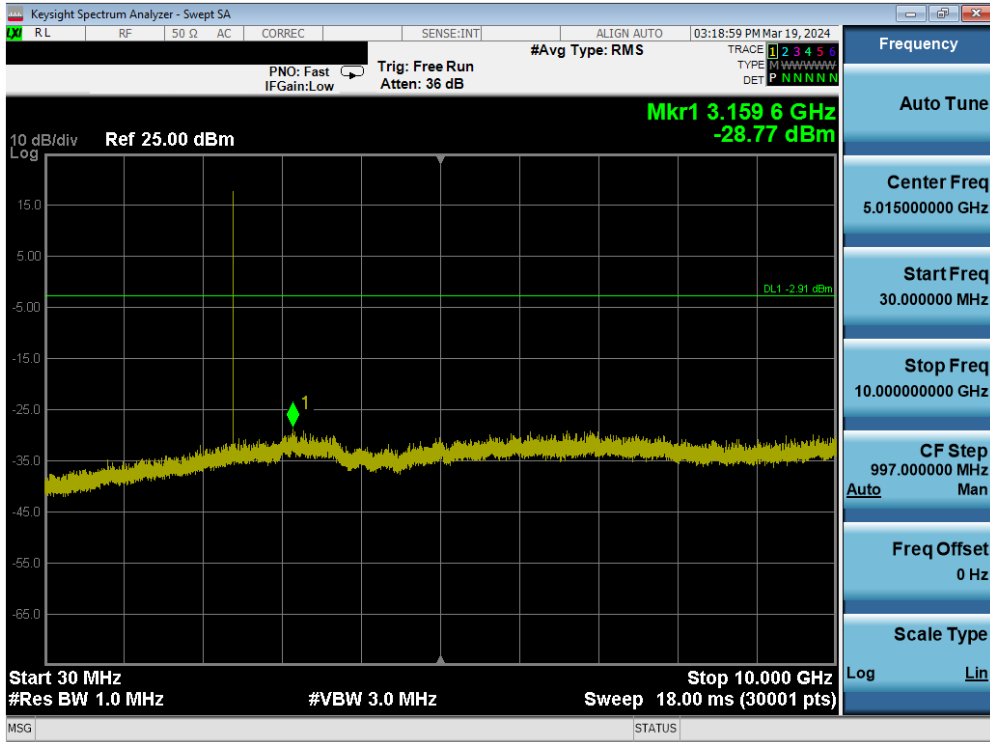


Plot 7-159. Conducted Spurious Plot (Bluetooth, 3Mbps – Ch. 0)

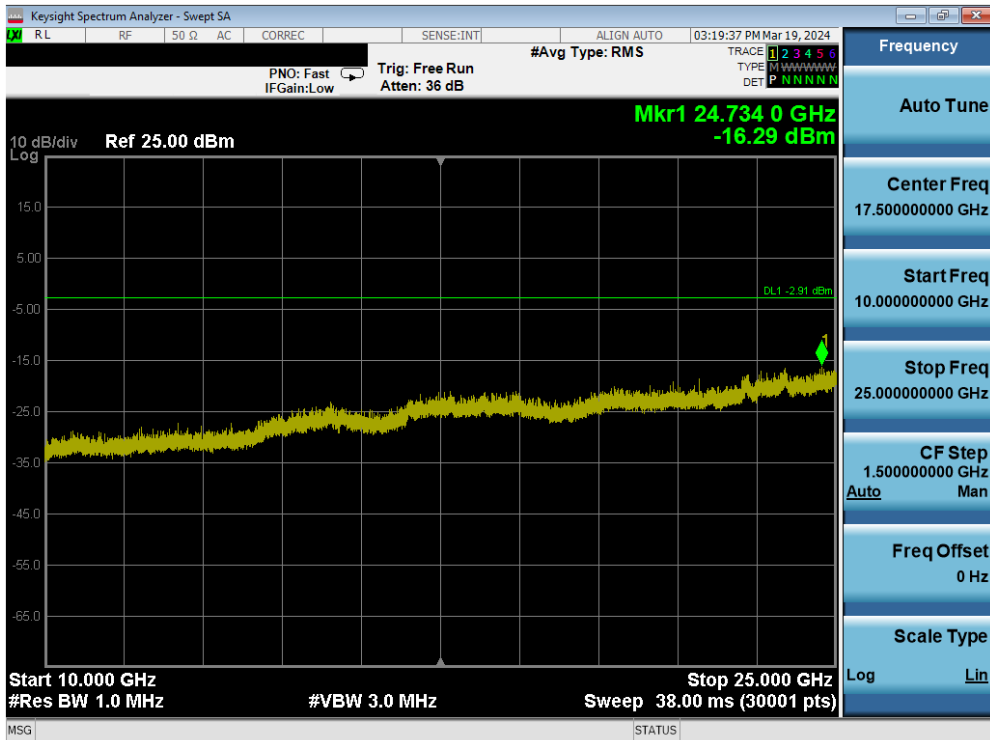


Plot 7-160. Conducted Spurious Plot (Bluetooth, 3Mbps – Ch. 0)

FCC ID: C3K2077 IC: 3048A-2077	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2312040120-15.C3K	Test Dates: 12/14/2023 - 03/18/2024	EUT Type: Portable Computing Device	Page 107 of 137

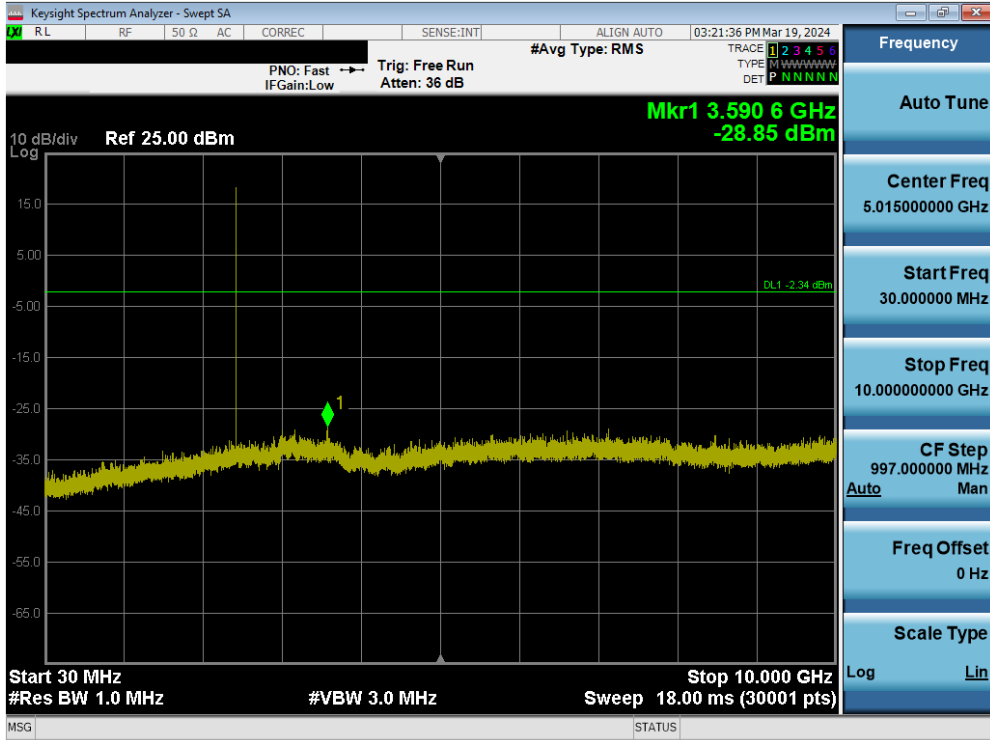


Plot 7-161. Conducted Spurious Plot (Bluetooth, 3Mbps – Ch. 39)

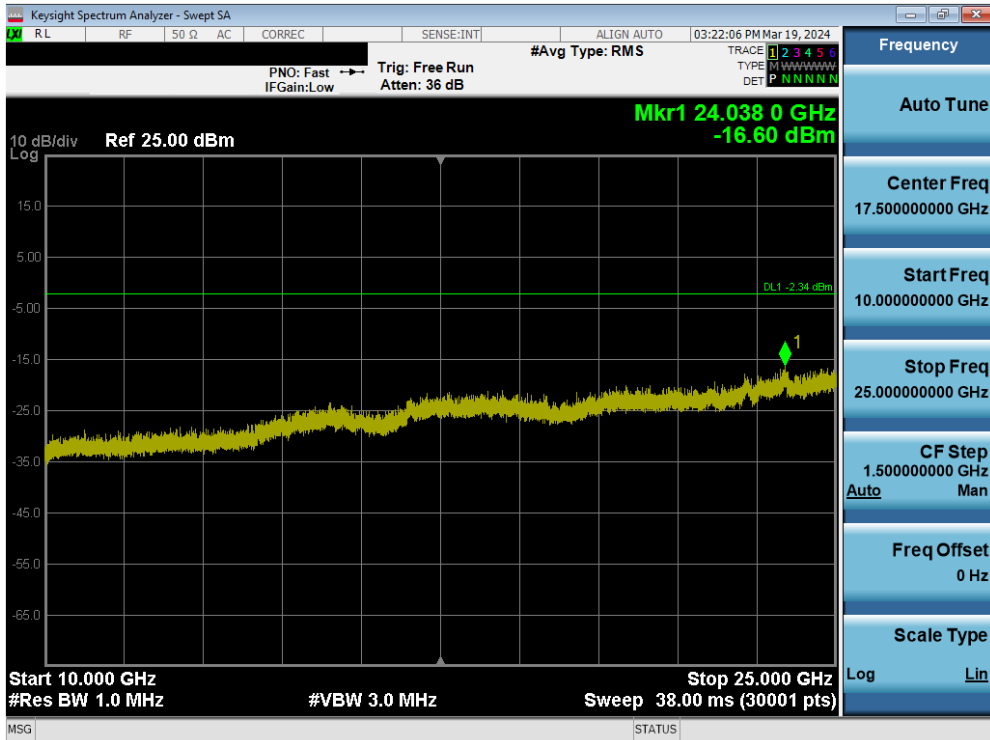


Plot 7-162. Conducted Spurious Plot (Bluetooth, 3Mbps – Ch. 39)

FCC ID: C3K2077 IC: 3048A-2077	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2312040120-15.C3K	Test Dates: 12/14/2023 - 03/18/2024	EUT Type: Portable Computing Device	Page 108 of 137

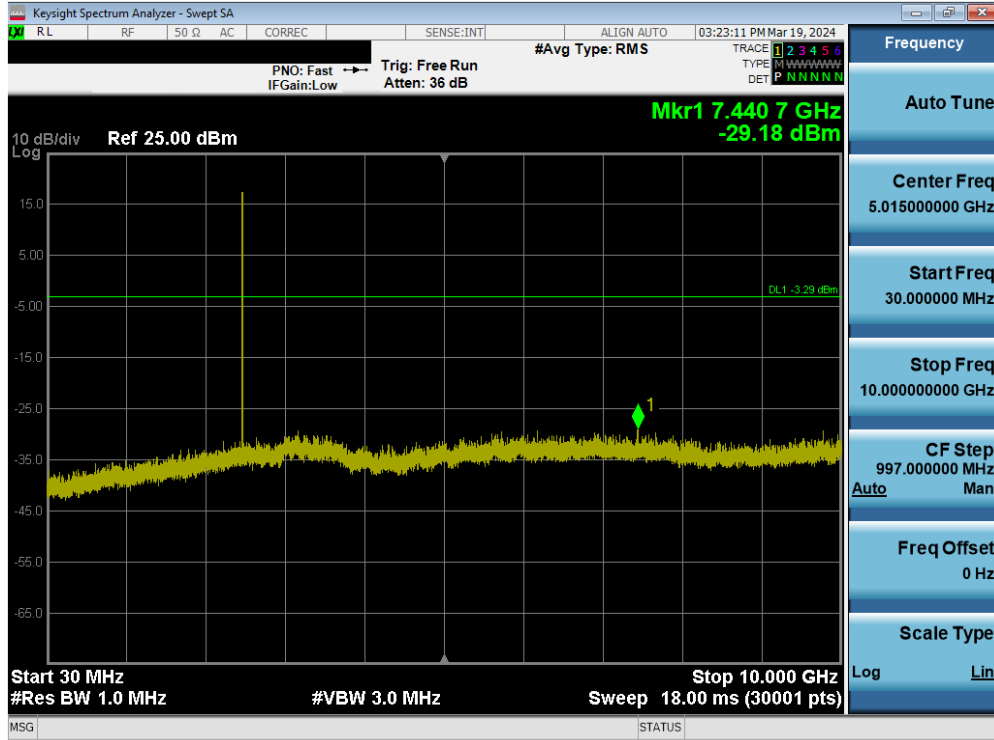

Plot 7-163. Conducted Spurious Plot (Bluetooth, 3Mbps – Ch. 78)

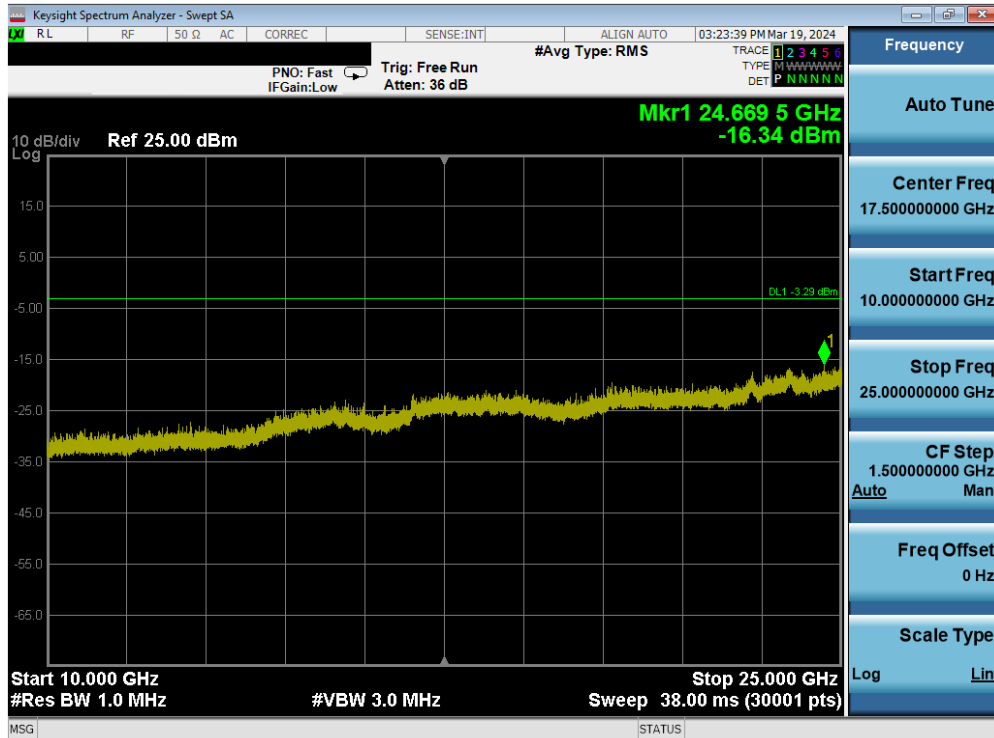

Plot 7-164. Conducted Spurious Plot (Bluetooth, 3Mbps – Ch. 78)

FCC ID: C3K2077 IC: 3048A-2077	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2312040120-15.C3K	Test Dates: 12/14/2023 - 03/18/2024	EUT Type: Portable Computing Device	Page 109 of 137



7.9 Radiated Spurious Emission Measurements – Above 1GHz
§15.205 §15.209 §15.247 (d); RSS-Gen [8.9]

Test Overview and Limit

All out of band radiated spurious emissions are measured with a spectrum analyzer connected to a receive antenna while the EUT is operating at maximum power and at the appropriate frequencies. Only the radiated emissions of the configuration that produced the worst-case emissions are reported in this section.

All out of band emissions appearing in a restricted band as specified in Section 15.205 of the Title 47 CFR and Table 6 of RSS-Gen (8.10) must not exceed the limits shown below per Section 15.209 and RSS-Gen (8.9).

Frequency	Field Strength [$\mu\text{V/m}$]	Measured Distance [Meters]
Above 960.0 MHz	500	3

Table 7-13. Radiated Limits

Test Procedure Used

ANSI C63.10-2013 – Section 6.6.4.3

Test Settings

Average Field Strength Measurements per Section 4.1.4.2.3 of ANSI C63.10-2013

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW = 1kHz $\geq 1/\tau$ Hz, where τ = pulse width in seconds
4. Averaging type was set to RMS to ensure that video filtering was applied in the power domain
5. Detector = peak
6. Sweep time = auto
7. Trace mode = max hold
8. Trace was allowed to stabilize

Peak Field Strength Measurements per Section 4.1.4.2.2 of ANSI C63.10-2013

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW is set depending on measurement frequency, as specified in Table 7-14 below
3. VBW = 3MHz
4. Detector = peak
5. Sweep time = auto couple
6. Trace mode = max hold
7. Trace was allowed to stabilize

FCC ID: C3K2077 IC: 3048A-2077	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2312040120-15.C3K	Test Dates: 12/14/2023 - 03/18/2024	EUT Type: Portable Computing Device	Page 110 of 137

Frequency	RBW
9 – 150kHz	200 – 300Hz
0.15 – 30MHz	9 – 10kHz
30 – 1000MHz	100 – 120kHz
> 1000MHz	1MHz

Table 7-14. RBW as a Function of Frequency

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

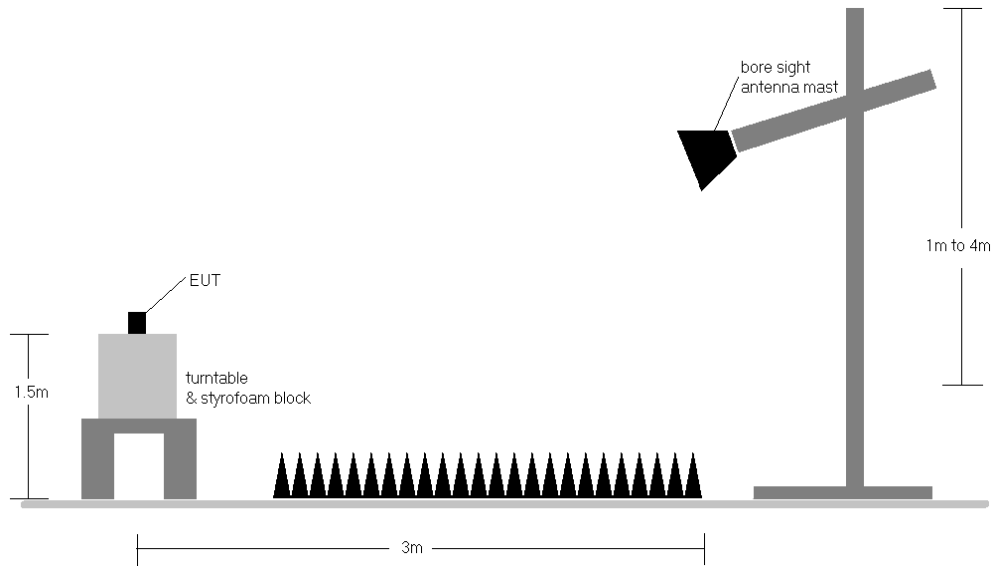


Figure 7-8. Radiated Test Setup >1GHz

Test Notes

- All emissions lying in restricted bands specified in §15.205 and Section 8.10 of RSS-Gen are below the limit shown in §15.209.
- No significant radiated emissions were found in the 2310 - 2390MHz restricted band.
- The antenna is manipulated through typical positions, polarity, and length during the tests. The EUT is manipulated through three orthogonal planes.
- This unit was tested with its standard battery.
- The spectrum is measured from 9kHz to the 10th harmonic and the worst-case emissions are reported.
- The duty cycle correction factor was not applied to noise floor measurements.
- The wide spectrum spurious emissions plots shown on the following pages are used only for the purpose of emission identification. Any emissions found to be within 20dB of the limit are fully investigated and the results are shown in this section.
- The "-" shown in the following RSE tables is used to denote a noise floor measurement.

FCC ID: C3K2077 IC: 3048A-2077	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2312040120-15.C3K	Test Dates: 12/14/2023 - 03/18/2024	EUT Type: Portable Computing Device	Page 111 of 137

Sample Calculation

- Field Strength Level $_{[dB_{\mu V/m}]} = \text{Analyzer Level }_{[dBm]} + 107 + \text{AFCL }_{[dB/m]} + \text{Duty Cycle Correction }_{[dB]}$
- $\text{AFCL }_{[dB/m]} = \text{Antenna Factor }_{[dB/m]} + \text{Cable Loss }_{[dB]}$
- $\text{Margin }_{[dB]} = \text{Field Strength Level }_{[dB_{\mu V/m}]} - \text{Limit }_{[dB_{\mu V/m}]}$

Duty Cycle Correction Factor Calculation


- Channel hop rate = 800 hops/second (AFH Mode)
- Adjusted channel hop rate for DH5 mode = 133.33 hops/second
- Time per channel hop = $1 / 133.33 \text{ hops/second} = 7.50 \text{ ms}$
- Time to cycle through all channels = $7.50 \times 20 \text{ channels} = 150 \text{ ms}$
- Number of times transmitter hits on one channel = $100 \text{ ms} / 150 \text{ ms} = 1 \text{ time(s)}$
- Worst case dwell time = 7.5 ms
- Duty cycle correction factor = $20\log_{10}(7.5\text{ms}/100\text{ms}) = -22.5 \text{ dB}$

FCC ID: C3K2077 IC: 3048A-2077	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2312040120-15.C3K	Test Dates: 12/14/2023 - 03/18/2024	EUT Type: Portable Computing Device	Page 112 of 137




Radiated Spurious Emission Measurements
§15.205 §15.209 §15.247 (d); RSS-Gen [8.9]


SISO ANT1

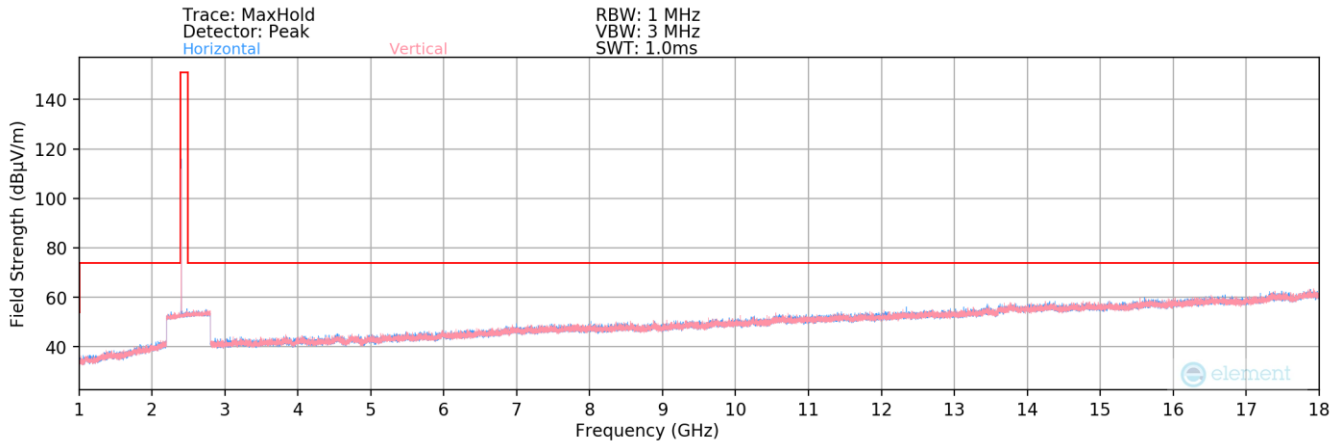

Plot 7-165. Radiated Spurious Plot above 1GHz (BT – Ch. 0)

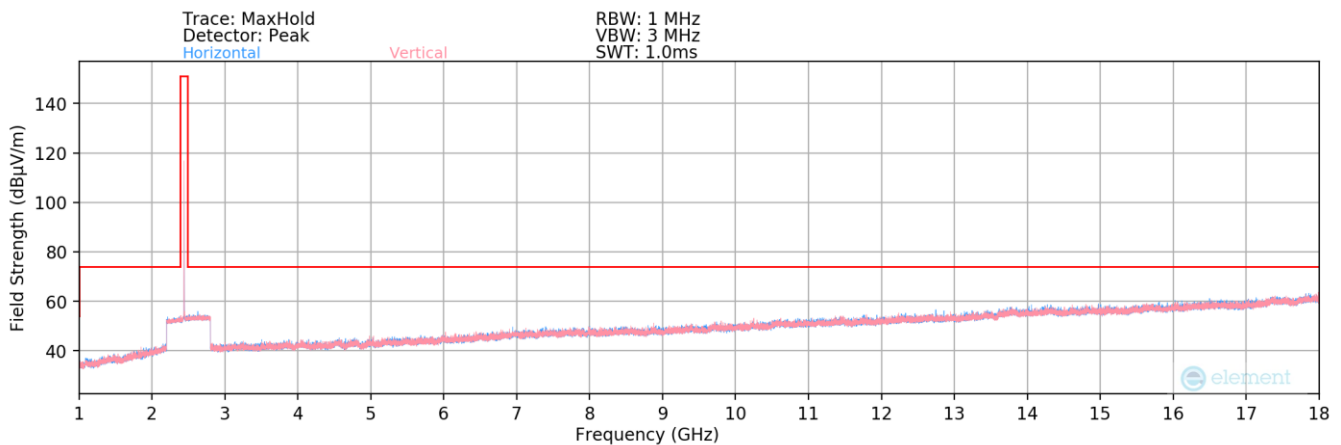

Plot 7-166. Radiated Spurious Plot above 1GHz (BT – Ch. 39)

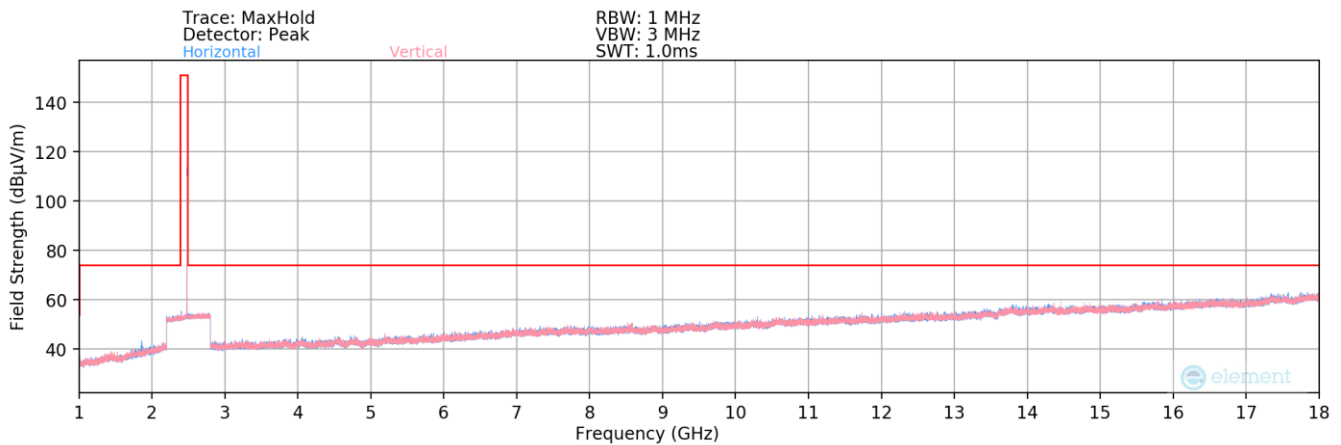


Plot 7-167. Radiated Spurious Plot above 1GHz (BT – Ch. 78)

FCC ID: C3K2077 IC: 3048A-2077		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2312040120-15.C3K	Test Dates: 12/14/2023 - 03/18/2024	EUT Type: Portable Computing Device		Page 113 of 137

Radiated Spurious Emissions Measurements (Above 18GHz)
 §15.209; RSS-Gen [8.9]

SISO ANT1

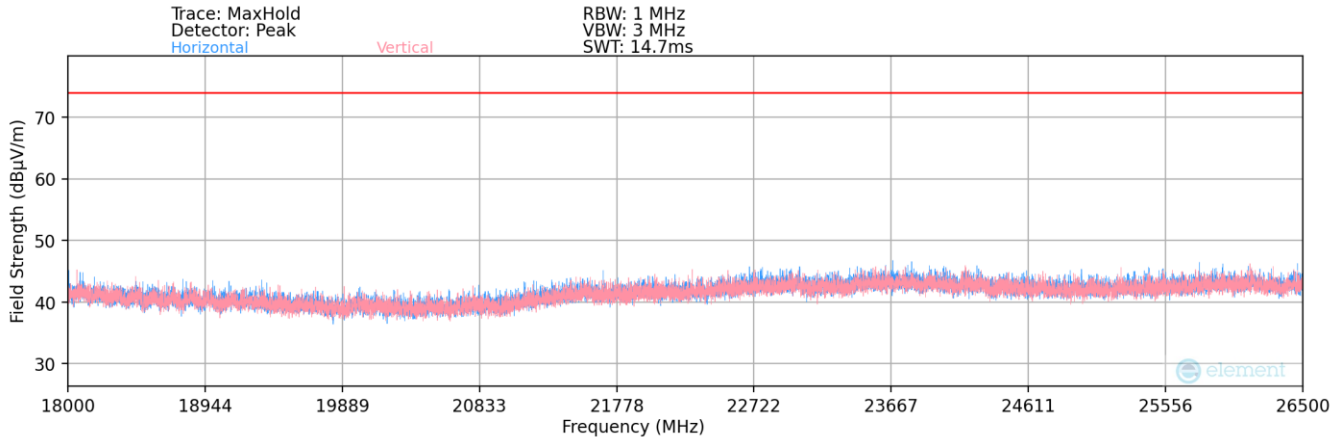

Plot 7-168. Radiated Spurious Plot above 18GHz

FCC ID: C3K2077 IC: 3048A-2077	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2312040120-15.C3K	Test Dates: 12/14/2023 - 03/18/2024	EUT Type: Portable Computing Device	Page 114 of 137



Radiated Spurious Emission Measurements
 §15.205 §15.209 §15.247 (d); RSS-Gen [8.9]

SISO ANT1

Worst Case Mode: Bluetooth
 Worst Case Data Rate: 1 Mbps
 Measurement Distance: 3 Meters
 Operating Frequency: 2402MHz
 Channel: 0

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Duty Cycle Correction [dB]	Field Strength [dBµV/m]	Limit [dBµV/m]	Margin [dB]
4804.00	Avg	H	135	190	-77.90	7.36	-22.50	13.96	53.98	-40.01
4804.00	Peak	H	135	190	-68.43	7.36	0.00	45.93	73.98	-28.05
12010.00	Avg	H	-	-	-82.74	19.05	0.00	43.31	53.98	-10.67
12010.00	Peak	H	-	-	-71.26	19.05	0.00	54.79	73.98	-19.19

Table 7-15. Radiated Measurements

Worst Case Mode: Bluetooth
 Worst Case Data Rate: 1 Mbps
 Measurement Distance: 3 Meters
 Operating Frequency: 2441MHz
 Channel: 39

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Duty Cycle Correction [dB]	Field Strength [dBµV/m]	Limit [dBµV/m]	Margin [dB]
4882.00	Avg	H	143	29	-78.06	7.68	-22.50	14.12	53.98	-39.86
4882.00	Peak	H	143	29	-68.24	7.68	0.00	46.44	73.98	-27.54
7323.00	Avg	H	143	31	-79.55	13.02	-22.50	17.97	53.98	-36.01
7323.00	Peak	H	143	31	-69.34	13.02	0.00	50.68	73.98	-23.30
12205.00	Avg	H	-	-	-85.92	19.48	0.00	40.56	53.98	-13.42
12205.00	Peak	H	-	-	-72.04	19.48	0.00	54.44	73.98	-19.54

Table 7-16. Radiated Measurements

FCC ID: C3K2077 IC: 3048A-2077	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2312040120-15.C3K	Test Dates: 12/14/2023 - 03/18/2024	EUT Type: Portable Computing Device	Page 115 of 137



Worst Case Mode: Bluetooth
 Worst Case Data Rate: 1 Mbps
 Measurement Distance: 3 Meters
 Operating Frequency: 2480MHz
 Channel: 78

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Duty Cycle Correction [dB]	Field Strength [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]
4960.00	Avg	H	137	129	-77.68	7.13	-22.50	13.96	53.98	-40.02
4960.00	Peak	H	137	129	-67.56	7.13	0.00	46.57	73.98	-27.41
7440.00	Avg	H	152	120	-80.59	12.58	-22.50	16.49	53.98	-37.49
7440.00	Peak	H	152	120	-70.21	12.58	0.00	49.37	73.98	-24.61
12400.00	Avg	H	-	-	-82.47	19.40	0.00	43.93	53.98	-10.04
12400.00	Peak	H	-	-	-71.62	19.40	0.00	54.78	73.98	-19.19


Table 7-17. Radiated Measurements

FCC ID: C3K2077 IC: 3048A-2077	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2312040120-15.C3K	Test Dates: 12/14/2023 - 03/18/2024	EUT Type: Portable Computing Device	Page 116 of 137


Radiated Spurious Emission Measurements

§15.205 §15.209 §15.247 (d); RSS-Gen [8.9]


SISO ANT2

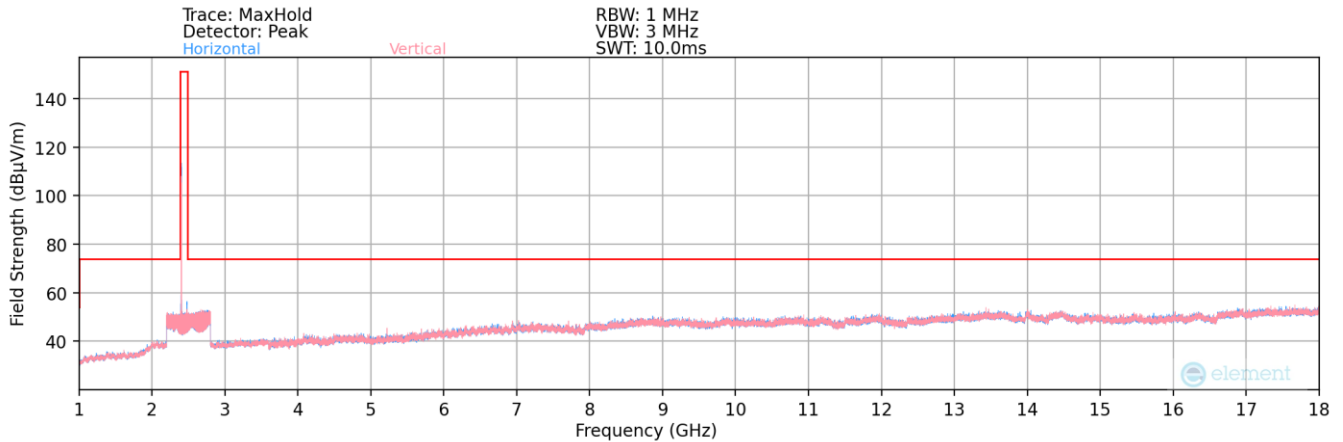

Plot 7-169. Radiated Spurious Plot above 1GHz (BT – Ch. 0)

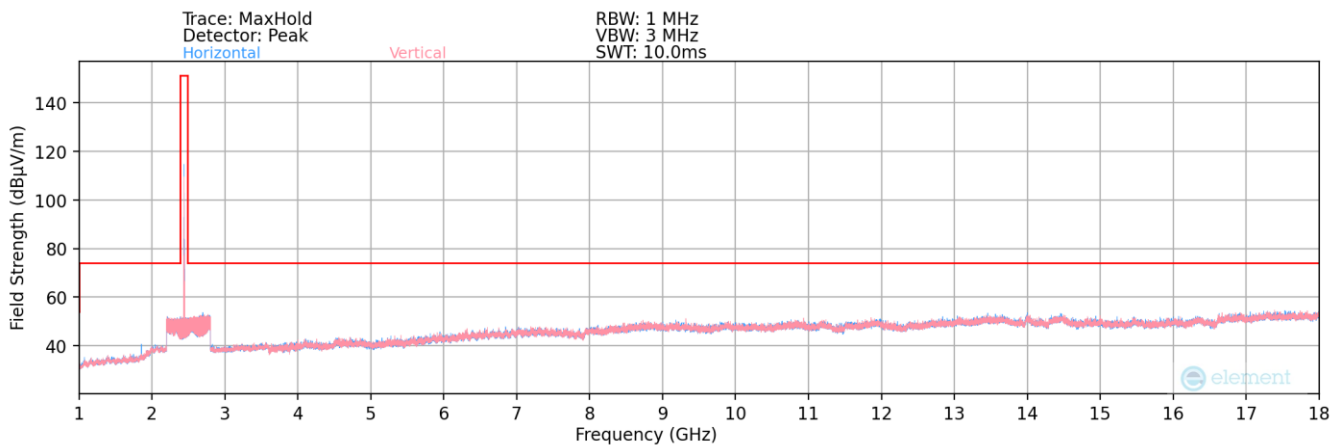

Plot 7-170. Radiated Spurious Plot above 1GHz (BT – Ch. 39)

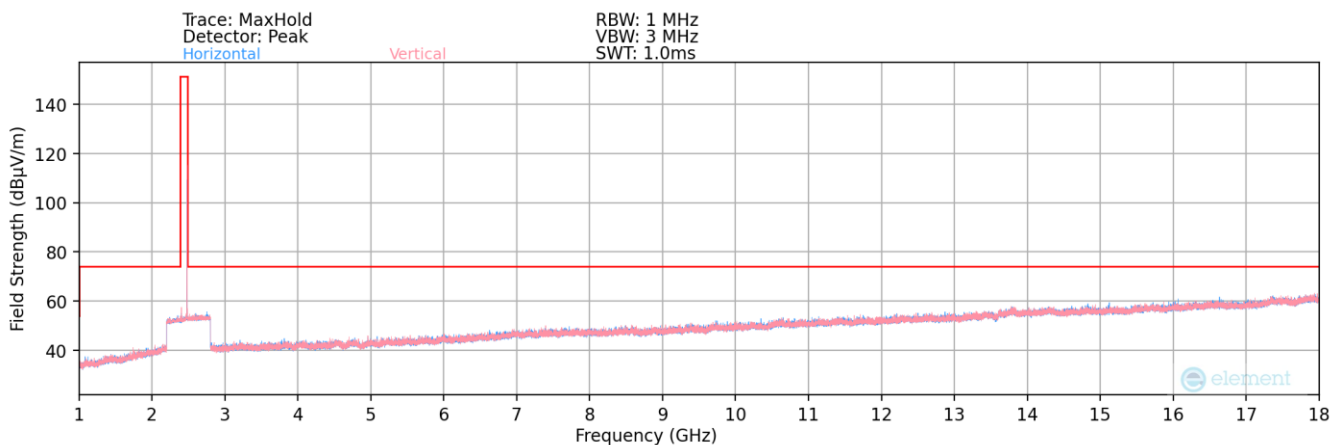

Plot 7-171. Radiated Spurious Plot above 1GHz (BT – Ch. 78)


FCC ID: C3K2077 IC: 3048A-2077		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2312040120-15.C3K	Test Dates: 12/14/2023 - 03/18/2024	EUT Type: Portable Computing Device		Page 117 of 137



Radiated Spurious Emissions Measurements (Above 18GHz)

§15.209; RSS-Gen [8.9]

SISO ANT2

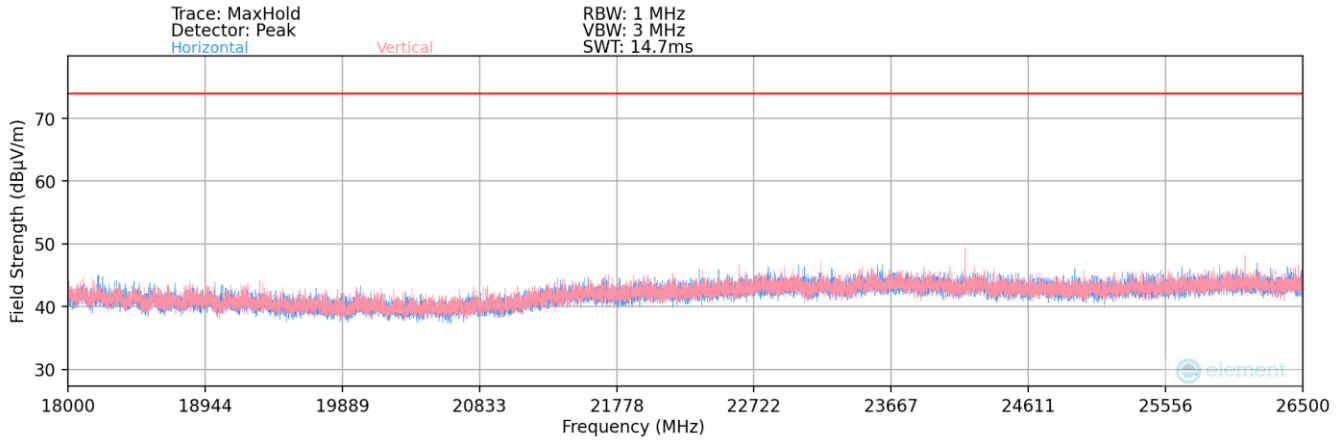

Plot 7-172. Radiated Spurious Plot above 18GHz

FCC ID: C3K2077 IC: 3048A-2077	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2312040120-15.C3K	Test Dates: 12/14/2023 - 03/18/2024	EUT Type: Portable Computing Device	Page 118 of 137



Radiated Spurious Emission Measurements
§15.205 §15.209 §15.247 (d); RSS-Gen [8.9]

SISO ANT2

Worst Case Mode: Bluetooth
 Worst Case Data Rate: 1 Mbps
 Measurement Distance: 3 Meters
 Operating Frequency: 2402MHz
 Channel: 0

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Duty Cycle Correction [dB]	Field Strength [dBµV/m]	Limit [dBµV/m]	Margin [dB]
4804.00	Avg	H	133	230	-75.36	7.36	-22.50	16.50	53.98	-37.47
4804.00	Peak	H	133	230	-67.46	7.36	0.00	46.90	73.98	-27.08
12010.00	Avg	H	-	-	-82.44	19.05	0.00	43.61	53.98	-10.37
12010.00	Peak	H	-	-	-71.76	19.05	0.00	54.29	73.98	-19.69

Table 7-18. Radiated Measurements

Worst Case Mode: Bluetooth
 Worst Case Data Rate: 1 Mbps
 Measurement Distance: 3 Meters
 Operating Frequency: 2441MHz
 Channel: 39

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Duty Cycle Correction [dB]	Field Strength [dBµV/m]	Limit [dBµV/m]	Margin [dB]
4882.00	Avg	H	136	225	-76.51	7.68	-22.50	15.67	53.98	-38.31
4882.00	Peak	H	136	225	-67.52	7.68	0.00	47.16	73.98	-26.82
7323.00	Avg	H	133	227	-78.74	13.02	-22.50	18.78	53.98	-35.20
7323.00	Peak	H	133	227	-68.67	13.02	0.00	51.35	73.98	-22.63
12205.00	Avg	H	-	-	-82.76	19.48	0.00	43.72	53.98	-10.26
12205.00	Peak	H	-	-	-71.96	19.48	0.00	54.52	73.98	-19.46

Table 7-19. Radiated Measurements

FCC ID: C3K2077 IC: 3048A-2077	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2312040120-15.C3K	Test Dates: 12/14/2023 - 03/18/2024	EUT Type: Portable Computing Device	Page 119 of 137



Worst Case Mode: Bluetooth
 Worst Case Data Rate: 1 Mbps
 Measurement Distance: 3 Meters
 Operating Frequency: 2480MHz
 Channel: 78

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Duty Cycle Correction [dB]	Field Strength [dBµV/m]	Limit [dBµV/m]	Margin [dB]
4960.00	Avg	H	148	142	-75.82	7.13	-22.50	15.82	53.98	-38.16
4960.00	Peak	H	148	142	-66.44	7.13	0.00	47.69	73.98	-26.29
7440.00	Avg	H	145	142	-79.13	12.58	-22.50	17.95	53.98	-36.03
7440.00	Peak	H	145	142	-68.89	12.58	0.00	50.69	73.98	-23.29
12400.00	Avg	H	-	-	-82.21	19.40	0.00	44.19	53.98	-9.78
12400.00	Peak	H	-	-	-71.65	19.40	0.00	54.75	73.98	-19.22




Table 7-20. Radiated Measurements

FCC ID: C3K2077 IC: 3048A-2077	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2312040120-15.C3K	Test Dates: 12/14/2023 - 03/18/2024	EUT Type: Portable Computing Device	Page 120 of 137



Radiated Spurious Emission Measurements
 §15.205 §15.209 §15.247 (d); RSS-Gen [8.9]

DUAL

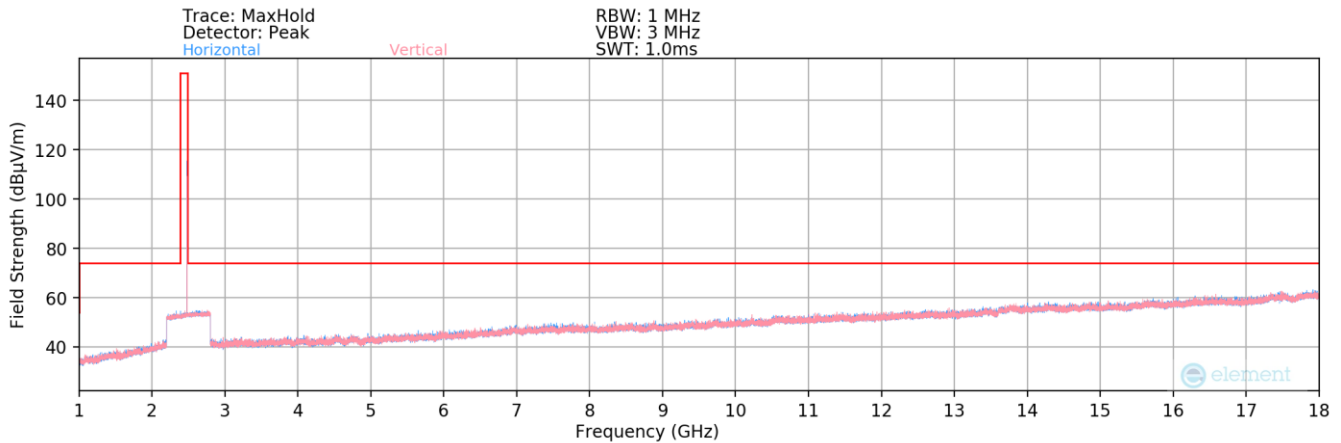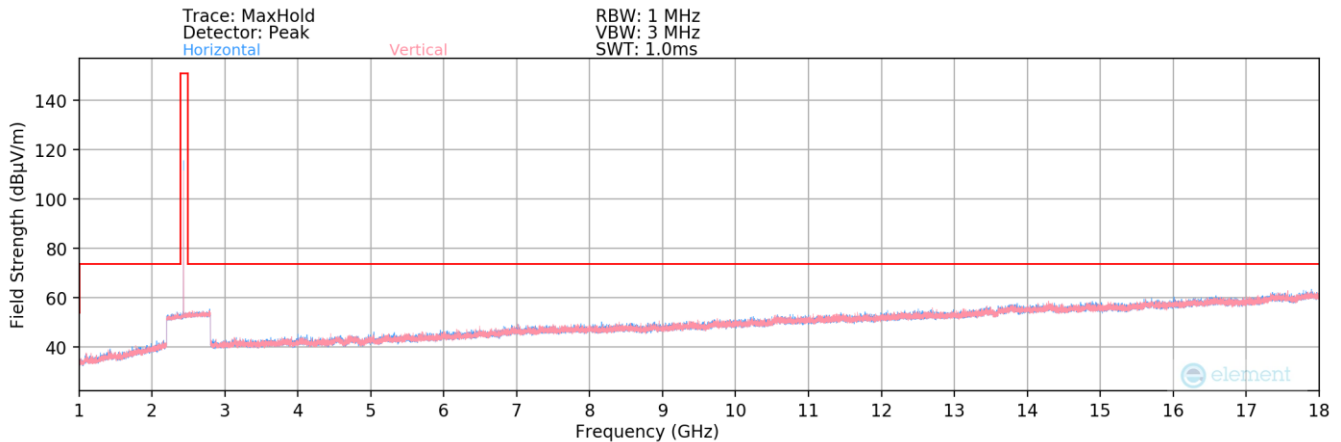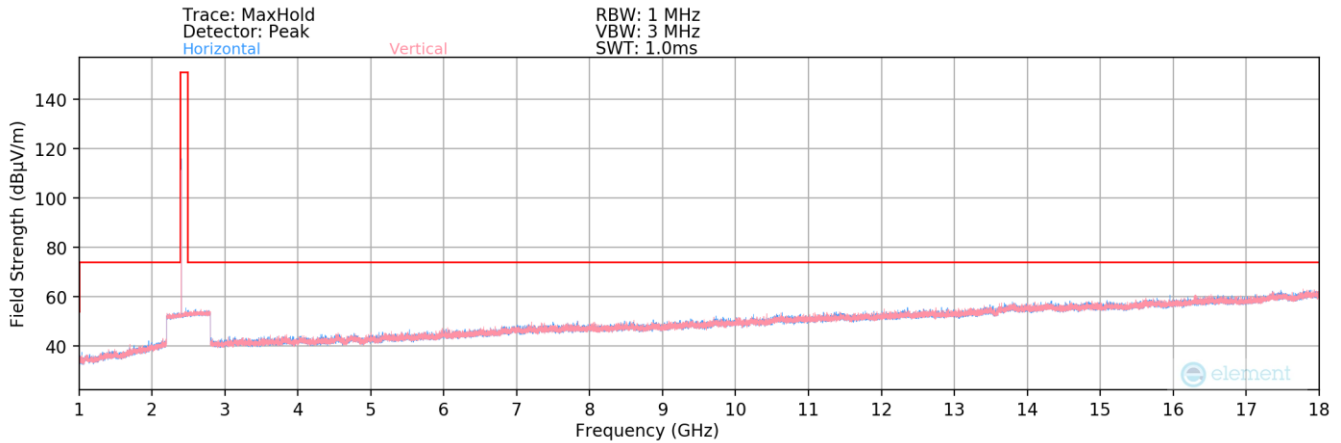


FCC ID: C3K2077 IC: 3048A-2077	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2312040120-15.C3K	Test Dates: 12/14/2023 - 03/18/2024	EUT Type: Portable Computing Device	Page 121 of 137



Radiated Spurious Emissions Measurements (Above 18GHz)

§15.209; RSS-Gen [8.9]

DUAL

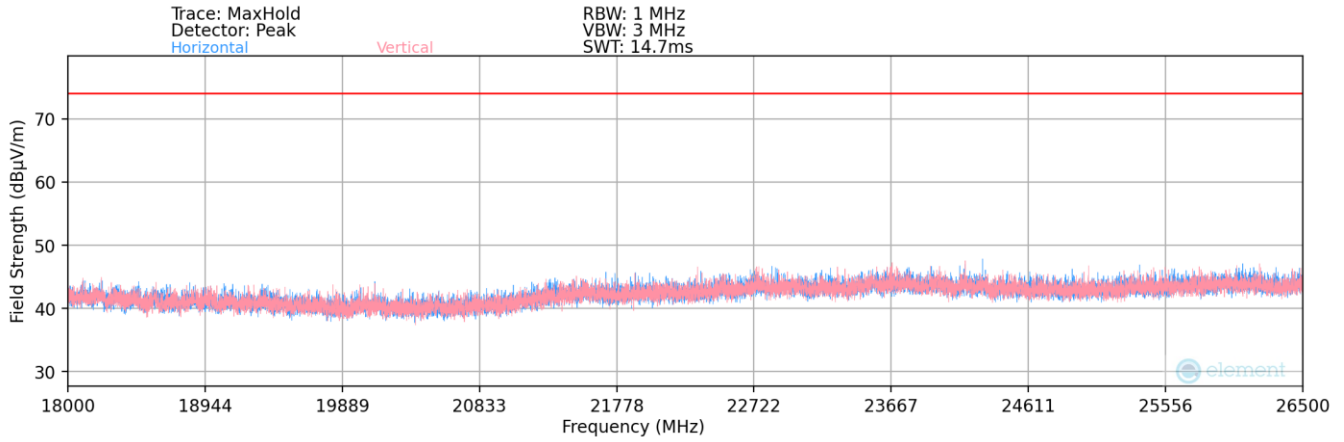

Plot 7-176. Radiated Spurious Plot above 18GHz

FCC ID: C3K2077 IC: 3048A-2077	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2312040120-15.C3K	Test Dates: 12/14/2023 - 03/18/2024	EUT Type: Portable Computing Device	Page 122 of 137



Radiated Spurious Emission Measurements
 §15.205 §15.209 §15.247 (d); RSS-Gen [8.9]

DUAL

Worst Case Mode: Bluetooth
 Worst Case Data Rate: 1 Mbps
 Measurement Distance: 3 Meters
 Operating Frequency: 2402MHz
 Channel: 0

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Duty Cycle Correction [dB]	Field Strength [dBµV/m]	Limit [dBµV/m]	Margin [dB]
4804.00	Avg	H	155	124	-72.97	7.36	-22.50	18.89	53.98	-35.08
4804.00	Peak	H	155	124	-64.69	7.36	0.00	49.67	73.98	-24.31
12010.00	Avg	H	-	-	-75.92	19.05	0.00	50.13	53.98	-3.85
12010.00	Peak	H	-	-	-64.94	19.05	0.00	61.11	73.98	-12.87

Table 7-21. Radiated Measurements

Worst Case Mode: Bluetooth
 Worst Case Data Rate: 1 Mbps
 Measurement Distance: 3 Meters
 Operating Frequency: 2441MHz
 Channel: 39

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Duty Cycle Correction [dB]	Field Strength [dBµV/m]	Limit [dBµV/m]	Margin [dB]
4882.00	Avg	H	155	124	-73.35	7.68	-22.50	18.83	53.98	-35.15
4882.00	Peak	H	155	124	-64.44	7.68	0.00	50.24	73.98	-23.74
7323.00	Avg	H	-	-	-76.49	13.02	0.00	43.53	53.98	-10.45
7323.00	Peak	H	-	-	-65.13	13.02	0.00	54.89	73.98	-19.09
12205.00	Avg	H	-	-	-76.45	19.48	0.00	50.03	53.98	-3.95
12205.00	Peak	H	-	-	-64.96	19.48	0.00	61.52	73.98	-12.46

Table 7-22. Radiated Measurements

FCC ID: C3K2077 IC: 3048A-2077	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2312040120-15.C3K	Test Dates: 12/14/2023 - 03/18/2024	EUT Type: Portable Computing Device	Page 123 of 137



Worst Case Mode: Bluetooth
 Worst Case Data Rate: 1 Mbps
 Measurement Distance: 3 Meters
 Operating Frequency: 2480MHz
 Channel: 78

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Duty Cycle Correction [dB]	Field Strength [dBµV/m]	Limit [dBµV/m]	Margin [dB]
4960.00	Avg	H	166	349	-72.36	7.13	-22.50	19.28	53.98	-34.70
4960.00	Peak	H	166	349	-63.07	7.13	0.00	51.06	73.98	-22.92
7440.00	Avg	H	-	-	-76.08	12.58	0.00	43.50	53.98	-10.48
7440.00	Peak	H	-	-	-64.40	12.58	0.00	55.18	73.98	-18.80
12400.00	Avg	H	-	-	-76.03	19.40	0.00	50.37	53.98	-3.60
12400.00	Peak	H	-	-	-65.19	19.40	0.00	61.21	73.98	-12.76

Table 7-23. Radiated Measurements

FCC ID: C3K2077 IC: 3048A-2077	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2312040120-15.C3K	Test Dates: 12/14/2023 - 03/18/2024	EUT Type: Portable Computing Device	Page 124 of 137



7.10 Radiated Restricted Band Edge Measurements
 §15.205 §15.209 §15.247 (d); RSS-Gen [8.9]

Test Overview and Limit

All out of band radiated emissions at the band edge are measured with a spectrum analyzer connected to a receive antenna while the EUT is operating at maximum power, at the appropriate frequencies, and with hopping disabled. Only the radiated emissions of the configuration that produced the worst-case emissions are reported in this section.

All out of band emissions appearing in a restricted band as specified in Section 15.205 of the Title 47 CFR and Table 6 of RSS-Gen (8.10) must not exceed the limits shown below per Section 15.209 and RSS-Gen (8.9).

Frequency	Field Strength [μ V/m]	Measured Distance [Meters]
Above 960.0 MHz	500	3

Table 7-24. Radiated Limits

Test Procedure Used

ANSI C63.10-2013 – Section 6.10.5.2

Test Settings

1. Span is set large enough to capture the peak level of the emission operating on the channel closest to the band edge
2. Reference level offset is set with the appropriate corrections for the frequencies shown in the plots
3. Reference level is set to provide the appropriate amount of “head room” above the signal as specified in ANSI C63.10-2013 Section 4.1.5.2
4. Attenuation is set to a low enough level to maintain enough dynamic range between the noise floor and the radiated limit
5. Sweep time = Auto coupled
6. RBW = 1MHz
7. VBW = 3 x RBW for peak measurements and 1kHz for RMS measurements
8. Detector = RMS and peak
9. Trace = Max Hold
10. Trace was allowed to stabilize

FCC ID: C3K2077 IC: 3048A-2077	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2312040120-15.C3K	Test Dates: 12/14/2023 - 03/18/2024	EUT Type: Portable Computing Device	Page 125 of 137

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

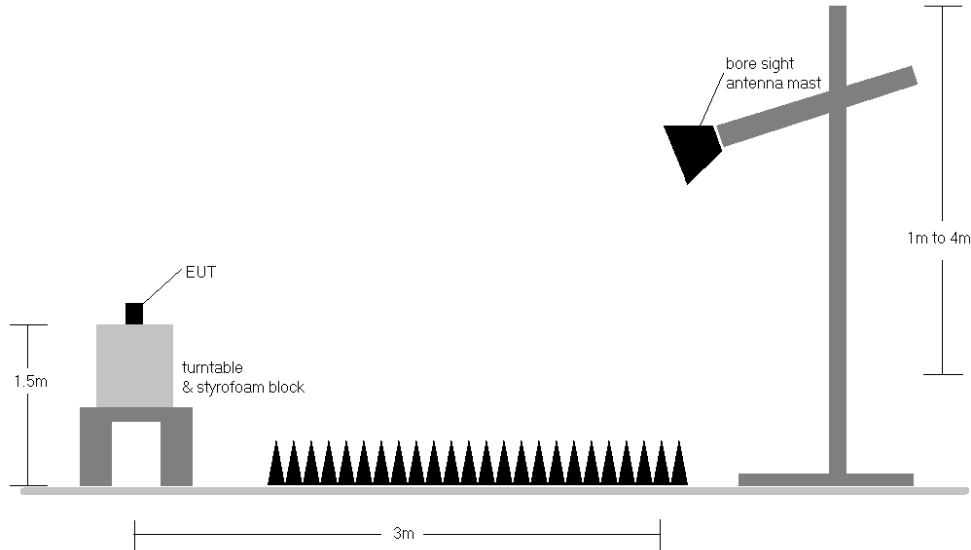


Figure 7-9. Radiated Test Setup >1GHz

Test Notes

1. All emissions lying in restricted bands specified in §15.205 and Section 8.10 of RSS-Gen are below the limits shown in §15.209.
2. No significant radiated emissions were found in the 2310 - 2390MHz restricted band.
3. The antenna is manipulated through typical positions, polarity, and length during the tests. The EUT is manipulated through three orthogonal planes.
4. This unit was tested with its standard battery.
5. The spectrum is measured from 9kHz to the 10th harmonic and the worst-case emissions are reported.
6. Two different amplitude offsets were used depending on whether peak or average measurements were measured. The average measurements use a duty cycle correction factor (DCCF).


The amplitude offset shown in the following plots for average measurements was calculated using the formula:

$$\text{Offset (dB)} = (\text{Antenna Factor} + \text{Cable Loss} + \text{Attenuator}) - \text{Preamplifier Gain} + \text{DCCF}$$


7. The "-" shown in the following RSE tables is used to denote a noise floor measurement.

FCC ID: C3K2077 IC: 3048A-2077	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2312040120-15.C3K	Test Dates: 12/14/2023 - 03/18/2024	EUT Type: Portable Computing Device	Page 126 of 137

Worst Case Mode: Bluetooth
 Worst Case Data Rate: 1 Mbps
 Measurement Distance: 3 Meters
 Operating Frequency: 2480MHz
 Channel: 78

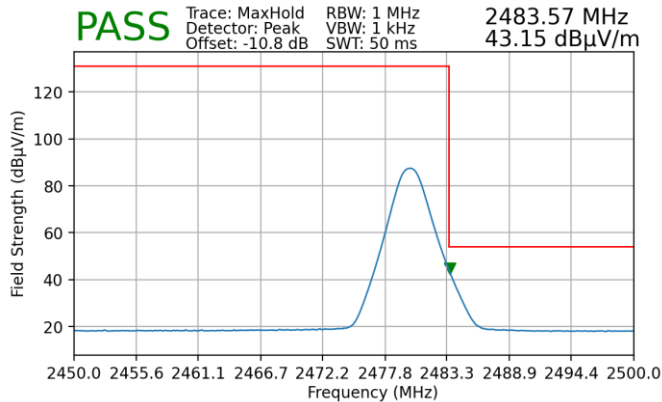


Plot 7-177. Radiated Restricted Upper Band Edge Measurement (Average) – SISO ANT1

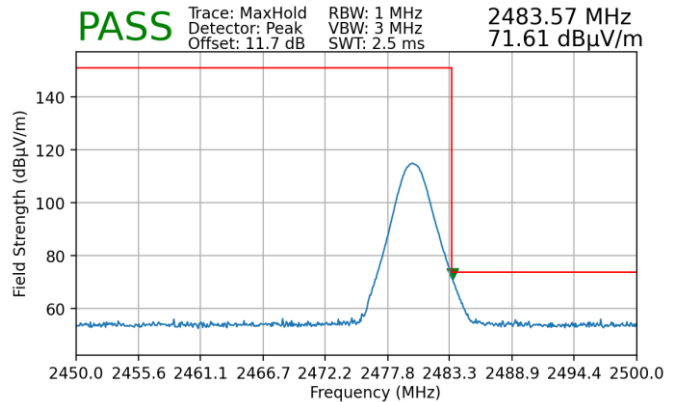


Plot 7-178. Radiated Restricted Upper Band Edge Measurement (Peak) – SISO ANT1

Worst Case Mode: Bluetooth
 Worst Case Data Rate: 1 Mbps
 Measurement Distance: 3 Meters
 Operating Frequency: 2480MHz
 Channel: 78

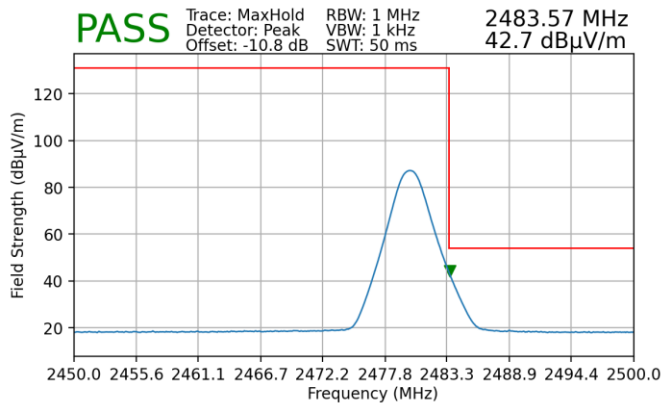

Plot 7-179. Radiated Restricted Upper Band Edge Measurement (Average) – SISO ANT2

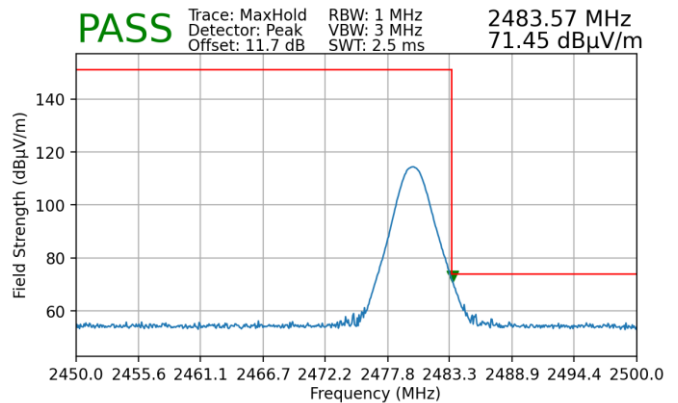


Plot 7-180. Radiated Restricted Upper Band Edge Measurement (Peak) – SISO ANT2


FCC ID: C3K2077 IC: 3048A-2077		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2312040120-15.C3K	Test Dates: 12/14/2023 - 03/18/2024	EUT Type: Portable Computing Device		Page 127 of 137



Worst Case Mode: Bluetooth
 Worst Case Data Rate: 1 Mbps
 Measurement Distance: 3 Meters
 Operating Frequency: 2480MHz
 Channel: 78

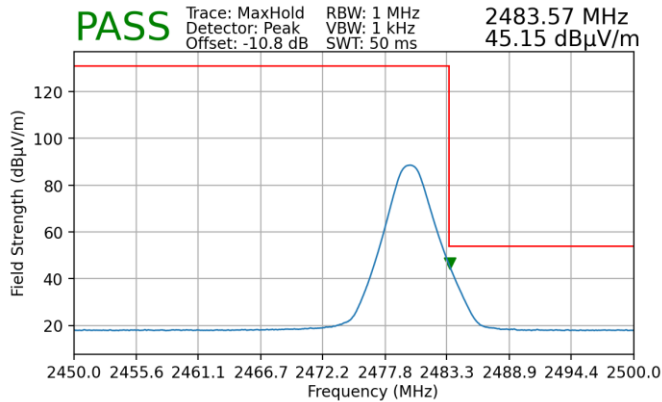

Plot 7-181. Radiated Restricted Upper Band Edge Measurement (Average) – MIMO

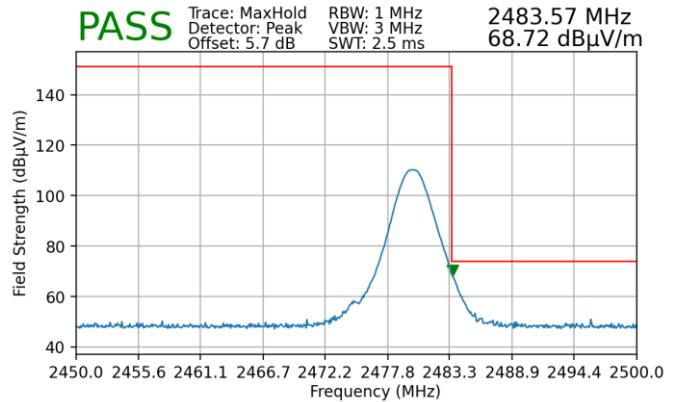

Plot 7-182. Radiated Restricted Upper Band Edge Measurement (Peak) – MIMO

FCC ID: C3K2077 IC: 3048A-2077	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2312040120-15.C3K	Test Dates: 12/14/2023 - 03/18/2024	EUT Type: Portable Computing Device	Page 128 of 137



7.11 Radiated Spurious Emissions Measurements – Below 1GHz

§15.209; RSS-Gen [8.9]

Test Overview and Limit

All out of band radiated spurious emissions are measured with a spectrum analyzer connected to a receive antenna while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates and modes were investigated for radiated spurious emissions. Only the radiated emissions of the configuration that produced the worst case emissions are reported in this section.

All out of band emissions must not exceed the limits shown below per Section 15.209 and RSS-Gen (8.9).

Frequency	Field Strength [$\mu\text{V/m}$]	Measured Distance [Meters]
0.009 – 0.490 MHz	2400/F (kHz)	300
0.490 – 1.705 MHz	24000/F (kHz)	30
1.705 – 30.00 MHz	30	30
30.00 – 88.00 MHz	100	3
88.00 – 216.0 MHz	150	3
216.0 – 960.0 MHz	200	3
Above 960.0 MHz	500	3

Table 7-25. Radiated Limits

Test Procedures Used

ANSI C63.10-2013

Test Settings

Quasi-Peak Field Strength Measurements

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 120kHz (for emissions from 30MHz – 1GHz)
3. Detector = quasi-peak
4. Sweep time = auto couple
5. Trace mode = max hold
6. Trace was allowed to stabilize

FCC ID: C3K2077 IC: 3048A-2077	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2312040120-15.C3K	Test Dates: 12/14/2023 - 03/18/2024	EUT Type: Portable Computing Device	Page 129 of 137

Test Setup

The EUT and measurement equipment were set up as shown in the diagrams below.

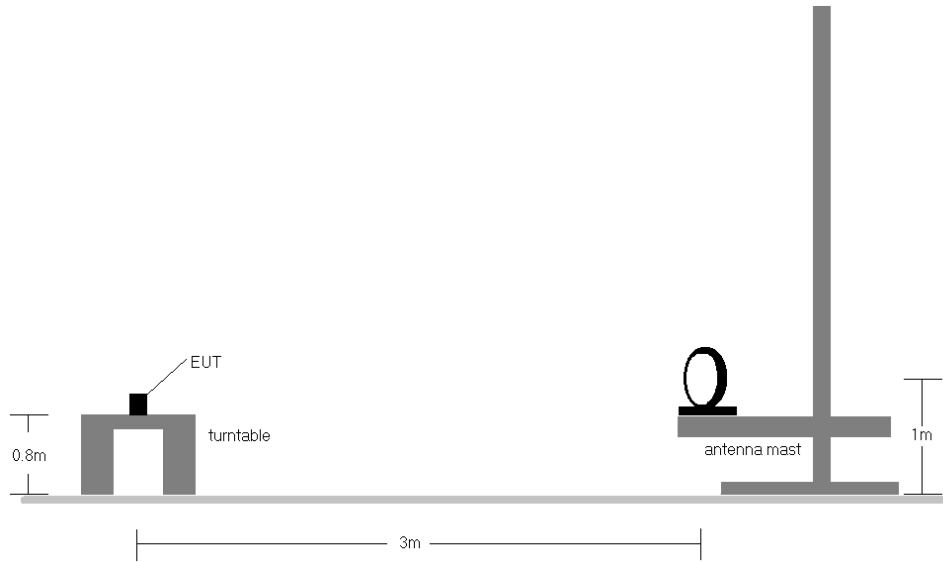


Figure 7-10. Radiated Test Setup < 30Mhz

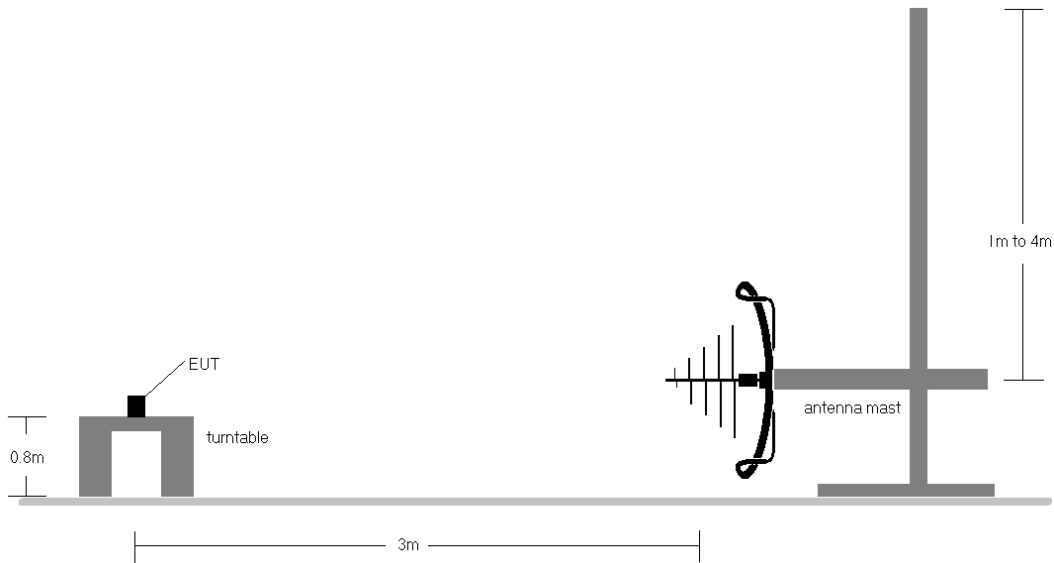


Figure 7-11. Radiated Test Setup < 1GHz

FCC ID: C3K2077 IC: 3048A-2077	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2312040120-15.C3K	Test Dates: 12/14/2023 - 03/18/2024	EUT Type: Portable Computing Device	Page 130 of 137


Test Notes

1. All emissions lying in restricted bands specified in §15.205 and RSS-Gen (8.10) are below the limits shown in §15.209.
2. The broadband receive antenna is manipulated through vertical and horizontal polarizations during the tests. The EUT is manipulated through three orthogonal planes.
3. This unit was tested with its standard battery.
4. The spectrum is investigated using a peak detector and final measurements are recorded using CISPR quasi peak detector. The worst-case emissions are reported however emissions whose levels were not within 20dB of the respective limits were not reported.
5. Emissions were measured at a 3 meter test distance.
6. Emissions are investigated while operating on the center channel of the mode, band, and modulation that produced the worst case results during the transmitter spurious emissions testing.
7. No spurious emissions were detected within 20dB of the limit below 30MHz.
8. The results recorded using the broadband antenna is known to correlate with the results obtained by using a tuned dipole with an acceptable degree of accuracy. The VSWR for the measurement antenna was found to be less than 2:1.
9. The wide spectrum spurious emissions plots shown on the following pages are used only for the purpose of emission identification. There were no emissions detected in the 30MHz – 1GHz frequency range, as shown in the subsequent plots.

FCC ID: C3K2077 IC: 3048A-2077	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2312040120-15.C3K	Test Dates: 12/14/2023 - 03/18/2024	EUT Type: Portable Computing Device	Page 131 of 137

Radiated Spurious Emissions Measurements (Below 1GHz)


§15.209; RSS-Gen [8.9]

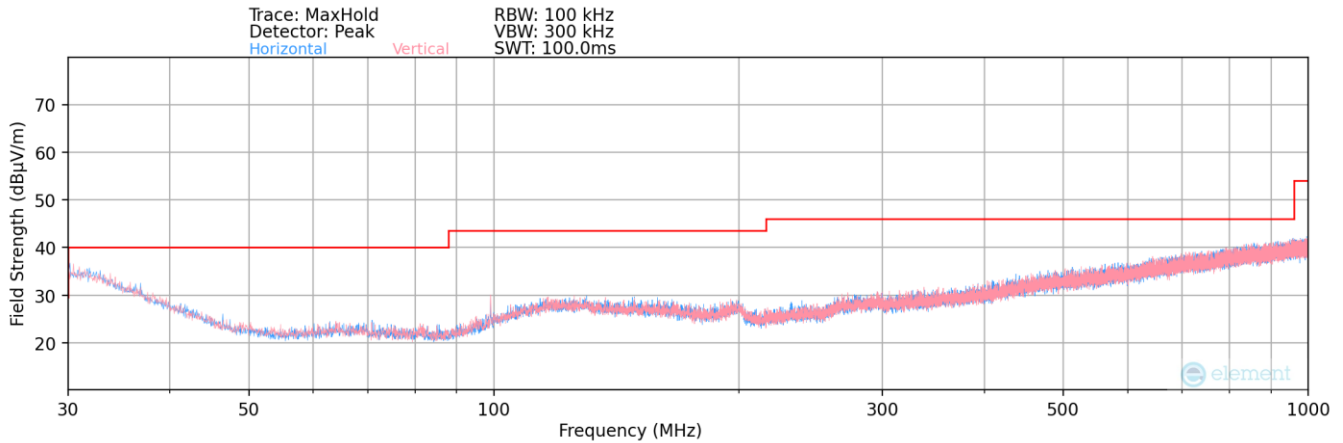

Plot 7-183. Radiated Spurious Plot below 1GHz – SISO ANT1

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBµV/m]	Limit [dBµV/m]	Margin [dB]
99.00	Quasi-Peak	V	250	73	-98.72	16.98	25.26	43.52	-18.26

Table 7-26. Radiated Spurious Emissions Below 1GHz – SISO ANT1

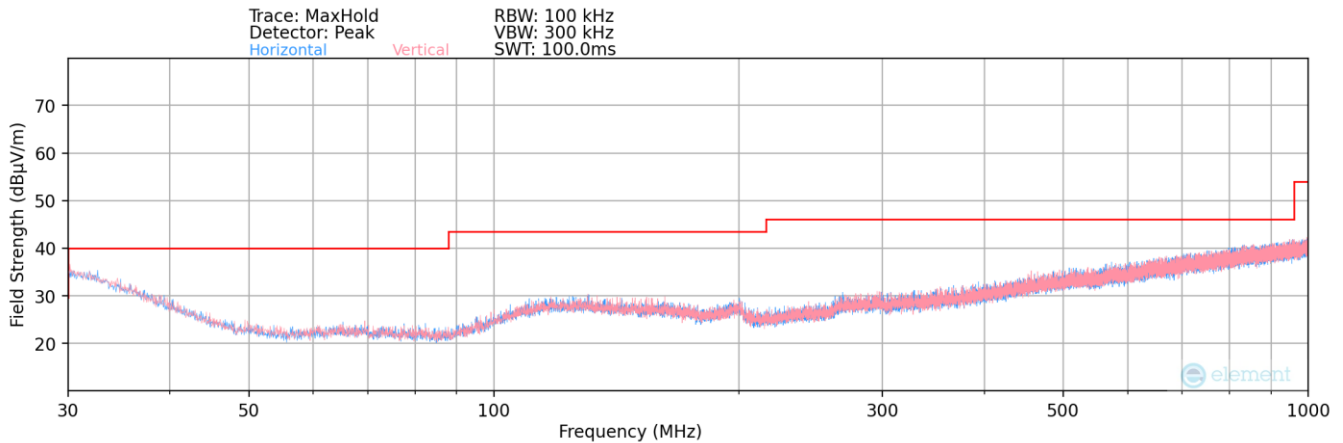


Plot 7-184. Radiated Spurious Plot below 1GHz – SISO ANT2

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBµV/m]	Limit [dBµV/m]	Margin [dB]
455.00	Quasi-Peak	V	114	259	-108.85	24.83	22.98	46.02	-23.04

Table 7-27. Radiated Spurious Emissions Below 1GHz – SISO ANT2

FCC ID: C3K2077 IC: 3048A-2077		MEASUREMENT REPORT (CERTIFICATION)				Approved by: Technical Manager	
Test Report S/N:	Test Dates:	EUT Type:		Page 132 of 137			
1M2312040120-15.C3K	12/14/2023 - 03/18/2024	Portable Computing Device					

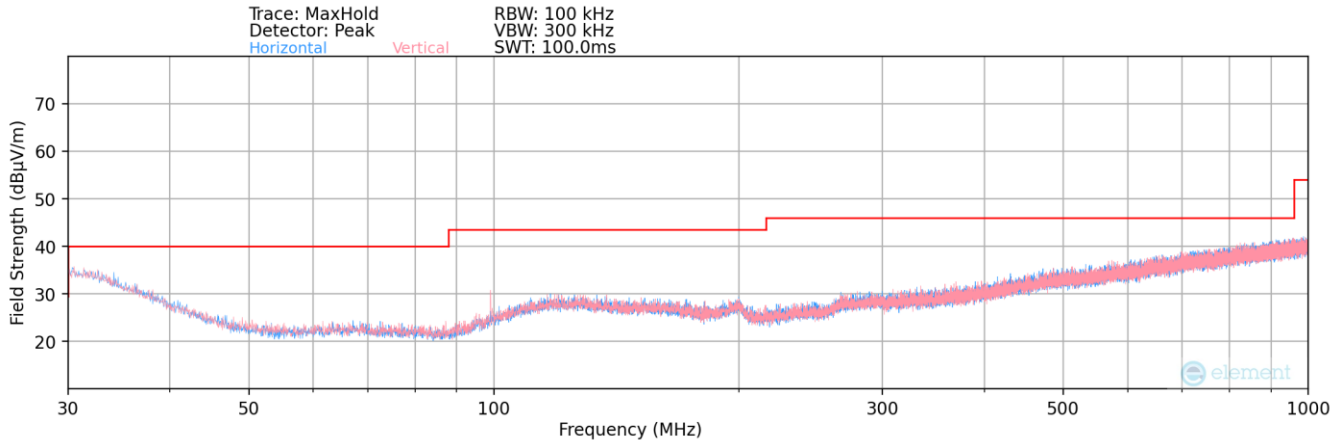

Plot 7-185. Radiated Spurious Plot below 1GHz – DUAL

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBµV/m]	Limit [dBµV/m]	Margin [dB]
99.00	Quasi-Peak	V	250	357	-97.98	16.98	26.00	43.52	-17.52

Table 7-28. Radiated Spurious Emissions Below 1GHz – DUAL

FCC ID: C3K2077 IC: 3048A-2077	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2312040120-15.C3K	Test Dates: 12/14/2023 - 03/18/2024	EUT Type: Portable Computing Device	Page 133 of 137



7.12 Line Conducted Measurement Data

§15.207; RSS-Gen [8.8]

Test Overview and Limit

All AC line conducted spurious emissions are measured with a receiver connected to a grounded LISN while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates and modes were investigated for conducted spurious emissions. Only the conducted emissions of the configuration that produced the worst case emissions are reported in this section.

All conducted emissions must not exceed the limits shown in the table below per Section 15.207 and RSS-Gen (8.8).

Frequency of emission (MHz)	Conducted Limit (dB μ V)	
	Quasi-peak	Average
0.15 – 0.5	66 to 56*	56 to 46*
0.5 – 5	56	46
5 – 30	60	50

Table 7-29. Conducted Limits

*Decreases with the logarithm of the frequency.

Test Procedures Used

ANSI C63.10-2013, Section 6.2

Test Settings

Quasi-Peak Field Strength Measurements

1. Analyzer center frequency was set to the frequency of the spurious emission of interest
2. RBW = 9kHz (for emissions from 150kHz – 30MHz)
3. Detector = quasi-peak
4. Sweep time = auto couple
5. Trace mode = max hold
6. Trace was allowed to stabilize

Average Field Strength Measurements

1. Analyzer center frequency was set to the frequency of the spurious emission of interest
2. RBW = 9kHz (for emissions from 150kHz – 30MHz)
3. Detector = RMS
4. Sweep time = auto couple
5. Trace mode = max hold
6. Trace was allowed to stabilize

FCC ID: C3K2077 IC: 3048A-2077	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2312040120-15.C3K	Test Dates: 12/14/2023 - 03/18/2024	EUT Type: Portable Computing Device	Page 134 of 137

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.


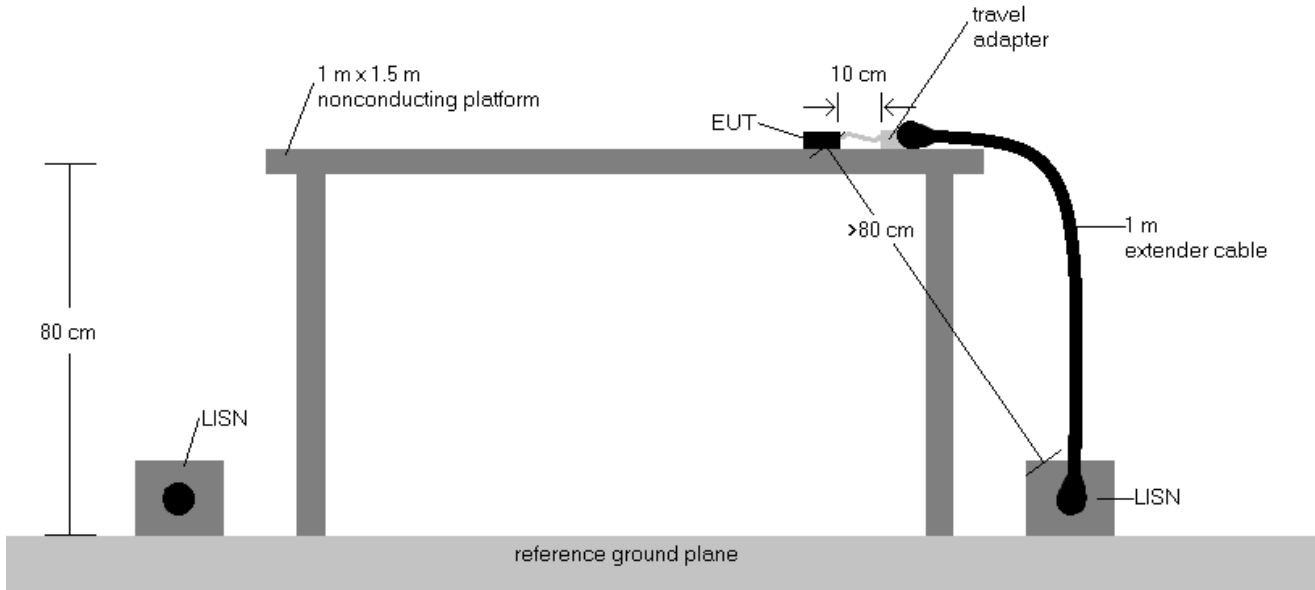


Figure 7-12. Test Instrument & Measurement Setup


Test Notes

1. All modes of operation were investigated, and the worst-case emissions are reported using mid channel. The emissions found were not affected by the choice of channel used during testing.
2. The limit for an intentional radiator from 150kHz to 30MHz are specified in 15.207 and RSS-Gen (8.8).
3. $Corr. (dB) = Cable\ loss (dB) + LISN\ insertion\ factor (dB)$
4. $QP/AV\ Level (dB\mu V) = QP/AV\ Analyzer/Receiver\ Level (dB\mu V) + Corr. (dB)$
5. $Margin (dB) = QP/AV\ Limit (dB\mu V) - QP/AV\ Level (dB\mu V)$
6. Traces shown in plot are made using a peak detector.
7. Deviations to the Specifications: None.

FCC ID: C3K2077 IC: 3048A-2077	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2312040120-15.C3K	Test Dates: 12/14/2023 - 03/18/2024	EUT Type: Portable Computing Device	Page 135 of 137

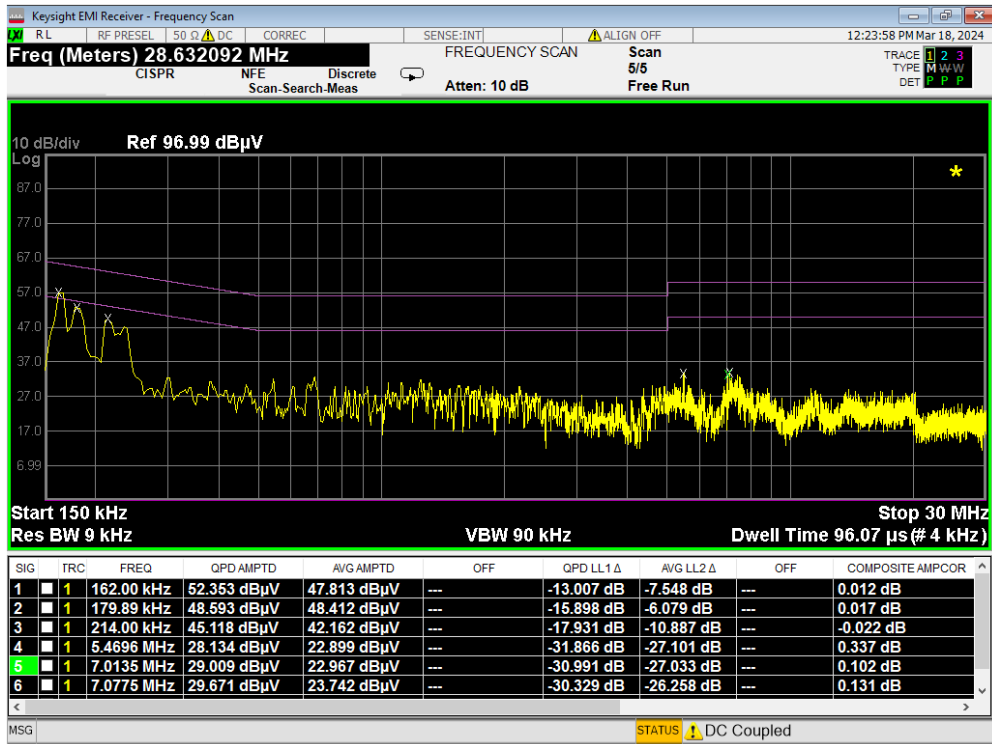

Plot 7-186. Line-Conducted Test Plot (L1)

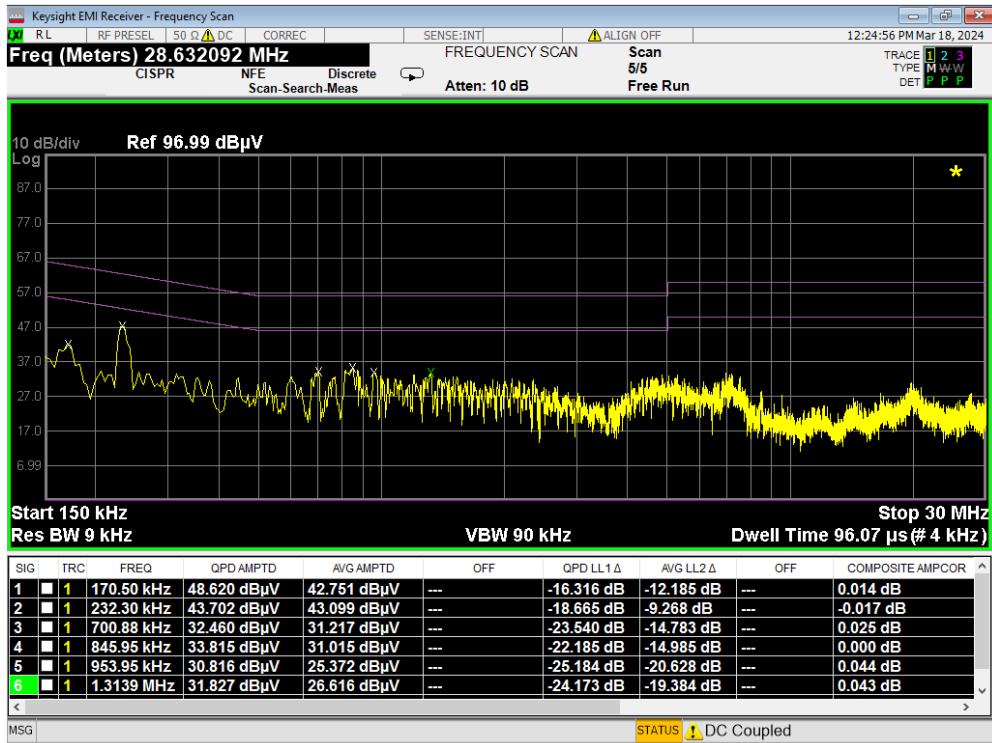

Plot 7-187. Line-Conducted Test Plot (N)

FCC ID: C3K2077 IC: 3048A-2077	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2312040120-15.C3K	Test Dates: 12/14/2023 - 03/18/2024	EUT Type: Portable Computing Device	Page 136 of 137

8.0 CONCLUSION

The data collected relate only to the item(s) tested and show that the **Microsoft Corporation Portable Computing Device FCC ID: C3K2077 / IC: 3048A-2077** is in compliance with Part 15 Subpart C (15.247) of the FCC Rules and RSS-247 of the ISED rules.

FCC ID: C3K2077 IC: 3048A-2077	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2312040120-15.C3K	Test Dates: 12/14/2023 - 03/18/2024	EUT Type: Portable Computing Device	Page 137 of 137