

FCC/DOJ

DEC 23 1998

FCC/DOJ

OCT 22 1998

FCC/DOJ

DEC 07 1998

6. Specification of DAEWOO Magnetron of 2M218

▶ FCC ID : C5F7NF86MO9000 ◀



DAEWOO
DAEWOO ELECTRONICS CO., LTD

C.P.O. BOX 8003 SEOUL KOREA
981-1 JANGDUCK-DONG
KWANGSAN-KU, KWANG JU, KOREA
TEL. : (062) 951-2000 ~ 9
FAX. : (062) 951-2010

MAGNETRON DIVISION

TO :

APPROVAL SIGNATURE

S P E C I F I C A T I O N

FOR
DAEWOO MAGNETRON

2 M 2 1 8

No-hon Myong

NO-HON MYONG
MANAGER, MAGNETRON DEPT.

SPECIFICATION NO. :
ISSUED :

SFC

2 M 2 1 8

This specification is based upon EIAJ ET-145A Testing Methods for Continuous Wave Magnetrons

DAEWOO CONTINUOUS WAVE MAGNETRON 2M218

| | | | | | | | | | | |
|-----------------------------|---------------------------------------------------------------|------|----|-----------------|------|-----|-----|----------------|----------------|-------------------|
| DESCRIPTION | Magnetron (Fixed Frequency, Integral Magnet) | | | | | | | | | |
| FUNCTION | For Microwave Oven (2450MHz Band continuous wave oscillation) | | | | | | | | | |
| OUTER DIMENSIONS | See Outline drawing | | | | | | | | | |
| ABSOLUTE MAXIMUM RATINGS | | | | | | | | | NOTE(4)(5) | NOTE(4) |
| | TERM | Ef | tk | e _{bm} | lb | ibm | Pi | σ _L | T _p | T _{case} |
| | UNIT | V | s | kV | mAdc | A | kW | - | °C | °C |
| | MAX. | 3.75 | - | 4.5 | 350 | 1.2 | 1.4 | 4 | 250 | 100 |
| | MIN. | 2.80 | 0 | - | - | - | - | - | - | - |
| STANDARD TEST CONDITION | NOTE (1)(2)(3) | 3.30 | - | - | 300 | - | - | 1.1MAX | - | - |

TEST SPECIFICATION

| TEST TERM NOTE (8) | TEST METHOD EIAJ ET-145A | TEST CONDITION | SYMBOL | BOGIE | LIMIT | | UNIT | |
|---------------------------------------|--------------------------------|-----------------------------------|-----------------------------------|--------------------|-------|------|--------------------|---|
| | | | | | MIN. | MAX. | | |
| *** VIBRATION | 5.4.1 | | - | - | - | - | - | |
| ** BREAK DOWN VOLTAGE | 4.2 | NOTE (6) | - | - | - | - | - | |
| ** INSULATION | 4.2 | E _b =1kVdc R.H.MAX.60% | - | - | 100 | - | MΩ | |
| ** FILAMENT CURRENT | 4.1.1 | tk=120s | I _f | 10 | 8 | 12 | A | |
| PEAK ANODE VOLTAGE | 4.3.1 | NOTE (7) | e _{bm} | 4.10 | 3.95 | 4.25 | kV | |
| AVERAGE POWER OUTPUT(1) | 4.3.3.1 | NOTE (7) | P _o (1) | 925 | 885 | 965 | W | |
| FREQUENCY | 4.3.4 | | f | 2458 | 2448 | 1468 | MHz | |
| *** PULLING FIGURE | 4.3.6 | σ _L =1.5 | f _{pl} | - | - | 15 | MHz | |
| *** SINK PHASE | 4.3.7 | | λ _{sink} /λ _g | 0.25 | - | - | - | |
| ** STABILITY MODING (1) | 4.3.11.2 | σ _L =2,3,4;t=60s | - | - | - | - | - | |
| ** FUNDAMENTAL FREQUENCY RADIATION | 4.3.15 | σ _L =4 | S _l | - | - | 1 | mW/cm ² | |
| *** LIFE TEST | 4.5.1 | | t | - | 500 | - | h | |
| *** LIFETEST END POINT | AVERAGE POWER OUTPUT (1) | 4.3.3.1 | NOTE (7) | P _o (1) | - | 710 | - | W |

SPEC. NO. :

DATE :

PAGE : 2/10



- NOTE (1) Prescribed R.F.Coupler (Refer to the attached chart) or the similar type must be used.
- (2) Forced air cooling (1000 l/min).
- (3) Single phase full wave rectifier without filter shall be used for power supply.
- (4) See outline drawing for measuring point.
- (5) Maximum saturated anode temperature for normal condition (with load in the cavity) should be 200°C.
- (6) $E_b=10kVdc$ or $7kVac$: $t=60s$
- (7) The surrounding temperature will be settled at the value of 25°C and it's exchange rate should be $-0.002/°C$.
- (8) Tests shall be classified as follows.

| Class | Mark | Remarks |
|--------------------|-------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Production test | None | This test is intended to ensure if the production line is being processed in compliance with the standard, and shall be conducted on some typical characteristics which are considered to be affected by changes in the process. |
| Design test | :: | This test is intended to ensure the standard design, and shall be conducted on such characteristics which are not affected by the ordinary production line as long as the design is maintained. |
| Type approval test | :::~: | This test is intended to ensure the compliance of the standard design with given specifications, and may be omitted unless a substantial change in the design is made. |



2M218

OUTLINE DRAWING

UNIT: mm

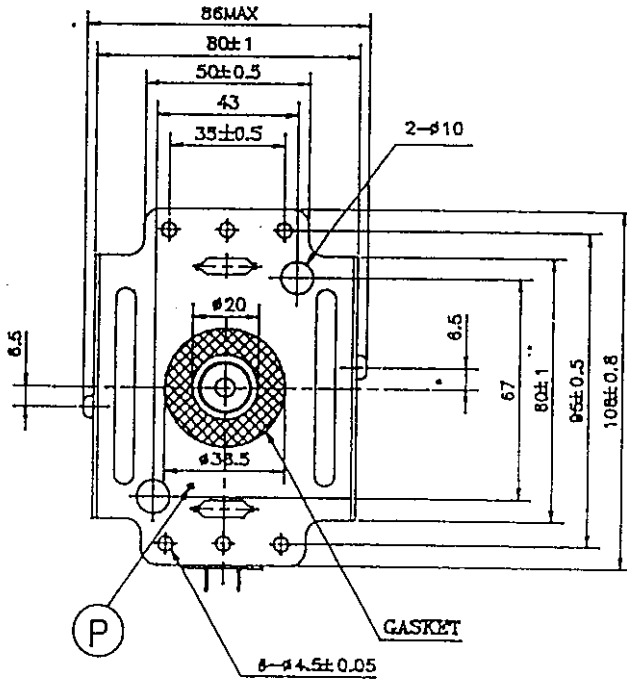

NOTE<1> TEMPERATURE TO BE MEASURED AT THE OUTLET SIDE OF AIRFLOW.

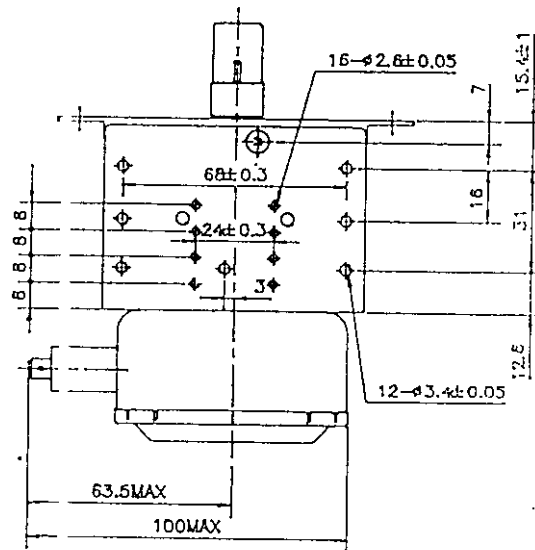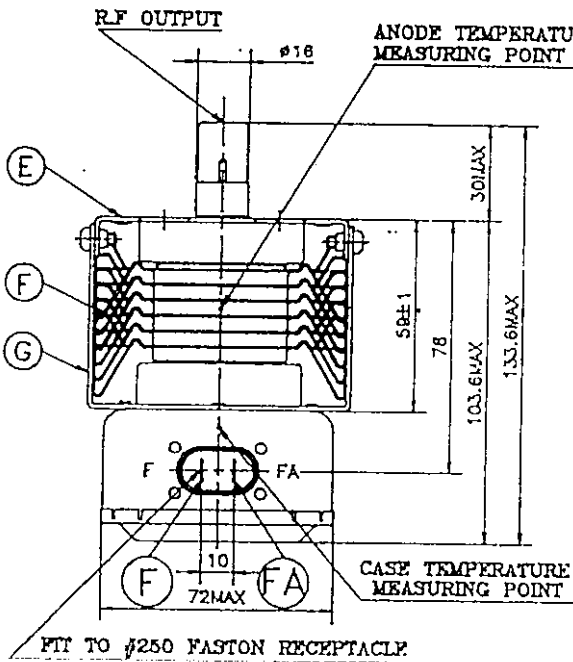



SPEC.NO.:

DATE:

PAGE: 4/10

SPACING IN THE SHIELDING CASE

UNIT : mm

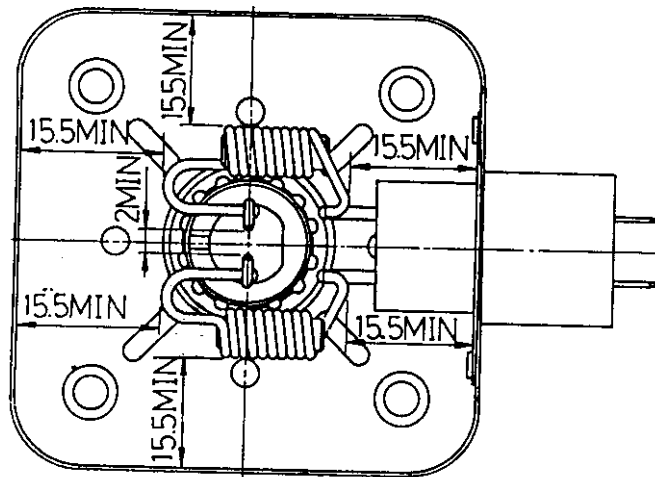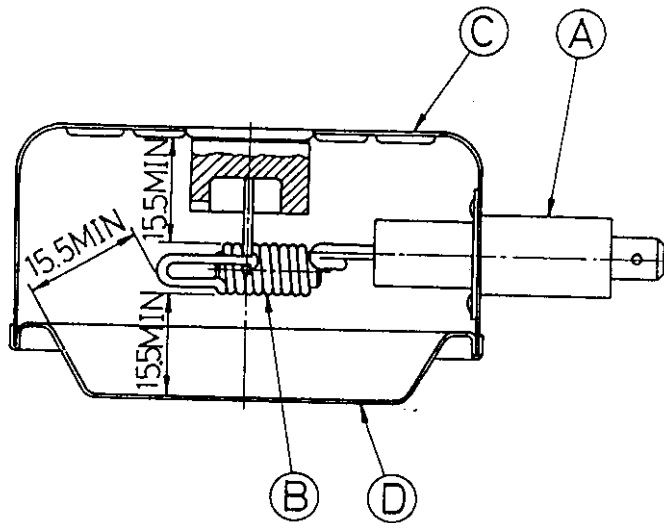


SPEC. NO. :

DATE :

PAGE : 5/10

DETAILS OF FILTER CAPACITOR

UNIT : mm

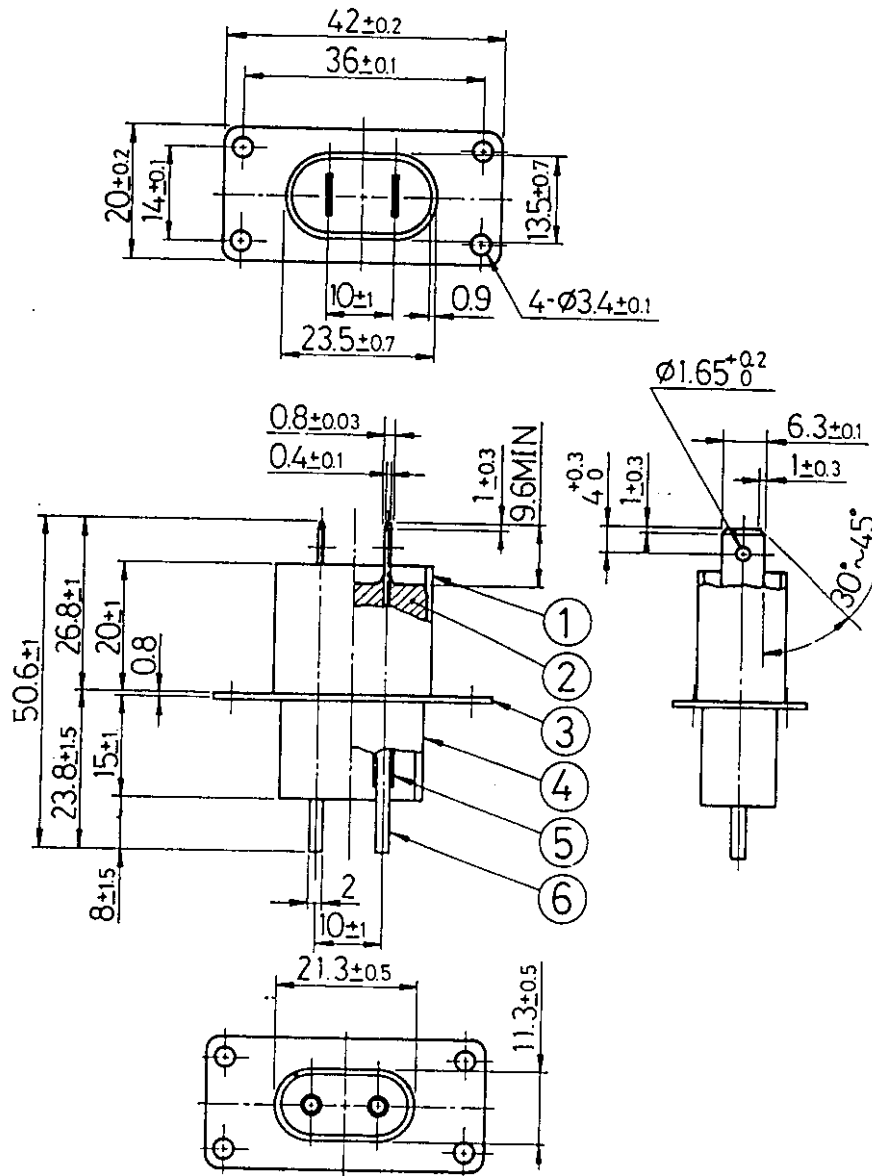

NOTE<1> THE FASTON TAB MEETS TO BS 5057 : 1973 AND DIN 46244 : APRIL 1980.

SPEC. NO. :

DATE:

PAGE : 6/10

2 M 2 1 8

MATERIAL LIST

| Part name | Manufacturer | Material | Manufacturer of Materials | U L - No. | | | Note |
|---------------------------|----------------------|------------------------------|----------------------------------------------------------|-----------|-----------|--------------|---------------------|
| | | | | Guide No. | File No. | Grade No. | |
| A Capacitor (HFC-2S-1) | T D K Corporation | 1 Polybutylene terephthalate | Mitsubishi Rayon Co.,LTD. | QMFZ2 | E54695(M) | G2930 | 500pF±2 WV10kVdc |
| | | 2 Epoxy Resin | TDK Corporation | - | - | R-2,R-3 | |
| | | 3 Steel | TDK Corporation | - | - | - | |
| | | 4 Polybutylene terephthalate | Polyplastic Co.,LTD. | QMFZ2 | E45034(B) | 3310 | |
| | | 5 Silicone Rubber Tube | Shin-etsu Chemical Co.,LTD. Toshiba Silicone Co.,LTD. | - | - | 5609 5053 | |
| | | 6 Steel | TDK Corporation | - | - | - | |


| Part name | Manufacturer | Material | Thickness Diameter (mm) | Size (mm) | Note |
|---------------------------|-----------------------------|----------------------|-------------------------|-----------|-------------------------|
| B Choke coil | Dong An Corporation | Ferrite | - | φ5 x 16 | 9.5 turns 1.5 μH x 2 |
| | | Enameled copper wire | φ 1.4 | | |
| C Shielding case | Daewoo Electronics Co.,LTD. | Zinc steel | T 0.4 | 70 x 70 | |
| D Shielding case cover | do | do | T 0.4 | 71 x 71 | |
| E Heat sink enclosure (1) | do | do | T 0.4 | - | |
| F Heat sink | do | Aluminium | T 0.7 | 80 x 80 | 6 fins |
| G Heat sink enclosure (2) | do | Zinc steel | T 1.4 | - | |

SPEC. NO. :

DATE:

PAGE : 7/10



FILAMENT CONECTION

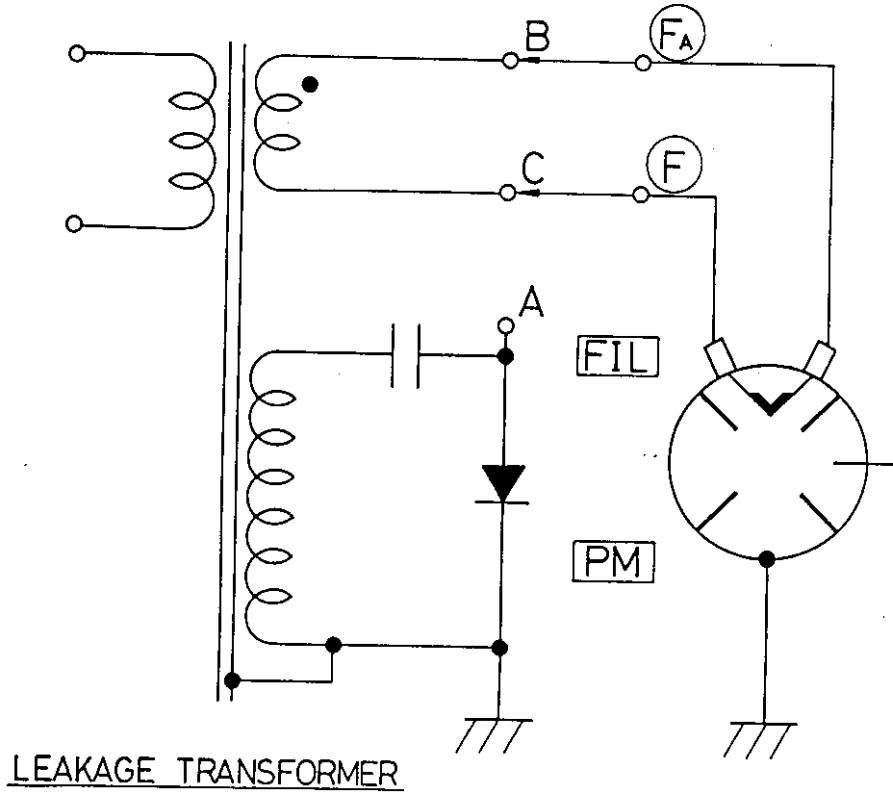

A WILL BE CONNECTED TO B OR C

R. F. COUPLER

UNIT : mm

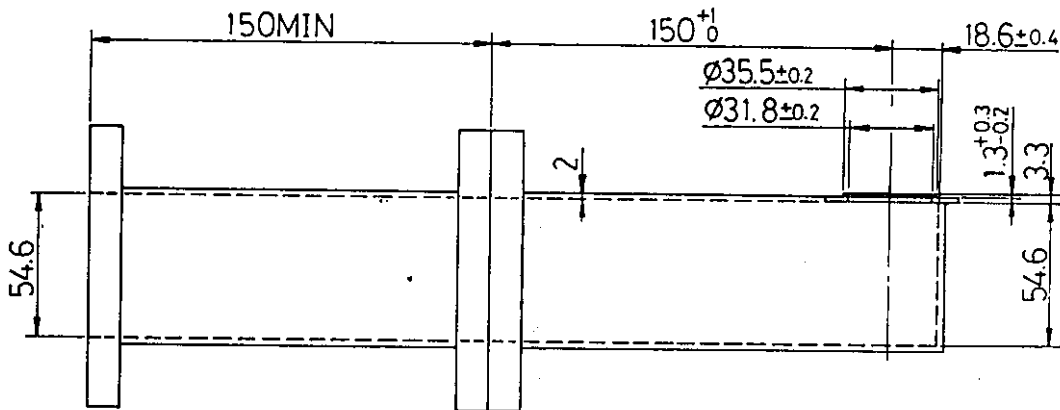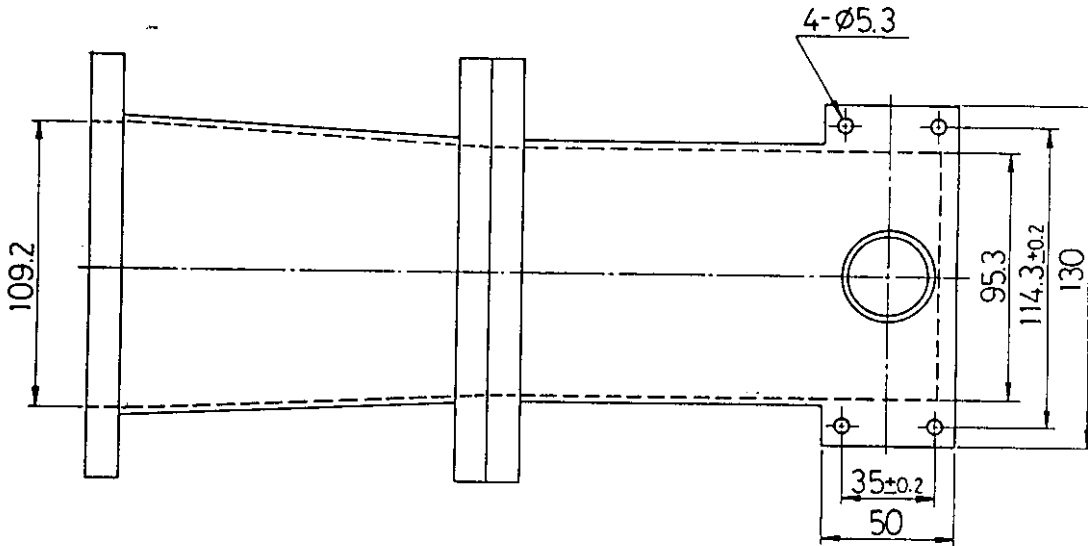

STANDARD R.F. COUPLER DEFINED BY E.I.A.J.

SPEC. NO. :


DATE :

PAGE : 9/10

LABEL

LABEL

The Label as shown below shall be put on each tube.

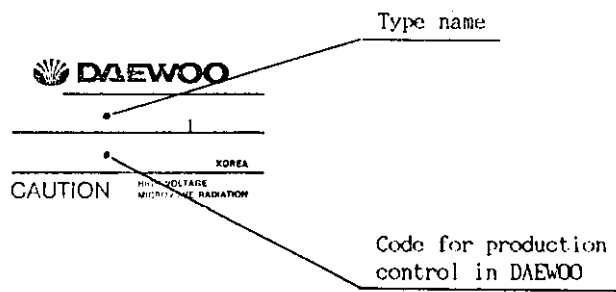

FCC/IBELL/TV

OCT 22 1998

518 37 1338 FCC/IBELL/TV

DEC 23 1998

7. Specification of TOSHIBA Magnetron of 2M254

▶ FCC ID : C5F7NF86MO9000 ◀

TOSHIBA

TOSHIBA HOKUTO ELECTRONICS CORPORATION
MAGNETRON QUALITY ASSURANCE GROUP, MAGNETRON DIVISION
1975, 23-CHOME MINAMI 5-JODORI, ASAHIKAWA, HOKKAIDO 078, JAPAN
PHONE (0166) 31-8500 FACSIMILE (0166) 31-8209

To : DAEWOO ELECTRONICS CO., LTD.

APPROVAL SIGNATURE

SPECIFICATION

FOR
MAGNETRON
2M254



Yoichi Terabayashi

MANAGER,
MAGNETRON QUALITY ASSURANCE GROUP
MAGNETRON DIVISION

| | | |
|------------------------|-------------|-------------------|
| SPECIFICATION NUMBER : | E960014-D01 | January 24 , 1996 |
| REVISION STATUS : | REVISION A | February 28, 1996 |
| | REVISION B | June 21, 1996 |
| | REVISION C | July 17, 1997 |
| | REVISION D | June 16, 1998 |

REFERENCE FOR THIS SPECIFICATION

MAGNETRON ENGINEERING DEPARTMENT
1975, 23-CHOME, MINAMI 5-JODORI, ASAHIKAWA, HOKKAIDO 078, JAPAN
PHONE : (0166) 31-4728 FACSIMILE : (0166) 35-5671

MAGNETRON SPECIFICATION

This specification is based on the testing methods for continuous wave magnetrons ED-1501 set by the Electronic Industries Association of Japan (EIAJ).

| Continuous Wave Magnetron | | | | | | | | | | | | |
|-----------------------------------|-----------------------------------------------------------------|---------------------------------|------------------------------|-------|-------|------|--------|------------|-----|-------|----------|-------|
| DESCRIPTION | Magnetron (Fixed Frequency, Integral Magnet, Forced Air Cooled) | | | | | | | | | | | |
| FUNCTION | 2450 MHz band continuous wave oscillation | | | | | | | | | | | |
| OUTER DIMENTIONS | See outline drawing | | | | | | | | | | | |
| ABSOLUTE MAXIMUM RATINGS | Term | Ef | tk | ebm | lb | ibm | Pi | σ_L | Tp | Tcase | Tstorage | Tseal |
| | Unit | V | s | kV | mAdc | A | kW | - | °C | °C | °C | °C |
| | Max | 3.75 | - | 4.5 | 350 | 1.2 | 1.4 | 4 | 300 | 100 | 60 | 320 |
| | Min | 2.85 | 0 | - | - | - | - | - | - | - | -30 | - |
| STANDARD TEST CONDITION: (°) | 3.3 | 5 | - | 300 | - | - | 1.1Max | - | - | - | - | - |
| TEST SPECIFICATIONS | | | | | | | | | | | | |
| TEST TERM (°) | TEST METHOD (EIAJ ED-1501) | TEST CONDITION | SYMBOL | BOGIE | LIMIT | | UNIT | | | | | |
| | | | | | Min | Max | | | | | | |
| ** Vibration | 5.4.1 | | - | - | - | - | - | | | | | |
| Breakdown Voltage | 4.2 | Et=10kVdc or 8kVac (rms) | - | - | - | - | - | | | | | |
| Insulation | - | Et=1kVdc (°) | - | - | - | - | - | | | | | |
| * Cold Start Voltage Transient | - | (°) | - | - | - | - | kV | | | | | |
| * Filament Current | 4.1.1 | tk=120s | If | 10.5 | 8.5 | 12.5 | A | | | | | |
| Peak Anode Voltage | 4.3.1 | (°) | ebm | 4.20 | 4.05 | 4.40 | kV | | | | | |
| Average Output Power (1) | 4.3.3.1 | (°) | Po | 900 | 860 | 940 | W | | | | | |
| * Average Output Power (2) | 4.3.3.2 | $\sigma_L=4$, Power Min (°) | Po | - | 510 | - | W | | | | | |
| Frequency | 4.3.4 | (°) | f | 2460 | 2450 | 2470 | MHz | | | | | |
| * Stability/Moding | 4.3.11.2 | $\sigma_L=2,3,4$ | - | - | - | - | - | | | | | |
| * Stability/Runaway | 4.3.11.1 | $\sigma_L=6$, t=30s | - | - | - | - | - | | | | | |
| * Pulling Factor | 4.3.6 | $\sigma_L=2$ | fpl | - | - | 26 | MHz | | | | | |
| * Sink Phase | 4.3.7 | $\sigma_L=2$ | $\lambda^{sink} / \lambda_g$ | 0.200 | - | - | - | | | | | |
| ** Life Test | 4.5.1 | (°) | t | - | 500 | - | h | | | | | |
| ** Life Test End Point | Average Output Power (1) | 4.3.3.1 | (°) | Po | - | 680 | - | W | | | | |
| | Stability/ Moding | 4.3.11.2 | $\sigma_L=2,3,4$ | - | - | - | - | | | | | |
| | Stability/ Runaway | 4.3.11.1 | $\sigma_L=6$, t=30s | - | - | - | - | | | | | |

MAGNETRON SPECIFICATION

Note (1) The tube shall be mounted on the output coupler (containing tapered waveguide) shown in the attached drawing (Page-4) and cooled by forced air of 800 #/min. Single phase full wave rectifier without filter shall be used for power supply. The diagram of the test equipment is shown in the attached drawing (Page-3).

- (2) During normal oscillation.
- (3) The points for measuring anode temperature is shown in the outline drawing. Maximum anode temperature for normal condition (with load in the cavity) should be 250 °C
- (4) The point for measuring filter case temperature is shown in the outline drawing.
- (5) Tseal means temperature of ceramic-to-metal seal position of the tube. Maximum allowable build-up curve of seal temperature is shown in the attached drawing (Page-5).
- (6) Tests shall be classified as follows:

| Class | Mark † | Remarks |
|--------------------|--------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Production test | None | This test is intended to ensure if the production line is being processed in compliance with the standard, and shall be conducted on some typical characteristics which are considered to be affected by changes in the process. |
| Design test | * | This test is intended to ensure the standard design, and shall be conducted on such characteristics which are not affected by the ordinary production line as long as the design is maintained. |
| Type approval test | ** | This test is intended to ensure the compliance of the standard design with given specifications, and may be omitted unless a substantial change in the design is made. |

† : The Mark is placed on the left of each test item, for instance, **Vibration

- (7) See the attached drawing (Page-5, Insulation).
- (8) Measurement shall be conducted by standard oven which has a single phase half wave doubler power supply without filter, where no load voltage of the transformer shall be less than 2.2 kV rms. The voltage transient just before start of oscillation shall be measured.
- (9) Measurement shall be conducted within 15 seconds after anode power is turned on. Magnetron is kept in the constant ambient temperature for more than 4 hours before testing. Standard ambient temperature is 25 °C. Correction factor of peak anode voltage (ebm) and output power (Po) vs. temperature is shown in the attached drawing (Page-5).
- (10) For each oven model, both microwave oven manufacturer and Toshiba Hokuto should evaluate and agree on the stability characteristics in the design stage of the oven.
- (11) The tube shall not appreciably be damaged in the following abnormal test.


Condition:

| Anode temperature (Tp) | Cycle (Time) | Corresponding operating condition |
|------------------------|-------------------------------|-----------------------------------|
| 350 °C MAX | 5 cycles (15minutes/cycle) | No Load |

MAGNETRON SPECIFICATION

TEST EQUIPMENT


A. Waveguide configuration

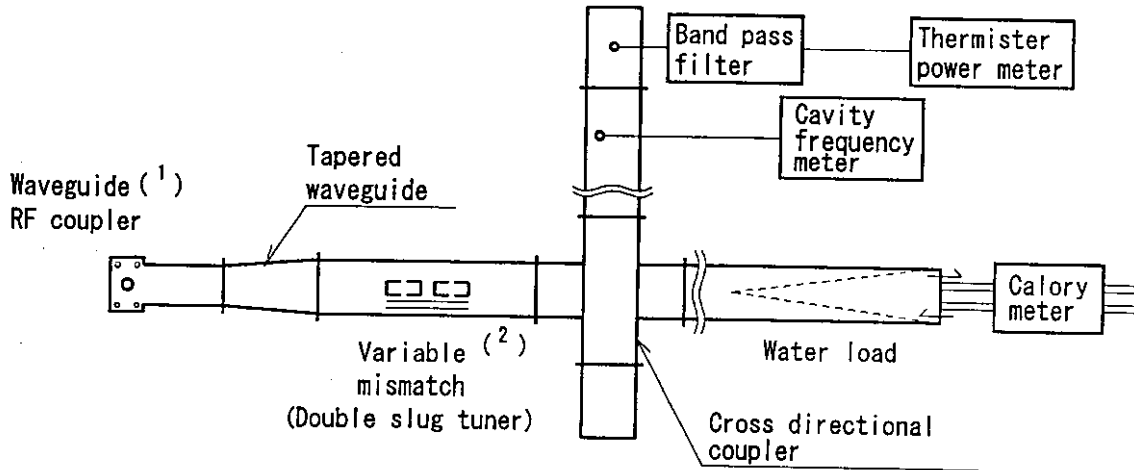

Note

- (1) Details are shown in the attached drawing (Page-4).
- (2) Calibrated with the standard standing wave detector.
- (3) WR430 waveguides are used from the double slug tuner to the water load.

B. Power supply connection

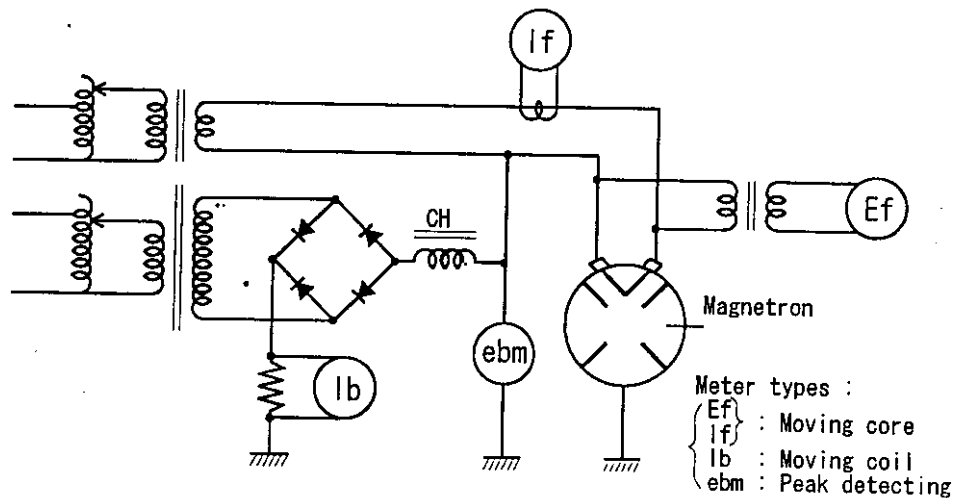

Note

- (1) Choke coil is adjusted such that the peak anode current value becomes three times the average value.


MAGNETRON SPECIFICATION

FILAMENT CONNECTION

To minimize possible transient voltage, the terminals (F) and (FA) should be connected to the transformer in such a way that the anode voltage increases and anode current decreases compared with those for reversed connection when a single phase half wave doubler without filter is used as a power supply.


OUTPUT COUPLER (The output coupler used in Toshiba Hokuto inspection)

Unit : mm

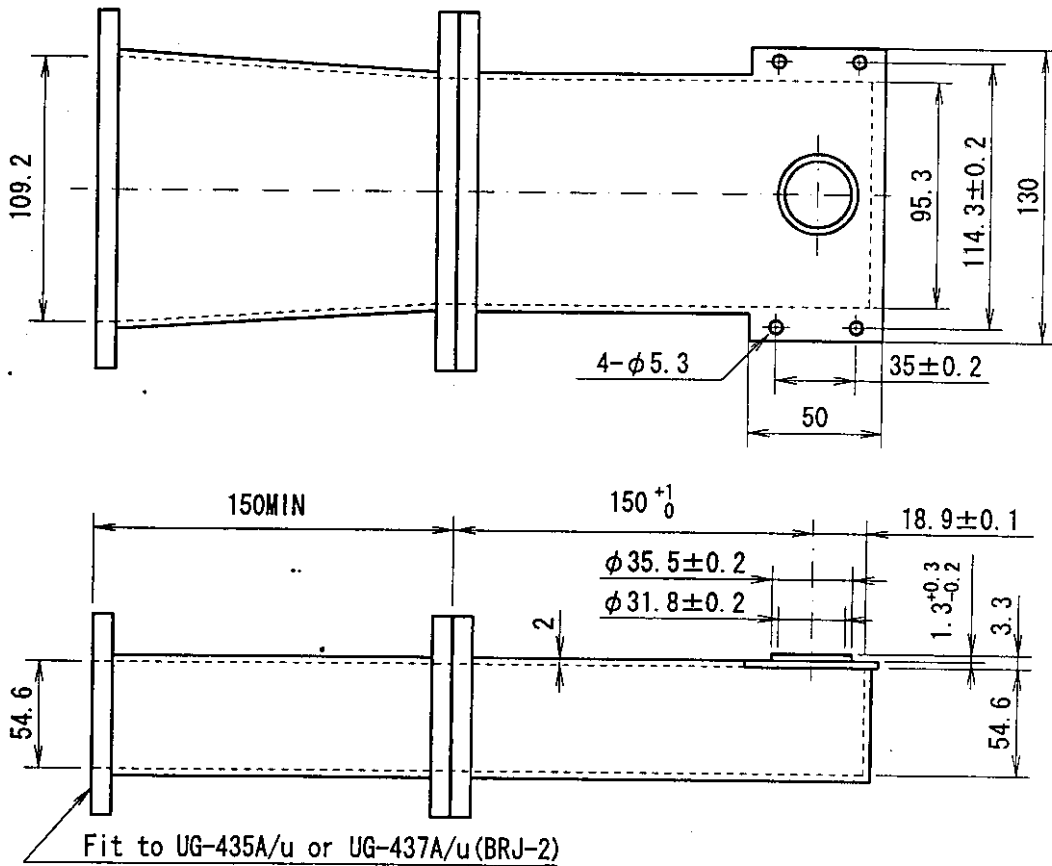


MAGNETRON SPECIFICATION


MAXIMUM ALLOWABLE BUILD-UP
CURVE OF SEAL TEMPERATURE

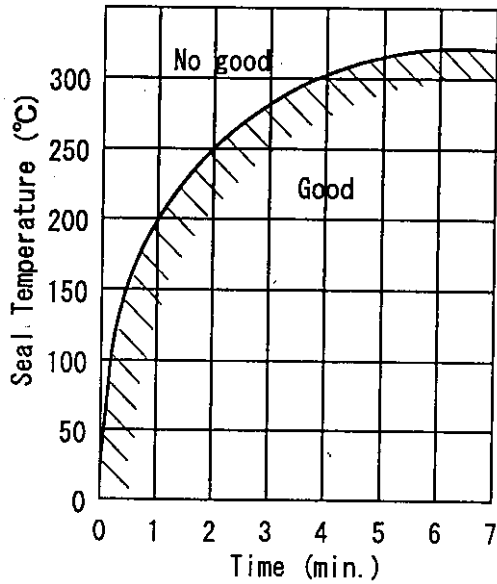

INSULATION

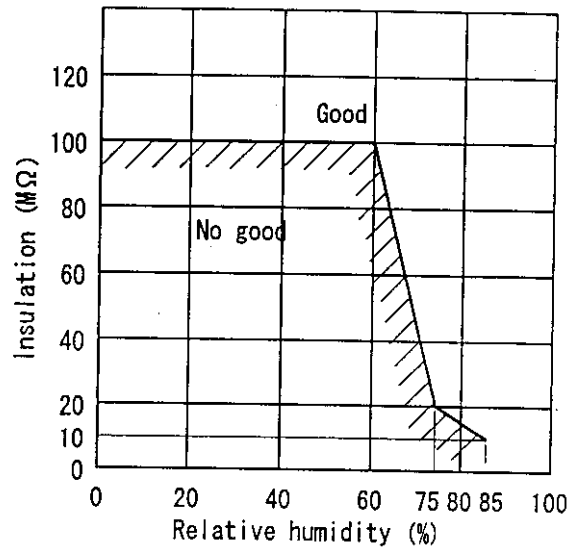

CORRECTION FACTOR OF PEAK ANODE VOLTAGE (ebm)
AND OUTPUT POWER (Po) VS. AMBIENT TEMPERATURE

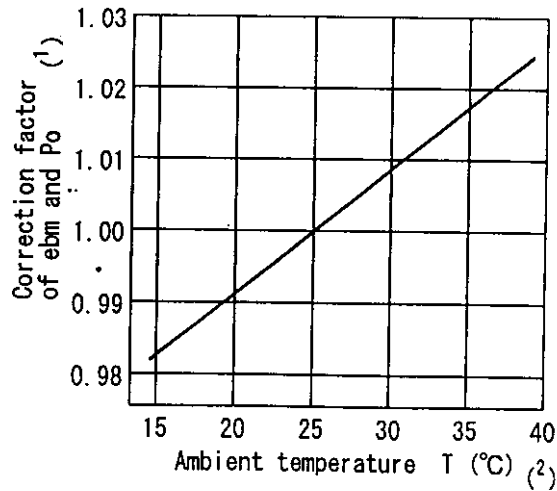



Note

- (1) $\text{ebm (or } P_o) \text{ measured at } T \text{ } ^\circ\text{C} \times \text{Correction factor at } T \text{ } ^\circ\text{C} = \text{ebm (or } P_o) \text{ at } 25 \text{ } ^\circ\text{C}$
- (2) The temperature shown in this figure is the constant room temperature in which the magnetron has been kept for more than 4 hours before testing.

MAGNETRON SPECIFICATION

OUTLINE DRAWING (Made in JAPAN)



Unit : mm

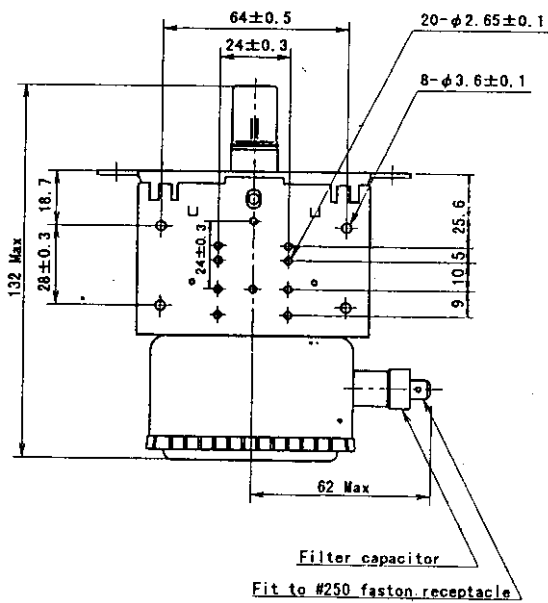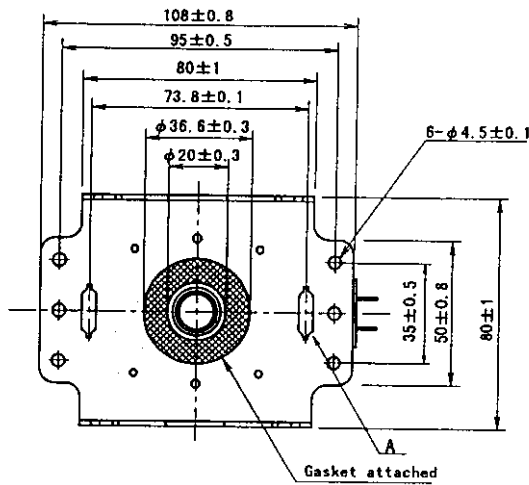

Note(1) Temperature to be measured at the outlet side of air flow.

(2) Refer filament connection.


(3) "F" and "FA" are marked at these positions.

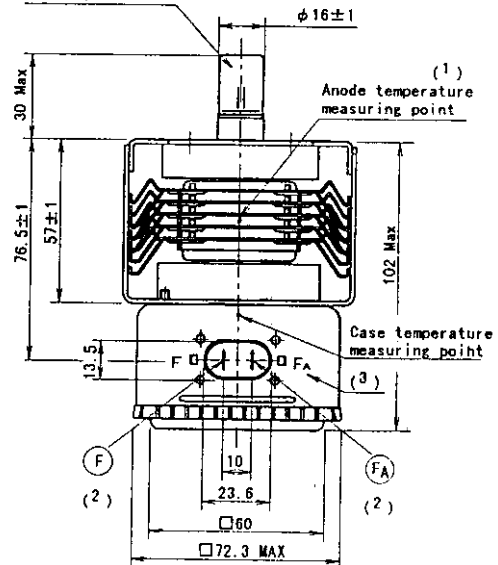

MAGNETRON SPECIFICATION

OUTLINE DRAWING (Made in UK)




Unit : mm

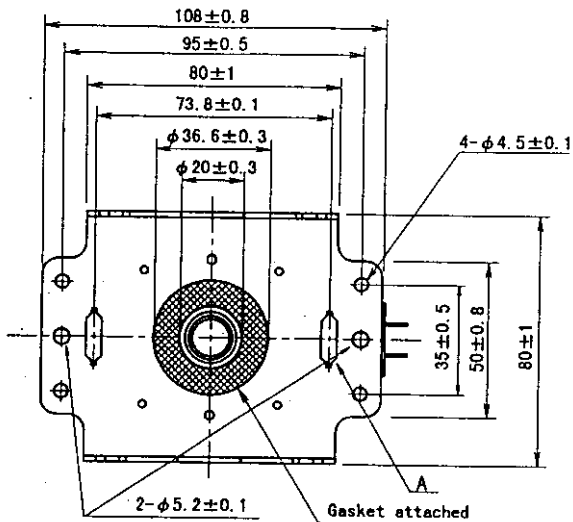

Note(1) Temperature to be measured at the outlet side of air flow.

(2) Refer filament connection.

(3) "F" and "FA" are marked at these positions.

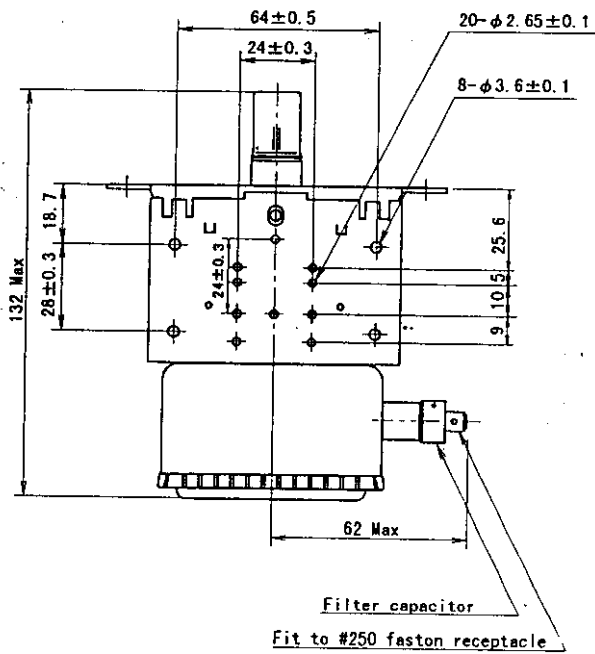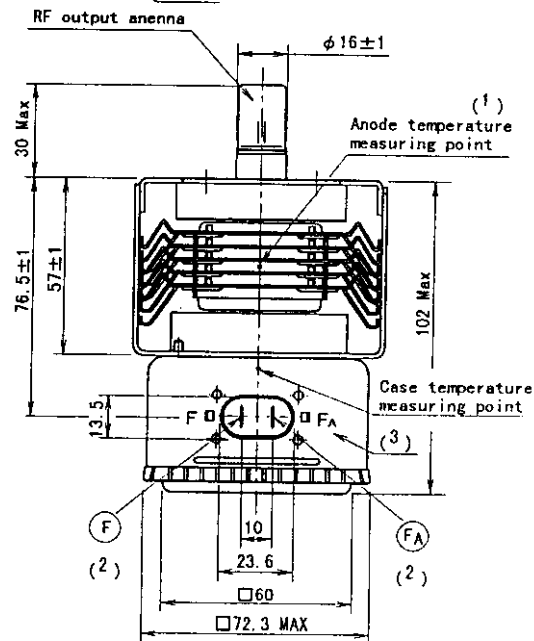

MAGNETRON SPECIFICATION

LABEL

The label as shown below shall be put on each tube.


The code stamped on the indicated position of each label consists of three block numbers ;

The first block is the serial number of tube with data. The second block is the date code in which the preceding one numeral shows the last of Christian Era and the continuing block letter and two numerals indicate the three months after the scheduled date of shipment from Japan or UK.

The third block is the numerals only for the production control in Toshiba Hokuto.

Type name

Serial number of (1) tube with data



Code for production control in Toshiba Hokuto

Date code

- A : January
- B : February
- C : March
- D : April
- E : May
- F : June
- G : July
- H : August
- J : September
- K : October
- L : November
- M : Decemver

Note




(1) In case of a sample requirement only

Sample

(Made in Japan)

(Made in UK)


Labeling

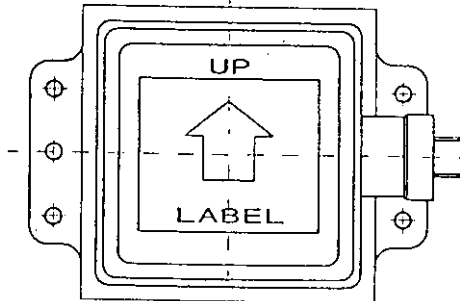

MAGNETRON SPECIFICATION

SPACING IN THE FILTER BOX


Unit : mm

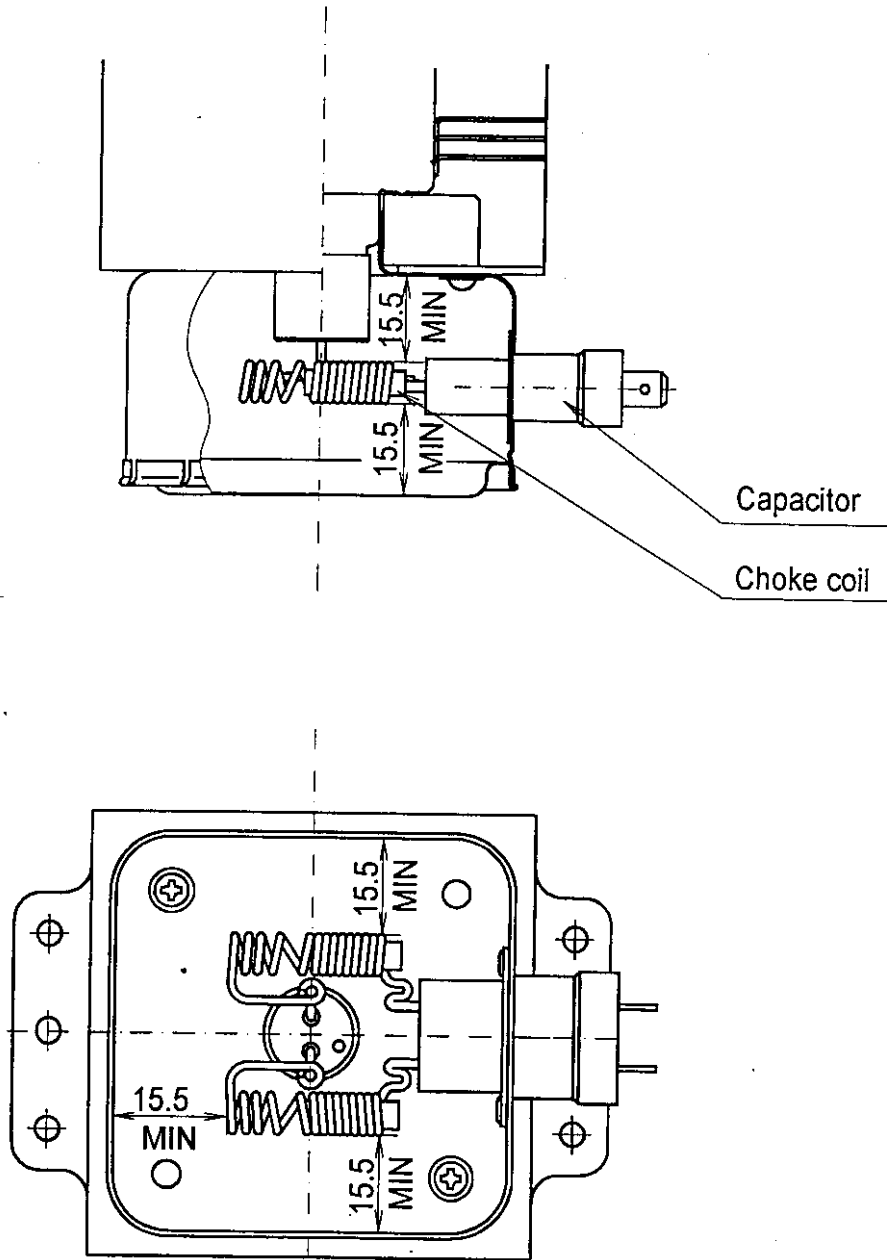

MAGNETRON SPECIFICATION

DETAILS OF FILTER CAPACITOR

Unit : mm

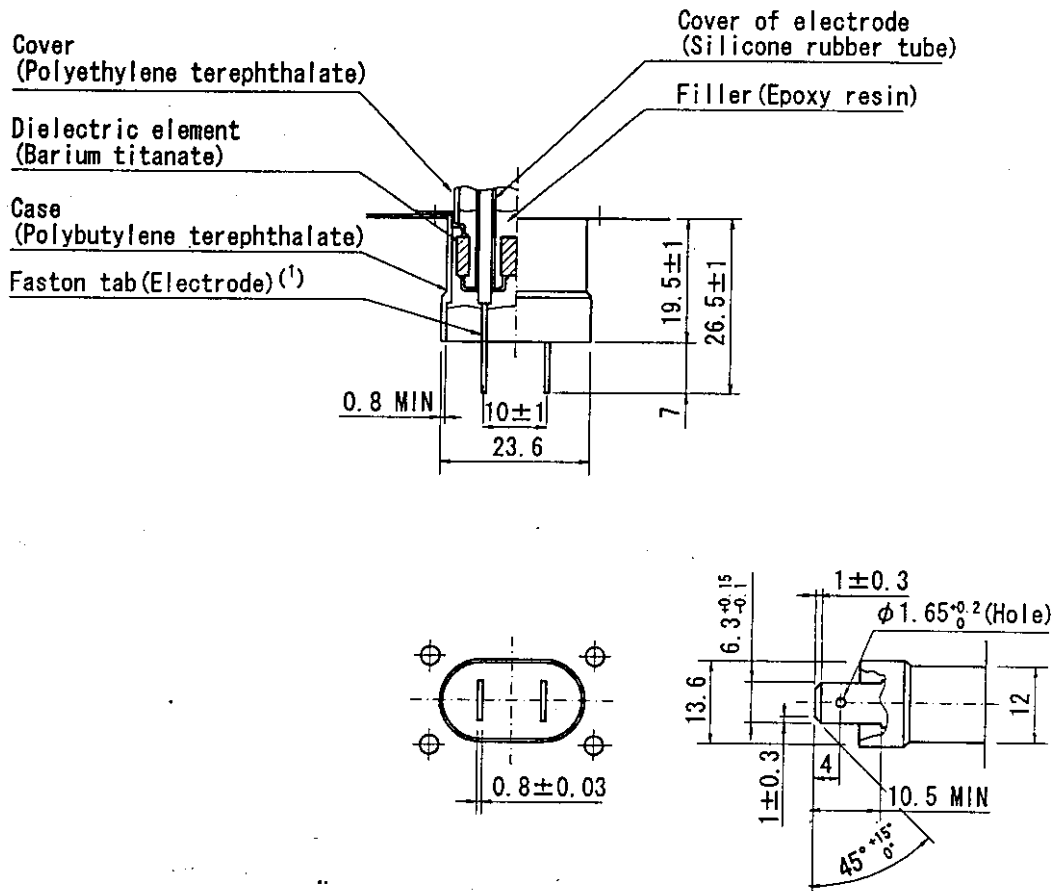

Note

(1) The faston tab meets to BS 5057 ; 1973 and DIN 46 244 ; April 1980.

MAGNETRON SPECIFICATION

INSULATING MATERIAL (Refer Page-8 & 9)


| Part Name | Catalog No./ Manufacturer (^②) | Material | Manufacturer of Materials | UL No. (^①) | | |
|------------|------------------------------------------------------------------------------------------|-------------------------------|----------------------------------------------------------------------------------------------------------------------------------------|-------------------------|-------------|--------------|
| | | | | Guide No. | File No. | Grade No. |
| Capacitor | Toshiba Hokuto Spec. | Barium Titanate | TDK Corp. | - | - | - |
| | | Epoxy Resin | Ditto | - | - | - |
| | HFC-2L-3/ TDK Corp. | Silicone Rubber Tube | Shin-etsu Chemical Co., Ltd. or Toshiba Silicone Co., Ltd. | - | - | - |
| | | Polyethylene Terephthalate | Teijin Ltd. | QMF-Z2 | E52857M | CN9015 |
| | | Polybutylene Terephthalate | Mitsubishi Rayon Co., Ltd. | QMF-Z2 | E54695M | G2930 |
| Choke coil | Toshiba Hokuto Spec. Marsan Corporation. or Kokusen Bane Co., Ltd. | Ferrite | Tomita Electric Co., Ltd. or Hitachi Ferrite Co., Ltd. or Fuji Denki Kagaku Co., Ltd. or NWE Industrial Co., Ltd. | - | - | - |
| | | Formal Coated Wire | Daiichi Denko Co., Ltd. or Showa Electric Wire & Cable Co., Ltd. or TAI-I Electric Wire & Cable Co., Ltd. | - | - | - |
| | | Silicone Rubber | Toshiba Silicone Co., Ltd. | - | - | - |

Note

- (^①) UL No. is for the material.
- (^②) One of them shall be used by Toshiba Hokuto's option.

MAGNETRON SPECIFICATION

FILTER CIRCUIT

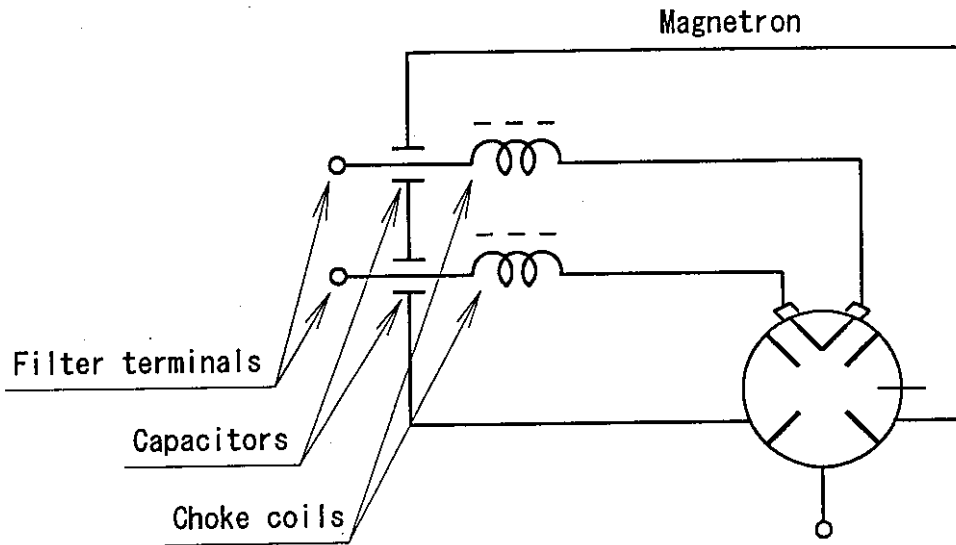

RATING


| | Nominal value | Remarks |
|----------------------------|-------------------|---------------|
| Capacitor | 500pF×2 WV 10kVdc | - |
| Choke coil (13.5 turns) | 1.2μH×2 | at about 8MHz |

MAGNETRON SPECIFICATION

GASKET

Unit : mm

Material : Woven and press formed brass wire

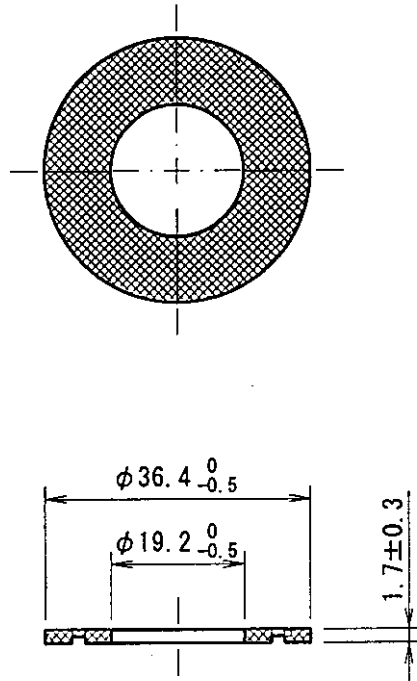

Inspection : By using thick part of slide calipers

MAGNETRON SPECIFICATION

PRECAUTIONS FOR SAFETY

Carefully take the following precautions for safety in using the magnetrons for microwave ovens or for other applications.

Magnetrons must be handled by individuals possessing adequate backgrounds of electrical, electronic, microwave and mechanical experience.

Toshiba Hokuto Electronics Corporation cannot be responsible for the interpretation of this information, nor can it be assumed any liability in connection with its use.

1. High Voltage

Since the magnetron is operated with negative high potential at the cathode terminals, a special care must be taken as follows.

- 1-1 Do not touch nor come close to the cathode terminals or their surroundings during operation.
- 1-2 To avoid shock hazards, never insert metallic wire or like into the filter box, and never operate the magnetron with the lid of filter box open.
- 1-3 Before removing the magnetron from the oven, carefully check that power is turned off, and discharge the cathode terminal or the capacitors in the power supply circuit by using the discharging rod adequately designed for safety.

2. Radiation Leakage

Care should be taken for radiation leaked from the magnetron, though the leakage from the input part of magnetron is restricted to a level which human body is not adversely affected.

- 2-1 Properly install and tightly fasten the magnetron in the oven or in the waveguide coupler.
- 2-2 Do not deform the gasket or do not operate the magnetron with the gasket removed, to avoid hazardous conditions such as radiation leakage and arcing.
- 2-3 Never operate the magnetron without installing it in the oven or with the output antenna exposed.
- 2-4 Do not remove the lid of the filter box nor deform the filter box.
- 2-5 Always keep your eyes apart from the operating magnetron in consideration of the unexpected hazardous conditions.

3. Temperature

Although the magnetron is subjected to forced air cooling during operation, high temperature (sometimes more than 200 °C) is observed on the enclosure of magnetron. Care should be taken as follows.

- 3-1 Do not touch the magnetron immediately after turning power off. Allow the magnetron to cool before handling.
- 3-2 Putting on cotton gloves or the equivalents is recommended for safe handling.

4. Alteration

Do not alter the magnetron.

MAGNETRON SPECIFICATION

Factories

- (1) Toshiba Hokuto Electronics Corporation
23-chome 1975, Minami 5-jo, Asahikawa, 078, Japan
Phone : (0166) 31-4728
Facsimile : (0166) 35-5671

- (2) Toshiba Consumer Products (U.K.) Ltd.,
Northolt Avenue, Emesettle, Plymouth, Devon, England, PL5 2TS
Phone : (01752) 208549
Facsimile : (01752) 205270

MAGNETRON SPECIFICATION

RECORD OF REVISION

Original Specification : E960014-D01 January 24, 1996

| STATUS | PAGE | REVISION | NOTES | EFFECTIVE DATE |
|------------|----------------|-----------------------------------------------------------------------------------------------------|------------------------------------------|-------------------|
| Revision A | 7 | LABEL Change of Label | As per Daewoo's request | February 28, 1996 |
| Revision B | 6 | Addition of holes for mounting thermoswitch | As per Toshiba Hokuto's request | June 21, 1996 |
| | | Length from antena top to filter box lid 131MAX → 132MAX | Correction | |
| | | Length from york to filter box lid 101MAX → 102MAX | | |
| Revision C | 1 | TEST CONDITION of Average Output Power(1) Bogie ; 890 → 900 , Min ; 850 → 860 Max ; 930 → 940 | Correction | July 17, 1997 |
| | 7 | LABEL Addition of Label made in UK | As per Daewoo's request | |
| | 14 | Addition of factories | As per Daewoo's request | |
| Revision D | 2 | Change of LIFE TEST CONDITION 320°C MAX → 350°C MAX | As per Toshiba Hokuto's request | July, 1998 |
| | 6 | Change of title Outline drawing (Made in Japan) | Change of hole size (made in UK only) | |
| | 6-1 | Addition of page Outline drawing (Made in UK) | | |
| | | Change of page | Due to addition of page | |