



EMISSION TEST REPORT

Test report file No. : **04-IST-0014/FB** Date of issue : Feb. 2, 2004

Model / Type No. : DPS-5014LXS Basic Alternate

Kind of product : PDP(Plasma Display Panel)

Brand name : DAEWOO

Applicant : Daewoo Electronics Corp.

Manufacturer : Daewoo Electronics Corp.

License holder : Daewoo Electronics Corp.

Address : 543, Dangjeong-dong, Gunpo-shi, Gyonggi-do, Korea

Test result according to the regulation(s)

Positive Negative

at page 3.

This test report with appendix consists of 17 pages. The test result only responds to the tested sample. It is not allowed to copy this report even partly without the allowance of the Test Laboratory. This equipment is complied with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in ANSI C63.4:2001.

DIRECTORY

A) Documentation.		Page
Directory		<u>2</u>
Test regulations		<u>3</u>
Information of Test Regulation		<u>3</u>
Equipment under Test		<u>4</u>
Test Conditions		<u>5 ~ 6</u>
Test Result		<u>7</u>
Measurement Uncertainty		<u>8</u>
Test-setup		<u>9 ~ 11</u>
Summary		<u>17</u>
B) Test Data.		
Conducted emissions (Mains)	: 150 kHz - 30 MHz	<u>12 ~ 14</u>
Radiated emissions	: 30 MHz – 1 GHz	<u>15 ~ 16</u>
C) Appendix		

TEST REGULATIONS

The tests were performed according to the following regulations ;

- - FCC Part 15, Subpart B (Unintentional Radiators, Class B)

Information of Test Laboratory

IST EMC Lab.

San 21-8 Goan-Ri, Baekam-Myun, Yongin-Si, Kyunggi-Do, Korea
International - Tel : 82-31 - 333 - 4093. Fax : 82-31 - 333 - 4094.
Domestic - Tel : 031 - 333 - 4093. Fax : 031 - 333 - 4094.

EQUIPMENT UNDER TEST

Equipment Description :

Diagonal Size :	126cm(50")
Dimensions :	48.11(W) x 29.06(H) x 3.70(D) inches.
Display Resolution :	1366(H) x 768(V)mm
Video Signal :	NTSC, PAL, SECAM, PAL-M/N, NTSC4.43
Power Requirement :	AC 100 ~ 240V, 50/60Hz, 550W
External port :	PC D-sub IN(1), PC DVI-D IN(1) Component IN(2) Video IN(2), S-Video IN(2), Speaker Out(2)
Weight :	105.8 Lbs

EUT Type :

- Table-Top.
 Floor-Standing.
 Table-Top and Floor-Standing(Combination).

Operation – mode of the E.U.T. :

The equipment under test was operated during the measurement under following conditions :

- Standby.
 Operational Condition : Scrolling “H” characters under MS Windows,
 at test mode of 1600 X 1200, 75 Hz

Configuration of the equipment under test :

Following peripheral devices and interface cables were connected during the measurement :

Equipment	Type	Brand	Serial No.
PC	Vectra VL420MT	HP	SG23101785
Keyboard	SK-2502C	HP	M020321157
PS/2 Mouse	M-S48A	HP	LZE20602910
Printer	A0302384	Northern Telecom	26633S60168
Serial Mouse	M-M28	Logitech	LCA53305547

Connecting Interface Cables & Ports :

- Unshielded AC power cable : 1.8m
- Shielded monitor's signal cable (with two ferrite core) : 2.8m
- Unshielded Speaker's cable (with one ferrite core) : 1.8m
- Unshielded RCA Audio cable : 1.5m (47k Ω termination)
- Unshielded RCA Video cable : 1.5m (75 Ω termination)
- Unshielded S-Video Cable : 1.5m (75 Ω , termination)

TEST CONDITIONS

The measurement of the conducted emissions (Interference voltage) was performed in a shielded room.

Test location :

Shielded room. No.1 Compact chamber 2

Used testing instruments :

Name	Type	Manufacturer	Calibration. Date	Serial Number
ESH 3	Test Receiver	Rohde & Schwarz	Jul. 22, 2003	892108/018
3725/2	LISN	EMCO	Jul. 23, 2003	9101-2068
KNW-407	LISN	Hyup-Rip	Jul. 23, 2003	8-883-10
ESH 3-Z2	Pulse Limiter	Rohde & Schwarz	Jul. 23, 2003	357.8810.52

Test - accessories :

Type	Manufacturer
Aneroid Barometer	Sato
Hygrometer	Sato

Measurement Procedures :

Conducted emissions measurements were made in accordance with ANSI C63.4:2001, "Method of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz". The measurement were performed over the frequency range of 0.15MHz to 30MHz using a 50Ω/50uH LISN as the input transducer to an EMI/Field Intensity Meter. The measurements were made with the detector set for "Peak" amplitude within an IF bandwidth of 10kHz or for "quasi-peak" within a bandwidth of 9kHz.

All used test-instruments as well as the test-accessories are calibrated regularly.

Test Engineer :



S.J. Oh / Research Engineer
IST EMC Lab.

The **measurement of the radiated emissions (Electric field)** in the frequency range from 30 MHz to 1GHz was performed in horizontal and vertical antenna polarization at a open-site which meet the site attenuation requirement of ANSI C63.4:2001 and a test distance of :

Location : Open Site No. 1 Open Site No. 2 Open Site No. 3
 Distance : 3 meters 10 meters

Used testing instruments :

Name	Type	Manufacturer	Calibration. Date	Serial Number
ESVP	Test Receiver	Rohde & Schwarz	Jul. 22, 2003	861744/004
VULB 9160	Antenna	Schwarzbeck	Jul. 09, 2003	3048

Test - accessories :

Type	Manufacturer
Aneroid Barometer	Sato
Hygrometer	Sato

Measurement procedures

Radiated measurements were in accordance with ANSI C63.4:2001 “Method of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz”. The measurements were performed over the frequency range of 30MHz to 1GHz using antenna as the input transducer to a EMI/Field Intensity Meter. The measurements were made with the detector set for “quasi-peak” within a bandwidth of 120kHz.

All used test-instruments as well as the test-accessories are calibrated regularly.

Test Engineer :



S.J. Oh / Research Engineer
 IST EMC Lab.

TEST RESULT

Conducted emissions : 150 kHz - 30 MHz

The requirements are.

KEPT NOT KEPT

Min. limit margin

_____ 9.6 dB at 1.346 MHz

Remarks : See test-data at pages 12 ~ 14.

Radiated emissions (electric field) 30 MHz - 1000 MHz

The requirements are.

KEPT NOT KEPT

Min. limit margin

_____ 3.2 dB at 41.5 MHz

Remarks : See test-data at page 15 ~ 16.

Measurement Uncertainty Calculation

The measurement uncertainties stated were calculated in accordance with the requirements of NIST Technical Note 1297 and NIS 81 (1994).

Contribution (Conducted Emissions)	Probability Distribution	Uncertainty (\pm dB)
		0.15-30MHz
Receiver Specification	Rectangular	1.5
LISN Coupling Specification	Rectangular	1.5
Cable and Input Attenuator Calibration	Normal (k=2)	0.5
Mismatch to Receiver	U-Shaped	-0.8 / +0.7
System Repeatability	Normal (k=1)	0.2
Combined Standard Uncertainty	Normal (k=2)	-1.85 / +1.71
Expanded Uncertainty U	Normal (k=2)	-3.7 / +3.42

$$U_{c,min us} = -1.85, U_{c,plus} = 1.71$$

$$U = -3.70 / +3.42 \text{ (k=2, 95.45\% confidence level)}$$


Contribution (Radiated Emissions)	Probability Distribution	Uncertainties(\pm dB)
		3 m
Antenna		
Factor	Normal (k=2)	0.9968
Frequency Interpolation	Rectangular	0.1039
Height Variation	Rectangular	-2.6 / +1.5
Directivity Difference	Rectangular	-1.0 / +0
Phase Center Location	Rectangular	1.0
Cable Loss	Normal (k=2)	0.5
Receiver		
Voltage Accuracy	Normal (k=2)	2.0
Pulse Response	Rectangular	1.5
Absolute Repetition Rate	Rectangular	1.5
Mismatch to Receiver		
$ \Gamma_{antenna} = 0.33$	U-Shaped	-1.0 / +0.9
$ \Gamma_{receiver} = 0.33$		
System Repeatability	Std Deviation	0.5
Combined Standard Uncertainty	Normal	-2.6048 / 2.2775
Expanded Uncertainty U	Normal (k=2)	-5.21 / +4.55

$$U_{c,min us} = -2.6048, U_{c,plus} = 2.2775$$


$$U = -5.21 / +4.55 \text{ (k=2, 95.45\% confidence level)}$$

TEST SETUP (Drawings)

Type : DSP-5014LXS

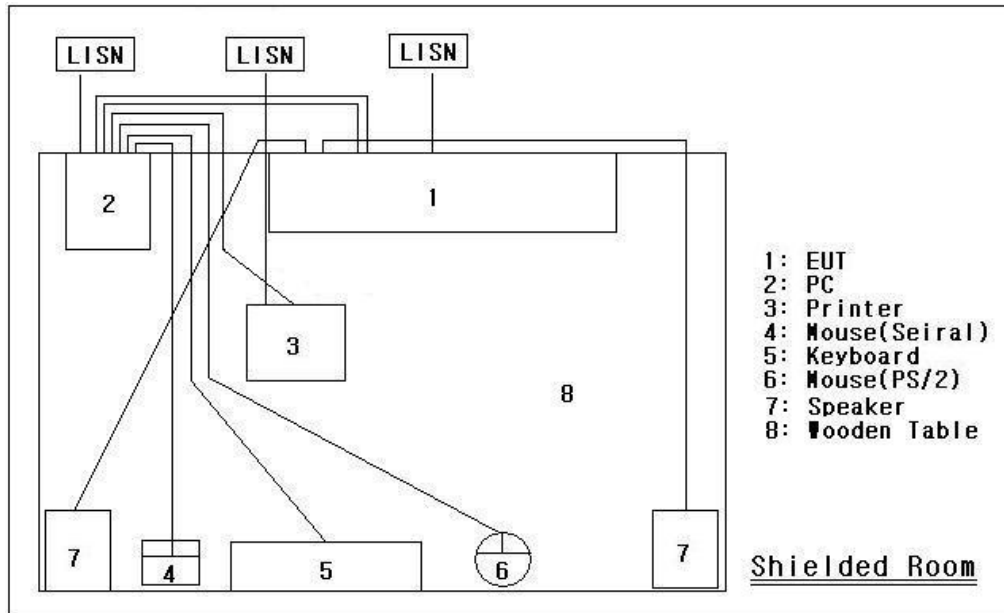

Conducted Emissions 150kHz - 30 MHz

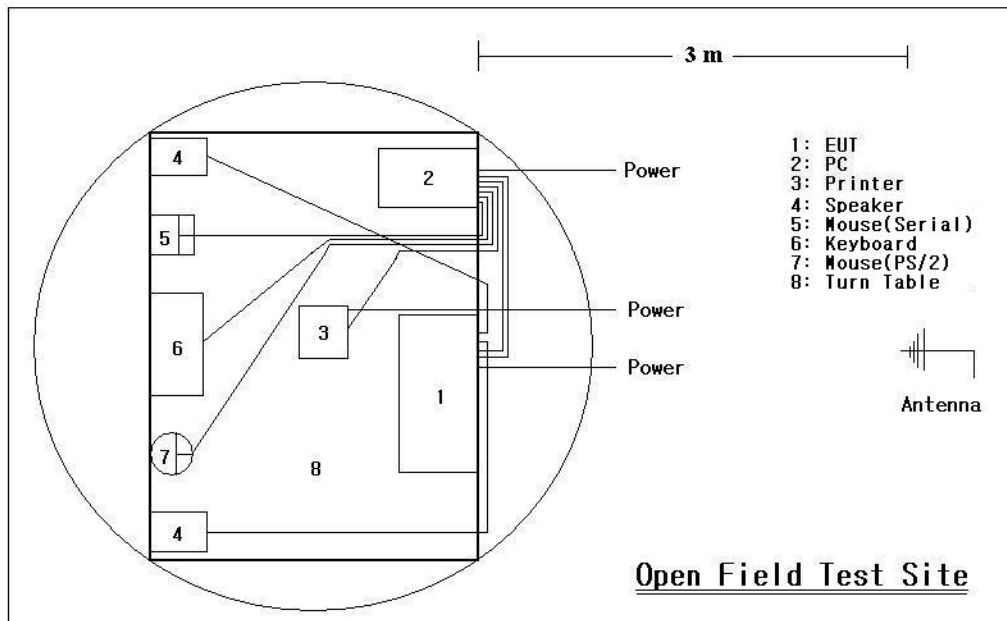


Radiated Emissions 30 MHz - 1000 MHz

TEST SETUP (Photos)

Type : DSP-5014LXS



Conducted Emissions 150kHz - 30 MHz

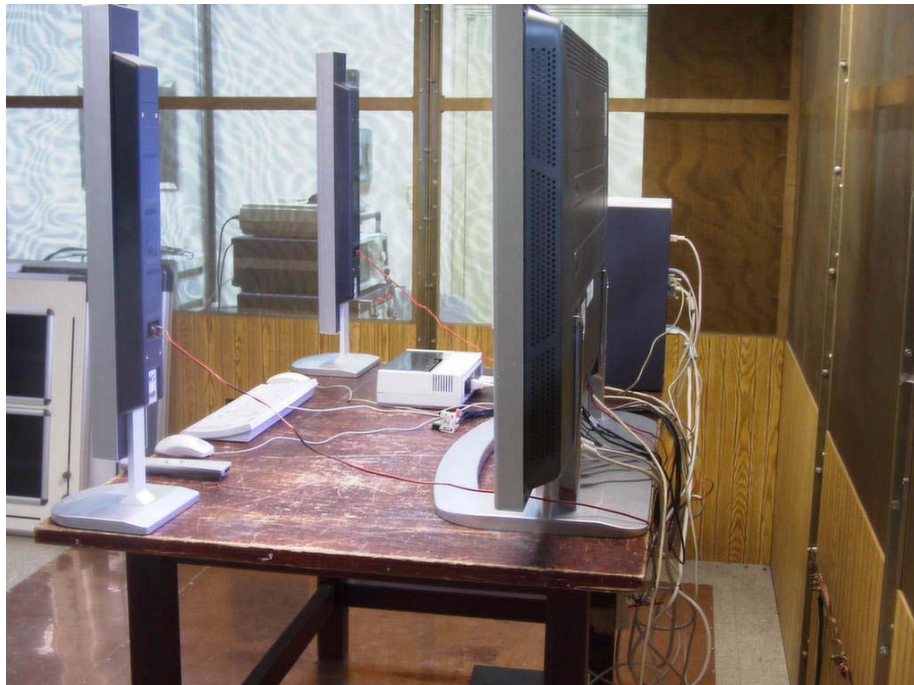

TEST SETUP (Photos)

Type : DSP-5014LXS



Radiated Emissions 30MHz - 1000 MHz



Conducted Emission Test Data

Type DSP-5014LXS
 Manufacturer Daewoo Electronics Corp.
 Operation mode Scrolling "H" pattern display at 1600 x 1200, 75Hz
 Environmental Conditon Temperature : 18 °C
 Humidity : 40 %
 Atmospheric pressure : 1014 mbar
 Date Jan. 27, 2004

Highest Emissions ralative to the limit

Frequency [MHz]	Reading [dB μ V]		Phase	Insertion Loss (LISN)	Limit [dB μ V]		Margin [dB]	
	Q-peak	AV			Q-peak	AV	Q-peak	AV
0.150	51.3	34.8	L1	0.8	66.0	56.0	13.9	20.4
0.192	42.8	27.3		0.8	63.9	53.9	20.3	25.8
0.962	44.3	13.2		0.8	56.0	46.0	10.9	32.0
1.346	45.6	14.6		0.8	56.0	46.0	9.6	30.6
5.192	30.3	6.9		0.8	60.0	50.0	28.9	42.3
10.113	33.8	9.5		0.8	60.0	50.0	25.4	39.7
0.150	50.9	34.3		N	0.8	66.0	56.0	14.3
0.192	41.3	27.1	0.8		63.9	53.9	21.8	26.0
0.962	44.8	17.2	0.8		56.0	46.0	10.4	28.0
1.346	45.6	17.3	0.8		56.0	46.0	9.6	27.9
5.192	34.2	13.6	0.8		60.0	50.0	25.0	35.6
10.113	34.2	13.6	0.8		60.0	50.0	25.0	35.6


Cable loss are less than 0.1 dB


*L1 : Live Line

**N : Neutral Line

*** Please refer to data graphs at page 13 ~ 14.

Coverage factor of k=2 will ensure that the level of confidence will be approximately 95.45%,
 Uncertainty U = -3.70 / +3.42 [dB]

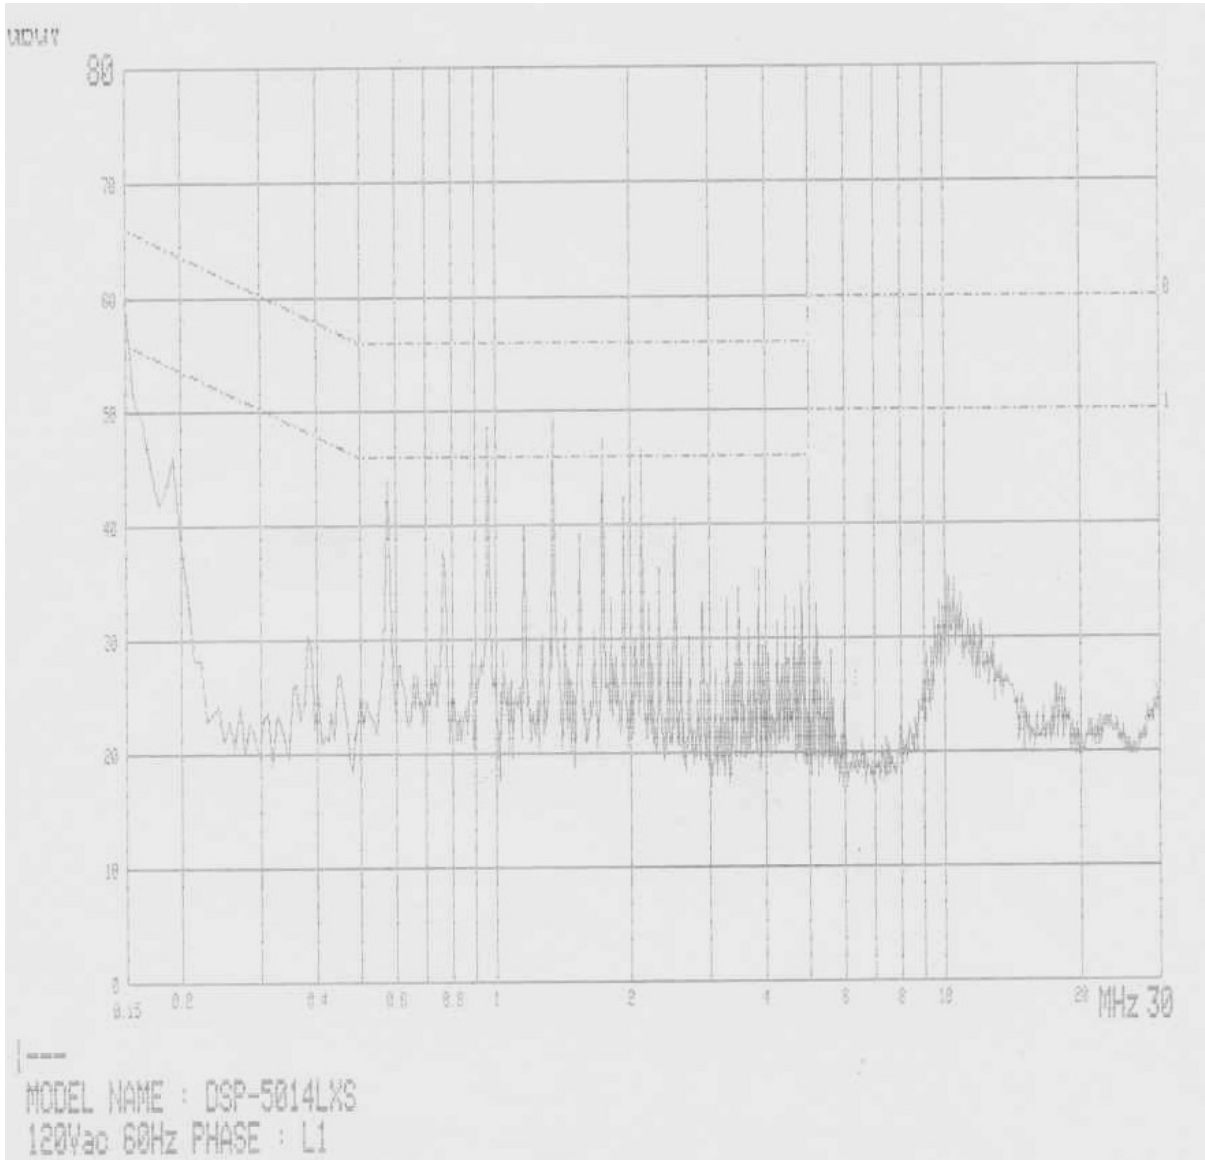

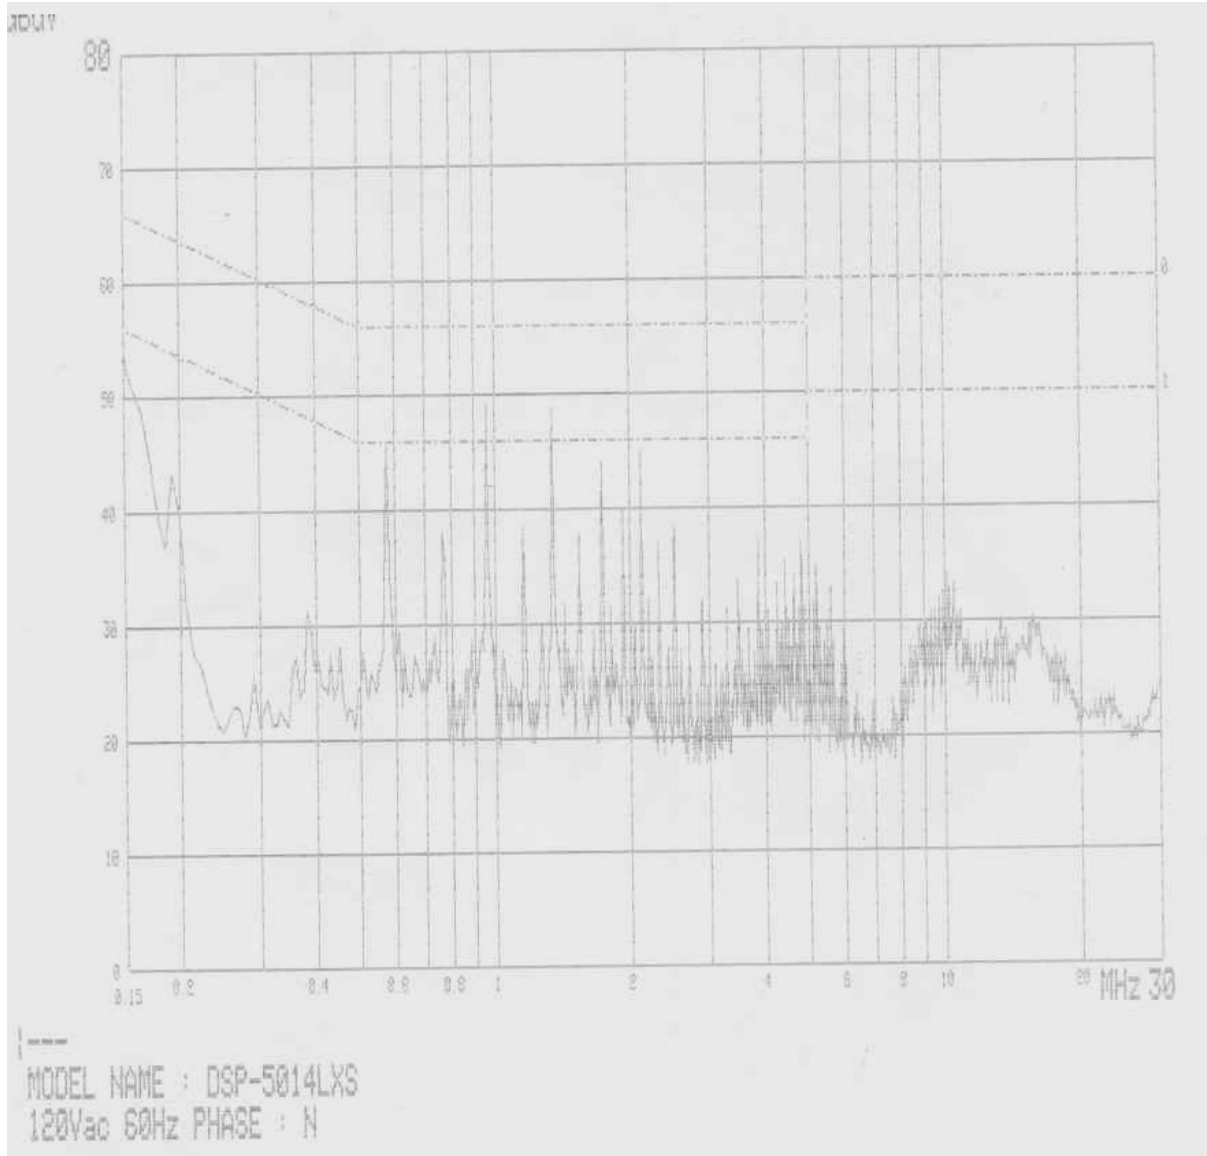


Radiation Test Data

Type	DSP-5014LXS
Manufacturer	Daewoo Electronics Corp.
Operation mode	Scrolling "H" pattern display at 1600 x 1200, 75Hz
Environmental Condition	Temperature : 16 °C
	Humidity : 35 %
	Atmospheric pressure : 1014 mbar
Test distance	3 m
Antenna	VULB9160
Date	Jan. 30, 2004

Freq. [MHz]	Reading [dBuV]	Antenna Factor [dB]	Cable Loss [dB]	Angle [deg]	Height [cm]	Polar [H/V]	Result [dBuV]	Limit [dBuV]	Margin [dB]
41.5	23.0	12.6	1.2	274	100	H	36.8	40.0	3.2
67.1	17.5	10.2	1.5	108	100	V	29.2	40.0	10.8
70.8	21.5	9.6	1.6	163	100	V	32.7	40.0	7.3
144.0	13.4	11.8	2.2	211	100	V	27.4	43.5	16.1
160.7	10.2	12.3	2.3	296	105	V	24.8	43.5	18.7
173.7	11.2	11.8	2.4	298	345	V	25.4	43.5	18.1
189.8	20.9	9.2	2.4	160	350	V	32.5	43.5	11.0
215.8	17.1	8.4	2.6	185	100	V	28.1	43.5	15.4
246.9	10.4	10.5	2.8	135	100	H	23.7	46.0	22.3
266.3	12.7	11.4	2.9	320	100	V	27.0	46.0	19.0
288.1	15.3	11.8	3.1	298	100	H	30.2	46.0	15.8
336.7	16.5	11.7	3.4	148	100	H	31.6	46.0	14.4
360.8	14.6	11.7	3.6	257	100	H	29.9	46.0	16.1
432.1	14.3	13.6	4.4	135	100	V	32.3	46.0	13.7

Coverage factor of k=2 will ensure that the level of confidence will be approximately 95.45%,
 Uncertainty U = -5.21 / +4.55 [dB]

MEASUREMENT OF DISTURBANCE RADIATION

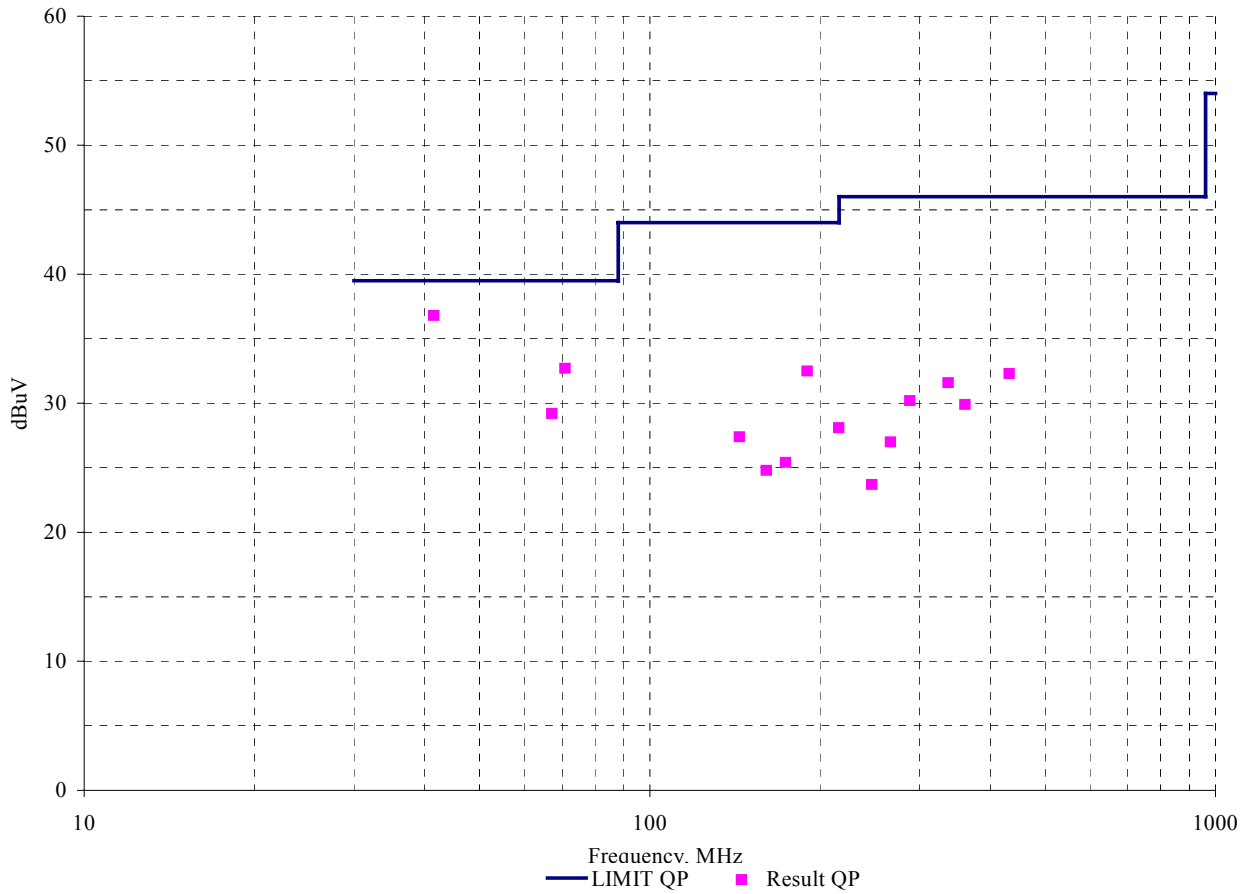

SUMMARY

GENERAL REMARKS :

The equipment is not modified anything, mechanical or circuit to improve EMI status during a measurement and complied the regulation "Part 15 subpart B Class B of CFR 47"

FINAL JUDGMENT :

The requirements according to the technical regulations are

- Kept Not kept


The equipment under test does

- Fulfill the general approval requirements mentioned on page 3.
 Not fulfill the general approval requirements mentioned on page 3.

Begin of testing : Jan. 26, 2004

End of testing : Jan. 31, 2004

Reviewed by :



**Sung J. Cho. EMC Manager
IST EMC Lab.**

Approved by :



G. Chung Chief of EMC Lab.