



TEST REPORT

Report Number.: 13487070-E2V2

Applicant : SRAM LLC
1000 W Fulton Market 4th Floor
Chicago, IL 60607, United States

Model : 09601

FCC ID : C9O-BLPB2

IC : 10161A-BLPB2

EUT Description : Wireless Blip with BLE and AIREA Radios

Test Standard(s) : FCC 47 CFR PART 15 SUBPART C
ISED RSS-247 ISSUE 2
ISED RSS-GEN ISSUE 5 + A1

Date of Issue:

May 13, 2021

Prepared by:

UL VERIFICATION SERVICES
47173 Benicia Street
Fremont, CA 94538 U.S.A.
TEL: (510) 319-4000
FAX: (510) 661-0888



NVLAP Lab code: 200065-0

REPORT REVISION HISTORY

Rev.	Issue Date	Revisions	Revised By
V1	4/9/2021	Initial Issue	
V2	5/13/2021	Updated Section 6.5, 10.1& 10.3	Kiya Kedida

TABLE OF CONTENTS

REPORT REVISION HISTORY	2
TABLE OF CONTENTS	3
1. ATTESTATION OF TEST RESULTS	5
2. TEST RESULTS SUMMARY	7
3. TEST METHODOLOGY	7
4. FACILITIES AND ACCREDITATION	7
5. DECISION RULES AND MEASUREMENT UNCERTAINTY	7
5.1. METROLOGICAL TRACEABILITY	7
5.2. DECISION RULES.....	7
5.3. MEASUREMENT UNCERTAINTY.....	9
5.4. SAMPLE CALCULATION	9
6. EQUIPMENT UNDER TEST	10
6.1. EUT DESCRIPTION	10
6.2. MAXIMUM OUTPUT POWER.....	10
6.3. DESCRIPTION OF AVAILABLE ANTENNAS	10
6.4. SOFTWARE AND FIRMWARE.....	10
6.5. WORST-CASE CONFIGURATION AND MODE.....	10
6.6. DESCRIPTION OF TEST SETUP.....	11
7. MEASUREMENT METHOD.....	14
8. TEST AND MEASUREMENT EQUIPMENT	15
9. ANTENNA PORT TEST RESULTS	16
9.1. ON TIME AND DUTY CYCLE.....	16
9.2. 99% BANDWIDTH.....	17
9.3. 6 dB BANDWIDTH.....	18
9.4. OUTPUT POWER.....	19
9.5. AVERAGE POWER.....	20
9.6. POWER SPECTRAL DENSITY.....	21
9.7. CONDUCTED SPURIOUS EMISSIONS.....	22
10. RADIATED TEST RESULTS	24
10.1. LIMITS AND PROCEDURE.....	24

10.2.	TRANSMITTER ABOVE 1 GHz.....	26
10.3.	WORST CASE BELOW 30MHz	36
10.4.	WORST CASE BELOW 1 GHz	38
10.5.	WORST CASE 18-26 GHz	40
11.	SETUP PHOTOS	42

1. ATTESTATION OF TEST RESULTS

COMPANY NAME: SRAM LLC
1000 W Fulton Market 4th Floor
Chicago, IL 60607, United States

EUT DESCRIPTION: Wireless Blip with BLE and AIREA Radios

MODEL: 09601

SERIAL NUMBER: Conducted: 1234567891
Radiated: 1234567893

DATE TESTED: FEBRUARY 03 – FEBRUARY 10, 2021

APPLICABLE STANDARDS	
STANDARD	TEST RESULTS
CFR 47 Part 15 Subpart C	Complies
ISED RSS-247 Issue 2	Complies
ISED RSS-GEN Issue 5 + A1	Complies

UL Verification Services Inc. tested the above equipment in accordance with the requirements set forth in the above standards. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. It is the manufacturer's responsibility to assure that additional production units of this model are manufactured with identical electrical and mechanical components. All samples tested were in good operating condition throughout the entire test program. Measurement Uncertainties are published for informational purposes only and were not taken into account unless noted otherwise.

This document may not be altered or revised in any way unless done so by UL Verification Services Inc. and all revisions are duly noted in the revisions section. Any alteration of this document not carried out by UL Verification Services Inc. will constitute fraud and shall nullify the document. This report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, any agency of the Federal Government, or any agency of the U.S. government.

Approved & Released For
UL Verification Services Inc. By:



Dan Corona
Operations Leader
Consumer Technology Division
UL Verification Services Inc.

Prepared By:



Brian Shen
Laboratory Engineer
Consumer Technology Division
UL Verification Services Inc.

Reviewed By:



Kiya Kedida
Senior Project Engineer
Consumer Technology Division
UL Verification Services Inc.

2. TEST RESULTS SUMMARY

FCC Clause	ISED Clause	Requirement	Result	Comment
See Comment		Duty Cycle	Reporting purposes only	ANSI C63.10 Section 11.6.
-	RSS-GEN 6.7	99% OBW	Reporting purposes only	ANSI C63.10 Section 6.9.3.
15.247 (a) (2)	RSS-247 5.2 (a)	6dB BW		None.
15.247 (b) (3)	RSS-247 5.4 (d)	Output Power		None.
See Comment		Average power	Reporting purposes only	Per ANSI C63.10, Section 11.9.2.3.2.
15.247 (e)	RSS-247 5.2 (b)	PSD		None.
15.247 (d)	RSS-247 5.5	Conducted Spurious Emissions		None.
15.209, 15.205	RSS-GEN 8.9, 8.10	Radiated Emissions		None.

This report contains data provided by the customer, which can impact the validity of results. UL Verification Services Inc. is only responsible for the validity of results after the integration of the data provided by the customer.

3. TEST METHODOLOGY

The tests documented in this report were performed in accordance with FCC CFR 47 Part 2, FCC CFR 47 Part 15, ANSI C63.10-2013, KDB 558074 D01 15.247 Meas Guidance v05r02, KDB 414788 D01 Radiated Test Site v01r01, RSS-GEN Issue 5 + A1, and RSS-247 Issue 2.

4. FACILITIES AND ACCREDITATION

UL Verification Services Inc. is accredited by NVLAP, Laboratory Code 200065-0, for all testing performed within the scope of this report. Testing was performed at the locations noted below.

	Address	ISED CABID	ISED Company Number	FCC Registration
<input type="checkbox"/>	Building 1: 47173 Benicia Street, Fremont, California, USA	US0104	2324A	208313
<input type="checkbox"/>	Building 2: 47266 Benicia Street, Fremont, California, USA	US0104	22541	208313
<input checked="" type="checkbox"/>	Building 4: 47658 Kato Rd, Fremont, California, USA	US0104	2324B	208313

5. DECISION RULES AND MEASUREMENT UNCERTAINTY

5.1. METROLOGICAL TRACEABILITY

All test and measuring equipment utilized to perform the tests documented in this report are calibrated on a regular basis, with a maximum time between calibrations of one year or the manufacturers' recommendation, whichever is less, and where applicable is traceable to recognized national standards.

5.2. DECISION RULES

The Decision Rule is based on Simple Acceptance in accordance with ISO Guide 98-4:2012 Clause 8.2. (Measurement uncertainty is not taken into account when stating conformity with a specified requirement.)

5.3. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

PARAMETER	U _{Lab}
Worst Case Conducted Disturbance, 9KHz to 0.15 MHz	3.78 dB
Worst Case Conducted Disturbance, 0.15 to 30 MHz	3.40 dB
Worst Case Radiated Disturbance, 9KHz to 30 MHz	2.84 dB
Worst Case Radiated Disturbance, 30 to 1000 MHz	4.88 dB
Worst Case Radiated Disturbance, 1000 to 18000 MHz	4.73 dB
Worst Case Radiated Disturbance, 18000 to 26000 MHz	4.51 dB
Worst Case Radiated Disturbance, 26000 to 40000 MHz	5.29 dB

Uncertainty figures are valid to a confidence level of 95%.

5.4. SAMPLE CALCULATION

RADIATED EMISSIONS

Where relevant, the following sample calculation is provided:

$$\text{Field Strength (dBuV/m)} = \text{Measured Voltage (dBuV)} + \text{Antenna Factor (dB/m)} + \text{Cable Loss (dB)} - \text{Preamp Gain (dB)}$$

$$36.5 \text{ dBuV} + 18.7 \text{ dB/m} + 0.6 \text{ dB} - 26.9 \text{ dB} = 28.9 \text{ dBuV/m}$$

MAINS CONDUCTED EMISSIONS

Where relevant, the following sample calculation is provided:

$$\text{Final Voltage (dBuV)} = \text{Measured Voltage (dBuV)} + \text{Cable Loss (dB)} + \text{Limiter Factor (dB)} + \text{LISN Insertion Loss.}$$

$$36.5 \text{ dBuV} + 0 \text{ dB} + 10.1 \text{ dB} + 0 \text{ dB} = 46.6 \text{ dBuV}$$

6. EQUIPMENT UNDER TEST

6.1. EUT DESCRIPTION

The EUT is a Wireless Blip with BLE and AIREA Radios.

6.2. MAXIMUM OUTPUT POWER

The transmitter has a maximum peak conducted output power as follows:

Frequency Range (MHz)	Mode	Output Power (dBm)	Output Power (mW)
2405 - 2475	AIREA	5.50	3.55

6.3. DESCRIPTION OF AVAILABLE ANTENNAS

The antenna(s) gain and type, as provided by the manufacturer' are as follows: The radio utilizes a trace on PCBA, with a maximum gain of -6.2 dBi.

6.4. SOFTWARE AND FIRMWARE

The EUT firmware installed during testing was version B-1.0.

The test utility software used during testing was nRF Connect version 3.6.1.

6.5. WORST-CASE CONFIGURATION AND MODE

Radiated emissions below 1GHz and above 18GHz were performed with the EUT set to transmit at the channel with highest output power as worst-case scenario.

Band edge and radiated emissions between 1GHz and 18GHz were performed with the EUT set to transmit at the highest power on low, middle, and high channels.

The fundamental of the EUT was investigated in three orthogonal orientations X, Y, & Z. It was determined that X orientation was worst-case orientation; therefore, all final radiated testing was performed with the EUT in X orientation.

Worst-case data rate as provided by the client was 250kbps.

Note:

The EUT was operating by a CR1632 battery at 3V; therefore, the AC Power Line Conduction was not applicable.

6.6. DESCRIPTION OF TEST SETUP

SUPPORT EQUIPMENT

Support Equipment List			
Description	Manufacturer	Model	Serial Number
Laptop	Lenovo	T460s	PC0C3EDZ
AC/DC Adapter	Lenovo	ADLX45DLC2A	N/A
USB Dongle	Segger	E204460	680803009
DC Power Supply	TDK.Lambda	GENH60-25	08H7946V
DC Power Supply	Kenwood Corporation	PA36-3A	7060074

I/O CABLES (CONDUCTED EMISSIONS)

I/O CABLE LIST						
Cable No.	Port	# of Identical Ports	Connector Type	Cable Type	Cable Length (m)	Remarks
1	AC	1	AC	Unshielded	1.5	AC Main to DC Supply, to Analyzer
2	DC	1	DC	Unshielded	0.5	Power Supply to EUT
3	Antenna Port	1	SMA	Unshielded	0.1	EUT to Analyzer

I/O CABLES (RADIATED EMISSIONS)


I/O CABLE LIST						
Cable No.	Port	# of Identical Ports	Connector Type	Cable Type	Cable Length (m)	Remarks
1	AC	1	AC	Unshielded	1.5	AC Main to DC Supply
2	DC	1	DC	Unshielded	0.5	Power Supply to EUT

TEST SETUP


For the purposes of testing, the EUT is connected to a 3V DC Power supply for radiated emissions above 1GHz. The EUT is normally powered by a CR1632 battery at 3V. The laptop and USB dongle were used for setting up purposes and were removed during testing

SETUP DIAGRAMS

SETUP DIAGRAM FOR CONDUCTED TESTS

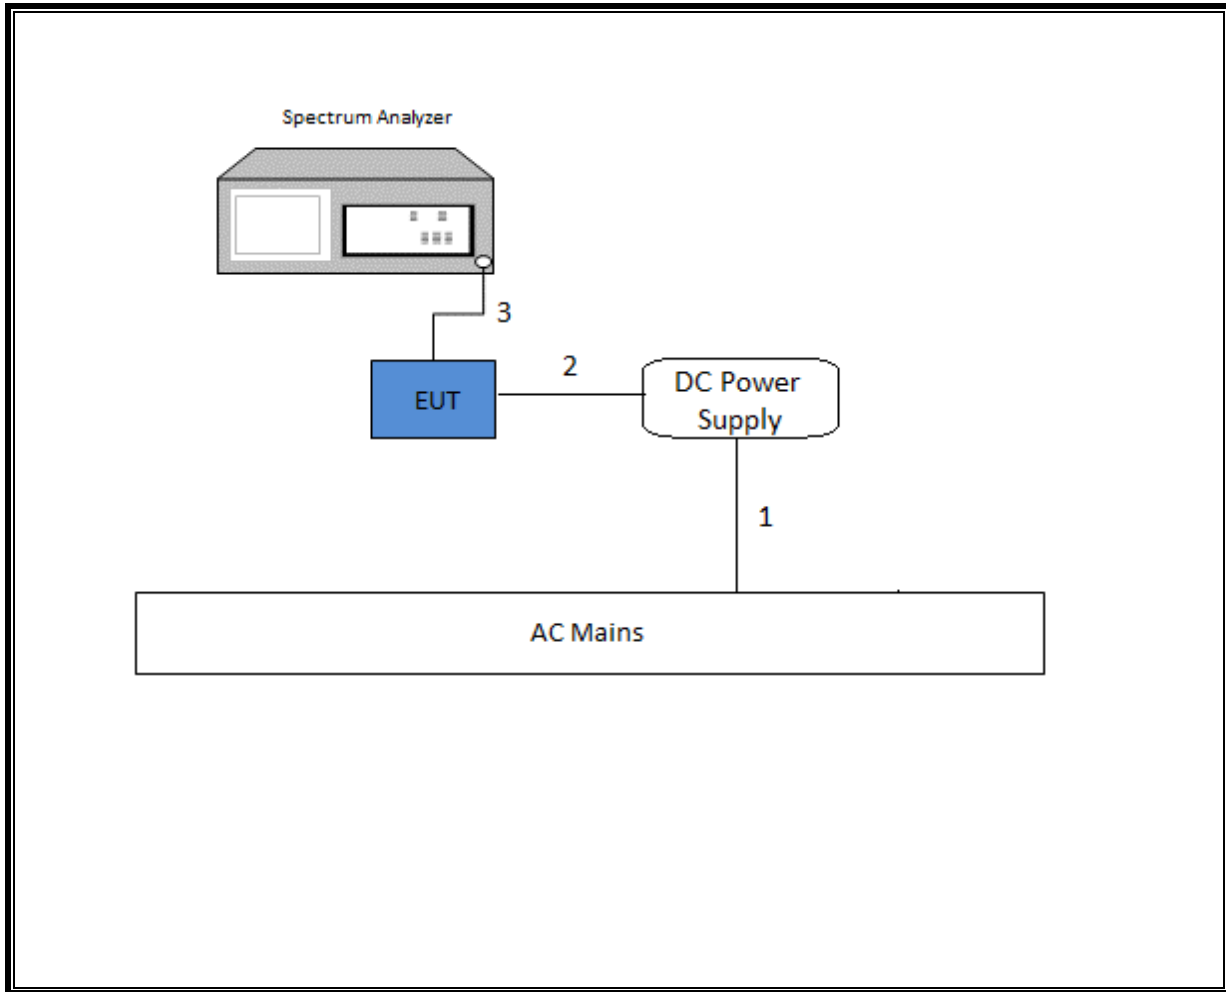

SETUP DIAGRAM FOR RADIATED TESTS

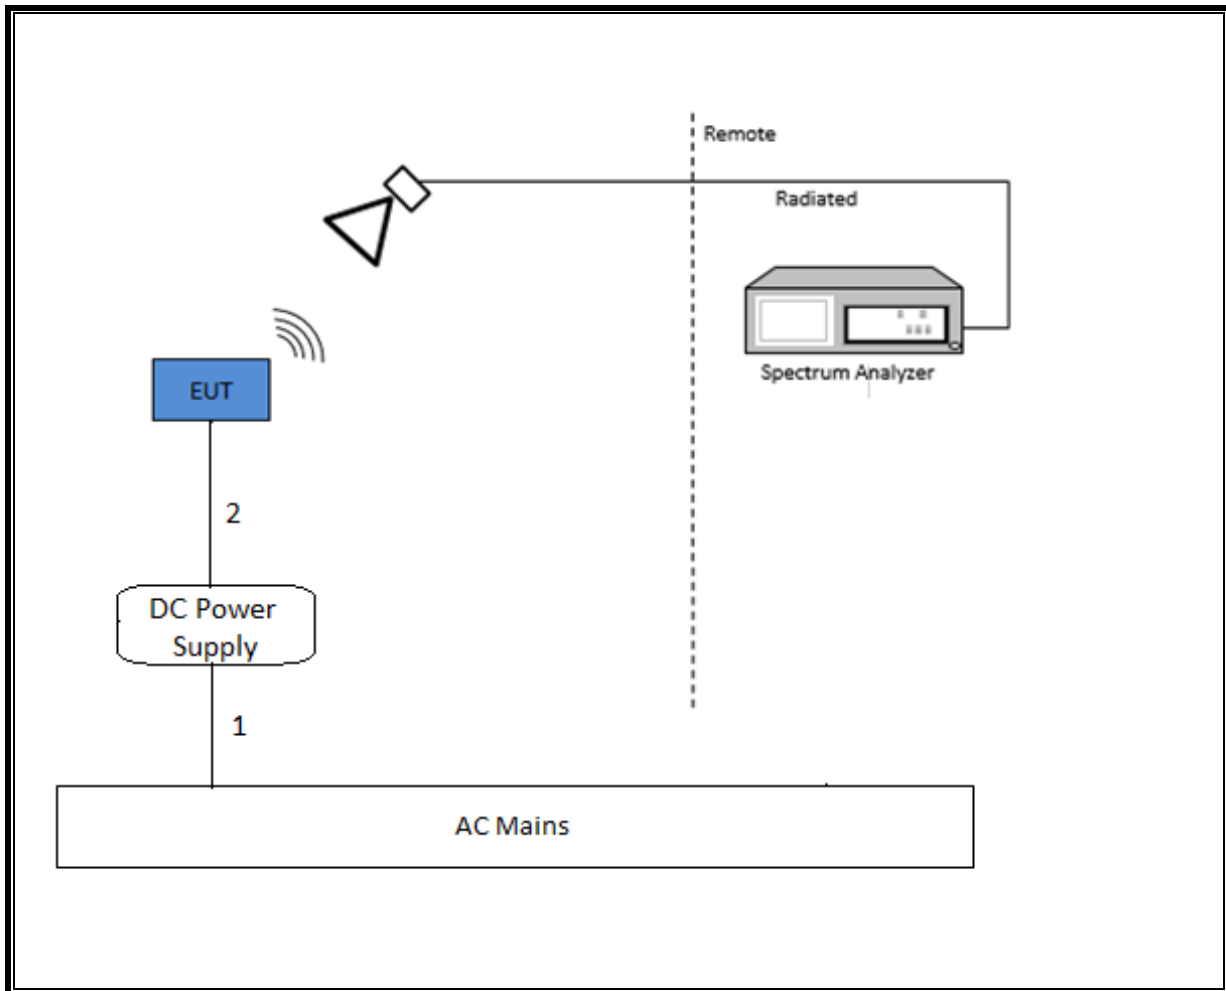

7. MEASUREMENT METHOD

On Time and Duty Cycle: ANSI C63.10 Section - 11.6.

6 dB BW: ANSI C63.10 Subclause -11.8.1

Occupied BW (99%): ANSI C63.10-2013 Section 6.9.3

Output Power: ANSI C63.10 Subclause -11.9.1.3 Method PKPM1 Peak-reading power meter

Output Power: ANSI C63.10 Subclause -11.9.2.3.2 Method AVGPM-G (Measurement using a gated RF average-reading power meter)

PSD: ANSI C63.10 Subclause -11.10.2 Method PKPSD (peak PSD)

Radiated emissions non-restricted frequency bands: ANSI C63.10 Subclause -11.11

Radiated emissions restricted frequency bands: ANSI C63.10 Subclause -11.12.1

Conducted emissions in restricted frequency bands: ANSI C63.10 Subclause -11.12.2

Band-edge: ANSI C63.10

Radiated Spurious Emissions Below 30MHz: ANSI C63.10-2013 Section 6.4

8. TEST AND MEASUREMENT EQUIPMENT

The following test and measurement equipment were utilized for the tests documented in this report:

TEST EQUIPMENT LIST					
Description	Manufacturer	Model	ID Num	Cal Due	Last Cal
EMI TEST RECEIVER	Rohde & Schwarz	ESW44	PRE0179376	4/3/2021	4/3/2020
Antenna, Horn 1-18GHz	ETS-Lindgren	3117	T863	8/31/2021	8/31/2020
Amplifier, 100MHz-18GHz	AMPLICAL	AMP0.1G18-47-20	PRE0197319	5/4/2021	5/4/2020
Antenna, Broadband Hybrid, 30MHz to 3GHz	Sunol Sciences Corp.	JB3	T477	9/24/2021	9/24/2020
Amplifier, 10KHz to 1GHz, 32dB	SONOMA INSTRUMENT	310	175953	1/21/2022	1/21/2021
Antenna, Passive Loop 30Hz - 1MHz	ELECTRO METRICS	EM-6871	PRE0179466	5/27/2021	5/27/2020
Antenna, Passive Loop 100KHz - 30MHz	ELECTRO METRICS	EM-6872	PRE0179468	5/27/2021	5/27/2020
Spectrum Analyzer, PXA, 3Hz to 44GHz	Keysight Technologies Inc	N9030A	T342	1/25/2022	1/25/2021
Spectrum Analyzer, PSA, 3Hz to 44GHz	Keysight Technologies Inc	E4446A	T123	1/22/2022	1/22/2021
Power Sensor P - series, 50MHz to 18GHz, Wideband	Keysight Technologies Inc	N1921A	T413	2/26/2021	2/26/2020
Power Meter, P-series single channel	Keysight Technologies Inc	N1911A	T1269	1/25/2022	1/25/2021
Antenna, Horn 18 to 26.5GHz	ARA	MWH-1826/B	T447	9/24/2021	9/24/2020
Rf Amplifier, 18-26.5GHz, 60dB gain	AMPLICAL	AMP18G26.5-60	PRE0181238	6/7/2021	6/7/2020
Power Supply, DC	TDK-LAMBDA	GENH60-25	PRE0074666	CnR	CnR
Power Supply, DC	Kenwood Corporation	PA36-3A	T599	CnR	CnR
Test Software List					
Description	Manufacturer	Model	Version		
Radiated Software	UL	UL EMC	Rev 9.5, April 30, 2020		
Antenna Port Software	UL	UL RF	AP 2021.1.19		

9. ANTENNA PORT TEST RESULTS

9.1. ON TIME AND DUTY CYCLE

LIMITS

None; for reporting purposes only.


PROCEDURE

KDB 558074 Zero-Span Spectrum Analyzer Method.

ON TIME AND DUTY CYCLE RESULTS

Mode	ON Time B (msec)	Period (msec)	Duty Cycle x (linear)	Duty Cycle (%)	Duty Cycle Correction Factor (dB)	1/B Minimum VBW (kHz)
2.4GHz Band						
AIREA	100.00	100.00	1.00	100.00	0.00	0.010

DUTY CYCLE PLOT

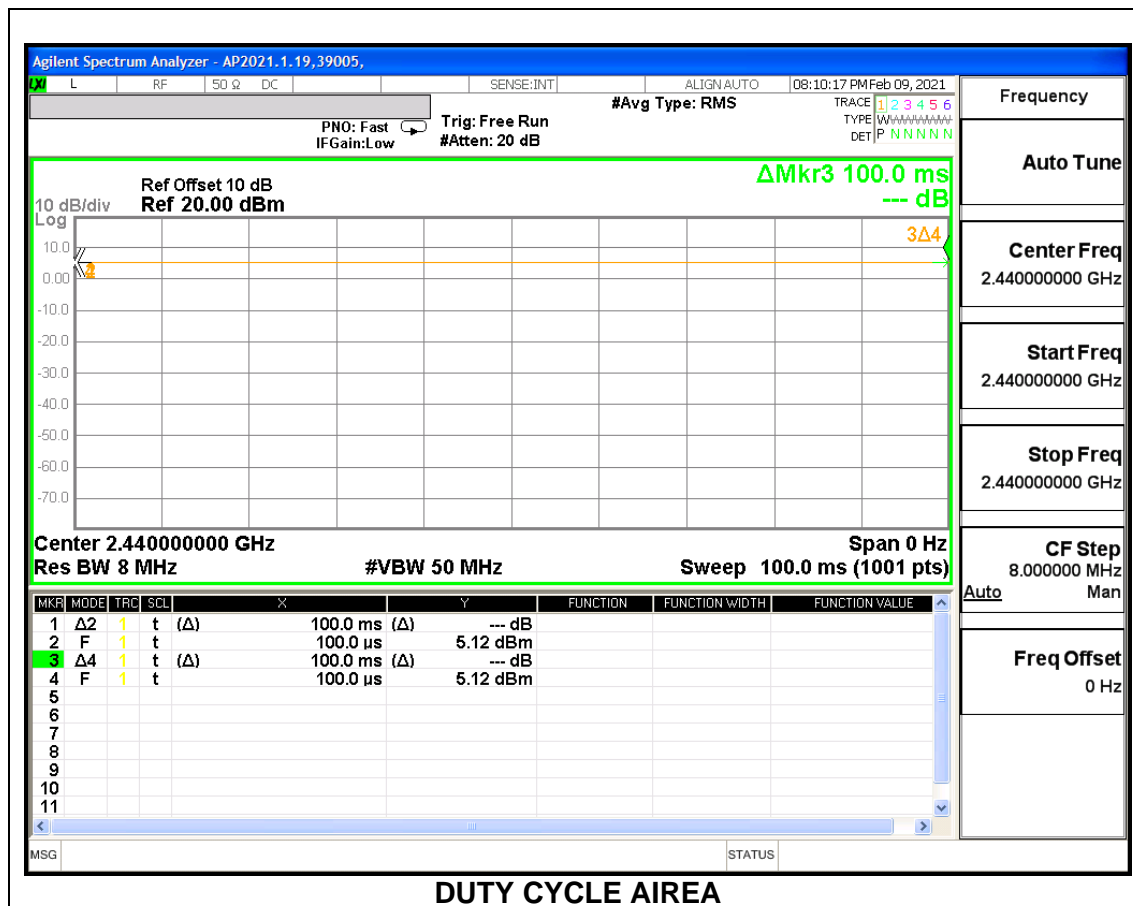

DUTY CYCLE AIREA



9.2. 99% BANDWIDTH

LIMITS

None; for reporting purposes only.

RESULTS

Channel	Frequency (MHz)	99% Bandwidth (MHz)
Low	2405	2.2272
Middle	2440	2.2402
High	2475	2.2432

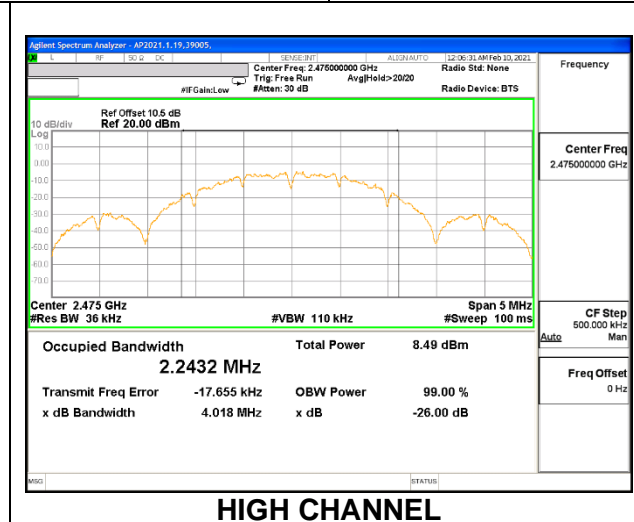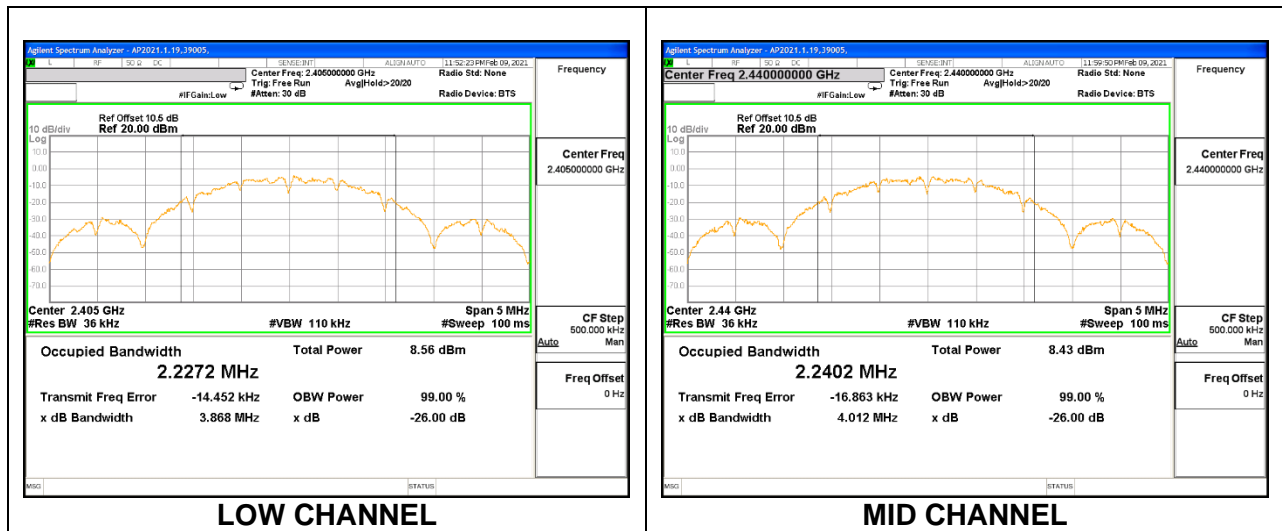

9.3. 6 dB BANDWIDTH

LIMITS




FCC §15.247 (a) (2)

RSS-247 5.2 (a)

The minimum 6 dB bandwidth shall be at least 500 kHz.

RESULTS

Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	Minimum Limit (MHz)
Low	2405	1.404	0.5
Middle	2440	1.431	0.5
High	2480	1.407	0.5

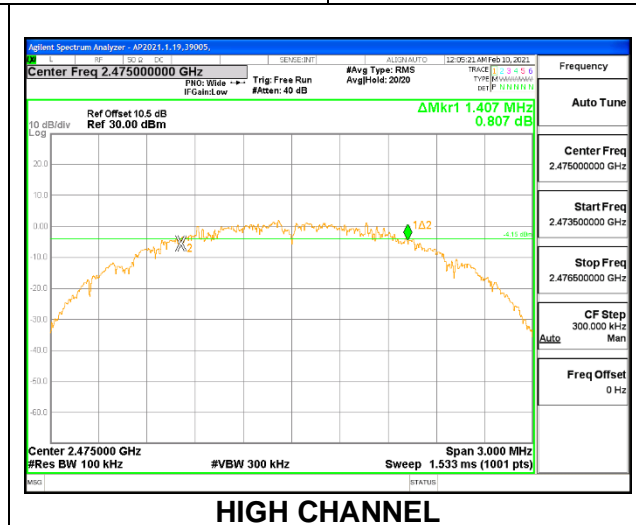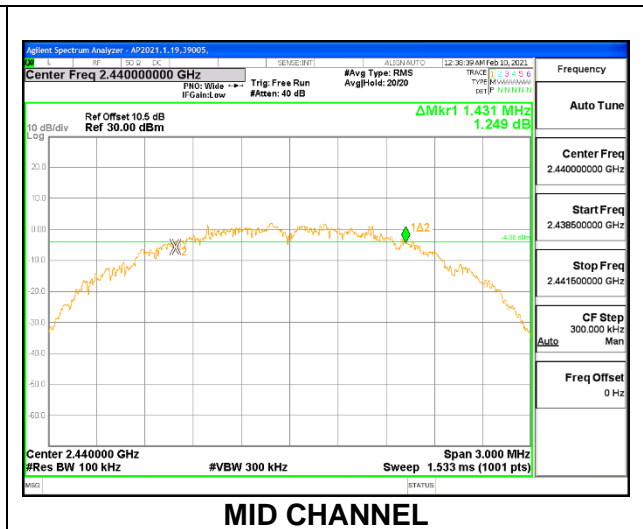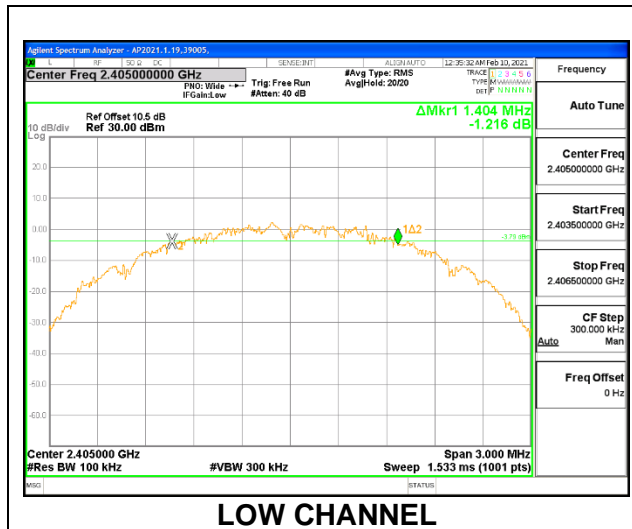

9.4. OUTPUT POWER

LIMITS

FCC §15.247 (b) (3)

RSS-247 5.4 (d)

The maximum antenna gain is less than or equal to 6 dBi, therefore the limit is 30 dBm.

TEST PROCEDURE

The transmitter output is connected to a power meter.

The cable assembly insertion loss was entered as an offset in the power meter to allow for a gated peak reading of power.

RESULTS

Tested By:	39005 RA
Date:	2/9/2020

Channel	Frequency (MHz)	Peak Power Reading (dBm)	Limit (dBm)	Margin (dB)
Low	2405	5.50	30	-24.500
Middle	2440	5.50	30	-24.500
High	2475	5.47	30	-24.530

9.5. AVERAGE POWER

LIMITS

None; for reporting purposes only.

TEST PROCEDURE

TEST PROCEDURE

Measurements perform using a wideband gated RF power meter.

The power output was measured on the EUT antenna port using SMA cable with 10dB attenuator connected to a power meter via wideband average power sensor. Gated average output power was read directly from the power meter.

RESULTS

Tested By:	39005 RA
Date:	2/9/2020

Channel	Frequency (MHz)	AV power (dBm)
Low	2405	5.44
Middle	2440	5.41
High	2475	5.35

9.6. POWER SPECTRAL DENSITY

LIMITS


FCC §15.247 (e)

RSS-247 (5.2) (b)

The power spectral density conducted from the transmitter to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

RESULTS

Channel	Frequency (MHz)	PSD (dBm/3kHz)	Limit (dBm/3kHz)	Margin (dB)
Low	2405	-9.29	8	-17.29
Middle	2440	-9.62	8	-17.62
High	2475	-9.70	8	-17.70

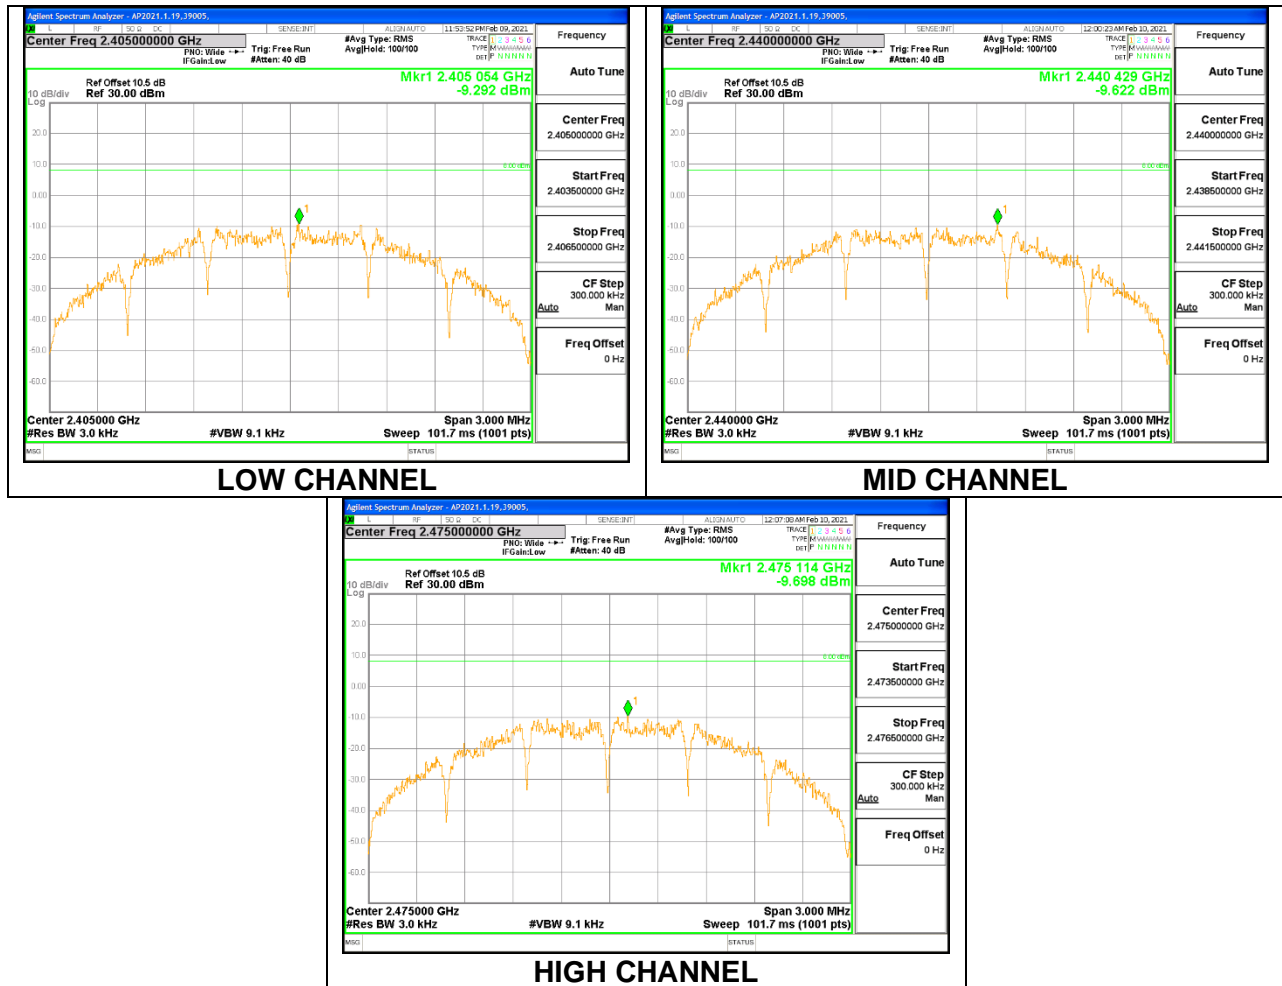

9.7. CONDUCTED SPURIOUS EMISSIONS


LIMITS

FCC §15.247 (d)

RSS-247 5.5

Output power was measured based on the use of a peak measurement; therefore, spurious emissions are required to be 20 dBc.


RESULTS

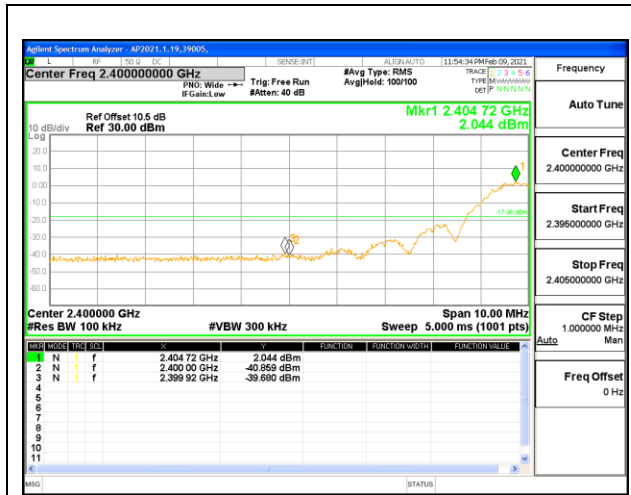


LOW CHANNEL BANDEDGE




OUT-OF-BAND LOW CHANNEL

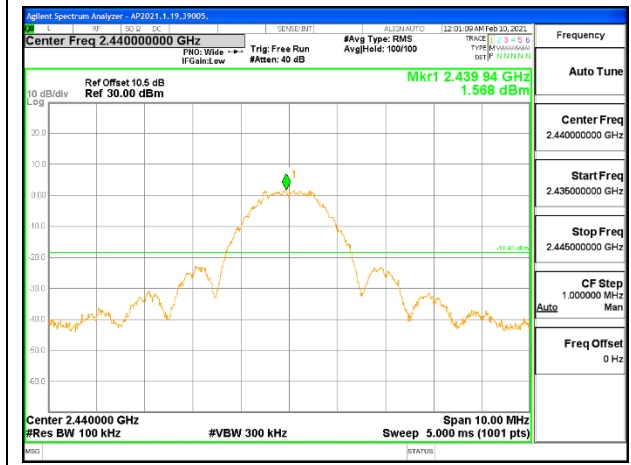


IN-BAND REFERENCE LEVEL

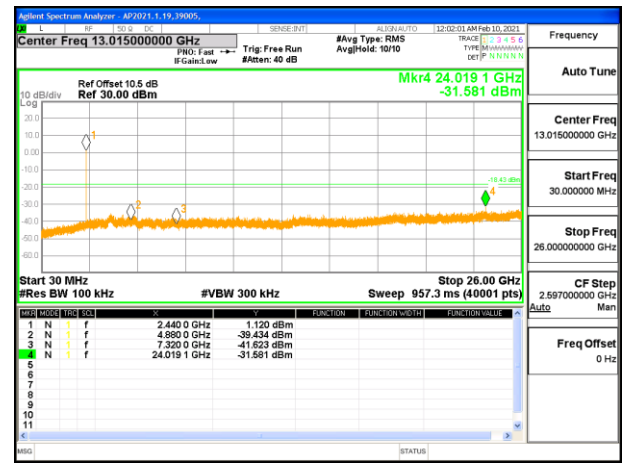

OUT-OF-BAND MID CHANNEL

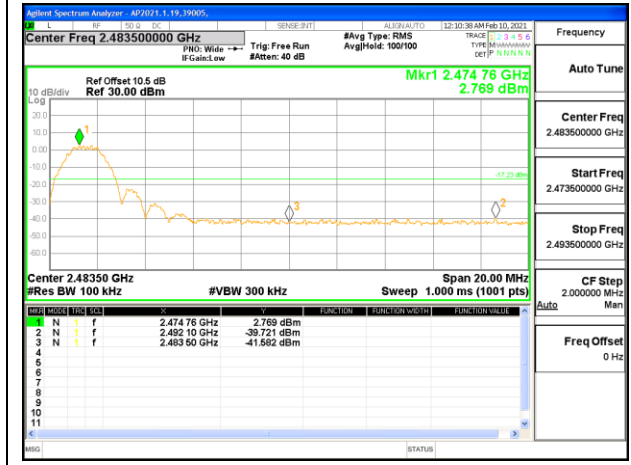

HIGH CHANNEL BANDEDGE

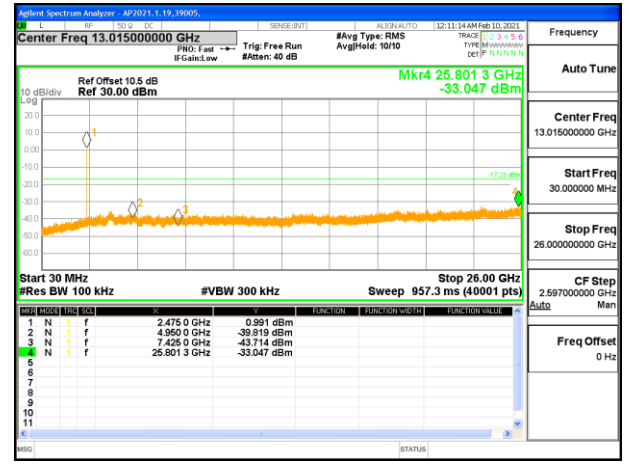

OUT-OF-BAND HIGH CHANNEL

10. RADIATED TEST RESULTS

10.1. LIMITS AND PROCEDURE

LIMITS

FCC §15.205 and §15.209

RSS-GEN, Section 8.9 and 8.10.

Frequency Range (MHz)	Field Strength Limit (uV/m) at 3 m	Field Strength Limit (dBuV/m) at 3 m
0.009-0.490	2400/F(kHz) @ 300 m	-
0.490-1.705	24000/F(kHz) @ 30 m	-
1.705 - 30	30 @ 30m	-
30 - 88	100	40
88 - 216	150	43.5
216 - 960	200	46
Above 960	500	54

TEST PROCEDURE

The EUT is placed on a non-conducting table 80 cm above the ground plane for measurement below 1GHz; 1.5 m above the ground plane for measurement above 1GHz. The antenna to EUT distance is 3 meters. The EUT is configured in accordance with ANSI C63.10. The EUT is set to transmit in a continuous mode.

For measurements below 1 GHz the resolution bandwidth is set to 100 kHz for peak detection measurements or 120 kHz for quasi-peak detection measurements in the 30-1000MHz range, 9kHz for peak and/or quasi-peak detection measurements in the 0.15-30MHz range and 200Hz for peak and/or quasi-peak detection measurements in the 9 to 150kHz range. Peak detection is used unless otherwise noted as quasi-peak or average (9-90kHz and 110-490kHz).

For pre-scans above 1 GHz the resolution bandwidth is set to 1 MHz; the video bandwidth is set to 30 kHz for peak measurements.

For final measurements above 1 GHz the resolution bandwidth is set to 1 MHz; the video bandwidth is set to 3 MHz for peak measurements and as applicable for average measurements.

The spectrum from 1 GHz to 18 GHz is investigated with the transmitter set to the lowest, middle, and highest channels in each applicable band. Below 1GHz and above 18GHz emissions, the channel with the highest output power was tested.

The frequency range of interest is monitored at a fixed antenna height and EUT azimuth. The EUT is rotated through 360 degrees to maximize emissions received. The antenna is scanned from 1 to 4 meters above the ground plane to further maximize the emission. Measurements are made with the antenna polarized in both the vertical and the horizontal positions.

2D antenna use - For below 30MHz testing, investigation was done on three antenna orientations (Face-On, Face-Off, and ground-parallel); Face-On and Face-Off are the worst orientations, therefore testing was performed on these two orientations only.

Base on FCC 15.31 (f) (2): measurements may be performed at a distance closer than that specified in the regulations; however, an attempt should be made to avoid making measurements in the near field.


KDB 414788 Open Field Site (OFS) and Chamber Correlation Justification

OFS and chamber correlation testing had been performed and chamber measured test result is the worst-case test result.

10.2. TRANSMITTER ABOVE 1 GHz

BANDEDGE (LOW CHANNEL)


HORIZONTAL RESULT

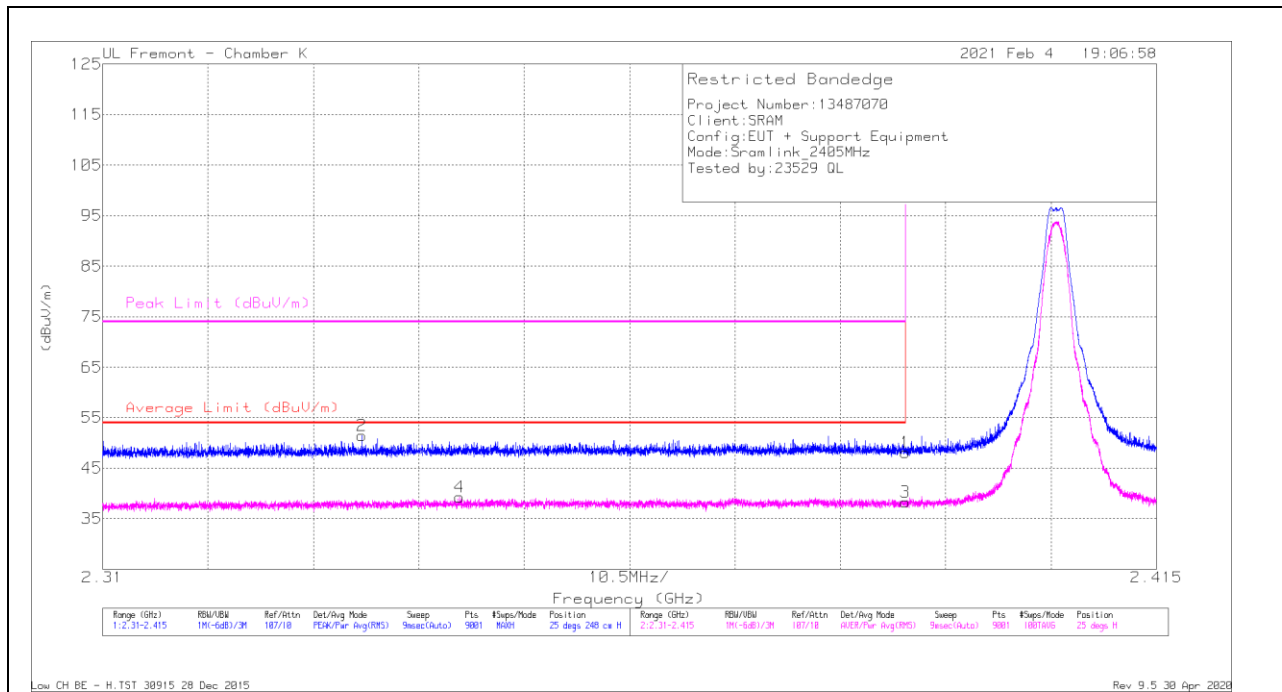

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AFT863 (dB/m)	Amp/Cb/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.38999	50.67	Pk	32.4	-35	48.07	-	-	74	-25.93	25	248	H
2	* 2.33583	54.45	Pk	32.2	-35.2	51.45	-	-	74	-22.55	25	248	H
3	* 2.38999	40.92	RMS	32.4	-35	38.32	54	-15.68	-	-	25	248	H
4	* 2.34558	42.17	RMS	32.3	-35.2	39.27	54	-14.73	-	-	25	248	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 Pk - Peak detector
 RMS - RMS detection

VERTICAL RESULT

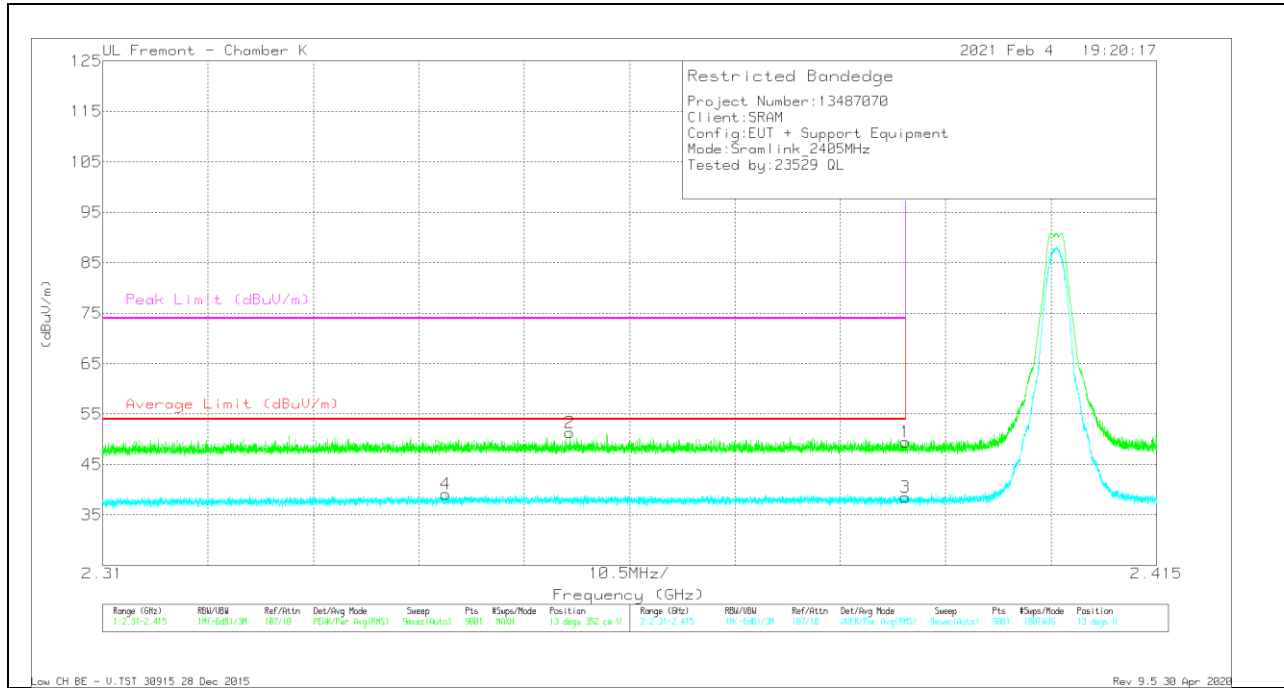


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T863 (dB/m)	Amp/Cb/Fitr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.38999	52.09	Pk	32.4	-35	49.49	-	-	74	-24.51	13	352	V
2	* 2.35654	54.13	PK	32.4	-35.2	51.33	-	-	74	-22.67	13	352	V
3	* 2.38999	41.08	RMS	32.4	-35	38.48	54	-15.52	-	-	13	352	V
4	* 2.34417	42.15	RMS	32.3	-35.3	39.15	54	-14.85	-	-	13	352	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 Pk - Peak detector
 RMS - RMS detection

BANDEDGE (HIGH CHANNEL)


HORIZONTAL RESULT

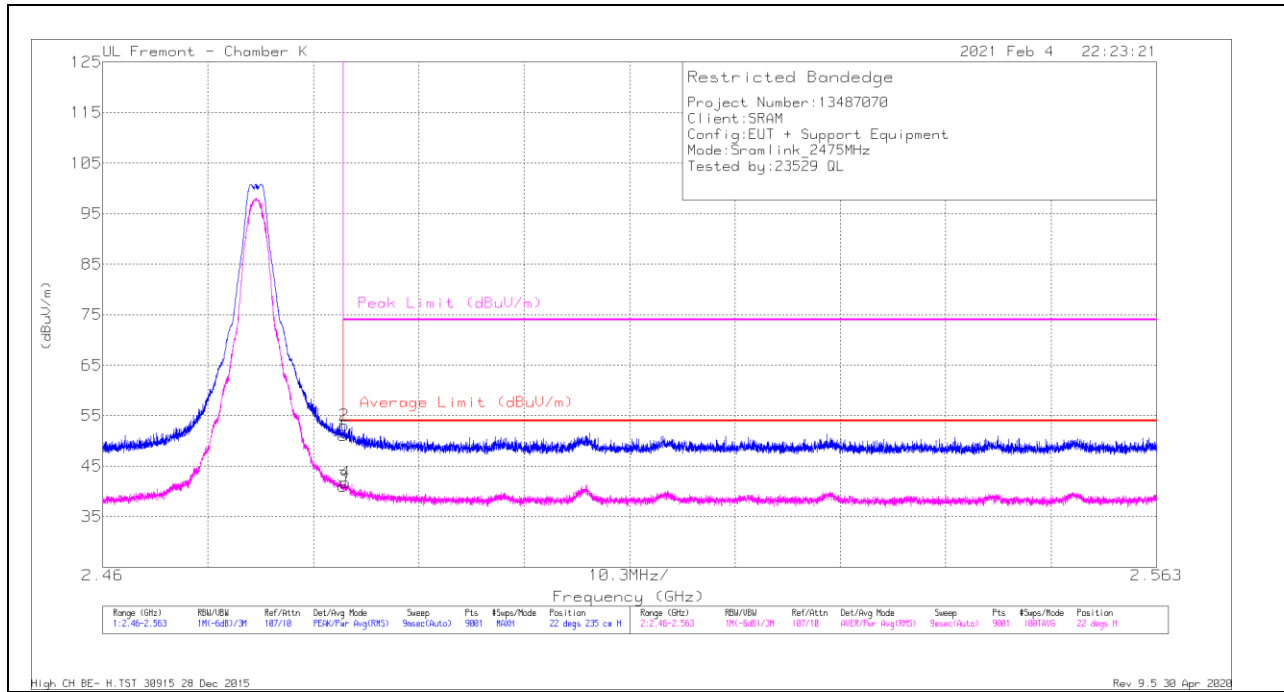

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T863 (dB/m)	Amp/Cbl/Fitr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.48351	53.24	Pk	32.5	-34.6	51.14	-	-	74	-22.86	22	235	H
2	* 2.48363	55.19	Pk	32.5	-34.6	53.09	-	-	74	-20.91	22	235	H
3	* 2.48351	43.09	RMS	32.5	-34.6	40.99	54	-13.01	-	-	22	235	H
4	* 2.48373	43.89	RMS	32.5	-34.6	41.79	54	-12.21	-	-	22	235	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 Pk - Peak detector
 RMS - RMS detection

VERTICAL RESULT

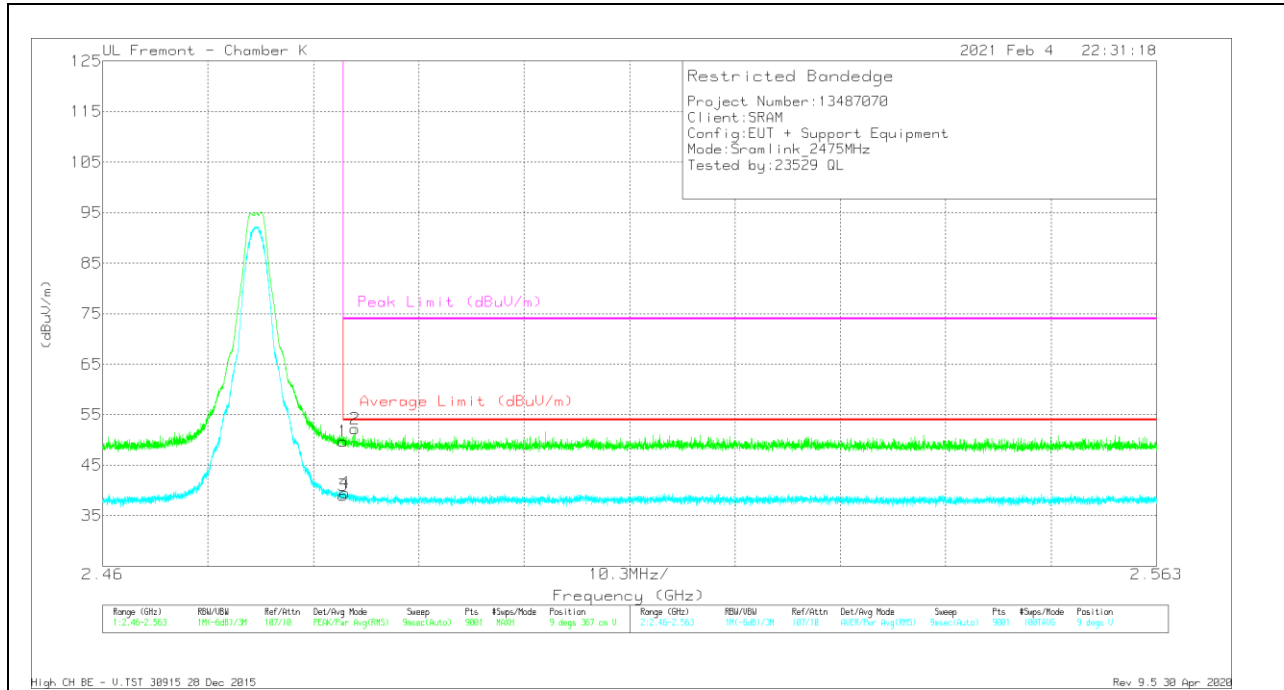


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AFT863 (dB/m)	Amp/Cb/Fitr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.48351	51.81	Pk	32.5	-34.6	49.71	-	-	74	-24.29	9	367	V
2	* 2.48464	54.26	Pk	32.5	-34.6	52.16	-	-	74	-21.84	9	367	V
3	* 2.48351	41.13	RMS	32.5	-34.6	39.03	54	-14.97	-	-	9	367	V
4	* 2.4837	41.63	RMS	32.5	-34.6	39.53	54	-14.47	-	-	9	367	V


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 PK - Peak detector
 RMS - RMS detection

HARMONICS AND SPURIOUS EMISSIONS

LOW CHANNEL RESULTS

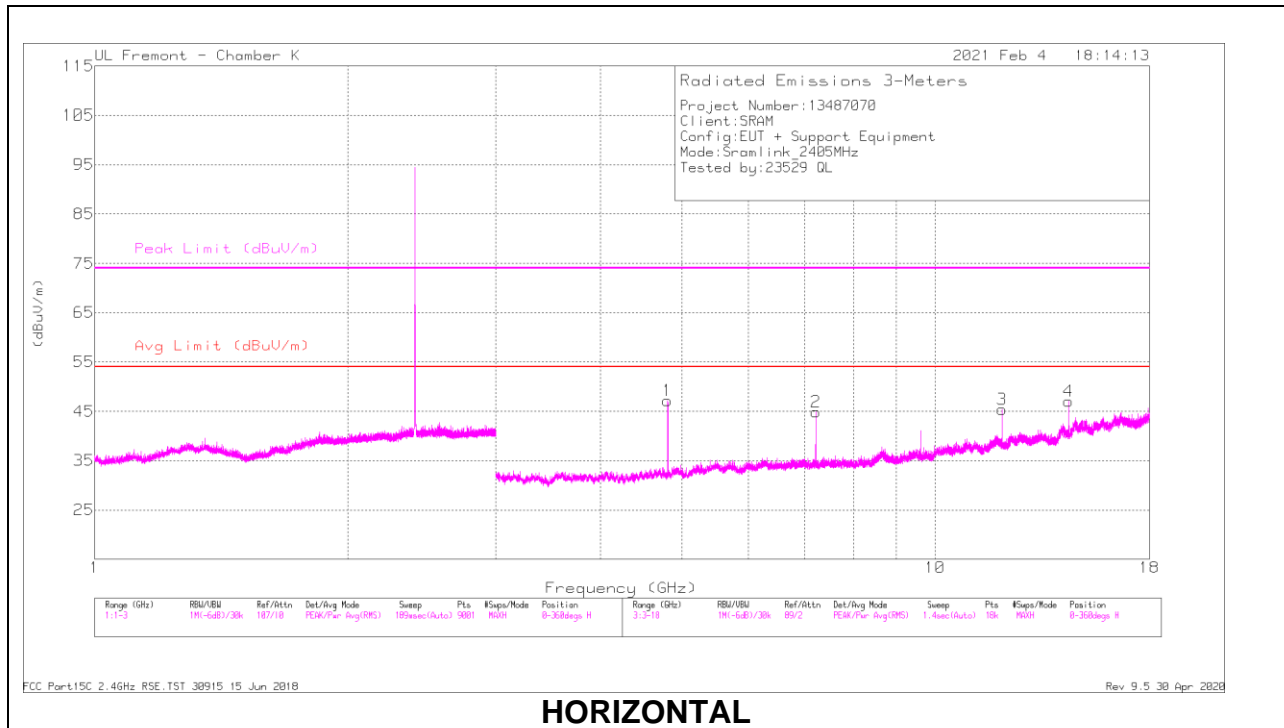

HORIZONTAL

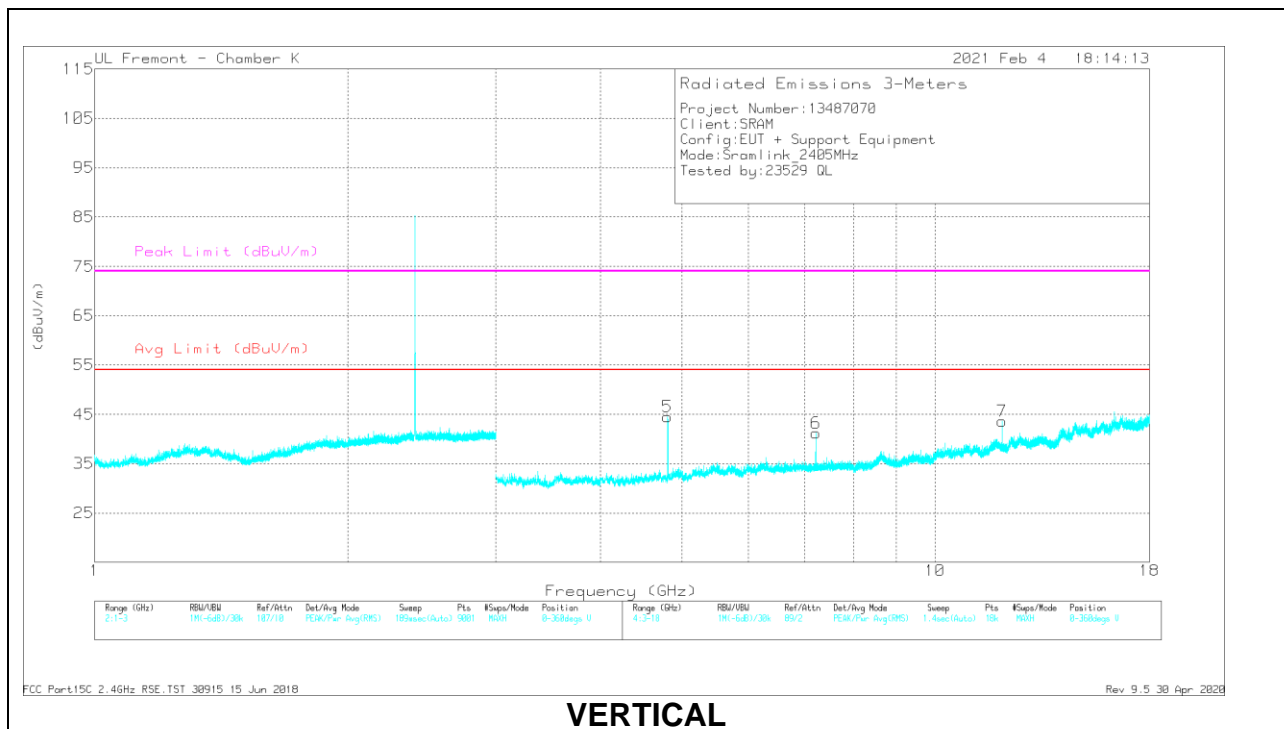


VERTICAL

RADIATED EMISSIONS


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T863 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 4.80901	58.94	PK2	34.3	-40.7	52.54	-	-	74	-21.46	222	101	H
	* 4.81088	50.15	MAv1	34.3	-40.7	43.75	54	-10.25	-	-	222	101	H
2	7.21347	55.5	PK2	36.1	-38.6	53	-	-	-	-	205	96	H
3	* 12.02744	49.42	PK2	39	-34.9	53.52	-	-	74	-20.48	342	116	H
	* 12.02727	40.72	MAv1	39	-34.9	44.82	54	-9.18	-	-	342	116	H
4	14.42703	48.55	PK2	40	-34.7	53.85	-	-	-	-	68	111	H
5	* 4.81097	56.62	PK2	34.3	-40.7	50.22	-	-	74	-23.78	261	100	V
	* 4.80905	47.46	MAv1	34.3	-40.7	41.06	54	-12.94	-	-	261	100	V
6	7.21348	51.17	PK2	36.1	-38.6	48.67	-	-	-	-	236	250	V
7	* 12.02248	46.5	PK2	38.9	-34.9	50.5	-	-	74	-23.5	13	194	V
	* 12.02266	36.52	MAv1	38.9	-34.9	40.52	54	-13.48	-	-	13	194	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 PK2 - KDB558074 Method: Maximum Peak
 MAv1 - KDB558074 Option 1 Maximum RMS Average

MID CHANNEL RESULTS

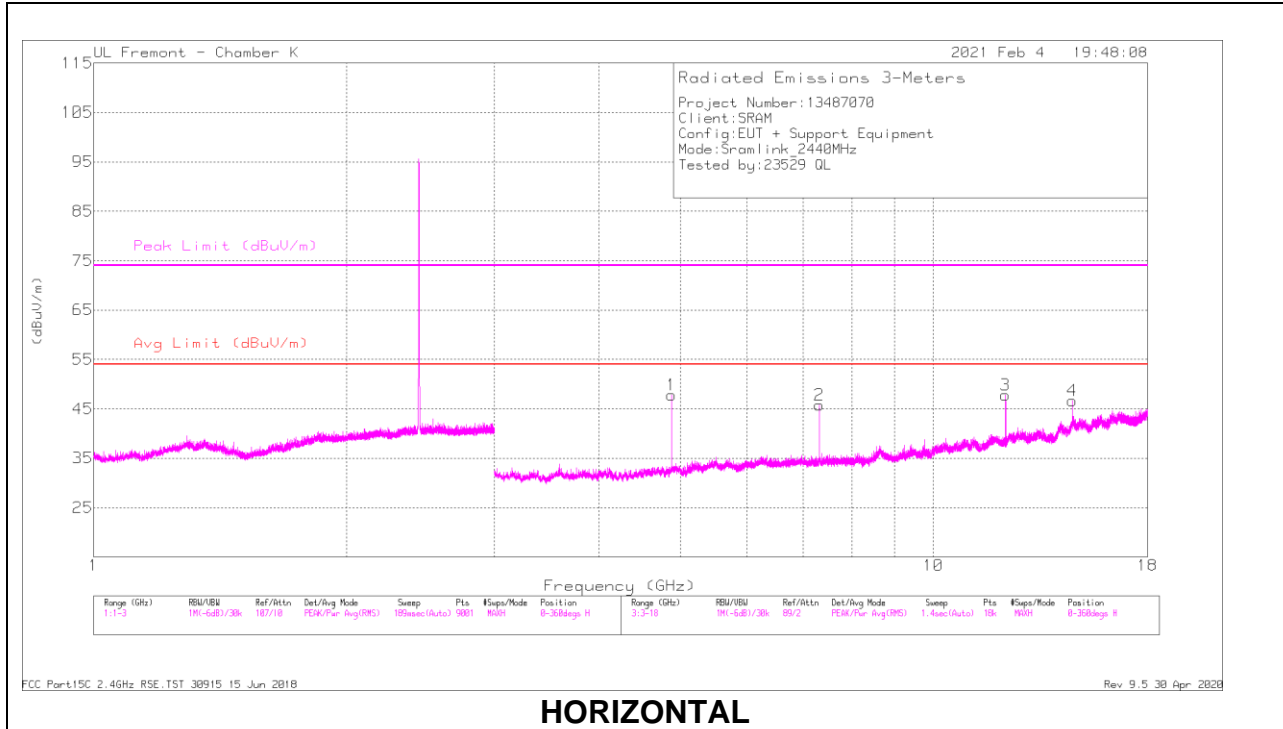

HORIZONTAL

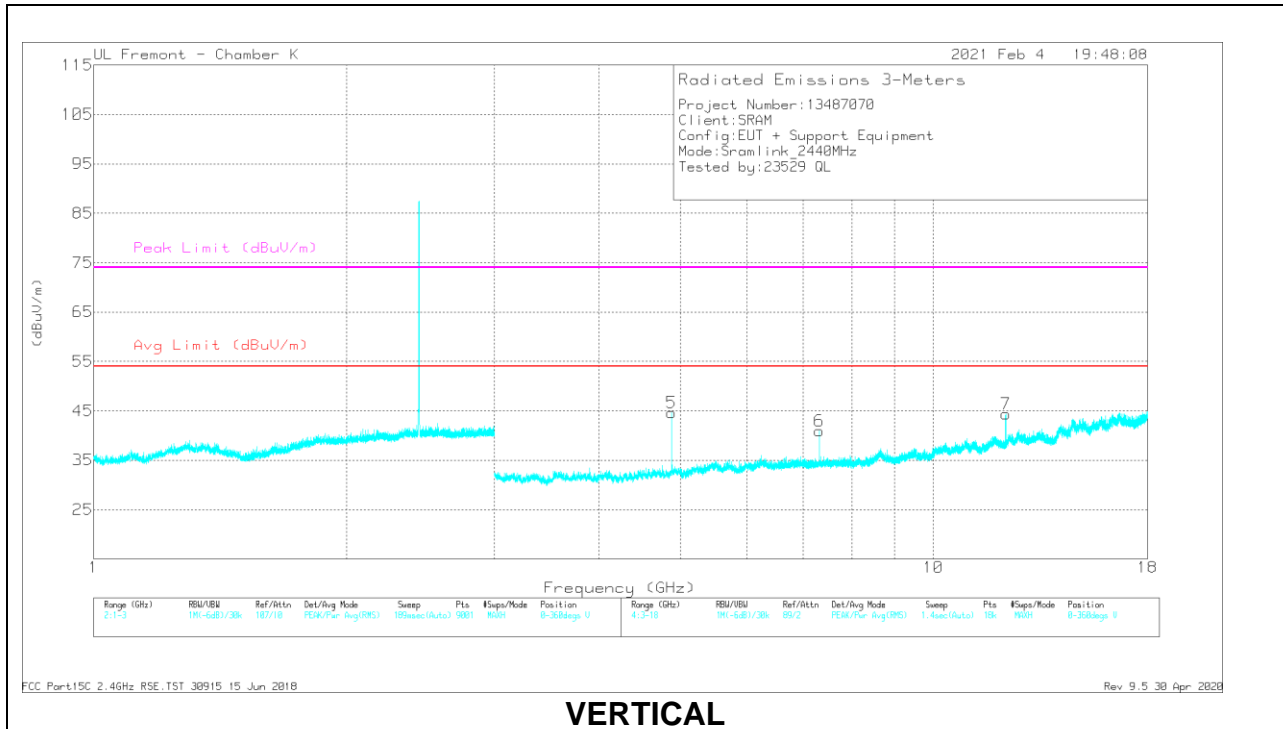


VERTICAL

RADIATED EMISSIONS


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T863 (dB/m)	Amp/Cbl/Filtr/Par d (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 4.88099	59.72	PK2	34.4	-40.6	53.52	-	-	74	-20.48	16	177	H
	* 4.88092	52.01	MAv1	34.4	-40.6	45.81	54	-8.19	-	-	16	177	H
2	* 7.31851	56.99	PK2	36	-38.2	54.79	-	-	74	-19.21	207	97	H
	* 7.31862	51	MAv1	36	-38.2	48.8	54	-5.2	-	-	207	97	H
3	* 12.19745	52.77	PK2	39.2	-35	56.97	-	-	74	-17.03	341	122	H
	* 12.20232	45.92	MAv1	39.2	-35	50.12	54	-3.88	-	-	341	122	H
4	14.63696	48.81	PK2	40.5	-33.9	55.41	-	-	-	-	67	98	H
5	* 4.87899	58.09	PK2	34.4	-40.6	51.89	-	-	74	-22.11	330	282	V
	* 4.87905	49.66	MAv1	34.4	-40.6	43.46	54	-10.54	-	-	330	282	V
6	* 7.32152	51.31	PK2	36	-38.2	49.11	-	-	74	-24.89	219	99	V
	* 7.32122	42.59	MAv1	36	-38.2	40.39	54	-13.61	-	-	219	99	V
7	* 12.19753	48.74	PK2	39.2	-35	52.94	-	-	74	-21.06	17	206	V
	* 12.19767	40.31	MAv1	39.2	-35	44.51	54	-9.49	-	-	17	206	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 PK2 - KDB558074 Method: Maximum Peak
 MAv1 - KDB558074 Option 1 Maximum RMS Average

HIGH CHANNEL RESULTS

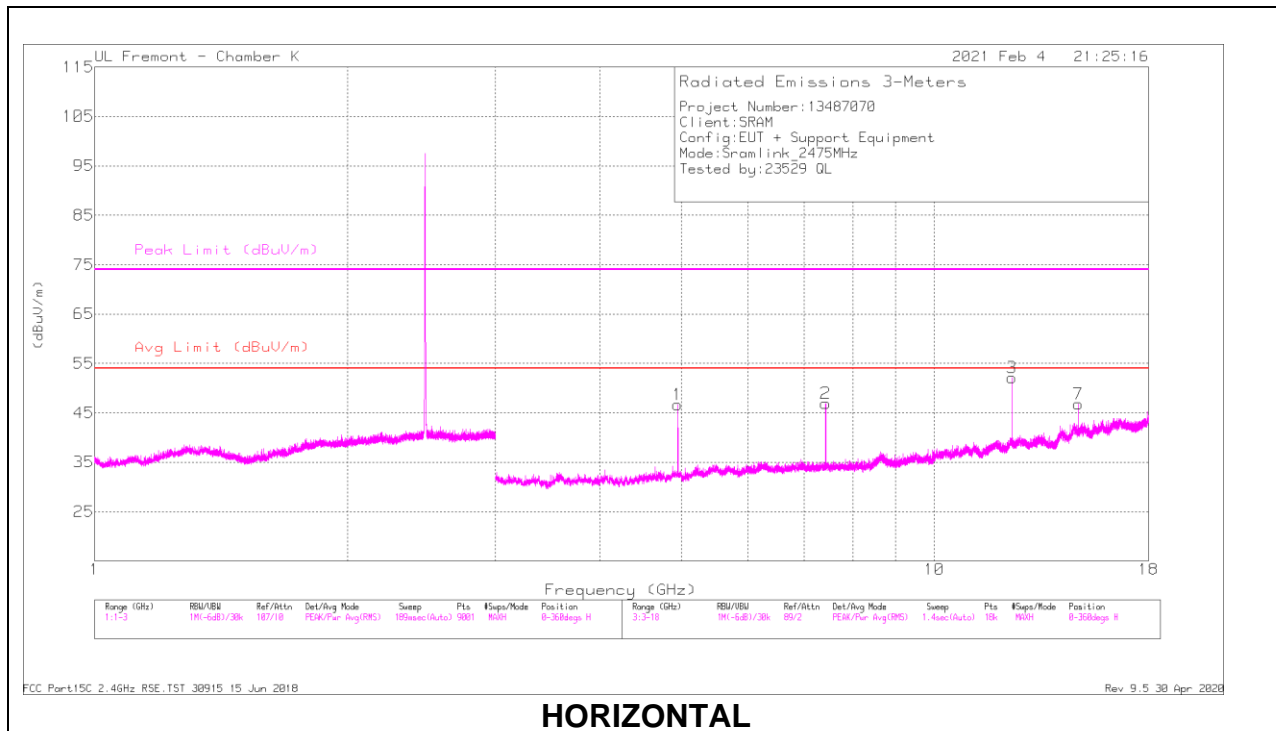

HORIZONTAL

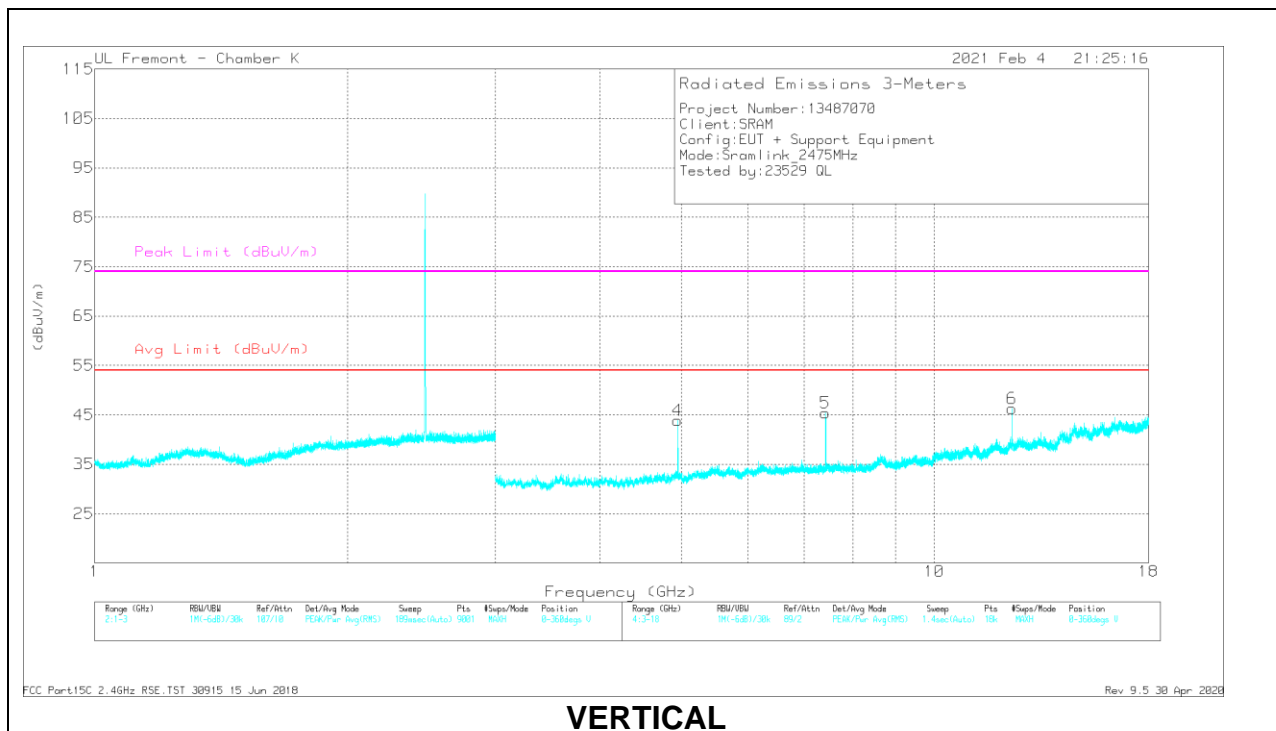

VERTICAL


RADIATED EMISSIONS

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T863 (dB/m)	Amp/Cbl/Filtr/Par d (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 4.95097	60.08	PK2	34.3	-40.7	53.68	-	-	74	-20.32	18	206	H
	* 4.94908	51.99	MAv1	34.3	-40.7	45.59	54	-8.41	-	-	18	206	H
2	* 7.4265	55.71	PK2	36	-38.1	53.61	-	-	74	-20.39	195	112	H
	* 7.42373	47.53	MAv1	36.1	-38.1	45.53	54	-8.47	-	-	195	112	H
3	* 12.37248	54.43	PK2	39.3	-34.5	59.23	-	-	74	-14.77	160	134	H
	* 12.37252	48.44	MAv1	39.3	-34.5	53.24	54	-7.6	-	-	160	134	H
7	* 14.85283	49.05	PK2	40.7	-34.6	55.15	-	-	-	-	64	112	H
4	* 4.95098	58.08	PK2	34.3	-40.7	51.68	-	-	74	-22.32	334	271	V
	* 4.9509	49.86	MAv1	34.3	-40.7	43.46	54	-10.54	-	-	334	271	V
5	* 7.42646	53.78	PK2	36	-38.1	51.68	-	-	74	-22.32	222	123	V
	* 7.42368	45.18	MAv1	36.1	-38.1	43.18	54	-10.82	-	-	222	123	V
6	* 12.37255	50.18	PK2	39.3	-34.5	54.98	-	-	74	-19.02	12	214	V
	* 12.37259	42.63	MAv1	39.3	-34.5	47.43	54	-6.57	-	-	12	214	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 PK2 - KDB558074 Method: Maximum Peak
 MAv1 - KDB558074 Option 1 Maximum RMS Average

10.3. WORST CASE BELOW 30MHz

SPURIOUS EMISSIONS BELOW 30 MHz (WORST-CASE CONFIGURATION)

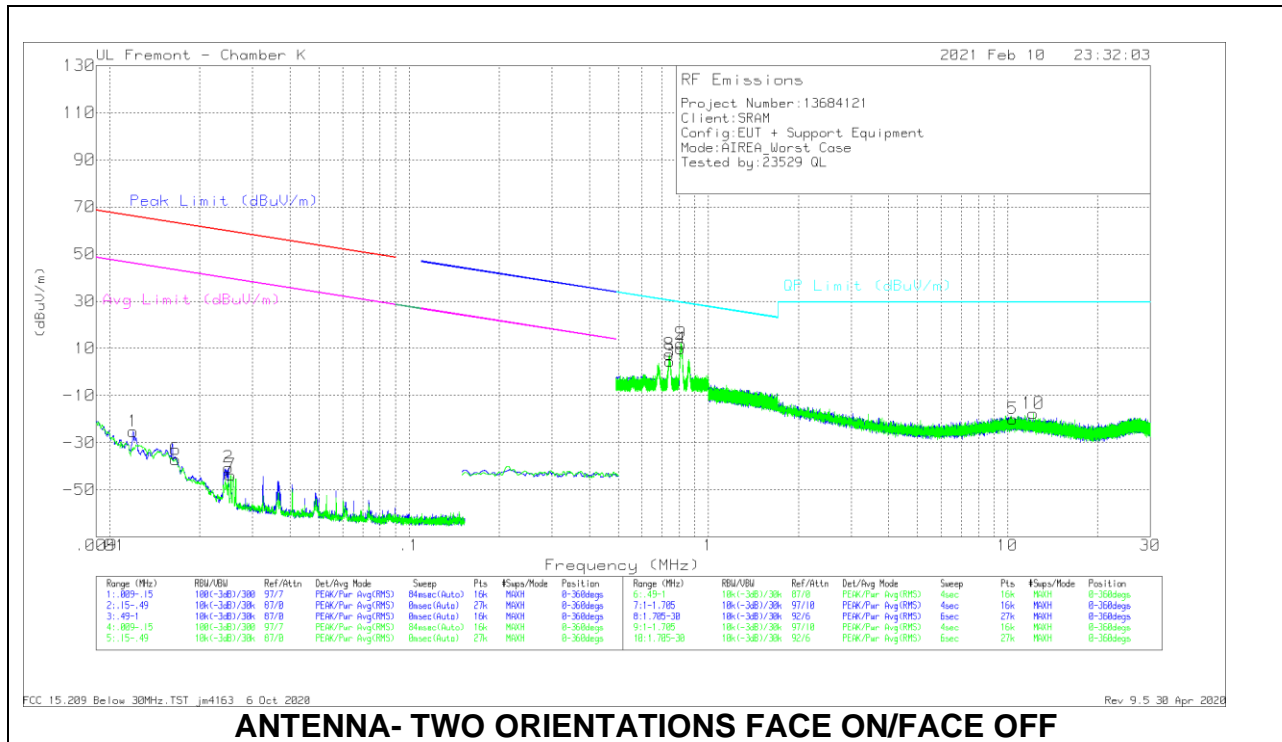

ANTENNA- TWO ORIENTATIONS FACE ON/FACE OFF

Below 30MHz Data

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	Loop Antenna (E ACF)	Amp/Cbl (dB)	Dist Corr 300m	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	Margin (dB)	Avg Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Orientation
1	.01196	26.26	Pk	60	-31.5	-80	-25.24	66.03	-91.27	46.03	-71.27	0-360	Face on
2	.02489	13.12	Pk	58.5	-32.1	-80	-40.48	59.66	-100.14	39.66	-80.14	0-360	Face on
6	.01657	15.3	Pk	59.4	-31.8	-80	-37.1	63.2	-100.3	43.2	-80.3	0-360	Face off
7	.02536	9.83	Pk	58.5	-32.1	-80	-43.77	59.5	-103.27	39.5	-83.27	0-360	Face off

Pk - Peak detector


Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	Loop Antenna (E ACF)	Amp/Cbl (dB)	Dist Corr 30m (dB) 40Log	Corrected Reading (dBuV/m)	QP Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Orientation
3	.74373	20.51	Pk	56.2	-32.2	-40	4.51	30.19	-25.68	0-360	Face on
4	.80837	25.92	Pk	56.3	-32.2	-40	10.02	29.46	-19.44	0-360	Face on
8	.74066	23.47	Pk	56.2	-32.2	-40	7.47	30.22	-22.75	0-360	Face off
9	.81013	27.96	Pk	56.3	-32.2	-40	12.06	29.45	-17.39	0-360	Face off
5	10.41283	17.25	Pk	34.6	-31.8	-40	-19.95	29.5	-49.45	0-360	Face on
10	12.17766	19.92	Pk	34.3	-31.8	-40	-17.58	29.5	-47.08	0-360	Face off

Pk - Peak detector


NOTE: The limits in CFR 47, Part 15, Subpart C, paragraph 15.209(a), are identical to those in RSS-Gen section 8.9, Table 6, since the measurements are performed in terms of magnetic field strength and converted to electric field strength levels (as reported in the table), using the free space impedance of 377 Ohms. For example the measurement at frequency X kHz resulted in a level of Y dBuV/m, which is equivalent to $Y - 51.5 = Z$ dBuA/m, which has the same margin, W dB, to the corresponding RSS-Gen Table 6 limit as it has to 15.209(a) limit.

10.4. WORST CASE BELOW 1 GHz

SPURIOUS EMISSIONS 30 TO 1000 MHz (WORST-CASE CONFIGURATION)

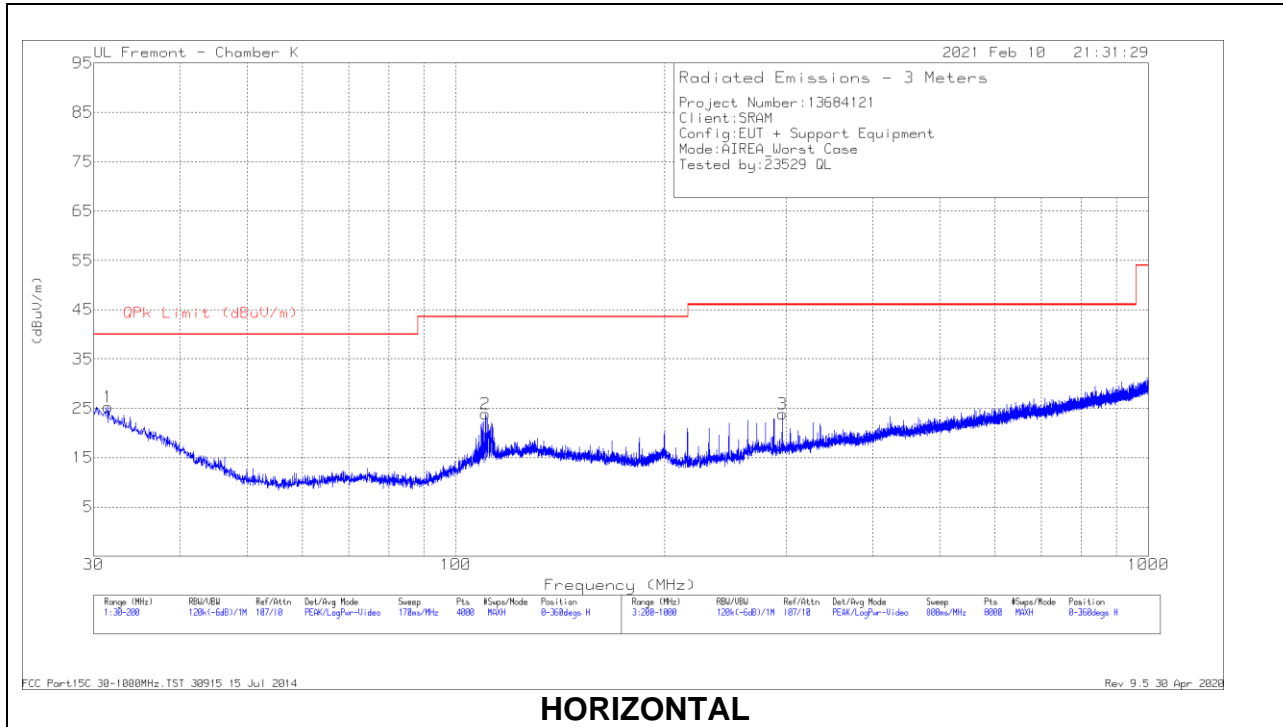

HORIZONTAL

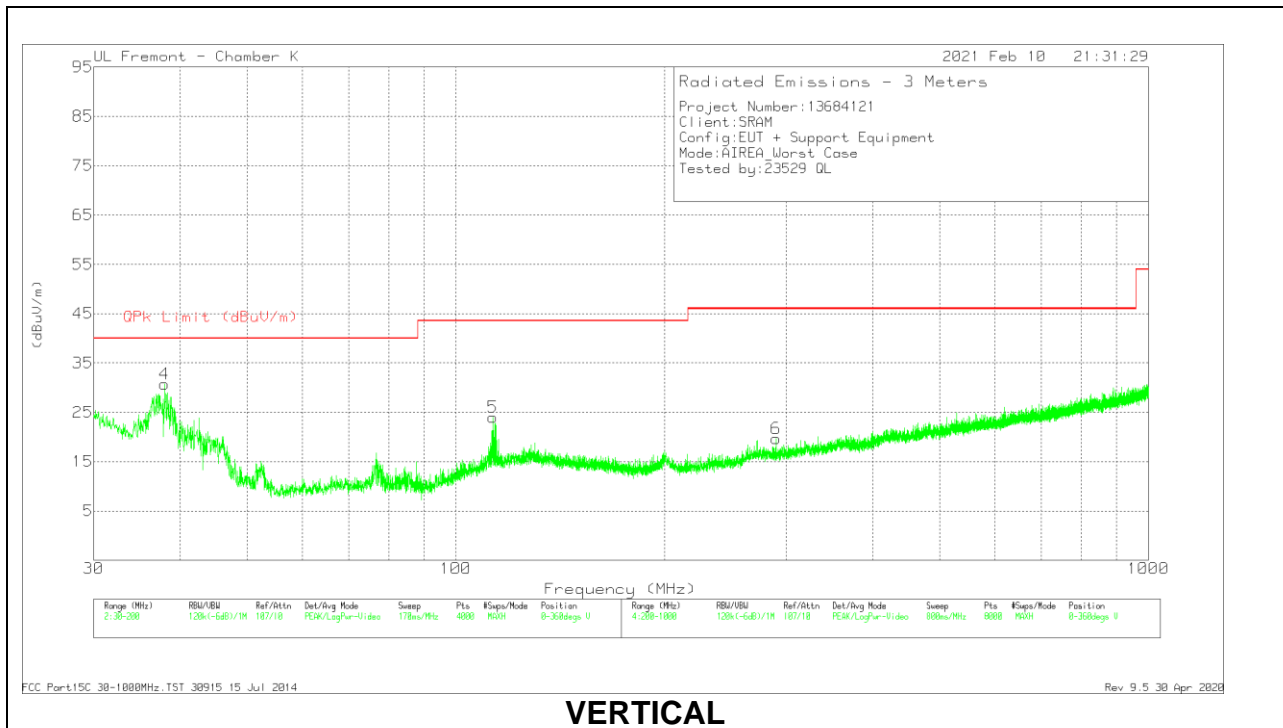

VERTICAL



Below 1GHz Data

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	AF 81560 (dB/m)	Amp/Cbl (dB)	Corrected Reading (dBuV/m)	QPk Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	31.4879	29.97	Pk	26.9	-31.6	25.27	40	-14.73	0-360	200	H
2	110.2608	36	Pk	18.7	-30.8	23.9	43.52	-19.62	0-360	401	H
4	38.1225	40.97	Pk	21.8	-31.5	31.27	40	-8.73	97	95	V
	37.8872	29.38	Qp	22	-31.5	19.88	40	-20.12	97	95	V
5	113.194	35.69	Pk	19.1	-30.8	23.99	43.52	-19.53	0-360	100	V
3	296.0125	33.93	Pk	19.7	-29.8	23.83	46.02	-22.19	0-360	100	H
6	290.1117	29.86	Pk	19.7	-29.9	19.66	46.02	-26.36	0-360	201	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 Pk - Peak detector
 Qp - Quasi-Peak detector

10.5. WORST CASE 18-26 GHz

SPURIOUS EMISSIONS 18-26 GHz (WORST-CASE CONFIGURATION)

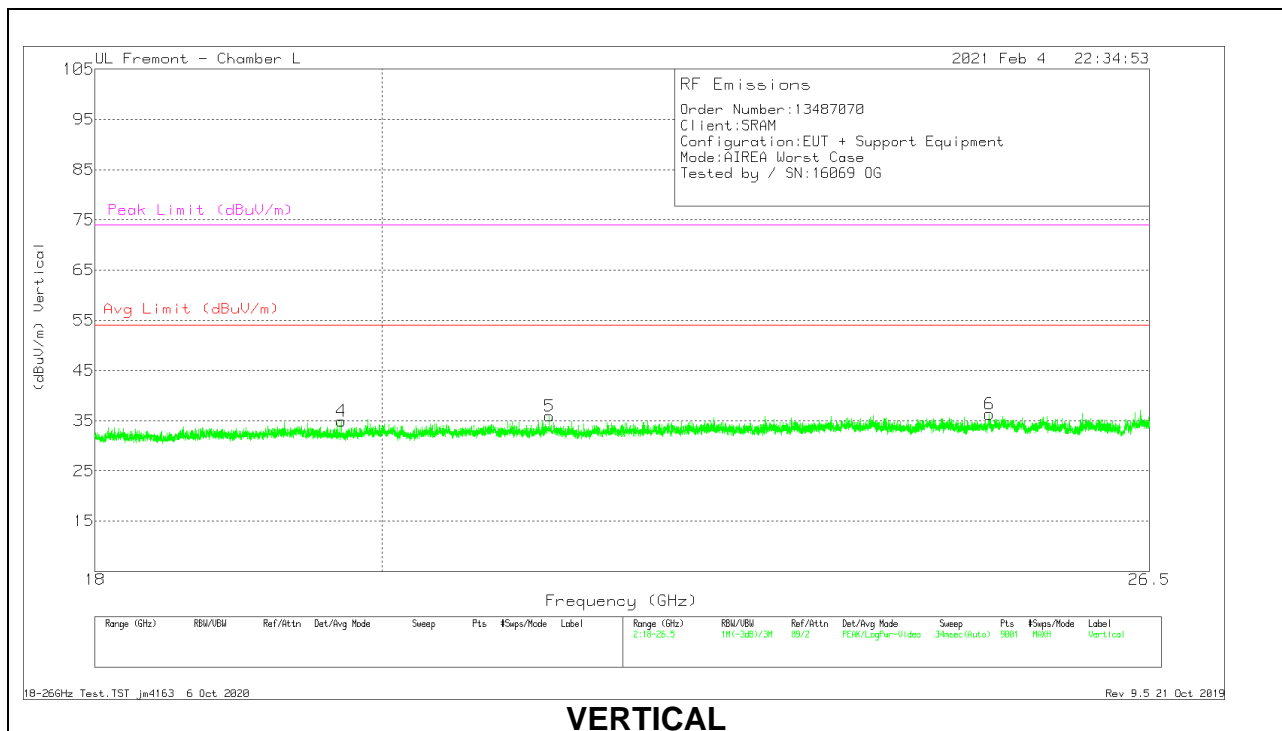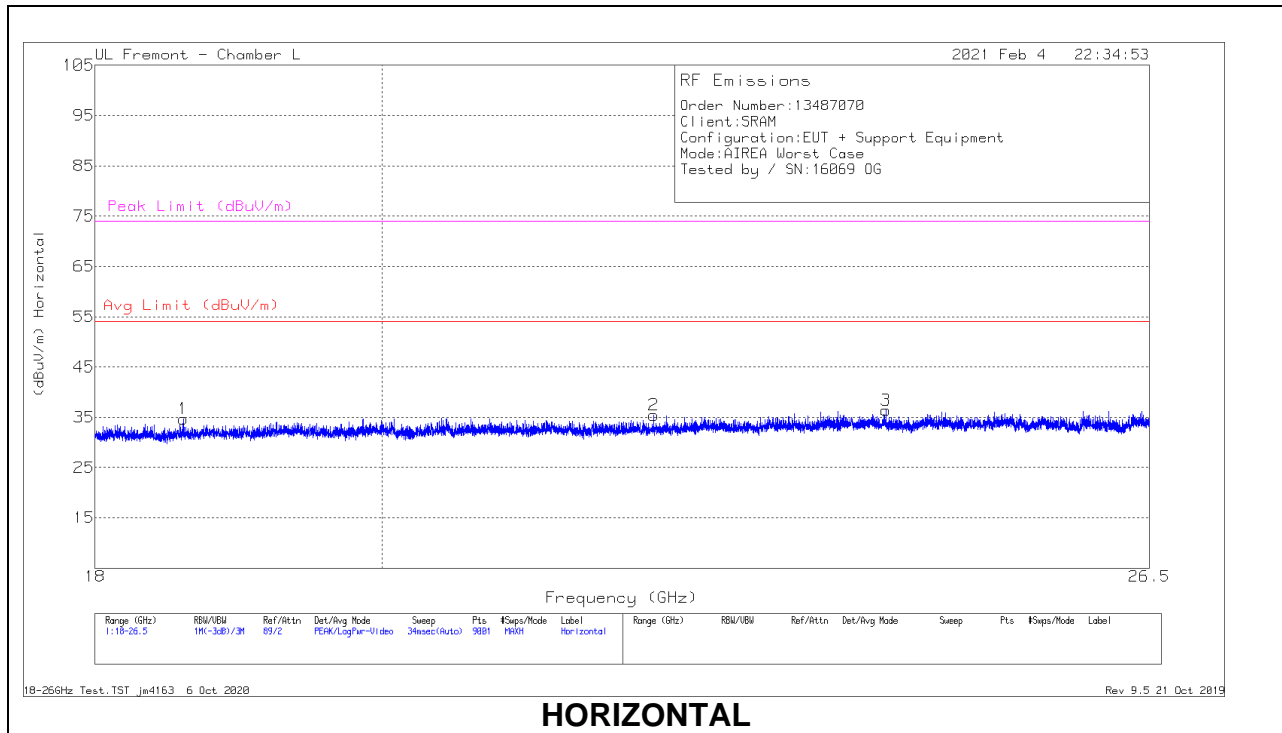

18 – 26GHz DATA

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	T447 AF (dB/m)	Amp/Cb l (dB)	Dist Cor r (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)
1	18.59122	70.75	Pk	32.4	-59	-9.5	34.65	54	-19.35	74	-39.35
2	22.09416	69.11	Pk	33.5	-57.7	-9.5	35.41	54	-18.59	74	-38.59
3	24.05861	68.2	Pk	34.3	-56.6	-9.5	36.4	54	-17.6	74	-37.6
4	19.70189	68.13	Pk	32.8	-56.5	-9.5	34.93	54	-19.07	74	-39.07
5	21.26305	69.42	Pk	33.1	-57.1	-9.5	35.92	54	-18.08	74	-38.08
6	24.98889	66.32	Pk	34.6	-55.1	-9.5	36.32	54	-17.68	74	-37.68

Pk - Peak detector