

TEST REPORT

Report Number. : 14615286-E2V2

Applicant : SRAM LLC
1000 W Fulton Market 4th Floor
Chicago, IL 60607, United States

Model : 55502

Brand : SRAM

FCC ID : C9O-PMB2

IC : 10161A-PMB2

EUT Description : Pressure Sensor

Test Standard(s) : FCC 47 CFR PART 15 SUBPART C
ISED RSS-247 ISSUE 2
ISED RSS-GEN ISSUE 5 + A1 + A2

Date Of Issue:

2022-03-16

Prepared by:

UL VERIFICATION SERVICES

47173 Benicia Street

Fremont, CA 94538 U.S.A.

TEL: (510) 319-4000

FAX: (510) 661-0888



REPORT REVISION HISTORY

Rev.	Issue Date	Revisions	Revised By
V1	2023-03-06	Initial Issue	---
V2	2023-03-16	Updated Section Table of Content, 1,3,5.4 and 6.2	Kiya Kedida

TABLE OF CONTENTS

REPORT REVISION HISTORY	2
TABLE OF CONTENTS	3
1. ATTESTATION OF TEST RESULTS.....	5
2. TEST RESULTS SUMMARY	7
3. TEST METHODOLOGY	8
4. FACILITIES AND ACCREDITATION.....	8
5. DECISION RULES AND MEASUREMENT UNCERTAINTY.....	9
5.1. METROLOGICAL TRACEABILITY	9
5.2. DECISION RULES	9
5.3. MEASUREMENT UNCERTAINTY	9
5.4. SAMPLE CALCULATION.....	10
6. EQUIPMENT UNDER TEST	11
6.1. EUT DESCRIPTION.....	11
6.2. MAXIMUM OUTPUT POWER.....	11
6.3. DESCRIPTION OF AVAILABLE ANTENNAS	11
6.4. SOFTWARE AND FIRMWARE	11
6.5. WORST-CASE CONFIGURATION AND MODE.....	11
6.6. DESCRIPTION OF TEST SETUP.....	12
7. MEASUREMENT METHOD	14
8. TEST AND MEASUREMENT EQUIPMENT	15
9. ANTENNA PORT TEST RESULTS	16
9.1. ON TIME AND DUTY CYCLE	16
9.2. 99% BANDWIDTH.....	17
9.3. 6 dB BANDWIDTH	18
9.4. OUTPUT POWER	19
9.5. AVERAGE POWER.....	20
9.6. POWER SPECTRAL DENSITY	21
9.7. CONDUCTED SPURIOUS EMISSIONS.....	22
10. RADIATED TEST RESULTS.....	24
10.1. LIMITS AND PROCEDURE.....	24

10.2.	TRANSMITTER ABOVE 1 GHz.....	26
10.3.	WORST CASE BELOW 30MHZ.....	36
10.4.	WORST CASE BELOW 1 GHZ.....	37
10.5.	WORST CASE 18-26 GHz	39
11.	SETUP PHOTOS.....	41

1. ATTESTATION OF TEST RESULTS

COMPANY NAME: SRAM LLC
1000 W Fulton Market 4th Floor
Chicago, IL 60607, United States

EUT DESCRIPTION: Pressure Sensor

MODEL: 55502

BRAND: SRAM

SERIAL NUMBER: Conducted: 12345603
Radiated: 2345601

SAMPLE RECEIPT DATE: 2023-02-08

DATE TESTED: 2023-02-10 – 2023-02-13

APPLICABLE STANDARDS	
STANDARD	TEST RESULTS
47 CFR Part 15 Subpart C	Complies
ISED RSS-247 Issue 2	Complies
ISED RSS-GEN Issue 5 + A1 + A2	Complies

UL Verification Services Inc. tested the above equipment in accordance with the requirements set forth in the above standards. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. It is the manufacturer's responsibility to assure that additional production units of this model are manufactured with identical electrical and mechanical components. All samples tested were in good operating condition throughout the entire test program. Measurement Uncertainties are published for informational purposes only and were not taken into account unless noted otherwise.

This document may not be altered or revised in any way unless done so by UL Verification Services Inc. and all revisions are duly noted in the revisions section. Any alteration of this document not carried out by UL Verification Services Inc. will constitute fraud and shall nullify the document.

Approved & Released For
UL Verification Services Inc. By:

Prepared By:



Dan Corona
Operations Leader
Consumer Technology Division
UL Verification Services Inc.



Glenn Escano
Senior Test Engineer
Consumer Technology Division
UL Verification Services Inc.

Reviewed By:



Kiya Kedida
Senior Project Engineer
Consumer Technology Division
UL Verification Services Inc.

2. TEST RESULTS SUMMARY

This report contains data provided by the customer which can impact the validity of results. UL Verification Services Inc. is only responsible for the validity of results after the integration of the data provided by the customer.

Below is a list of the data provided by the customer:

- 1) Antenna gain and type (see section 6.3)

FCC Clause	ISED Clause	Requirement	Result	Comment
See Comment		Duty Cycle	Reporting purposes only	ANSI C63.10 Section 11.6.
-	RSS-GEN 6.7	99% OBW	Reporting purposes only	ANSI C63.10 Section 6.9.3.
15.247 (a) (2)	RSS-247 5.2 (a)	6dB BW	Compliant	None.
15.247 (b) (3)	RSS-247 5.4 (d)	Output Power	Compliant	None.
See Comment		Average power	Reporting purposes only	Per ANSI C63.10, Section 11.9.2.3.2.
15.247 (e)	RSS-247 5.2 (b)	PSD	Compliant	None.
15.247 (d)	RSS-247 5.5	Conducted Spurious Emissions	Compliant	None.
15.209, 15.205	RSS-GEN 8.9, 8.10	Radiated Emissions	Compliant	None.
15.207	RSS-Gen 8.8	AC Mains Conducted Emissions	NA	A.C. line conducted was not evaluated because the E.U.T. uses the battery

3. TEST METHODOLOGY

The tests documented in this report were performed in accordance with FCC 47 CFR Part 2, FCC 47 CFR Part 15, ANSI C63.10-2013, KDB 558074 D01 15.247 Meas Guidance v05r02, KDB 414788 D01 Radiated Test Site v01r01, RSS-GEN Issue 5 + A1 + A2, and RSS-247 Issue 2.

4. FACILITIES AND ACCREDITATION

UL Verification Services Inc. is accredited by A2LA, Certificate Number 0751.05, for all testing performed within the scope of this report. Testing was performed at the locations noted below.

	Address	ISED CABID	ISED Company Number	FCC Registration
<input type="checkbox"/>	Building 1: 47173 Benicia Street Fremont, CA 94538, U.S.A	US0104	2324A	550739
<input type="checkbox"/>	Building 2: 47266 Benicia Street Fremont, CA 94538, U.S.A	US0104	22541	550739
<input checked="" type="checkbox"/>	Building 4: 47658 Kato Rd Fremont, CA 94538, U.S.A	US0104	2324B	550739

5. DECISION RULES AND MEASUREMENT UNCERTAINTY

5.1. METROLOGICAL TRACEABILITY

All test and measuring equipment utilized to perform the tests documented in this report are calibrated on a regular basis, with a maximum time between calibrations of one year or the manufacturers' recommendation, whichever is less, and where applicable is traceable to recognized national standards.

5.2. DECISION RULES

The Decision Rule is based on Simple Acceptance in accordance with ISO Guide 98-4:2012 Clause 8.2. (Measurement uncertainty is not taken into account when stating conformity with a specified requirement.)

5.3. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

PARAMETER	U _{Lab}
Radio Frequency (Spectrum Analyzer)	141.16 Hz
Occupied Bandwidth	1.22%
Power Spectral Density	2.47 dB
RF Power Measurement Direct Method Using Power Meter	1.3 dB (PK) / 0.45 dB (AV)
Unwanted Emissions, Conducted	1.94 dB
Worst Case Conducted Disturbance, 9KHz to 0.15 MHz	3.78 dB
Worst Case Conducted Disturbance, 0.15 to 30 MHz	3.40 dB
Worst Case Radiated Disturbance, 9KHz to 30 MHz	2.87 dB
Worst Case Radiated Disturbance, 30 to 1000 MHz	6.01 dB
Worst Case Radiated Disturbance, 1000 to 18000 MHz	4.73 dB
Worst Case Radiated Disturbance, 18000 to 26000 MHz	4.51 dB
Worst Case Radiated Disturbance, 26000 to 40000 MHz	5.29 dB
Time Domain Measurements	3.39%
Temperature	0.57°C
Humidity	3.39%
DC Supply Voltages	0.57%

Uncertainty figures are valid to a confidence level of 95%.

5.4. SAMPLE CALCULATION

RADIATED EMISSIONS

Where relevant, the following sample calculation is provided:

Field Strength (dBuV/m) = Measured Voltage (dBuV) + Antenna Factor (dB/m) + Cable Loss (dB) – Preamp Gain (dB)

36.5 dBuV + 18.7 dB/m + 0.6 dB – 26.9 dB = 28.9 dBuV/m

6. EQUIPMENT UNDER TEST

6.1. EUT DESCRIPTION

The EUT is a Pressure Sensor.

6.2. MAXIMUM OUTPUT POWER

The transmitter has a maximum peak and average conducted output power as follows:

Frequency Range (MHz)	Mode	Peak		Average	
		Output Power (dBm)	Output Power (mW)	Output Power (dBm)	Output Power (mW)
2405 - 2475	AIREA	7.75	5.96	7.67	5.85

6.3. DESCRIPTION OF AVAILABLE ANTENNAS

The antenna gain and type, as provided by the manufacturer, are as follows:

The radio utilizes a ceramic chip antenna, with a maximum gain of 0 dBi.

6.4. SOFTWARE AND FIRMWARE

The EUT firmware installed during testing was version B-1.0.

The test utility software used during testing was nRF Connect version 4.26.0.

6.5. WORST-CASE CONFIGURATION AND MODE

Radiated emissions below 1GHz and above 18GHz were performed with the EUT set to transmit at the channel with highest output power as worst-case scenario.

Band edge and radiated emissions between 1GHz and 18GHz were performed with the EUT set to transmit at the highest power on low, middle, and high channels.

The fundamental of the EUT was investigated in three orthogonal orientations X,Y, & Z. It was determined that Z orientation was worst-case orientation; therefore, all final radiated testing was performed with the EUT in Z orientation.

Worst-case data rate as provided by the client was 250kbps.

6.6. DESCRIPTION OF TEST SETUP

SUPPORT EQUIPMENT

Support Equipment List			
Description	Manufacturer	Model	Serial Number
Phone	Apple	iPhone Xs	F71Z4FB4KXKN
DC Power Supply	Kenwood Corporation	PA36-3A	7060074
DC Power Supply	TDK.Lambda	GEN 60-25	08M3592V

I/O CABLES (CONDUCTED EMISSIONS)

I/O CABLE LIST						
Cable No.	Port	# of Identical Ports	Connector Type	Cable Type	Cable Length (m)	Remarks
1	AC	1	AC	Unshielded	1.5	AC Main to DC Supply, to Analyzer
2	DC	1	DC	Unshielded	0.5	Power Supply to EUT
3	Antenna Port	1	SMA	Unshielded	0.1	EUT to Analyzer


I/O CABLES (RADIATED EMISSIONS)

I/O CABLE LIST						
Cable No.	Port	# of Identical Ports	Connector Type	Cable Type	Cable Length (m)	Remarks
1	AC	1	AC	Unshielded	1.5	AC Main to DC Supply
2	DC	1	DC	Unshielded	0.5	Power Supply to EUT

TEST SETUP

For the purposes of testing, the EUT is connected to a 3V DC Power supply for radiated emissions above 1GHz. The EUT is normally powered by a CR1632 battery at 3V. The phone is used for setting up purposes and was removed during testing.

SETUP DIAGRAM

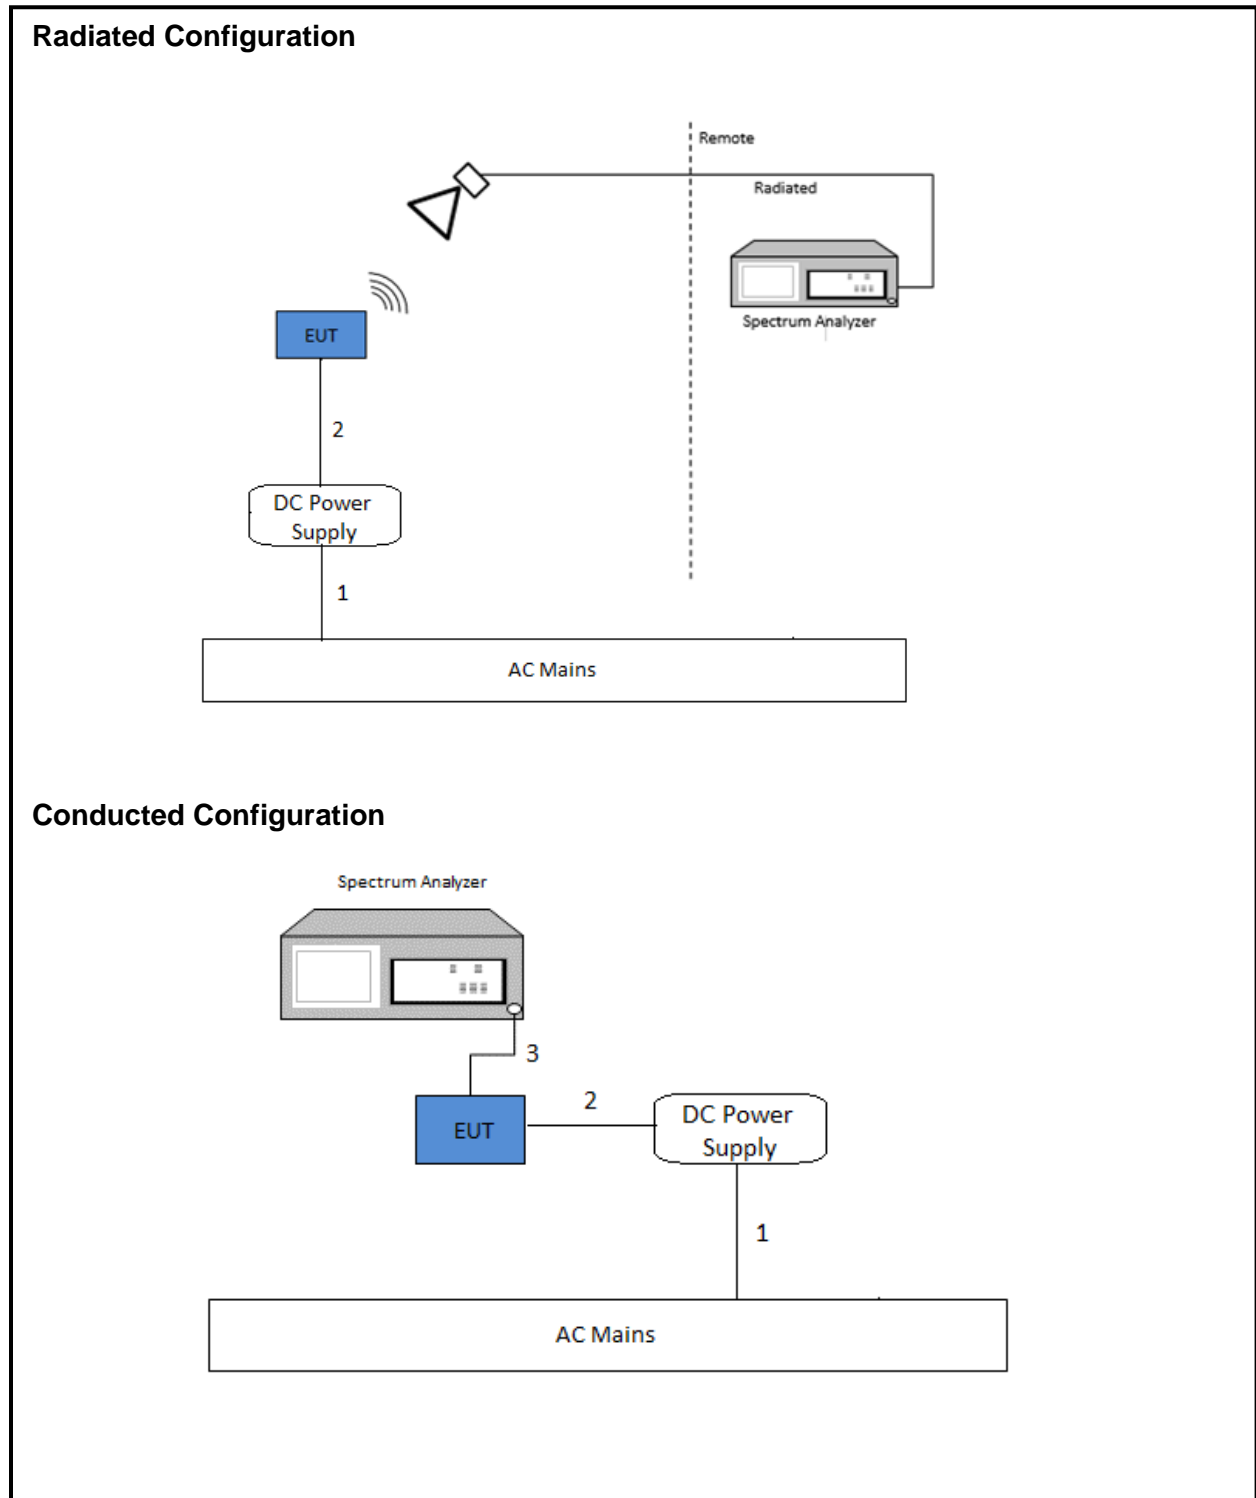

7. MEASUREMENT METHOD

On Time and Duty Cycle: ANSI C63.10 Section 11.6.

6 dB BW: ANSI C63.10 Subclause -11.8.1 RBW \geq DTS BW

Occupied BW (99%): ANSI C63.10-2013 Section 6.9.3

Output Power: ANSI C63.10 Subclause -11.9.1.3 Method PKPM1 Peak-reading power meter

Output Power: ANSI C63.10 Subclause -11.9.2.3.2 Method AVGPM-G (Measurement using a gated RF average-reading power meter)

PSD: ANSI C63.10 Subclause -11.10.2 Method PKPSD (peak PSD)

Radiated emissions non-restricted frequency bands: ANSI C63.10 Subclause -11.11

Radiated emissions restricted frequency bands: ANSI C63.10 Subclause -11.12.1

Conducted emissions in restricted frequency bands: ANSI C63.10 Subclause -11.12.2

Band-edge: ANSI C63.10 Section 6.10

*AC Power Line Conducted Emissions: ANSI C63.10-2013, Section 6.2.

Radiated Spurious Emissions Below 30MHz: ANSI C63.10-2013 Section 6.4

***- A.C. line conducted was not evaluated because the E.U.T. uses the battery.**

8. TEST AND MEASUREMENT EQUIPMENT

The following test and measurement equipment was utilized for the tests documented in this report:

TEST EQUIPMENT LIST					
Description	Manufacturer	Model	ID Num	Cal Due	Last Cal
Antenna, Broadband Hybrid, 30MHz to 2000MHz	Sunol Sciences Corp.	JB1	80813	2023-06-08	2022-06-08
Amplifier, 10KHz to 1GHz, 32dB	SONOMA INSTRUMENT	310	175953	*2023-02-08	2022-02-08
Antenna, Horn 1-18GHz	ETS-Lindgren (Cedar Park, Texas)	3117	223083	2023-07-05	2022-07-05
RF Filter Box, 1-18GHz	UL-FR1	n/a	171875	2023-08-12	2022-08-12
Antenna, Horn 18 to 26.5GHz	ARA	MWH-1826/B	172364	2023-03-08	2022-03-08
Amplifier 18-26.5GHz, +5Vdc, 60dB min	AMPLICAL	AMP18G26.5-60	215705	2023-02-26	2022-02-26
Antenna, Passive Loop 30Hz - 1MHz	ELECTRO METRICS	EM-6871	219909	2023-05-10	2022-05-10
Antenna, Passive Loop 100KHz - 30MHz	ELECTRO METRICS	EM-6872	219911	2023-05-10	2022-05-10
Spectrum Analyzer, PSA, 3Hz to 44GHz	Agilent Technologies	N4440A	80386	2023-03-02	2022-03-02
Power Meter, P-series single channel	Keysight Technologies Inc	N1911A	90719	2024-01-31	2023-01-25
Power Sensor, P - series, 50MHz to 18GHz, Wideband	Keysight Technologies Inc	N1921A	81319	2024-01-31	2023-01-25
10dB Fixed Attenuator	Pasternack Enterprises	PE7087-10	N/A	Verified	Verified
UL TEST SOFTWARE LIST					
Radiated Software	UL	UL EMC	Ver 2022-06-28, 2022-05-18, 2020-06-13, 2015-12-28, 2015-12-29, 2014-07-15		
Antenna Port Software	UL	UL RF	Ver 2022.8.16		

NOTES:

*- Calibration due date extended to 2023-02-28.

9. ANTENNA PORT TEST RESULTS

9.1. ON TIME AND DUTY CYCLE

LIMITS

None; for reporting purposes only.


PROCEDURE

KDB 558074 Zero-Span Spectrum Analyzer Method.

ON TIME AND DUTY CYCLE RESULTS

Mode	ON Time B (msec)	Period (msec)	Duty Cycle x (linear)	Duty Cycle (%)	Duty Cycle Correction Factor (dB)	1/B Minimum VBW (kHz)
AIREA	87.100	87.100	1.000	100.00	0.00	0.010

DUTY CYCLE PLOTS

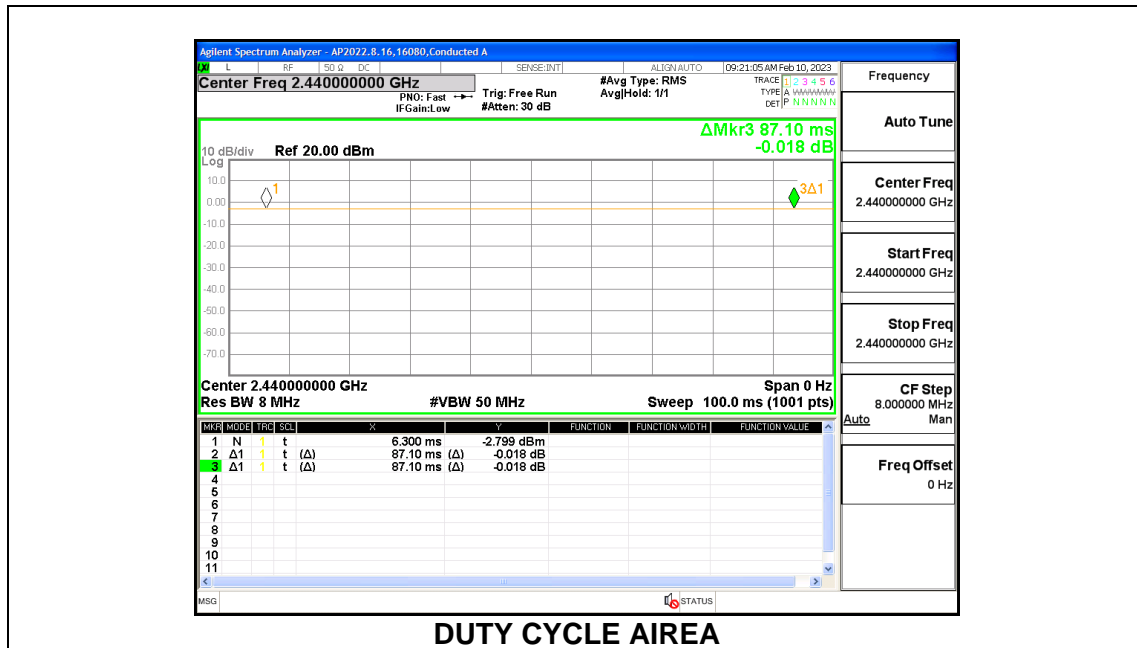



9.2. 99% BANDWIDTH

LIMITS

None; for reporting purposes only.

RESULTS

Channel	Frequency (MHz)	99% Bandwidth (MHz)
Low	2405	2.2257
Middle	2440	2.2375
High	2475	2.2360

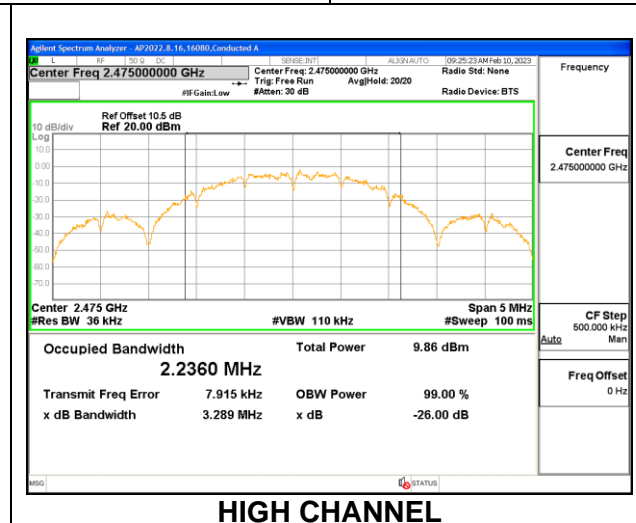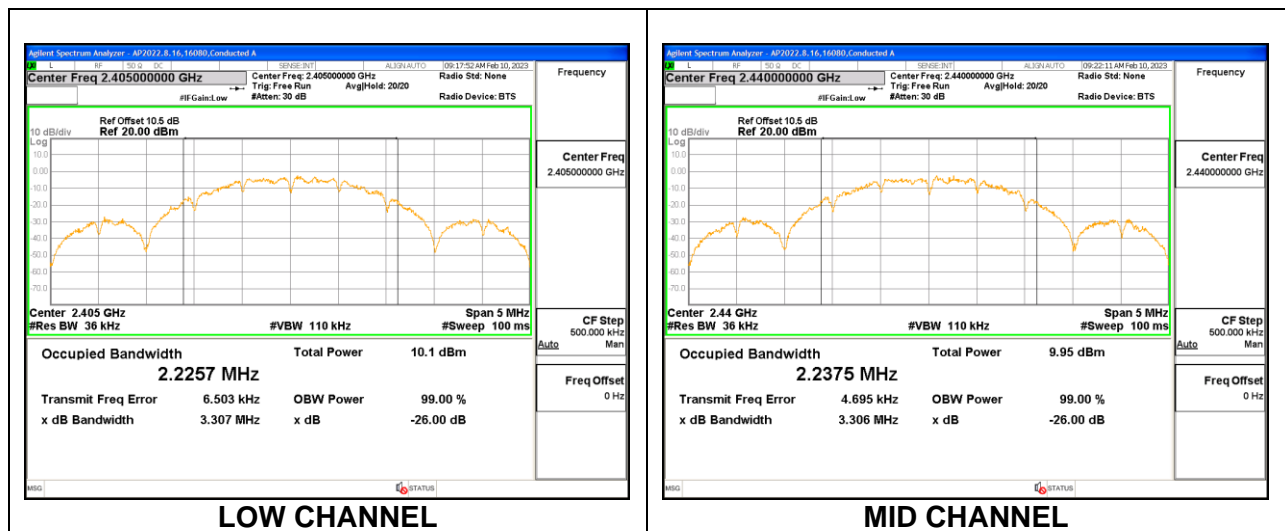

9.3. 6 dB BANDWIDTH

LIMITS


FCC §15.247 (a) (2)

RSS-247 5.2 (a)

The minimum 6 dB bandwidth shall be at least 500 kHz.

RESULTS

Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	Minimum Limit (MHz)
Low	2405	1.503	0.5
Middle	2440	1.575	0.5
High	2475	1.535	0.5

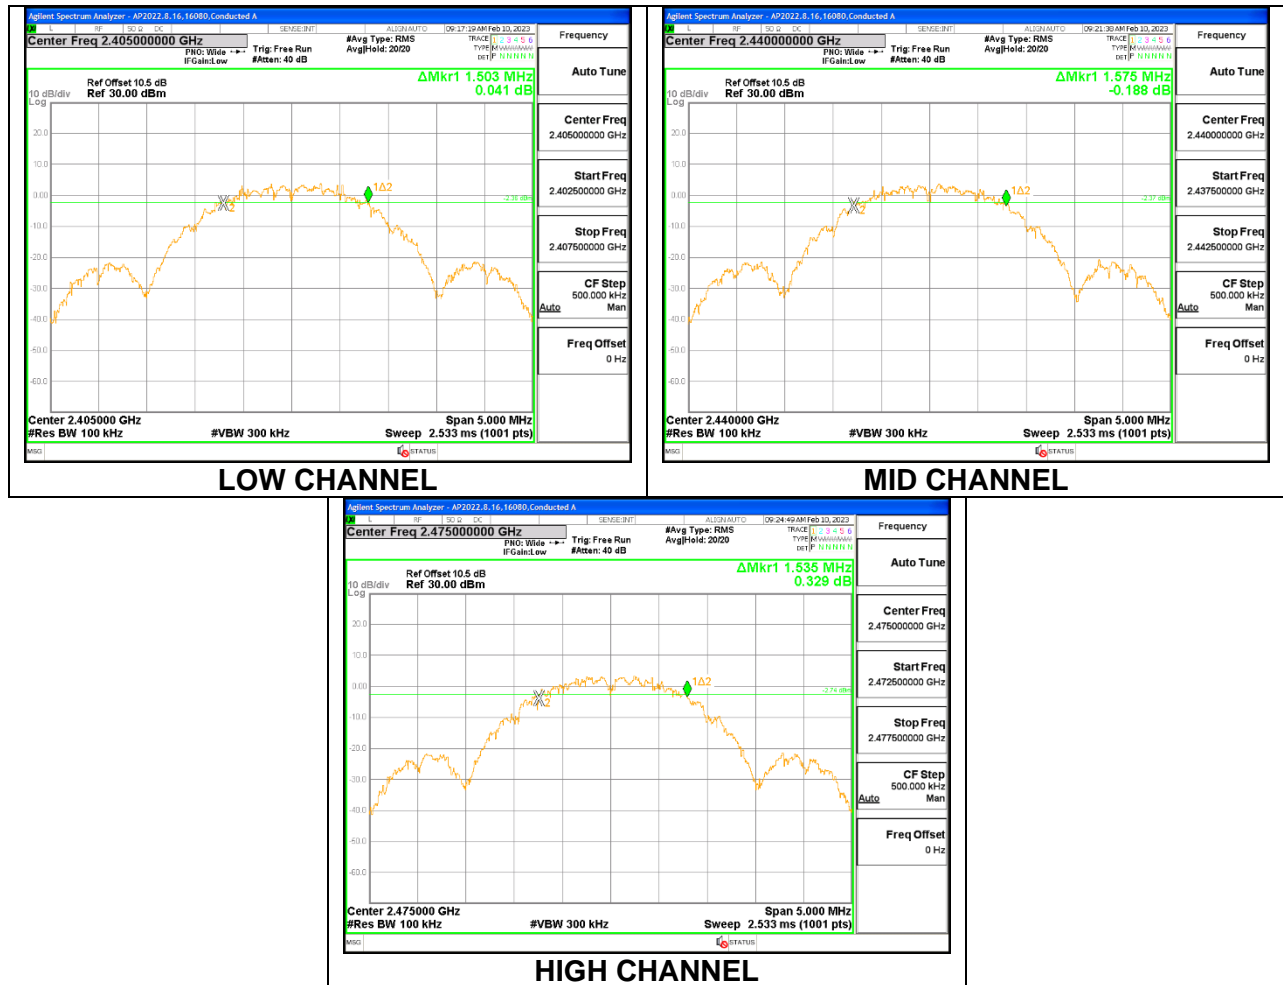

9.4. OUTPUT POWER

LIMITS

FCC §15.247 (b) (3)

RSS-247 5.4 (d)

The maximum antenna gain is less than or equal to 6 dBi, therefore the limit is 30 dBm.

TEST PROCEDURE

The transmitter output is connected to a power meter.

The power output was measured on the EUT antenna port using SMA cable with 10dB attenuator connected to a power meter via wideband power sensor. Peak output power was read directly from power meter.

RESULTS

Tested By:	ZS 16080
Date:	2023-02-10

Channel	Frequency (MHz)	Peak Power Reading (dBm)	Limit (dBm)	Margin (dB)
Low	2405	7.75	30	-22.250
Middle	2440	7.67	30	-22.330
High	2475	7.55	30	-22.450

9.5. AVERAGE POWER

LIMITS

None; for reporting purposes only.

TEST PROCEDURE

The transmitter output is connected to a power meter.

The power output was measured on the EUT antenna port using SMA cable with 10dB attenuator connected to a power meter via wideband power sensor. average output power was read directly from power meter.

RESULTS

Tested By:	ZS 16080
Date:	2023-02-10

Channel	Frequency (MHz)	AV power (dBm)
Low	2405	7.67
Middle	2440	7.59
High	2475	7.46

9.6. POWER SPECTRAL DENSITY

LIMITS


FCC §15.247 (e)

RSS-247 (5.2) (b)

The power spectral density conducted from the transmitter to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

RESULTS

Channel	Frequency (MHz)	PSD (dBm/3kHz)	Limit (dBm/3kHz)	Margin (dB)
Low	2405	-6.005	8	-14.01
Middle	2440	-6.663	8	-14.66
High	2475	-5.668	8	-13.67

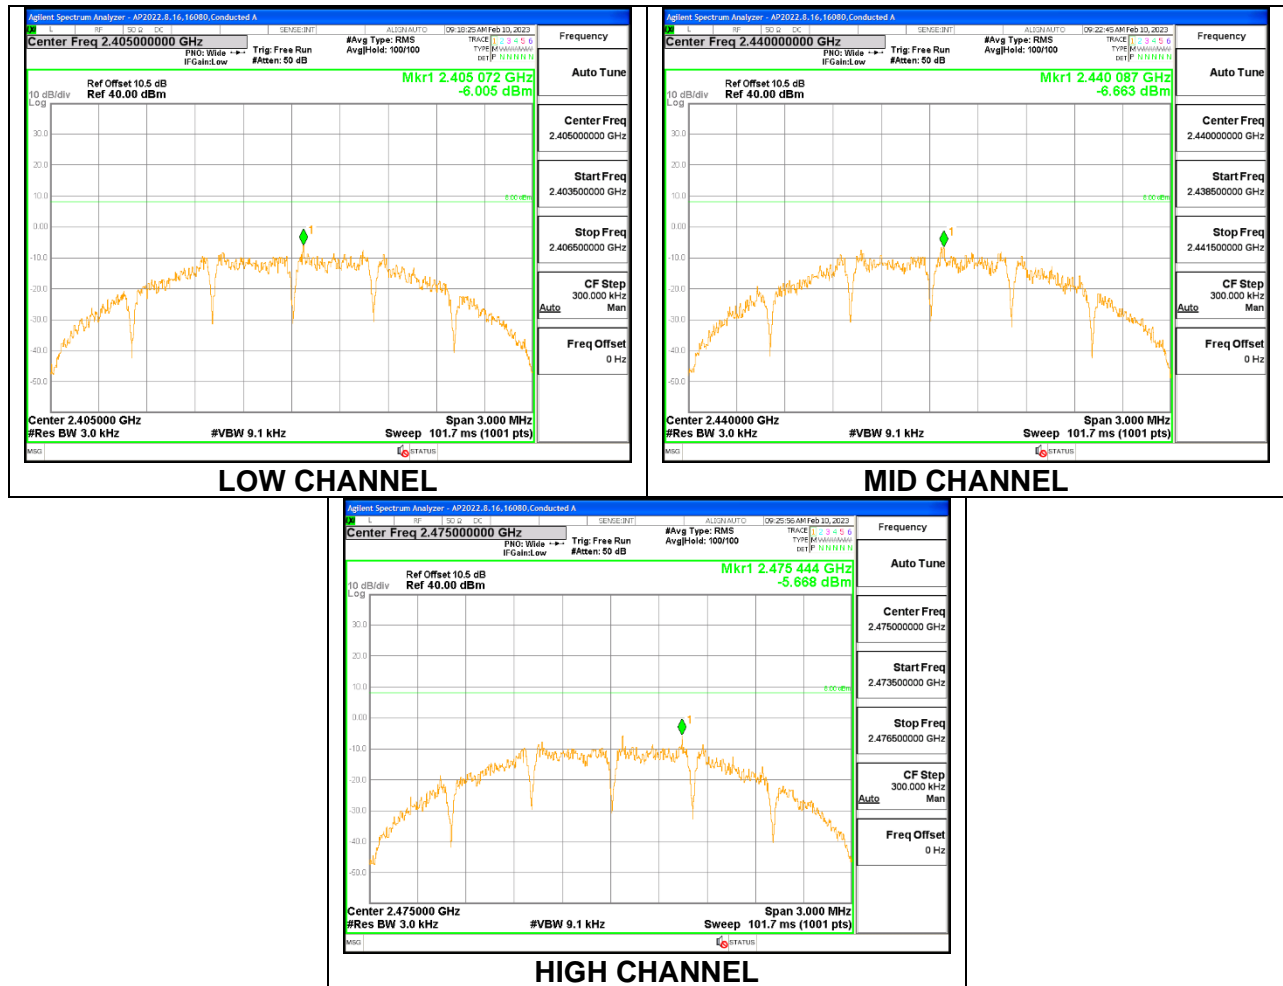

9.7. CONDUCTED SPURIOUS EMISSIONS


LIMITS

FCC §15.247 (d)


RSS-247 5.5

Output power was measured based on the use of a peak measurement, therefore the required attenuation is 20 dB.


RESULTS

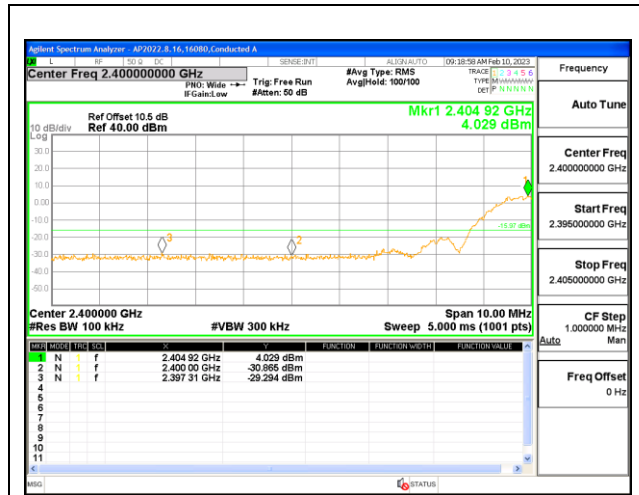


LOW CHANNEL BANDEDGE

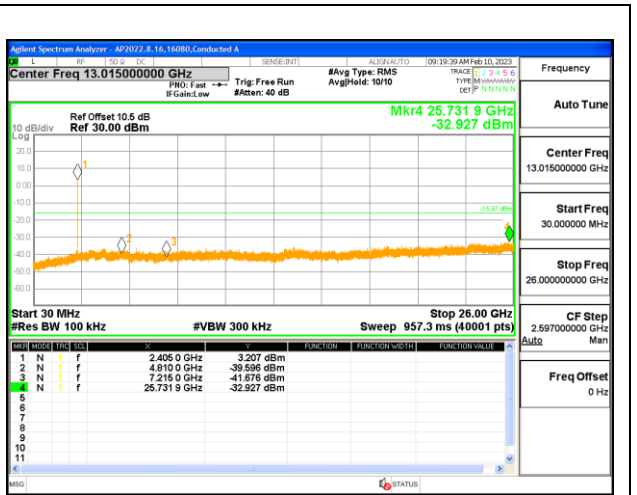


OUT-OF-BAND LOW CHANNEL

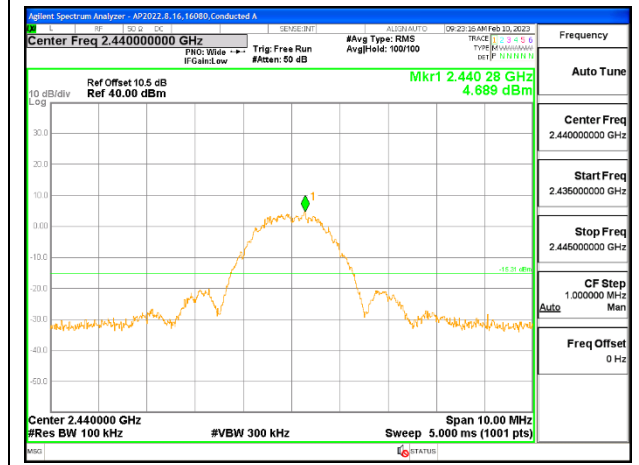


IN-BAND REFERENCE LEVEL

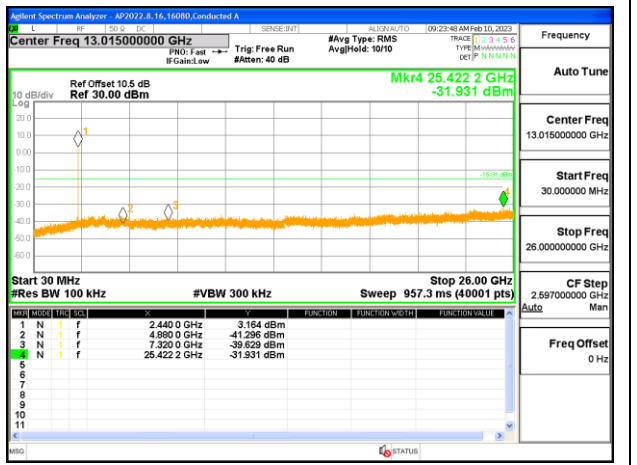

OUT-OF-BAND MID CHANNEL

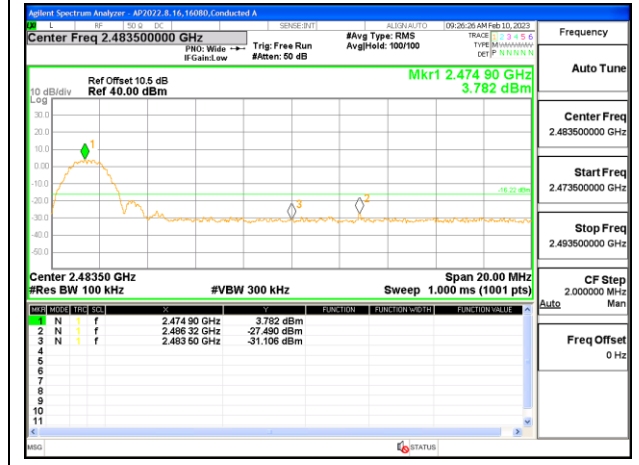

HIGH CHANNEL BANDEDGE

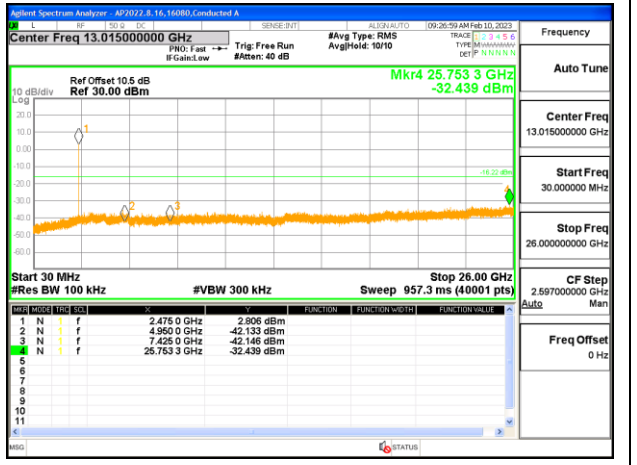

OUT-OF-BAND HIGH CHANNEL

10. RADIATED TEST RESULTS

10.1. LIMITS AND PROCEDURE

LIMITS

FCC §15.205 and §15.209

RSS-GEN, Section 8.9 and 8.10.

Frequency Range (MHz)	Field Strength Limit (uV/m) at 3 m	Field Strength Limit (dBuV/m) at 3 m
0.009-0.490	2400/F(kHz) @ 300 m	-
0.490-1.705	24000/F(kHz) @ 30 m	-
1.705 - 30	30 @ 30m	-
30 - 88	100	40
88 - 216	150	43.5
216 - 960	200	46
Above 960	500	54

TEST PROCEDURE

The EUT is placed on a non-conducting table 80 cm above the ground plane for measurement below 1GHz; 1.5 m above the ground plane for measurement above 1GHz. The antenna to EUT distance is 3 meters. The EUT is configured in accordance with ANSI C63.10. The EUT is set to transmit in a continuous mode.

For measurements below 1 GHz the resolution bandwidth is set to 100 kHz for peak detection measurements or 120 kHz for quasi-peak detection measurements in the 30-1000MHz range, 9kHz for peak and/or quasi-peak detection measurements in the 0.15-30MHz range and 200Hz for peak and/or quasi-peak detection measurements in the 9 to 150kHz range. Peak detection is used unless otherwise noted as quasi-peak or average (9-90kHz and 110-490kHz).

For pre-scans above 1 GHz the resolution bandwidth is set to 1 MHz; the video bandwidth is set to 30 KHz for peak measurements.

For final measurements above 1 GHz the resolution bandwidth is set to 1 MHz; the video bandwidth is set to 3 MHz for peak measurements and as applicable for average measurements.

The spectrum from 1 GHz to 18 GHz is investigated with the transmitter set to the lowest, middle, and highest channels in each applicable band. Below 1GHz and above 18GHz emissions, the channel with the highest output power was tested.

The frequency range of interest is monitored at a fixed antenna height and EUT azimuth. The EUT is rotated through 360 degrees to maximize emissions received. The antenna is scanned from 1 to 4 meters above the ground plane to further maximize the emission. Measurements are made with the antenna polarized in both the vertical and the horizontal positions.

2D antenna use - For below 30MHz testing, investigation was done on three antenna orientations (parallel, perpendicular, and ground-parallel), parallel and perpendicular are the worst orientations, therefore testing was performed on these two orientations only.

Base on FCC 15.31 (f) (2): measurements may be performed at a distance closer than that specified in the regulations; however, an attempt should be made to avoid making measurements in the near field.

KDB 414788 Open Field Site(OFS) and Chamber Correlation Justification


OFS and chamber correlation testing had been performed and chamber measured test result is the worst case test result.

NOTE: The limits in CFR 47, Part 15, Subpart C, paragraph 15.209(a), are identical to those in RSS-Gen section 8.9, Table 6, since the measurements are performed in terms of magnetic field strength and converted to electric field strength levels (as reported in the table), using the free space impedance of 377 Ohms. For example the measurement at frequency X kHz resulted in a level of Y dBuV/m, which is equivalent to $Y - 51.5 = Z$ dBuA/m, which has the same margin, W dB, to the corresponding RSS-Gen Table 6 limit as it has to 15.209(a) limit.

10.2. TRANSMITTER ABOVE 1 GHz

BANDEDGE (LOW CHANNEL)

HORIZONTAL RESULT

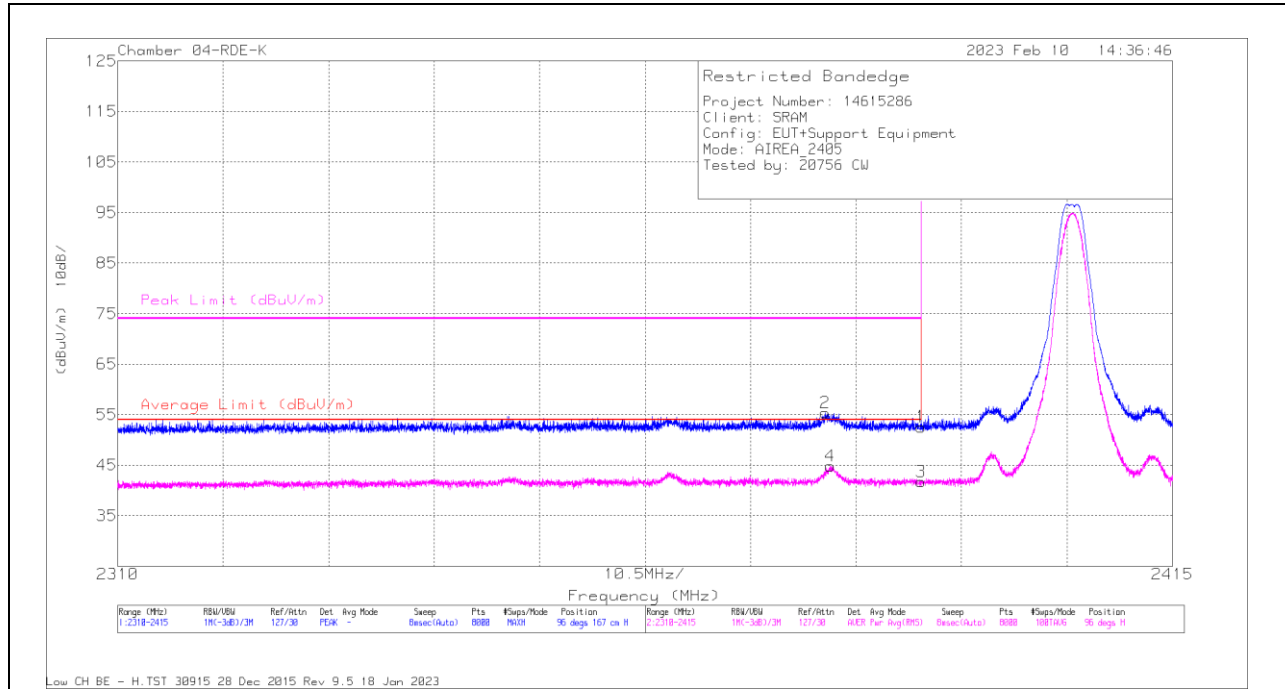

Trace Markers


Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	223083 ACF (dB) 3mH	Amp/Cb/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2390	55.69	PK	31.8	-34.9	52.59	-	-	74	-21.41	96	167	H
2	* 2380.453	58.46	PK	31.8	-34.9	55.36	-	-	74	-18.64	96	167	H
3	* 2390	44.85	RMS	31.8	-34.9	41.75	54	-12.25	-	-	96	167	H
4	* 2380.951	47.95	RMS	31.8	-34.9	44.85	54	-9.15	-	-	96	167	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

VERTICAL RESULT

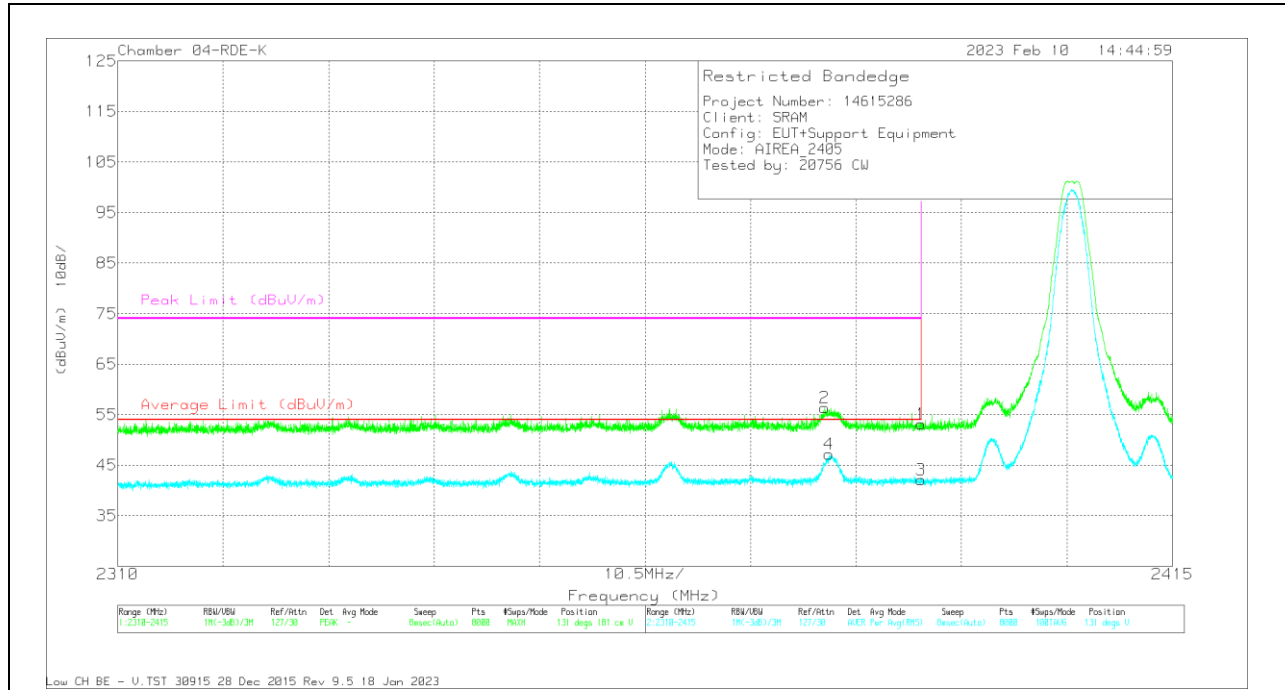

Trace Markers

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	223083 ACF (dB) 3mH	Amp/Cbl/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2390	56.19	Pk	31.8	-34.9	53.09	-	-	74	-20.91	131	181	V
2	* 2380.4	59.43	Pk	31.8	-34.9	56.33	-	-	74	-17.67	131	181	V
3	* 2390	45.21	RMS	31.8	-34.9	42.11	54	-11.89	-	-	131	181	V
4	* 2380.82	50.24	RMS	31.8	-34.9	47.14	54	-6.86	-	-	131	181	V


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

BANDEDGE (HIGH CHANNEL)

HORIZONTAL RESULT

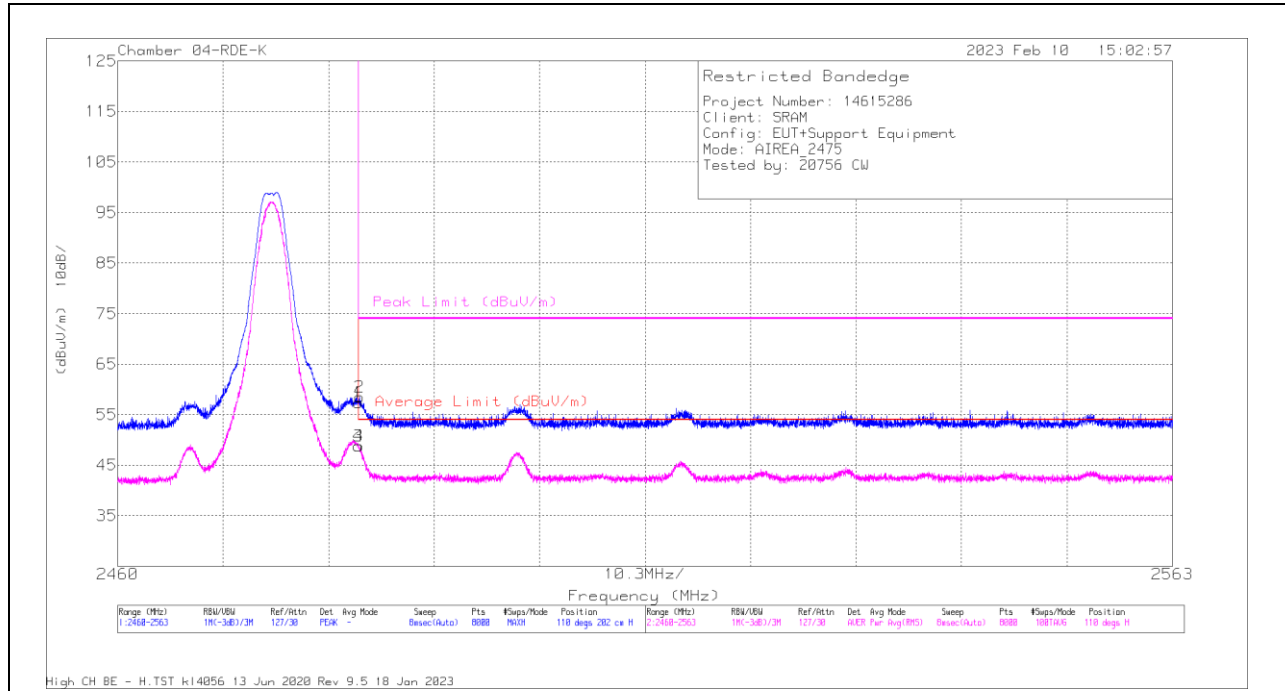

Trace Markers


Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	223083 ACF (dB) 3mH	Amp/Cbl/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2483.5	59.68	Pk	32.2	-34.5	57.38	-	-	74	-16.62	110	202	H
2	* 2483.604	60.78	Pk	32.2	-34.5	58.48	-	-	74	-15.52	110	202	H
3	* 2483.5	51.07	RMS	32.2	-34.5	48.77	54	-5.23	-	-	110	202	H
4	* 2483.526	51.15	RMS	32.2	-34.5	48.85	54	-5.15	-	-	110	202	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

VERTICAL RESULT

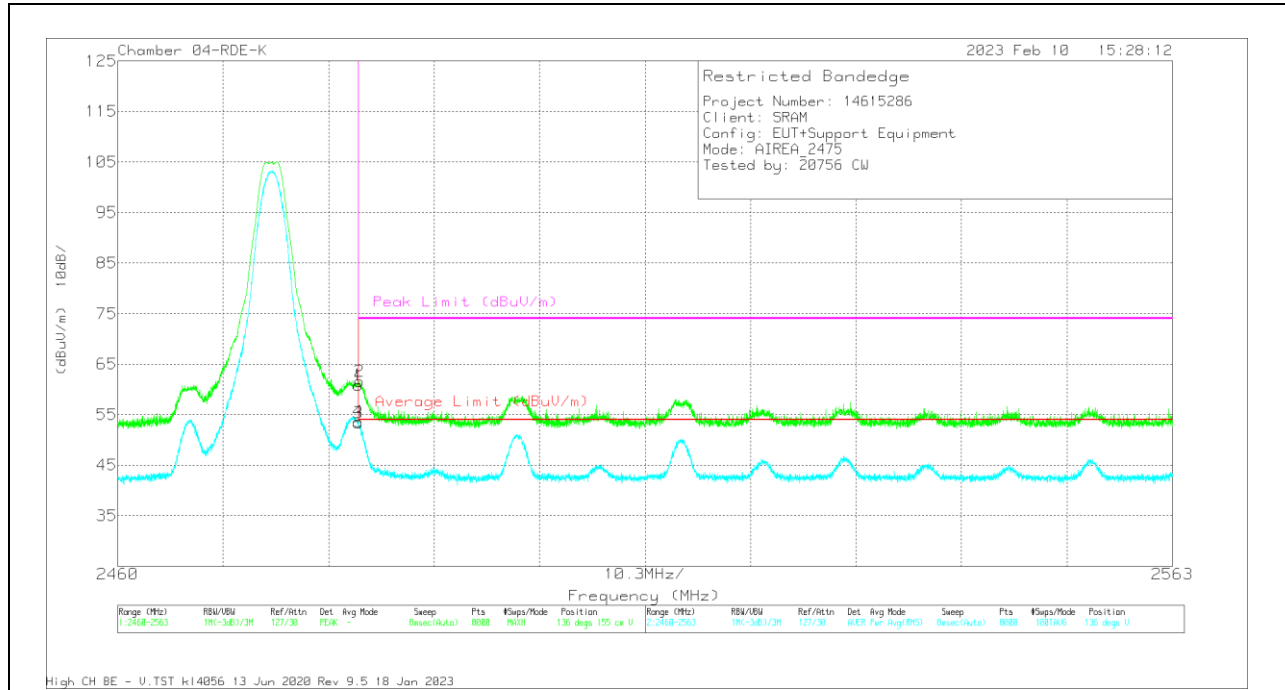



Trace Markers

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	223083 ACF (dB) 3mH	Amp/Cb/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2483.5	63.12	Pk	32.2	-34.5	60.82	-	-	74	-13.18	136	155	V
2	* 2483.591	63.86	Pk	32.2	-34.5	61.56	-	-	74	-12.44	136	155	V
3	* 2483.5	55.65	RMS	32.2	-34.5	53.35	54	-65	-	-	136	155	V
4	* 2483.513	55.92	RMS	32.2	-34.5	53.62	54	-38	-	-	136	155	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 Pk - Peak detector
 RMS - RMS detection

HARMONICS AND SPURIOUS EMISSIONS

LOW CHANNEL RESULTS

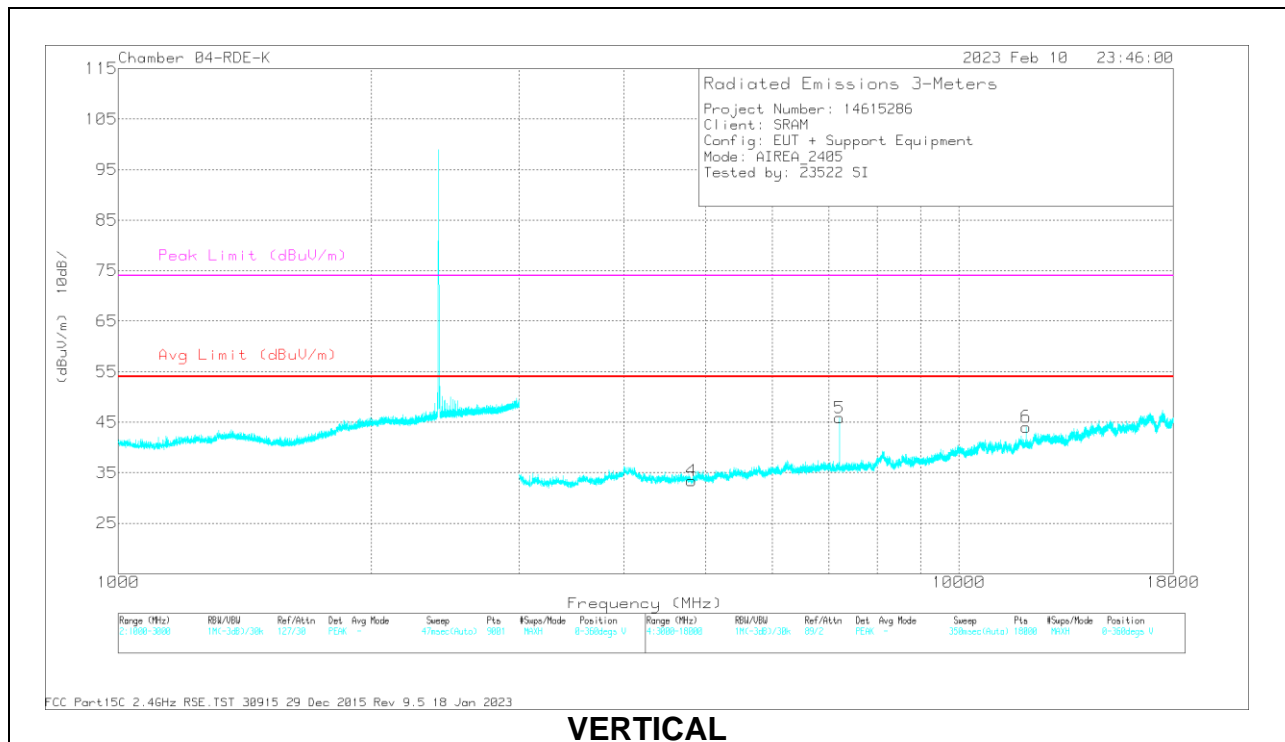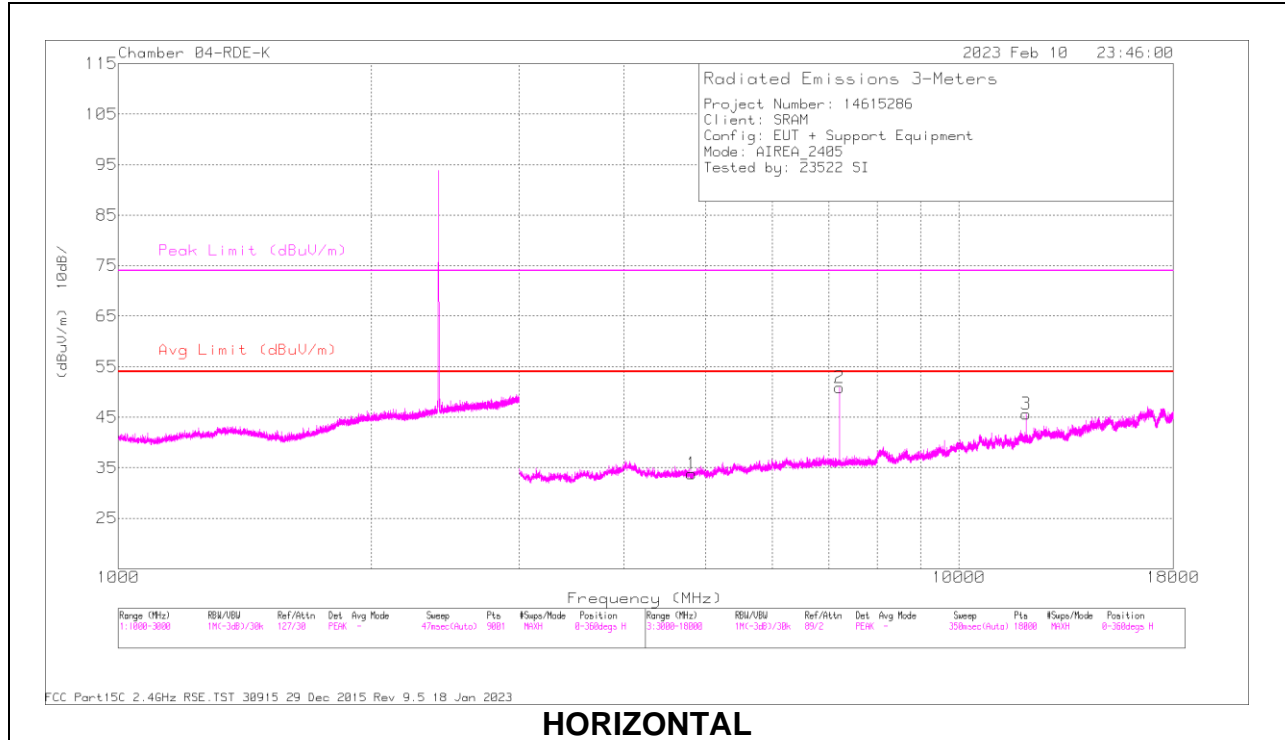


RADIATED EMISSIONS


Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	223083 ACF (dB) 3mH	Amp/Cbl/Fitr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 4810.71	51.54	PK2	33.7	-40.6	44.64	-	-	74	-29.36	209	277	H
	* 4809.27	40.39	MAv1	33.7	-40.6	33.49	54	-20.51	-	-	209	277	H
2	7216.522	59.52	PK2	35.7	-38.3	56.92	-	-	-	-	143	165	H
3	* 12027.692	50.81	PK2	38.7	-34.4	55.11	-	-	74	-18.89	38	200	H
	* 12027.48	41.17	MAv1	38.7	-34.3	45.57	54	-8.43	-	-	38	200	H
4	* 4811.521	51.21	PK2	33.7	-40.5	44.41	-	-	74	-29.59	152	138	V
	* 4809.374	39.69	MAv1	33.7	-40.6	32.79	54	-21.21	-	-	152	138	V
5	7213.48	56.43	PK2	35.7	-38.4	53.73	-	-	-	-	137	203	V
6	* 12022.82	49.1	PK2	38.7	-34.5	53.3	-	-	74	-20.7	193	175	V
	* 12022.719	39.5	MAv1	38.7	-34.5	43.7	54	-10.3	-	-	193	175	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 PK2 - KDB558074 Method: Maximum Peak
 MAv1 - KDB558074 Option 1 Maximum RMS Average

MID CHANNEL RESULTS

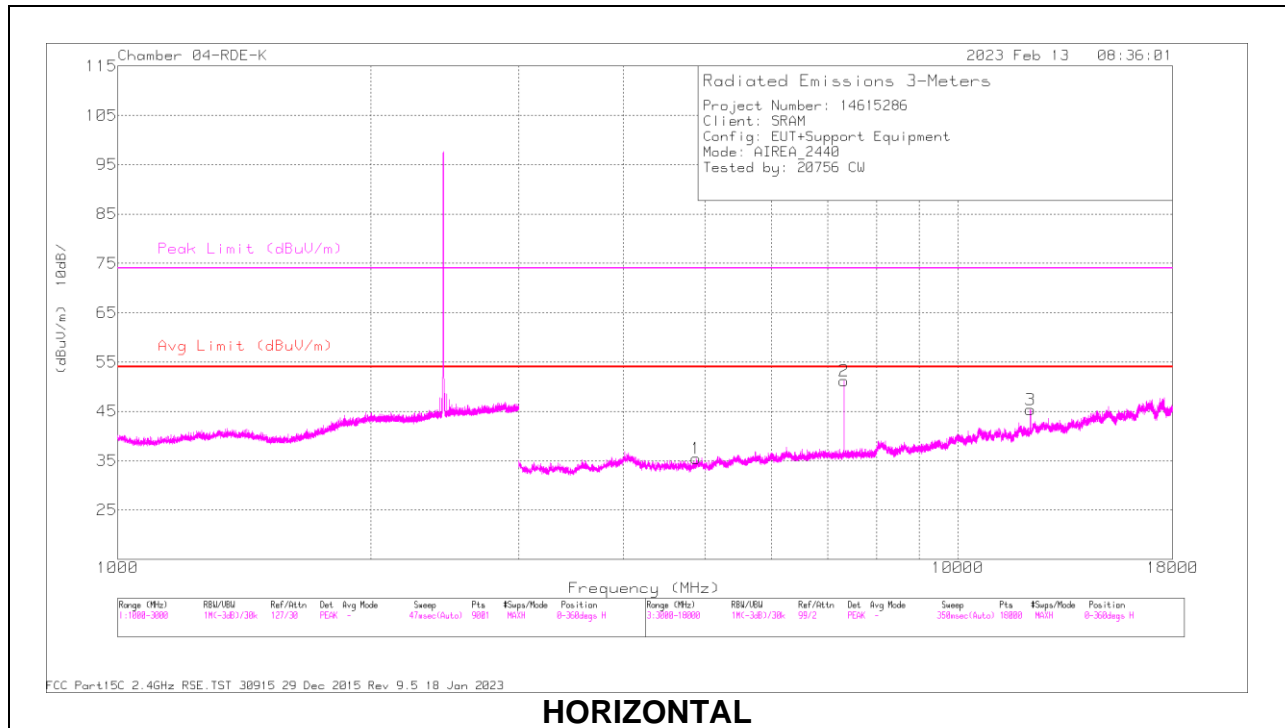

HORIZONTAL

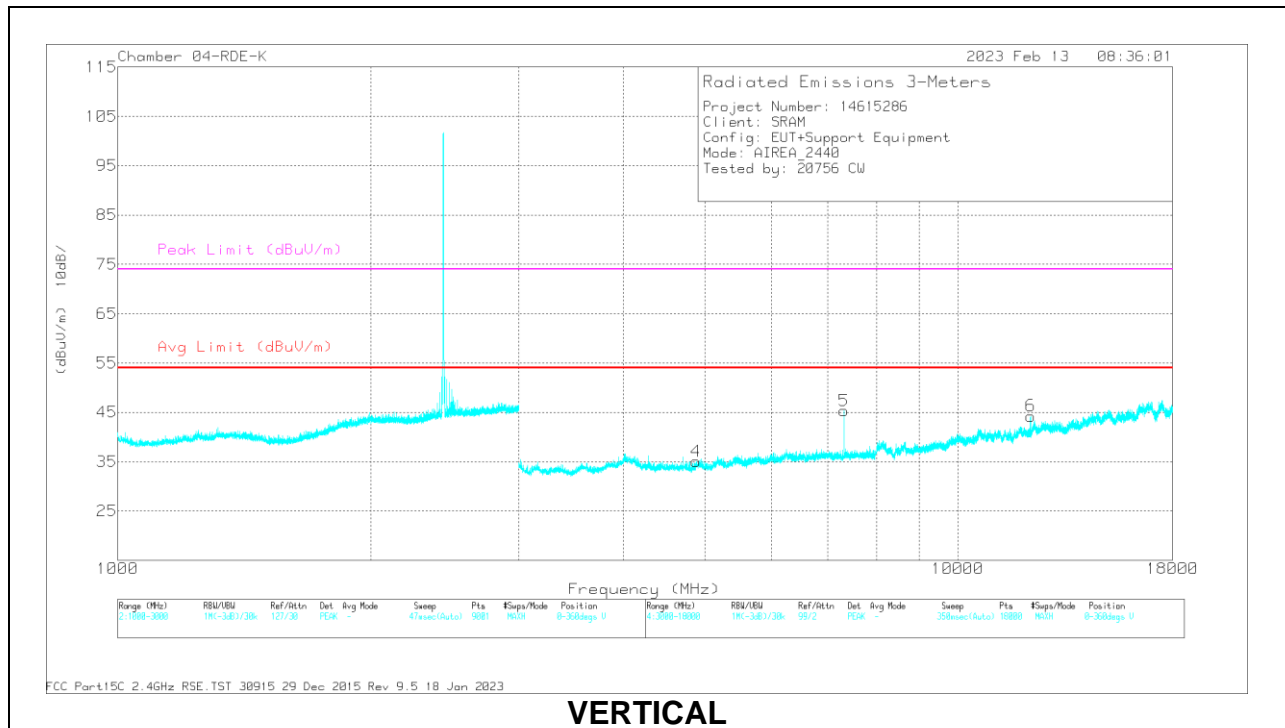

VERTICAL

RADIATED EMISSIONS


Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	223083 ACF (dB) 3mH	Amp/Cb/Fitr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 4880.281	52.51	PK2	33.7	-40.4	45.81	-	-	74	-28.19	348	325	H
	* 4879.22	39.89	MAv1	33.7	-40.4	33.19	54	-20.81	-	-	348	325	H
2	* 7321.552	60.87	PK2	35.7	-38	58.57	-	-	74	-15.43	137	179	H
	* 7321.498	55.53	MAv1	35.7	-38	53.23	54	-.77	-	-	137	179	H
3	* 12197.508	49.54	PK2	38.9	-34.4	54.04	-	-	74	-19.96	307	176	H
	* 12197.398	39.34	MAv1	38.9	-34.4	43.84	54	-10.16	-	-	307	176	H
4	* 4880.822	51.82	PK2	33.7	-40.3	45.22	-	-	74	-28.78	225	194	V
	* 4881.07	40.49	MAv1	33.7	-40.3	33.89	54	-20.11	-	-	225	194	V
5	* 7318.638	56.2	PK2	35.7	-38	53.9	-	-	74	-20.1	86	197	V
	* 7318.711	49.82	MAv1	35.7	-38	47.52	54	-6.48	-	-	86	197	V
6	* 12202.25	49.15	PK2	38.9	-34.5	53.55	-	-	74	-20.45	328	214	V
	* 12202.405	39.26	MAv1	38.9	-34.4	43.76	54	-10.24	-	-	328	214	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band


PK2 - KDB558074 Method: Maximum Peak

MAv1 - KDB558074 Option 1 Maximum RMS Average

HIGH CHANNEL RESULTS

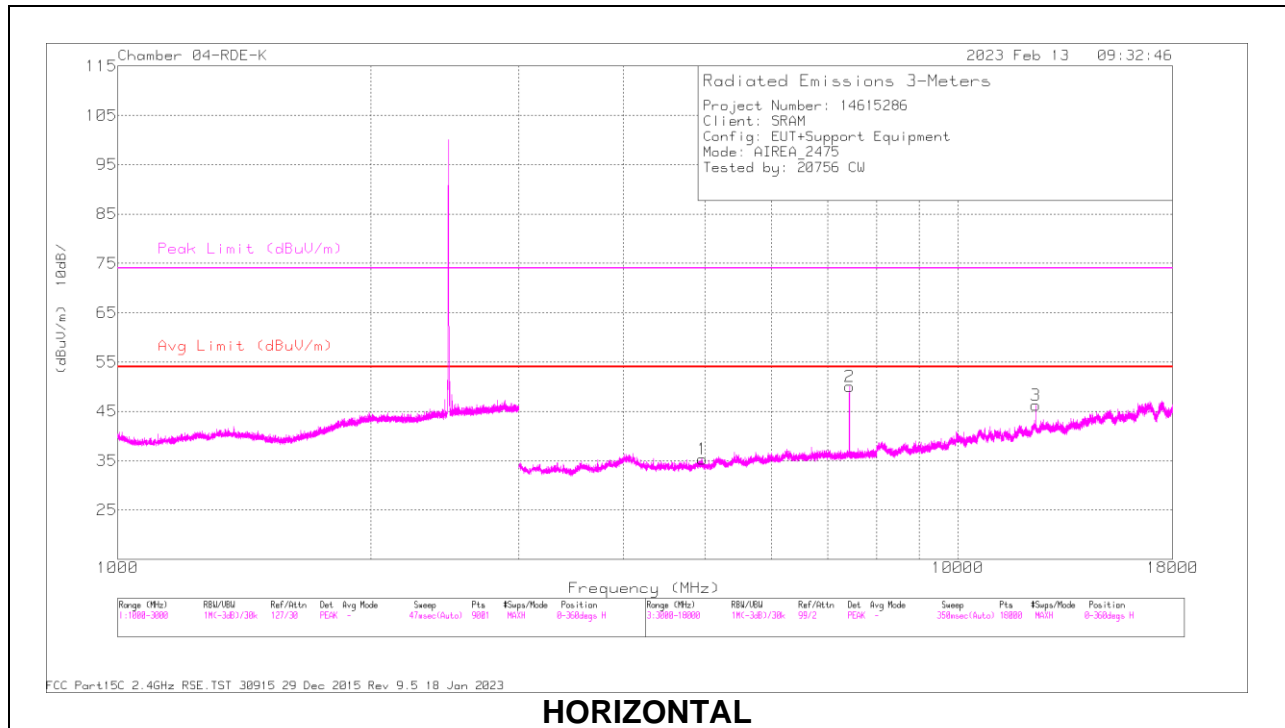

HORIZONTAL

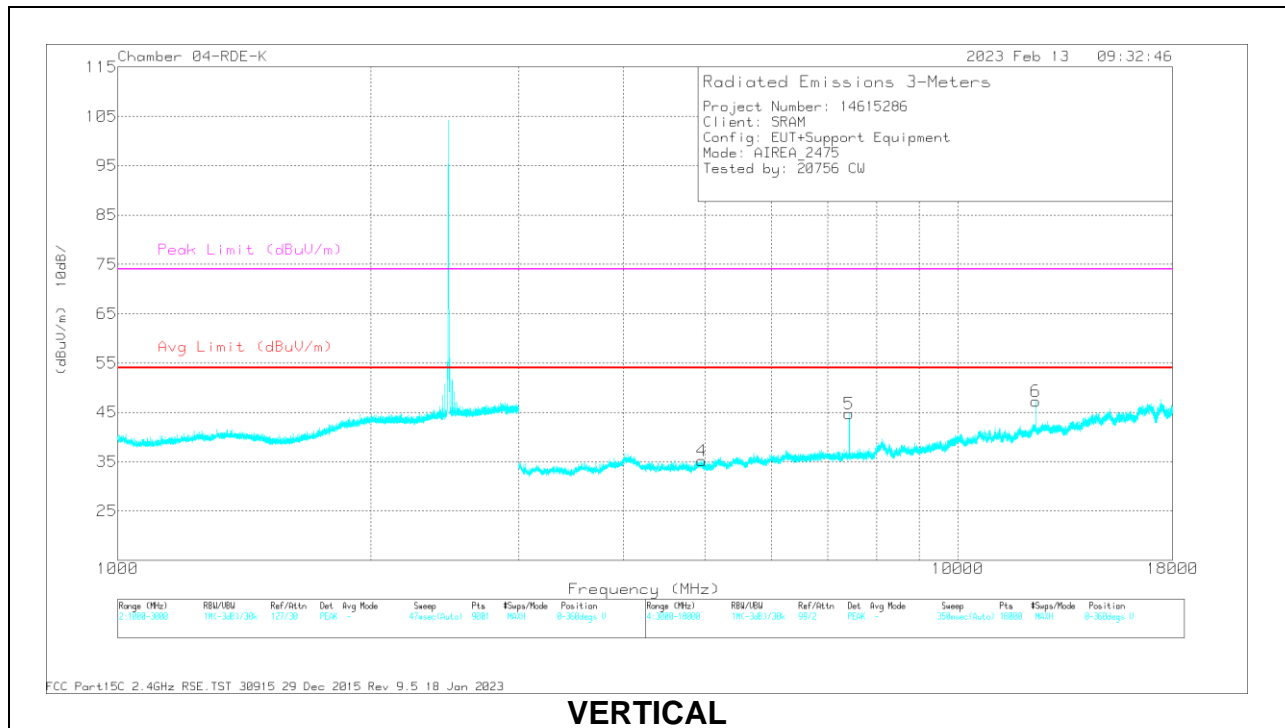

VERTICAL

RADIATED EMISSIONS

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	223083 ACF (dB) 3mH	Amp/Cb/Fitr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 4964.957	51.3	PK2	33.7	-40.3	44.7	-	-	74	-29.3	70	264	H
	* 4965.169	39.92	MAv1	33.8	-40.3	33.42	54	-20.58	-	-	70	264	H
2	* 7426.531	58.24	PK2	35.7	-37.7	56.24	-	-	74	-17.76	138	212	H
	* 7426.495	52.75	MAv1	35.7	-37.7	50.75	54	-3.25	-	-	138	212	H
3	* 12377.464	50.62	PK2	39	-34	55.62	-	-	74	-18.38	338	255	H
	* 12377.391	41.41	MAv1	39	-34	46.41	54	-7.59	-	-	338	255	H
4	* 4957.876	51.62	PK2	33.7	-40.3	45.02	-	-	74	-28.98	33	309	V
	* 4955.484	40.25	MAv1	33.7	-40.4	33.55	54	-20.45	-	-	33	309	V
5	* 7423.539	55.53	PK2	35.7	-37.7	53.53	-	-	74	-20.47	105	193	V
	* 7423.584	48.73	MAv1	35.7	-37.7	46.73	54	-7.27	-	-	105	193	V
6	* 12377.429	50.59	PK2	39	-34	55.59	-	-	74	-18.41	341	229	V
	* 12377.469	41.2	MAv1	39	-34	46.2	54	-7.8	-	-	341	229	V


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK2 - KDB558074 Method: Maximum Peak

MAv1 - KDB558074 Option 1 Maximum RMS Average

10.3. WORST CASE BELOW 30MHZ

SPURIOUS EMISSIONS BELOW 30 MHz (WORST-CASE CONFIGURATION)

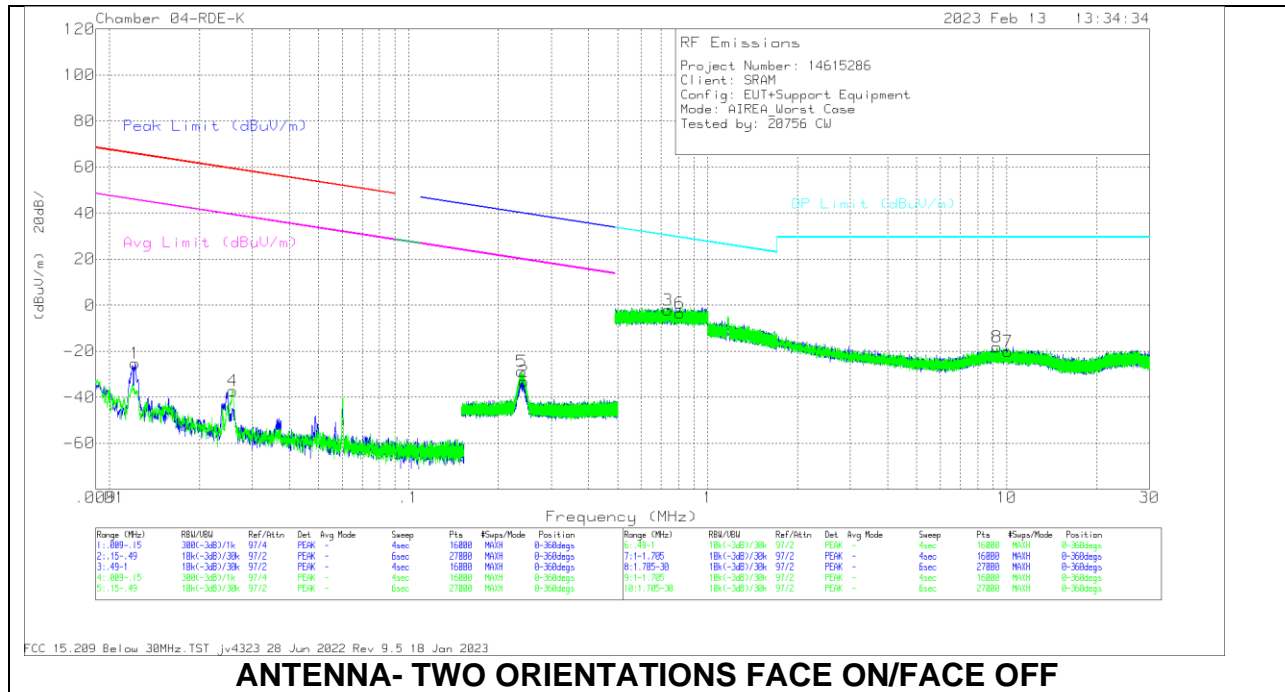

ANTENNA- TWO ORIENTATIONS FACE ON/FACE OFF

Below 30MHz Data

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	Loop Antenna E(ACF)	Amp/Cbl (dB)	Dist Corr 300m	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	Margin (dB)	Avg Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Antenna Polarity (degs)
1	.0122	25.75	Pk	60.1	-31	-80	-25.15	65.85	-91	45.85	-71	0-360	0-deg
2	.2431	22.64	Pk	56.3	-32.2	-80	-33.26	39.9	-73.16	19.9	-53.16	0-360	0-deg
4	.0259	16.33	Pk	58.5	-32	-80	-37.17	59.32	-96.49	39.32	-76.49	0-360	90-degs
5	.2391	27.2	Pk	56.3	-32.2	-80	-28.7	40.05	-68.75	20.05	-48.75	0-360	90-degs

Pk - Peak detector


Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	Loop Antenna E(ACF)	Amp/Cbl (dB)	Dist Corr 30m (dB)	Corrected Reading (dBuV/m)	QP Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Antenna Polarity (degs)
3	.7368	13.63	Pk	56.4	-32.1	-40	-2.07	30.27	-32.34	0-360	0-deg
6	.8075	12.19	Pk	56.5	-32.1	-40	-3.41	29.47	-32.88	0-360	90-degs
7	10.1037	17.03	Pk	34.8	-31.8	-40	-19.97	29.5	-49.47	0-360	0-deg
8	9.2758	18.94	Pk	34.7	-31.9	-40	-18.26	29.5	-47.76	0-360	90-degs

Pk - Peak detector


Note: The Limits in CRF 47, Part 15, Subpart C, Paragraph 15.209(a), are identical to those in RSS-Gen section 8.9, Table 6, since the measurements are performed in terms of magnetic field strength and converted to electric field strength levels (as reported in the table) using the free space impedance of 377 Ohms. For example, the measurement at frequency X kHz resulted in a level of Y dBuV/m, which is equivalent to $Y - 51.5 = Z$ dBuA/m, which has the same margin, W dB, to the corresponding RSS-Gen Table 6 limit as it has to 15.209(a) limit.

10.4. WORST CASE BELOW 1 GHZ

SPURIOUS EMISSIONS 30 TO 1000 MHz (WORST-CASE CONFIGURATION)

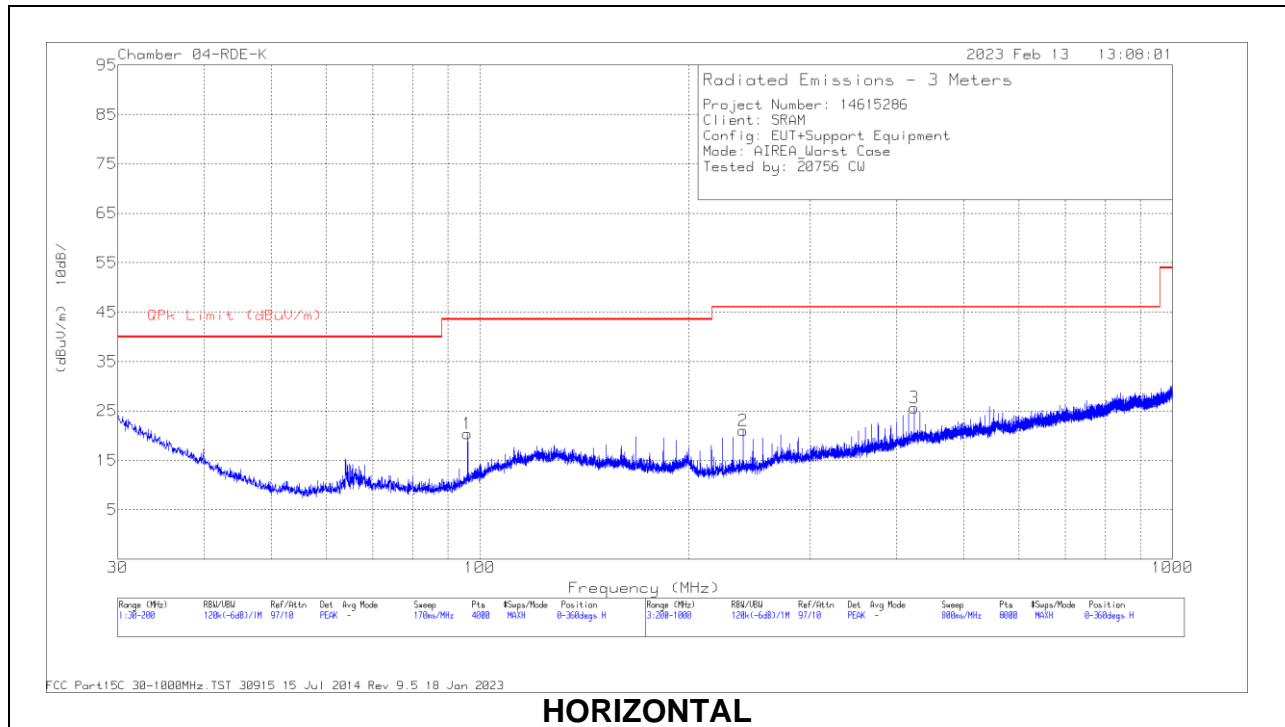

HORIZONTAL

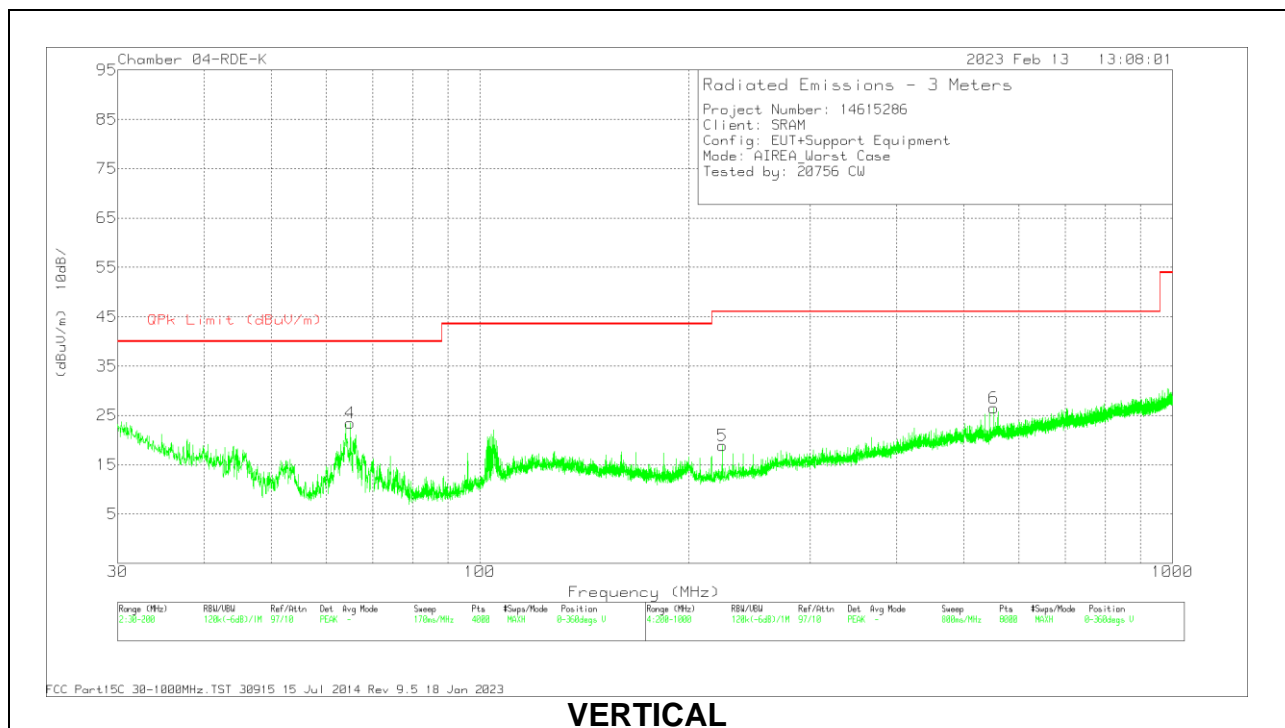

VERTICAL

Below 1GHz Data

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	80813 ACF (dB)	Amp/Cbl (dB)	Corrected Reading (dBuV/m)	QPk Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	96.0196	36.19	Pk	15.1	-30.9	20.39	43.52	-23.13	0-360	299	H
4	65.2602	39.57	Pk	13.8	-31.1	22.27	40	-17.73	136	196	V
	65.2602	27.5	Qp	13.8	-31.1	10.2	40	-29.8	136	196	V
2	* 240.005	33.55	Pk	17.6	-30.1	21.05	46.02	-24.97	0-360	101	H
3	423.929	32.46	Pk	22.5	-29.3	25.66	46.02	-20.36	0-360	101	H
5	223.953	32.24	Pk	16.8	-30.2	18.84	46.02	-27.18	0-360	101	V
6	552.046	30.48	Pk	24.8	-28.8	26.48	46.02	-19.54	0-360	101	V



* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

Qp - Quasi-Peak detector

10.5. WORST CASE 18-26 GHz

SPURIOUS EMISSIONS 18-26 GHz (WORST-CASE CONFIGURATION)

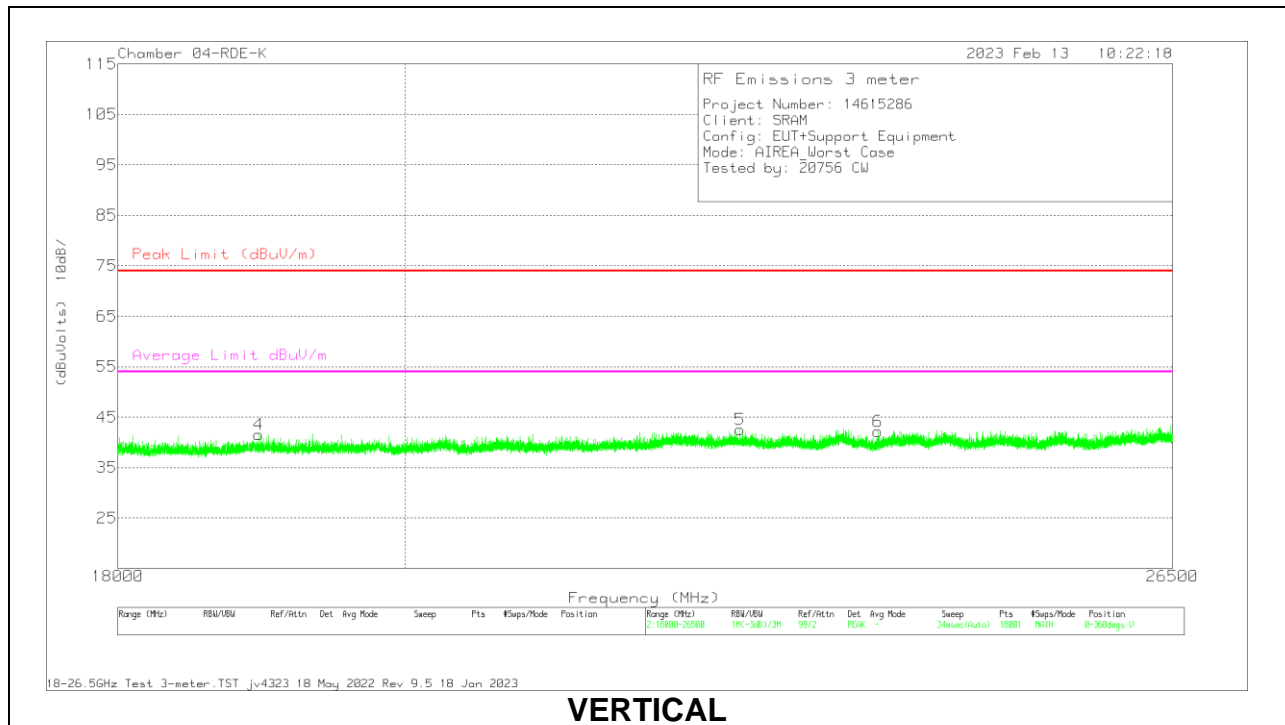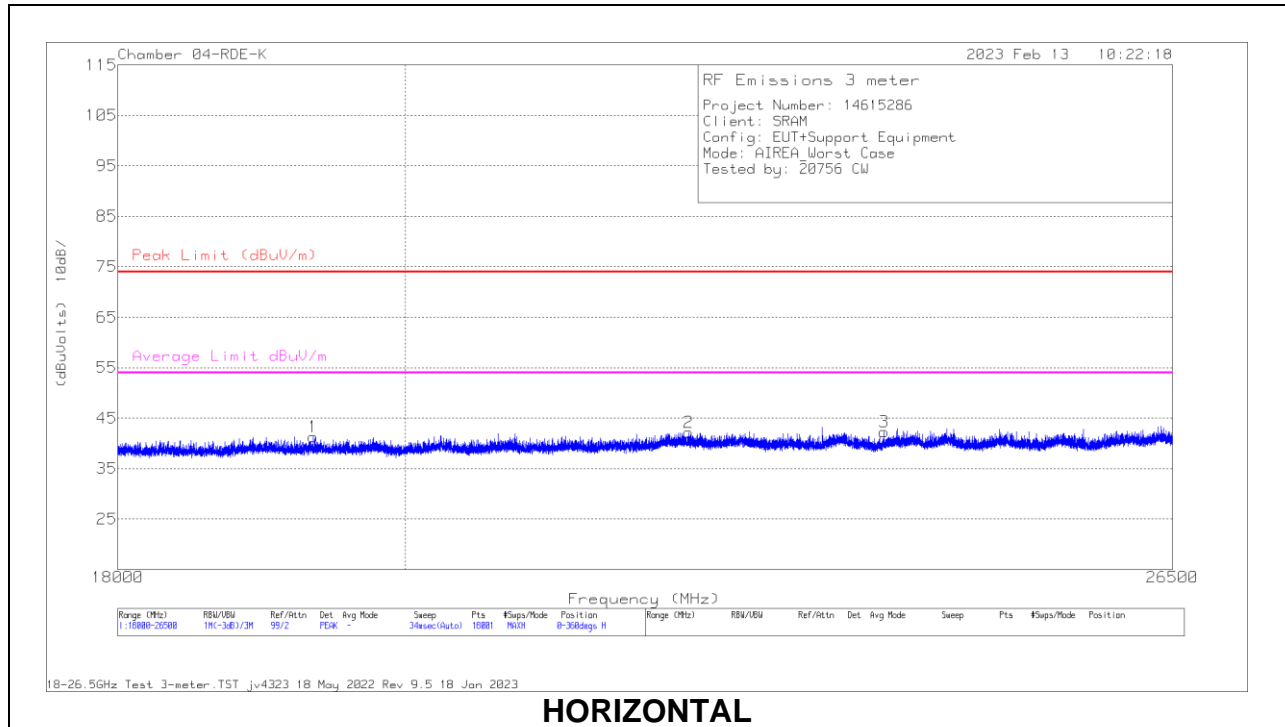

18 – 26GHz DATA

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	172364 AF (dB)	215705 amp/cbl (dB)	Cables (dB)	Corrected Reading (dBuVolts)	Peak Limit (dBuV/m)	PK Margin (dB)	Average Limit dBuV/m	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 19335.916	51.34	Pk	32.8	-61	18.2	41.34	74	-32.66	54	-12.66	0-360	101	H
2	* 22191.442	49.93	Pk	33.6	-60.8	19.4	42.13	74	-31.87	54	-11.87	0-360	101	H
3	* 23842.803	49.36	Pk	33.9	-61.2	20.2	42.26	74	-31.74	54	-11.74	0-360	199	H
4	* 18953.416	51.47	Pk	32.7	-60.6	18	41.57	74	-32.43	54	-12.43	0-360	200	V
5	* 22614.081	50.22	Pk	33.7	-61	19.6	42.52	74	-31.48	54	-11.48	0-360	200	V
6	* 23785.664	49.1	Pk	34	-61.2	20.2	42.1	74	-31.9	54	-11.9	0-360	200	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 Pk - Peak detector