



# **CERTIFICATION TEST REPORT**

**Report Number. :** 12292087-E2V2

**Applicant :** SRAM LLC  
1000 W Fulton Market 4<sup>th</sup> Floor  
Chicago, IL 60607 U.S.A

**Model :** 12910

**FCC ID :** C90-RDB1

**IC :** 10161A-RDB1

**EUT Description :** Rear Derailleur with AIREA, BLE and ANT+ Radios

**Test Standard(s) :** FCC 47 CFR PART 15 SUBPART C  
ISED RSS-247 ISSUE 2  
ISED RSS-GEN ISSUE 5

**Date Of Issue:**

June 27, 2018

**Prepared by:**

UL Verification Services Inc.  
47173 Benicia Street  
Fremont, CA 94538, U.S.A.  
TEL: (510) 771-1000  
FAX: (510) 661-0888



NVLAP LAB CODE 200065-0

## REPORT REVISION HISTORY

Rev.	Issue Date	Revisions	Revised By
V1	06/22/18	Initial Issue	--
V2	06/27/18	Updated Section 5.3	Steven Tran

## TABLE OF CONTENTS

<b>REPORT REVISION HISTORY .....</b>	<b>2</b>
<b>TABLE OF CONTENTS .....</b>	<b>3</b>
<b>1. ATTESTATION OF TEST RESULTS .....</b>	<b>5</b>
<b>2. TEST METHODOLOGY .....</b>	<b>6</b>
<b>3. FACILITIES AND ACCREDITATION .....</b>	<b>6</b>
<b>4. CALIBRATION AND UNCERTAINTY .....</b>	<b>7</b>
4.1. <i>MEASURING INSTRUMENT CALIBRATION .....</i>	<i>7</i>
4.2. <i>SAMPLE CALCULATION .....</i>	<i>7</i>
4.3. <i>MEASUREMENT UNCERTAINTY.....</i>	<i>7</i>
<b>5. EQUIPMENT UNDER TEST.....</b>	<b>8</b>
5.1. <i>DESCRIPTION OF EUT .....</i>	<i>8</i>
5.2. <i>MAXIMUM OUTPUT POWER.....</i>	<i>8</i>
5.3. <i>DESCRIPTION OF AVAILABLE ANTENNAS .....</i>	<i>8</i>
5.4. <i>SOFTWARE AND FIRMWARE.....</i>	<i>8</i>
5.5. <i>WORST-CASE CONFIGURATION AND MODE.....</i>	<i>8</i>
5.6. <i>DESCRIPTION OF TEST SETUP.....</i>	<i>9</i>
<b>6. MEASUREMENT METHOD.....</b>	<b>11</b>
<b>7. TEST AND MEASUREMENT EQUIPMENT .....</b>	<b>12</b>
<b>8. ANTENNA PORT TEST RESULTS .....</b>	<b>13</b>
8.1. <i>ON TIME AND DUTY CYCLE.....</i>	<i>13</i>
8.2. <i>99% BANDWIDTH.....</i>	<i>14</i>
8.3. <i>6 dB BANDWIDTH.....</i>	<i>15</i>
8.4. <i>OUTPUT POWER.....</i>	<i>16</i>
8.5. <i>AVERAGE POWER.....</i>	<i>17</i>
8.6. <i>POWER SPECTRAL DENSITY .....</i>	<i>18</i>
8.7. <i>CONDUCTED SPURIOUS EMISSIONS.....</i>	<i>19</i>
<b>9. RADIATED TEST RESULTS.....</b>	<b>21</b>
9.1. <i>LIMITS AND PROCEDURE.....</i>	<i>21</i>
9.2. <i>TRANSMITTER ABOVE 1 GHz.....</i>	<i>22</i>
9.3. <i>WORST CASE BELOW 30MHz.....</i>	<i>34</i>
9.4. <i>WORST CASE BELOW 1 GHz.....</i>	<i>36</i>

---

9.5.	WOSRT CASE 18-26 GHz.....	38
10.	SETUP PHOTOS .....	40

# 1. ATTESTATION OF TEST RESULTS

**COMPANY NAME:** SRAM LLC  
1000 W Fulton Market 4<sup>th</sup> Floor  
Chicago, IL 60607 U.S.A

**EUT DESCRIPTION:** Rear Derailleur with AIREA, BLE and ANT+ Radios

**MODEL:** 12910

**SERIAL NUMBER:** 1113010066 (Conducted); 1113010068 (Radiated)


**DATE TESTED:** May 16 – 25, 2018

APPLICABLE STANDARDS	
STANDARD	TEST RESULTS
CFR 47 Part 15 Subpart C	Complies
ISED RSS-247 Issue 2	Complies
ISED RSS-GEN Issue 5	Complies

UL Verification Services Inc. tested the above equipment in accordance with the requirements set forth in the above standards. All indications of Pass/Fail in this report are opinions expressed by UL Verification Services Inc. based on interpretations and/or observations of test results. Measurement Uncertainties were not taken into account and are published for informational purposes only. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

**Note:** The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. This document may not be altered or revised in any way unless done so by UL Verification Services Inc. and all revisions are duly noted in the revisions section. Any alteration of this document not carried out by UL Verification Services Inc. will constitute fraud and shall nullify the document. This report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, any agency of the Federal Government, or any agency of the U.S. government.

Approved & Released For  
UL Verification Services Inc. By:



Prepared By:



---

DAN CORONIA  
CONSUMER TECHNOLOGY DIVISION  
OPERATIONS LEADER  
UL Verification Services Inc.

---

GLENN ESCANO  
CONSUMER TECHNOLOGY DIVISION  
TEST ENGINEER  
UL Verification Services Inc

## 2. TEST METHODOLOGY

The tests documented in this report were performed in accordance with FCC CFR 47 Part 2, FCC CFR 47 Part 15, KDB 558074 D01 v04, ANSI C63.10-2013, RSS-GEN Issue 5, and RSS-247 Issue 2.

## 3. FACILITIES AND ACCREDITATION

The test sites and measurement facilities used to collect data are located at 47173 and 47266 Benicia Street, Fremont, California, USA. Line conducted emissions are measured only at the 47173 address. The following table identifies which facilities were utilized for radiated emission measurements documented in this report. Specific facilities are also identified in the test results sections.

47173 Benicia Street	47266 Benicia Street
<input checked="" type="checkbox"/> Chamber A (ISED:2324B-1)	<input type="checkbox"/> Chamber D (ISED:22541-1)
<input checked="" type="checkbox"/> Chamber B (ISED:2324B-2)	<input type="checkbox"/> Chamber E (ISED:22541-2)
<input type="checkbox"/> Chamber C (ISED:2324B-3)	<input type="checkbox"/> Chamber F (ISED:22541-3)
	<input type="checkbox"/> Chamber G (ISED:22541-4)
	<input type="checkbox"/> Chamber H (ISED:22541-5)

The above test sites and facilities are covered under FCC Test Firm Registration # 208313. Chambers A through C are covered under ISED company address code 2324B with site numbers 2324B -1 through 2324B-3, respectively. Chambers D through H are covered under ISED Canada company address code 22541 with site numbers 22541 -1 through 22541-5, respectively.

UL Verification Services Inc. is accredited by NVLAP, Laboratory Code 200065-0. The full scope of accreditation can be viewed at <http://nist.gov/standards/scopes/2000650.htm>.

## 4. CALIBRATION AND UNCERTAINTY

### 4.1. MEASURING INSTRUMENT CALIBRATION

The measuring equipment utilized to perform the tests documented in this report has been calibrated in accordance with the manufacturer's recommendations, and is traceable to recognized national standards.

### 4.2. SAMPLE CALCULATION

Where relevant, the following sample calculation is provided:

$$\begin{aligned} \text{Field Strength (dBuV/m)} &= \text{Measured Voltage (dBuV)} + \text{Antenna Factor (dB/m)} + \\ &\text{Cable Loss (dB)} - \text{Preamp Gain (dB)} \\ 36.5 \text{ dBuV} + 18.7 \text{ dB/m} + 0.6 \text{ dB} - 26.9 \text{ dB} &= 28.9 \text{ dBuV/m} \end{aligned}$$

### 4.3. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

PARAMETER	UNCERTAINTY
Worst Case Radiated Disturbance, 9KHz to 30 MHz	3.15 dB
Worst Case Radiated Disturbance, 30 to 1000 MHz	5.36 dB
Worst Case Radiated Disturbance, 1000 to 18000 MHz	4.32 dB
Worst Case Radiated Disturbance, 18000 to 26000 MHz	4.45 dB

Uncertainty figures are valid to a confidence level of 95%.

## 5. EQUIPMENT UNDER TEST

### 5.1. DESCRIPTION OF EUT

The EUT is a Rear Derailleur with AIREA, BLE and ANT+ Radios, powered by 7.4v, 2.2wh Li-Ion battery.

### 5.2. MAXIMUM OUTPUT POWER

The transmitter has a maximum peak conducted output power as follows:

Frequency Range (MHz)	Mode	Peak		Average	
		Output Power (dBm)	Output Power (mW)	Output Power (dBm)	Output Power (mW)
2405 - 2480	AIREA	2.96	1.98	2.72	1.87

### 5.3. DESCRIPTION OF AVAILABLE ANTENNAS

The radio utilizes a chip antenna Johanson Technology, 2450AT42B100E, with a maximum gain of 0 dBi.

### 5.4. SOFTWARE AND FIRMWARE

The EUT firmware installed during testing was A-1.0.  
The test utility software used during testing was Lightblue v2.6.4

### 5.5. WORST-CASE CONFIGURATION AND MODE

Radiated emissions below 1GHz and above 18GHz were performed with the EUT set to transmit at the channel with highest output power as worst-case scenario.

Band edge and radiated emissions between 1GHz and 18GHz were performed with the EUT set to transmit at the highest power on low, middle and high channels.

The fundamental of the EUT was investigated in three orthogonal orientations X, Y, Z, it was determined that Z orientation was worst-case orientation; therefore, all final radiated testing was performed with the EUT in Z orientation.



## 5.6. DESCRIPTION OF TEST SETUP


### SUPPORT EQUIPMENT

Support Equipment List			
Description	Manufacturer	Model	Serial Number
Ipod Touch	Apple	MKJ02LL/A	CCQVRHY2GGNL

### TEST SETUP


The EUT is powered by a 7.4v, 2.2wh Li-Ion battery. The iPod Touch wirelessly sends commands to the EUT.

### SETUP DIAGRAM FOR CONDUCTED TESTS

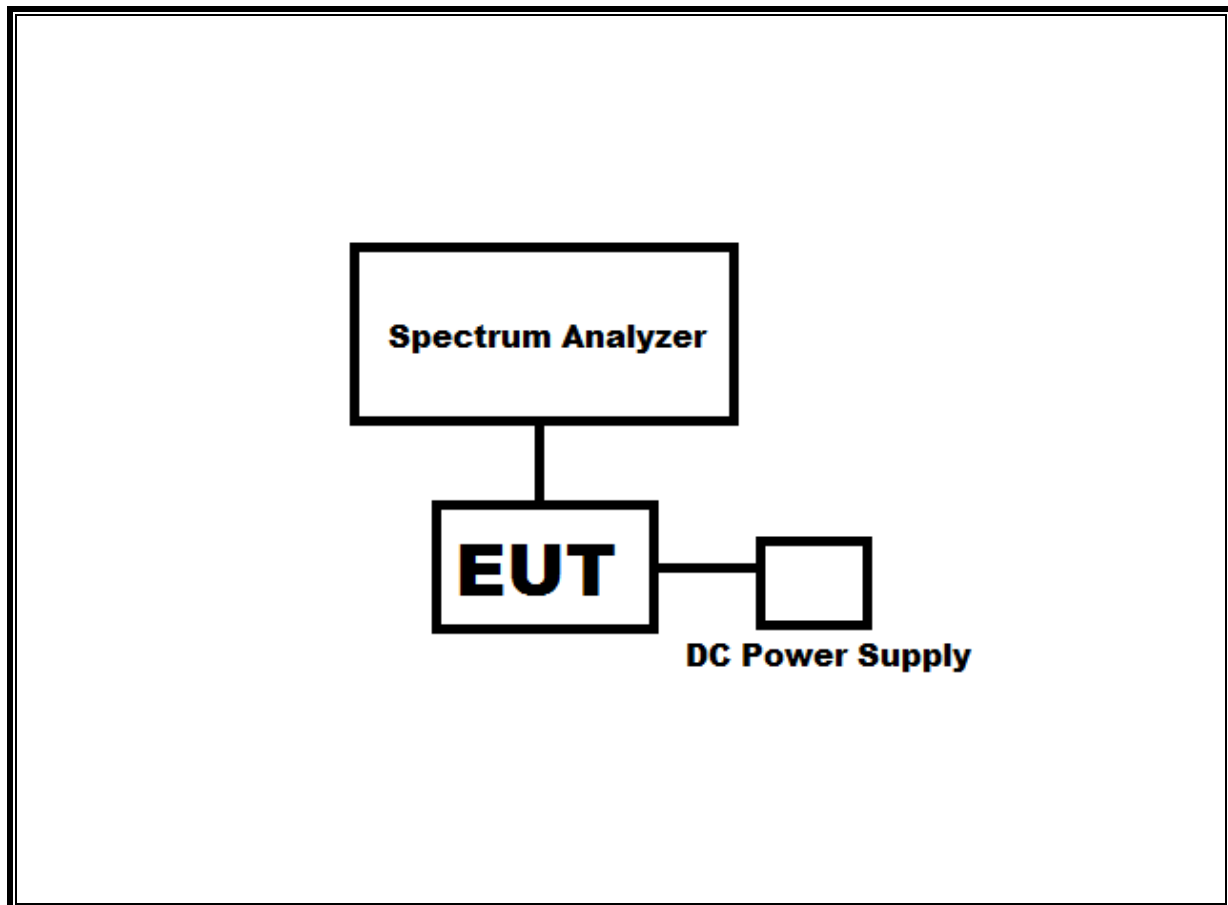

\*Note – The DC power supply is used only during testing. During normal operation the EUT is powered by a supplied battery pack

**SETUP DIAGRAM FOR RADIATED TESTS**

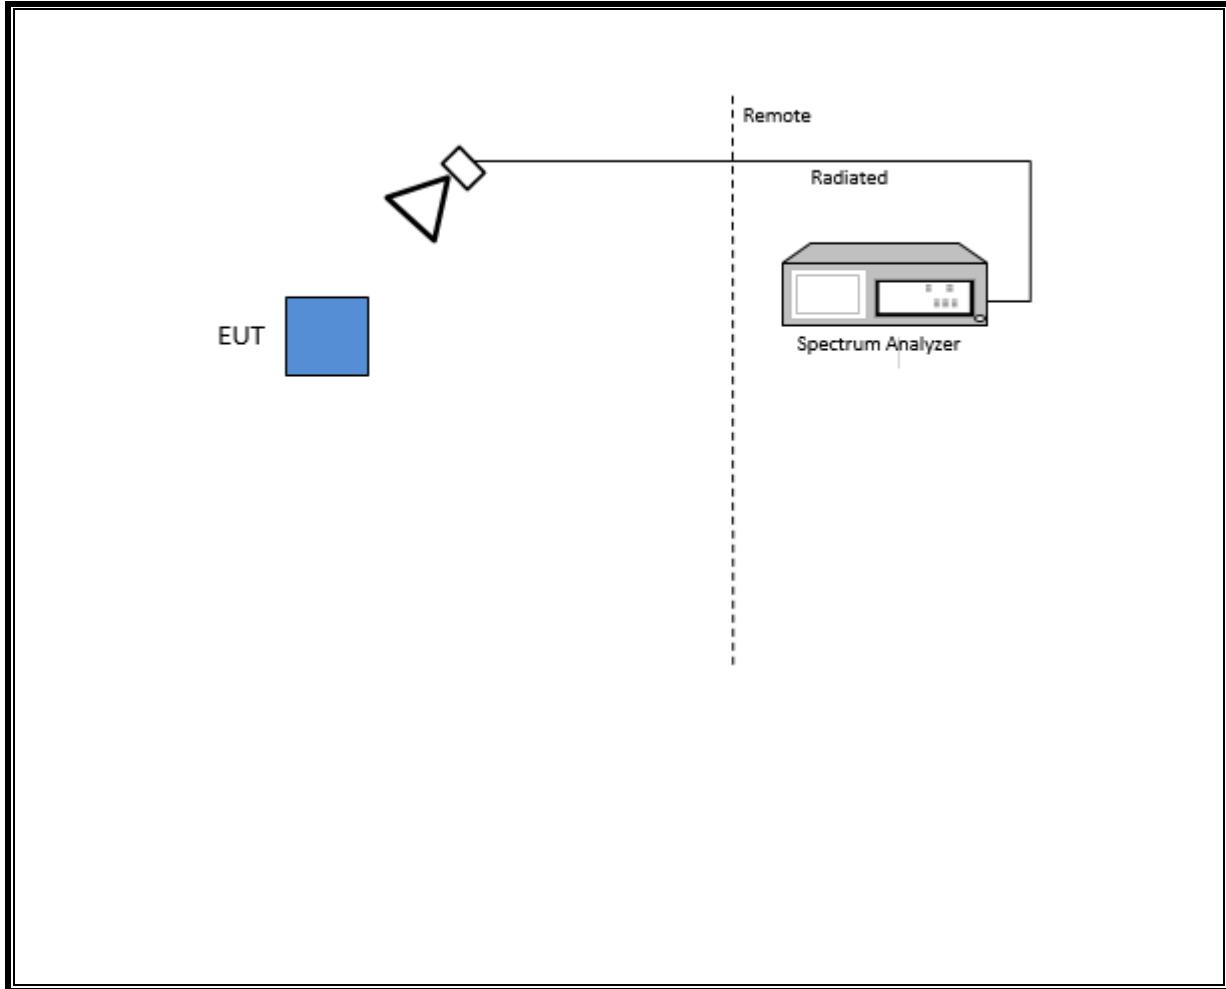

## 6. MEASUREMENT METHOD

On Time and Duty Cycle: KDB 558074 D01 v04, Section 6.

6 dB BW: KDB 558074 D01 v04, Section 8.1.

99% BW: ANSI C63.10-2013, Section 6.9.3.

Output Power: KDB 558074 D01 v04, Section 9.2.3.2.

Power Spectral Density: KDB 558074 D01 v04, Section 10.2.

Out-of-band emissions in non-restricted bands: KDB 558074 D01 v04, Section 11.1 a)

Out-of-band emissions in restricted bands: KDB 558074 D01 v04, Section 12.1.

Band-edge: KDB 558074 D01 v04, Section 12.1.

## 7. TEST AND MEASUREMENT EQUIPMENT

The following test and measurement equipment was utilized for the tests documented in this:

Test Equipment List					
Description	Manufacturer	Model	ID No.	Cal Date	Cal Due
Spectrum Analyzer	Agilent	N9030A	T1454	01/08/18	01/08/19
Spectrum Analyzer	Agilent	N9030A	T1466	04/16/18	04/16/19
Antenna, Biconolog, 30MHz-2000MHz	Sunol Sciences	JB1	T130	10/16/17	10/16/18
Antenna, Horn, 1-18GHz	ETS Lindgren	3117	T862	06/09/17	06/09/18
Antenna, Horn, 1-18GHz	ETS Lindgren	3117	T863	06/09/17	06/09/18
RF Preamplifier, 10kHz - 1GHz	HP	8447D	T15	08/14/17	08/14/18
RF Preamplifier, 1 - 18GHz	Miteq	AFS42-00101800-25-S-42	T1165	11/25/17	11/25/18
RF Preamplifier, 1 - 18GHz	Miteq	AFS42-00101800-25-S-42	T493	04/03/18	04/03/19
Antenna, Active Loop 9kHz – 30MHz	Com-Power	AL-130R	T1866	10/10/17	10/10/18
Antenna, Horn, 18-26GHz	ARA	MWH-1826G	T89	01/18/18	01/18/19
Spectrum Analyzer	Keysight	N9030A	T1113	12/21/17	12/21/18
RF Preamplifier, 1-26GHz	Agilent	8449B	T404	07/23/17	07/23/18

Test Software List			
Description	Manufacturer	Model	Version
Radiated Software	UL	UL EMC	Ver 9.5, Dec 01, 2016
Antenna Port Software	UL	UL RF	Ver 8.2, Mar 21, 2018

## 8. ANTENNA PORT TEST RESULTS

### 8.1. ON TIME AND DUTY CYCLE

#### LIMITS

None; for reporting purposes only.


#### PROCEDURE

KDB 558074 Zero-Span Spectrum Analyzer Method.

#### ON TIME AND DUTY CYCLE RESULTS

Mode	ON Time B (msec)	Period (msec)	Duty Cycle x (linear)	Duty Cycle (%)	Duty Cycle Correction Factor (dB)	1/B Minimum VBW (kHz)
AIREA	1.000	1.000	1.000	100.00%	0.00	0.010

#### DUTY CYCLE PLOTS

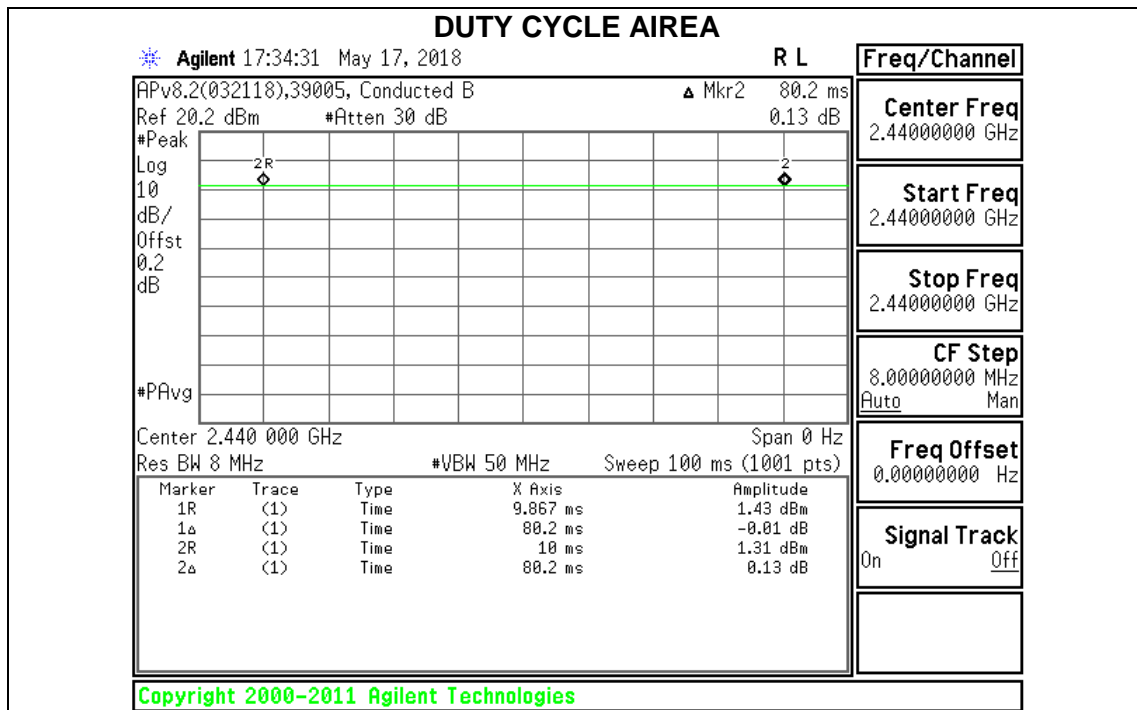


## 8.2. 99% BANDWIDTH

### LIMITS

None; for reporting purposes only.


### RESULTS

Channel	Frequency (MHz)	99% Bandwidth (MHz)
Low 11	2405	2.2468
Middle 18	2440	2.2541
High 26	2480	2.3062

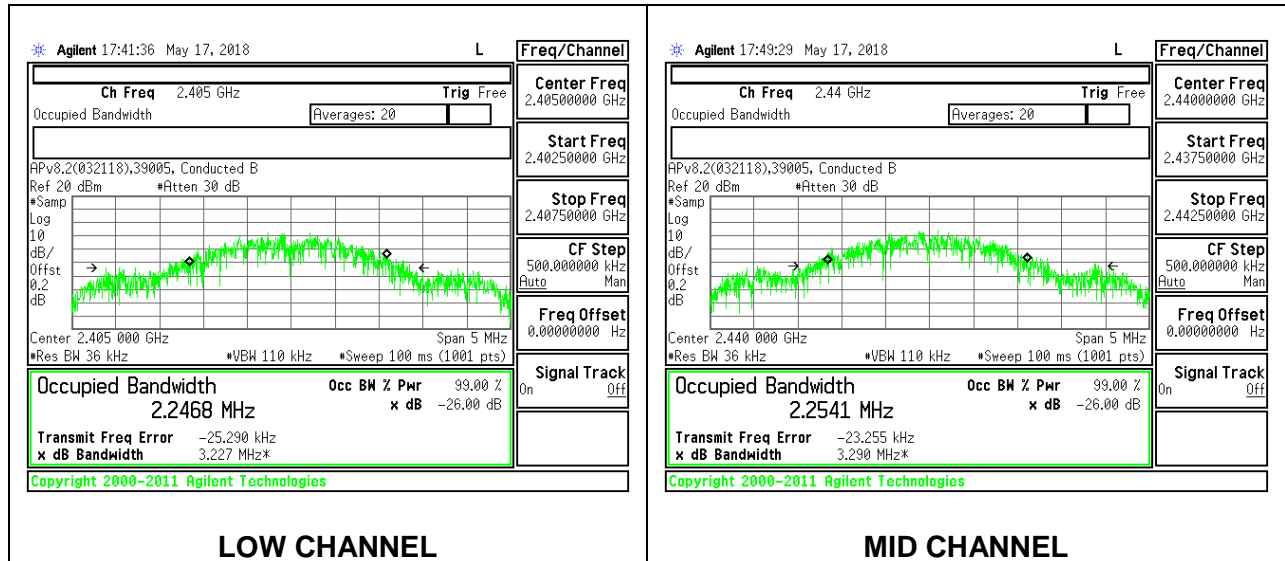

LOW CHANNEL

MID CHANNEL

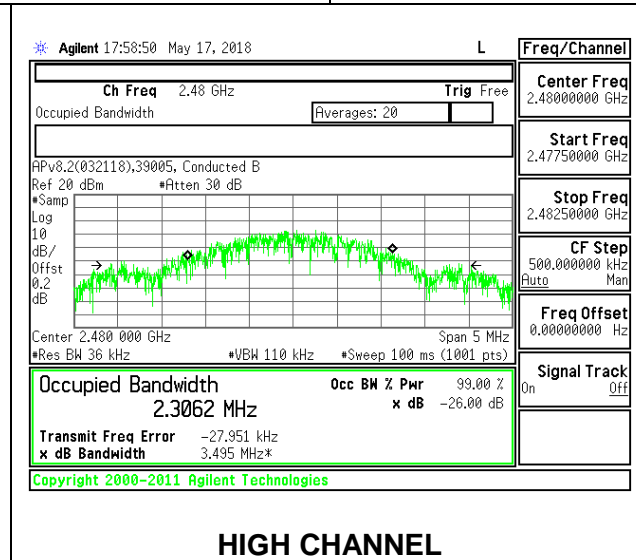

HIGH CHANNEL

### 8.3. 6 dB BANDWIDTH

#### LIMITS



FCC §15.247 (a) (2)

RSS-247 5.2 (a)

The minimum 6 dB bandwidth shall be at least 500 kHz.

#### RESULTS

Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	Minimum Limit (MHz)
Low 11	2405	1.398	0.5
Middle 18	2440	<b>1.491</b>	0.5
High 26	2480	1.428	0.5

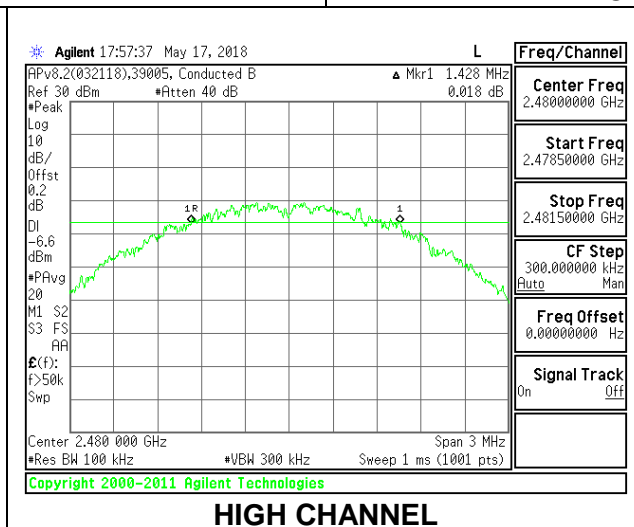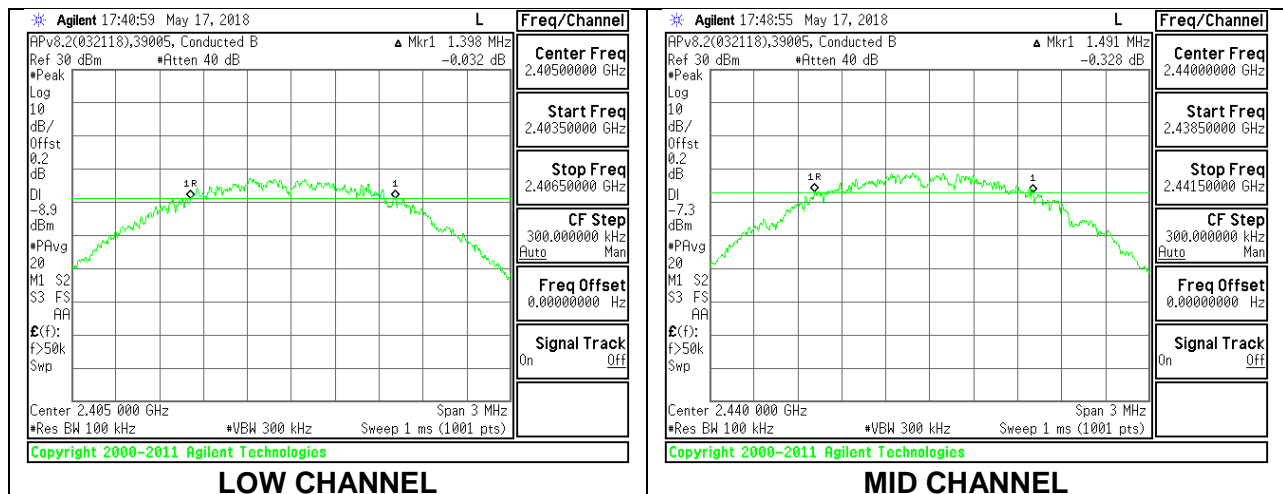

## 8.4. OUTPUT POWER

### LIMITS

FCC §15.247 (b) (3)

RSS-247 5.4 (d)

The maximum antenna gain is less than or equal to 6 dBi, therefore the limit is 30 dBm.

### TEST PROCEDURE

The transmitter output is connected to a power meter. The cable assembly insertion loss was entered as an offset in the power meter to allow for a gated peak reading of power.

### RESULTS

<b>Tested By:</b>	39005 RA
<b>Date:</b>	5/18/2018

<b>Channel</b>	<b>Frequency (MHz)</b>	<b>Peak Power Reading (dBm)</b>	<b>Limit (dBm)</b>	<b>Margin (dB)</b>
Low 11	2405	2.91	30	-27.09
Middle 18	2440	<b>2.96</b>	30	-27.04
High 25	2475	2.83	30	-27.17
High 26	2480	-4.65	30	-34.65



## 8.5. AVERAGE POWER

### LIMITS

None; for reporting purposes only.

### TEST PROCEDURE

The transmitter output is connected to a power meter. The cable assembly insertion loss was entered as an offset in the power meter to allow for a gated Average reading of power.

### RESULTS

<b>Tested By:</b>	39005 RA
<b>Date:</b>	5/18/2018

<b>Channel</b>	<b>Frequency (MHz)</b>	<b>AV power (dBm)</b>
Low 11	2405	2.71
Middle 18	2440	<b>2.72</b>
High 25	2475	2.70
High 26	2480	-5.82

## 8.6. POWER SPECTRAL DENSITY

### LIMITS


FCC §15.247 (e)

RSS-247 (5.2) (b)

The power spectral density conducted from the transmitter to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

### RESULTS

Channel	Frequency (MHz)	PSD (dBm/3kHz)	Limit (dBm/3kHz)	Margin (dB)
Low 11	2405	-11.735	8	-19.74
Middle 18	2440	-11.178	8	-19.18
High 26	2480	-11.336	8	-19.34

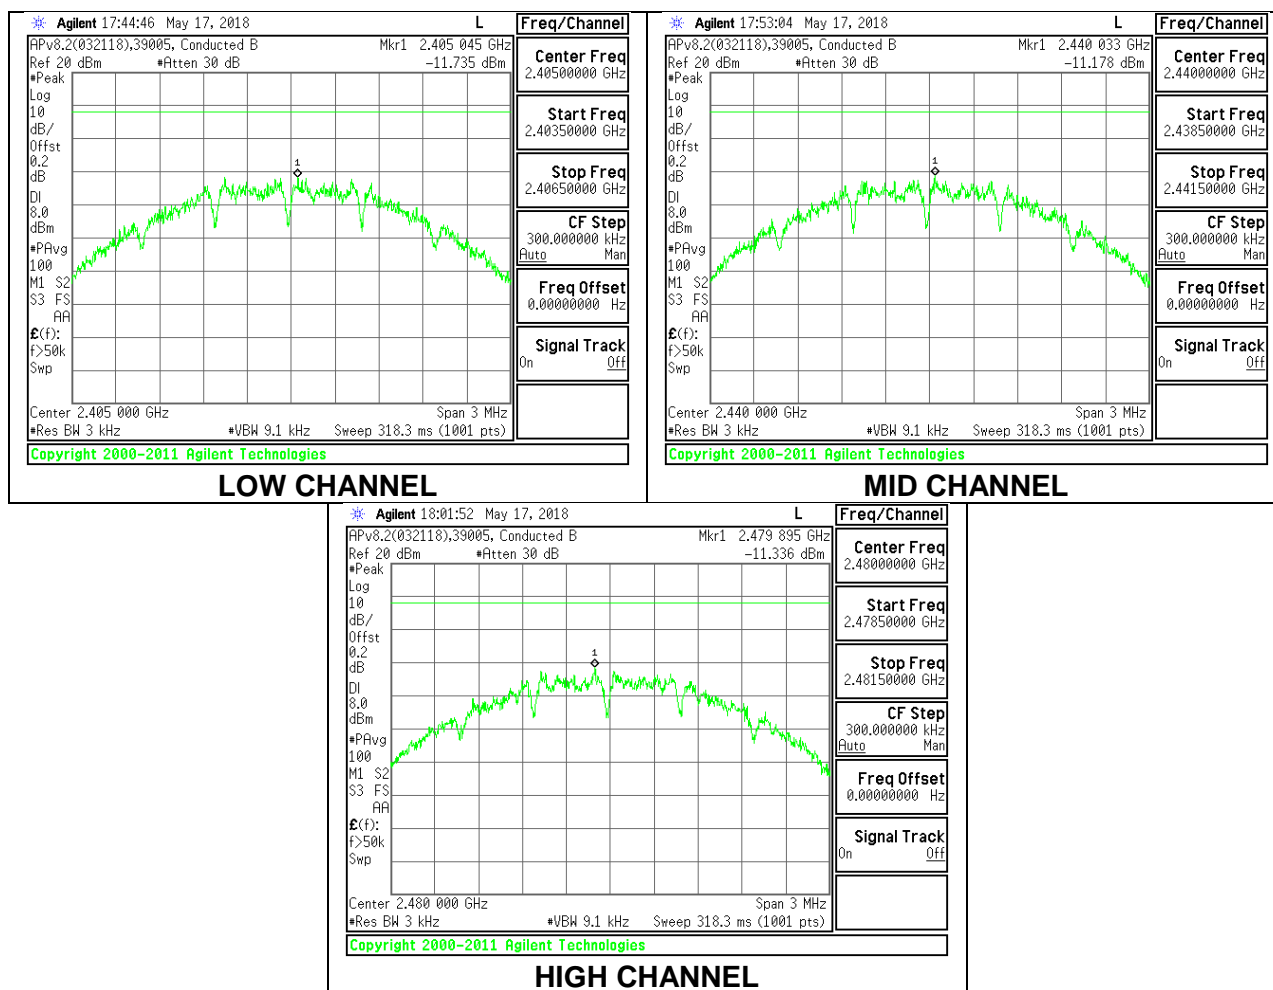

## **8.7. CONDUCTED SPURIOUS EMISSIONS**

### **LIMITS**

FCC §15.247 (d)

RSS-247 5.5


Output power was measured based on the use of a peak measurement, therefore the required attenuation is 20 dB.

### **TEST PROCEDURE**


The transmitter output is connected to a spectrum analyzer. The resolution bandwidth is set to 100 kHz. The video bandwidth is set to 300 kHz.

The spectrum from 30 MHz to 26 GHz is investigated with the transmitter set to the lowest, middle, and highest channels.


**RESULTS**

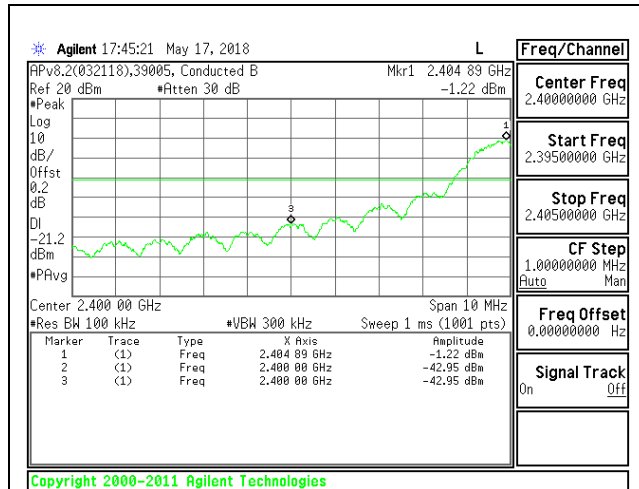


**LOW CHANNEL 11 BANDEDGE**

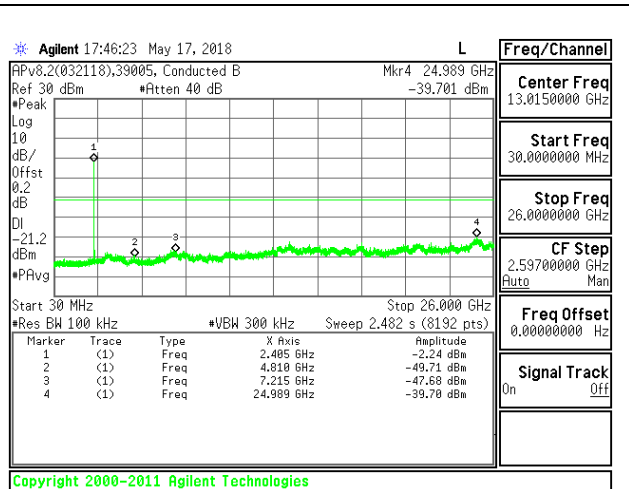


**OUT-OF-BAND LOW CHANNEL 11**

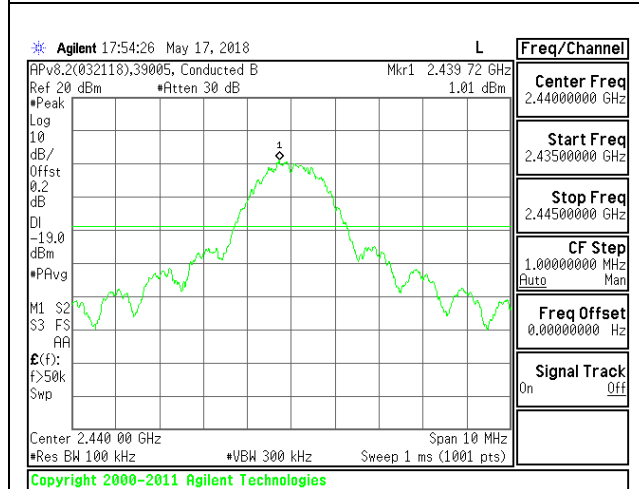


**IN-BAND REFERENCE LEVEL**

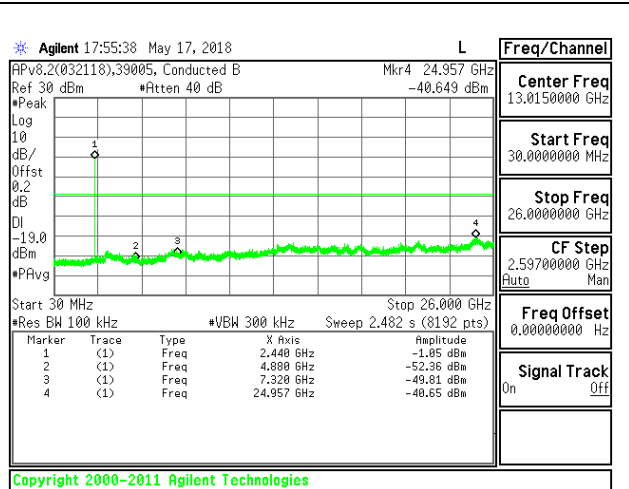

**OUT-OF-BAND MID CHANNEL 18**

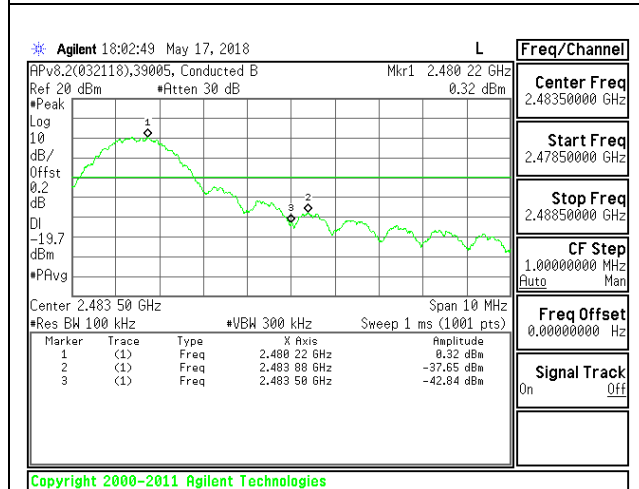

**HIGH CHANNEL 26 BANDEDGE**

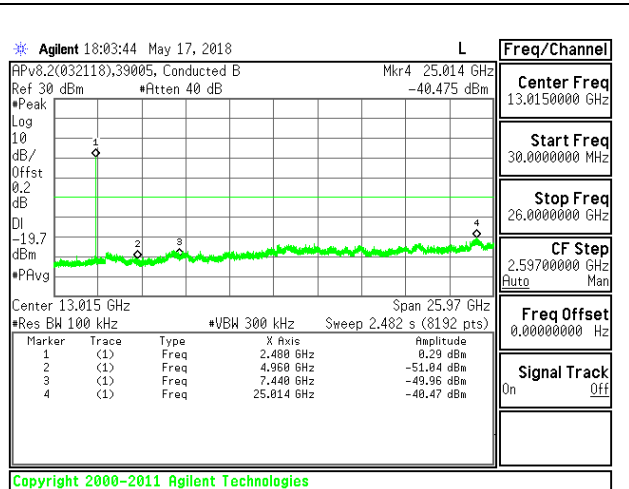

**OUT-OF-BAND HIGH CHANNEL 26**

## 9. RADIATED TEST RESULTS

### 9.1. LIMITS AND PROCEDURE

#### LIMITS

FCC §15.205 and §15.209

RSS-GEN, Section 8.9 and 8.10.

Frequency Range (MHz)	Field Strength Limit (uV/m) at 3 m	Field Strength Limit (dBuV/m) at 3 m
0.009-0.490	2400/F(kHz) @ 300 m	-
0.490-1.705	24000/F(kHz) @ 30 m	-
1.705 - 30	30 @ 30m	-
30 - 88	100	40
88 - 216	150	43.5
216 - 960	200	46
Above 960	500	54

#### TEST PROCEDURE

The EUT is placed on a non-conducting table 80 cm above the ground plane for measurement below 1GHz; 1.5 m above the ground plane for measurement above 1GHz. The antenna to EUT distance is 3 meters. The EUT is configured in accordance with ANSI C63.10. The EUT is set to transmit in a continuous mode.

For measurements below 1 GHz the resolution bandwidth is set to 100 kHz for peak detection measurements or 120 kHz for quasi-peak detection measurements. Peak detection is used unless otherwise noted as quasi-peak.

For pre-scans above 1 GHz the resolution bandwidth is set to 1 MHz; the video bandwidth is set to 30 KHz for peak measurements.

For final measurements above 1 GHz the resolution bandwidth is set to 1 MHz; the video bandwidth is set to 3 MHz for peak measurements and as applicable for average measurements.


The spectrum from 1 GHz to 18 GHz is investigated with the transmitter set to the lowest, middle, and highest channels in each applicable band. Below 1GHz and above 18GHz emissions, the channel with the highest output power was tested.

The frequency range of interest is monitored at a fixed antenna height and EUT azimuth. The EUT is rotated through 360 degrees to maximize emissions received. The antenna is scanned from 1 to 4 meters above the ground plane to further maximize the emission. Measurements are made with the antenna polarized in both the vertical and the horizontal positions.

## 9.2. TRANSMITTER ABOVE 1 GHz

### BANDEDGE (LOW CHANNEL 11)

#### HORIZONTAL RESULT

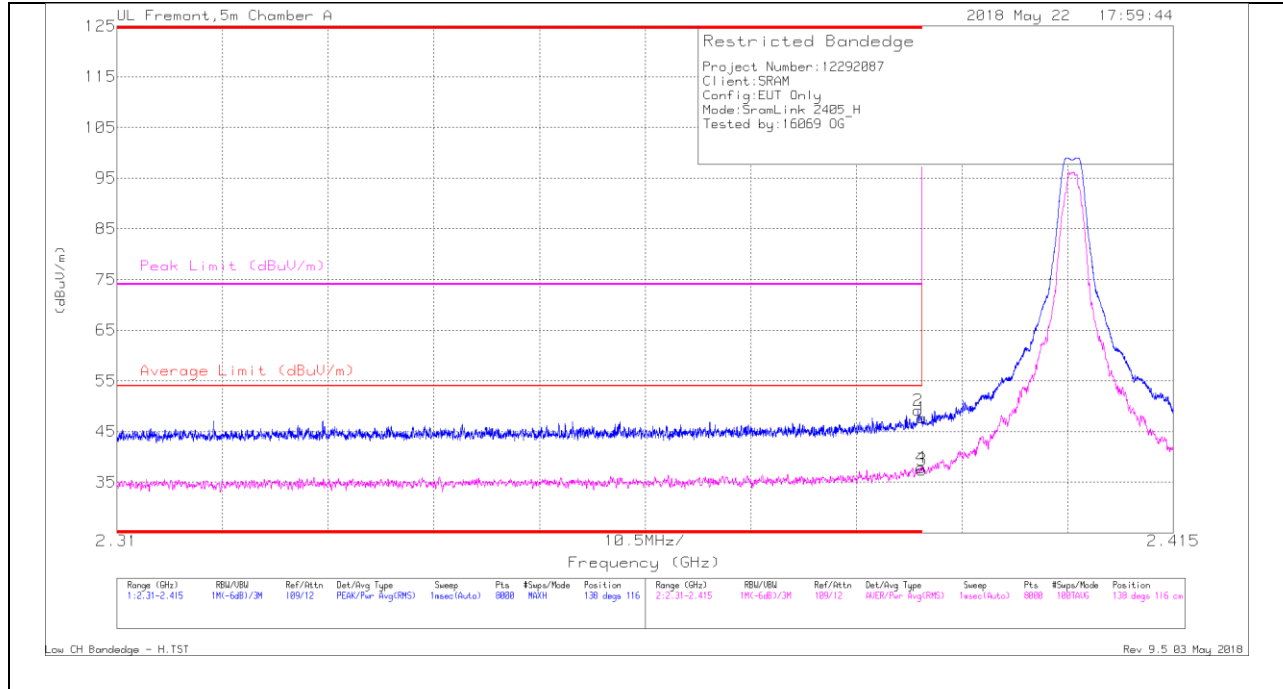

#### Trace Markers


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T862 (dB/m)	Amp/Cb/Fltr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.39	39.27	Pk	31.8	-23.4	0	47.67	-	-	74	-26.33	138	116	H
2	* 2.39	40.76	Pk	31.8	-23.4	0	49.16	-	-	74	-24.84	138	116	H
3	* 2.39	29.04	RMS	31.8	-23.4	0	37.44	54	-16.56	-	-	138	116	H
4	* 2.39	29.42	RMS	31.8	-23.4	0	37.82	54	-16.18	-	-	138	116	H

\* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

### VERTICAL RESULT

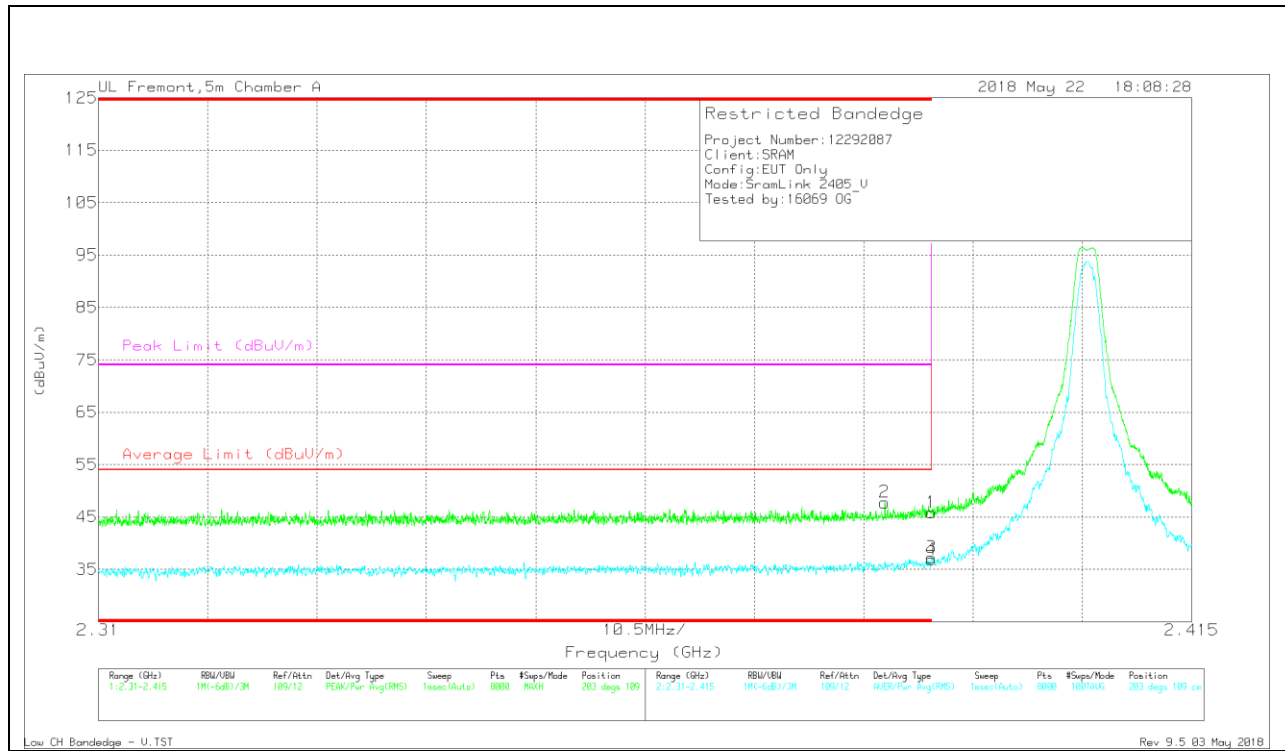


### Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T862 (dB/m)	Amp/Cb/Filtr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	* 2.386	39.35	Pk	31.8	-23.4	0	47.75	-	-	74	-26.25	203	109	V
1	* 2.39	37.47	Pk	31.8	-23.4	0	45.87	-	-	74	-28.13	203	109	V
3	* 2.39	28.84	RMS	31.8	-23.4	0	37.24	54	-16.76	-	-	203	109	V
4	* 2.39	28.48	RMS	31.8	-23.4	0	36.88	54	-17.12	-	-	203	109	V

\* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band  
 Pk - Peak detector  
 RMS - RMS detection

## BANDEDGE (HIGH CHANNEL 25)

### HORIZONTAL RESULT

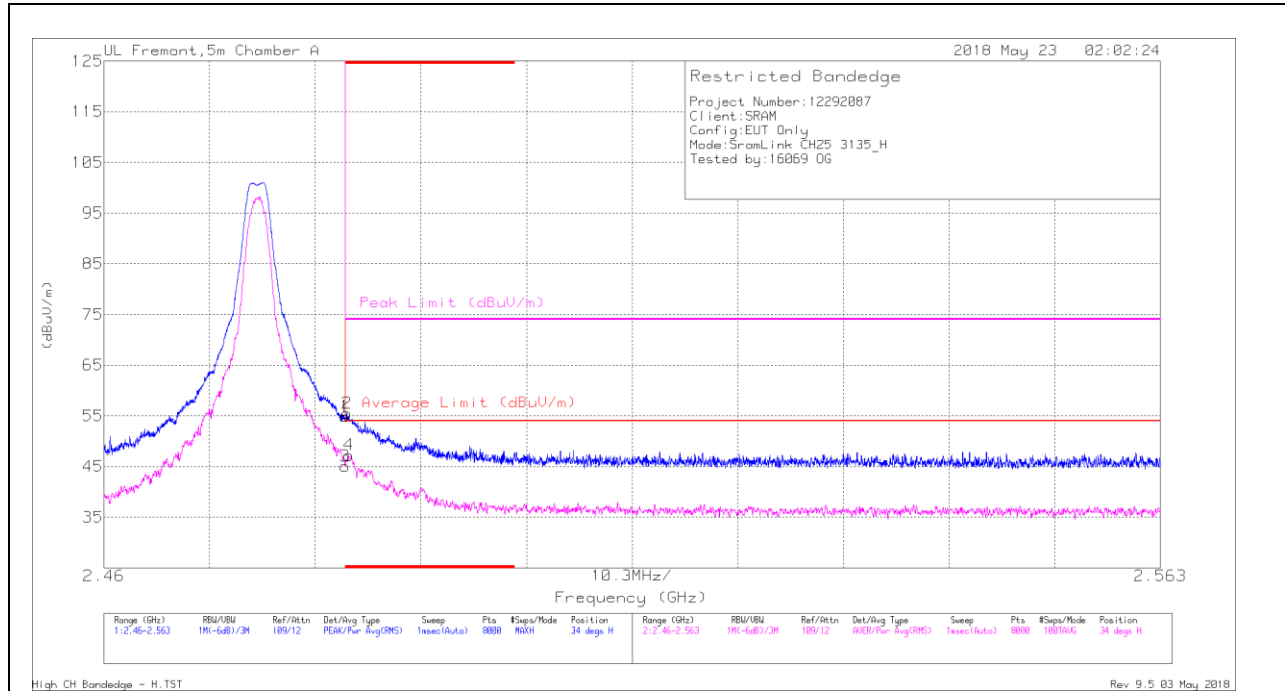

### Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T862 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.484	45.84	Pk	32.3	-23.3	0	54.84	-	-	74	-19.16	34	108	H
2	* 2.484	46.51	Pk	32.3	-23.3	0	55.51	-	-	74	-18.49	34	108	H
3	* 2.484	36.09	RMS	32.3	-23.3	0	45.09	54	-8.91	-	-	34	108	H
4	* 2.484	38.25	RMS	32.3	-23.3	0	47.25	54	-6.75	-	-	34	108	H


\* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection



### VERTICAL RESULT

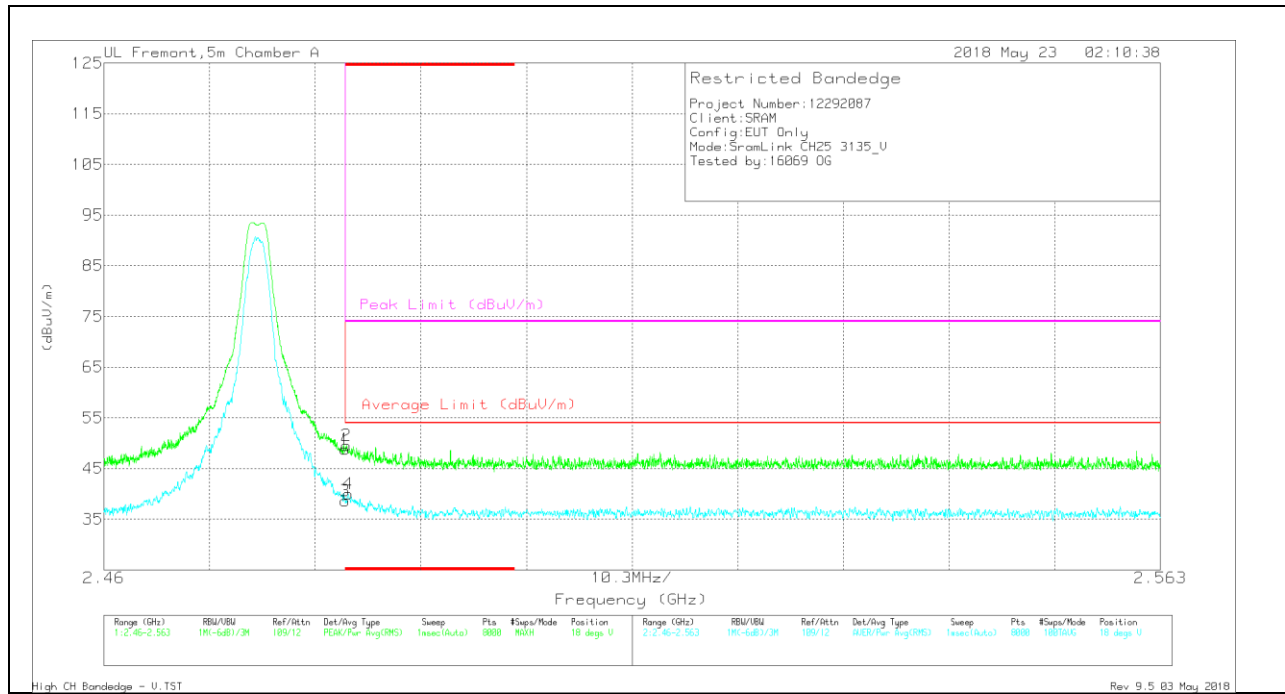

### Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AFT862 (dB/m)	Amp/Cb/Fitr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.484	39.75	Pk	32.3	-23.3	0	48.75	-	-	74	-25.25	18	103	V
2	* 2.484	40.6	Pk	32.3	-23.3	0	49.6	-	-	74	-24.4	18	103	V
3	* 2.484	29.64	RMS	32.3	-23.3	0	38.64	54	-15.36	-	-	18	103	V
4	* 2.484	31.01	RMS	32.3	-23.3	0	40.01	54	-13.99	-	-	18	103	V


\* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

## BANEDGE (HIGH CHANNEL 26)

### HORIZONTAL RESULT

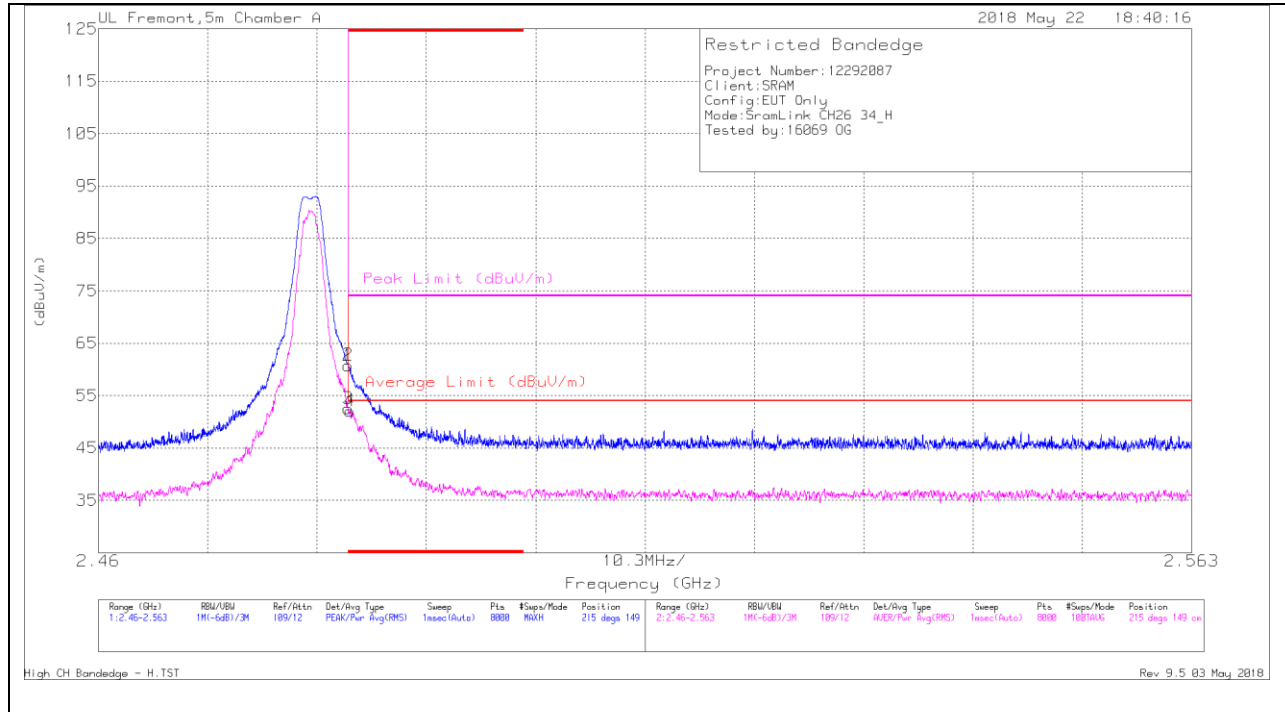

### Trace Markers


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T862 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.484	51.71	Pk	32.3	-23.3	0	60.71	-	-	74	-13.29	215	149	H
2	* 2.484	51.78	Pk	32.3	-23.3	0	60.78	-	-	74	-13.22	215	149	H
3	* 2.484	43.52	RMS	32.3	-23.3	0	52.52	54	-1.48	-	-	215	149	H
4	* 2.484	42.99	RMS	32.3	-23.3	0	51.99	54	-2.01	-	-	215	149	H

\* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

### VERTICAL RESULT

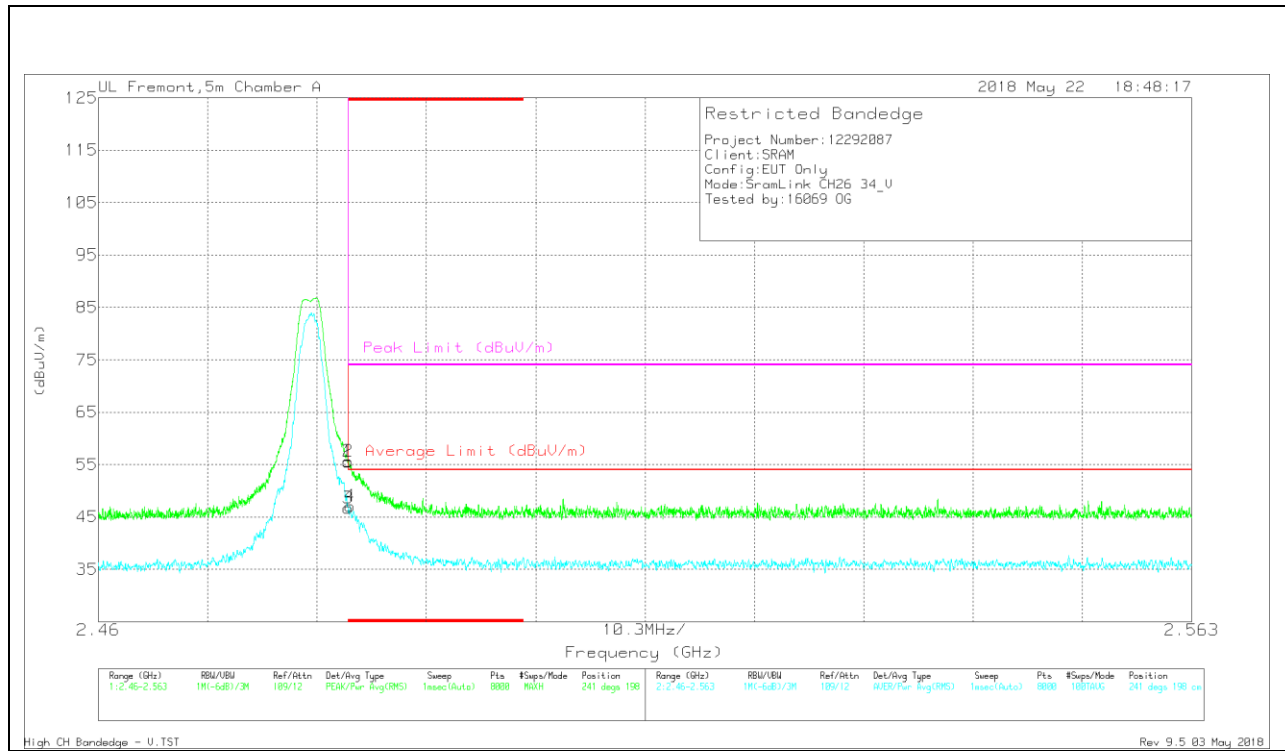


### Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T862 (dB/m)	Amp/Cb/Filtr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.484	46.48	Pk	32.3	-23.3	0	55.48	-	-	74	-18.52	241	198	V
2	* 2.484	46.64	Pk	32.3	-23.3	0	55.64	-	-	74	-18.36	241	198	V
3	* 2.484	37.64	RMS	32.3	-23.3	0	46.64	54	-7.36	-	-	241	198	V
4	* 2.484	38.08	RMS	32.3	-23.3	0	47.08	54	-6.92	-	-	241	198	V


\* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band  
 Pk - Peak detector  
 RMS - RMS detection

# HARMONICS AND SPURIOUS EMISSIONS

## LOW CHANNEL 11 RESULTS

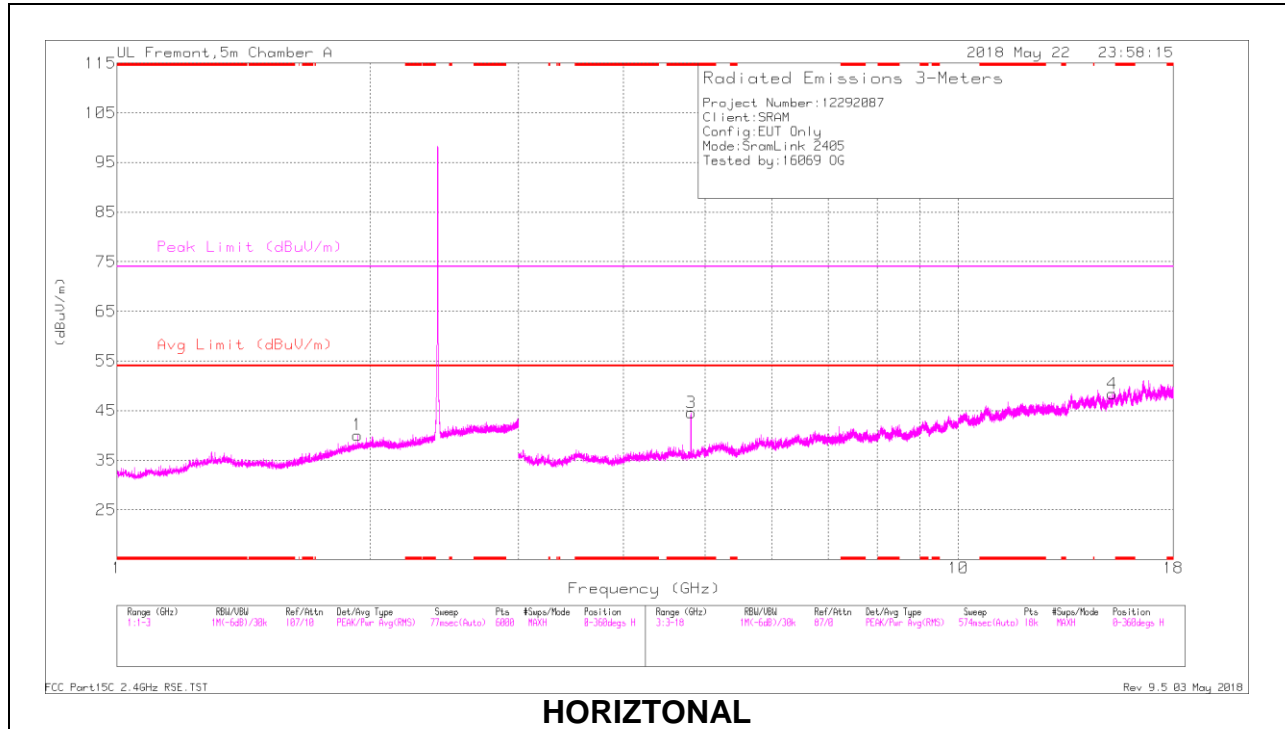

**HORIZONTAL**

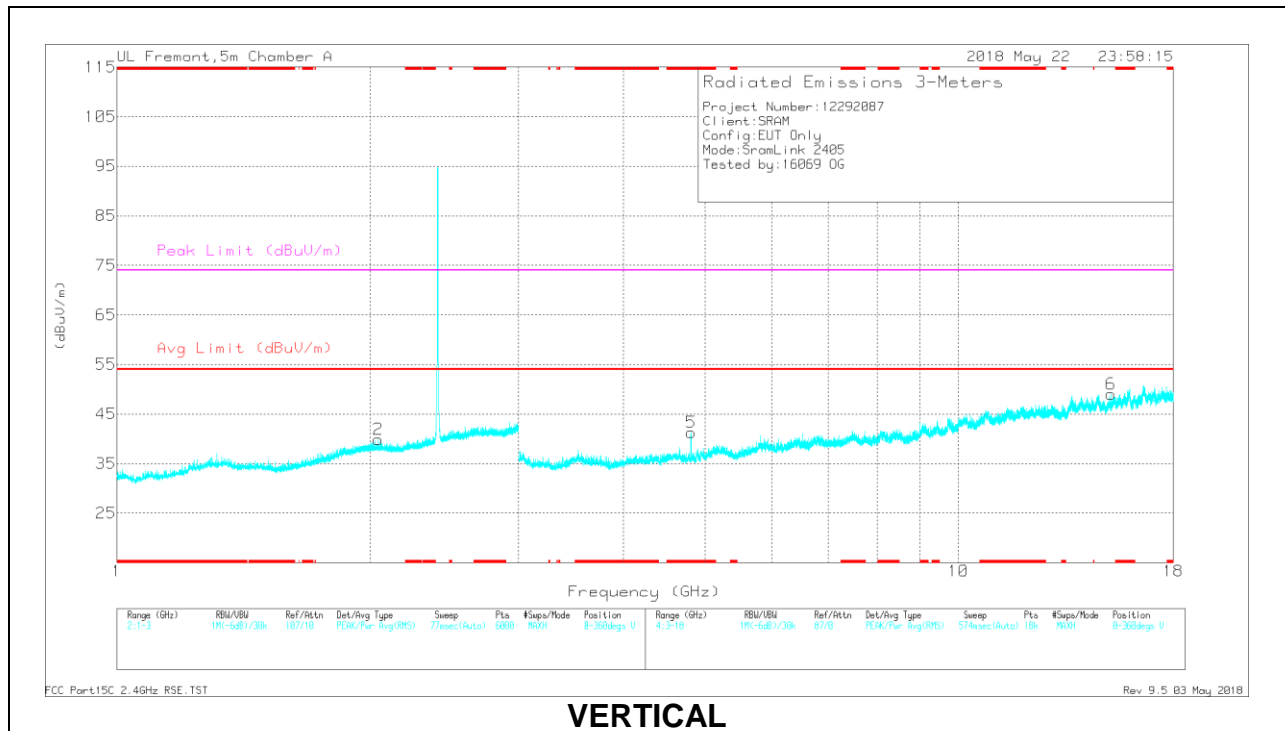

**VERTICAL**

Radiated Emissions


Frequency (GHz)	Meter Reading (dBuV)	Det	AF T862 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
* 4.811	41.49	PK2	34.2	-27.2	0	48.49	-	-	74	-25.51	51	102	H
* 4.809	33.4	MAv1	34.2	-27.2	0	40.4	54	-13.6	-	-	51	102	H
* 4.809	40.18	PK2	34.2	-27.2	0	47.18	-	-	74	-26.82	133	161	V
* 4.811	31.64	MAv1	34.2	-27.2	0	38.64	54	-15.36	-	-	133	161	V
1.93	36.34	PK2	31.2	-23.2	0	44.34	-	-	-	-	29	112	H
2.043	37.49	PK2	31.4	-23.4	0	45.49	-	-	-	-	266	192	V
15.185	31.71	PK2	39.8	-18.1	0	53.41	-	-	-	-	247	187	V
15.243	31.99	PK2	39.8	-18.1	0	53.69	-	-	-	-	99	300	H

\* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band


PK2 - KDB558074 Method: Maximum Peak

MAv1 - KDB558074 Option 1 Maximum RMS Average

### MID CHANNEL 18 RESULTS

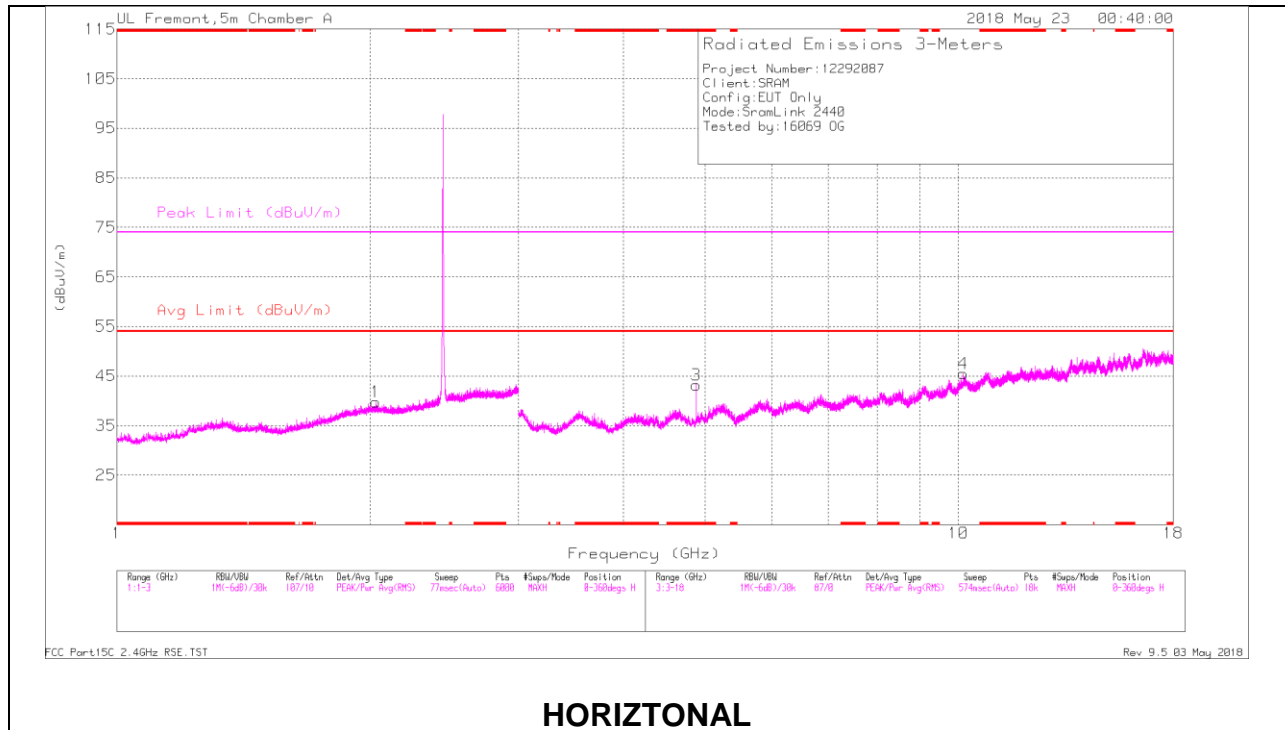

**HORIZONTAL**

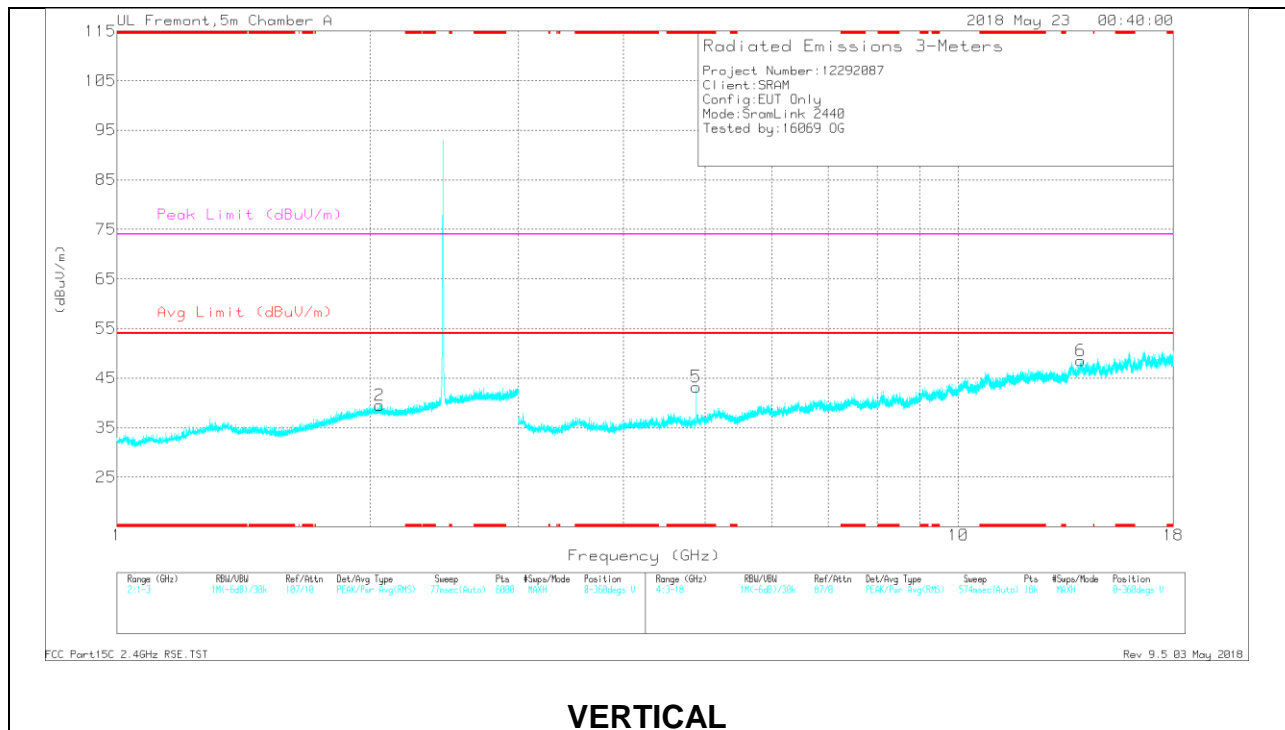

**VERTICAL**

Radiated Emissions


Frequency (GHz)	Meter Reading (dBuV)	Det	AF T862 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
* 4.881	42.33	PK2	34.1	-26.7	0	49.73	-	-	74	-24.27	67	104	H
* 4.881	34.55	MAv1	34.1	-26.7	0	41.95	54	-12.05	-	-	67	104	H
* 4.881	41.94	PK2	34.1	-26.7	0	49.34	-	-	74	-24.66	139	387	V
* 4.881	33.66	MAv1	34.1	-26.7	0	41.06	54	-12.94	-	-	139	387	V
2.03	37.18	PK2	31.4	-23.4	0	45.18	-	-	-	-	208	150	H
2.054	36.72	PK2	31.4	-23.5	0	44.62	-	-	-	-	215	284	V
10.138	32.58	PK2	37.4	-19.3	0	50.68	-	-	-	-	10	400	H
13.979	32.51	PK2	39.4	-18	0	53.91	-	-	-	-	275	323	V

\* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band


PK2 - KDB558074 Method: Maximum Peak

MAv1 - KDB558074 Option 1 Maximum RMS Average

### HIGH CHANNEL 26 RESULTS

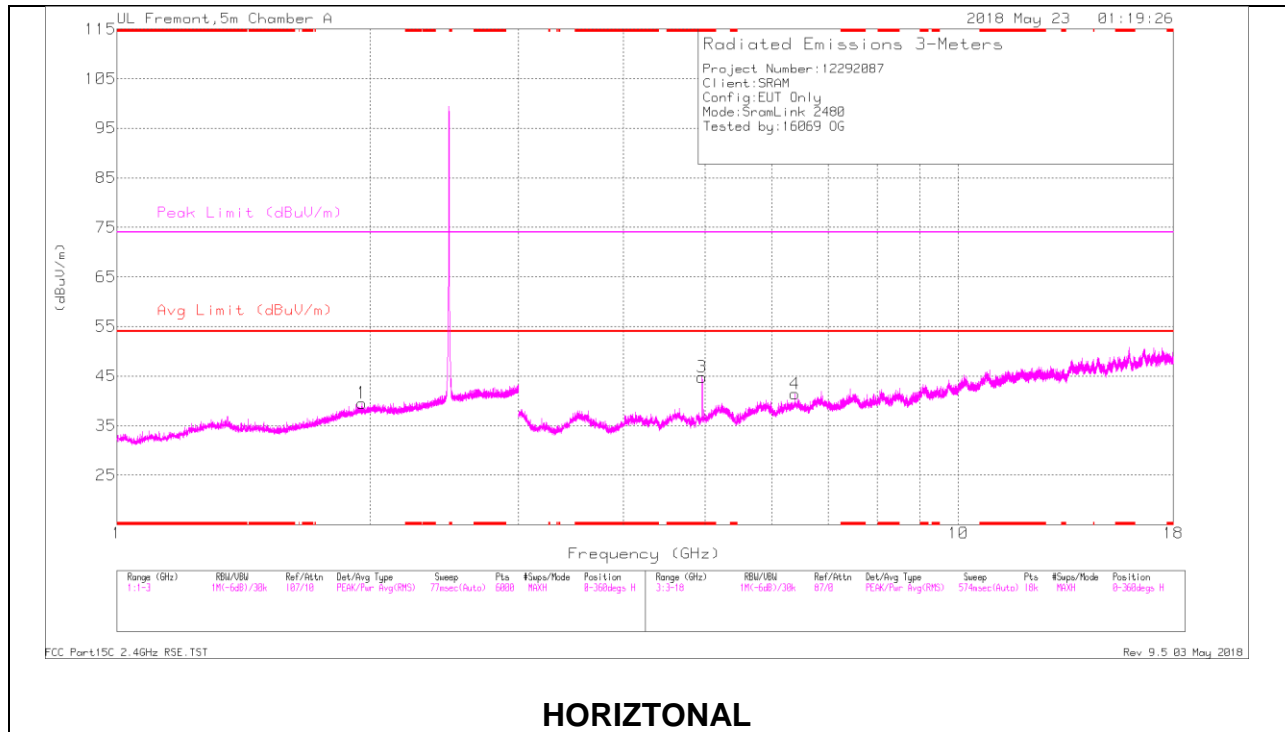

**HORIZONTAL**

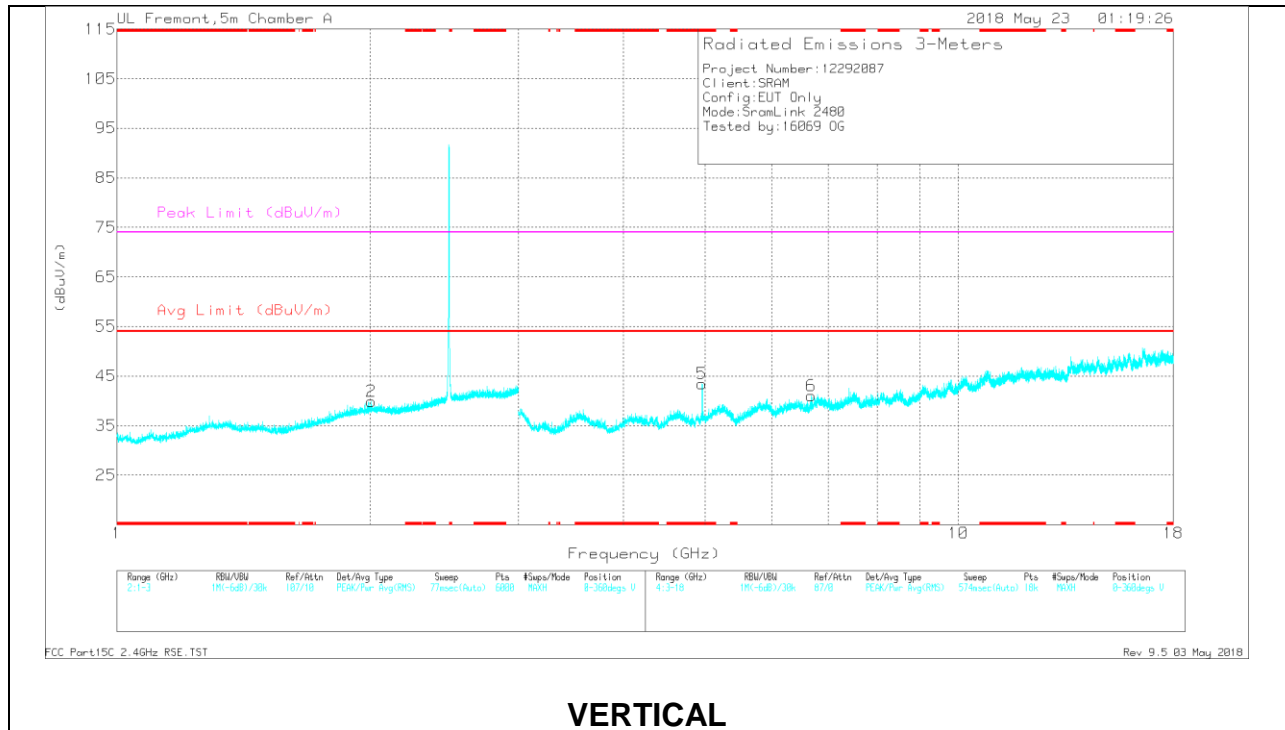

**VERTICAL**



Radiated Emissions

Frequency (GHz)	Meter Reading (dBuV)	Det	AF T862 (dB/m)	Amp/Cbl/Fitr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
* 4.961	44.76	PK2	34.2	-27.4	0	51.56	-	-	74	-22.44	73	107	H
* 4.959	36.83	MAV1	34.2	-27.4	0	43.63	54	-10.37	-	-	73	107	H
* 4.961	43.94	PK2	34.2	-27.4	0	50.74	-	-	74	-23.26	159	110	V
* 4.959	35.43	MAV1	34.2	-27.4	0	42.23	54	-11.77	-	-	159	110	V
1.956	36.75	PK2	31.4	-23.2	0	44.95	-	-	-	-	31	177	H
2.006	37	PK2	31.4	-23.3	0	45.1	-	-	-	-	321	207	V
6.397	34.93	PK2	35.8	-24.1	0	46.63	-	-	-	-	223	332	H
6.678	34.51	PK2	35.6	-24	0	46.11	-	-	-	-	102	232	V


\* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK2 - KDB558074 Method: Maximum Peak

MAV1 - KDB558074 Option 1 Maximum RMS Average

### 9.3. WORST CASE BELOW 30MHz

#### SPURIOUS EMISSIONS BELOW 30 MHz (WORST-CASE CONFIGURATION)

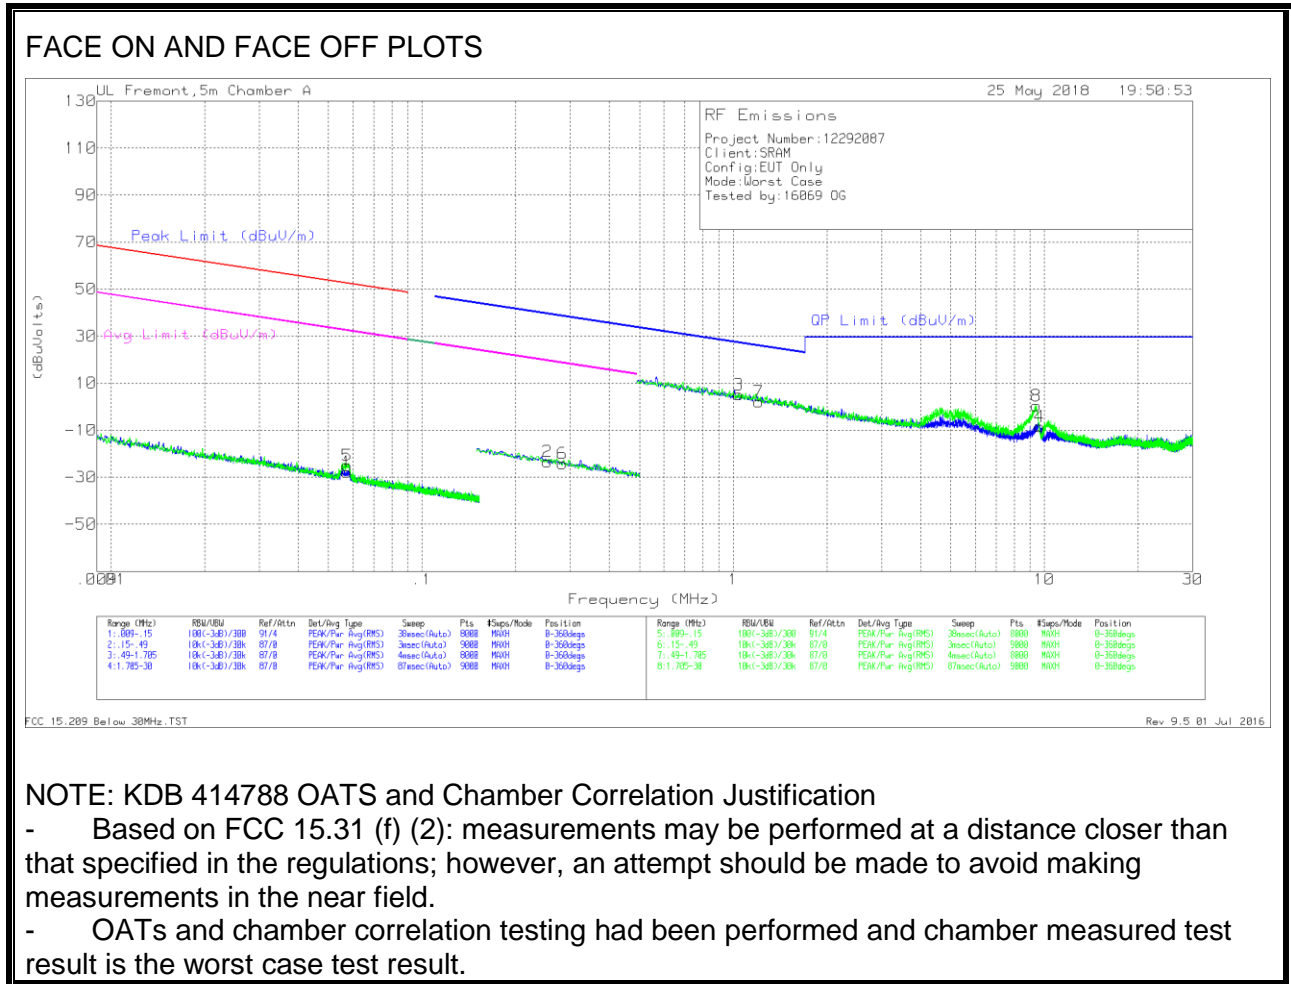

NOTE: KDB 414788 OATS and Chamber Correlation Justification

- Based on FCC 15.31 (f) (2): measurements may be performed at a distance closer than that specified in the regulations; however, an attempt should be made to avoid making measurements in the near field.
- OATs and chamber correlation testing had been performed and chamber measured test result is the worst case test result.

**Below 30MHz DATA**



Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	Loop Antenna (dB/m)	Cbl (dB)	Dist Corr 300m	Corrected Reading (dBuVolts)	Peak Limit (dBuV/m)	Margin (dB)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Avg Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)
5	.05745	40.45	Pk	14.4	.1	-80	-25.05	52.4	-77.45	32.4	-57.45	-	-	-	-	0-360
1	.05747	37.68	Pk	14.4	.1	-80	-27.82	52.4	-80.22	32.4	-60.22	-	-	-	-	0-360
2	.25297	42.76	Pk	13.8	.1	-80	-23.34	-	-	-	-	39.55	-62.89	19.55	-42.89	0-360
6	.28272	41.87	Pk	13.8	.1	-80	-24.23	-	-	-	-	38.59	-62.82	18.59	-42.82	0-360

Pk - Peak detector

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	Loop Antenna (dB/m)	Cbl (dB)	Dist Corr 30m	Corrected Reading (dBuVolts)	QP Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Avg Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)
3	1.04195	30.59	Pk	14.3	.2	-40	5.09	27.27	-22.18	-	-	-	-	0-360
7	1.20885	27.64	Pk	14.3	.2	-40	2.14	25.98	-23.84	-	-	-	-	0-360
8	9.43767	25.37	Pk	14.5	.5	-40	.37	29.5	-29.13	-	-	-	-	0-360
4	9.67504	16.52	Pk	14.6	.4	-40	-8.48	29.5	-37.98	-	-	-	-	0-360

Pk - Peak detector

### 9.4. WORST CASE BELOW 1 GHz

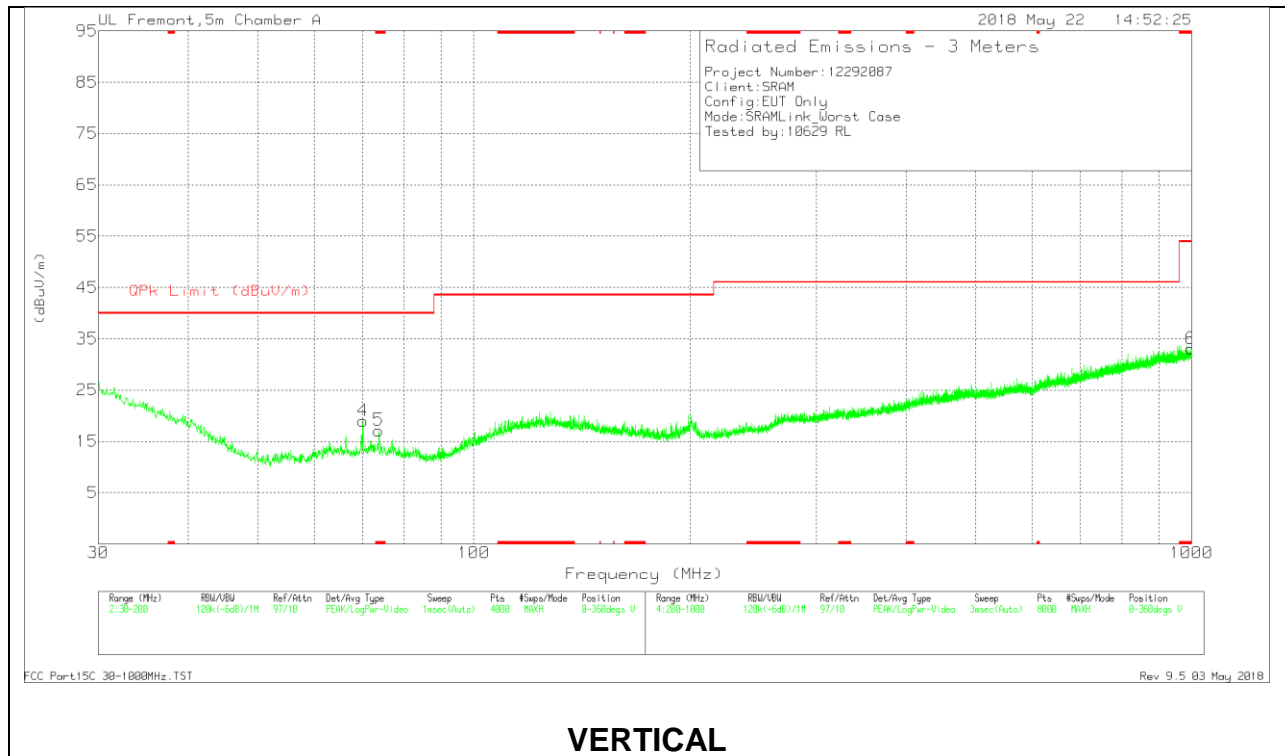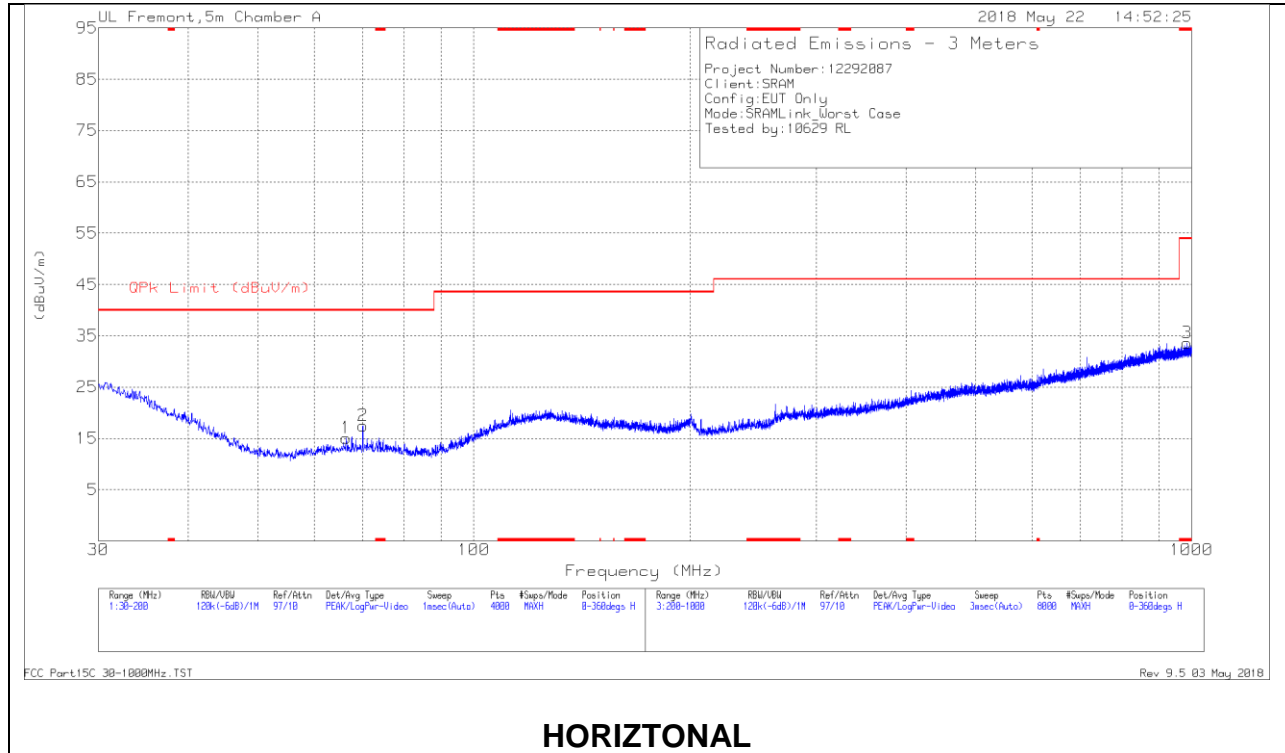



**Below 1GHz Data**

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	AF T130 (dB/m)	Amp/Cbl (dB/m)	Corrected Reading (dBuV/m)	QPk Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
5	* 73.7438	31.86	Pk	12	-26.7	17.16	40	-22.84	0-360	100	V
3	* 985.9022	29.15	Pk	27.1	-22.6	33.65	53.97	-20.32	0-360	400	H
6	* 998.5038	28.42	Pk	27.2	-22.5	33.12	53.97	-20.85	0-360	100	V
1	66.3894	29.8	Pk	12.1	-26.8	15.1	40	-24.9	0-360	100	H
2	70.0454	32.12	Pk	12.1	-26.7	17.52	40	-22.48	0-360	100	H
4	70.0454	33.62	Pk	12.1	-26.7	19.02	40	-20.98	0-360	100	V

**\* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band**

Pk - Peak detector

### 9.5. WOSRT CASE 18-26 GHz

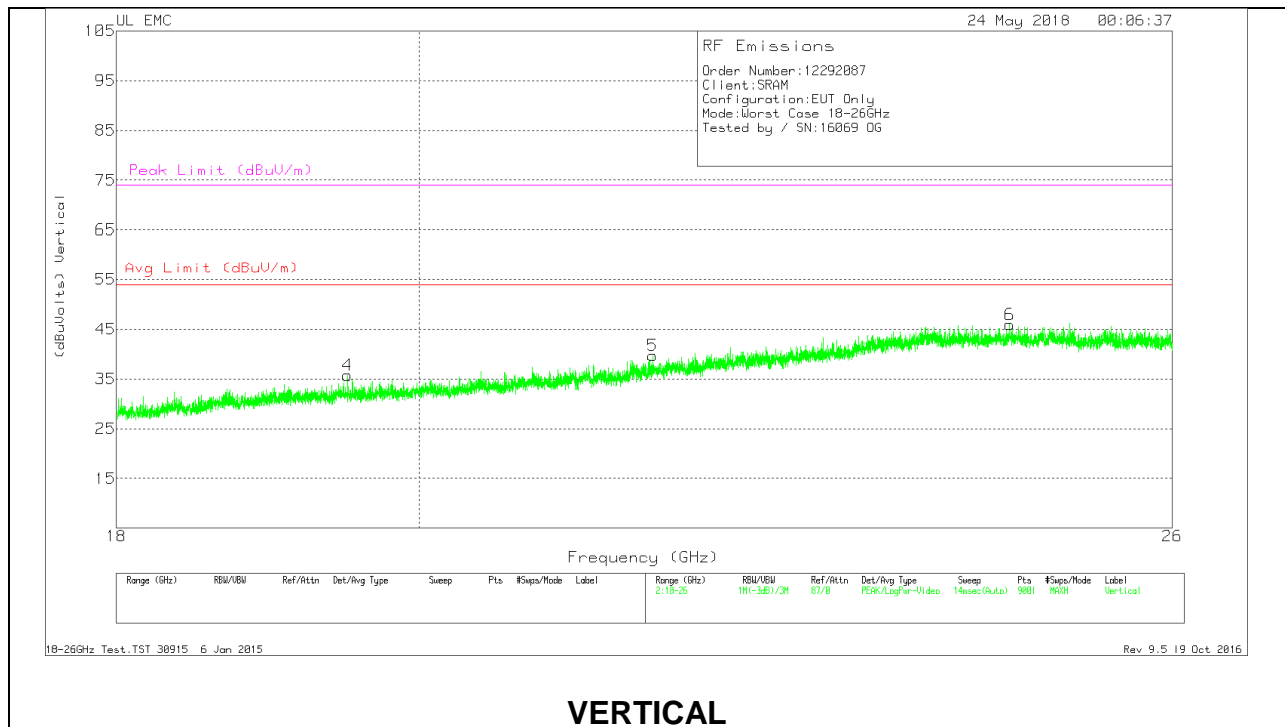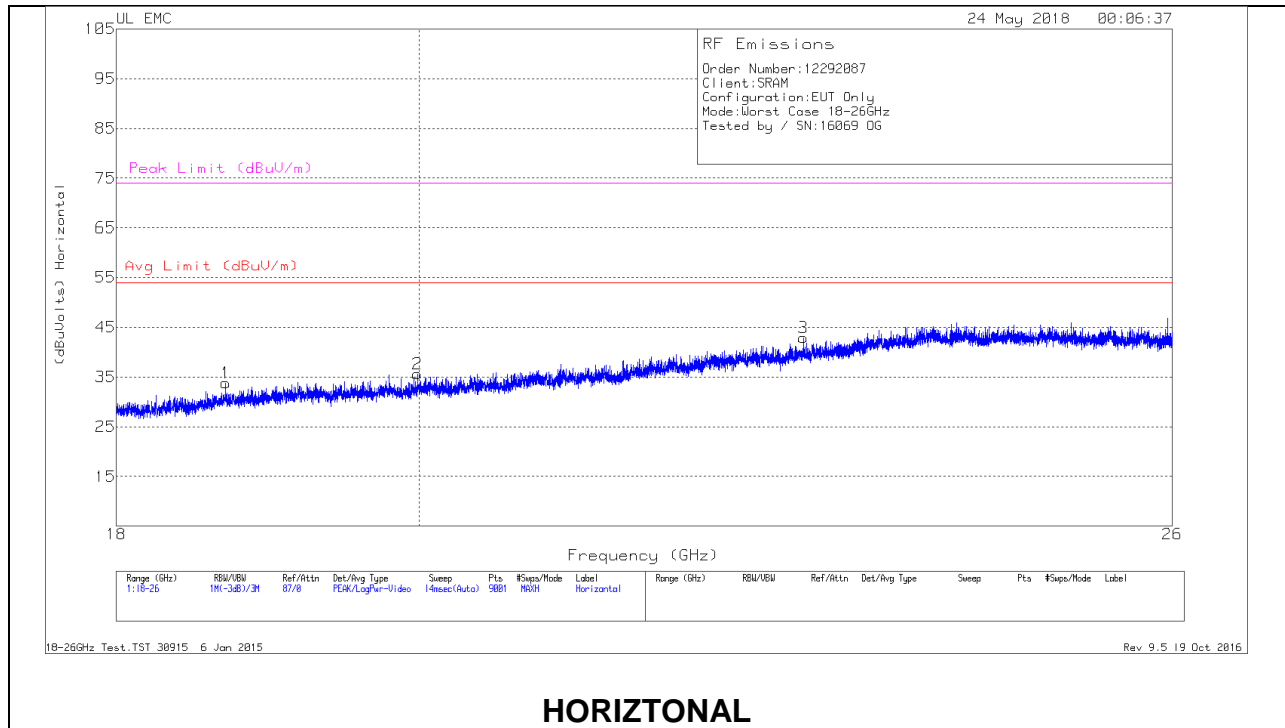

**18 – 26GHz DATA**

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	T449 AF (dB/m)	Amp/Cbl (dB)	Dist Corr (dB)	Corrected Reading (dBuVolts)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)
1	18.698	35.17	Pk	32.3	-24.2	-9.5	33.77	54	-20.23	74	-40.23
2	19.988	37.43	Pk	32.8	-25.1	-9.5	35.63	54	-18.37	74	-38.37
3	22.865	43.79	Pk	33.5	-24.9	-9.5	42.89	54	-11.11	74	-31.11
4	19.509	37.53	Pk	32.7	-25	-9.5	35.73	54	-18.27	74	-38.27
5	21.697	40.62	Pk	33.2	-24.6	-9.5	39.72	54	-14.28	74	-34.28
6	24.567	45.22	Pk	34.1	-23.9	-9.5	45.92	54	-8.08	74	-28.08

Pk - Peak detector