



SAR TEST REPORT

Test Report No. : 26BE0062-HO-3

Applicant : Nikon Corporation
Type of Equipment : Digital Camera
Model No. : COOLPIX S6
FCC ID : CGJ3142EB
Test standard : FCC47CFR 2.1093
FCC OET Bulletin 65, Supplement C
Test Result : Complied
Max. SAR Measured : 0.094W/kg (Body, 2412MHz)

1. This test report shall not be reproduced except full or partial, without the written approval of UL Apex Co., Ltd.
2. The results in this report apply only to the sample tested.
3. This equipment is in compliance with the above standard. We hereby certify that the data contain a true representation of the SAR profile.
4. The test results in this test report are traceable to the national or international standards.

Date of test : November 08-10, 2005

Tested by :

Miyo Ikuta
EMC Services

Approved by :

Tetsuo Maeno
Site Manager of EMC Services

<u>CONTENTS</u>	PAGE
SECTION 1 : Client information.....	3
SECTION 2 : Equipment under test (E.U.T.).....	3
2.1 Identification of E.U.T.	3
2.3 Identification of Wireless LAN Module	4
SECTION 3 : Test standard information.....	5
3.1 Requirements for compliance testing defined by the FCC	5
3.2 Exposure limit	6
SECTION 4 : Test result	7
4.1 Result of Max. SAR value.....	7
4.2 Test Location	7
SECTION 5 : Operation of E.U.T. during testing.....	8
5.1 Operating modes.....	8
5.2 Measurement procedure	9
5.3 Test setup of EUT.....	10
SECTION 6 : Test surrounding.....	11
6.1 Measurement uncertainty.....	11
SECTION 7 : Confirmation before testing	12
7.1 Conducted power	12
7.2 Power drift measurement	13
SECTION 8 : Measurement results.....	14
8.1 Body SAR 2450MHz.....	14
8.2 Reference Head SAR 2450MHz	16
APPENDIX 1 : Photographs of test setup.....	18
APPENDIX 2 : Test instruments.....	29
Equipment & calibration information	30
1. Equipment used.....	30
2. Dosimetry assessment setup.....	31
3. Configuration and peripherals.....	32
4. System components	33
5. Test system specifications.....	35
6. Simulated Tissues Composition of 2450MHz.....	36
7. Validation Measurement.....	36
8. System validation data	38
9. Validation uncertainty.....	39
10. Validation Measurement data	40
11. System Validation Dipole (D2450V2,S/N: 765).....	43
12. Dosimetric E-Field Probe Calibration (EX3DV3,S/N: 3507).....	52
13. References.....	62
APPENDIX 3 : SAR Measurement data.....	63
1. Evaluation procedure	64
2. Measurement data (Body SAR 2450MHz)	65
3. Measurement data (Reference Head 2450 MHz).....	73

SECTION 1 : Client information

Company Name	Nikon Corporation
Brand name	Nikon
Address	6-3, Nishi-ohi 1-chome, Shinagawa-ku, Tokyo 140-8601, Japan
Telephone Number	+81-3-3773-8395
Facsimile Number	+81-3-3773-8112
Contact Person	Kenji Ishizuki

SECTION 2 : Equipment under test (E.U.T.)

2.1 Identification of E.U.T.

Type of Equipment	Digital Camera
Model No.	COOLPIX S6
Serial No.	88C11031
Country of Manufacture	Japan
AC Adapter	Model Name : EH-64 Rating(output) : DC4.8V/1.5A
Battery	Type : Li-ion Battery Model Name : EN-EL8 Rating : DC3.7V/730mAh Manufacturer : Nikon
Accessories	N/A
Size of EUT	About 102(W)*60(H)*20(D) mm
Condition of EUT	Production model
Operation Clock	48MHz
Receipt Date of Sample	November 07,2005
Category Identified	Portable device

2.3 Identification of Wireless LAN Module

2.3.1 Product Description

Radio Specification

Wireless LAN Module (IEEE802.11b/g)

Equipment Type	Transceiver
Frequency of Operation	2412-2462 MHz
Max.Peak power tested	17.99dBm (62.95mW)
Type of Modulation	DSSS,OFDM
Mode of Operation	Duplex
Method of frequency generation	Crystal
Power Supply	DC3.2V±0.2V

Antenna

Antenna type	Chip antenna
Antenna Gain	2.14dBi
Antenna location	Refer to Appendix 1

SECTION 3 : Test standard information

3.1 Requirements for compliance testing defined by the FCC

The US Federal Communications Commission has released the report and order "Guidelines for Evaluating the Environmental Effects of RF Radiation", ET Docket No. 93-62 in August 1996. The order requires routine SAR evaluation prior to equipment authorization of portable transmitter devices, including portable telephones. For consumer products, the applicable limit is 1.6 mW/g for an uncontrolled environment and 8.0 mW/g for an occupational/controlled environment as recommended by the ANSI/IEEE standard C95.1-1992. According to the Supplement C of OET Bulletin 65 "Evaluating Compliance with FCC Guide-lines for Human Exposure to Radio frequency Electromagnetic Fields", released on Jun 29, 2001 by the FCC, the device should be evaluated at maximum output power (radiated from the antenna) under "worst-case" conditions for normal or intended use, incorporating normal antenna operating positions, device peak performance frequencies and positions for maximum RF energy coupling.

1 Specific Absorption Rate (SAR) is a measure of the rate of energy absorption due to exposure to an RF transmitting source (wireless portable device).

2 IEEE/ANSI Std. C95.1-1992 limits are used to determine compliance with FCC ET Docket 93-62.

3.2 Exposure limit

(A) Limits for Occupational/Controlled Exposure (W/kg)

Spatial Average (averaged over the whole body)	Spatial Peak (averaged over any 1g of tissue)	Spatial Peak (hands/wrists/feet/ankles averaged over 10g)
0.4	8.0	20.0

(B) Limits for General population/Uncontrolled Exposure (W/kg)

Spatial Average (averaged over the whole body)	Spatial Peak (averaged over any 1g of tissue)	Spatial Peak (hands/wrists/feet/ankles averaged over 10g)
0.08	1.6	4.0

Occupational/Controlled Environments: are defined as locations where there is exposure that may be incurred by people who are aware of the potential for exposure, (i.e. as a result of employment or occupation).

General Population/Uncontrolled Environments: are defined as locations where there is the exposure of individuals who have no knowledge or control of their exposure.

**NOTE:GENERAL POPULATION/UNCONTROLLED EXPOSURE
SPATIAL PEAK(averaged over any 1g of tissue) LIMIT
1.6 W/kg**

SECTION 4 : Test result

4.1 Result of Max. SAR value

Max. SAR Measured (IEEE 802.11b) : 0.094 W/kg (Body, 2412MHz)

4.2 Test Location

UL Apex Co., Ltd. Head Office EMC Lab.
4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN
Telephone : +81 596 24 8116
Facsimile : +81 596 24 8124

SECTION 5 : Operation of E.U.T. during testing

5.1 Operating modes

Operating mode IEEE 802.11b mode	The frequency band and the modulation used in this test are shown as a following. 1. IEEE 802.11b mode Frequency band : 2412-2462MHz Channel : 1ch(2412MHz), 6ch(2437MHz), 11ch(2462MHz) Modulation : DSSS (DBPSK,DQPSK,CCK) Crest factor : 1
Operating mode IEEE 802.11g mode	2. IEEE802.11g mode Tx Frequency : 2412 – 2462MHz Channel : 1ch(2412MHz),6ch(2437MHz),11ch(2462MHz) Modulation : OFDM [BPSK , QPSK, 16QAM, 64QAM] Crest factor : 1

5.2 Measurement procedure

5.2.1 Methode of measurement

1. IEEE 802.11b

The 11b (DSSS) mode test was performed on the CCK[11Mbps] modulation, because it was the highest peak power and data rate.

Step1. The searching of the worst position.

Step2. The changing to the Low and High channels.

This test was performed at the worst conditions of Step1.

2. IEEE 802.11g

Step1. The data rate in the higher peak power of each modulation was decided, then the worst modulation was searched in the SAR testing.

Step2. The searching of the worst position.

This test was performed at the worst modulation of Step1.

Step3. The changing to the Low and High channels.

This test was performed at the worst conditions of Step1.and Step2

5.2.2 Distance between EUT and SAM Twin Phantom

The measurement was performed with the distance,5mm,10mm and 15mm to check if the shortest distance (0mm) may not have the worst value at the conditions of the highest SAR value. As a result, the shortest distance (0mm) had the worst value.

5.2.3 About Head SAR measurement

Head SAR measurement is only for reference.

Because the user bring EUT close at the face, Head SAR measurement was done.

5.3 Test setup of EUT

When users operate or carry the EUT, it could be considered to touch or get close to their bodies. In order to assume this situation, we performed the test at the following positions. Please refer to "APPENDIX 1" for more details.

(1) Front:

The test was performed in touch with Front surface of the EUT to the flat section of SAM Twin phantom.

(2) Back :

The test was performed in touch with Back of the EUT to the flat section of SAM Twin phantom.

(3) Top :

The test was performed in touch with Top surface of the EUT to the flat section of SAM Twin phantom.

(4) Bottom :

The test was performed in touch with Bottom surface of the EUT to the flat section of SAM Twin phantom.

(5) Left Side :

The test was performed in touch with Left Side surface of the EUT to the flat section of SAM Twin phantom.

(6) Right Side :

The test was performed in touch with Right Side surface of the EUT to the flat section of SAM Twin phantom.

(7) Left Side (5mm) :

The measurement opened 5mm distance between EUT and SAM Twin Phantom.

(8) Left Side (10mm) :

The measurement opened 10mm distance between EUT and SAM Twin Phantom.

(9) Left Side (15mm) :

The measurement opened 15mm distance between EUT and SAM Twin Phantom.

*The test setup photograph is put on appendix 1.

SECTION 6 : Test surrounding

6.1 Measurement uncertainty

The uncertainty budget has been determined for the DASY4 measurement system according to the SPEAG documents[6][7] and is given in the following Table.

Error Description	Uncertainty value $\pm$ %	Probability distribution	divisor	(ci) 1g	Standard Uncertainty (1g)	vi or veff
Measurement System						
Probe calibration	± 6.8	Normal	1	1	± 6.8	∞
Axial isotropy of the probe	± 4.7	Rectangular	$\sqrt{3}$	$(1-c_p)^{1/2}$	± 1.9	∞
Spherical isotropy of the probe	± 9.6	Rectangular	$\sqrt{3}$	$(c_p)^{1/2}$	± 3.9	∞
Boundary effects	± 2.0	Rectangular	$\sqrt{3}$	1	± 1.2	∞
Probe linearity	± 4.7	Rectangular	$\sqrt{3}$	1	± 2.7	∞
Detection limit	± 1.0	Rectangular	$\sqrt{3}$	1	± 0.6	∞
Readout electronics	± 0.3	Normal	1	1	± 0.3	∞
Response time	± 0.8	Rectangular	$\sqrt{3}$	1	± 0.5	∞
Integration time	± 2.6	Rectangular	$\sqrt{3}$	1	± 1.5	∞
RF ambient Noise	± 3.0	Rectangular	$\sqrt{3}$	1	± 1.7	∞
RF ambient Reflections	± 3.0	Rectangular	$\sqrt{3}$	1	± 1.7	∞
Probe Positioner	± 0.8	Rectangular	$\sqrt{3}$	1	± 0.5	∞
Probe positioning	± 9.9	Rectangular	$\sqrt{3}$	1	± 5.7	∞
Max.SAR Eval.	± 4.0	Rectangular	$\sqrt{3}$	1	± 2.3	∞
Test Sample Related						
Device positioning	± 2.9	Normal	1	1	± 2.9	43
Device holder uncertainty	± 3.6	Normal	1	1	± 3.6	8
Power drift	± 10.0	Rectangular	$\sqrt{3}$	1	± 5.8	∞
Phantom and Setup						
Phantom uncertainty	± 4.0	Rectangular	$\sqrt{3}$	1	± 2.3	∞
Liquid conductivity (target)	± 5.0	Rectangular	$\sqrt{3}$	0.64	± 1.8	∞
Liquid conductivity (meas.)	± 5.0	Rectangular	1	0.64	± 3.2	∞
Liquid permittivity (target)	± 5.0	Rectangular	$\sqrt{3}$	0.6	± 1.7	∞
Liquid permittivity (meas.)	± 5.0	Rectangular	1	0.6	± 3.0	∞
Combined Standard Uncertainty					± 14.360	
Expanded Uncertainty (k=2)					± 28.7	

The test result shows that the power drift exceeded $\pm 5\%$. Therefore, the uncertainty of power drift expanded to $\pm 10\%$. However, the extended uncertainty ($k=2$) of a test is less than 30%.

SECTION 7 : Confirmation before testing

7.1 Conducted power

[IEEE802.11b: 11Mbps]						
Ch	Freq. [MHz]	S/A Reading [dBm]	Cable Loss [dB]	Atten. [dB]	Result [dBm]	Converted [mW]
1	2412	4.11	2.78	10.00	16.89	48.87
6	2437	4.06	2.78	10.00	16.84	48.31
11	2462	3.79	2.78	10.00	16.57	45.39

[IEEE802.11g: 54Mbps]						
Ch	Freq. [MHz]	S/A Reading [dBm]	Cable Loss [dB]	Atten. [dB]	Result [dBm]	Converted [mW]
1	2412	5.21	2.78	10.00	17.99	62.95
6	2437	5.20	2.78	10.00	17.98	62.81
11	2462	4.86	2.78	10.00	17.64	58.08

The worst rate in the SAR teting

[IEEE802.11g: 12Mbps]						
Ch	Freq. [MHz]	S/A Reading [dBm]	Cable Loss [dB]	Atten. [dB]	Result [dBm]	Converted [mW]
1	2412	5.12	2.78	10.00	17.90	61.66
6	2437	5.16	2.78	10.00	17.94	62.23
11	2462	3.12	2.78	10.00	15.90	38.90

Change for data rate

[IEEE802.11b : 2437MHz]						
Ch	Modulation (Data rate [bps])	S/A Reading [dBm]	Cable Loss [dB]	Atten. [dB]	Result [dBm]	Converted [mW]
6	DBPSK (1Mbps)	0.94	2.78	10.00	13.72	23.55
6	DQPSK(2Mbps)	0.62	2.78	10.00	13.40	21.88
6	CCK(5.5Mbps)	2.90	2.78	10.00	15.68	36.98
6	CCK(11Mbps)	4.06	2.78	10.00	16.84	48.31

Change for data rate

[IEEE802.11g : 2437MHz]						
Ch	Modulation (Data rate [bps])	S/A Reading [dBm]	Cable Loss [dB]	Atten. [dB]	Result [dBm]	Converted [mW]
6	BPSK (6Mbps)	4.93	2.78	10.00	17.71	59.02
6	BPSK (9Mbps)	5.14	2.78	10.00	17.92	61.94
6	QPSK(12Mbps)	5.16	2.78	10.00	17.94	62.23
6	QPSK(18Mbps)	5.11	2.78	10.00	17.89	61.52
6	16QAM(24Mbps)	5.14	2.78	10.00	17.92	61.94
6	16QAM(36Mbps)	5.16	2.78	10.00	17.94	62.23
6	64QAM(48Mbps)	5.17	2.78	10.00	17.95	62.37
6	64QAM(54Mbps)	5.20	2.78	10.00	17.98	62.81

Sample Calculation:

Result = Reading + Cable Loss (supplied by customer)+ Attenuator

UL Apex Co., Ltd.

Head Office EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone: +81 596 24 8116

Facsimile: +81 596 24 8124

7.2 Power drift measurement

The power drift was not within $\pm 5\%$ on SAR re-testing with full-charged battery.

Therefore the conducted power was measured in elapsed time.


The average power was measured under the condition of Max. power of IEEE802.11b.

As a result, power changed by -9.8% . The result is shown in the following.

So the uncertainty of power drift was expanded to $\pm 10\%$.

2412 MHz(IEEE 802.11g) Average power

Time [Minutes]	Result [dBm]	Converted [mW]	Diviation [%]
-	14.25	26.607	-
After 5	14.05	25.410	-4.5
After10	13.98	25.003	-6.0
After20	13.87	24.378	-8.4
After30	13.80	23.988	-9.8

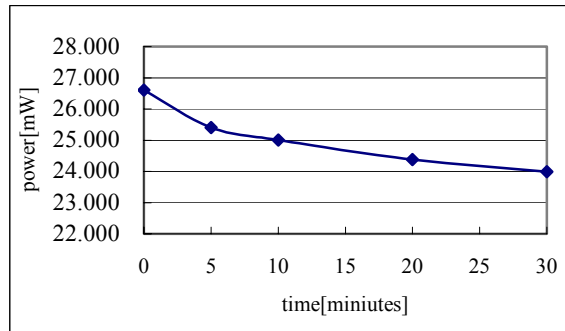

SECTION 8 : Measurement results

8.1 Body SAR 2450MHz

Liquid Depth (cm) : 15.0 Model : COOLPIX S6
Parameters : $\epsilon_r = 50.1$, $\sigma = 1.96$ Serial No. : 88C11031
Ambient temperature (deg.c.) : 25.0 Modulation : DSSS
Relative Humidity (%) : 35 Crest factor : 1
Date : November 09,2005 Measured By : Miyo Ikuta

BODY SAR MEASUREMENT RESULTS									
Frequency			Modulation	Phantom Section	EUT Set-up Conditions		Liquid Temp.[deg.c]		SAR(1g) [W/kg]
Band	Channel	[MHz]			Position	Separation [mm]	Before	After	value of multi-peak
11b	Position Search								
	Mid	2437	CCK(11Mbps)	Flat	Front	0	24.5	24.5	0.040
	Mid	2437	CCK(11Mbps)	Flat	Back	0	24.4	24.2	0.029
	Mid	2437	CCK(11Mbps)	Flat	Top	0	24.2	24.0	0.031
	Mid	2437	CCK(11Mbps)	Flat	Bottom	0	24.0	24.0	0.016
	Mid	2437	CCK(11Mbps)	Flat	Left Side	0	24.5	24.5	0.068
	Mid	2437	CCK(11Mbps)	Flat	Right Side	0	24.0	24.0	0.00345
	Frequency Change								
	Low	2412	CCK(11Mbps)	Flat	Left Side	0	24.0	24.0	0.094
	High	2462	CCK(11Mbps)	Flat	Left Side	0	24.0	24.0	0.061
ANSI / IEEE C95.1 1992 - SAFETY LIMIT								Body SAR: 1.6 W/kg	
Spatial Peak Uncontrolled Exposure / General Population								(averaged over 1 gram)	

Distance between EUT and SAM phantom

Liquid Depth (cm) : 15.0 Model : COOLPIX S6
Parameters : $\epsilon_r = 50.3$, $\sigma = 2.00$ Serial No. : 88C11031
Ambient temperature (deg.c.) : 24.8 Modulation : DSSS
Relative Humidity (%) : 44 Crest factor : 1
Date : November 10,2005 Measured By : Miyo Ikuta

BODY SAR MEASUREMENT RESULTS									
Frequency			Modulation (Data rate[bps])	Phantom Section	EUT Set-up Conditions		Liquid Temp.[deg.c]		SAR(1g) [W/kg]
Mode	Channel	[MHz]			Position	Separation [mm]	Before	After	Maximum value of multi-peak
Distance between EUT and SAM phantom									
11b	1	2412	CCK(11Mbps)	Flat	Left Side	5	24.0	24.0	0.046
	1	2412	CCK(11Mbps)	Flat	Left Side	10	24.0	24.0	0.012
	1	2412	CCK(11Mbps)	Flat	Left Side	15	24.0	24.0	0.00592
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure / General Population							Body SAR: 1.6 W/kg (averaged over 1 gram)		

UL Apex Co., Ltd.

Head Office EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone: +81 596 24 8116

Facsimile: +81 596 24 8124

Liquid Depth (cm) : **15.0** Model : **COOLPIX S6**
Parameters : $\epsilon_r = 50.3$, $\sigma = 2.00$ Serial No. : **88C11031**
Ambient temperature (deg.c.) : **24.8** Modulation : **OFDM**
Relative Humidity (%) : **44** Crest factor : **1**
Date : **November 10, 2005** Measured By : **Miyo Ikuta**

BODY SAR MEASUREMENT RESULTS									
Frequency			Modulation	Phantom Section	EUT Set-up Conditions		Liquid Temp.[deg.c]		SAR(1g) [W/kg]
Band	Channel	[MHz]			Position	Separation [mm]	Before	After	value of multi-peak
11g	Modulation Search								
	Mid	2437	BPSK(9Mbps)	Flat	Left side	0	23.5	23.5	0.070
	Mid	2437	QPSK(12Mbps)	Flat	Left side	0	23.5	23.5	0.079
	Mid	2437	16QAM(36Mbps)	Flat	Left side	0	23.5	23.5	0.078
	Mid	2437	64QAM(54Mbps)	Flat	Left side	0	23.5	23.5	0.071
	Position search								
	Mid	2437	QPSK(12Mbps)	Flat	Front	0	23.6	23.6	0.026
	Mid	2437	QPSK(12Mbps)	Flat	Back	0	23.6	23.7	0.022
	Mid	2437	QPSK(12Mbps)	Flat	Top	0	24.0	24.0	0.025
	Mid	2437	QPSK(12Mbps)	Flat	Bottom	0	24.0	24.0	0.010
	Mid	2437	QPSK(12Mbps)	Flat	Right side	0	24.0	24.0	0.000122
	Frequency Change								
	Low	2412	QPSK(12Mbps)	Flat	Left side	0	24.0	24.0	0.075
	High	2462	QPSK(12Mbps)	Flat	Left side	0	24.0	24.0	0.053
ANSI / IEEE C95.1 1992 - SAFETY LIMIT								Body SAR: 1.6 W/kg	
Spatial Peak Uncontrolled Exposure / General Population								(averaged over 1 gram)	

* The measurement data is put on appendix 3.

8.2 Reference Head SAR 2450MHz

Liquid Depth (cm) : 15.0 Model : COOLPIX S6
Parameters : $\epsilon_r = 38.5$, $\sigma = 1.86$ Serial No. : 88C11031
Ambient temperature (deg.c.) : 25.0 Modulation : DSSS
Relative Humidity (%) : 35 Crest factor : 1
Date : November 08,2005 Measured By : Miyo Ikuta

HEAD SAR MEASUREMENT RESULTS									
Frequency			Modulation	Phantom Section	EUT Set-up Conditions		Liquid Temp.[deg.c]		SAR(1g) [W/kg]
Band	Channel	[MHz]			Position	Separation [mm]	Before	After	value of multi-peak
11b	Position Search								
	Mid	2437	CCK(11Mbps)	Flat	Front	0	24.4	24.4	0.038
	Mid	2437	CCK(11Mbps)	Flat	Back	0	24.5	24.5	0.030
	Mid	2437	CCK(11Mbps)	Flat	Top	0	24.5	24.5	0.024
	Mid	2437	CCK(11Mbps)	Flat	Bottom	0	24.5	24.4	0.00513
	Mid	2437	CCK(11Mbps)	Flat	Left Side	0	24.5	24.5	0.071
	Mid	2437	CCK(11Mbps)	Flat	Right Side	0	24.4	24.4	0.00191
	Frequency Change								
	Low	2412	CCK(11Mbps)	Flat	Left Side	0	24.5	24.5	0.088
	High	2462	CCK(11Mbps)	Flat	Left Side	0	24.5	24.5	0.055
ANSI / IEEE C95.1 1992 - SAFETY LIMIT								Head SAR: 1.6 W/kg	
Spatial Peak Uncontrolled Exposure / General Population								(averaged over 1 gram)	

Distance between EUT and SAM phantom

Liquid Depth (cm) : 15.0 Model : COOLPIX S6
Parameters : $\epsilon_r = 37.6$, $\sigma = 1.88$ Serial No. : 88C11031
Ambient temperature (deg.c.) : 25.0 Modulation : DSSS
Relative Humidity (%) : 39 Crest factor : 1
Date : November 09,2005 Measured By : Miyo Ikuta

HEAD SAR MEASUREMENT RESULTS									
Frequency			Modulation (Data rate[bps])	Phantom Section	EUT Set-up Conditions		Liquid Temp.[deg.c]		SAR(1g) [W/kg]
Mode	Channel	[MHz]			Position	Separation [mm]	Before	After	Maximum value of multi-peak
Distance between EUT and SAM phantom									
11b	1	2412	CCK(11Mbps)	Flat	Left Side	5	23.9	23.9	0.033
	1	2412	CCK(11Mbps)	Flat	Left Side	10	23.9	23.9	0.0089
	1	2412	CCK(11Mbps)	Flat	Left Side	15	23.9	23.9	0.00566
ANSI / IEEE C95.1 1992 - SAFETY LIMIT							Head SAR: 1.6 W/kg		
Spatial Peak Uncontrolled Exposure / General Population							(averaged over 1 gram)		


Liquid Depth (cm) : **15.0** Model : **COOLPIX S6**
Parameters : $\epsilon_r = 37.6$, $\sigma = 1.88$ Serial No. : **88C11031**
Ambient temperature (deg.c.) : **25.0** Modulation : **OFDM**
Relative Humidity (%) : **39** Crest factor : **1**
Date : **November 09,2005** Measured By : **Miyo Ikuta**

HEAD SAR MEASUREMENT RESULTS									
Frequency			Modulation	Phantom Section	EUT Set-up Conditions		Liquid Temp.[deg.c]		SAR(1g) [W/kg]
Band	Channel	[MHz]			Position	Separation [mm]	Before	After	value of multi-peak
11g	Modulation Search								
	Mid	2437	BPSK(9Mbps)	Flat	Left side	0	24.3	24.3	0.071
	Mid	2437	QPSK(12Mbps)	Flat	Left side	0	24.3	24.3	0.080
	Mid	2437	16QAM(36Mbps)	Flat	Left side	0	24.3	24.3	0.077
	Mid	2437	64QAM(54Mbps)	Flat	Left side	0	24.0	24.0	0.077
	Position search								
	Mid	2437	QPSK(12Mbps)	Flat	Front	0	24.0	24.0	0.030
	Mid	2437	QPSK(12Mbps)	Flat	Back	0	24.0	24.0	0.023
	Mid	2437	QPSK(12Mbps)	Flat	Top	0	24.0	24.0	0.026
	Mid	2437	QPSK(12Mbps)	Flat	Bottom	0	24.0	24.0	0.012
	Mid	2437	QPSK(12Mbps)	Flat	Right side	0	23.9	23.9	0.000144
	Frequency Change								
	Low	2412	QPSK(12Mbps)	Flat	Left side	0	23.9	23.9	0.074
	High	2462	QPSK(12Mbps)	Flat	Left side	0	23.9	23.9	0.052
ANSI / IEEE C95.1 1992 - SAFETY LIMIT								Head SAR: 1.6 W/kg	
Spatial Peak Uncontrolled Exposure / General Population								(averaged over 1 gram)	

* The measurement data is put on appendix 3.

APPENDIX 1 : Photographs of test setup

Photograph EUT

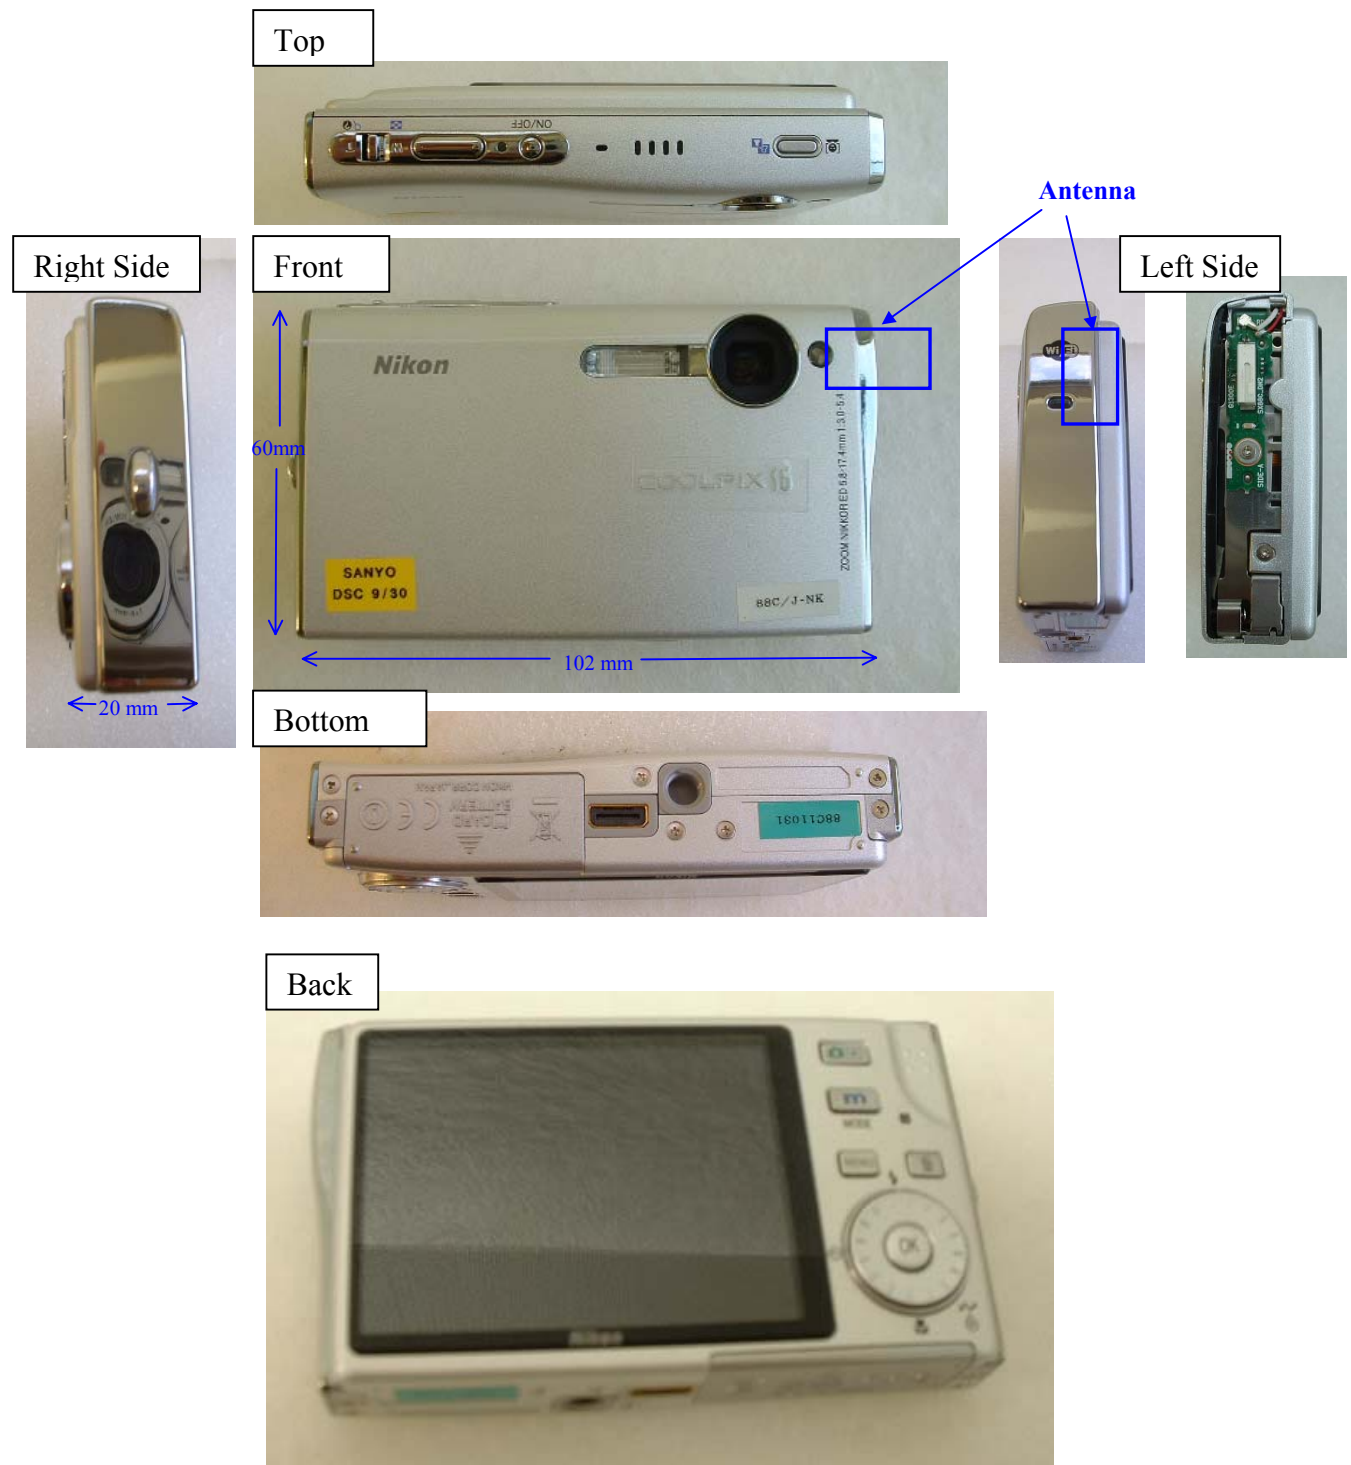

(1) Front



(2) Back




(3) Top



(4) Bottom




(5) Left Side

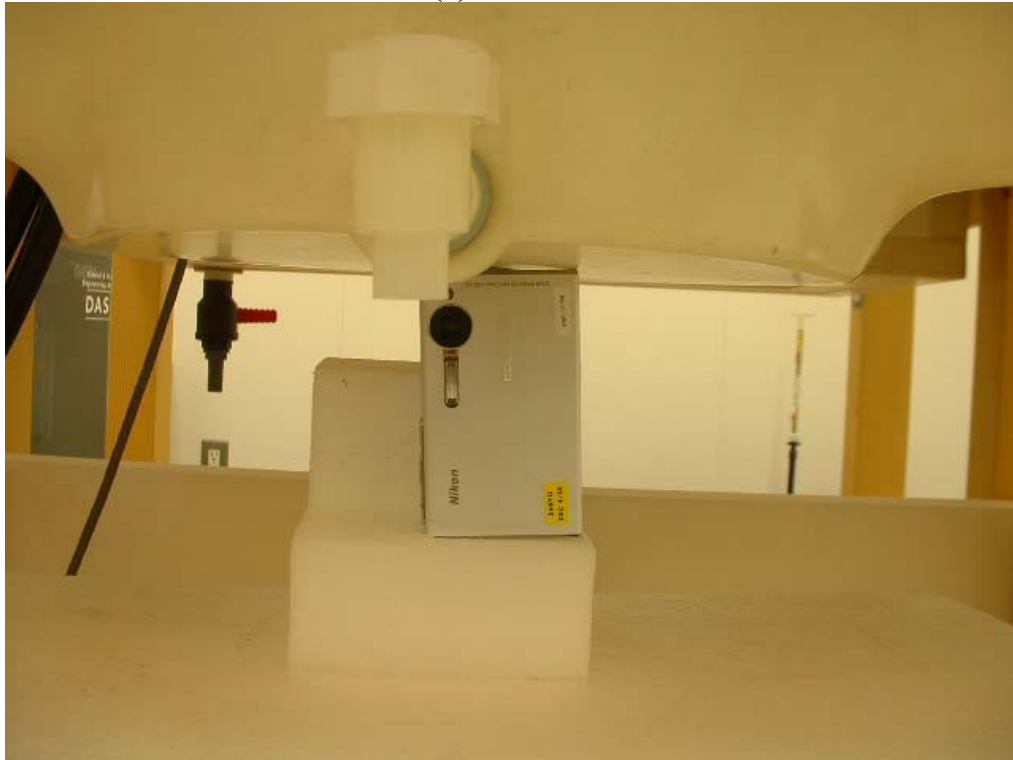


(6) Right side




(7) Left Front (5mm)

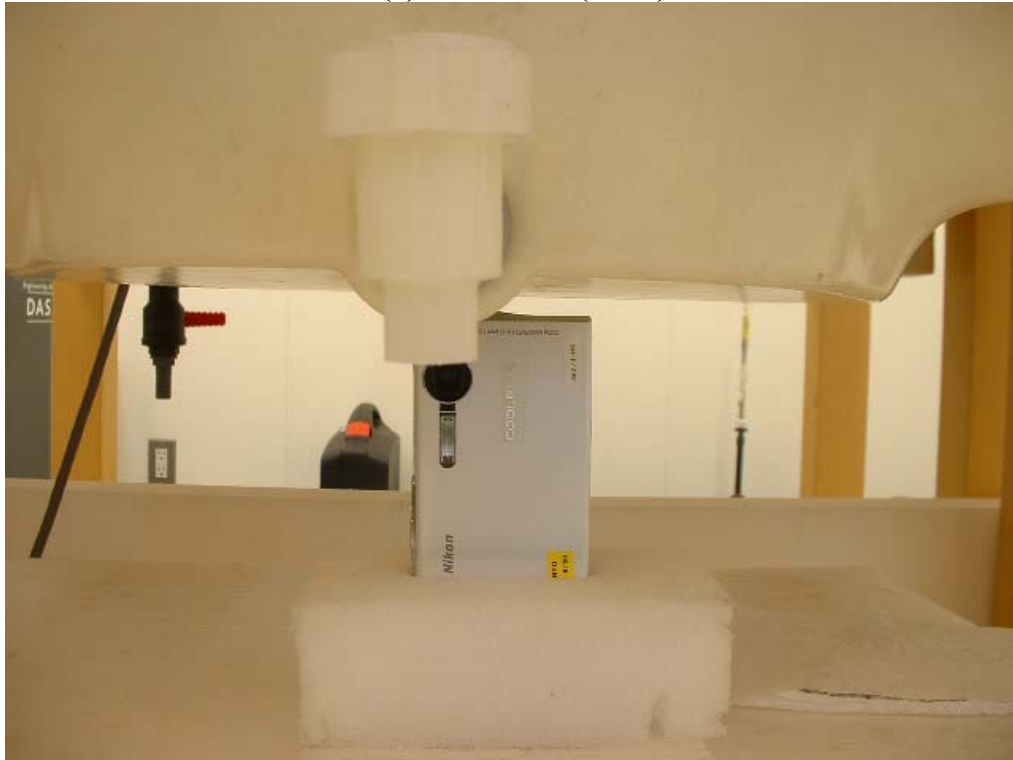

(8) Left Front (10mm)

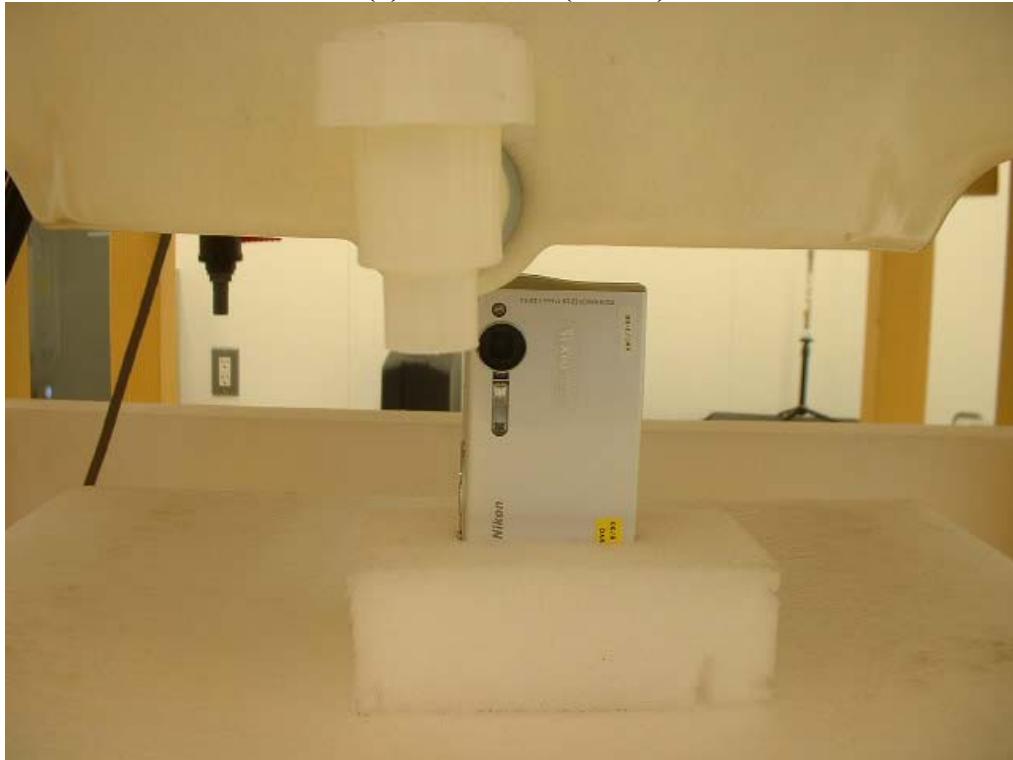

8) Left Front (15mm)

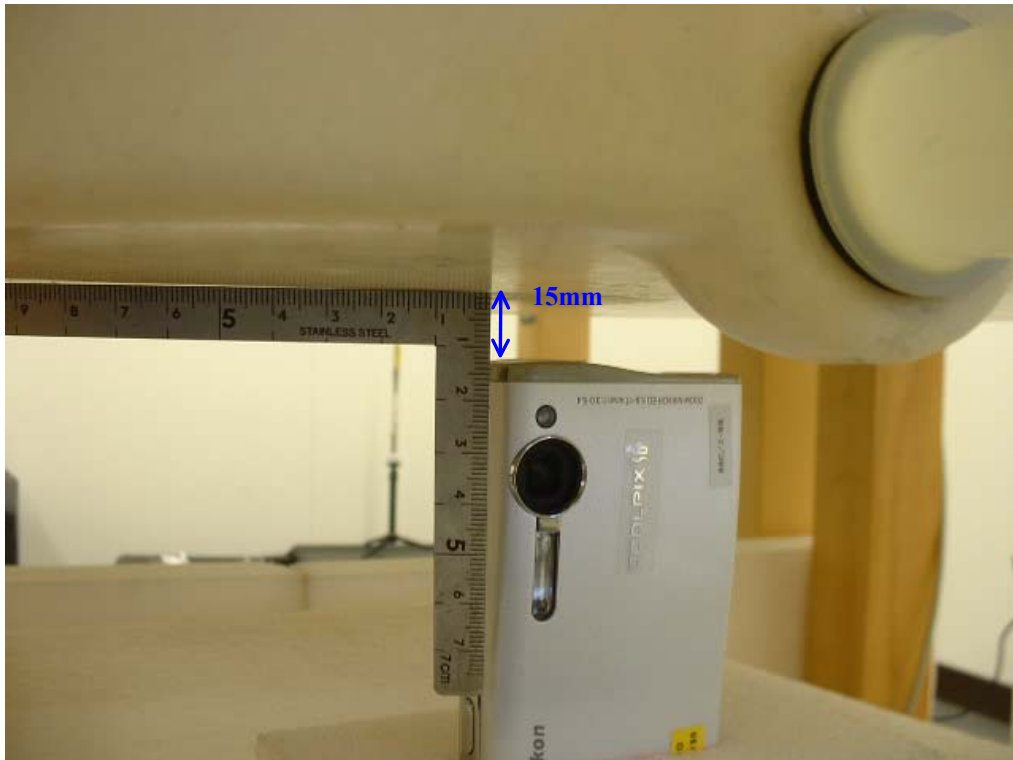

APPENDIX 2 : Test instruments

Equipment & calibration information

1. Equipment used

Name of Equipment	Manufacture	Model number	Serial number	Calibration	
				Last Cal	due date
Power Meter	Agilent	E4416A	GB41290974	2005/03/16	2006/03/15
Power Sensor	Agilent	E9327A	US40440545	2005/03/29	2006/03/28
Spectrum Analyzer	Agilent	E4448A	US44300523	2005/05/19	2006/05/18
S-Parameter Network Analyzer	Agilent	8753ES	US39174808	2003/10/23	2006/10/22
Signal Generator	Rohde&Schwarz	SML40	100023	2005/01/05	2006/01/04
RF Amplifier	OPHIR	5056F	1005	2005/05/20	2006/05/19
Dosimetric E-Field Probe	Schmid&Partner Engineering AG	EX3DV3	3507	2005/04/12	2006/04/11
Data Acquisition Electronics	Schmid&Partner Engineering AG	DAE3	516	2005/03/10	2006/03/09
Robot,SAM Phantom	Schmid&Partner Engineering AG	DASY4	1021834	N/A	N/A
Attenuator(10dB)(above1 GHz)	Orient Microwave	BX10-0476-00	-	2005/03/16	2006/03/15
Microwave Cable 1G-50GHz	Storm	421-011(90-1394-079)	01-12-002	2005/01/05	2006/01/04
2450MHz System Validation Dipole	Schmid&Partner Engineering AG	D2450V2	765	2004/11/15	2006/11/14
Dual Directional Coupler	N/A	Narda	03702	N/A	N/A
Head 2450MHz	N/A	N/A	N/A	N/A	N/A
Body 2450MHz	N/A	N/A	N/A	N/A	N/A
Ambient Noise <0.012W/kg	SAR room	-	-	2005/11/08,09 and 10	-

UL Apex Co., Ltd.

Head Office EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN


Telephone: +81 596 24 8116

Facsimile: +81 596 24 8124

2. Dosimetry assessment setup

These measurements were performed with the automated near-field scanning system DASY4 from Schmid & Partner Engineering AG (SPEAG). The system is based on a high precision robot (working range greater than 0.9 m), which positions the probes with a positional repeatability of better than ± 0.02 mm. Special E- and H-field probes have been developed for measurements close to material discontinuity, the sensors of which are directly loaded with a Schottky diode and connected via highly resistive lines to the data acquisition unit. The SAR measurements were conducted with the dosimetry probe ET3DV6, SN: 1684 (manufactured by SPEAG), designed in the classical triangular configuration and optimized for dosimetric evaluation. The probe has been calibrated according to the procedure described in [2] with accuracy of better than $\pm 10\%$. The spherical isotropy was evaluated with the procedure described in [3] and found to be better than ± 0.25 dB. The phantom used was the SAM Twin Phantom as described in FCC supplement C, IEEE P1528 and CENELEC EN50361.

3. Configuration and peripherals

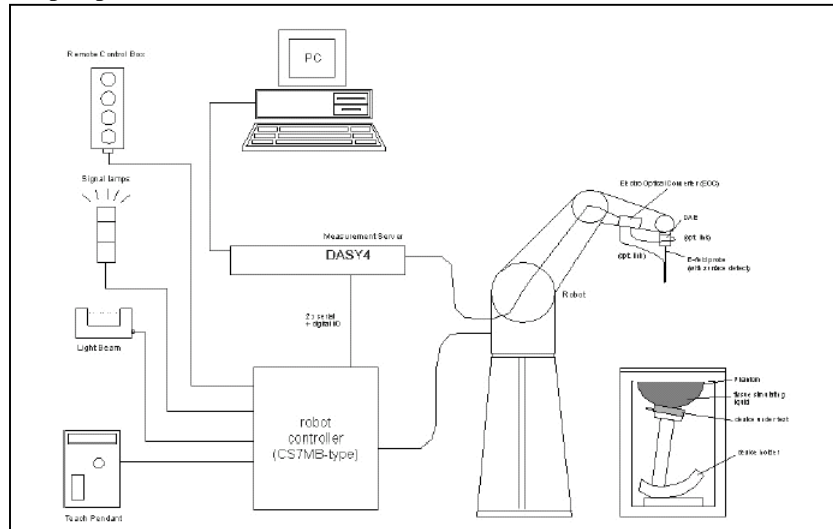

The DASY4 system for performing compliance tests consist of the following items:

1. A standard high precision 6-axis robot (Stäubli RX family) with controller and software.
An arm extension for accommodating the data acquisition electronics (DAE).
2. A dosimetric probe, i.e., an isotropic E-field probe optimized and calibrated for usage in tissue simulating liquid. The probe is equipped with an optical surface detector system.
3. A data acquisition electronic (DAE), which performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. The unit is battery powered with standard or rechargeable batteries. The signal is optically transmitted to the EOC.
4. The Electro-optical converter (EOC) performs the conversion between optical and electrical of the signals for the digital communication to the DAE and for the analog signal from the optical surface detection.
The EOC is connected to the measurement server.
5. The function of the measurement server is to perform the time critical tasks such as signal filtering, control of the robot operation and fast movement interrupts.
6. A probe alignment unit which improves the (absolute) accuracy of the probe positioning.
7. A computer operating Windows 2000.
8. DASY4 software.
9. Remote control with teaches pendant and additional circuitry for robot safety such as warning lamps, etc.
10. The SAM twin phantom enabling testing left-hand and right-hand usage.
11. The device holder for handheld mobile phones.
12. Tissue simulating liquid mixed according to the given recipes.
13. Validation dipole kits allowing to validate the proper functioning of the system.

UL Apex Co., Ltd.

Head Office EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone: +81 596 24 8116

Facsimile: +81 596 24 8124

4. System components

4.2.1 EX3DV4 Probe Specification

Construction:

Symmetrical design with triangular core
Built-in shielding against static charges
PEEK enclosure material (resistant to organic solvents, e.g., glycol ether)

Calibration:

Basic Broad Band Calibration in air : 10-3000 MHz
Conversion Factors(Head and Body):900 MHz, 1.8 GHz ,2.45GHz, 5.2GHz and 5.8GHz

Frequency:

10 MHz to > 6GHz; Linearity: +/-0.2 dB(30 MHz to 3 GHz)

Directivity:

+/-0.3 dB in HSL (rotation around probe axis)
+/-0.5 dB in tissue material (rotation normal probe axis)

Dynamic Range:


10uW/g to > 100 mW/g;Linearity: +/-0.2 dB(noise: typically < 1uW/g)

Dimensions:

Overall length: 330 mm (Tip: 20 mm)
Tip diameter: 2.5mm (Body: 12 mm)
Typical distance from probe tip to dipole centers: 1 mm

Application:

Highprecision dosimetric measurement in any exposure scenario
(e.g., very strong gradient fields).Only probe which enables compliance
testing for frequencies up to 6GHz with precision of better 30%.

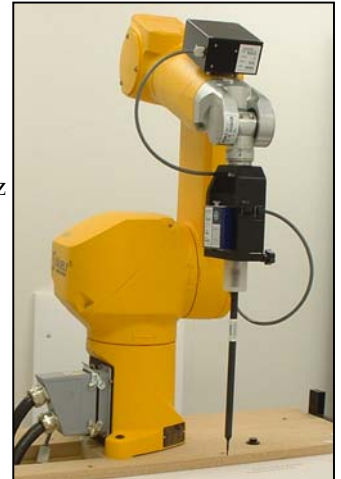

EX3DV4 E-field Probe

SAM Twin Phantom

Construction:

The shell corresponds to the specifications of the Specific Anthropomorphic Mannequin (SAM) phantom defined in IEEE 1528-200X, CENELEC EN 50361 and IEC 62209. It enables the dosimetric evaluation of left and right hand phone usage as well as body mounted usage at the flat phantom region. A cover prevents evaporation of the liquid. Reference markings on the phantom allow the complete setup of all predefined phantom positions and measurement grids by manually teaching three points with the robot.

Shell Thickness:


2 +/-0.2 mm

Filling Volume:

Approx. 25 liters

Dimensions:

(H x L x W): 810 x 1000 x 500 mm

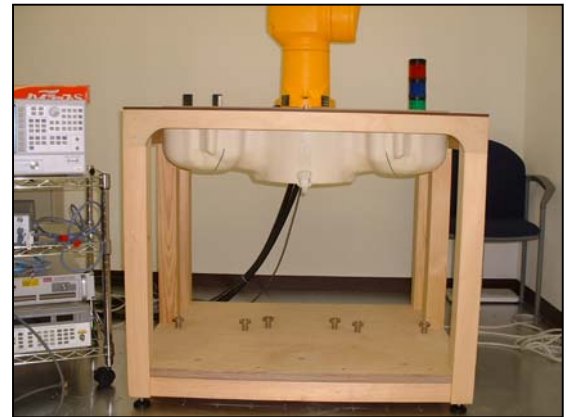

SAM Twin Phantom

Device Holder for Transmitters

In combination with the SAM Twin Phantom V4.0, the Mounting Device enables the rotation of the mounted transmitter in spherical coordinates whereby the rotation points is the ear opening. The devices can be easily, accurately, and repeatedly positioned according to the FCC and CENELEC specifications. The device holder can be locked at different phantom locations (left head, right head, flat phantom).

* Note: A simulating human hand is not used due to the complex anatomical and geometrical structure of the hand that may produced infinite number of configurations.

To produce the worst-case condition (the hand absorbs antenna output power), the hand is omitted during the tests.



Device Holder

Device holder couldn't be used at this SAR measurement.

5. Test system specifications

Robot RX60L

Number of Axes	:	6
Payload	:	1.6 kg
Reach	:	800mm
Repeatability	:	+/-0.025mm
Control Unit	:	CS7M
Programming Language	:	V+
Manuafacture	:	Stäubli Unimation Corp. Robot Model: RX60

DASY4 Measurement server

Features	:	166MHz low power Pentium MMX 32MB chipdisk and 64MB RAM Serial link to DAE (with watchdog supervision) 16 Bit A/D converter for surface detection system Two serial links to robot (one for real-time communication which is supervised by watchdog) Ethernet link to PC (with watchdog supervision) Emergency stop relay for robot safety chainTwo expansion slots for future applications
Manufacture	:	Schimid & Partner Engineering AG

Data Acquisition Electronic (DAE)

Features	:	Signal amplifier, multiplexer, A/D converter and control logic Serial optical link for communication with DASY4 embedded system (fully remote controlled) 2 step probe touch detector for mechanical surface detection and emergency robot stop (not in -R version)
Measurement Range	:	1 μ V to > 200 mV (16 bit resolution and two range settings: 4mV, 400mV)
Input Offset voltage	:	< 1 μ V (with auto zero)
Input Resistance	:	200 M Ω
Battery Power	:	> 10 h of operation (with two 9 V battery)
Dimension	:	60 x 60 x 68 mm
Manufacture	:	Schimid & Partner Engineering AG

Software

Item	:	Dosimetric Assesment System DASY4
Type No.	:	SD 000 401A, SD 000 402A
Software version No.	:	4.5
Manufacture / Origin	:	Schimid & Partner Engineering AG

E-Field Probe

Model	:	EX3DV3
Serial No.	:	3507
Construction	:	Symmetrical design with triangular core
Frequency	:	10 MHz to 6 GHz
Linearity	:	+/-0.2 dB (30 MHz to 3 GHz)
Manufacture	:	Schimid & Partner Engineering AG

Phantom

Type	:	SAM Twin Phantom V4.0
Shell Material	:	Fiberglass
Thickness	:	2.0 +/-0.2 mm
Volume	:	Approx. 25 liters
Manufacture	:	Schimid & Partner Engineering AG

UL Apex Co., Ltd.

Head Office EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone: +81 596 24 8116

Facsimile: +81 596 24 8124

6. Simulated Tissues Composition of 2450MHz

Ingredient	MIXTURE(%)	
	Head 2450MHz	Muscle 2450MHz
Water	45.0	69.83
DGMBE	55.0	30.2

Note:DGMBE(Diethylenglycol-monobuthyl ether)

7. Validation Measurement

Simulated tissue liquid parameter

7-a Simulated Tissue Liquid Parameter confirmation

The dielectric parameters were checked prior to assessment using the HP85070D dielectric probe kit.
The dielectric parameters measurement are reported in each correspondent section.

7-b Head 2450 MHz

Type of liquid : Head 2450 MHz
Ambient temperature (deg.c.) : 25.0(8-9Nov), 24.8(10-Nov)
Relative Humidity (%) : 35(8Nov), 39(9Nov), 44(10-Nov)
Liquid depth (cm) : 15.0

DIELECTRIC PARAMETERS MEASUREMENT RESULTS								
Date	Frequency	Liquid Temp [deg.c]		Parameters	Target Value	Measured	Deviation [%]	Limit [%]
		Before	After					
8-Nov	2450	24.0	24.0	Relative Permittivity ϵ_r	39.2	38.5	-1.8	+/-10
				Coductivity σ [mho/m]	1.80	1.86	3.3	+/-5
9-Nov	2450	23.5	23.5	Relative Permittivity ϵ_r	39.2	37.6	-4.1	+/-10
				Coductivity σ [mho/m]	1.80	1.88	4.4	+/-5
10-Nov	2450	24.8	24.8	Relative Permittivity ϵ_r	39.2	37.3	-4.8	+/-10
				Coductivity σ [mho/m]	1.80	1.82	1.1	+/-5

UL Apex Co., Ltd.

Head Office EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone: +81 596 24 8116

Facsimile: +81 596 24 8124

7-c Muscle 2450 MHz

Type of liquid : **Muscle 2450 MHz**
Ambient temperature (deg.c.) : **25.0(9Nov), 24.8(10-Nov)**
Relative Humidity (%) : **39(9Nov), 44(10-Nov)**
Liquid depth (cm) : **15.0**

DIELECTRIC PARAMETERS MEASUREMENT RESULTS								
Date	Frequency	Liquid Temp [deg.c]		Parameters	Target Value	Measured	Deviation [%]	Limit [%]
		Before	After					
9-Nov	2450	24.5	24.5	Relative Permittivity ϵ_r	52.7	50.1	-4.9	+/-5
				Coductivity σ [mho/m]	1.95	1.96	0.5	+/-5
10-Nov	2450	23.5	23.5	Relative Permittivity ϵ_r	52.7	50.3	-4.6	+/-5
				Coductivity σ [mho/m]	1.95	2.00	2.6	+/-5

8. System validation data


Prior to the assessment, the system validation kit was used to test whether the system was operating within its specifications of +/-10%. The validation results are in the table below. Please refer to APPENDIX3.

System validation of 2450MHz

Type of liquid : **HEAD 2450MHz**
Frequency : **2450MHz**
Ambient temperature (deg.c.) : **25.0(8-Nov), 24.8(10-Nov)**
Relative Humidity (%) : **35(8Nov), 39(9Nov), 44(10-Nov)**
Dipole : **D2450V2 SN:765**
Power : **250mW**

SYSTEM PERFORMANCE CHECK										
Date	Liquid (HEAD 2450MHz)						System dipole validation target & measured			
	Liquid Temp [deg.c.]		Relative Permittivity ϵ_r		Conductivity σ [mho/m]		SAR 1g [W/kg]		Deviation [%]	Limit [%]
	Before	After	Target	Measured	Target	Measured	Target	Measured		
8-Nov	24.0	24.0	39.2	38.5	1.80	1.86	13.1	13.5	3.1	+/-10
9-Nov	23.5	23.5	39.2	37.6	1.80	1.88	13.1	13.6	3.8	+/-10
10-Nov	24.8	24.9	39.2	37.4	1.80	1.82	13.1	14.1	7.6	+/-10

Note: Please refer to Attachment for the result representation in plot format

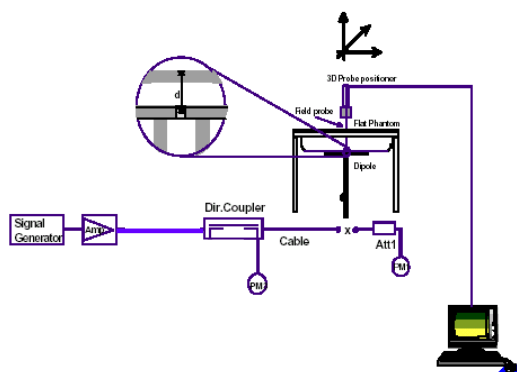

2450MHz System
performance check setup

Test system for the system performance check setup diagram

9. Validation uncertainty

The uncertainty budget has been determined for the DASY4 measurement system according to the SPEAG documents[6][7] and is given in the following Table.

Error Description	Uncertainty value $\pm$ %	Probability distribution	divisor	(ci) 1g	Standard Uncertainty (1g)	vi or veff
Measurement System						
Probe calibration	± 6.8	Normal	1	1	± 6.8	∞
Axial isotropy of the probe	± 4.7	Rectangular	$\sqrt{3}$	1	± 2.7	∞
Spherical isotropy of the probe	± 9.6	Rectangular	0	0	0	∞
Boundary effects	± 2.0	Rectangular	$\sqrt{3}$	1	± 1.2	∞
Probe linearity	± 4.7	Rectangular	$\sqrt{3}$	1	± 2.7	∞
Detection limit	± 1.0	Rectangular	$\sqrt{3}$	1	± 0.6	∞
Readout electronics	± 0.3	Normal	1	1	± 0.3	∞
Response time	0	Rectangular	$\sqrt{3}$	1	0	∞
Integration time	0	Rectangular	$\sqrt{3}$	1	0	∞
RF ambient Noise	± 3.0	Rectangular	$\sqrt{3}$	1	± 1.7	∞
RF ambient Reflections	± 3.0	Rectangular	$\sqrt{3}$	1	± 1.7	∞
Probe Positioner	± 0.8	Rectangular	$\sqrt{3}$	1	± 0.5	∞
Probe positioning	± 9.9	Rectangular	1	1	± 5.7	∞
Algorithms for Max.SAR Eval.	± 4.0	Rectangular	$\sqrt{3}$	1	± 2.3	∞
Dipole						
Dipole Axis to Liquid Distance	± 2.0	Rectangular	$\sqrt{3}$	1	± 1.2	∞
Input power and SAR drift meas.	± 4.7	Rectangular	$\sqrt{3}$	1	± 2.7	∞
Phantom and Setup						
Phantom uncertainty	± 4.0	Rectangular	$\sqrt{3}$	1	± 2.3	∞
Liquid conductivity (target)	± 5.0	Rectangular	$\sqrt{3}$	0.64	± 1.8	∞
Liquid conductivity (meas.)	± 5.0	Rectangular	1	0.64	± 3.2	∞
Liquid permittivity (target)	± 5.0	Rectangular	$\sqrt{3}$	0.6	± 1.7	∞
Liquid permittivity (meas.)	± 5.0	Rectangular	1	0.6	± 3.0	∞
Combined Standard Uncertainty					± 12.079	
Expanded Uncertainty (k=2)					± 24.2	

10. Validation Measurement data

System Validation / Dipole 2450 MHz / Forward Conducted Power : 250mW

Dipole 2450 MHz;

Type: D2450V2; Serial:765

Communication System: CW; Frequency: 2450 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2450$ MHz; $\sigma = 1.86$ mho/m; $\epsilon_r = 38.5$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY4 (High Precision Assessment)

DASY4 Configuration:

Probe: EX3DV3 - SN3507; ConvF(8.25, 8.25, 8.25); Calibrated: 2005/04/12

Sensor-Surface: 2mm (Mechanical Surface Detection)

Electronics: DAE3 Sn509; Calibrated: 2005/05/26

Phantom: SAM 1196

Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 145

Area Scan (51x51x1): Measurement grid: $dx=20$ mm, $dy=20$ mm

Maximum value of SAR (interpolated) = 25.2 mW/g

Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 106.6 V/m; Power Drift = -0.041 dB

Peak SAR (extrapolated) = 27.9 W/kg


SAR(1 g) = 13.5 mW/g; SAR(10 g) = 6.19 mW/g

Maximum value of SAR (measured) = 20.6 mW/g

Test Date = 11/08/05

Ambient Temperature = 25.0 degree.C.

Liquid Temperature = Before 24.0 degree C. , After 24.0 degree C.

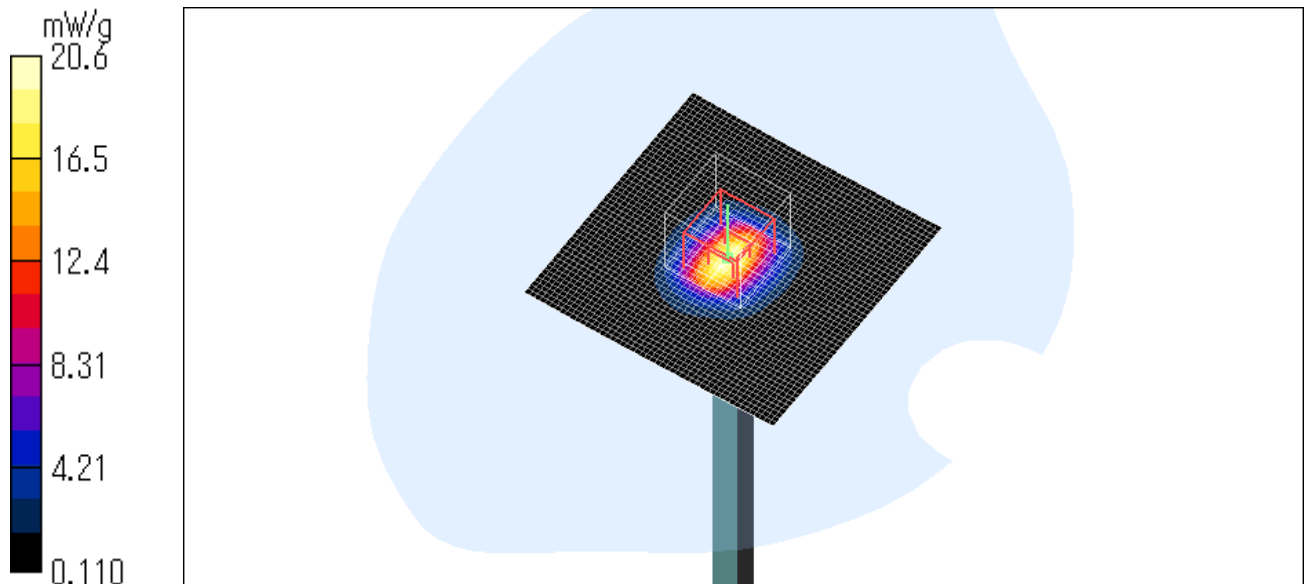

UL Apex Co., Ltd.

Head Office EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone: +81 596 24 8116

Facsimile: +81 596 24 8124

System Validation / Dipole 2450 MHz / Forward Conducted Power : 250mW

Dipole 2450 MHz;
Type: D2450V2; Serial:765


Communication System: CW; Frequency: 2450 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 2450$ MHz; $\sigma = 1.88$ mho/m; $\epsilon_r = 37.6$; $\rho = 1000$ kg/m³
Phantom section: Flat Section
Measurement Standard: DASY4 (High Precision Assessment)

DASY4 Configuration:
Probe: EX3DV3 - SN3507; ConvF(8.25, 8.25, 8.25); Calibrated: 2005/04/12
Sensor-Surface: 2mm (Mechanical Surface Detection)
Electronics: DAE3 Sn509; Calibrated: 2005/05/26
Phantom: SAM 1196
Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 145

Area Scan (51x51x1): Measurement grid: dx=20mm, dy=20mm
Maximum value of SAR (interpolated) = 25.5 mW/g

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 106.5 V/m; Power Drift = -0.032 dB
Peak SAR (extrapolated) = 28.1 W/kg
SAR(1 g) = 13.6 mW/g; SAR(10 g) = 6.27 mW/g
Maximum value of SAR (measured) = 20.8 mW/g

Test Date = 11/09/05
Ambient Temperature = 25.0 degree.C.
Liquid Temperature = Before 23.5 degree C. , After 23.5 degree C.

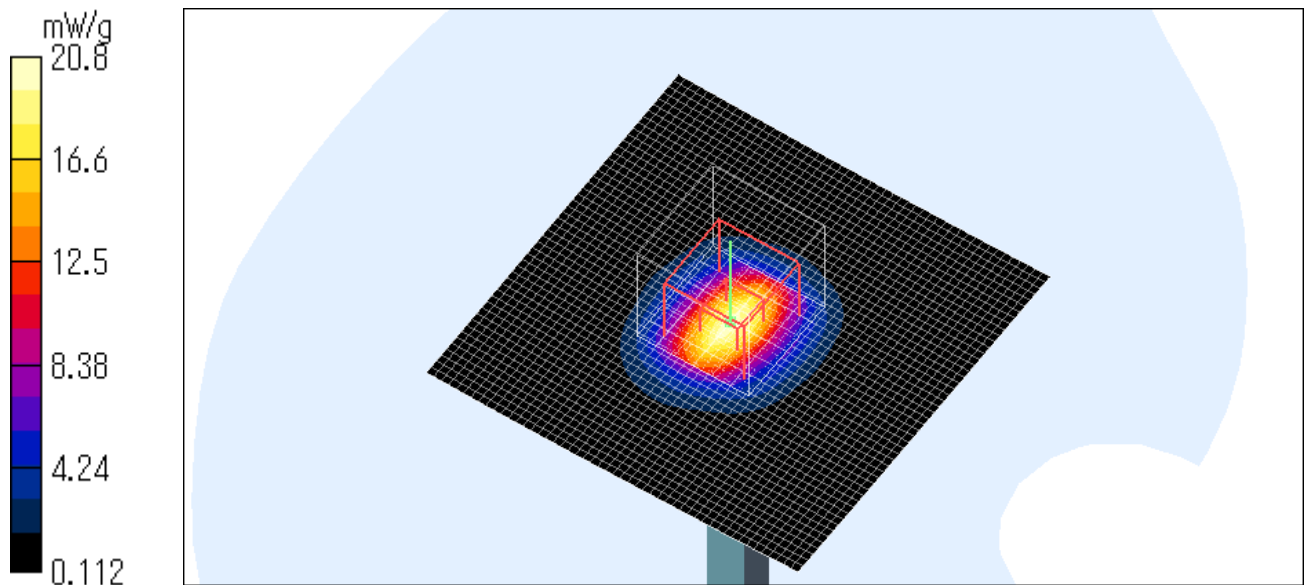

System Validation / Dipole 2450 MHz / Forward Conducted Power : 250mW

Dipole 2450 MHz;
Type: D2450V2; Serial:765


Communication System: CW; Frequency: 2450 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 2450$ MHz; $\sigma = 1.82$ mho/m; $\epsilon_r = 37.4$; $\rho = 1000$ kg/m³
Phantom section: Flat Section
Measurement Standard: DASY4 (High Precision Assessment)

DASY4 Configuration:
Probe: EX3DV3 - SN3507; ConvF(8.25, 8.25, 8.25); Calibrated: 2005/04/12
Sensor-Surface: 2mm (Mechanical Surface Detection)
Electronics: DAE3 Sn509; Calibrated: 2005/05/26
Phantom: SAM 1196
Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 145

Area Scan (51x51x1): Measurement grid: $dx=20$ mm, $dy=20$ mm
Maximum value of SAR (interpolated) = 25.4 mW/g

Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm
Reference Value = 91.0 V/m; Power Drift = 0.071 dB
Peak SAR (extrapolated) = 28.6 W/kg
SAR(1 g) = 14.1 mW/g; SAR(10 g) = 6.5 mW/g
Maximum value of SAR (measured) = 21.5 mW/g

Test Date = 11/10/05
Ambient Temperature = 25.0 degree.C.
Liquid Temperature = Before 24.8 degree C. , After 24.9 degree C.

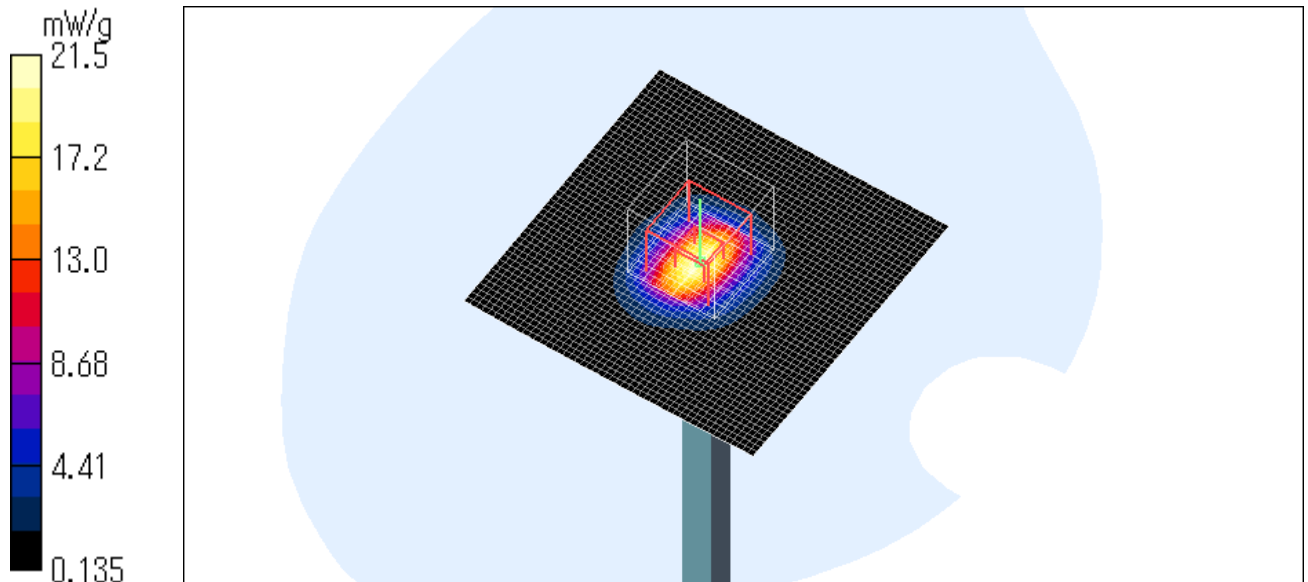

11. System Validation Dipole (D2450V2,S/N: 765)

**Calibration Laboratory of
Schmid & Partner
Engineering AG**
Zeughausstrasse 43, 8004 Zurich, Switzerland



S Schweizerischer Kalibrierdienst
C Service suisse d'étalonnage
S Servizio svizzero di taratura
S Swiss Calibration Service

Accredited by the Swiss Federal Office of Metrology and Accreditation
The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**

Client **MTT**

Certificate No: **D2450V2-765_Nov04**

CALIBRATION CERTIFICATE

Object **D2450V2 - SN: 765**

Calibration procedure(s) **QA CAL-05.v6
Calibration procedure for dipole validation kits**

Calibration date: **November 15, 2004**

Condition of the calibrated item **In Tolerance**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).
The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature $(22 \pm 3)^{\circ}\text{C}$ and humidity $< 70\%$.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID #	Cal Date (Calibrated by, Certificate No.)	Scheduled Calibration
Power meter EPM E442	GB37480704	12-Oct-04 (METAS, No. 251-00412)	Oct-05
Power sensor HP 8481A	US37292783	12-Oct-04 (METAS, No. 251-00412)	Oct-05
Reference 20 dB Attenuator	SN: 5086 (20g)	10-Aug-04 (METAS, No. 251-00402)	Aug-05
Reference 10 dB Attenuator	SN: 5047.2 (10r)	10-Aug-04 (METAS, No. 251-00402)	Aug-05
Reference Probe ES3DV2	SN 3025	29-Oct-04 (SPEAG, No. ES3-3025_Oct04)	Oct-05
DAE4	SN 601	6-Nov-03 (SPEAG, No. DAE4-601_Jul04)	Jul-05

Secondary Standards	ID #	Check Date (in house)	Scheduled Check
Power sensor HP 8481A	MY41092317	18-Oct-02 (SPEAG, in house check Oct-03)	In house check: Oct-05
RF generator R&S SML-03	100698	27-Mar-02 (SPEAG, in house check Dec-03)	In house check: Dec-05
Network Analyzer HP 8753E	US37390585 S4206	18-Oct-01 (SPEAG, in house check Nov-03)	In house check: Nov-04

Calibrated by:	Name Mike Meili	Function Laboratory Technician	Signature
Approved by:	Name Katja Pokovic	Technical Manager	

Issued: November 17, 2004

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.

Certificate No: D2450V2-765_Nov04

Page 1 of 9

Calibration Laboratory of
Schmid & Partner
Engineering AG
Zeughausstrasse 43, 8004 Zurich, Switzerland



S Schweizerischer Kalibrierdienst
C Service suisse d'étalonnage
S Servizio svizzero di taratura
S Swiss Calibration Service

Accredited by the Swiss Federal Office of Metrology and Accreditation
The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**

Glossary:

TSL	tissue simulating liquid
ConvF	sensitivity in TSL / NORM x,y,z
N/A	not applicable or not measured

Calibration is Performed According to the Following Standards:

- IEEE Std 1528-2003, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", December 2003
- CENELEC EN 50361, "Basic standard for the measurement of Specific Absorption Rate related to human exposure to electromagnetic fields from mobile phones (300 MHz - 3 GHz), July 2001
- Federal Communications Commission Office of Engineering & Technology (FCC OET), "Evaluating Compliance with FCC Guidelines for Human Exposure to Radiofrequency Electromagnetic Fields; Additional Information for Evaluating Compliance of Mobile and Portable Devices with FCC Limits for Human Exposure to Radiofrequency Emissions", Supplement C (Edition 01-01) to Bulletin 65

Additional Documentation:

- DASY4 System Handbook

Methods Applied and Interpretation of Parameters:

- Measurement Conditions:** Further details are available from the Validation Report at the end of the certificate. All figures stated in the certificate are valid at the frequency indicated.
- Antenna Parameters with TSL:** The dipole is mounted with the spacer to position its feed point exactly below the center marking of the flat phantom section, with the arms oriented parallel to the body axis.
- Feed Point Impedance and Return Loss:** These parameters are measured with the dipole positioned under the liquid filled phantom. The impedance stated is transformed from the measurement at the SMA connector to the feed point. The Return Loss ensures low reflected power. No uncertainty required.
- Electrical Delay:** One-way delay between the SMA connector and the antenna feed point. No uncertainty required.
- SAR measured:** SAR measured at the stated antenna input power.
- SAR normalized:** SAR as measured, normalized to an input power of 1 W at the antenna connector.
- SAR for nominal TSL parameters:** The measured TSL parameters are used to calculate the nominal SAR result.

Measurement Conditions

DASY system configuration, as far as not given on page 1.

DASY Version	DASY4	V4.4
Extrapolation	Advanced Extrapolation	
Phantom	Modular Flat Phantom V5.0	
Distance Dipole Center - TSL	10 mm	with Spacer
Area Scan resolution	dx, dy = 15 mm	
Zoom Scan Resolution	dx, dy, dz = 5 mm	
Frequency	2450 MHz $\pm$ 1 MHz	

Head TSL parameters

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Head TSL parameters	22.0 °C	39.2	1.80 mho/m
Measured Head TSL parameters	(23.0 $\pm$ 0.2) °C	38.3 $\pm$ 6 %	1.86 mho/m $\pm$ 6 %
Head TSL temperature during test	(23.0 $\pm$ 0.2) °C	-----	-----

SAR result with Head TSL

SAR averaged over 1 cm ³ (1 g) of Head TSL	condition	
SAR measured	250 mW input power	13.5 mW / g
SAR normalized	normalized to 1W	54.0 mW / g
SAR for nominal Head TSL parameters ¹	normalized to 1W	52.7 mW / g $\pm$ 17.0 % (k=2)

SAR averaged over 10 cm ³ (10 g) of Head TSL	condition	
SAR measured	250 mW input power	8.15 mW / g
SAR normalized	normalized to 1W	24.6 mW / g
SAR for nominal Head TSL parameters ¹	normalized to 1W	24.0 mW / g $\pm$ 16.5 % (k=2)

¹ Correction to nominal TSL parameters according to d), chapter "SAR Sensitivities"

Body TSL parameters

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Body TSL parameters	22.0 °C	52.7	1.95 mho/m
Measured Body TSL parameters	(22.0 ± 0.2) °C	51.7 ± 6 %	1.96 mho/m ± 6 %
Body TSL temperature during test	(22.0 ± 0.2) °C	----	----

SAR result with Body TSL

SAR averaged over 1 cm ³ (1 g) of Body TSL	condition	
SAR measured	250 mW input power	13.3 mW / g
SAR normalized	normalized to 1W	53.2 mW / g
SAR for nominal Body TSL parameters ²	normalized to 1W	52.5 mW / g ± 17.0 % (k=2)

SAR averaged over 10 cm ³ (10 g) of Body TSL	condition	
SAR measured	250 mW input power	6.12 mW / g
SAR normalized	normalized to 1W	24.5 mW / g
SAR for nominal Body TSL parameters ¹	normalized to 1W	24.1 mW / g ± 16.5 % (k=2)

² Correction to nominal TSL parameters according to d), chapter "SAR Sensitivities"

Appendix

Antenna Parameters with Head TSL

Impedance, transformed to feed point	$52.7 \Omega + j4.6 \Omega$
Return Loss	-25.8 dB

Antenna Parameters with Body TSL

Impedance, transformed to feed point	$48.9 \Omega + j6.3 \Omega$
Return Loss	-23.8 dB

General Antenna Parameters and Design

Electrical Delay (one direction)	1.175 ns
----------------------------------	----------

After long term use with 100W radiated power, only a slight warming of the dipole near the feedpoint can be measured.

The dipole is made of standard semirigid coaxial cable. The center conductor of the feeding line is directly connected to the second arm of the dipole. The antenna is therefore short-circuited for DC-signals.

No excessive force must be applied to the dipole arms, because they might bend or the soldered connections near the feedpoint may be damaged.

Additional EUT Data

Manufactured by	SPEAG
Manufactured on	August 10, 2004

DASY4 Validation Report for Head TSL

Date/Time: 11/17/04 10:57:18

Test Laboratory: SPEAG, Zürich, Switzerland

DUT: Dipole 2450 MHz; Type: D2450V2; Serial: D2450V2 - SN765

Communication System: CW-2450; Frequency: 2450 MHz; Duty Cycle: 1:1

Medium: HSL 2450 MHz;

Medium parameters used: $f = 2450$ MHz; $\sigma = 1.86$ mho/m; $\epsilon_r = 38.3$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY4 (High Precision Assessment)

DASY4 Configuration:

- Probe: ES3DV2 - SN3025; ConvF(4.4, 4.4, 4.4); Calibrated: 29.10.2004
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 22.07.2004
- Phantom: Flat Phantom quarter size -SN:1001; Type: QD000P50AA; Serial: SN:1001
- Measurement SW: DASY4, V4.4 Build 3; Postprocessing SW: SEMCAD, V1.8 Build 130

Pin = 250 mW; d = 10 mm/Area Scan (81x81x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 15.6 mW/g


Pin = 250 mW; d = 10 mm/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 79.7 V/m; Power Drift = 0.2 dB


Peak SAR (extrapolated) = 29 W/kg

SAR(1 g) = 13.5 mW/g; SAR(10 g) = 6.15 mW/g

Maximum value of SAR (measured) = 15.3 mW/g

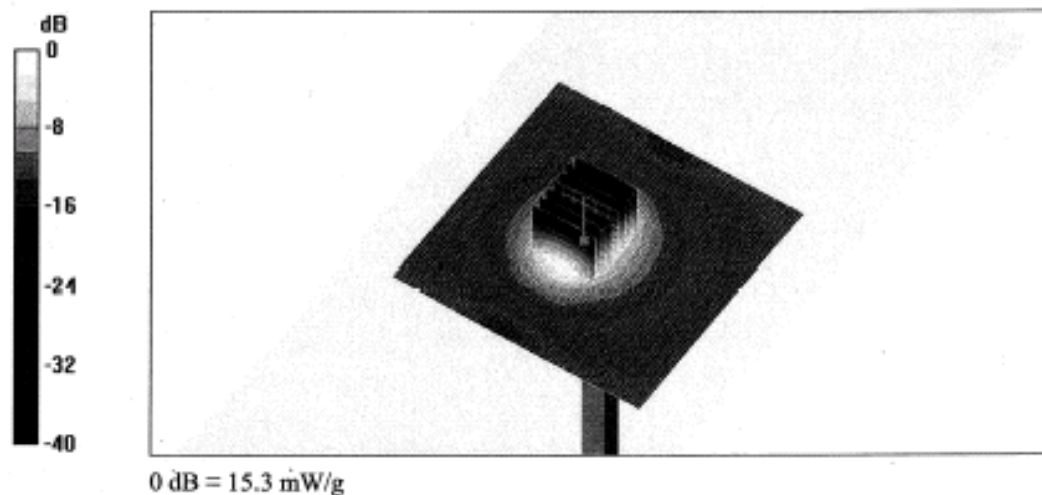

Impedance Measurement Plot for Head TSL

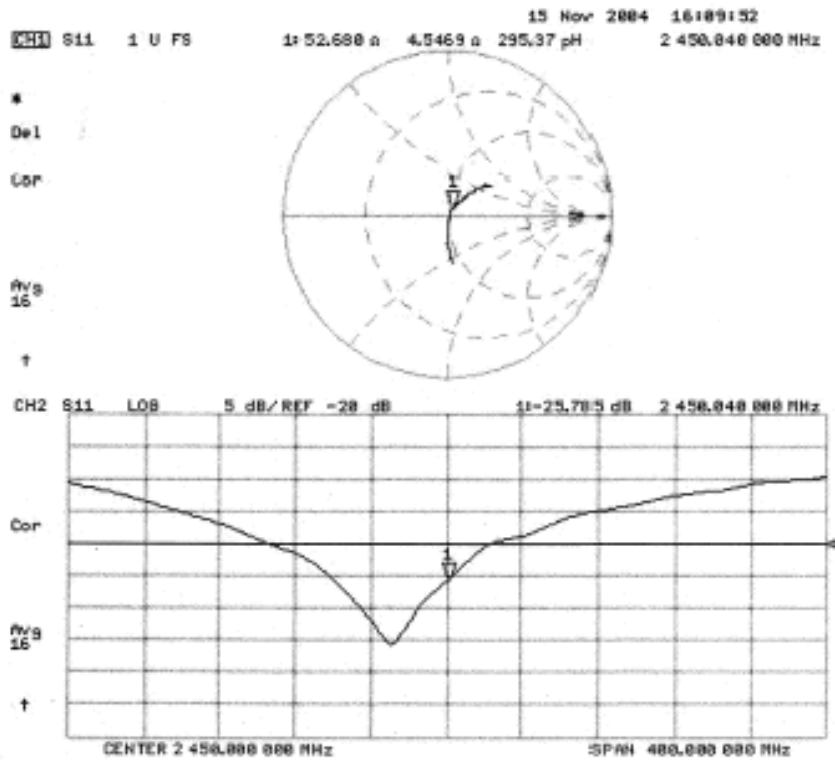

DASY4 Validation Report for Body TSL

Date/Time: 11/17/04 10:57:37

Test Laboratory: SPEAG, Zürich, Switzerland

DUT: Dipole 2450 MHz; Type: D2450V2; Serial: D2450V2 - SN765

Communication System: CW-2450; Frequency: 2450 MHz; Duty Cycle: 1:1

Medium: MSL 2450 MHz;

Medium parameters used: $f = 2450$ MHz; $\sigma = 1.96$ mho/m; $\epsilon_r = 51.7$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY4 (High Precision Assessment)

DASY4 Configuration:

- Probe: ES3DV2 - SN3025; ConvF(4.13, 4.13, 4.13); Calibrated: 29.10.2004
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 22.07.2004
- Phantom: SAM with CRP - TP1006; Type: SAM 4.0; Serial: TP:1006
- Measurement SW: DASY4, V4.4 Build 3; Postprocessing SW: SEMCAD, V1.8 Build 130

Pin = 250 mW; d = 10 mm/Area Scan (81x81x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 15.3 mW/g


Pin = 250 mW; d = 10 mm/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 88.6 V/m; Power Drift = 0.1 dB


Peak SAR (extrapolated) = 27.4 W/kg

SAR(1 g) = 13.3 mW/g; SAR(10 g) = 6.12 mW/g

Maximum value of SAR (measured) = 15.2 mW/g

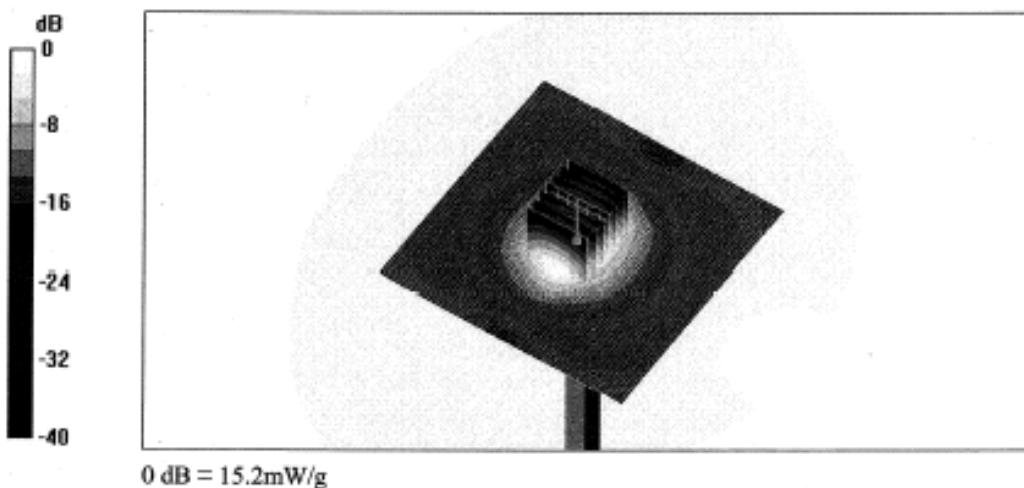

Impedance Measurement Plot for Body TSL

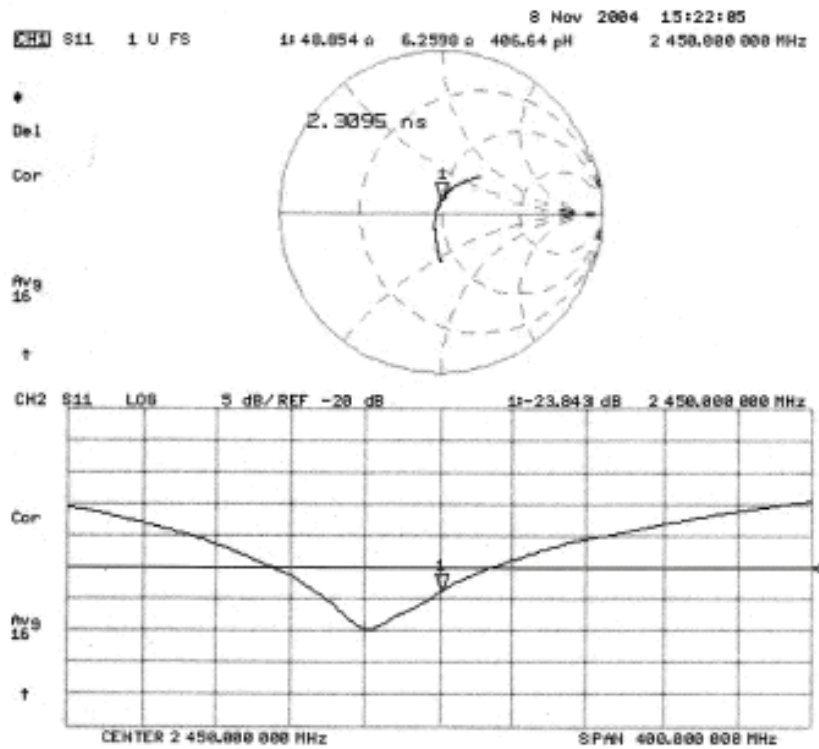

12. Dosimetric E-Field Probe Calibration (EX3DV3,S/N: 3507)

Calibration Laboratory of
Schmid & Partner
Engineering AG
Zeughausstrasse 43, 8004 Zurich, Switzerland



S Schweizerischer Kalibrierdienst
C Service suisse d'étalonnage
S Servizio svizzero di taratura
S Swiss Calibration Service

Accredited by the Swiss Federal Office of Metrology and Accreditation
The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: SCS 108

Client **UL Apex (MTT)**

Certificate No: **EX3-3507_Apr05**

CALIBRATION CERTIFICATE																																																			
Object	EX3DV3 - SN:3507																																																		
Calibration procedure(s)	QA-CAL-01.v5 and QA-CAL-14.v2 Calibration procedure for dosimetric E-field probes																																																		
Calibration date:	April 12, 2005																																																		
Condition of the calibrated item	In Tolerance																																																		
This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI). The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate. All calibrations have been conducted in the closed laboratory facility: environment temperature $(22 \pm 3)^{\circ}\text{C}$ and humidity $< 70\%$. Calibration Equipment used (M&E critical for calibration) <table border="1"> <thead> <tr> <th>Primary Standards</th> <th>ID #</th> <th>Cal Date (Calibrated by, Certificate No.)</th> <th>Scheduled Calibration</th> </tr> </thead> <tbody> <tr> <td>Power meter E4419B</td> <td>GB41293874</td> <td>5-May-04 (METAS, No. 251-00388)</td> <td>May-05</td> </tr> <tr> <td>Power sensor E4412A</td> <td>MY41495277</td> <td>5-May-04 (METAS, No. 251-00388)</td> <td>May-05</td> </tr> <tr> <td>Reference 3 dB Attenuator</td> <td>SN: S5054 (3c)</td> <td>10-Aug-04 (METAS, No. 251-00403)</td> <td>Aug-05</td> </tr> <tr> <td>Reference 20 dB Attenuator</td> <td>SN: S5086 (20b)</td> <td>3-May-04 (METAS, No. 251-00388)</td> <td>May-05</td> </tr> <tr> <td>Reference 30 dB Attenuator</td> <td>SN: S5129 (30b)</td> <td>10-Aug-04 (METAS, No. 251-00404)</td> <td>Aug-05</td> </tr> <tr> <td>Reference Probe ES3DV2</td> <td>SN: 3013</td> <td>7-Jan-05 (SPEAG, No. ES3-3013_Jan05)</td> <td>Jan-06</td> </tr> <tr> <td>DAE4</td> <td>SN: 617</td> <td>19-Jan-05 (SPEAG, No. DAE4-617_Jan05)</td> <td>Jan-06</td> </tr> </tbody> </table> <table border="1"> <thead> <tr> <th>Secondary Standards</th> <th>ID #</th> <th>Check Date (in house)</th> <th>Scheduled Check</th> </tr> </thead> <tbody> <tr> <td>Power sensor HP 8481A</td> <td>MY41092180</td> <td>18-Sep-02 (SPEAG, in house check Oct-03)</td> <td>In house check: Oct-05</td> </tr> <tr> <td>RF generator HP 8648C</td> <td>US3642U01700</td> <td>4-Aug-99 (SPEAG, in house check Dec-03)</td> <td>In house check: Dec-05</td> </tr> <tr> <td>Network Analyzer HP 8753E</td> <td>US37390585</td> <td>18-Oct-01 (SPEAG, in house check Nov-04)</td> <td>In house check: Nov-05</td> </tr> </tbody> </table>				Primary Standards	ID #	Cal Date (Calibrated by, Certificate No.)	Scheduled Calibration	Power meter E4419B	GB41293874	5-May-04 (METAS, No. 251-00388)	May-05	Power sensor E4412A	MY41495277	5-May-04 (METAS, No. 251-00388)	May-05	Reference 3 dB Attenuator	SN: S5054 (3c)	10-Aug-04 (METAS, No. 251-00403)	Aug-05	Reference 20 dB Attenuator	SN: S5086 (20b)	3-May-04 (METAS, No. 251-00388)	May-05	Reference 30 dB Attenuator	SN: S5129 (30b)	10-Aug-04 (METAS, No. 251-00404)	Aug-05	Reference Probe ES3DV2	SN: 3013	7-Jan-05 (SPEAG, No. ES3-3013_Jan05)	Jan-06	DAE4	SN: 617	19-Jan-05 (SPEAG, No. DAE4-617_Jan05)	Jan-06	Secondary Standards	ID #	Check Date (in house)	Scheduled Check	Power sensor HP 8481A	MY41092180	18-Sep-02 (SPEAG, in house check Oct-03)	In house check: Oct-05	RF generator HP 8648C	US3642U01700	4-Aug-99 (SPEAG, in house check Dec-03)	In house check: Dec-05	Network Analyzer HP 8753E	US37390585	18-Oct-01 (SPEAG, in house check Nov-04)	In house check: Nov-05
Primary Standards	ID #	Cal Date (Calibrated by, Certificate No.)	Scheduled Calibration																																																
Power meter E4419B	GB41293874	5-May-04 (METAS, No. 251-00388)	May-05																																																
Power sensor E4412A	MY41495277	5-May-04 (METAS, No. 251-00388)	May-05																																																
Reference 3 dB Attenuator	SN: S5054 (3c)	10-Aug-04 (METAS, No. 251-00403)	Aug-05																																																
Reference 20 dB Attenuator	SN: S5086 (20b)	3-May-04 (METAS, No. 251-00388)	May-05																																																
Reference 30 dB Attenuator	SN: S5129 (30b)	10-Aug-04 (METAS, No. 251-00404)	Aug-05																																																
Reference Probe ES3DV2	SN: 3013	7-Jan-05 (SPEAG, No. ES3-3013_Jan05)	Jan-06																																																
DAE4	SN: 617	19-Jan-05 (SPEAG, No. DAE4-617_Jan05)	Jan-06																																																
Secondary Standards	ID #	Check Date (in house)	Scheduled Check																																																
Power sensor HP 8481A	MY41092180	18-Sep-02 (SPEAG, in house check Oct-03)	In house check: Oct-05																																																
RF generator HP 8648C	US3642U01700	4-Aug-99 (SPEAG, in house check Dec-03)	In house check: Dec-05																																																
Network Analyzer HP 8753E	US37390585	18-Oct-01 (SPEAG, in house check Nov-04)	In house check: Nov-05																																																
Calibrated by:	Name Alina Voller	Function Laboratory Technician	Signature 																																																
Approved by:	Name Kolja Polovic	Function Technical Manager	Signature 																																																
Issued: April 12, 2005 This calibration certificate shall not be reproduced except in full without written approval of the laboratory.																																																			

Certificate No: EX3-3507_Apr05

Page 1 of 10

Calibration Laboratory of
Schmid & Partner
Engineering AG
Zeughausstrasse 43, 8004 Zurich, Switzerland



S Schweizerischer Kalibrierdienst
C Service suisse d'étalonnage
S Servizio svizzero di taratura
S Swiss Calibration Service

Accredited by the Swiss Federal Office of Metrology and Accreditation
The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: SCS 108

Glossary:

TSL	tissue simulating liquid
NORM _{x,y,z}	sensitivity in free space
ConF	sensitivity in TSL / NORM _{x,y,z}
DCP	diode compression point
Polarization ϕ	ϕ rotation around probe axis
Polarization θ	θ rotation around an axis that is in the plane normal to probe axis (at measurement center), i.e., $\theta = 0$ is normal to probe axis

Calibration is Performed According to the Following Standards:

- IEEE Std 1528-2003, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", December 2003
- CENELEC EN 50361, "Basic standard for the measurement of Specific Absorption Rate related to human exposure to electromagnetic fields from mobile phones (300 MHz - 3 GHz), July 2001

Methods Applied and Interpretation of Parameters:

- NORM_{x,y,z}**: Assessed for E-field polarization $\theta = 0$ ($f \leq 900$ MHz in TEM-cell; $f > 1800$ MHz: R22 waveguide). NORM_{x,y,z} are only intermediate values, i.e., the uncertainties of NORM_{x,y,z} does not effect the E²-field uncertainty inside TSL (see below *ConvF*).
- NORM(f)_{x,y,z}** = NORM_{x,y,z} * frequency_response (see Frequency Response Chart). This linearization is implemented in DASY4 software versions later than 4.2. The uncertainty of the frequency response is included in the stated uncertainty of *ConvF*.
- DCP_{x,y,z}**: DCP are numerical linearization parameters assessed based on the data of power sweep (no uncertainty required). DCP does not depend on frequency nor media.
- ConvF and Boundary Effect Parameters**: Assessed in flat phantom using E-field (or Temperature Transfer Standard for $f \leq 800$ MHz) and inside waveguide using analytical field distributions based on power measurements for $f > 800$ MHz. The same setups are used for assessment of the parameters applied for boundary compensation (alpha, depth) of which typical uncertainty values are given. These parameters are used in DASY4 software to improve probe accuracy close to the boundary. The sensitivity in TSL corresponds to NORM_{x,y,z} * *ConvF* whereby the uncertainty corresponds to that given for *ConvF*. A frequency dependent *ConvF* is used in DASY version 4.4 and higher which allows extending the validity from ± 50 MHz to ± 100 MHz.
- Spherical isotropy (3D deviation from isotropy)**: in a field of low gradients realized using a flat phantom exposed by a patch antenna.
- Sensor Offset**: The sensor offset corresponds to the offset of virtual measurement center from the probe tip (on probe axis). No tolerance required.

EX3DV3 SN:3507

April 12, 2005

Probe EX3DV3

SN:3507

Manufactured:	December 15, 2003
Last calibrated:	February 20, 2004
Recalibrated:	April 12, 2005

Calibrated for DASY Systems

(Note: non-compatible with DASY2 system!)

EX3DV3 SN:3507

April 12, 2005

DASY - Parameters of Probe: EX3DV3 SN:3507

Sensitivity in Free Space^A

Diode Compression^B

NormX	0.71 ± 10.1%	$\mu\text{V}/(\text{V}/\text{m})^2$	DCP X	96 mV
NormY	0.74 ± 10.1%	$\mu\text{V}/(\text{V}/\text{m})^2$	DCP Y	96 mV
NormZ	0.73 ± 10.1%	$\mu\text{V}/(\text{V}/\text{m})^2$	DCP Z	96 mV

Sensitivity in Tissue Simulating Liquid (Conversion Factors)

Please see Page 8.

Boundary Effect

TSL 900 MHz Typical SAR gradient: 5 % per mm

Sensor Center to Phantom Surface Distance		2.0 mm	3.0 mm
SAR _{ba} [%]	Without Correction Algorithm	3.4	1.2
SAR _{ba} [%]	With Correction Algorithm	0.2	0.4

TSL 1810 MHz Typical SAR gradient: 10 % per mm

Sensor Center to Phantom Surface Distance		2.0 mm	3.0 mm
SAR _{ba} [%]	Without Correction Algorithm	3.3	1.8
SAR _{ba} [%]	With Correction Algorithm	0.6	0.7

Sensor Offset

Probe Tip to Sensor Center 1.0 mm

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor k=2, which for a normal distribution corresponds to a coverage probability of approximately 95%.

^A The uncertainties of NormX,Y,Z do not affect the E²-field uncertainty inside TSL (see Page 8).


^B Numerical linearization parameter: uncertainty not required.

EX3DV3 SN:3507

April 12, 2005

Frequency Response of E-Field

(TEM-Cell:ifi110 EXX, Waveguide: R22)



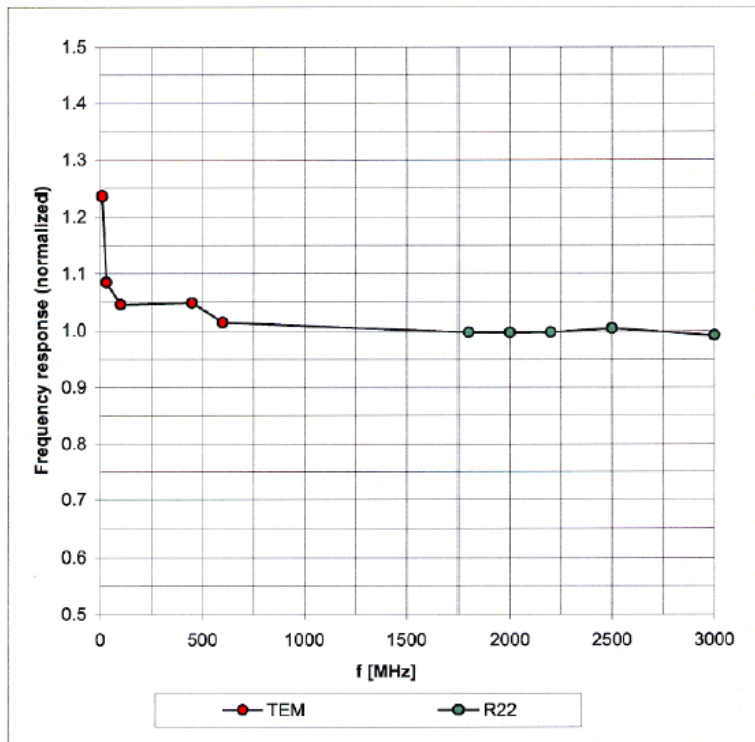


Uncertainty of Frequency Response of E-field: $\pm 6.3\%$ ($k=2$)

EX3DV3 SN:3507

April 12, 2005

Receiving Pattern (ϕ), $\theta = 0^\circ$

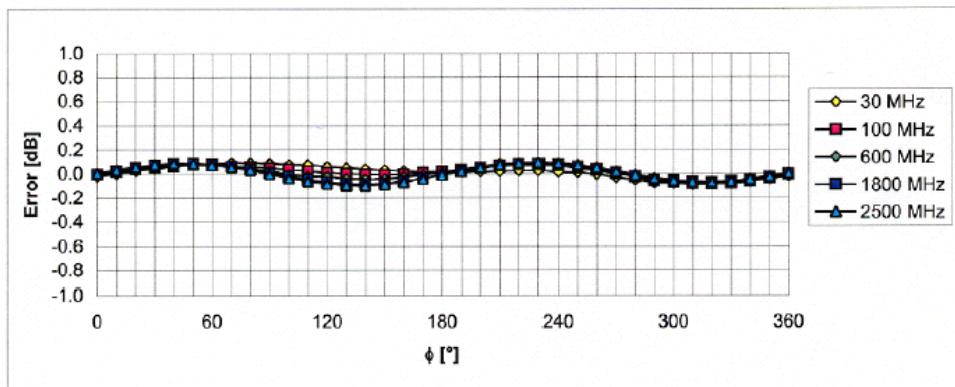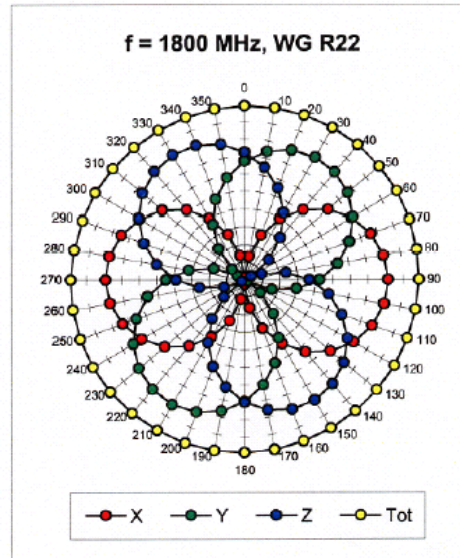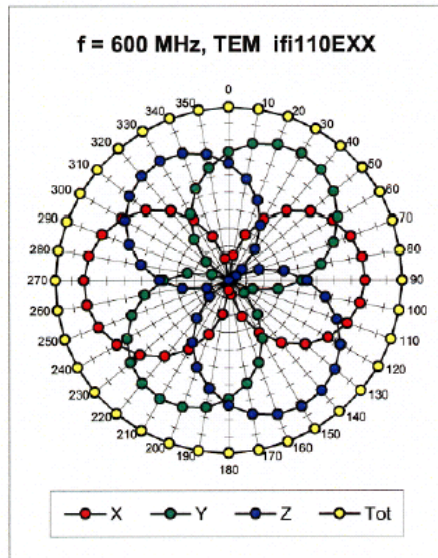


Uncertainty of Axial Isotropy Assessment: $\pm 0.5\%$ ($k=2$)

EX3DV3 SN:3507

April 12, 2005

Dynamic Range f(SAR_{head}) (Waveguide R22, f = 1800 MHz)

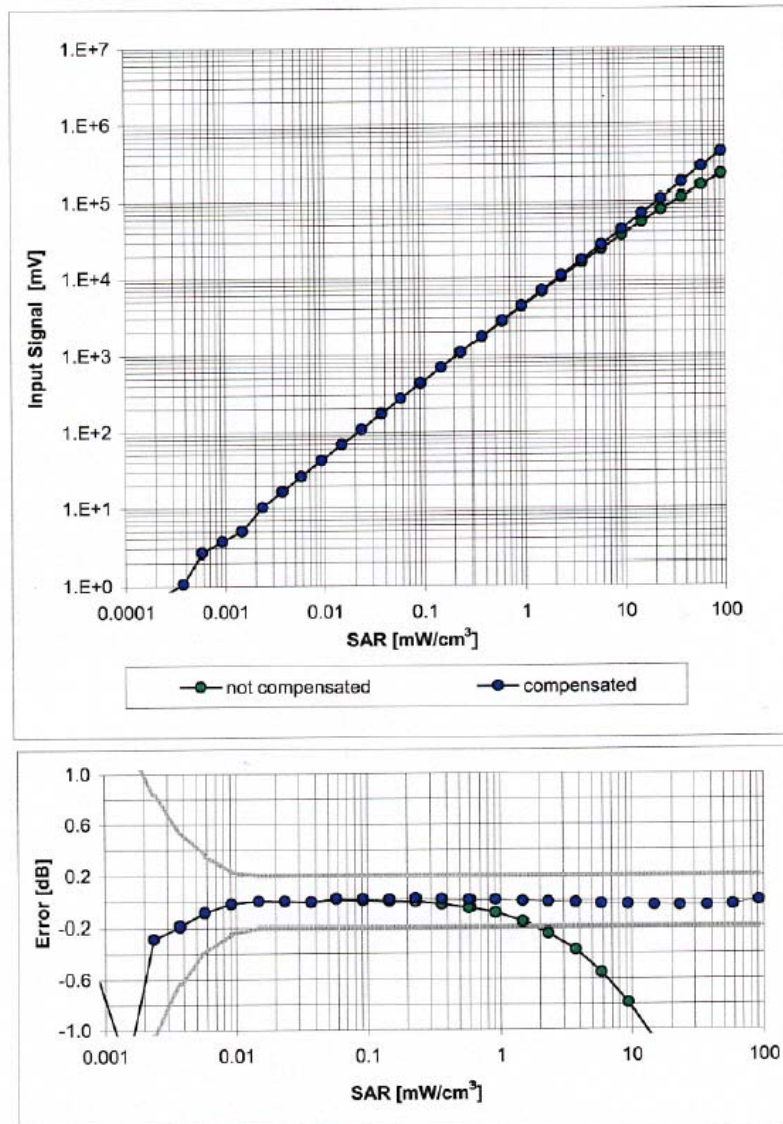


Uncertainty of Linearity Assessment: $\pm 0.6\%$ ($k=2$)

EX3DV3 SN:3507

April 12, 2005

Conversion Factor Assessment

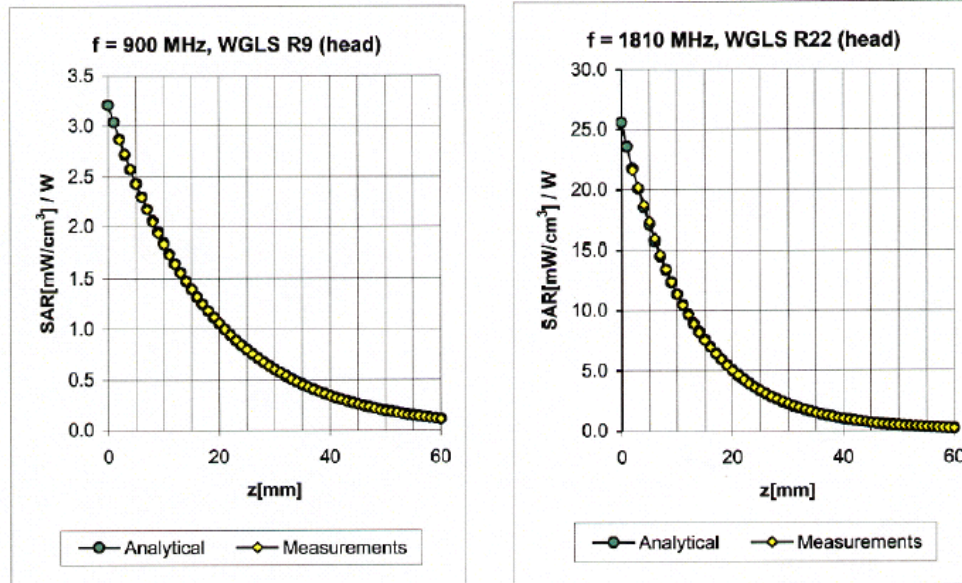

f [MHz]	Validity [MHz] ^c	TSL	Permittivity	Conductivity	Alpha	Depth	ConvF Uncertainty
900	± 50 / ± 100	Head	41.5 ± 5%	0.97 ± 5%	0.74	0.66	10.48 ± 11.0% (k=2)
1810	± 50 / ± 100	Head	40.0 ± 5%	1.40 ± 5%	0.51	0.77	9.10 ± 11.0% (k=2)
2450	± 50 / ± 100	Head	39.2 ± 5%	1.80 ± 5%	0.46	0.81	8.25 ± 11.8% (k=2)
900	± 50 / ± 100	Body	55.0 ± 5%	1.05 ± 5%	0.79	0.62	10.42 ± 11.0% (k=2)
1810	± 50 / ± 100	Body	53.3 ± 5%	1.52 ± 5%	0.30	1.78	8.70 ± 11.0% (k=2)
2450	± 50 / ± 100	Body	52.7 ± 5%	1.95 ± 5%	0.33	1.59	7.72 ± 11.8% (k=2)


^c The validity of ± 100 MHz only applies for DASY v4.4 and higher (see Page 2). The uncertainty is the RSS of the ConvF uncertainty at calibration frequency and the uncertainty for the indicated frequency band.

EX3DV3 SN:3507

April 12, 2005

Deviation from Isotropy in HSL

Error (ϕ , θ), $f = 900$ MHz


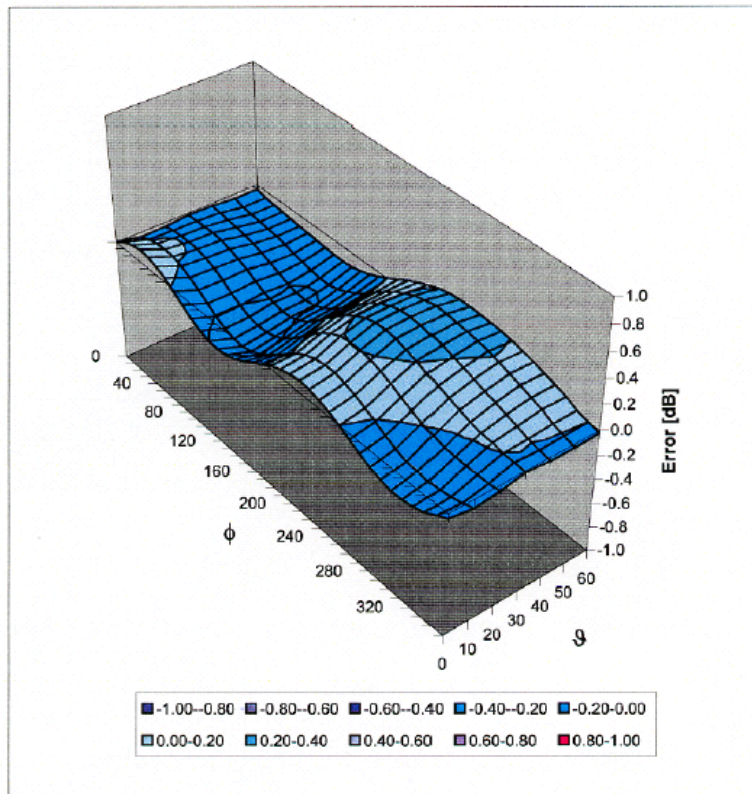


Uncertainty of Spherical Isotropy Assessment: $\pm 2.6\%$ ($k=2$)

EX3DV3 SN:3507

April 12, 2005

Appendix^D

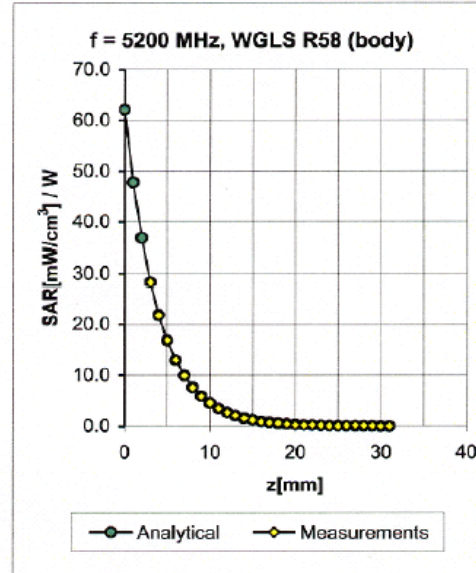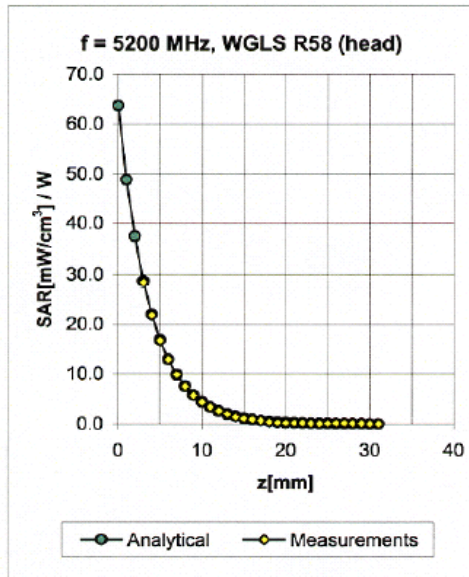

f [MHz] ^D	Validity [MHz]	TSL	Permittivity	Conductivity	Alpha	Depth	ConvF	Uncertainty
5200	± 50	Head	36.0 ± 5%	4.76 ± 5%	0.41	1.80	5.37	± 13.6% (k=2)
5800	± 50	Head	35.3 ± 5%	5.27 ± 5%	0.45	1.80	4.67	± 13.6% (k=2)
5200	± 50	Body	49.0 ± 5%	5.30 ± 5%	0.45	1.90	4.86	± 13.6% (k=2)
5800	± 50	Body	48.2 ± 5%	6.00 ± 5%	0.45	1.90	4.32	± 13.6% (k=2)

^D Accreditation for ConvF assessment above 3000 MHz is currently applied for. Accreditation is expected in spring 2005.

13. References

- [1]ANSI, ANSI/IEEE C95.1-1992: IEEE Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz to 300 GHz, The Institute of Electrical and Electronics Engineers, Inc., New York, NY 10017, 1992.
- [2] Katja Pokovic, Thomas Schmid, and Niels Kuster, "Robust setup for precise calibration of E-field probes in tissue simulating liquids at mobile communications frequencies", in ICECOM '97, Dubrovnik, October 15-17, 1997, pp. 120-124.
- [3] Katja Pokovic, Thomas Schmid, and Niels Kuster, "E-field probe with improved isotropy in brain simulating liquids", in Proceedings of the ELMAR, Zadar, Croatia, 23-25 June, 1996, pp.172-175.
- [4] W. Gander, Computermathematik, Birkhaeuser, Basel, 1992.
- [5] W. H. Press, S. A. Teukolsky, W. T. Vetterling, and B. P. Flannery, Numerical Recipes in C, The Art of Scientific Computing, Second Edition, Cambridge University Press, 1992.
- [6]SPEAG uncertainty document for DASY 4 System from SPEAG (Shimid & Partner Engineering AG).
- [7]SPEAG uncertainty document for "the 5-6GHz Extension" from SPEAG (Shimid & Partner Engineering AG).

APPENDIX 3 : SAR Measurement data

1. Evaluation procedure

The evaluation was performed with the following procedure:

Step 1: Measurement of the E-field at a fixed location above the ear point or central position of flat phantom was used as a reference value for assessing the power drop.

Step 2: The SAR distribution at the exposed side of head or body position was measured at a distance of each device from the inner surface of the shell. The area covered the entire dimension of the antenna of EUT and the horizontal grid spacing was 20 mm x 20 mm . Based on these data, the area of the maximum absorption was determined by spline interpolation.

Step 3: Around this point found in the Step 2 (area scan) , a volume of 30mm x 30mm x 30mm was assessed by measuring 7 x 7 x 7 points. And for any secondary peaks found in the Step2 which are within 2dB of maximum peak and not with this Step3 (Zoom scan) is repeated. On the basis of this data set, the spatial peak SAR value was evaluated under the following procedure:

(1). The data at the surface were extrapolated, since the center of the dipoles is 1mm away from the tip of the probe and the distance between the surface and the lowest measuring point is 1.3 mm. The extrapolation was based on a least square algorithm [4]. A polynomial of the fourth order was calculated through the points in z-axes. This polynomial was then used to evaluate the points between the surface and the probe tip.

(2). The maximum interpolated value was searched with a straightforward algorithm. Around this maximum the SAR values averaged over the spatial volumes (1 g or 10 g) were computed by the 3D-Spline interpolation algorithm. The 3D-Spline is composed of three one-dimensional splines with the "Not a knot"-condition (in x, y and z-directions) [4], [5]. The volume was integrated with the trapezoidal-algorithm. One thousand points (10 x 10 x 10) were interpolated to calculate the average.

(3). All neighboring volumes were evaluated until no neighboring volume with a higher average value was found.

Step 4: Re-measurement of the E-field at the same location as in Step 1.

2. Measurement data (Body SAR 2450MHz)

COOLPIX S6 / Body / Front / 2437 MHz / 11b(11Mbps)

Duty Cycle: 1:1

Medium parameters used: $f = 2450$ MHz; $\sigma = 1.96$ mho/m; $\epsilon_r = 50.1$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DAS4 (High Precision Assessment)

DAS4 Configuration:

Probe: EX3DV3 - SN3507; ConvF(7.72, 7.72, 7.72); Calibrated: 2005/04/12

Sensor-Surface: 2mm (Mechanical Surface Detection)

Electronics: DAE3 Sn509; Calibrated: 2005/05/26

Phantom: SAM 1196

Measurement SW: DAS4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 145

Area Scan (51x81x1): Measurement grid: $dx=20$ mm, $dy=20$ mm

Maximum value of SAR (interpolated) = 0.050 mW/g

Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 2.19 V/m; Power Drift = -0.115 dB

Peak SAR (extrapolated) = 0.096 W/kg


SAR(1 g) = 0.040 mW/g; SAR(10 g) = 0.015 mW/g

Maximum value of SAR (measured) = 0.064 mW/g

Test Date = 11/09/05

Ambient Temperature = 25.0 degree C.

Liquid Temperature = Before 24.5 degree C. , After 24.5 degree C.

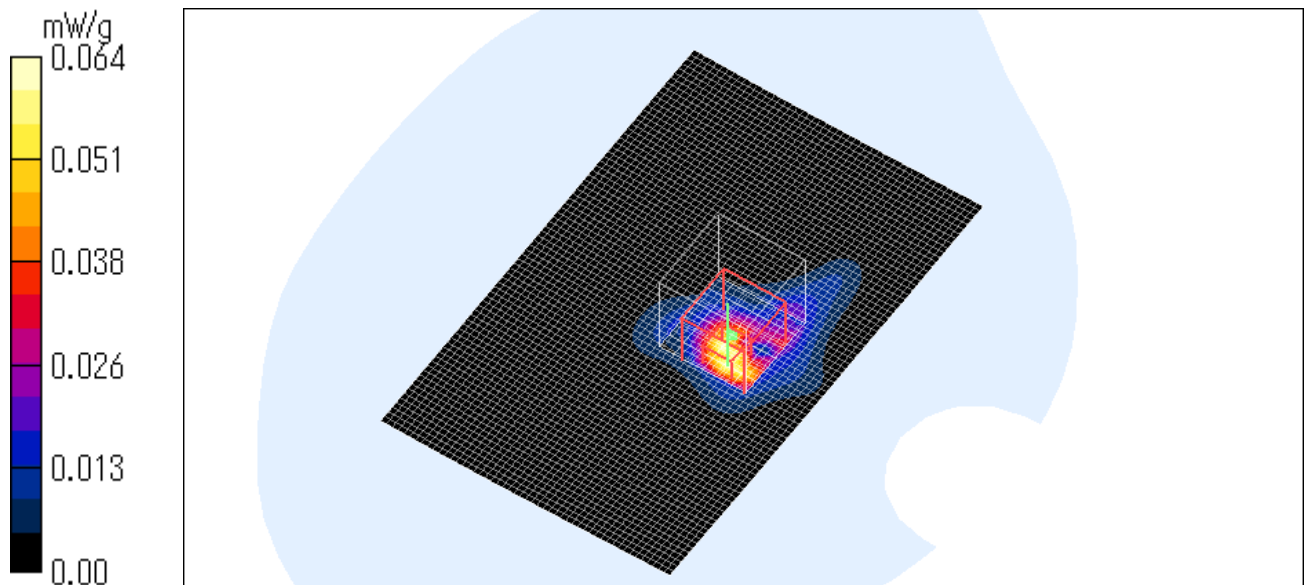

UL Apex Co., Ltd.

Head Office EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone: +81 596 24 8116

Facsimile: +81 596 24 8124

COOLPIX S6 / Body / Back / 2437 MHz / 11b(11Mbps)

Duty Cycle: 1:1

Medium parameters used: $f = 2450$ MHz; $\sigma = 1.96$ mho/m; $\epsilon_r = 50.1$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY4 (High Precision Assessment)

DASY4 Configuration:

Probe: EX3DV3 - SN3507; ConvF(7.72, 7.72, 7.72); Calibrated: 2005/04/12

Sensor-Surface: 2mm (Mechanical Surface Detection)

Electronics: DAE3 Sn509; Calibrated: 2005/05/26

Phantom: SAM 1196

Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 145

Area Scan (51x81x1): Measurement grid: $dx=20$ mm, $dy=20$ mm

Maximum value of SAR (interpolated) = 0.041 mW/g

Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 4.94 V/m; Power Drift = -0.245 dB

Peak SAR (extrapolated) = 0.059 W/kg


SAR(1 g) = 0.029 mW/g; SAR(10 g) = 0.013 mW/g

Maximum value of SAR (measured) = 0.044 mW/g

Test Date = 11/0905

Ambient Temperature = 25.0 degree C.

Liquid Temperature = Before 24.4 degree C. , After 24.2 degree C.

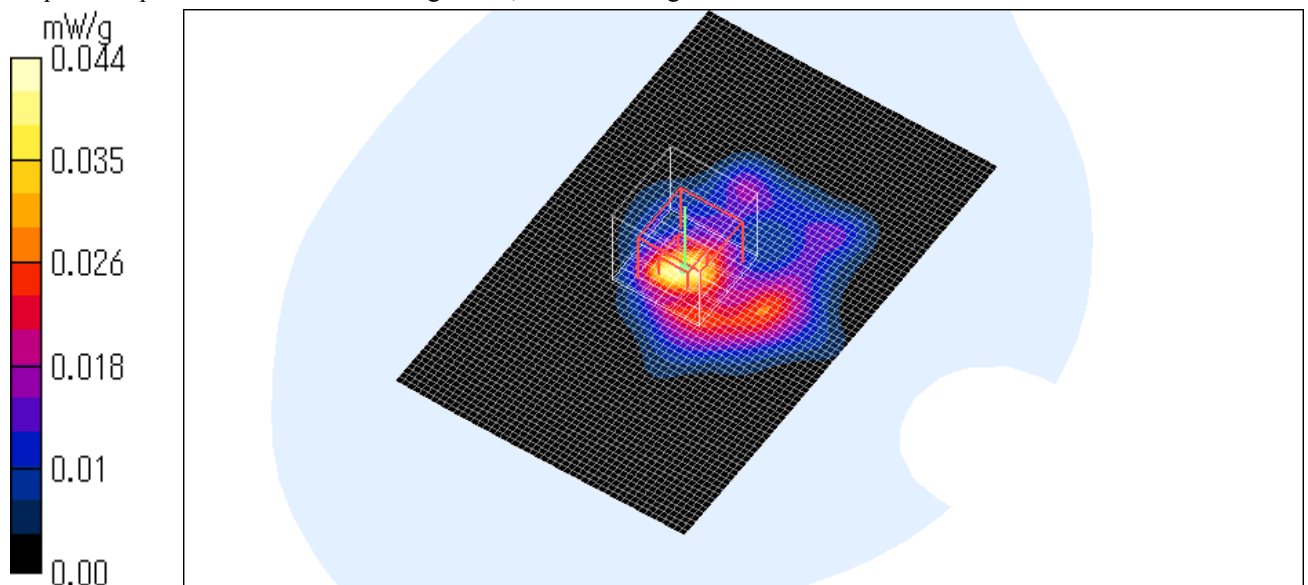

UL Apex Co., Ltd.

Head Office EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone: +81 596 24 8116

Facsimile: +81 596 24 8124

COOLPIX S6 / Body / Top / 2437 MHz / 11b(11Mbps)

Duty Cycle: 1:1

Medium parameters used: $f = 2450$ MHz; $\sigma = 1.96$ mho/m; $\epsilon_r = 50.1$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY4 (High Precision Assessment)

DASY4 Configuration:

Probe: EX3DV3 - SN3507; ConvF(7.72, 7.72, 7.72); Calibrated: 2005/04/12

Sensor-Surface: 2mm (Mechanical Surface Detection)

Electronics: DAE3 Sn509; Calibrated: 2005/05/26

Phantom: SAM 1196

Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 145

Area Scan (51x81x1): Measurement grid: dx=20mm, dy=20mm

Maximum value of SAR (interpolated) = 0.035 mW/g

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 2.19 V/m; Power Drift = -0.247 dB

Peak SAR (extrapolated) = 0.084 W/kg


SAR(1 g) = 0.031 mW/g; SAR(10 g) = 0.012 mW/g

Maximum value of SAR (measured) = 0.057 mW/g

Test Date = 11/09/05

Ambient Temperature = 25.0 degree C.

Liquid Temperature = Before 24.2 degree C. , After 24.0 degree C.

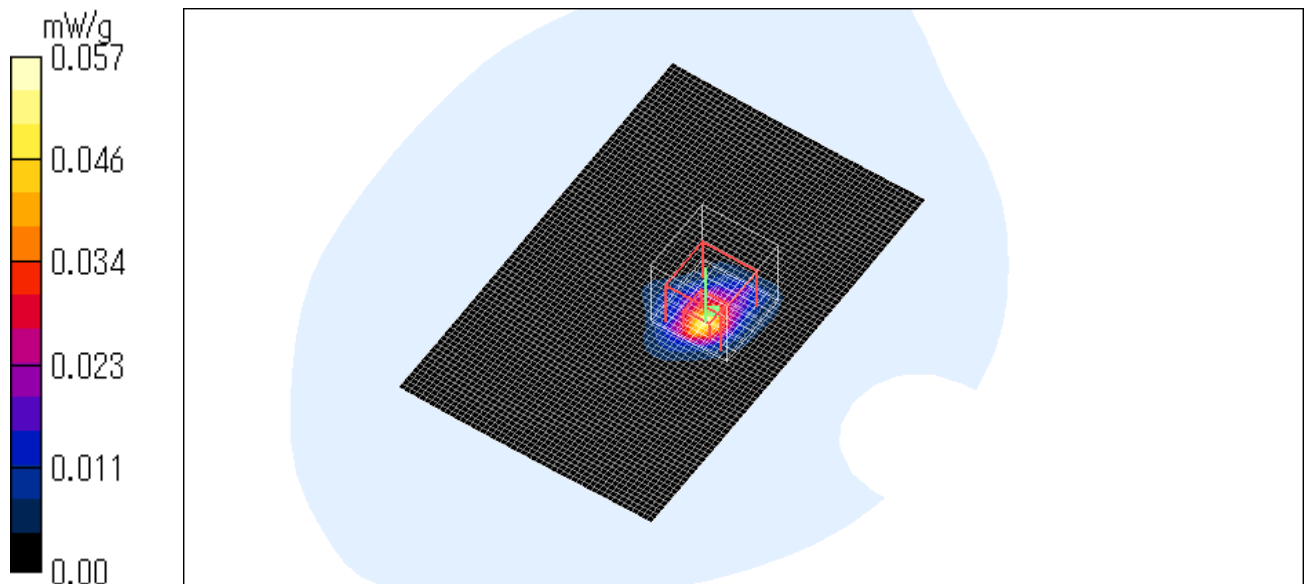

UL Apex Co., Ltd.

Head Office EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone: +81 596 24 8116

Facsimile: +81 596 24 8124

COOLPIX S6 / Body / Bottom / 2437 MHz / 11b(11Mbps)

Duty Cycle: 1:1

Medium parameters used: $f = 2450$ MHz; $\sigma = 1.96$ mho/m; $\epsilon_r = 50.1$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY4 (High Precision Assessment)

DASY4 Configuration:

Probe: EX3DV3 - SN3507; ConvF(7.72, 7.72, 7.72); Calibrated: 2005/04/12

Sensor-Surface: 2mm (Mechanical Surface Detection)

Electronics: DAE3 Sn509; Calibrated: 2005/05/26

Phantom: SAM 1196

Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 145

Area Scan (51x81x1): Measurement grid: dx=20mm, dy=20mm

Maximum value of SAR (interpolated) = 0.021 mW/g

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 1.70 V/m; Power Drift = -0.151 dB

Peak SAR (extrapolated) = 0.052 W/kg


SAR(1 g) = 0.016 mW/g; SAR(10 g) = 0.0042 mW/g

Maximum value of SAR (measured) = 0.028 mW/g

Test Date = 11/09/05

Ambient Temperature = 25.0 degree C.

Liquid Temperature = Before 24.0 degree C. , After 24.0 degree C.

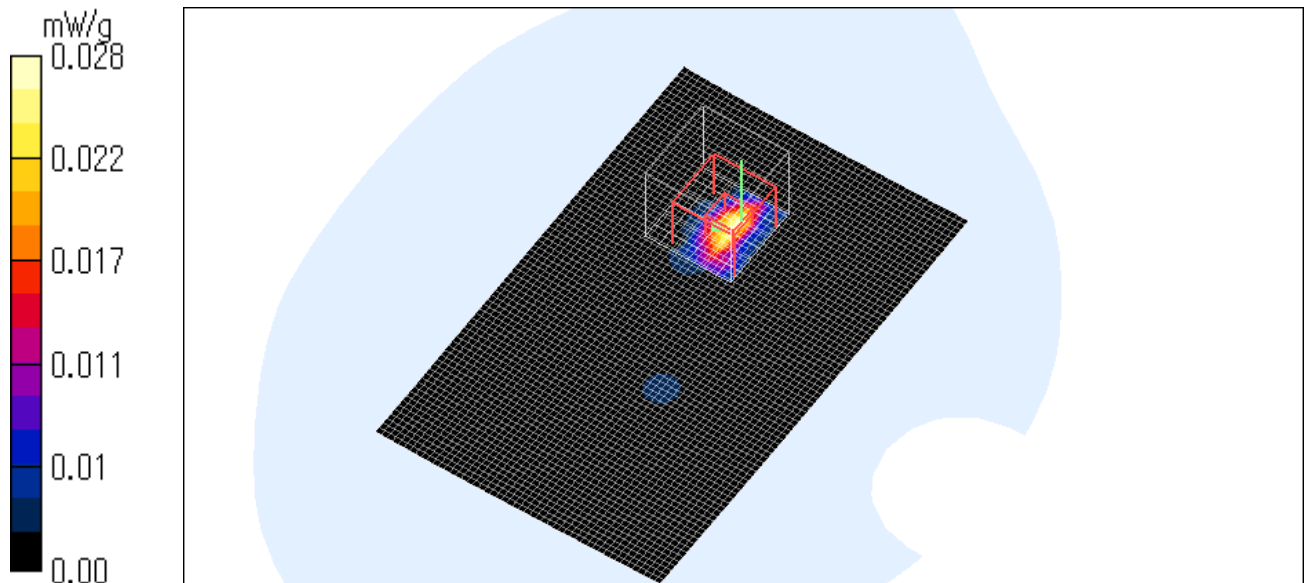

UL Apex Co., Ltd.

Head Office EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone: +81 596 24 8116

Facsimile: +81 596 24 8124

COOLPIX S6 / Body / Left Side / 2437 MHz / 11b(11Mbps)

Duty Cycle: 1:1

Medium parameters used: $f = 2450$ MHz; $\sigma = 1.96$ mho/m; $\epsilon_r = 50.1$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY4 (High Precision Assessment)

DASY4 Configuration:

Probe: EX3DV3 - SN3507; ConvF(7.72, 7.72, 7.72); Calibrated: 2005/04/12

Sensor-Surface: 2mm (Mechanical Surface Detection)

Electronics: DAE3 Sn509; Calibrated: 2005/05/26

Phantom: SAM 1196

Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 145

Area Scan (51x81x1): Measurement grid: dx=20mm, dy=20mm

Maximum value of SAR (interpolated) = 0.127 mW/g

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 5.46 V/m; Power Drift = -0.212 dB

Peak SAR (extrapolated) = 0.294 W/kg


SAR(1 g) = 0.068 mW/g; SAR(10 g) = 0.022 mW/g

Maximum value of SAR (measured) = 0.186 mW/g

Test Date = 11/09/05

Ambient Temperature = 25.0 degree C.

Liquid Temperature = Before 24.5 degree C. , After 24.5 degree C.

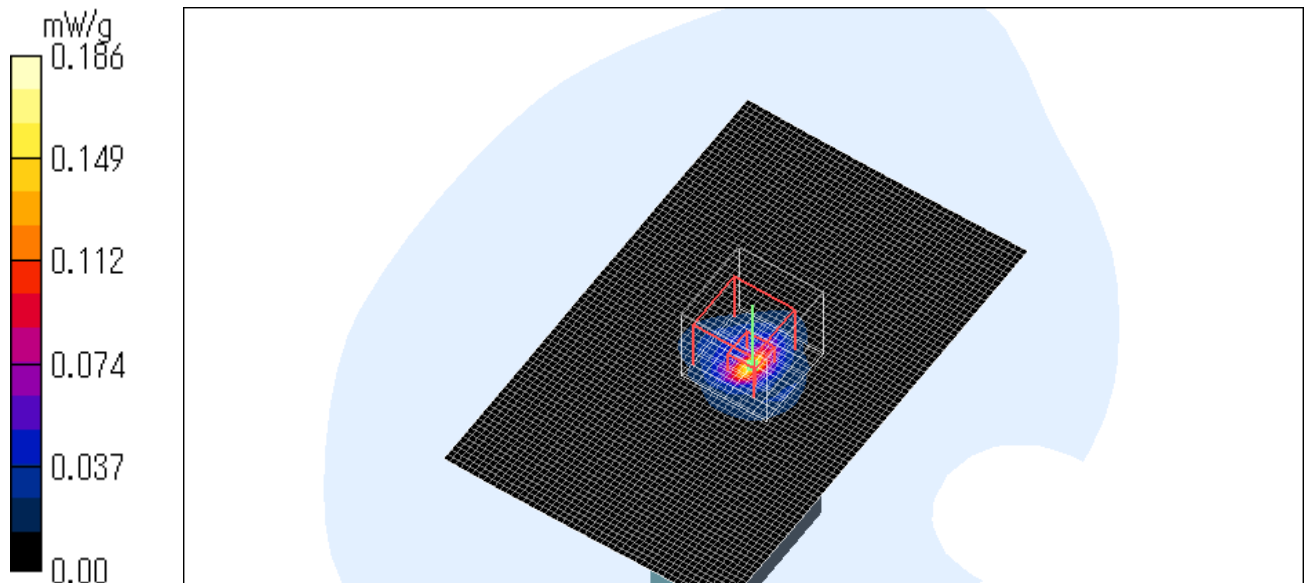

UL Apex Co., Ltd.

Head Office EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone: +81 596 24 8116

Facsimile: +81 596 24 8124

COOLPIX S6 /Body / Right Side / 2437 MHz / 11b(11Mbps)

Duty Cycle: 1:1

Medium parameters used: $f = 2450$ MHz; $\sigma = 1.96$ mho/m; $\epsilon_r = 50.1$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY4 (High Precision Assessment)

DASY4 Configuration:

Probe: EX3DV3 - SN3507; ConvF(7.72, 7.72, 7.72); Calibrated: 2005/04/12

Sensor-Surface: 2mm (Mechanical Surface Detection)

Electronics: DAE3 Sn509; Calibrated: 2005/05/26

Phantom: SAM 1196

Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 145

Area Scan (51x81x1): Measurement grid: $dx=20$ mm, $dy=20$ mm

Maximum value of SAR (interpolated) = 0.00 mW/g

Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 1.01 V/m; Power Drift = -0.247 dB

Peak SAR (extrapolated) = 0.01 W/kg


SAR(1 g) = 0.00345 mW/g; SAR(10 g) = 0.000767 mW/g

Maximum value of SAR (measured) = 0.01 mW/g

Test Date = 11/08/05

Ambient Temperature = 25.0 degree C.

Liquid Temperature = Before 24.0 degree C. , After 24.0 degree C.

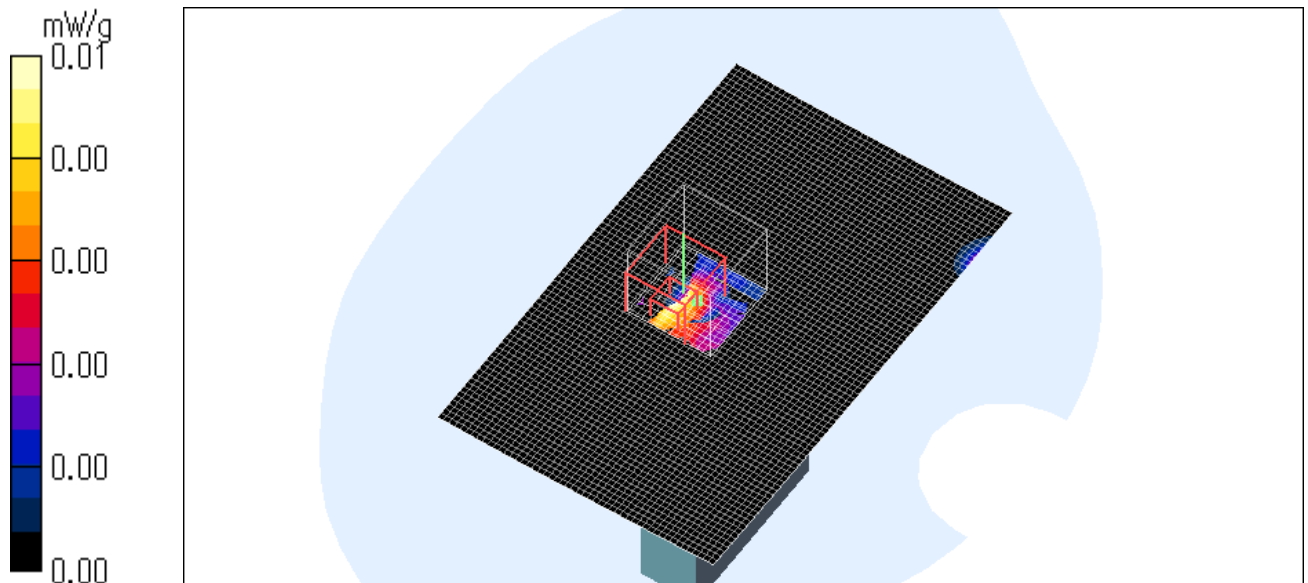

UL Apex Co., Ltd.

Head Office EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone: +81 596 24 8116

Facsimile: +81 596 24 8124

COOLPIX S6 / Body / Left Side / 2412 MHz / 11b(11Mbps)

Duty Cycle: 1:1

Medium parameters used: $f = 2450$ MHz; $\sigma = 1.96$ mho/m; $\epsilon_r = 50.1$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY4 (High Precision Assessment)

DASY4 Configuration:

Probe: EX3DV3 - SN3507; ConvF(7.72, 7.72, 7.72); Calibrated: 2005/04/12

Sensor-Surface: 2mm (Mechanical Surface Detection)Sensor-Surface: 0mm (Fix Surface)

Electronics: DAE3 Sn509; Calibrated: 2005/05/26

Phantom: SAM 1196

Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 145

Area Scan (51x81x1): Measurement grid: dx=20mm, dy=20mm

Maximum value of SAR (interpolated) = 0.097 mW/g

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 11.3 V/m; Power Drift = -0.229 dB

Peak SAR (extrapolated) = 0.415 W/kg


SAR(1 g) = 0.094 mW/g; SAR(10 g) = 0.029 mW/g

Maximum value of SAR (measured) = 0.216 mW/g

Test Date = 11/09/05

Ambient Temperature = 25.0 degree C.

Liquid Temperature = Before 24.0 degree C. , After 24.0 degree C.

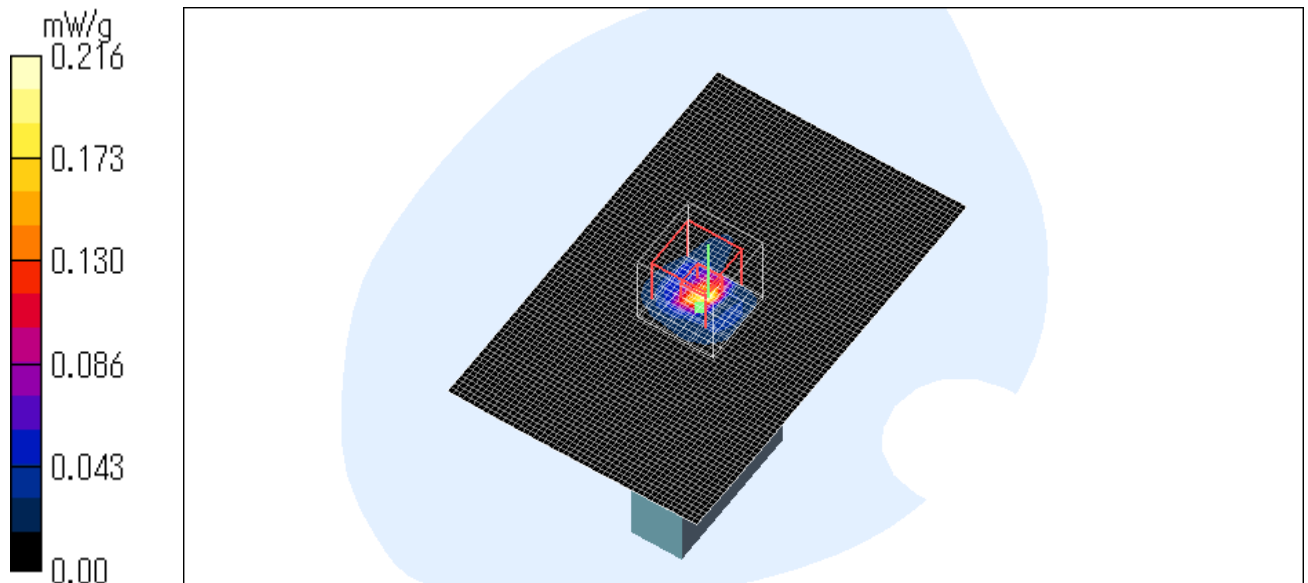

UL Apex Co., Ltd.

Head Office EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone: +81 596 24 8116

Facsimile: +81 596 24 8124

Z-axis scan at max SAR location

COOLPIX S6 / Body / Left Side / 2412 MHz / 11b(11Mbps)

Duty Cycle: 1:1

Medium parameters used: $f = 2450$ MHz; $\sigma = 1.96$ mho/m; $\epsilon_r = 50.1$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY4 (High Precision Assessment)

DASY4 Configuration:


Probe: EX3DV3 - SN3507; ConvF(7.72, 7.72, 7.72); Calibrated: 2005/04/12

Sensor-Surface: 2mm (Mechanical Surface Detection) Sensor-Surface: 0mm (Fix Surface)

Electronics: DAE3 Sn509; Calibrated: 2005/05/26

Phantom: SAM 1196

Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 145

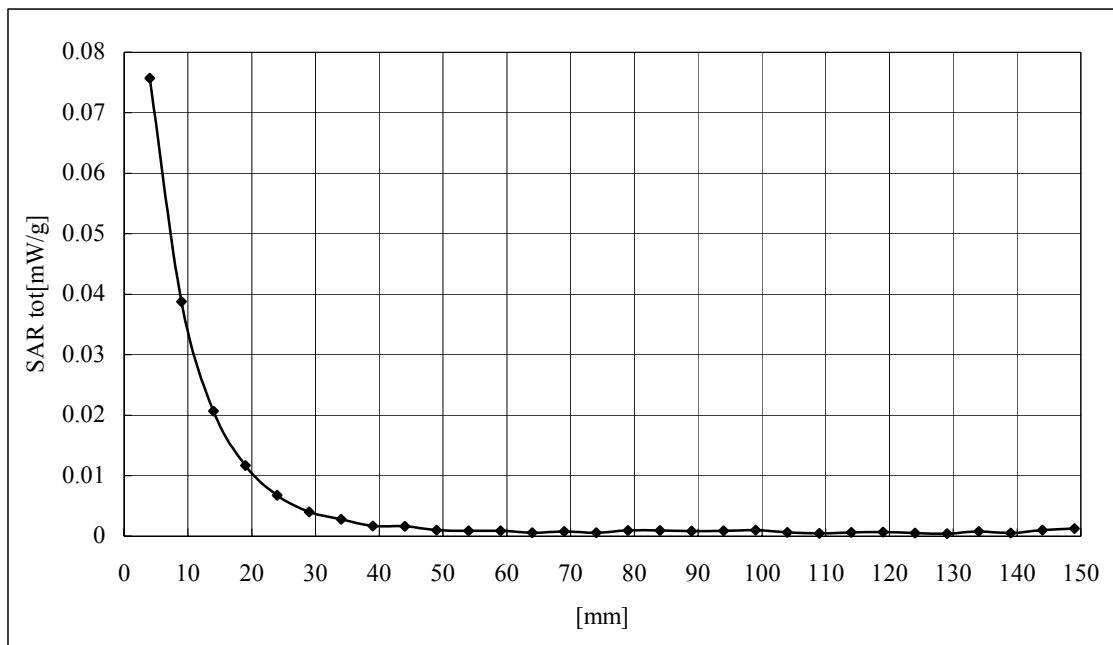

UL Apex Co., Ltd.

Head Office EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone: +81 596 24 8116

Facsimile: +81 596 24 8124

COOLPIX S6 / Body / Left Side / 2462 MHz / 11b(11Mbps)

Duty Cycle: 1:1

Medium parameters used: $f = 2450$ MHz; $\sigma = 1.96$ mho/m; $\epsilon_r = 50.1$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY4 (High Precision Assessment)

DASY4 Configuration:

Probe: EX3DV3 - SN3507; ConvF(7.72, 7.72, 7.72); Calibrated: 2005/04/12

Sensor-Surface: 2mm (Mechanical Surface Detection)

Electronics: DAE3 Sn509; Calibrated: 2005/05/26

Phantom: SAM 1196

Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 145

Area Scan (51x81x1): Measurement grid: $dx=20$ mm, $dy=20$ mm

Maximum value of SAR (interpolated) = 0.104 mW/g

Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 3.12 V/m; Power Drift = -0.272 dB

Peak SAR (extrapolated) = 0.254 W/kg


SAR(1 g) = 0.061 mW/g; SAR(10 g) = 0.020 mW/g

Maximum value of SAR (measured) = 0.151 mW/g

Test Date = 11/09/05

Ambient Temperature = 25.0 degree C.

Liquid Temperature = Before 24.0 degree C. , After 24.0 degree C.

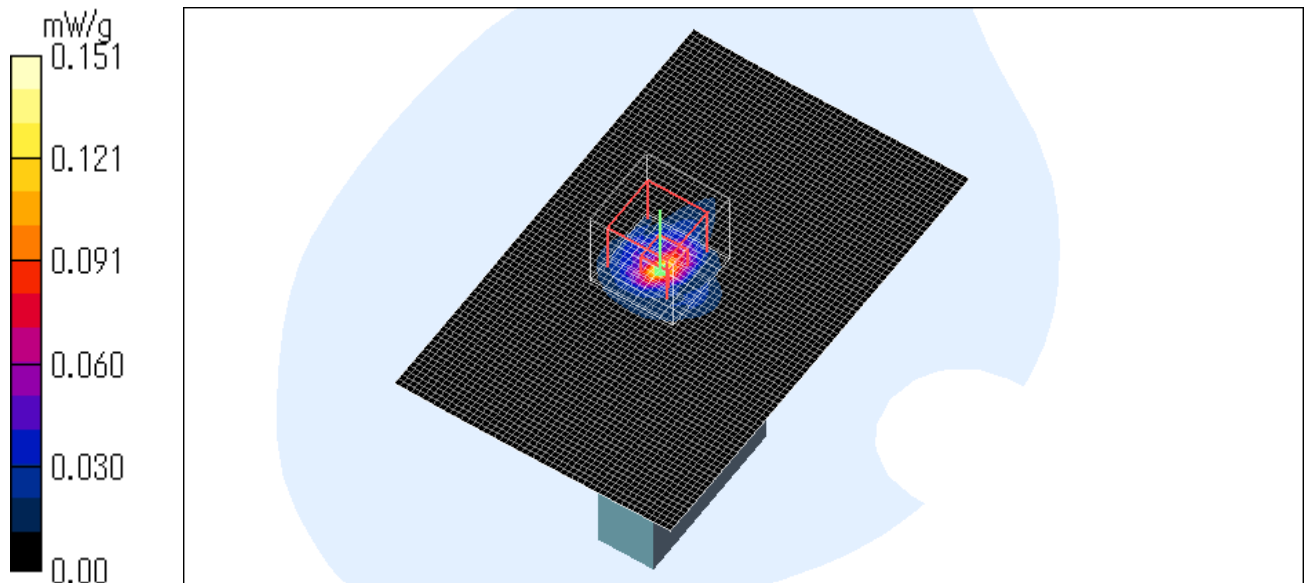

UL Apex Co., Ltd.

Head Office EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone: +81 596 24 8116

Facsimile: +81 596 24 8124

COOLPIX S6 / Body / Left Side 5mm / 2412 MHz / 11b(11Mbps)

Duty Cycle: 1:1

Medium parameters used: $f = 2450$ MHz; $\sigma = 2$ mho/m; $\epsilon_r = 50.3$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY4 (High Precision Assessment)

DASY4 Configuration:

Probe: EX3DV3 - SN3507; ConvF(7.72, 7.72, 7.72); Calibrated: 2005/04/12

Sensor-Surface: 2mm (Mechanical Surface Detection)

Electronics: DAE3 Sn509; Calibrated: 2005/05/26

Phantom: SAM 1196

Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 145

Area Scan (51x81x1): Measurement grid: dx=20mm, dy=20mm

Maximum value of SAR (interpolated) = 0.065 mW/g

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 4.39 V/m; Power Drift = 0.285 dB

Peak SAR (extrapolated) = 0.127 W/kg


SAR(1 g) = 0.046 mW/g; SAR(10 g) = 0.018 mW/g

Maximum value of SAR (measured) = 0.088 mW/g

Test Date = 11/10/05

Ambient Temperature = 24.8 degree C.

Liquid Temperature = Before 24.0 degree C. , After 24.0 degree C.

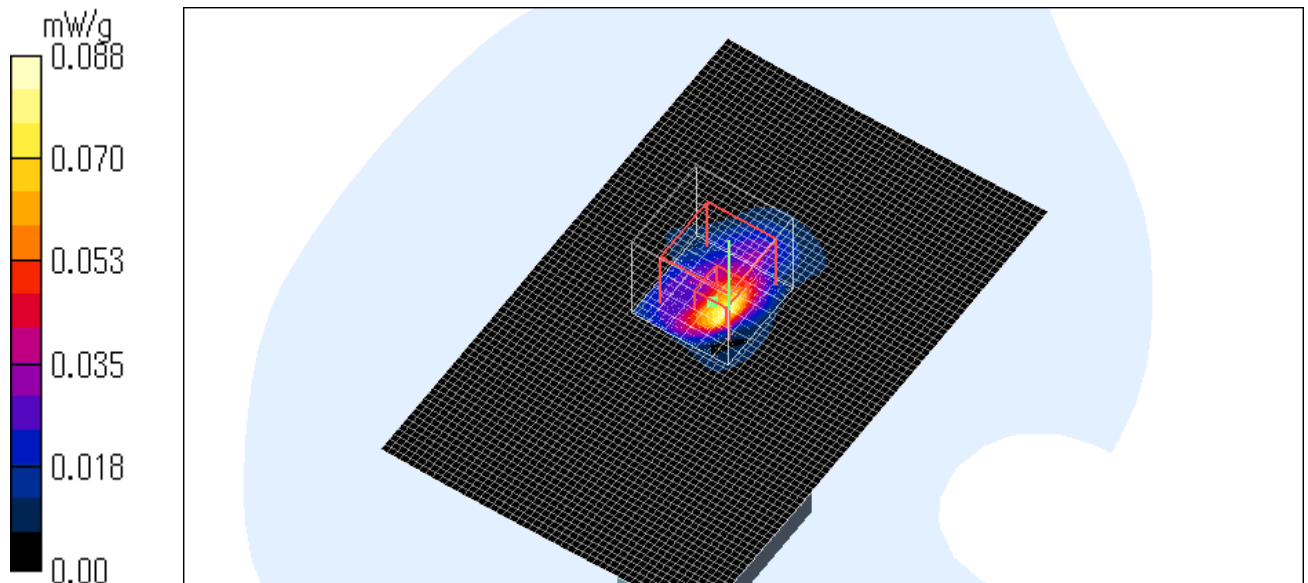

UL Apex Co., Ltd.

Head Office EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone: +81 596 24 8116

Facsimile: +81 596 24 8124

COOLPIX S6 / Body / Left Side 10mm / 2412 MHz / 11b(11Mbps)

Duty Cycle: 1:1

Medium parameters used: $f = 2450$ MHz; $\sigma = 2$ mho/m; $\epsilon_r = 50.3$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY4 (High Precision Assessment)

DASY4 Configuration:

Probe: EX3DV3 - SN3507; ConvF(7.72, 7.72, 7.72); Calibrated: 2005/04/12

Sensor-Surface: 2mm (Mechanical Surface Detection)

Electronics: DAE3 Sn509; Calibrated: 2005/05/26

Phantom: SAM 1196

Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 145

Area Scan (51x81x1): Measurement grid: $dx=20$ mm, $dy=20$ mm

Maximum value of SAR (interpolated) = 0.027 mW/g

Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 1.24 V/m; Power Drift = -0.263 dB

Peak SAR (extrapolated) = 0.029 W/kg


SAR(1 g) = 0.012 mW/g; SAR(10 g) = 0.00542 mW/g

Maximum value of SAR (measured) = 0.017 mW/g

Test Date = 11/10/05

Ambient Temperature = 24.8 degree C.

Liquid Temperature = Before 24.0 degree C. , After 24.0 degree C.

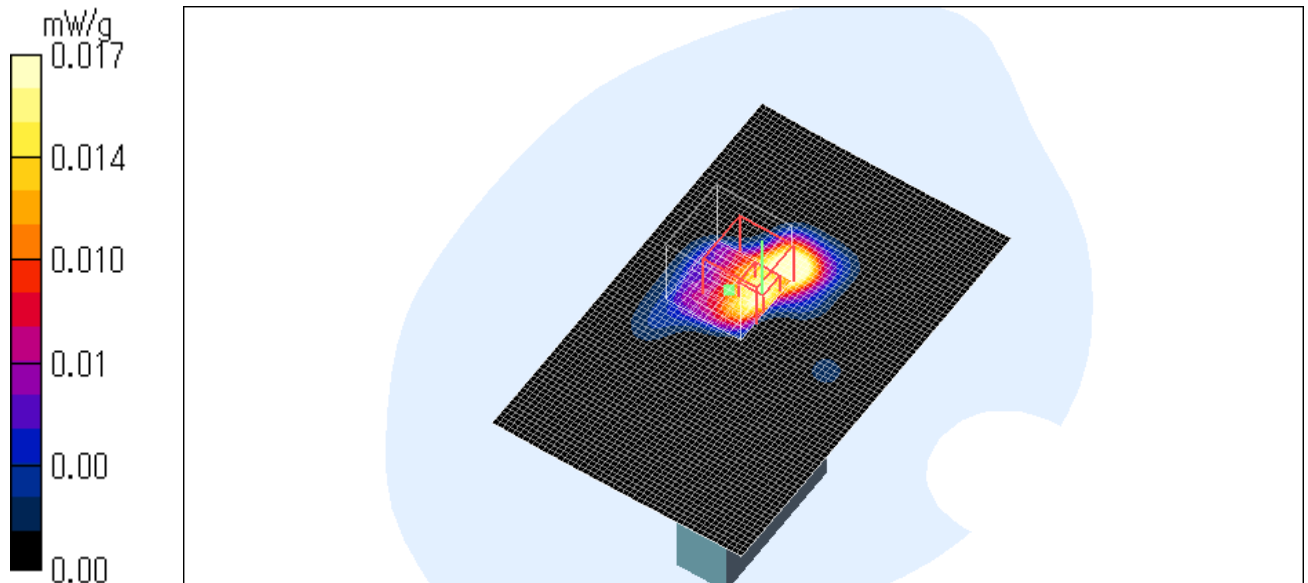

UL Apex Co., Ltd.

Head Office EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone: +81 596 24 8116

Facsimile: +81 596 24 8124

COOLPIX S6 / Body / Left Side 15mm / 2412 MHz / 11b(11Mbps)

Duty Cycle: 1:1

Medium parameters used: $f = 2450$ MHz; $\sigma = 2$ mho/m; $\epsilon_r = 50.3$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY4 (High Precision Assessment)

DASY4 Configuration:

Probe: EX3DV3 - SN3507; ConvF(7.72, 7.72, 7.72); Calibrated: 2005/04/12

Sensor-Surface: 2mm (Mechanical Surface Detection)

Electronics: DAE3 Sn509; Calibrated: 2005/05/26

Phantom: SAM 1196

Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 145

Area Scan (51x81x1): Measurement grid: $dx=20$ mm, $dy=20$ mm

Maximum value of SAR (interpolated) = 0.01 mW/g

Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 1.29 V/m; Power Drift = -0.223 dB

Peak SAR (extrapolated) = 0.013 W/kg


SAR(1 g) = 0.00592 mW/g; SAR(10 g) = 0.00239 mW/g

Maximum value of SAR (measured) = 0.01 mW/g

Test Date = 11/10/05

Ambient Temperature = 24.8 degree C.

Liquid Temperature = Before 24.0 degree C. , After 24.0 degree C.

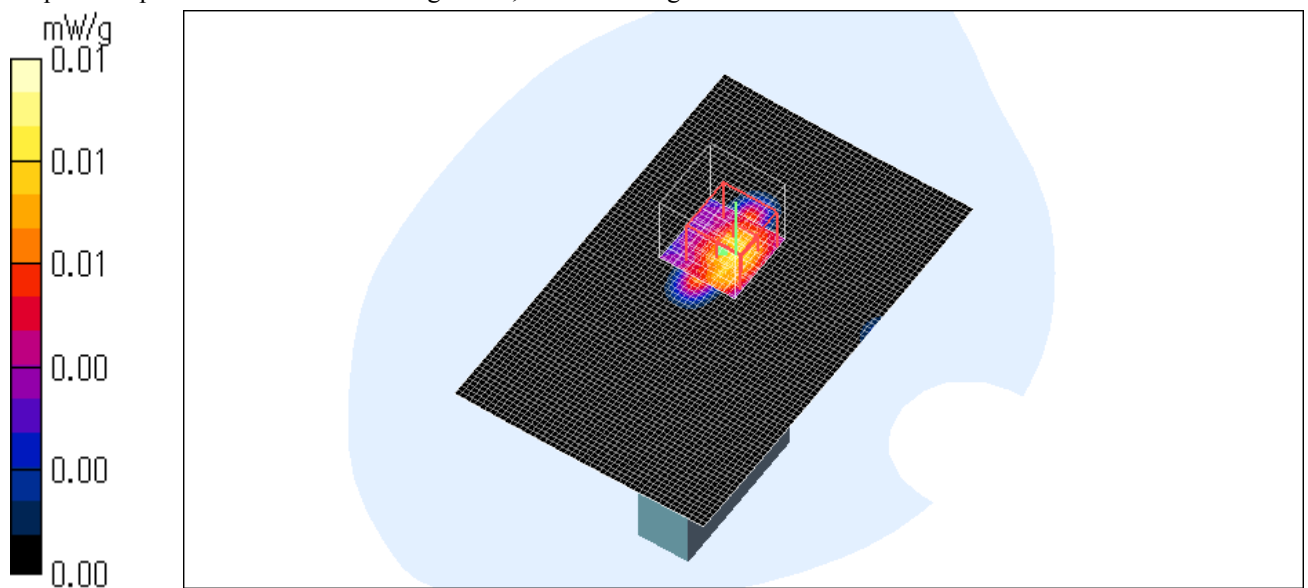

UL Apex Co., Ltd.

Head Office EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone: +81 596 24 8116

Facsimile: +81 596 24 8124

COOLPIX S6 / Body / Left side/ 2437 MHz / 11g(9Mbps)

B 11g Lside 9Mbps

Duty Cycle: 1:1

Medium parameters used: $f = 2450$ MHz; $\sigma = 2$ mho/m; $\epsilon_r = 50.3$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY4 (High Precision Assessment)

DASY4 Configuration:

Probe: EX3DV3 - SN3507; ConvF(7.72, 7.72, 7.72); Calibrated: 2005/04/12

Sensor-Surface: 2mm (Mechanical Surface Detection)

Electronics: DAE3 Sn509; Calibrated: 2005/05/26

Phantom: SAM 1196

Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 145

Area Scan (51x81x1): Measurement grid: dx=20mm, dy=20mm

Maximum value of SAR (interpolated) = 0.090 mW/g

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 9.02 V/m; Power Drift = -0.266 dB

Peak SAR (extrapolated) = 0.315 W/kg


SAR(1 g) = 0.070 mW/g; SAR(10 g) = 0.023 mW/g

Maximum value of SAR (measured) = 0.210 mW/g

Test Date = 11/10/05

Ambient Temperature = 24.8 degree C.

Liquid Temperature = Before 23.5 degree C. , After 23.5 degree C.

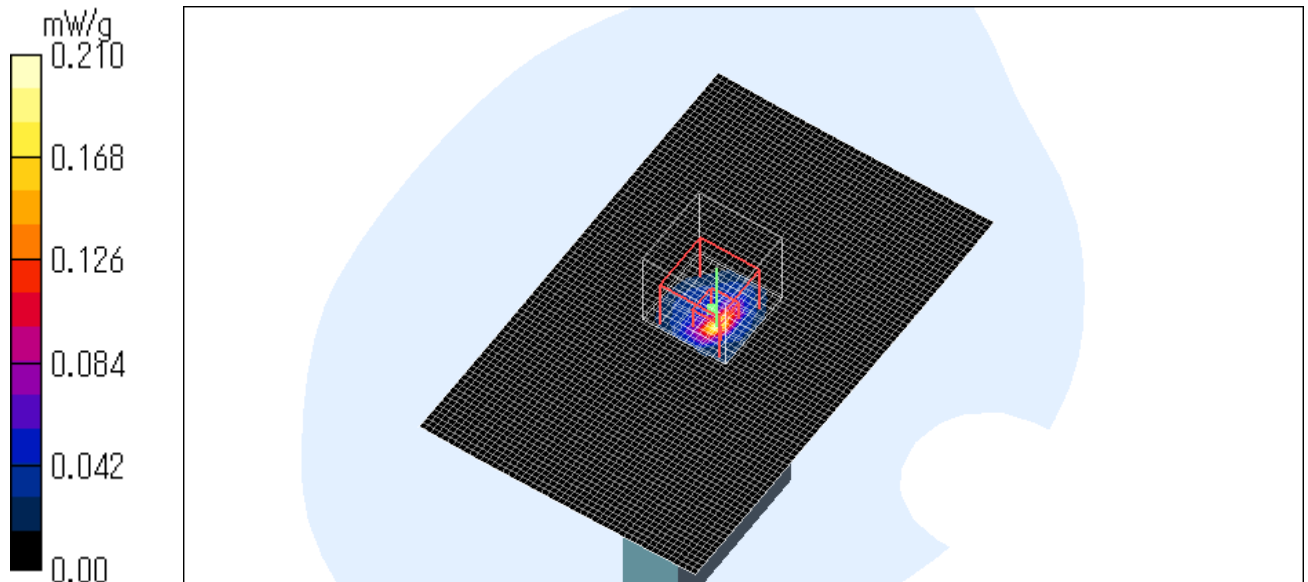

UL Apex Co., Ltd.

Head Office EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone: +81 596 24 8116

Facsimile: +81 596 24 8124

COOLPIX S6 / Body / Left side/ 2437 MHz / 11g(12Mbps)

Duty Cycle: 1:1

Medium parameters used: $f = 2450$ MHz; $\sigma = 2$ mho/m; $\epsilon_r = 50.3$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY4 (High Precision Assessment)

DASY4 Configuration:

Probe: EX3DV3 - SN3507; ConvF(7.72, 7.72, 7.72); Calibrated: 2005/04/12

Sensor-Surface: 2mm (Mechanical Surface Detection)

Electronics: DAE3 Sn509; Calibrated: 2005/05/26

Phantom: SAM 1196

Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 145

Area Scan (51x81x1): Measurement grid: $dx=20$ mm, $dy=20$ mm

Maximum value of SAR (interpolated) = 0.090 mW/g

Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 7.96 V/m; Power Drift = -0.210 dB

Peak SAR (extrapolated) = 0.346 W/kg


SAR(1 g) = 0.079 mW/g; SAR(10 g) = 0.025 mW/g

Maximum value of SAR (measured) = 0.202 mW/g

Test Date = 11/10/05

Ambient Temperature = 24.8 degree C.

Liquid Temperature = Before 23.5 degree C. , After 23.5 degree C.

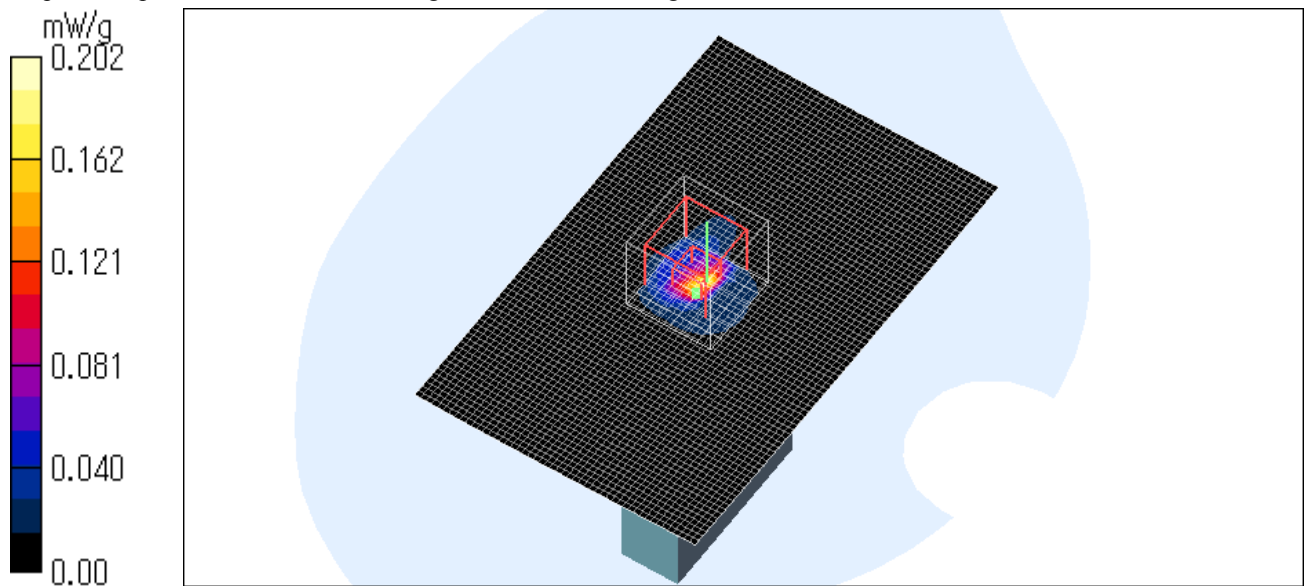

UL Apex Co., Ltd.

Head Office EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone: +81 596 24 8116

Facsimile: +81 596 24 8124

COOLPIX S6 / Body / Left side/ 2437 MHz / 11g(36Mbps)

Duty Cycle: 1:1

Medium parameters used: $f = 2450$ MHz; $\sigma = 2$ mho/m; $\epsilon_r = 50.3$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY4 (High Precision Assessment)

DASY4 Configuration:

Probe: EX3DV3 - SN3507; ConvF(7.72, 7.72, 7.72); Calibrated: 2005/04/12

Sensor-Surface: 2mm (Mechanical Surface Detection)

Electronics: DAE3 Sn509; Calibrated: 2005/05/26

Phantom: SAM 1196

Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 145

Area Scan (51x81x1): Measurement grid: $dx=20$ mm, $dy=20$ mm

Maximum value of SAR (interpolated) = 0.106 mW/g

Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 8.53 V/m; Power Drift = -0.298 dB

Peak SAR (extrapolated) = 0.332 W/kg


SAR(1 g) = 0.078 mW/g; SAR(10 g) = 0.024 mW/g

Maximum value of SAR (measured) = 0.184 mW/g

Test Date = 11/10/05

Ambient Temperature = 24.8 degree C.

Liquid Temperature = Before 23.5 degree C. , After 23.5 degree C.

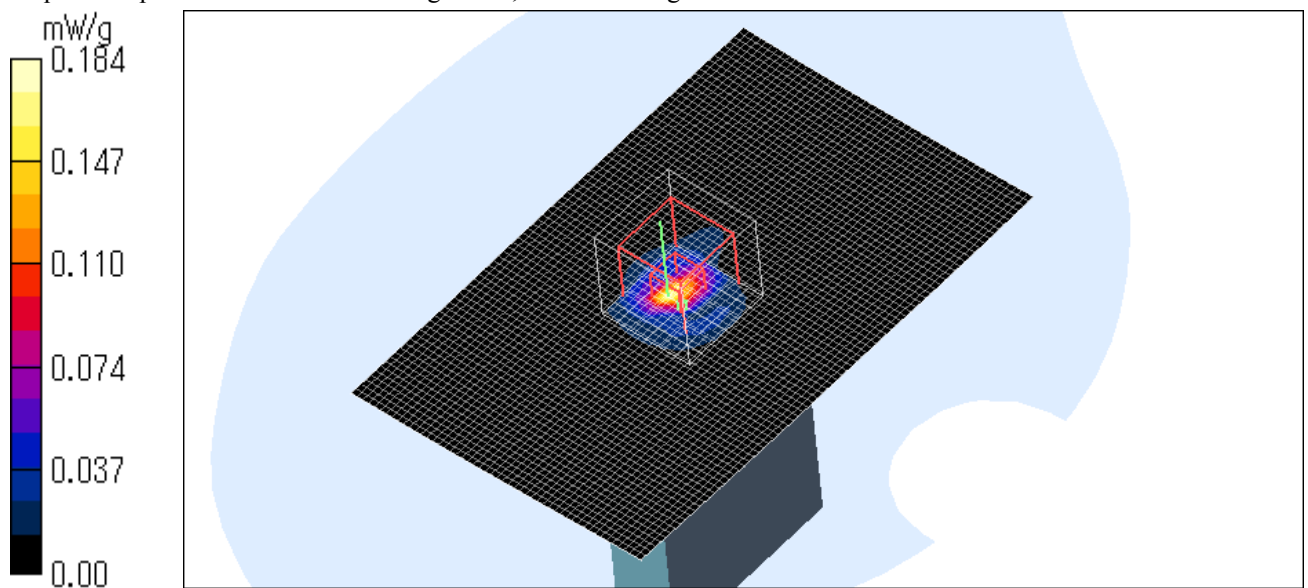

UL Apex Co., Ltd.

Head Office EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone: +81 596 24 8116

Facsimile: +81 596 24 8124

COOLPIX S6 / Body / Left side/ 2437 MHz / 11g(54Mbps)

Duty Cycle: 1:1

Medium parameters used: $f = 2450 \text{ MHz}$; $\sigma = 2 \text{ mho/m}$; $\epsilon_r = 50.3$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Measurement Standard: DASY4 (High Precision Assessment)

DASY4 Configuration:

Probe: EX3DV3 - SN3507; ConvF(7.72, 7.72, 7.72); Calibrated: 2005/04/12

Sensor-Surface: 2mm (Mechanical Surface Detection)

Electronics: DAE3 Sn509; Calibrated: 2005/05/26

Phantom: SAM 1196

Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 145

Area Scan (51x81x1): Measurement grid: $dx=20\text{mm}$, $dy=20\text{mm}$

Maximum value of SAR (interpolated) = 0.081 mW/g

Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 9.79 V/m ; Power Drift = -0.238 dB

Peak SAR (extrapolated) = 0.303 W/kg


SAR(1 g) = 0.071 mW/g ; SAR(10 g) = 0.022 mW/g

Maximum value of SAR (measured) = 0.149 mW/g

Test Date = 11/10/05

Ambient Temperature = 24.8 degree C.

Liquid Temperature = Before 23.5 degree C. , After 23.5 degree C.

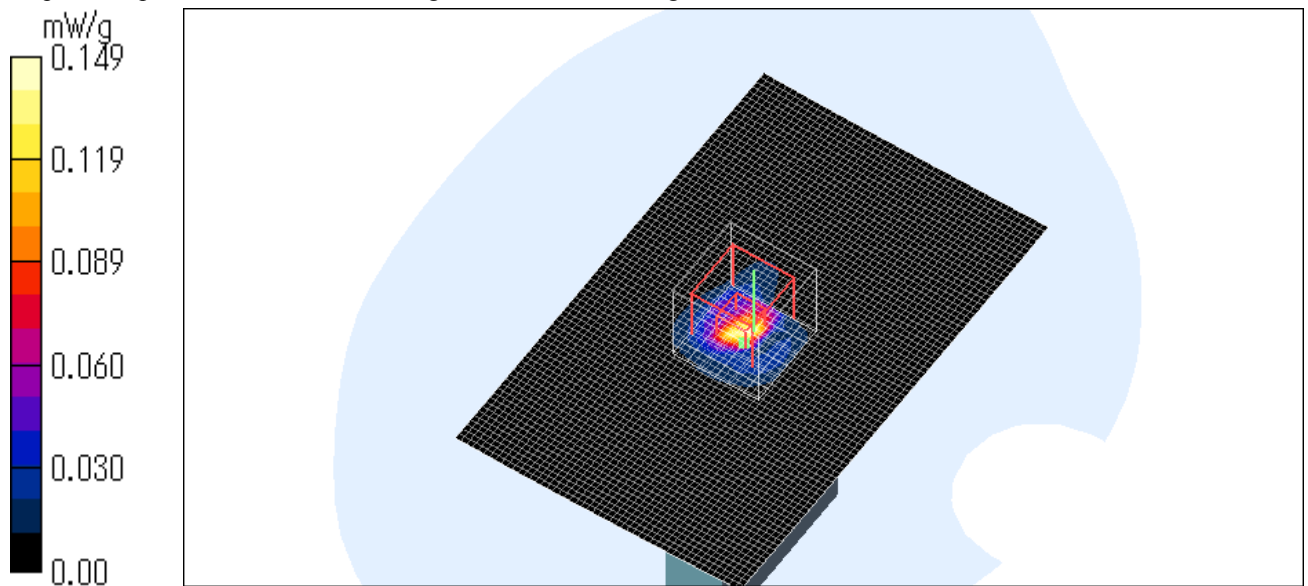

UL Apex Co., Ltd.

Head Office EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone: +81 596 24 8116

Facsimile: +81 596 24 8124

COOLPIX S6 / Body / Front / 2437 MHz / 11g(12Mbps)

Duty Cycle: 1:1

Medium parameters used: $f = 2450$ MHz; $\sigma = 2$ mho/m; $\epsilon_r = 50.3$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY4 (High Precision Assessment)

DASY4 Configuration:

Probe: EX3DV3 - SN3507; ConvF(7.72, 7.72, 7.72); Calibrated: 2005/04/12

Sensor-Surface: 2mm (Mechanical Surface Detection)

Electronics: DAE3 Sn509; Calibrated: 2005/05/26

Phantom: SAM 1196

Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 145

Area Scan (51x81x1): Measurement grid: $dx=20$ mm, $dy=20$ mm

Maximum value of SAR (interpolated) = 0.072 mW/g

Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 3.23 V/m; Power Drift = -0.279 dB

Peak SAR (extrapolated) = 0.066 W/kg


SAR(1 g) = 0.026 mW/g; SAR(10 g) = 0.00996 mW/g

Maximum value of SAR (measured) = 0.047 mW/g

Test Date = 11/10/05

Ambient Temperature = 24.8 degree C.

Liquid Temperature = Before 23.6 degree C. , After 23.6 degree C.

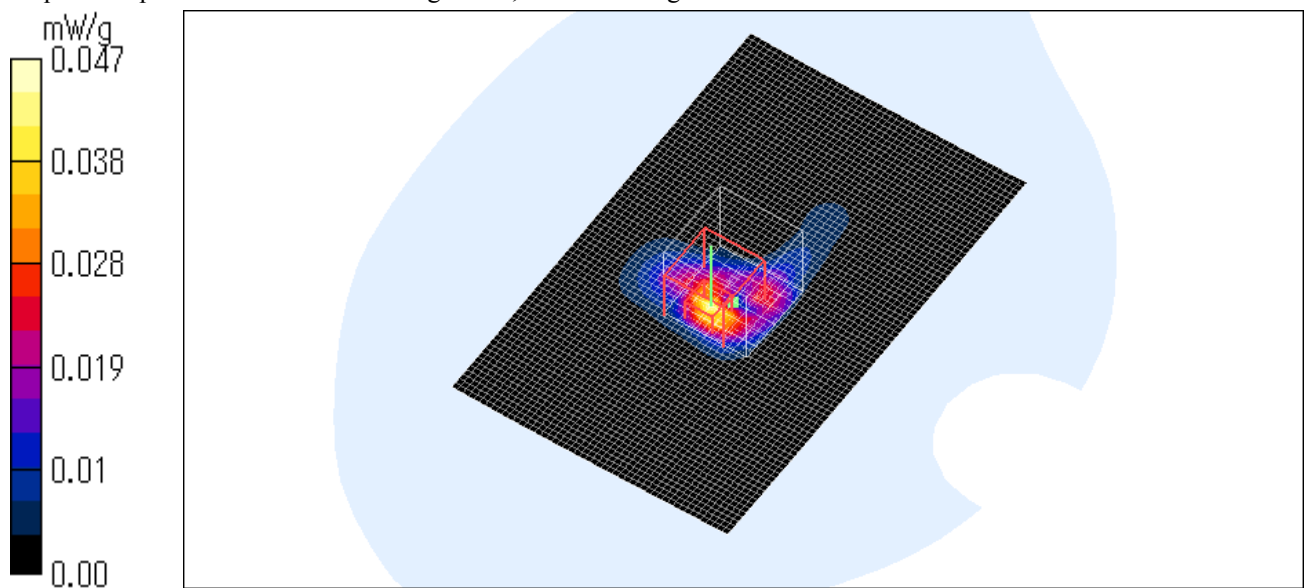

UL Apex Co., Ltd.

Head Office EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone: +81 596 24 8116

Facsimile: +81 596 24 8124

COOLPIX S6 / Body / Back / 2437 MHz / 11g(12Mbps)

Duty Cycle: 1:1

Medium parameters used: $f = 2450$ MHz; $\sigma = 2$ mho/m; $\epsilon_r = 50.3$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY4 (High Precision Assessment)

DASY4 Configuration:

Probe: EX3DV3 - SN3507; ConvF(7.72, 7.72, 7.72); Calibrated: 2005/04/12

Sensor-Surface: 2mm (Mechanical Surface Detection)

Electronics: DAE3 Sn509; Calibrated: 2005/05/26

Phantom: SAM 1196

Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 145

Area Scan (51x81x1): Measurement grid: dx=20mm, dy=20mm

Maximum value of SAR (interpolated) = 0.026 mW/g

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 3.17 V/m; Power Drift = -0.231 dB

Peak SAR (extrapolated) = 0.048 W/kg


SAR(1 g) = 0.022 mW/g; SAR(10 g) = 0.00925 mW/g

Maximum value of SAR (measured) = 0.036 mW/g

Test Date = 11/10/05

Ambient Temperature = 24.8 degree C.

Liquid Temperature = Before 23.6 degree C. , After 23.7degree C.

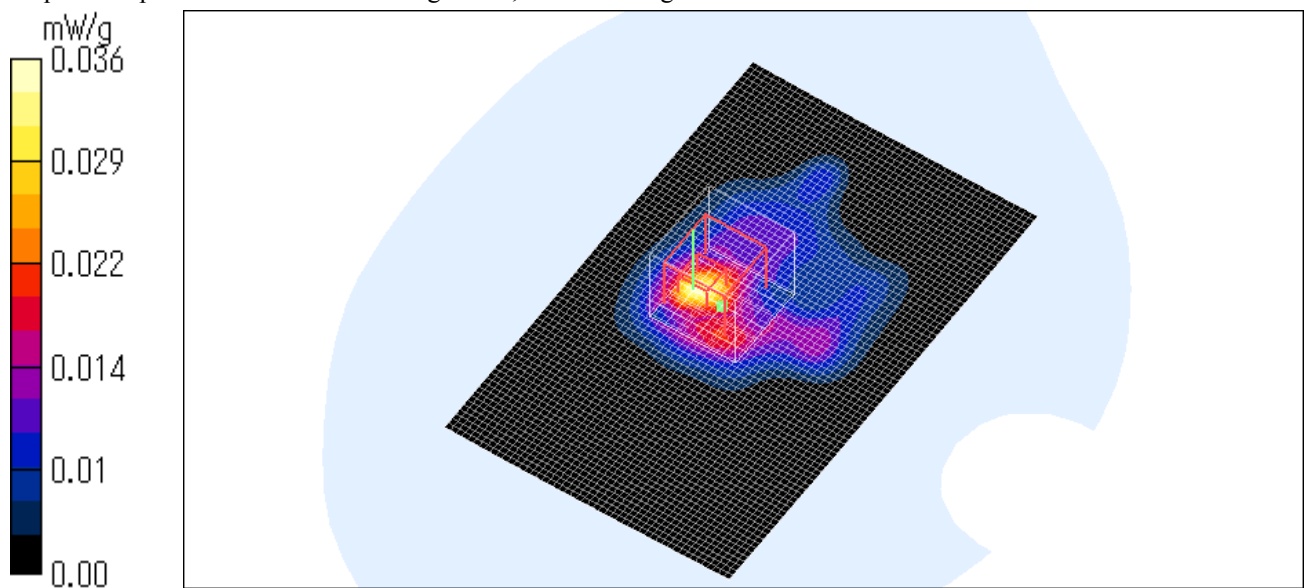

UL Apex Co., Ltd.

Head Office EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone: +81 596 24 8116

Facsimile: +81 596 24 8124

COOLPIX S6 / Body / Top / 2437 MHz / 11g(12Mbps)

Duty Cycle: 1:1

Medium parameters used: $f = 2450$ MHz; $\sigma = 2$ mho/m; $\epsilon_r = 50.3$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY4 (High Precision Assessment)

DASY4 Configuration:

Probe: EX3DV3 - SN3507; ConvF(7.72, 7.72, 7.72); Calibrated: 2005/04/12

Sensor-Surface: 2mm (Mechanical Surface Detection)

Electronics: DAE3 Sn509; Calibrated: 2005/05/26

Phantom: SAM 1196

Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 145

Area Scan (51x81x1): Measurement grid: $dx=20$ mm, $dy=20$ mm

Maximum value of SAR (interpolated) = 0.058 mW/g

Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 3.23 V/m; Power Drift = -0.248 dB

Peak SAR (extrapolated) = 0.110 W/kg


SAR(1 g) = 0.025 mW/g; SAR(10 g) = 0.00904 mW/g

Maximum value of SAR (measured) = 0.042 mW/g

Test Date = 11/10/05

Ambient Temperature = 24.8 degree C.

Liquid Temperature = Before 24.0 degree C. , After 24.0 degree C.

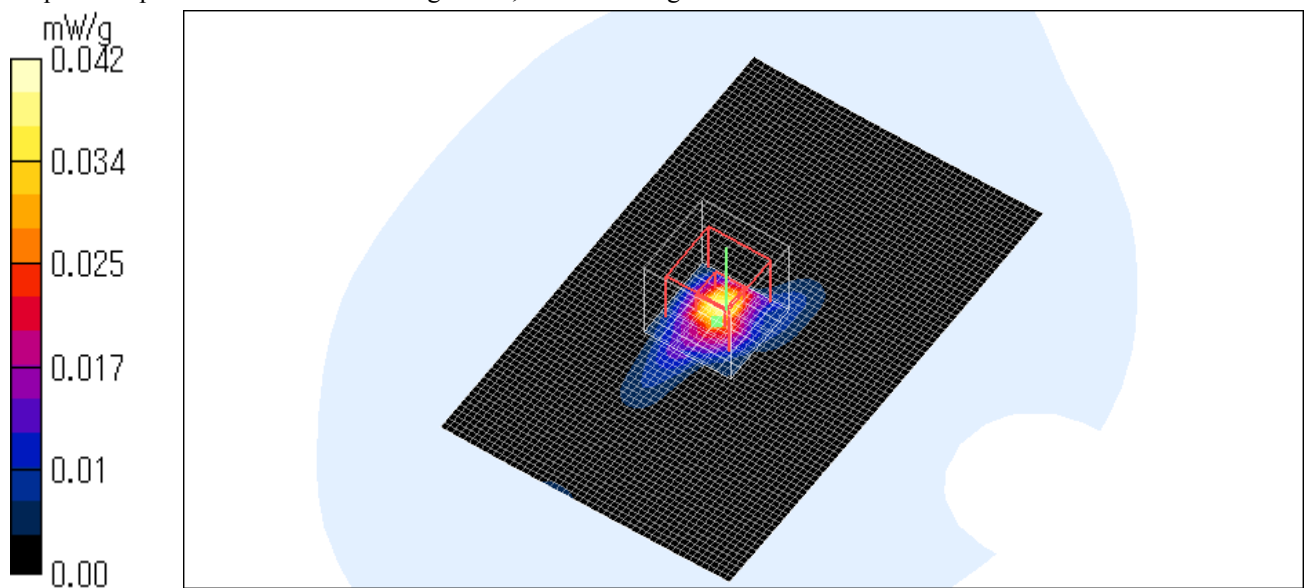

UL Apex Co., Ltd.

Head Office EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone: +81 596 24 8116

Facsimile: +81 596 24 8124

COOLPIX S6 / Body / Bottom / 2437 MHz / 11g(12Mbps)

Duty Cycle: 1:1

Medium parameters used: $f = 2450$ MHz; $\sigma = 2$ mho/m; $\epsilon_r = 50.3$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY4 (High Precision Assessment)

DASY4 Configuration:

Probe: EX3DV3 - SN3507; ConvF(7.72, 7.72, 7.72); Calibrated: 2005/04/12

Sensor-Surface: 2mm (Mechanical Surface Detection)

Electronics: DAE3 Sn509; Calibrated: 2005/05/26

Phantom: SAM 1196

Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 145

Area Scan (51x81x1): Measurement grid: $dx=20$ mm, $dy=20$ mm

Maximum value of SAR (interpolated) = 0.010 mW/g

Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 1.22 V/m; Power Drift = -0.207 dB

Peak SAR (extrapolated) = 0.041 W/kg


SAR(1 g) = 0.010 mW/g; SAR(10 g) = 0.00278 mW/g

Maximum value of SAR (measured) = 0.020 mW/g

Test Date = 11/10/05

Ambient Temperature = 24.8 degree C.

Liquid Temperature = Before 24.0 degree C. , After 24.0 degree C.

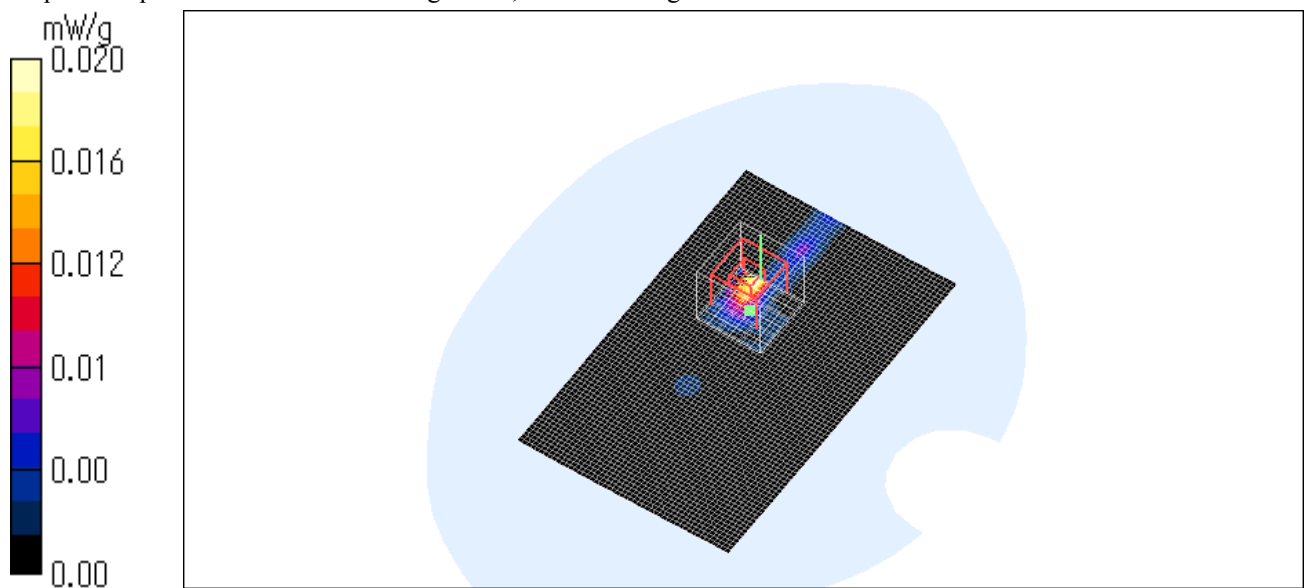

UL Apex Co., Ltd.

Head Office EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone: +81 596 24 8116

Facsimile: +81 596 24 8124

COOLPIX S6 / Body / Right Side / 2437 MHz / 11g(12Mbps)

Duty Cycle: 1:1

Medium parameters used: $f = 2450$ MHz; $\sigma = 2$ mho/m; $\epsilon_r = 50.3$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY4 (High Precision Assessment)

DASY4 Configuration:

Probe: EX3DV3 - SN3507; ConvF(7.72, 7.72, 7.72); Calibrated: 2005/04/12

Sensor-Surface: 2mm (Mechanical Surface Detection)

Electronics: DAE3 Sn509; Calibrated: 2005/05/26

Phantom: SAM 1196

Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 145

Area Scan (51x81x1): Measurement grid: dx=20mm, dy=20mm

Maximum value of SAR (interpolated) = 0.00 mW/g

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 0.828 V/m; Power Drift = -0.249 dB

Peak SAR (extrapolated) = 0.00 W/kg


SAR(1 g) = 0.00122 mW/g; SAR(10 g) = 0.000278 mW/g

Maximum value of SAR (measured) = 0.00 mW/g

Test Date = 11/10/05

Ambient Temperature = 24.8 degree C.

Liquid Temperature = Before 24.0 degree C. , After 24.0 degree C.

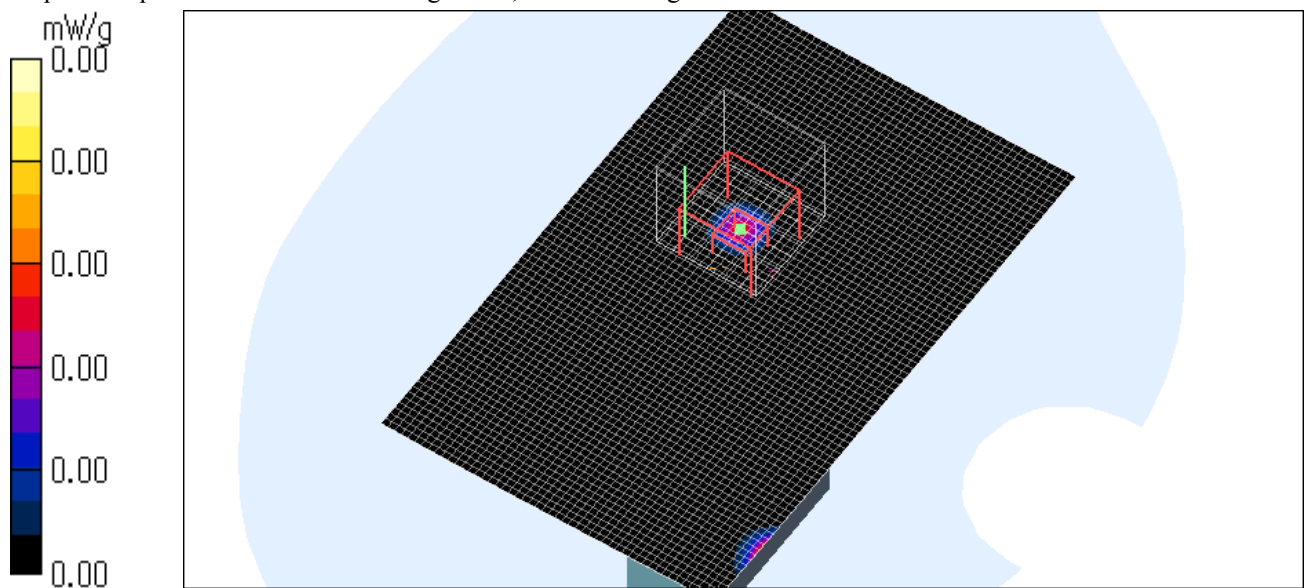

UL Apex Co., Ltd.

Head Office EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone: +81 596 24 8116

Facsimile: +81 596 24 8124

COOLPIX S6 / Body / Left side/ 2412 MHz / 11g(12Mbps)

Duty Cycle: 1:1

Medium parameters used: $f = 2450$ MHz; $\sigma = 2$ mho/m; $\epsilon_r = 50.3$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY4 (High Precision Assessment)

DASY4 Configuration:

Probe: EX3DV3 - SN3507; ConvF(7.72, 7.72, 7.72); Calibrated: 2005/04/12

Sensor-Surface: 2mm (Mechanical Surface Detection)

Electronics: DAE3 Sn509; Calibrated: 2005/05/26

Phantom: SAM 1196

Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 145

Area Scan (51x81x1): Measurement grid: $dx=20$ mm, $dy=20$ mm

Maximum value of SAR (interpolated) = 0.211 mW/g

Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 4.01 V/m; Power Drift = -0.255 dB

Peak SAR (extrapolated) = 0.335 W/kg


SAR(1 g) = 0.075 mW/g; SAR(10 g) = 0.024 mW/g

Maximum value of SAR (measured) = 0.205 mW/g

Test Date = 11/10/05

Ambient Temperature = 24.8 degree C.

Liquid Temperature = Before 24.0 degree C. , After 24.0 degree C.

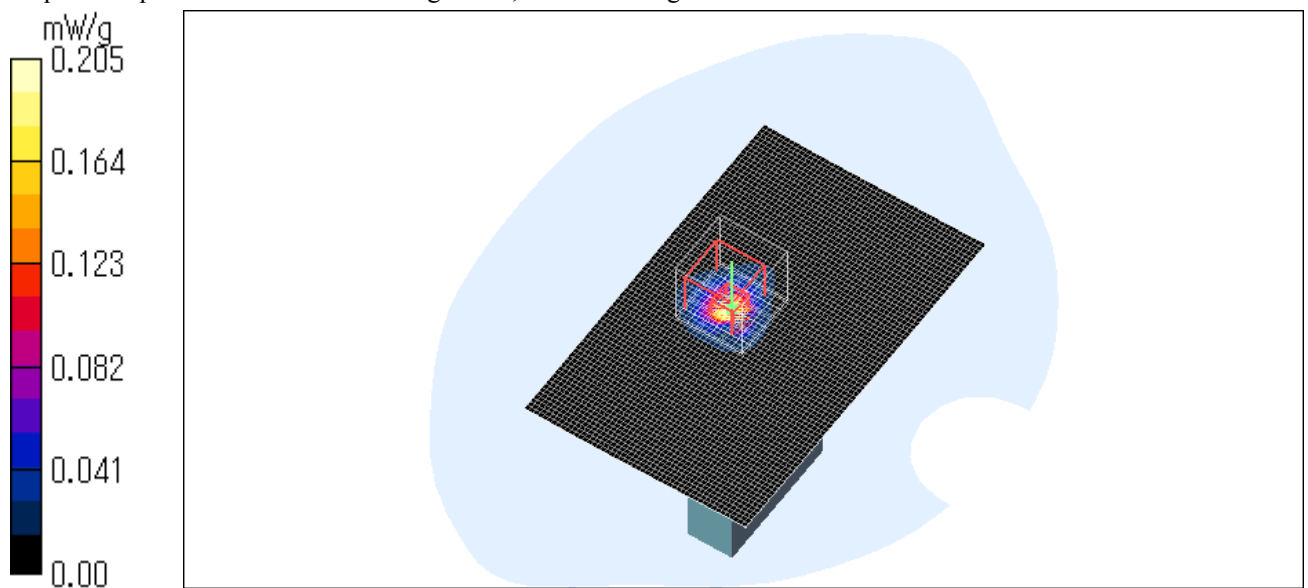

UL Apex Co., Ltd.

Head Office EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone: +81 596 24 8116

Facsimile: +81 596 24 8124

COOLPIX S6 / Body / Left side/ 2462 MHz / 11g(12Mbps)

Duty Cycle: 1:1

Medium parameters used: $f = 2450$ MHz; $\sigma = 2$ mho/m; $\epsilon_r = 50.3$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY4 (High Precision Assessment)

DASY4 Configuration:

Probe: EX3DV3 - SN3507; ConvF(7.72, 7.72, 7.72); Calibrated: 2005/04/12

Sensor-Surface: 2mm (Mechanical Surface Detection)

Electronics: DAE3 Sn509; Calibrated: 2005/05/26

Phantom: SAM 1196

Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 145

Area Scan (51x81x1): Measurement grid: dx=20mm, dy=20mm

Maximum value of SAR (interpolated) = 0.058 mW/g

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 5.66 V/m; Power Drift = -0.282 dB

Peak SAR (extrapolated) = 0.232 W/kg


SAR(1 g) = 0.053 mW/g; SAR(10 g) = 0.017 mW/g

Maximum value of SAR (measured) = 0.105 mW/g

Test Date = 11/10/05

Ambient Temperature = 24.8 degree C.

Liquid Temperature = Before 24.0 degree C. , After 24.0 degree C.

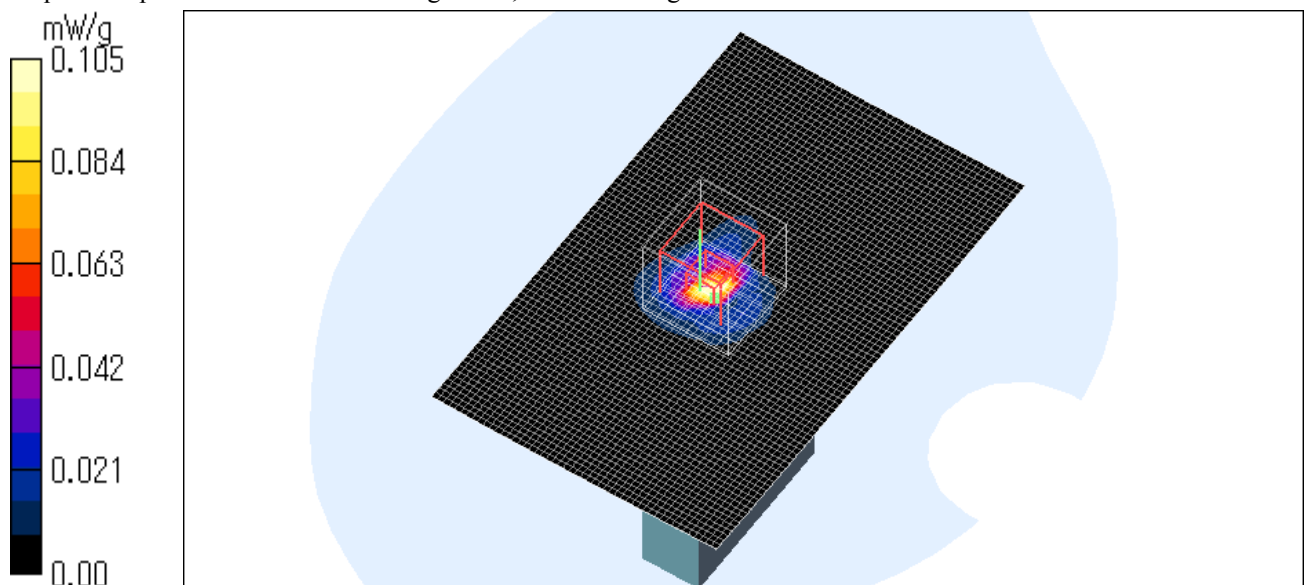

UL Apex Co., Ltd.

Head Office EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone: +81 596 24 8116

Facsimile: +81 596 24 8124

3. Measurement data (Reference Head 2450 MHz)

COOLPIX S6 / Head / Front / 2437 MHz / 11b(11Mbps)

Duty Cycle: 1:1

Medium parameters used: $f = 2450$ MHz; $\sigma = 1.86$ mho/m; $\epsilon_r = 38.5$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY4 (High Precision Assessment)

DASY4 Configuration:

Probe: EX3DV3 - SN3507; ConvF(8.25, 8.25, 8.25); Calibrated: 2005/04/12

Sensor-Surface: 2mm (Mechanical Surface Detection)

Electronics: DAE3 Sn509; Calibrated: 2005/05/26

Phantom: SAM 1196

Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 145

Area Scan (51x81x1): Measurement grid: dx=20mm, dy=20mm

Maximum value of SAR (interpolated) = 0.074 mW/g

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 3.98 V/m; Power Drift = -0.224 dB

Peak SAR (extrapolated) = 0.122 W/kg


SAR(1 g) = 0.038 mW/g; SAR(10 g) = 0.013 mW/g

Maximum value of SAR (measured) = 0.070 mW/g

Test Date = 11/08/05

Ambient Temperature = 25.0 degree C.

Liquid Temperature = Before 24.4 degree C. , After 24.4degree C.

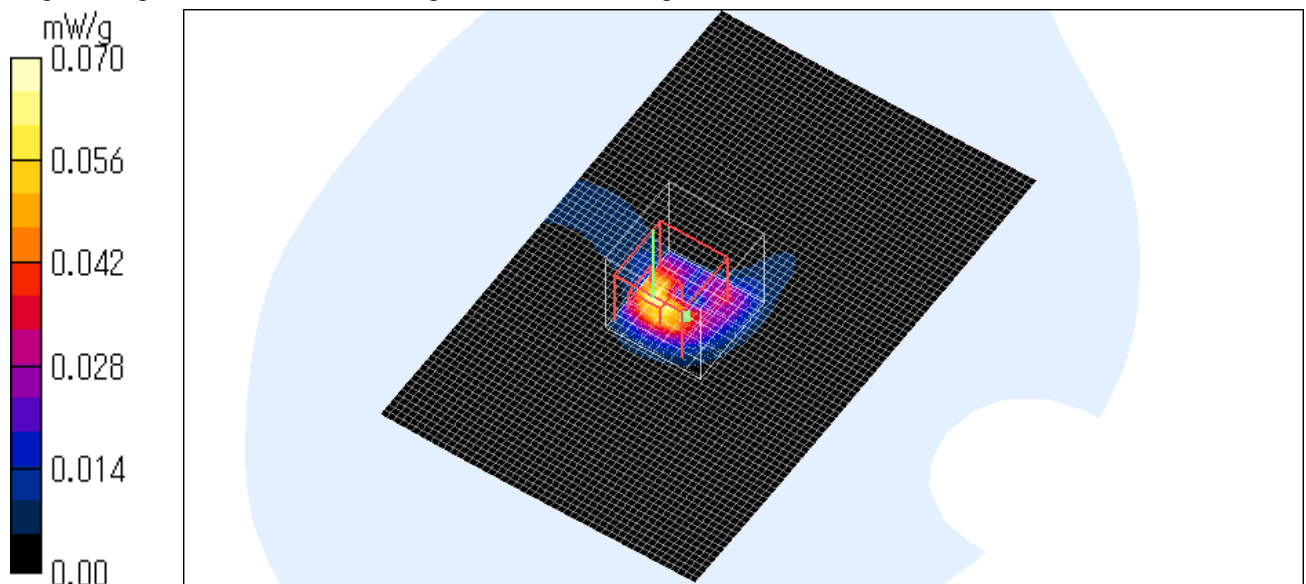

UL Apex Co., Ltd.

Head Office EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone: +81 596 24 8116

Facsimile: +81 596 24 8124

COOLPIX S6 / Head / Back / 2437 MHz / 11b(11Mbps)

Duty Cycle: 1:1

Medium parameters used: $f = 2450$ MHz; $\sigma = 1.86$ mho/m; $\epsilon_r = 38.5$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY4 (High Precision Assessment)

DASY4 Configuration:

Probe: EX3DV3 - SN3507; ConvF(8.25, 8.25, 8.25); Calibrated: 2005/04/12

Sensor-Surface: 2mm (Mechanical Surface Detection)

Electronics: DAE3 Sn509; Calibrated: 2005/05/26

Phantom: SAM 1196

Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 145

Area Scan (51x81x1): Measurement grid: $dx=20$ mm, $dy=20$ mm

Maximum value of SAR (interpolated) = 0.073 mW/g

Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 4.73 V/m; Power Drift = -0.238 dB

Peak SAR (extrapolated) = 0.068 W/kg


SAR(1 g) = 0.030 mW/g; SAR(10 g) = 0.012 mW/g

Maximum value of SAR (measured) = 0.046 mW/g

Test Date = 11/08/05

Ambient Temperature = 25.0 degree C.

Liquid Temperature = Before 24.5 degree C. , After 24.5 degree C.

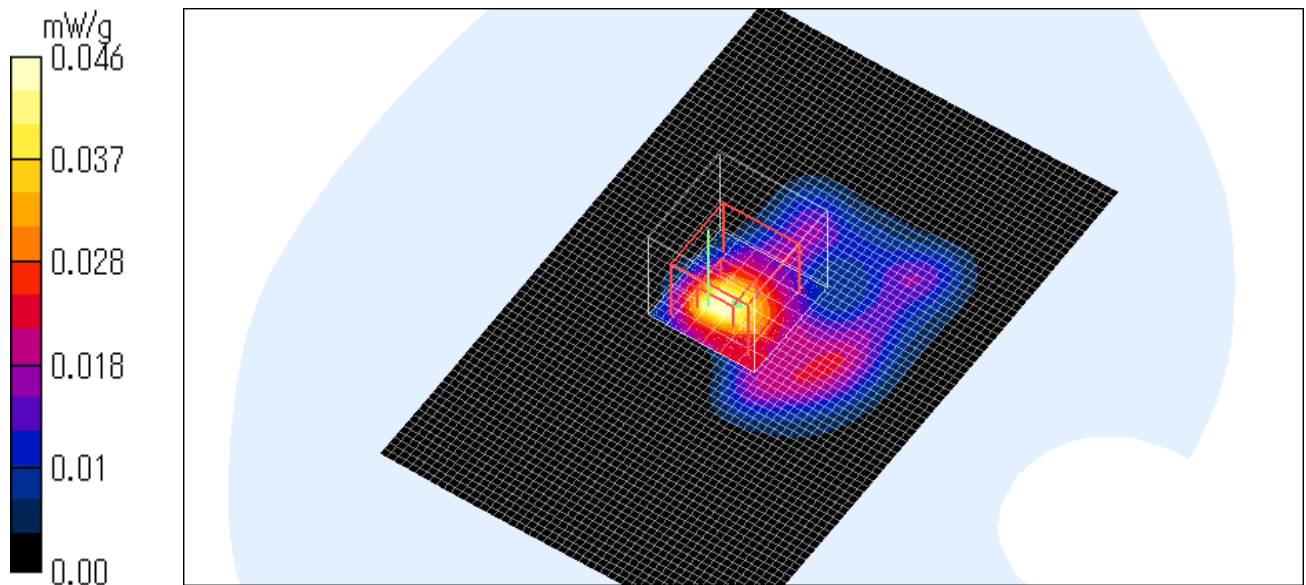

UL Apex Co., Ltd.

Head Office EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone: +81 596 24 8116

Facsimile: +81 596 24 8124

COOLPIX S6 / Head / Top / 2437 MHz / 11b(11Mbps)

Duty Cycle: 1:1

Medium parameters used: $f = 2450$ MHz; $\sigma = 1.86$ mho/m; $\epsilon_r = 38.5$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY4 (High Precision Assessment)

DASY4 Configuration:

Probe: EX3DV3 - SN3507; ConvF(8.25, 8.25, 8.25); Calibrated: 2005/04/12

Sensor-Surface: 2mm (Mechanical Surface Detection)

Electronics: DAE3 Sn509; Calibrated: 2005/05/26

Phantom: SAM 1196

Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 145

Area Scan (51x81x1): Measurement grid: $dx=20$ mm, $dy=20$ mm

Maximum value of SAR (interpolated) = 0.048 mW/g

Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 2.99 V/m; Power Drift = -0.292 dB

Peak SAR (extrapolated) = 0.106 W/kg


SAR(1 g) = 0.024 mW/g; SAR(10 g) = 0.00765 mW/g

Maximum value of SAR (measured) = 0.044 mW/g

Test Date = 11/08/05

Ambient Temperature = 25.0 degree C.

Liquid Temperature = Before 24.5 degree C. , After 24.5 degree C.

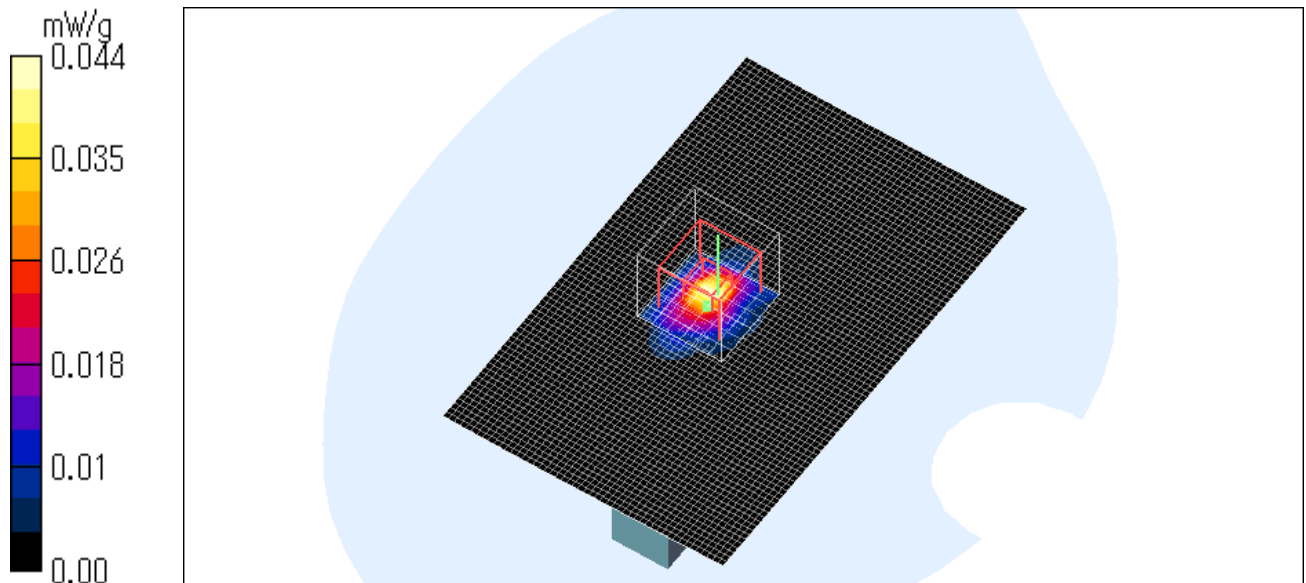

UL Apex Co., Ltd.

Head Office EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone: +81 596 24 8116

Facsimile: +81 596 24 8124

COOLPIX S6 / Head / Bottom / 2437 MHz / 11b(11Mbps)

Duty Cycle: 1:1

Medium parameters used: $f = 2450$ MHz; $\sigma = 1.86$ mho/m; $\epsilon_r = 38.5$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY4 (High Precision Assessment)

DASY4 Configuration:

Probe: EX3DV3 - SN3507; ConvF(8.25, 8.25, 8.25); Calibrated: 2005/04/12

Sensor-Surface: 2mm (Mechanical Surface Detection)

Electronics: DAE3 Sn509; Calibrated: 2005/05/26

Phantom: SAM 1196

Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 145

Area Scan (51x81x1): Measurement grid: $dx=20$ mm, $dy=20$ mm

Maximum value of SAR (interpolated) = 0.01 mW/g

Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 0.943 V/m; Power Drift = 0.020 dB

Peak SAR (extrapolated) = 0.045 W/kg


SAR(1 g) = 0.00513 mW/g; SAR(10 g) = 0.000978 mW/g

Maximum value of SAR (measured) = 0.023 mW/g

Test Date = 11/08/05

Ambient Temperature = 25.0 degree C.

Liquid Temperature = Before 24.5 degree C. , After 24.4 degree C.

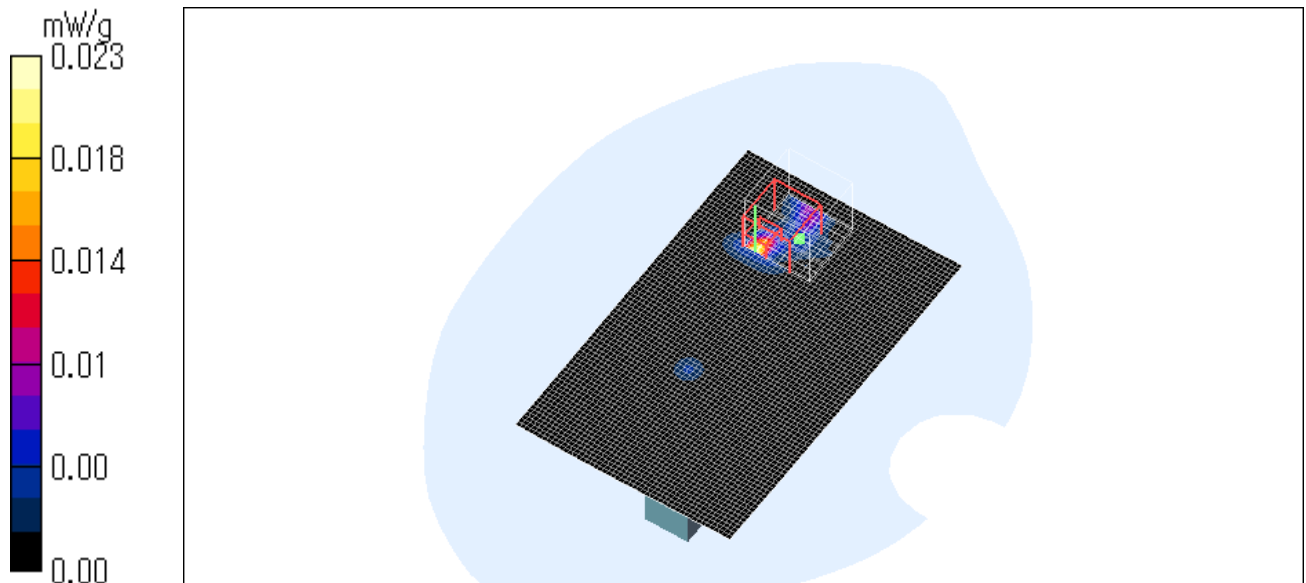

UL Apex Co., Ltd.

Head Office EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone: +81 596 24 8116

Facsimile: +81 596 24 8124

COOLPIX S6 / Head / Left Side / 2412 MHz / 11b(11Mbps)

Duty Cycle: 1:1

Medium parameters used: $f = 2450$ MHz; $\sigma = 1.86$ mho/m; $\epsilon_r = 38.5$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY4 (High Precision Assessment)

DASY4 Configuration:

Probe: EX3DV3 - SN3507; ConvF(8.25, 8.25, 8.25); Calibrated: 2005/04/12

Sensor-Surface: 2mm (Mechanical Surface Detection)

Electronics: DAE3 Sn509; Calibrated: 2005/05/26

Phantom: SAM 1196

Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 145

Area Scan (51x81x1): Measurement grid: $dx=20$ mm, $dy=20$ mm

Maximum value of SAR (interpolated) = 0.091 mW/g

Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 9.18 V/m; Power Drift = -0.221 dB

Peak SAR (extrapolated) = 0.418 W/kg


SAR(1 g) = 0.071 mW/g; SAR(10 g) = 0.020 mW/g

Maximum value of SAR (measured) = 0.216 mW/g

Test Date = 11/08/05

Ambient Temperature = 25.0 degree C.

Liquid Temperature = Before 24.5 degree C. , After 24.5 degree C.

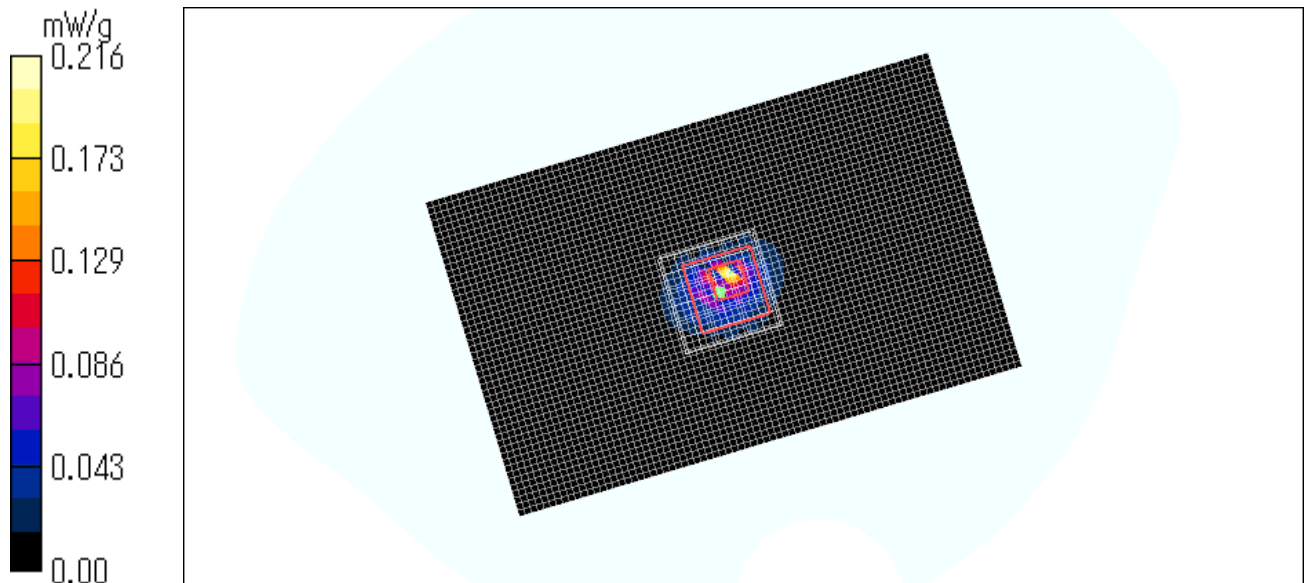

UL Apex Co., Ltd.

Head Office EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone: +81 596 24 8116

Facsimile: +81 596 24 8124

COOLPIX S6 / Head / Right side / 2437 MHz / 11b(11Mbps)

Duty Cycle: 1:1

Medium parameters used: $f = 2450$ MHz; $\sigma = 1.86$ mho/m; $\epsilon_r = 38.5$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY4 (High Precision Assessment)

DASY4 Configuration:

Probe: EX3DV3 - SN3507; ConvF(8.25, 8.25, 8.25); Calibrated: 2005/04/12

Sensor-Surface: 2mm (Mechanical Surface Detection)

Electronics: DAE3 Sn509; Calibrated: 2005/05/26

Phantom: SAM 1196

Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 145

Area Scan (51x81x1): Measurement grid: $dx=20$ mm, $dy=20$ mm

Maximum value of SAR (interpolated) = 0.00 mW/g

Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 1.22 V/m; Power Drift = -0.259 dB

Peak SAR (extrapolated) = 0.01 W/kg


SAR(1 g) = 0.00191 mW/g; SAR(10 g) = 0.00032 mW/g

Maximum value of SAR (measured) = 0.00 mW/g

Test Date = 11/08/05

Ambient Temperature = 25.0 degree C.

Liquid Temperature = Before 24.4 degree C. , After 24.4 degree C.

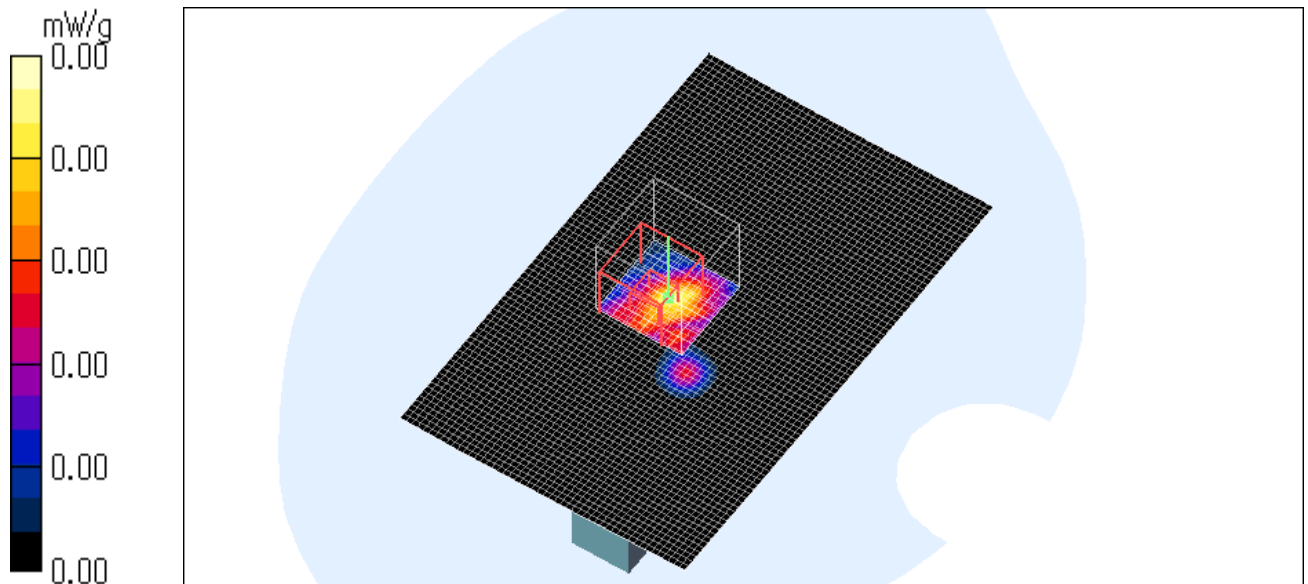

UL Apex Co., Ltd.

Head Office EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone: +81 596 24 8116

Facsimile: +81 596 24 8124

COOLPIX S6 / Head / Left Side / 2412 MHz / 11b(11Mbps)

Duty Cycle: 1:1

Medium parameters used: $f = 2450$ MHz; $\sigma = 1.86$ mho/m; $\epsilon_r = 38.5$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY4 (High Precision Assessment)

DASY4 Configuration:

Probe: EX3DV3 - SN3507; ConvF(8.25, 8.25, 8.25); Calibrated: 2005/04/12

Sensor-Surface: 2mm (Mechanical Surface Detection)

Electronics: DAE3 Sn509; Calibrated: 2005/05/26

Phantom: SAM 1196

Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 145

Area Scan (51x81x1): Measurement grid: dx=20mm, dy=20mm

Maximum value of SAR (interpolated) = 0.190 mW/g

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 4.94 V/m; Power Drift = -0.258 dB

Peak SAR (extrapolated) = 0.457 W/kg


SAR(1 g) = 0.088 mW/g; SAR(10 g) = 0.024 mW/g

Maximum value of SAR (measured) = 0.197 mW/g

Test Date = 11/08/05

Ambient Temperature = 25.0 degree C.

Liquid Temperature = Before 24.5 degree C. , After 24.5 degree C.

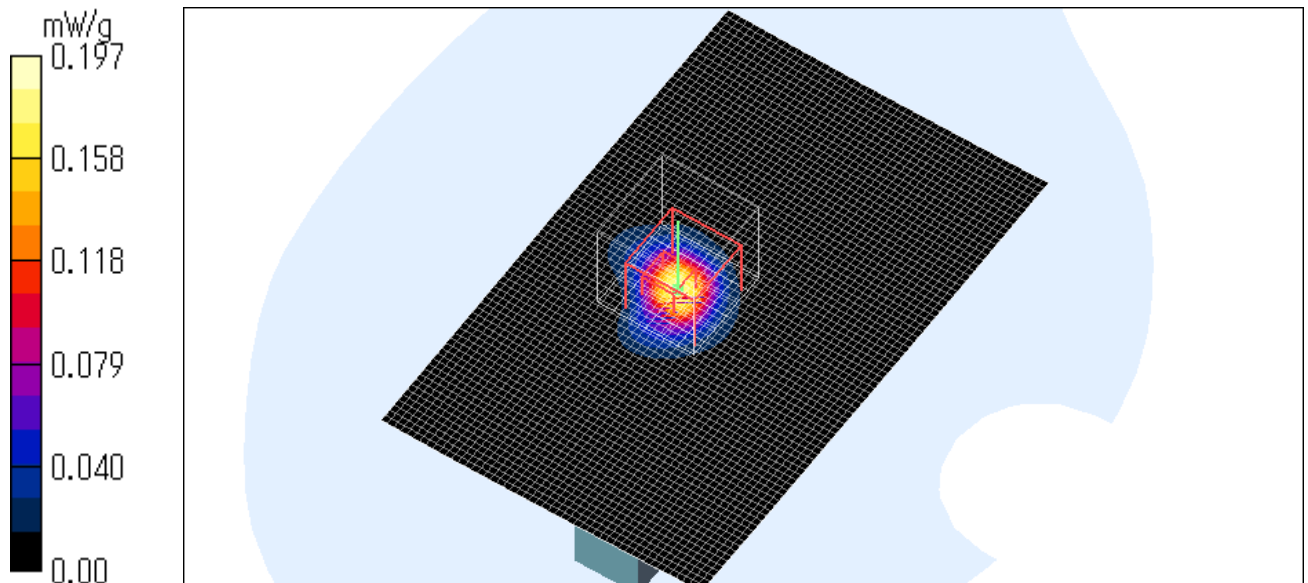

UL Apex Co., Ltd.

Head Office EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone: +81 596 24 8116

Facsimile: +81 596 24 8124

COOLPIX S6 / Head / Left Side / 2462 MHz / 11b(11Mbps)

Duty Cycle: 1:1

Medium parameters used: $f = 2450$ MHz; $\sigma = 1.86$ mho/m; $\epsilon_r = 38.5$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY4 (High Precision Assessment)

DASY4 Configuration:

Probe: EX3DV3 - SN3507; ConvF(8.25, 8.25, 8.25); Calibrated: 2005/04/12

Sensor-Surface: 2mm (Mechanical Surface Detection)

Electronics: DAE3 Sn509; Calibrated: 2005/05/26

Phantom: SAM 1196

Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 145

Area Scan (51x81x1): Measurement grid: $dx=20$ mm, $dy=20$ mm

Maximum value of SAR (interpolated) = 0.153 mW/g

Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 5.38 V/m; Power Drift = -0.264 dB

Peak SAR (extrapolated) = 0.316 W/kg


SAR(1 g) = 0.055 mW/g; SAR(10 g) = 0.016 mW/g

Maximum value of SAR (measured) = 0.162 mW/g

Test Date = 11/08/05

Ambient Temperature = 25.0 degree C.

Liquid Temperature = Before 24.5 degree C. , After 24.5 degree C.

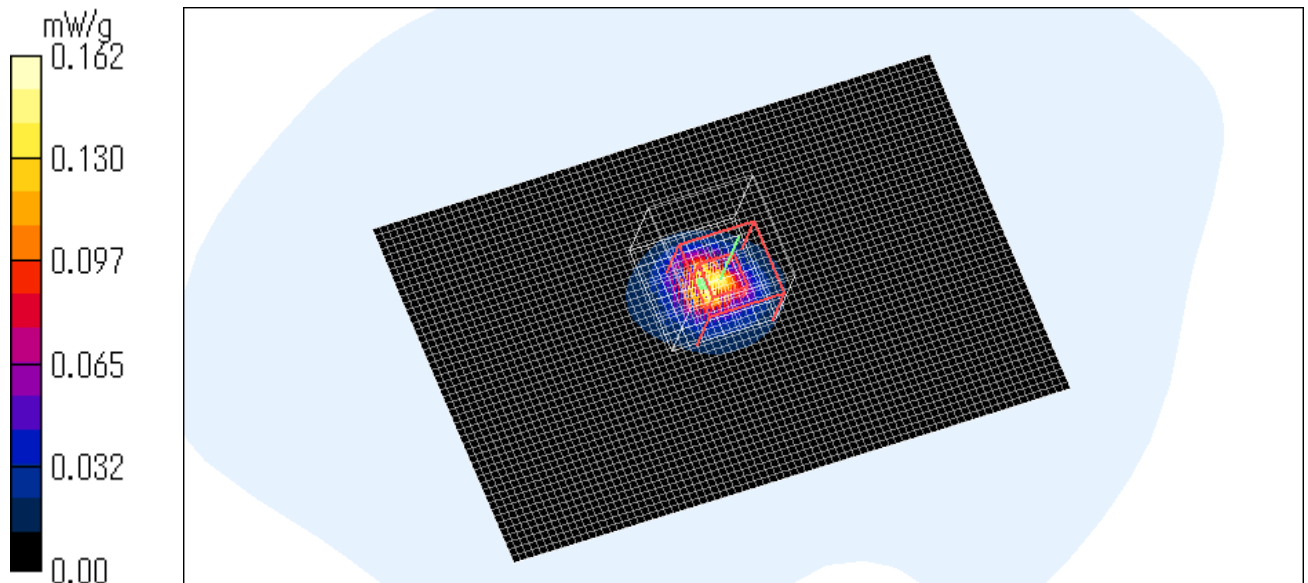

UL Apex Co., Ltd.

Head Office EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone: +81 596 24 8116

Facsimile: +81 596 24 8124

COOLPIX S6 / Head / Left Side 5mm / 2412 MHz / 11b(11Mbps)

Duty Cycle: 1:1

Medium parameters used: $f = 2450$ MHz; $\sigma = 1.88$ mho/m; $\epsilon_r = 37.6$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY4 (High Precision Assessment)

DASY4 Configuration:

Probe: EX3DV3 - SN3507; ConvF(8.25, 8.25, 8.25); Calibrated: 2005/04/12

Sensor-Surface: 2mm (Mechanical Surface Detection)

Electronics: DAE3 Sn509; Calibrated: 2005/05/26

Phantom: SAM 1196

Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 145

Area Scan (51x81x1): Measurement grid: dx=20mm, dy=20mm

Maximum value of SAR (interpolated) = 0.044 mW/g

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 3.33 V/m; Power Drift = -0.234 dB

Peak SAR (extrapolated) = 0.100 W/kg


SAR(1 g) = 0.033 mW/g; SAR(10 g) = 0.013 mW/g

Maximum value of SAR (measured) = 0.066 mW/g

Test Date = 11/09/05

Ambient Temperature = 25.0 degree C.

Liquid Temperature = Before 23.9 degree C. , After 23.9 degree C.

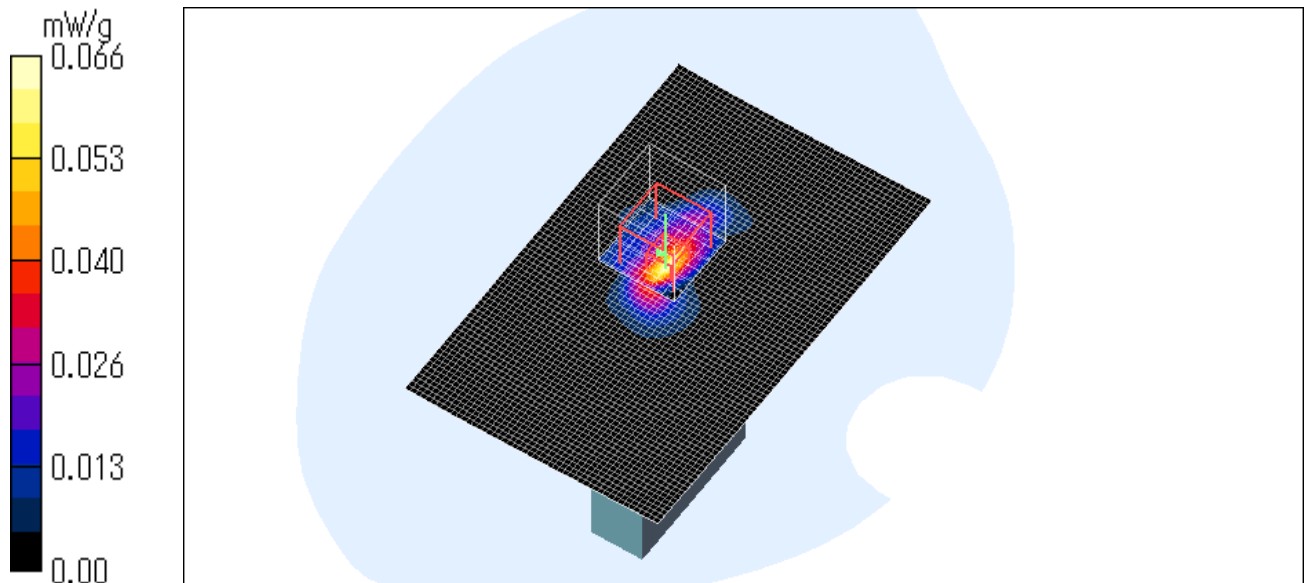

UL Apex Co., Ltd.

Head Office EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone: +81 596 24 8116

Facsimile: +81 596 24 8124

COOLPIX S6 / Head / Front 10mm / 2412 MHz / 11b(11Mbps)

Duty Cycle: 1:1

Medium parameters used: $f = 2450$ MHz; $\sigma = 1.88$ mho/m; $\epsilon_r = 37.6$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY4 (High Precision Assessment)

DASY4 Configuration:

Probe: EX3DV3 - SN3507; ConvF(8.25, 8.25, 8.25); Calibrated: 2005/04/12

Sensor-Surface: 2mm (Mechanical Surface Detection)

Electronics: DAE3 Sn509; Calibrated: 2005/05/26

Phantom: SAM 1196

Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 145

Area Scan (51x81x1): Measurement grid: dx=20mm, dy=20mm

Maximum value of SAR (interpolated) = 0.028 mW/g

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 2.33 V/m; Power Drift = 0.150 dB

Peak SAR (extrapolated) = 0.040 W/kg


SAR(1 g) = 0.0089 mW/g; SAR(10 g) = 0.00424 mW/g

Maximum value of SAR (measured) = 0.014 mW/g

Test Date = 11/09/05

Ambient Temperature = 25.0 degree C.

Liquid Temperature = Before 23.9 degree C. , After 23.9 degree C.

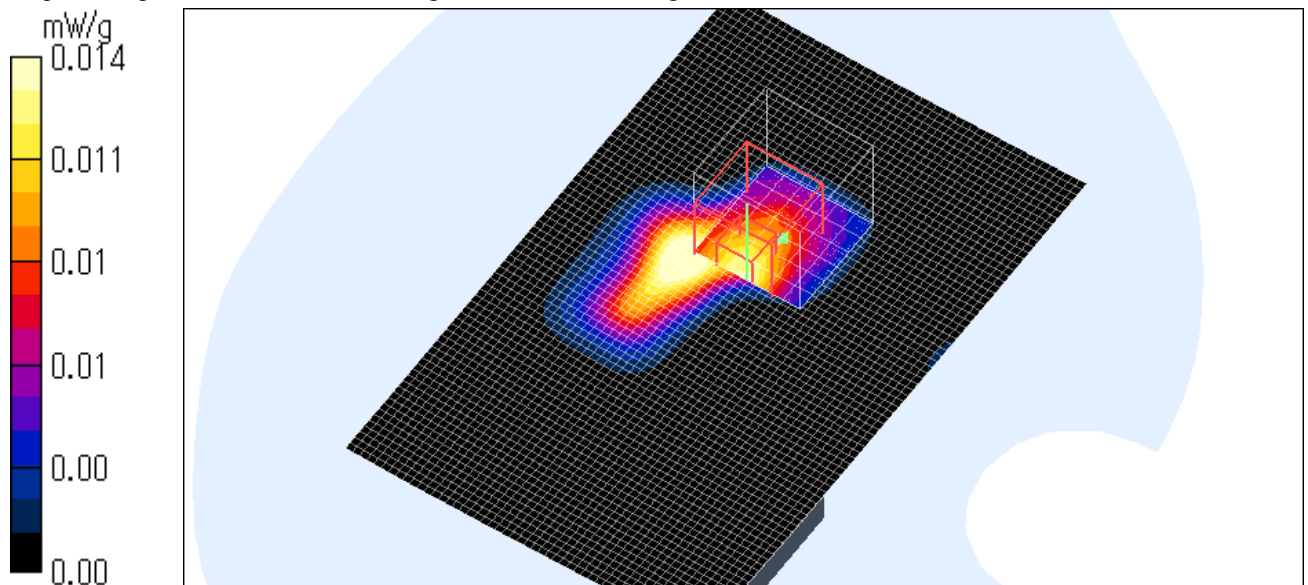

UL Apex Co., Ltd.

Head Office EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone: +81 596 24 8116

Facsimile: +81 596 24 8124

COOLPIX S6 / Head / Front 15mm / 2412 MHz / 11b(11Mbps)

Duty Cycle: 1:1

Medium parameters used: $f = 2450$ MHz; $\sigma = 1.88$ mho/m; $\epsilon_r = 37.6$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY4 (High Precision Assessment)

DASY4 Configuration:

Probe: EX3DV3 - SN3507; ConvF(8.25, 8.25, 8.25); Calibrated: 2005/04/12

Sensor-Surface: 2mm (Mechanical Surface Detection)

Electronics: DAE3 Sn509; Calibrated: 2005/05/26

Phantom: SAM 1196

Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 145

Area Scan (51x81x1): Measurement grid: $dx=20$ mm, $dy=20$ mm

Maximum value of SAR (interpolated) = 0.01 mW/g

Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 1.34 V/m; Power Drift = -0.183 dB

Peak SAR (extrapolated) = 0.013 W/kg


SAR(1 g) = 0.00566 mW/g; SAR(10 g) = 0.00261 mW/g

Maximum value of SAR (measured) = 0.01 mW/g

Test Date = 11/09/05

Ambient Temperature = 25.0 degree C.

Liquid Temperature = Before 23.9 degree C. , After 23.9 degree C.

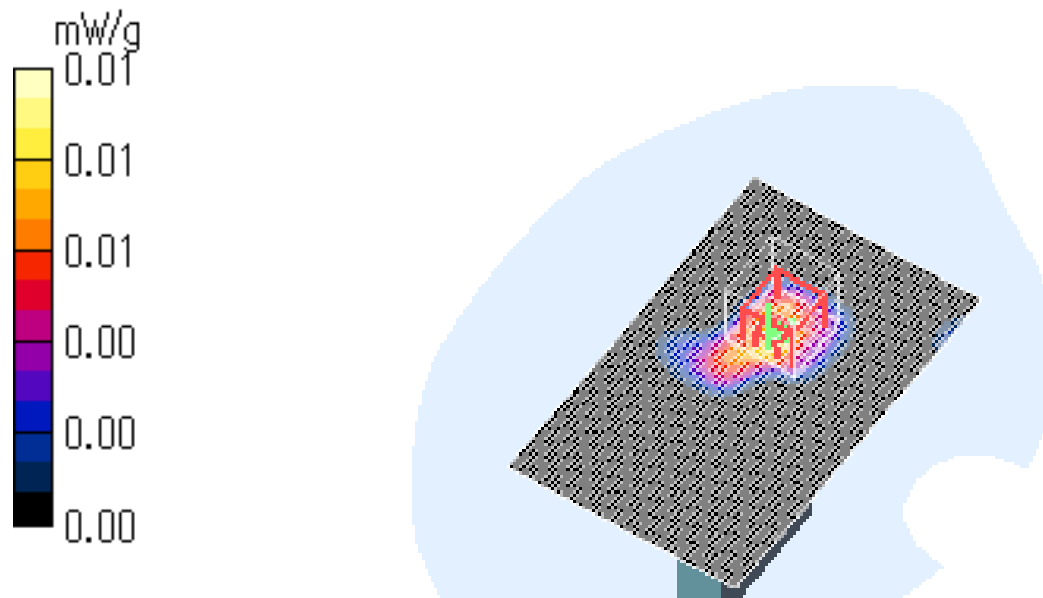

UL Apex Co., Ltd.

Head Office EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone: +81 596 24 8116

Facsimile: +81 596 24 8124

COOLPIX S6 / Head / Left side/ 2437 MHz / 11g(9Mbps)

Duty Cycle: 1:1

Medium parameters used: $f = 2450$ MHz; $\sigma = 1.88$ mho/m; $\epsilon_r = 37.6$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY4 (High Precision Assessment)

DASY4 Configuration:

Probe: EX3DV3 - SN3507; ConvF(8.25, 8.25, 8.25); Calibrated: 2005/04/12

Sensor-Surface: 2mm (Mechanical Surface Detection)

Electronics: DAE3 Sn509; Calibrated: 2005/05/26

Phantom: SAM 1196

Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 145

Area Scan (51x81x1): Measurement grid: dx=20mm, dy=20mm

Maximum value of SAR (interpolated) = 0.083 mW/g

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 9.29 V/m; Power Drift = -0.111 dB

Peak SAR (extrapolated) = 0.384 W/kg


SAR(1 g) = 0.071 mW/g; SAR(10 g) = 0.020 mW/g

Maximum value of SAR (measured) = 0.191 mW/g

Test Date = 11/09/05

Ambient Temperature = 25.0 degree C.

Liquid Temperature = Before 24.3 degree C. , After 24.3 degree C.

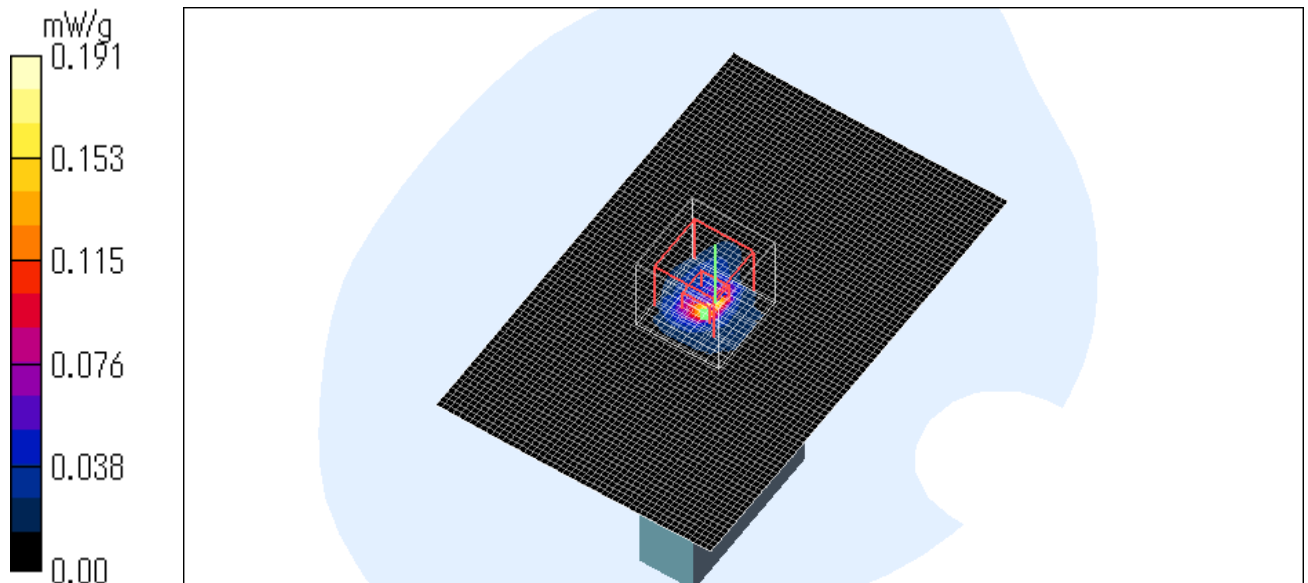

UL Apex Co., Ltd.

Head Office EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone: +81 596 24 8116

Facsimile: +81 596 24 8124

COOLPIX S6 / Head / Left Side / 2437 MHz / 11g(12Mbps)

Duty Cycle: 1:1

Medium parameters used: $f = 2450$ MHz; $\sigma = 1.88$ mho/m; $\epsilon_r = 37.6$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY4 (High Precision Assessment)

DASY4 Configuration:

Probe: EX3DV3 - SN3507; ConvF(8.25, 8.25, 8.25); Calibrated: 2005/04/12

Sensor-Surface: 2mm (Mechanical Surface Detection)

Electronics: DAE3 Sn509; Calibrated: 2005/05/26

Phantom: SAM 1196

Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 145

Area Scan (51x81x1): Measurement grid: $dx=20$ mm, $dy=20$ mm

Maximum value of SAR (interpolated) = 0.190 mW/g

Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 6.04 V/m; Power Drift = -0.291 dB

Peak SAR (extrapolated) = 0.436 W/kg


SAR(1 g) = 0.080 mW/g; SAR(10 g) = 0.022 mW/g

Maximum value of SAR (measured) = 0.192 mW/g

Test Date = 11/09/05

Ambient Temperature = 25.0 degree C.

Liquid Temperature = Before 24.3 degree C. , After 24.3 degree C.

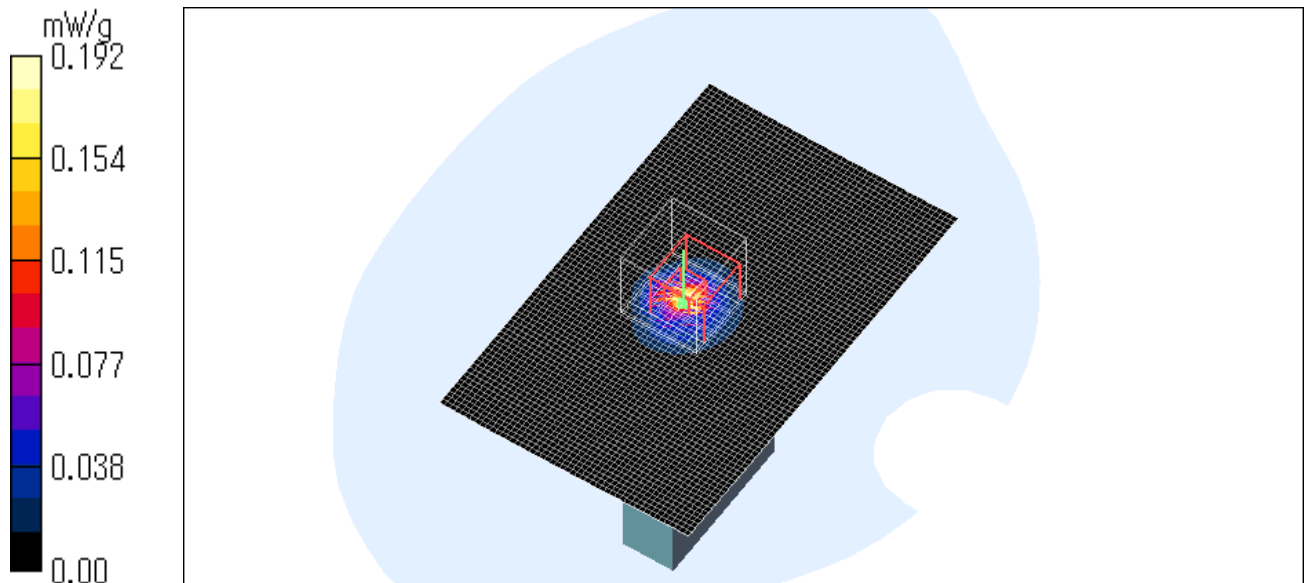

UL Apex Co., Ltd.

Head Office EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone: +81 596 24 8116

Facsimile: +81 596 24 8124

COOLPIX S6 / Head / Left Side / 2437 MHz / 11g(36Mbps)

Duty Cycle: 1:1

Medium parameters used: $f = 2450$ MHz; $\sigma = 1.88$ mho/m; $\epsilon_r = 37.6$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY4 (High Precision Assessment)

DASY4 Configuration:

Probe: EX3DV3 - SN3507; ConvF(8.25, 8.25, 8.25); Calibrated: 2005/04/12

Sensor-Surface: 2mm (Mechanical Surface Detection)

Electronics: DAE3 Sn509; Calibrated: 2005/05/26

Phantom: SAM 1196

Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 145

Area Scan (51x81x1): Measurement grid: dx=20mm, dy=20mm

Maximum value of SAR (interpolated) = 0.146 mW/g

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 5.10 V/m; Power Drift = -0.230 dB

Peak SAR (extrapolated) = 0.431 W/kg


SAR(1 g) = 0.077 mW/g; SAR(10 g) = 0.021 mW/g

Maximum value of SAR (measured) = 0.197 mW/g

Test Date = 11/09/05

Ambient Temperature = 25.0 degree C.

Liquid Temperature = Before 24.3 degree C. , After 24.3 degree C.

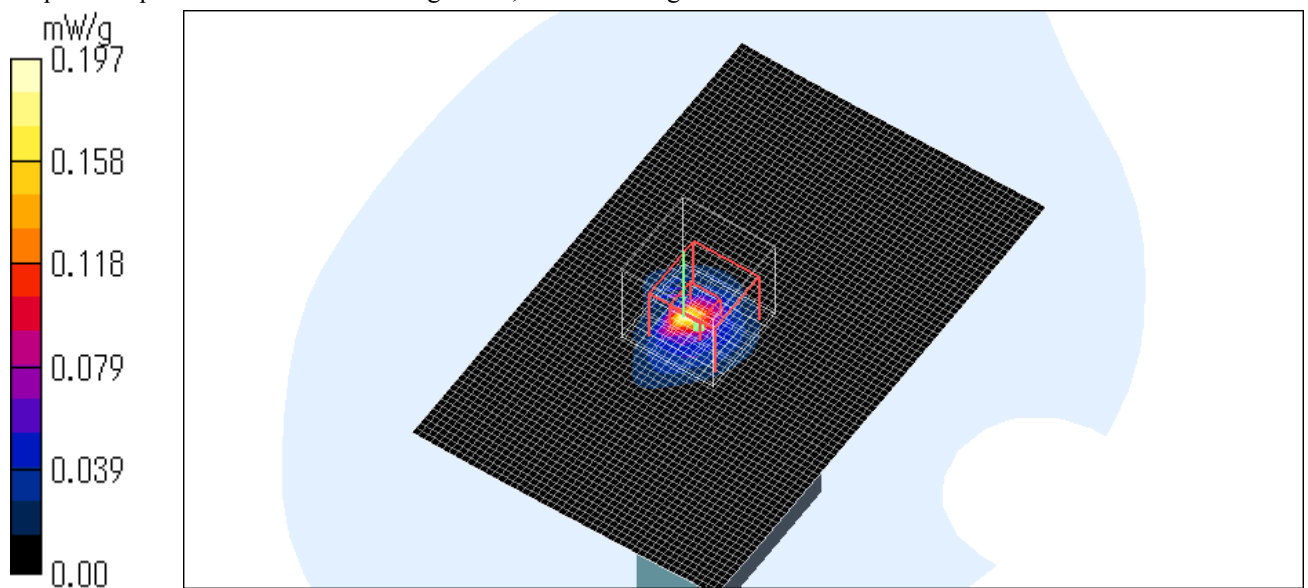

UL Apex Co., Ltd.

Head Office EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone: +81 596 24 8116

Facsimile: +81 596 24 8124

COOLPIX S6 / Head / Left Side / 2437 MHz / 11g(54Mbps)

Duty Cycle: 1:1

Medium parameters used: $f = 2450$ MHz; $\sigma = 1.88$ mho/m; $\epsilon_r = 37.6$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY4 (High Precision Assessment)

DASY4 Configuration:

Probe: EX3DV3 - SN3507; ConvF(8.25, 8.25, 8.25); Calibrated: 2005/04/12

Sensor-Surface: 2mm (Mechanical Surface Detection)

Electronics: DAE3 Sn509; Calibrated: 2005/05/26

Phantom: SAM 1196

Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 145

Area Scan (51x81x1): Measurement grid: dx=20mm, dy=20mm

Maximum value of SAR (interpolated) = 0.246 mW/g

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 5.21 V/m; Power Drift = -0.260 dB

Peak SAR (extrapolated) = 0.440 W/kg


SAR(1 g) = 0.077 mW/g; SAR(10 g) = 0.022 mW/g

Maximum value of SAR (measured) = 0.236 mW/g

Test Date = 11/09/05

Ambient Temperature = 25.0 degree C.

Liquid Temperature = Before 24.0 degree C. , After 24.0 degree C.

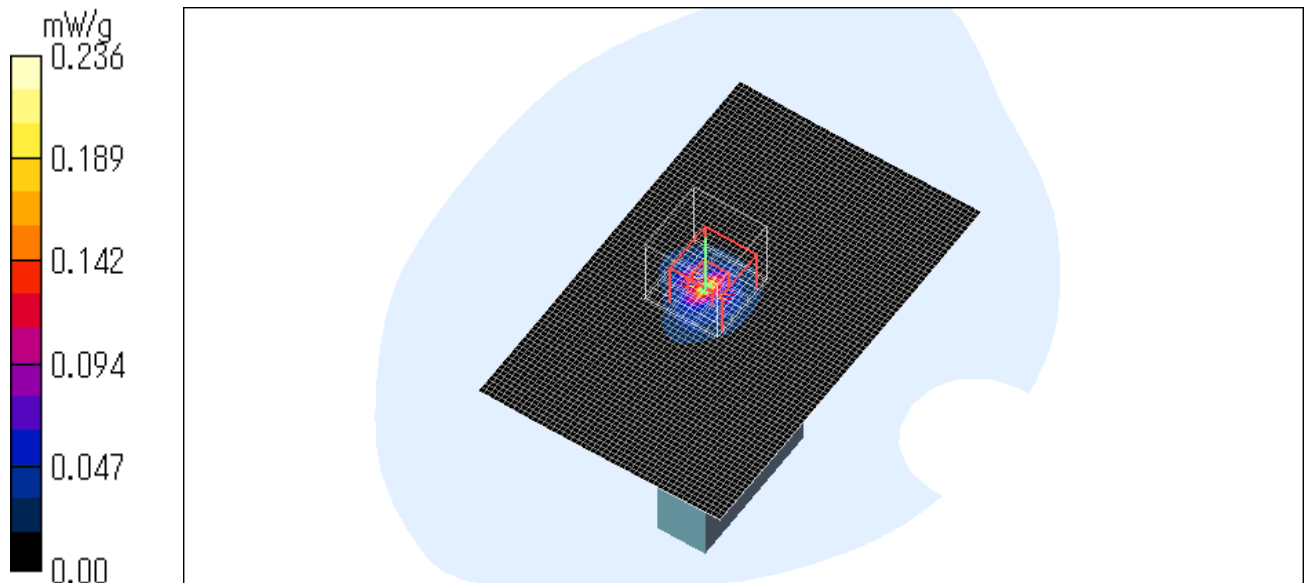

UL Apex Co., Ltd.

Head Office EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone: +81 596 24 8116

Facsimile: +81 596 24 8124

COOLPIX S6 / Head / Front / 2437 MHz / 11g(12Mbps)

Duty Cycle: 1:1

Medium parameters used: $f = 2450$ MHz; $\sigma = 1.88$ mho/m; $\epsilon_r = 37.6$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY4 (High Precision Assessment)

DASY4 Configuration:

Probe: EX3DV3 - SN3507; ConvF(8.25, 8.25, 8.25); Calibrated: 2005/04/12

Sensor-Surface: 2mm (Mechanical Surface Detection)

Electronics: DAE3 Sn509; Calibrated: 2005/05/26

Phantom: SAM 1196

Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 145

Area Scan (51x81x1): Measurement grid: $dx=20$ mm, $dy=20$ mm

Maximum value of SAR (interpolated) = 0.067 mW/g

Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 3.47 V/m; Power Drift = -0.207 dB

Peak SAR (extrapolated) = 0.102 W/kg


SAR(1 g) = 0.030 mW/g; SAR(10 g) = 0.011 mW/g

Maximum value of SAR (measured) = 0.051 mW/g

Test Date = 11/09/05

Ambient Temperature = 25.0 degree C.

Liquid Temperature = Before 24.0 degree C. , After 24.0 degree C.

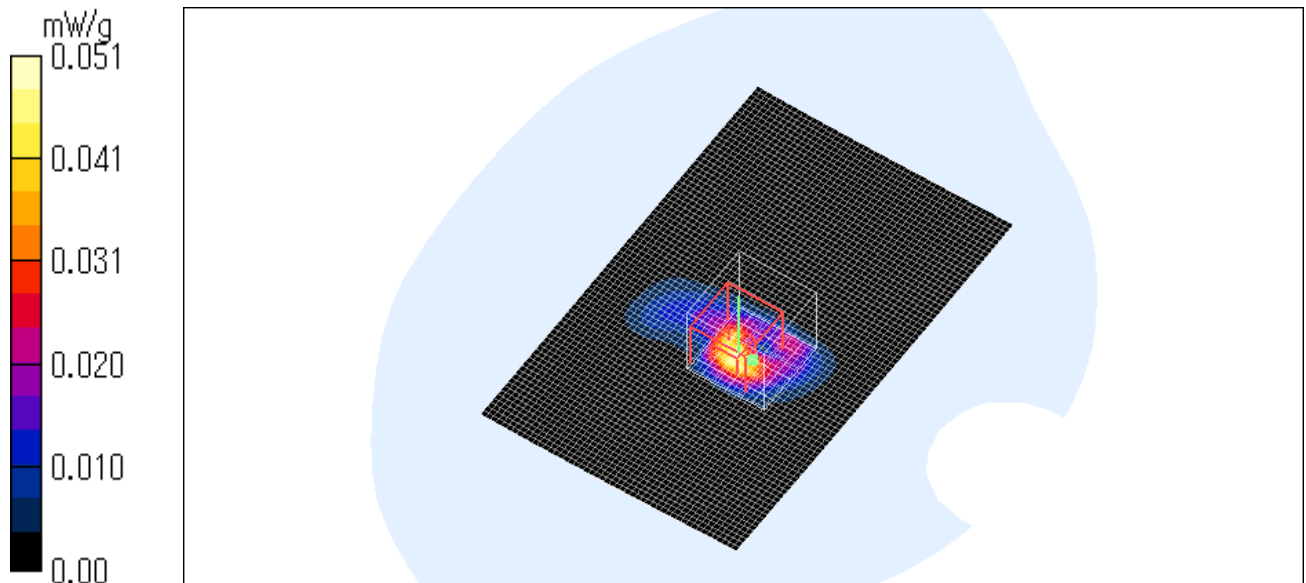

UL Apex Co., Ltd.

Head Office EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone: +81 596 24 8116

Facsimile: +81 596 24 8124

COOLPIX S6 / Head / Back / 2437 MHz / 11g(12Mbps)

Duty Cycle: 1:1

Medium parameters used: $f = 2450$ MHz; $\sigma = 1.88$ mho/m; $\epsilon_r = 37.6$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY4 (High Precision Assessment)

DASY4 Configuration:

Probe: EX3DV3 - SN3507; ConvF(8.25, 8.25, 8.25); Calibrated: 2005/04/12

Sensor-Surface: 2mm (Mechanical Surface Detection)

Electronics: DAE3 Sn509; Calibrated: 2005/05/26

Phantom: SAM 1196

Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 145

Area Scan (51x81x1): Measurement grid: $dx=20$ mm, $dy=20$ mm

Maximum value of SAR (interpolated) = 0.054 mW/g

Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 2.84 V/m; Power Drift = -0.276 dB

Peak SAR (extrapolated) = 0.053 W/kg


SAR(1 g) = 0.023 mW/g; SAR(10 g) = 0.00959 mW/g

Maximum value of SAR (measured) = 0.037 mW/g

Test Date = 11/09/05

Ambient Temperature = 25.0 degree C.

Liquid Temperature = Before 24.0 degree C. , After 24.0 degree C.

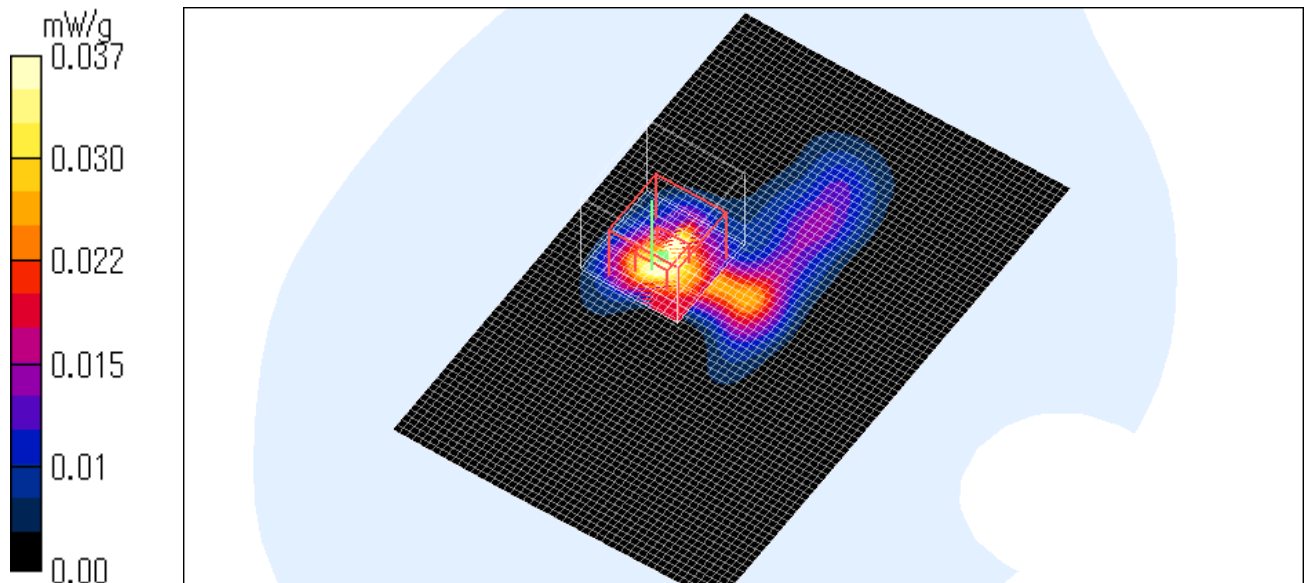

UL Apex Co., Ltd.

Head Office EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone: +81 596 24 8116

Facsimile: +81 596 24 8124

COOLPIX S6 / Head / Top / 2437 MHz / 11g(12Mbps)

Duty Cycle: 1:1

Medium parameters used: $f = 2450$ MHz; $\sigma = 1.88$ mho/m; $\epsilon_r = 37.6$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY4 (High Precision Assessment)

DASY4 Configuration:

Probe: EX3DV3 - SN3507; ConvF(8.25, 8.25, 8.25); Calibrated: 2005/04/12

Sensor-Surface: 2mm (Mechanical Surface Detection)

Electronics: DAE3 Sn509; Calibrated: 2005/05/26

Phantom: SAM 1196

Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 145

Area Scan (51x81x1): Measurement grid: $dx=20$ mm, $dy=20$ mm

Maximum value of SAR (interpolated) = 0.058 mW/g

Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 5.39 V/m; Power Drift = -0.212 dB

Peak SAR (extrapolated) = 0.085 W/kg


SAR(1 g) = 0.026 mW/g; SAR(10 g) = 0.00907 mW/g

Maximum value of SAR (measured) = 0.051 mW/g

Test Date = 11/09/05

Ambient Temperature = 25.0 degree C.

Liquid Temperature = Before 24.0 degree C. , After 24.0 degree C.

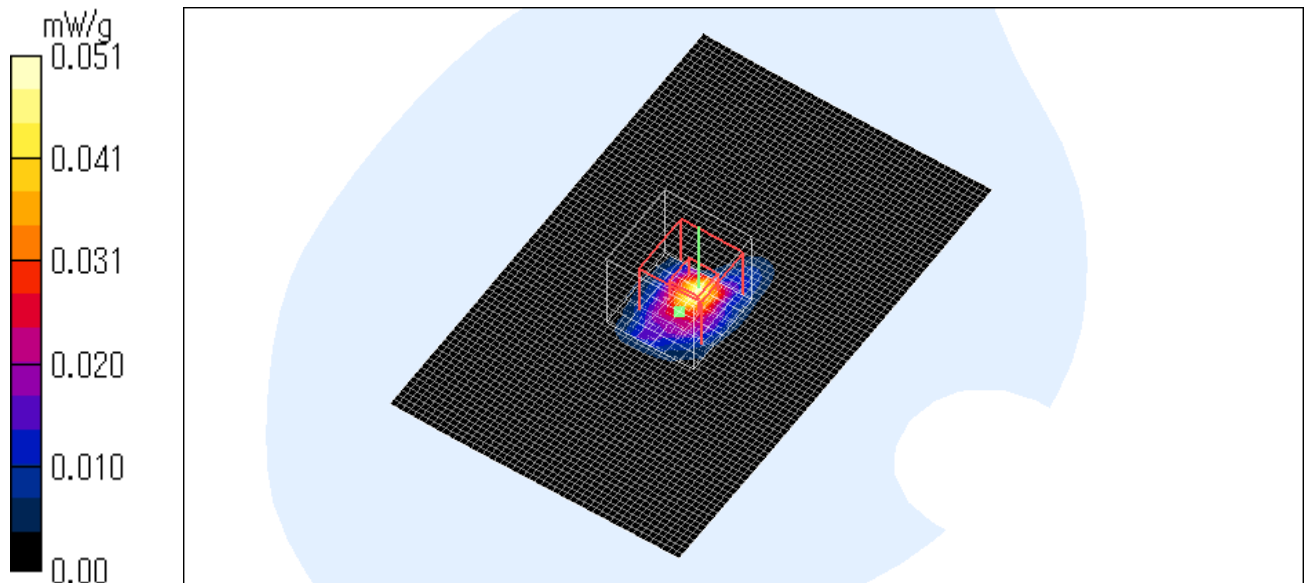

UL Apex Co., Ltd.

Head Office EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone: +81 596 24 8116

Facsimile: +81 596 24 8124

COOLPIX S6 / Head / Bottom / 2437 MHz / 11g(12Mbps)

Duty Cycle: 1:1

Medium parameters used: $f = 2450$ MHz; $\sigma = 1.88$ mho/m; $\epsilon_r = 37.6$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY4 (High Precision Assessment)

DASY4 Configuration:

Probe: EX3DV3 - SN3507; ConvF(8.25, 8.25, 8.25); Calibrated: 2005/04/12

Sensor-Surface: 2mm (Mechanical Surface Detection)

Electronics: DAE3 Sn509; Calibrated: 2005/05/26

Phantom: SAM 1196

Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 145

Area Scan (51x81x1): Measurement grid: $dx=20$ mm, $dy=20$ mm

Maximum value of SAR (interpolated) = 0.01 mW/g

Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 0.504 V/m; Power Drift = -0.235 dB

Peak SAR (extrapolated) = 0.044 W/kg


SAR(1 g) = 0.012 mW/g; SAR(10 g) = 0.00326 mW/g

Maximum value of SAR (measured) = 0.030 mW/g

Test Date = 11/08/05

Ambient Temperature = 25.0 degree C.

Liquid Temperature = Before 24.0 degree C. , After 24.0 degree C.

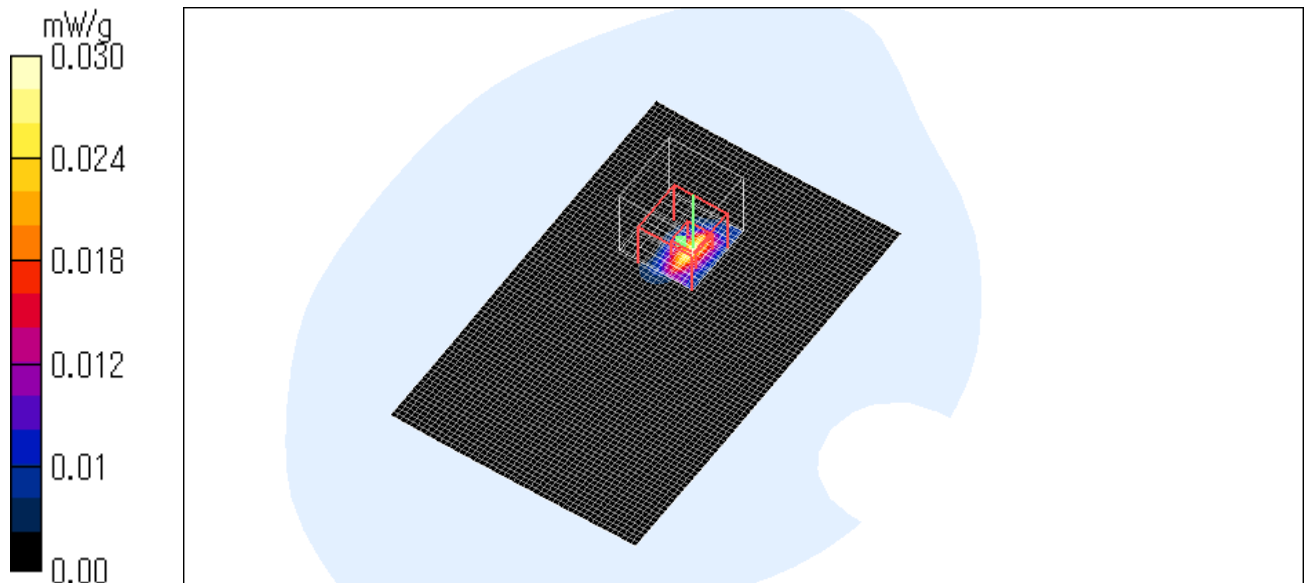

UL Apex Co., Ltd.

Head Office EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone: +81 596 24 8116

Facsimile: +81 596 24 8124

COOLPIX S6 / Head / Right Side / 2437 MHz / 11g(12Mbps)

Duty Cycle: 1:1

Medium parameters used: $f = 2450$ MHz; $\sigma = 1.88$ mho/m; $\epsilon_r = 37.6$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY4 (High Precision Assessment)

DASY4 Configuration:

Probe: EX3DV3 - SN3507; ConvF(8.25, 8.25, 8.25); Calibrated: 2005/04/12

Sensor-Surface: 2mm (Mechanical Surface Detection)

Electronics: DAE3 Sn509; Calibrated: 2005/05/26

Phantom: SAM 1196

Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 145

Area Scan (51x81x1): Measurement grid: $dx=20$ mm, $dy=20$ mm

Maximum value of SAR (interpolated) = 0.00 mW/g

Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 1.70 V/m; Power Drift = 0.315 dB

Peak SAR (extrapolated) = 0.00 W/kg


SAR(1 g) = 0.000144 mW/g; SAR(10 g) = 1.92e-005 mW/g

Maximum value of SAR (measured) = 0.00 mW/g

Test Date = 11/09/05

Ambient Temperature = 25.0 degree C.

Liquid Temperature = Before 23.9 degree C. , After 23.9 degree C.

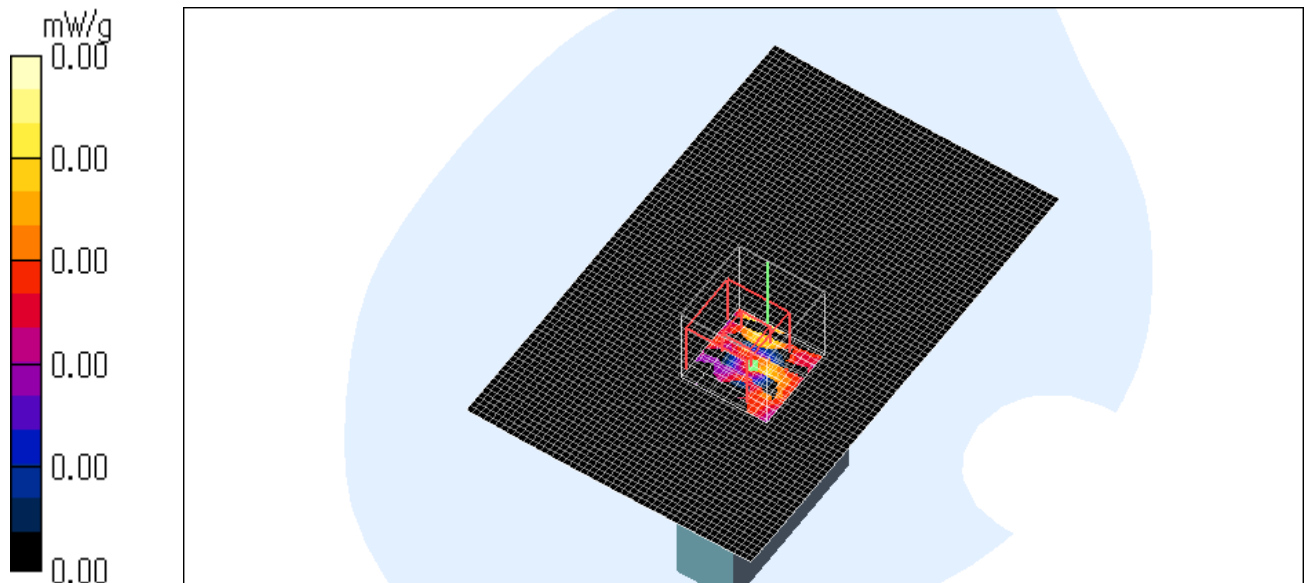

UL Apex Co., Ltd.

Head Office EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone: +81 596 24 8116

Facsimile: +81 596 24 8124

COOLPIX S6 / Head / Left Side / 2412 MHz / 11g(12Mbps)

Duty Cycle: 1:1

Medium parameters used: $f = 2450$ MHz; $\sigma = 1.88$ mho/m; $\epsilon_r = 37.6$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY4 (High Precision Assessment)

DASY4 Configuration:

Probe: EX3DV3 - SN3507; ConvF(8.25, 8.25, 8.25); Calibrated: 2005/04/12

Sensor-Surface: 2mm (Mechanical Surface Detection)

Electronics: DAE3 Sn509; Calibrated: 2005/05/26

Phantom: SAM 1196

Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 145

Area Scan (51x81x1): Measurement grid: $dx=20$ mm, $dy=20$ mm

Maximum value of SAR (interpolated) = 0.061 mW/g

Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 11.3 V/m; Power Drift = -0.204 dB

Peak SAR (extrapolated) = 0.413 W/kg


SAR(1 g) = 0.074 mW/g; SAR(10 g) = 0.021 mW/g

Maximum value of SAR (measured) = 0.225 mW/g

Test Date = 11/09/05

Ambient Temperature = 25.0 degree C.

Liquid Temperature = Before 23.9 degree C. , After 23.9 degree C.

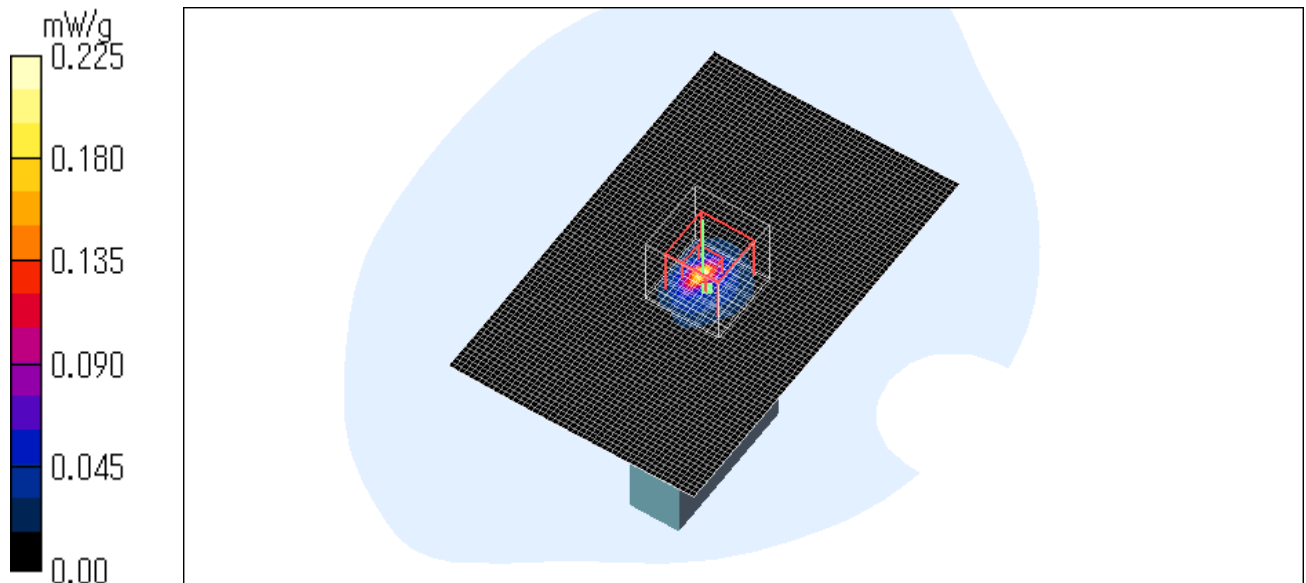

UL Apex Co., Ltd.

Head Office EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone: +81 596 24 8116

Facsimile: +81 596 24 8124

COOLPIX S6 / Head / Left Side / 2462 MHz / 11g(12Mbps)

Duty Cycle: 1:1

Medium parameters used: $f = 2450$ MHz; $\sigma = 1.88$ mho/m; $\epsilon_r = 37.6$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY4 (High Precision Assessment)

DASY4 Configuration:

Probe: EX3DV3 - SN3507; ConvF(8.25, 8.25, 8.25); Calibrated: 2005/04/12

Sensor-Surface: 2mm (Mechanical Surface Detection)

Electronics: DAE3 Sn509; Calibrated: 2005/05/26

Phantom: SAM 1196

Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 145

Area Scan (51x81x1): Measurement grid: $dx=20$ mm, $dy=20$ mm

Maximum value of SAR (interpolated) = 0.056 mW/g

Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 8.86 V/m; Power Drift = -0.294 dB

Peak SAR (extrapolated) = 0.311 W/kg


SAR(1 g) = 0.052 mW/g; SAR(10 g) = 0.014 mW/g

Maximum value of SAR (measured) = 0.149 mW/g

Test Date = 11/09/05

Ambient Temperature = 25.0 degree C.

Liquid Temperature = Before 23.9 degree C. , After 23.9 degree C.

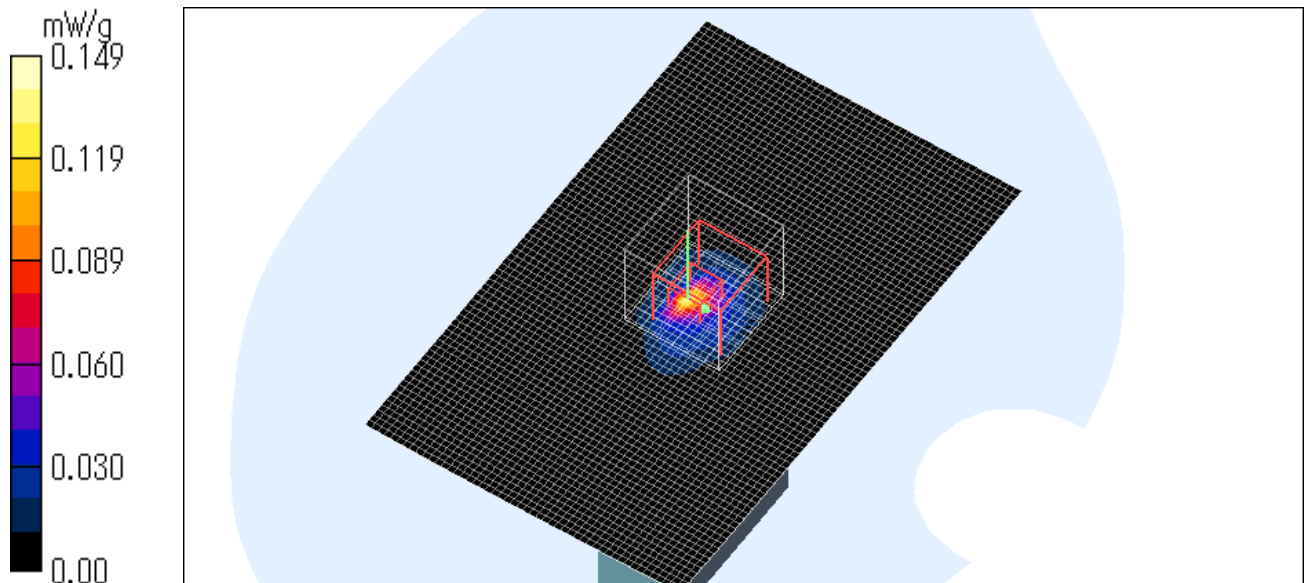

UL Apex Co., Ltd.

Head Office EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone: +81 596 24 8116

Facsimile: +81 596 24 8124