

LTE Band 2 (Part 24E) result

BW(MHz)	Channel	Frequency (MHz)	Mode	Emission (dBm)	Limit (dBm)
1.4	18607	1850.7	QPSK	-28.213	-13
			16QAM	-29.068	-13
1.4	18900	1909.3	QPSK	-31.515	-13
			16QAM	-32.258	-13
3	18615	1851.5	QPSK	-26.516	-13
			16QAM	-25.888	-13
3	19185	1908.5	QPSK	-27.474	-13
			16QAM	-24.733	-13
5	18625	1852.5	QPSK	-23.129	-13
			16QAM	-23.122	-13
5	19175	1907.5	QPSK	-25.052	-13
			16QAM	-25.399	-13
10	18650	1855	QPSK	-32.986	-13
			16QAM	-35.466	-13
10	19150	1905	QPSK	-34.483	-13
			16QAM	-34.911	-13
15	18675	1857.5	QPSK	-28.406	-13
			16QAM	-28.822	-13
15	19125	1902.5	QPSK	-30.133	-13
			16QAM	-30.203	-13
20	18700	1860	QPSK	-29.364	-13
			16QAM	-29.905	-13
20	19100	1900	QPSK	-30.722	-13
			16QAM	-31.061	-13

LTE Band 4 (Part 27) result


BW(MHz)	Channel	Frequency (MHz)	Mode	Emission (dBm)	Limit (dBm)
1.4	19957	1710.7	QPSK	-34.024	-13
			16QAM	-31.745	-13
1.4	20393	1754.3	QPSK	-31.036	-13
			16QAM	-33.371	-13
3	19965	1711.5	QPSK	-27.128	-13
			16QAM	-26.310	-13
3	20385	1753.5	QPSK	-27.325	-13
			16QAM	-26.325	-13
5	19975	1712.5	QPSK	-24.056	-13
			16QAM	-25.115	-13
5	20375	1752.5	QPSK	-23.925	-13
			16QAM	-24.906	-13
10	20000	1715	QPSK	-23.724	-13
			16QAM	-24.364	-13
10	20350	1750	QPSK	-26.642	-13
			16QAM	-24.586	-13
15	20025	1717.5	QPSK	-26.158	-13
			16QAM	-27.694	-13
15	20325	1747.5	QPSK	-26.198	-13
			16QAM	-26.532	-13
20	20050	1720	QPSK	-29.412	-13
			16QAM	-30.254	-13
20	20300	1745	QPSK	-31.743	-13
			16QAM	-31.314	-13

LTE Band 17 (Part 27) result

BW(MHz)	Channel	Frequency (MHz)	Mode	Emission (dBm)	Limit (dBm)
5	23755	706.5	QPSK	-18.035	-13
			16QAM	-17.667	-13
5	23825	713.5	QPSK	-19.322	-13
			16QAM	-20.421	-13
10	23780	709	QPSK	-20.397	-13
			16QAM	-17.753	-13
10	23800	711	QPSK	-18.578	-13
			16QAM	-19.668	-13

Test Plots

LTE Band 2 (Part 24E)

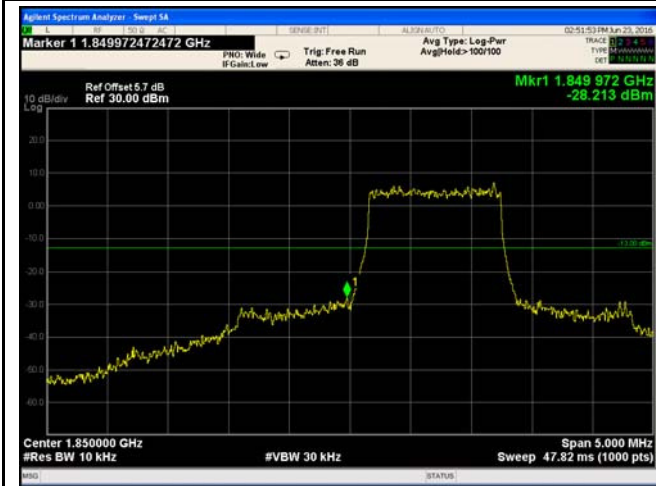


LTE Band 2 - Low Channel QPSK-1.4

Note: Offset=Cable loss (4.5) + 10log
 $(13.51/10)=4.5+1.2=5.7\text{dB}$




LTE Band 2 - High Channel QPSK-1.4

Note: Offset=Cable loss (4.5) + 10log
 $(12.25/10)=4.5+1.2=5.7\text{dB}$

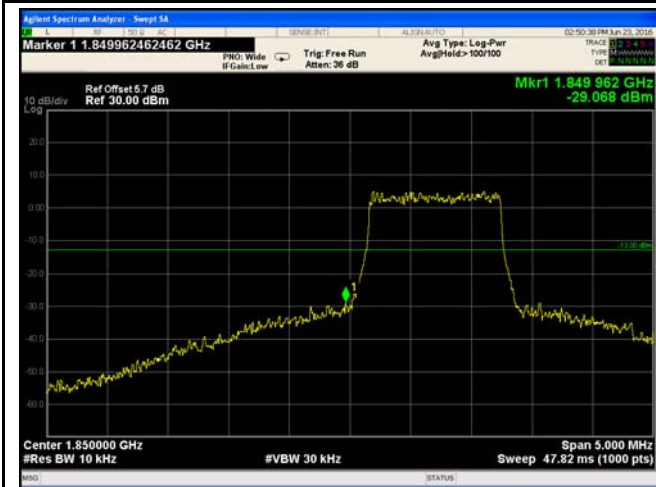

LTE Band 2 - Low Channel 16QAM-1.4

Note: Offset=Cable loss (4.5) + 10log
 $(13.05/10)=4.5+1.2=5.7\text{dB}$

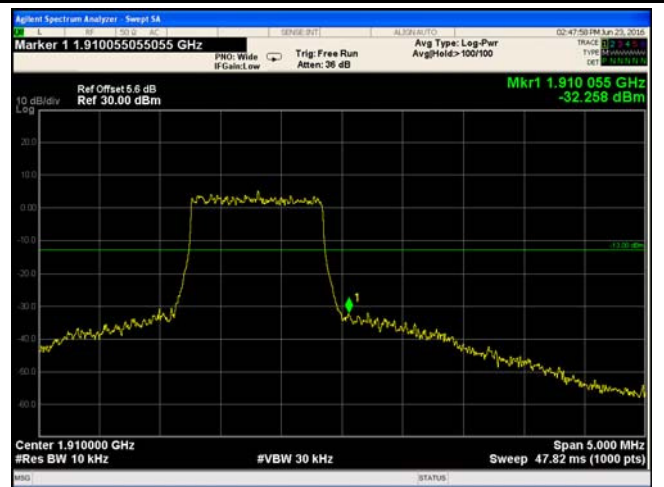

LTE Band 2 - High Channel 16QAM-1.4

Note: Offset=Cable loss (4.5) + 10log
 $(12.95/10)=4.5+1.1=5.6\text{dB}$




LTE Band 2 - Low Channel QPSK-3

Note: Offset=Cable loss (4.5) + 10log
(30.52/30)=4.5+0.1=4.6 dB



LTE Band 2 - High Channel QPSK-3

Note: Offset=Cable loss (4.5) + 10log
(30.67/30)=4.5+0.1=4.6 dB

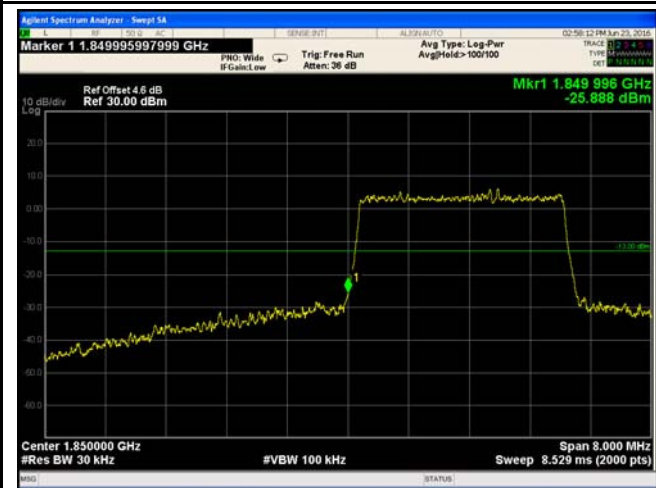


LTE Band 2 - Low Channel 16QAM-3

Note: Offset=Cable loss (4.5) + 10log
(30.65/30)=4.5+0.1=4.6 dB



LTE Band 2 - High Channel 16QAM-3

Note: Offset=Cable loss (4.5) + 10log
(30.63/30)=4.5+0.1=4.6 dB

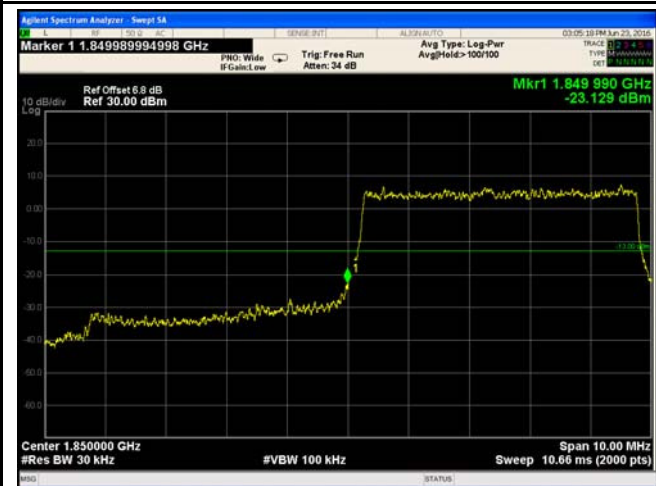

LTE Band 2 - Low Channel QPSK-5



LTE Band 2 - High Channel QPSK-5

Note: Offset=Cable loss (4.5) + 10log
(51.02/30)=4.5+2.3=6.8 dB




LTE Band 2 - Low Channel 16QAM-5

Note: Offset=Cable loss (4.5) + 10log
(50.85/30)=4.5+2.3=6.8 dB




LTE Band 2 - High Channel 16QAM-5

Note: Offset=Cable loss (4.5) + 10log
(51.09/30)=4.5+2.3=6.8 dB

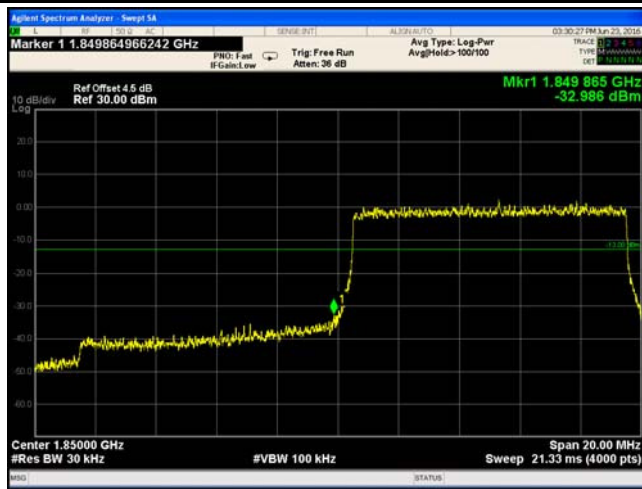


LTE Band 2 - Low Channel QPSK-10


Note: Offset=Cable loss (4.5) + 10log
(50.74/30)=4.5+2.3=6.8 dB

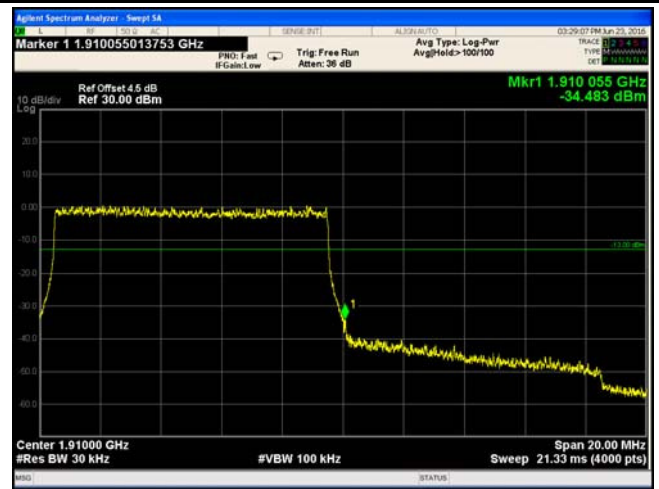

LTE Band 2 - High Channel QPSK-10

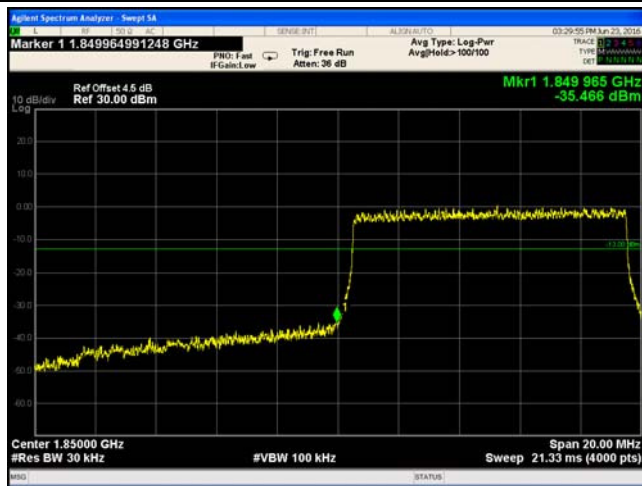


LTE Band 2 - Low Channel 16QAM-10

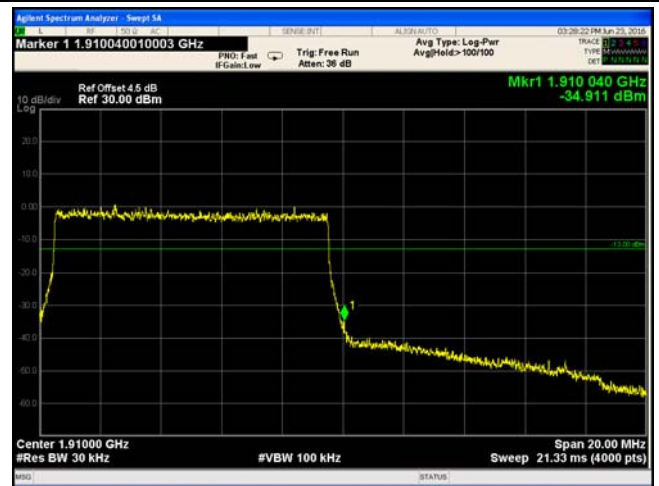


LTE Band 2 - High Channel 16QAM-10

Note: Offset=Cable loss (4.5) + 10log
(100.8/100)=4.5+0.0=4.5 dB

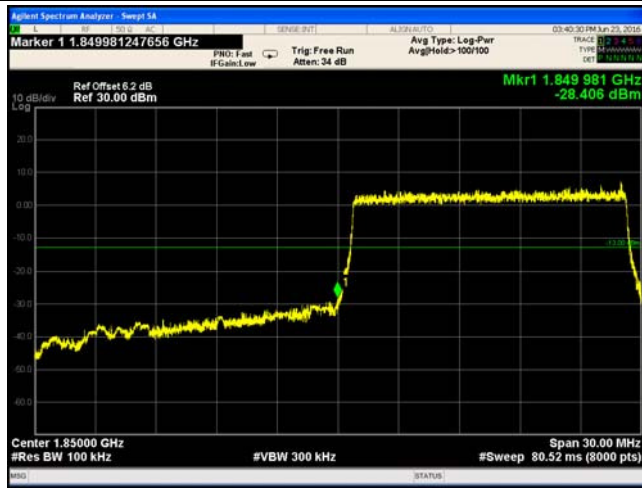


LTE Band 2 - Low Channel QPSK-15

Note: Offset=Cable loss (4.5) + 10log
(101.3/100)=4.5+0.0=4.5 dB

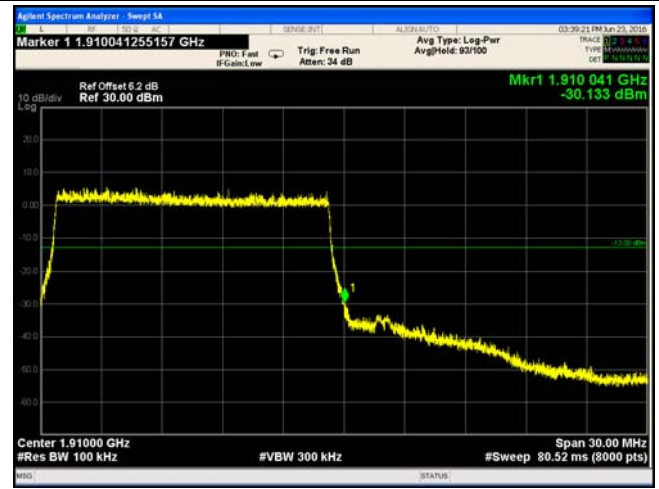


LTE Band 2 - High Channel QPSK-15

Note: Offset=Cable loss (4.5) + 10log
(149.1/100)=4.5+1.7=6.2 dB

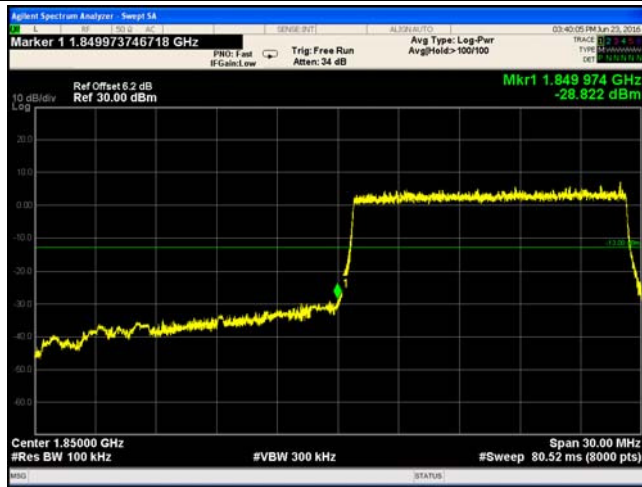

LTE Band 2 - Low Channel 16QAM-15


Note: Offset=Cable loss (4.5) + 10log
(150.3/100)=4.5+1.7=6.2 dB

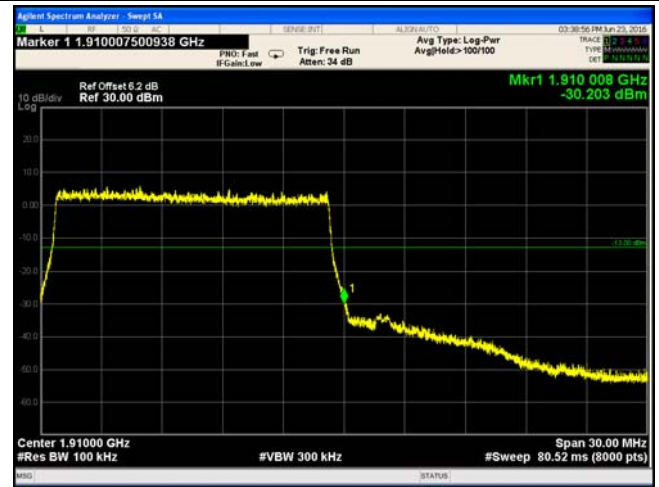

LTE Band 2 - High Channel 16QAM-15


Note: Offset=Cable loss (4.5) + 10log
(149.4/100)=4.5+1.7=6.2 dB

Note: Offset=Cable loss (4.5) + 10log
(149.2/100)=4.5+1.7=6.2 dB

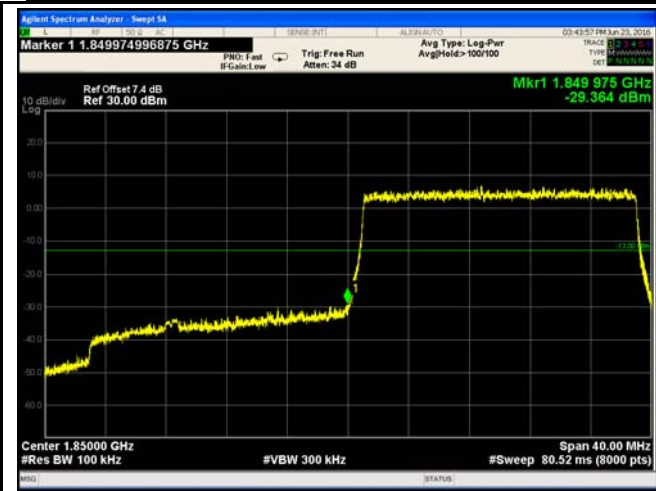


LTE Band 2 - Low Channel QPSK-20

Note: Offset=Cable loss (4.5) + 10log
(193/100)=4.5+2.9=7.4 dB

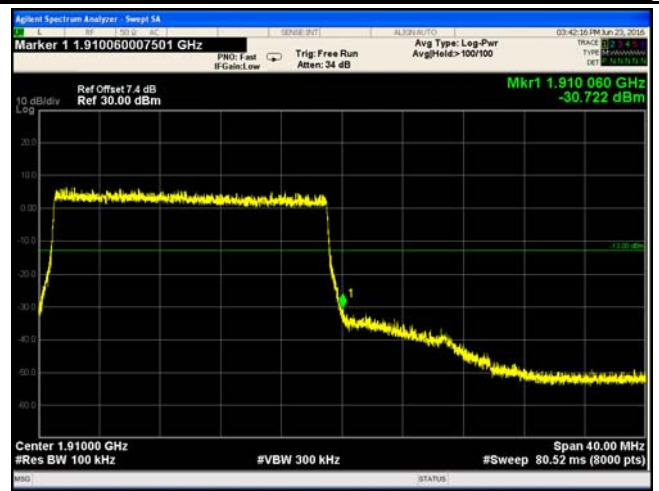


LTE Band 2 - High Channel QPSK-20

Note: Offset=Cable loss (4.5) + 10log
(194/100)=4.5+2.8=7.3 dB

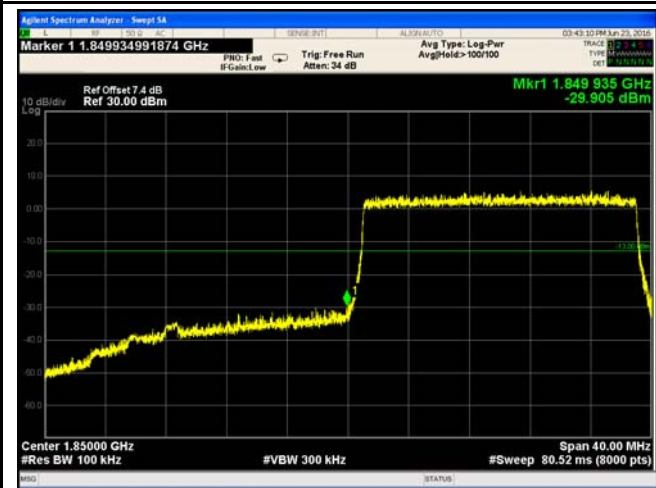

LTE Band 2 - Low Channel 16QAM-20

Note: Offset=Cable loss (4.5) + 10log
(193.6/100)=4.5+2.9=7.4 dB

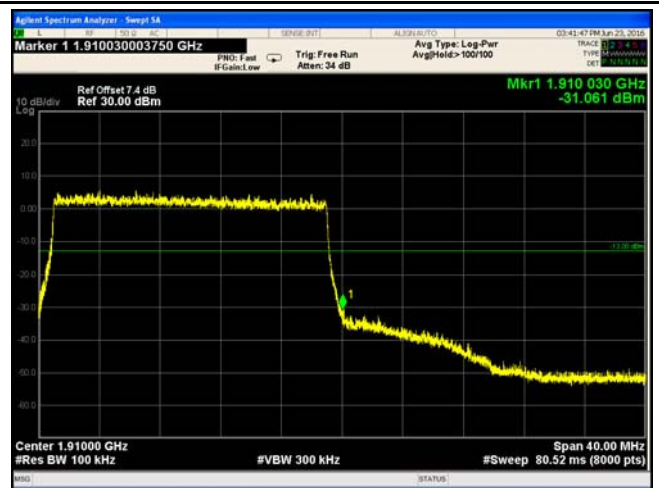

LTE Band 2 - High Channel 16QAM-20


Note: Offset=Cable loss (4.5) + 10log
(194.7/100)=4.5+2.9=7.4 dB

LTE Band 4 (Part 27)




LTE Band 4 - Low Channel QPSK-1.4

Note: Offset=Cable loss (4.5) + 10log
(12.56/10)=4.5+1.0=5.5 dB

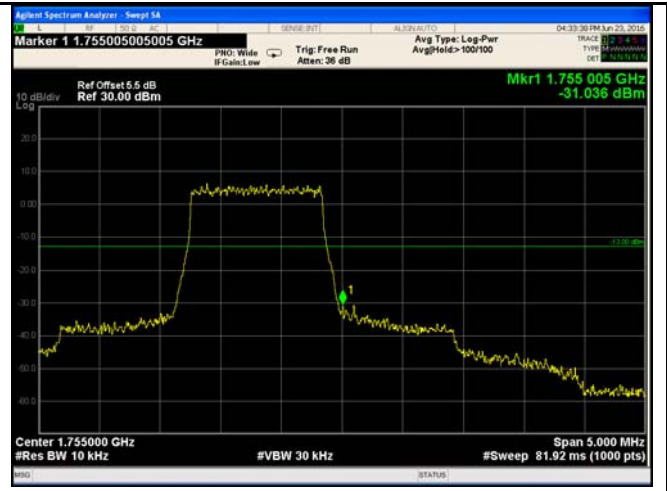


LTE Band 4 - High Channel QPSK-1.4

Note: Offset=Cable loss (4.5) + 10log
(12.68/10)=4.5+1.1=5.6 dB

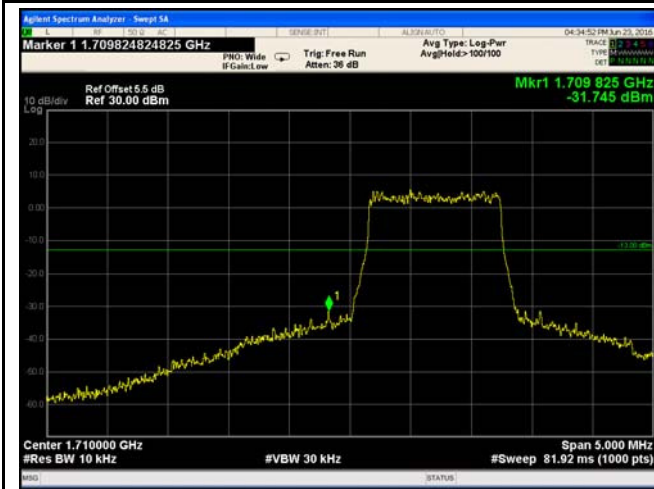


LTE Band 4 - Low Channel 16QAM-1.4

Note: Offset=Cable loss (4.5) + 10log
(12.66/10)=4.5+1.0=5.5 dB

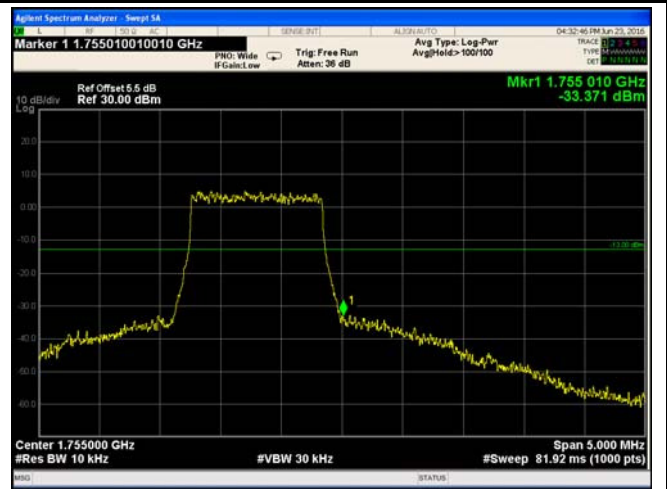


LTE Band 4 - High Channel 16QAM-1.4

Note: Offset=Cable loss (4.5) + 10log
((12.47/10)=4.5+1.0=5.5 dB

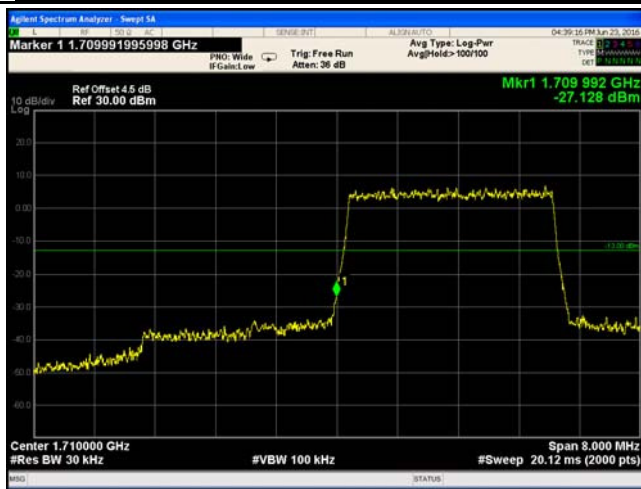


LTE Band 4 - Low Channel QPSK-3

Note: Offset=Cable loss (4.5) + 10log
(30.14/30)=4.5+0.0=4.5 dB

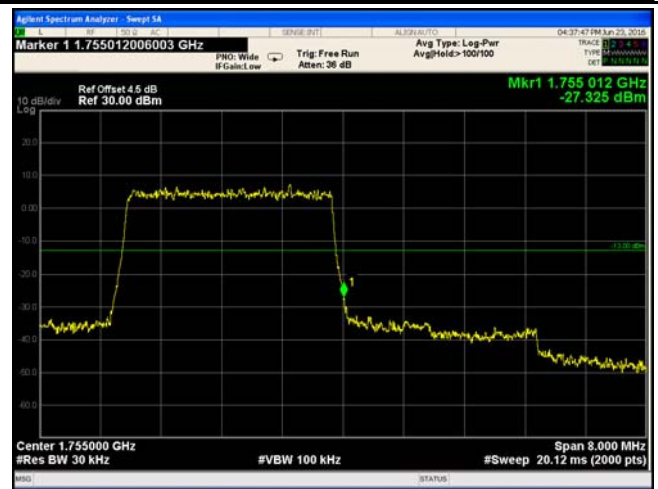


LTE Band 4 - High Channel QPSK-3

Note: Offset=Cable loss (4.5) + 10log
(30.08/30)=4.5+0.0=4.5 dB

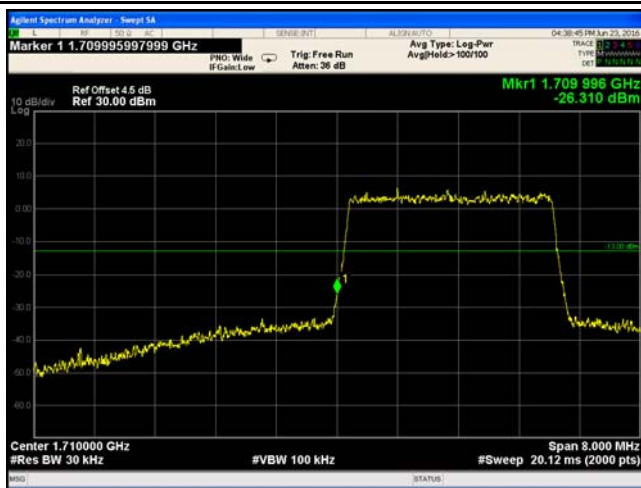


LTE Band 4 - Low Channel 16QAM-3

Note: Offset=Cable loss (4.5) + 10log
(30.24/30)=4.5+0.0=4.5 dB

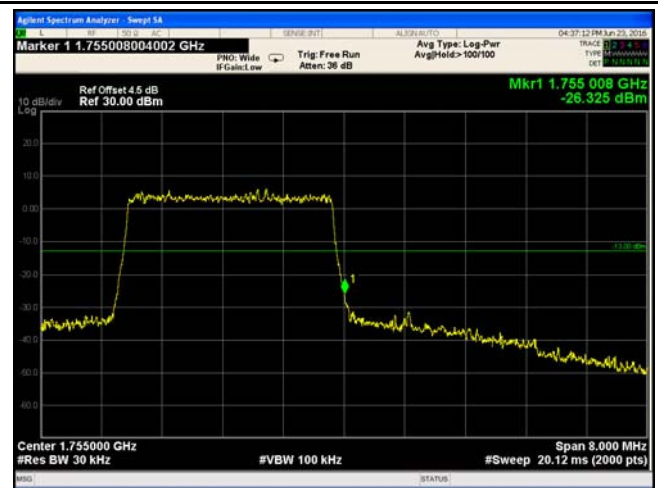


LTE Band 4 - High Channel 16QAM-3

Note: Offset=Cable loss (4.5) + 10log
(30.21/30)=4.5+0.0=4.5 dB

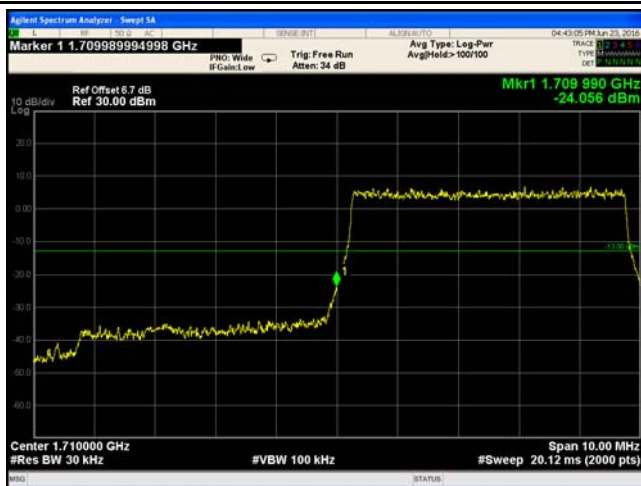


LTE Band 4 - Low Channel QPSK-5

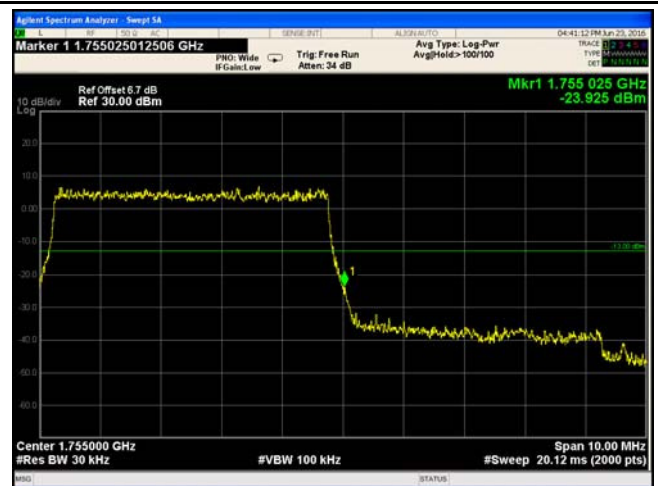

LTE Band 4 - High Channel QPSK-5

Note: Offset=Cable loss (4.5) + 10log
(50.27/30)=4.5+2.2=6.7 dB

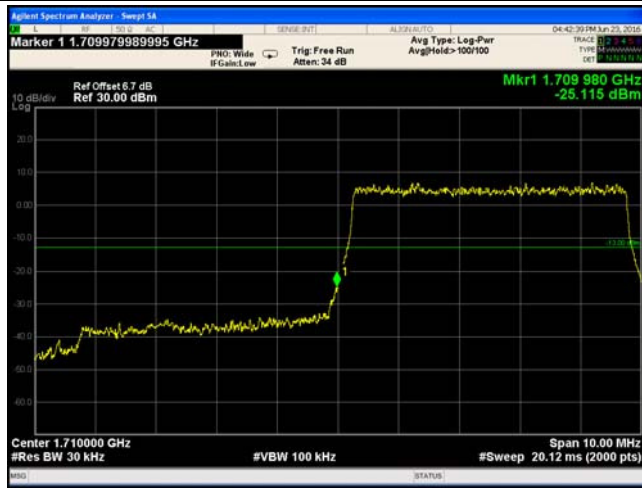


LTE Band 4 - Low Channel 16QAM-5

Note: Offset=Cable loss (4.5) + 10log
(50.2/30)=4.5+2.2=6.7 dB




LTE Band 4 - High Channel 16QAM-5

Note: Offset=Cable loss (4.5) + 10log
(50.23/30)=4.5+2.2=6.7 dB

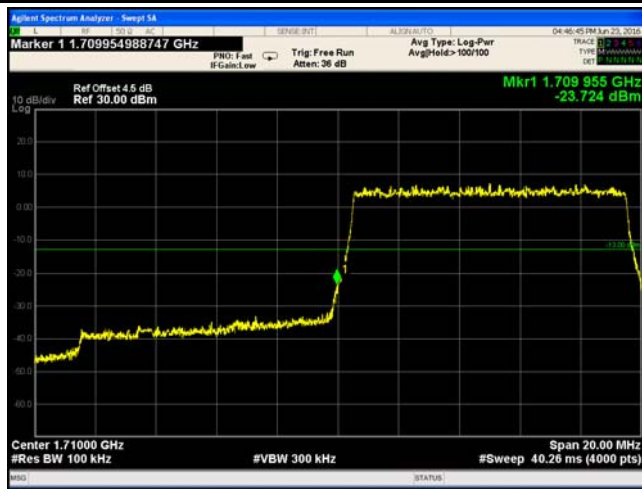


LTE Band 4 - Low Channel QPSK-10

Note: Offset=Cable loss (4.5) + 10log
(50.1/30)=4.5+2.2=6.7 dB

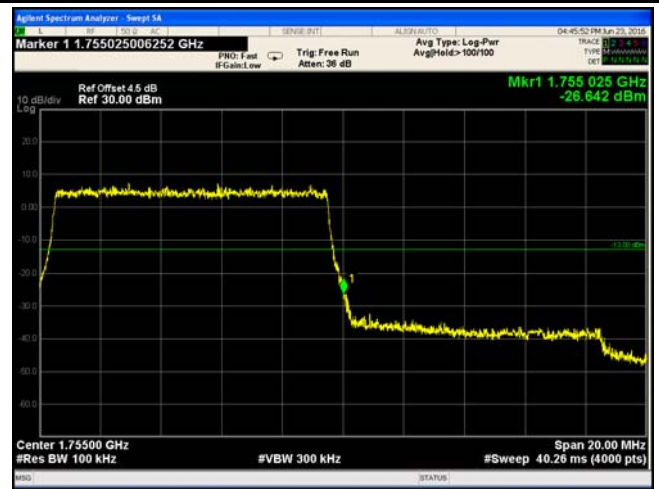

LTE Band 4 - High Channel QPSK-10

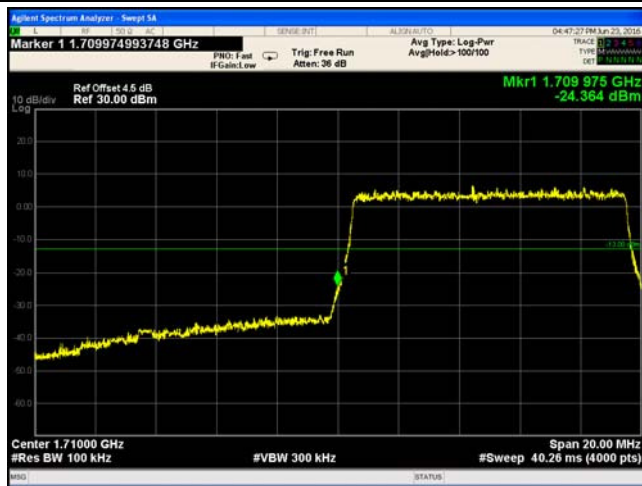

LTE Band 4 - Low Channel 16QAM-10




LTE Band 4 - High Channel 16QAM-10




LTE Band 4 - Low Channel QPSK-15

Note: Offset=Cable loss (4.5) + 10log
(144.4/100)=4.5+1.6=6.1 dB

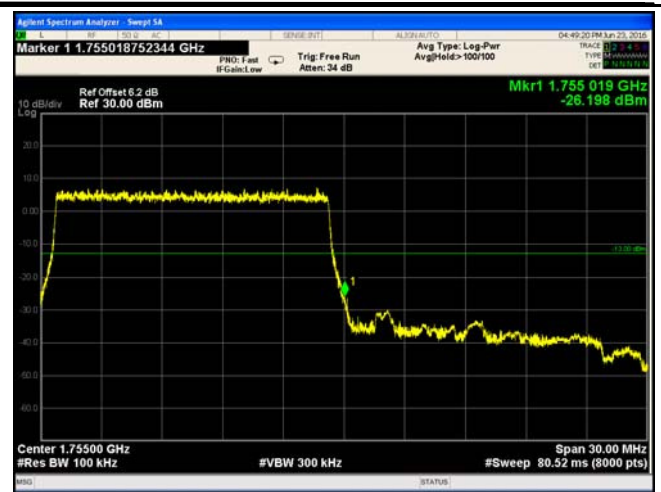


LTE Band 4 - High Channel QPSK-15

Note: Offset=Cable loss (4.5) + 10log
(146.5/100)=4.5+1.7=6.2 dB

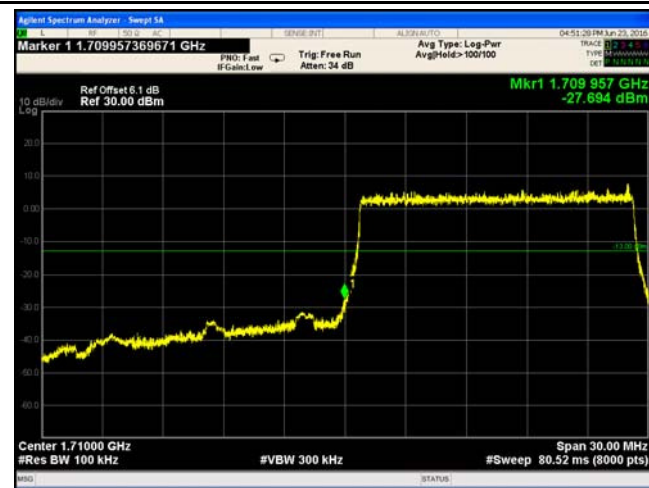


LTE Band 4 - Low Channel 16QAM-15

Note: Offset=Cable loss (4.5) + 10log
(145.6/100)=4.5+1.6=6.1 dB

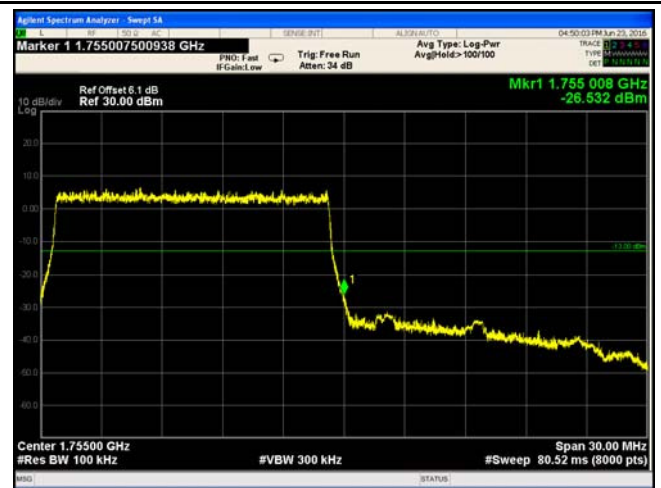


LTE Band 4 - High Channel 16QAM-15

Note: Offset=Cable loss (4.5) + 10log
(146.2/100)=4.5+1.6=6.1 dB

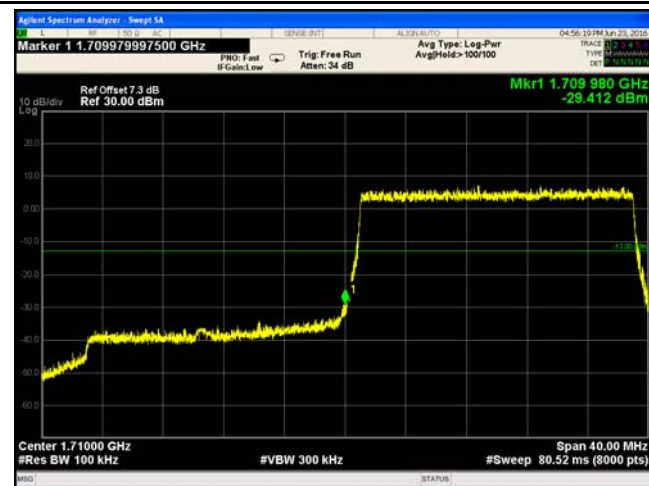


LTE Band 4 - Low Channel QPSK-20

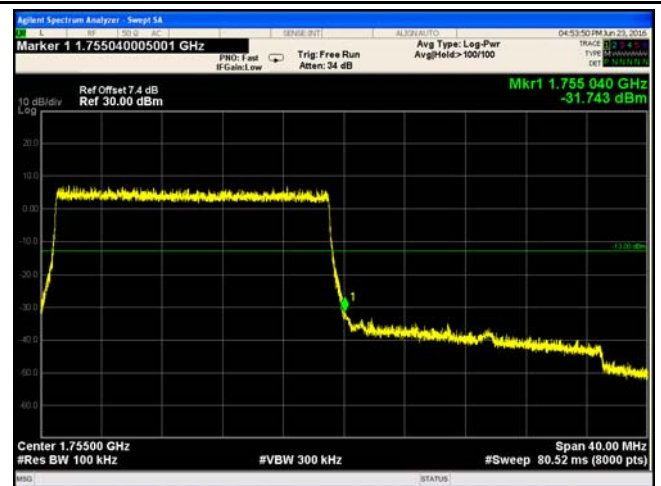

LTE Band 4 - High Channel QPSK-20


Note: Offset=Cable loss (4.5) + 10log
 (191.6/100)=4.5+2.8=7.3 dB

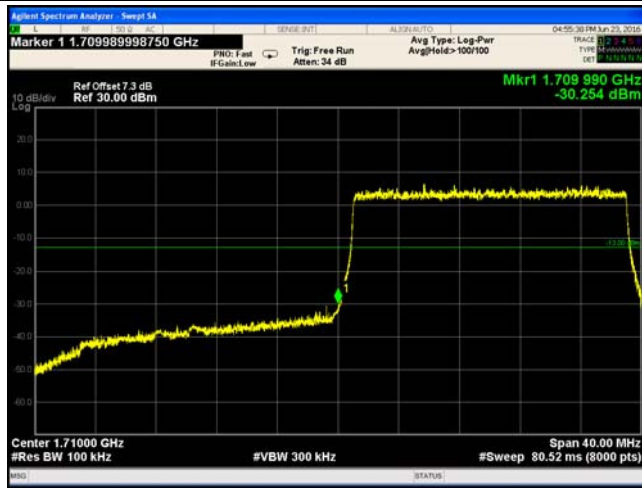

LTE Band 4 - Low Channel 16QAM-20

Note: Offset=Cable loss (4.5) + 10log
 (192.4/100)=4.5+2.8=7.3dB


Note: Offset=Cable loss (4.5) + 10log
 (193.4/100)=4.5+2.9=7.4 dB

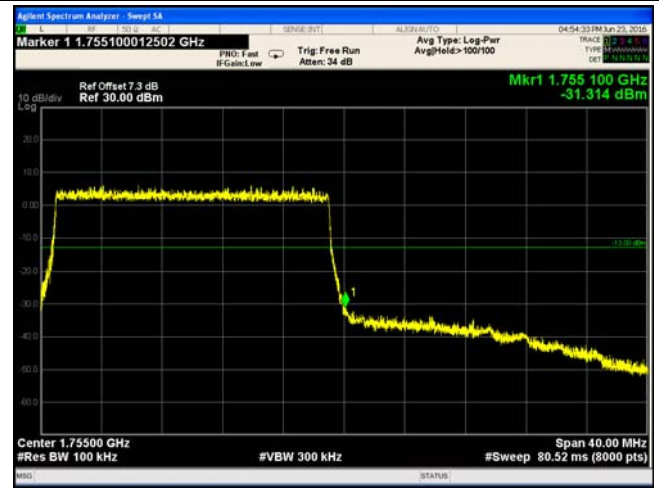

LTE Band 4 - High Channel 16QAM-20

Note: Offset=Cable loss (4.5) + 10log
 (192.1/100)=4.5+2.8=7.3 dB

LTE Band 17 (Part 27)

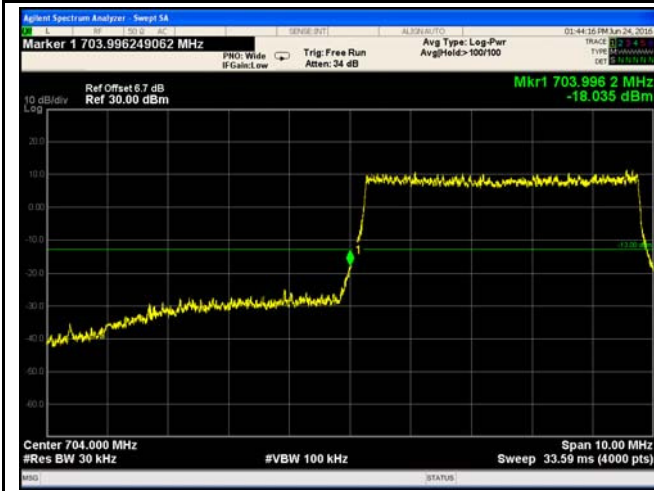


LTE Band 17 - Low Channel QPSK-5

Note: Offset=Cable loss (4.0) + 10log
(50.15/30)=4.5+2.2=6.7 dB




LTE Band 17 - High Channel QPSK-5

Note: Offset=Cable loss (4.0) + 10log
(50.36/30)=4.5+2.2=6.7 dB

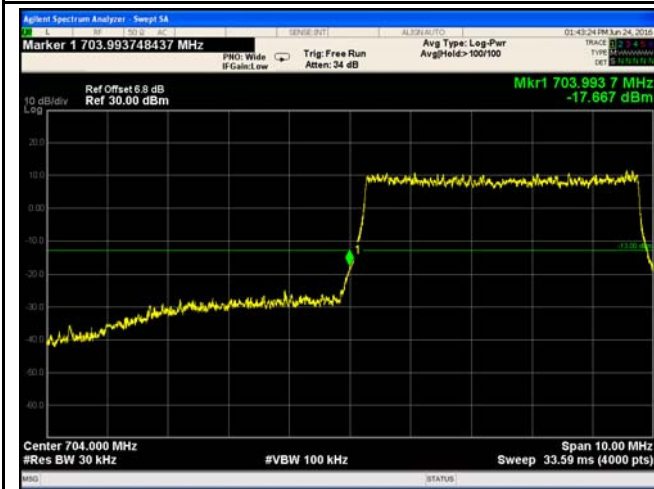


LTE Band 17 - Low Channel 16QAM-5

Note: Offset=Cable loss (4.0) + 10log
(50.37/30)=4.5+2.3=6.8 dB

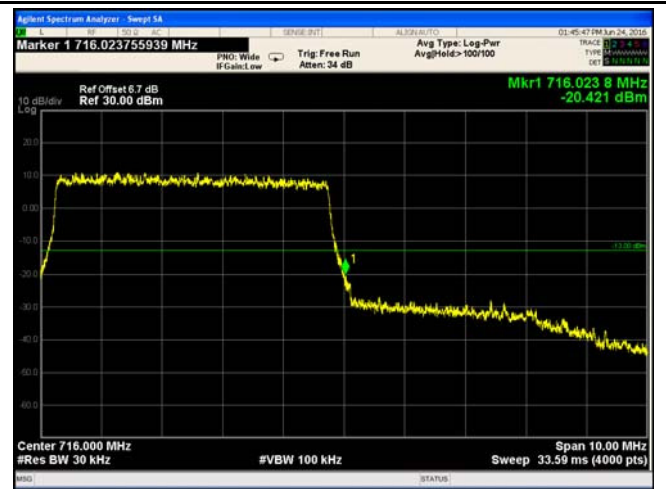

LTE Band 17 - High Channel 16QAM-5

Note: Offset=Cable loss (4.0) + 10log
(50.35/30)=4.5+2.2=6.7 dB

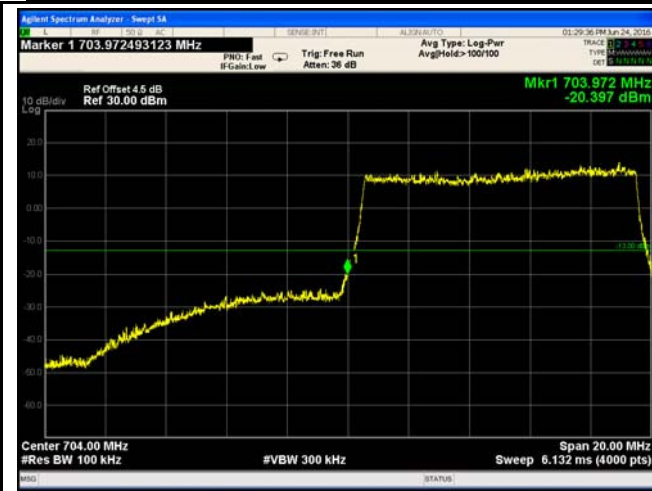

LTE Band 17 - Low Channel QPSK-10



LTE Band 17 - High Channel QPSK-10



LTE Band 17 - Low Channel 16QAM-10




LTE Band 17 - High Channel 16QAM-10

6.8 Band Edge 27.53(m)

Temperature	24°C
Relative Humidity	56%
Atmospheric Pressure	1023mbar
Test date :	June 23&24, 2016
Tested By :	Loren Luo

Requirement(s):


Spec	Requirement	Applicable
§27.53(m)	According to FCC 27.53(m)(4) specified that power of any emission outside of the channel edge must be attenuated below the transmitting power(P) by a factor shall be not less than $43+10\log(P)$ dB at the channel edge, the limit of emission equal to -13dBm. And $55+10\log(P)$ dB at 5.5MHz from the channel edges, the limit of emission equal to -25dBm. In the 1MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed.	<input checked="" type="checkbox"/>
Test Setup		
Test Procedure	<ul style="list-style-type: none"> - The EUT was connected to Spectrum Analyzer and Base Station via power divider. - The 99% and 26 dB occupied bandwidth (BW) of the middle channel for the highest RF powers. 	
Remark		
Result	<input checked="" type="checkbox"/> Pass <input type="checkbox"/> Fail	

Test Data Yes N/A
 Test Plot Yes (See below) N/A

LTE Band 7 (Part 27) result


BW(MHz)	Channel	Frequency (MHz)	Mode	Emission (dBm)	Limit (dBm)
5	20775	2502.5	QPSK	-29.339	-13
			16QAM	-31.352	-13
5	21425	2567.5	QPSK	-30.089	-13
			16QAM	-31.541	-13
10	20800	2505	QPSK	-30.193	-13
			16QAM	-31.350	-13
10	21400	2562.5	QPSK	-33.585	-13
			16QAM	-33.117	-13
15	20825	2507.5	QPSK	-31.333	-13
			16QAM	-29.540	-13
15	21400	2562.5	QPSK	-27.161	-13
			16QAM	-28.897	-13
20	20850	2510	QPSK	-29.692	-13
			16QAM	-30.871	-13
20	21350	2560	QPSK	-30.099	-13
			16QAM	-30.513	-13

LTE Band 7 (Part 27)

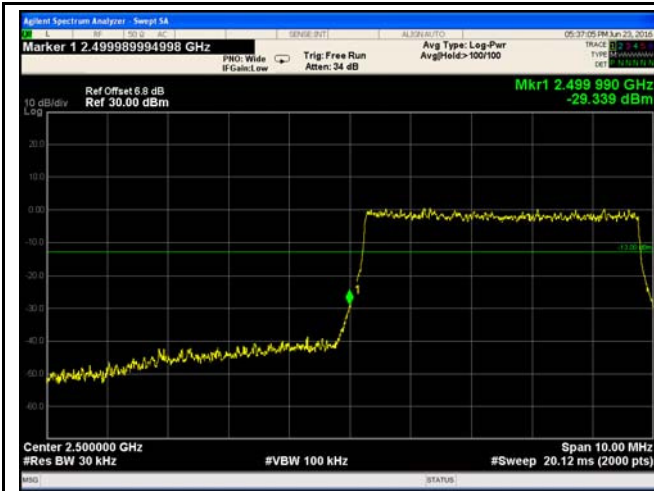


LTE Band 7 - Low Channel QPSK-5

Note: Offset=Cable loss (4.5) + 10log
(50.58/30)=4.5+2.3=6.8 dB

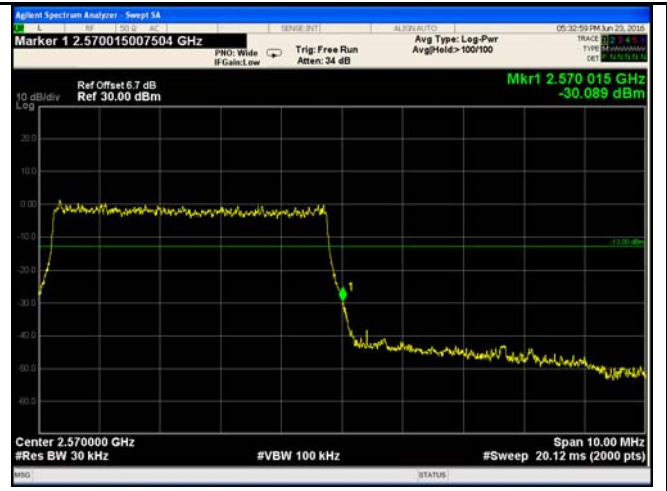


LTE Band 7 - High Channel QPSK-5

Note: Offset=Cable loss (4.5) + 10log
(50.25/30)=4.5+2.2=6.7 dB

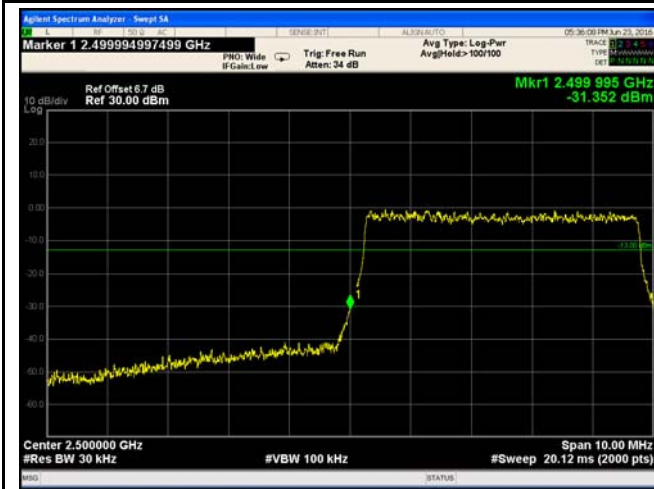


LTE Band 7 - Low Channel 16QAM-5

Note: Offset=Cable loss (4.5) + 10log
(50.01/30)=4.5+2.2=6.7 dB

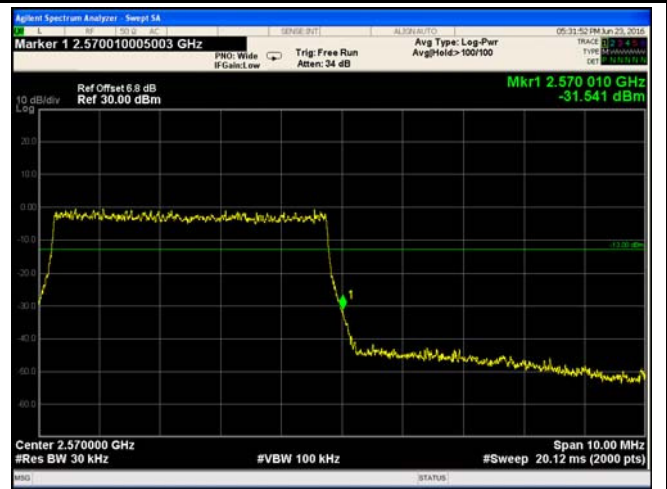

LTE Band 7 - High Channel 16QAM-5


Note: Offset=Cable loss (4.5) + 10log
(50.37/30)=4.5+2.3=6.8 dB

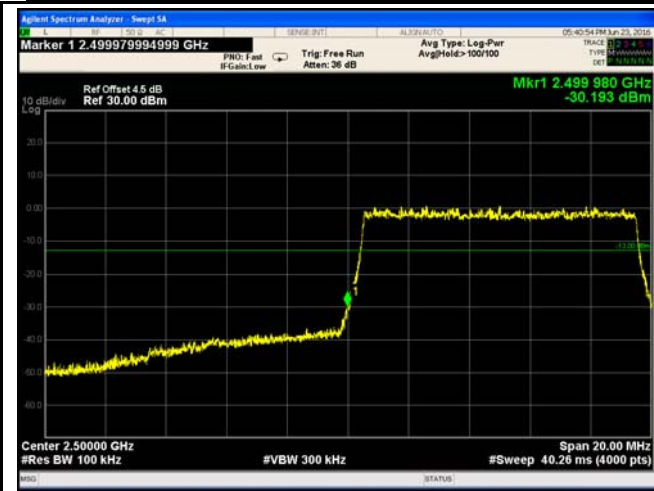


LTE Band 7 - Low Channel QPSK-10




LTE Band 7 - High Channel QPSK-10

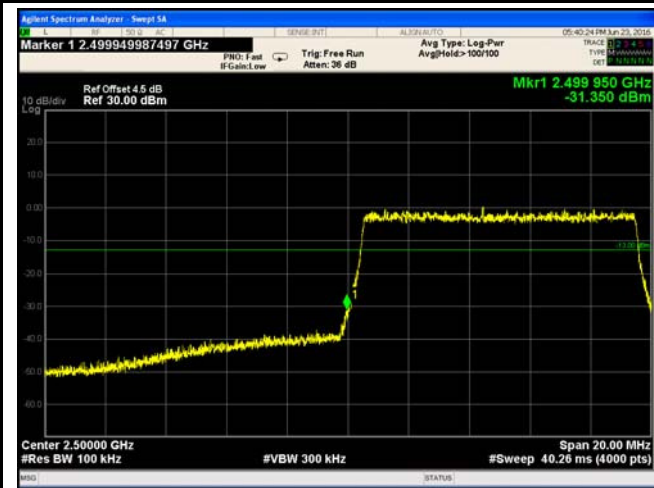

LTE Band 7 - Low Channel 16QAM-10

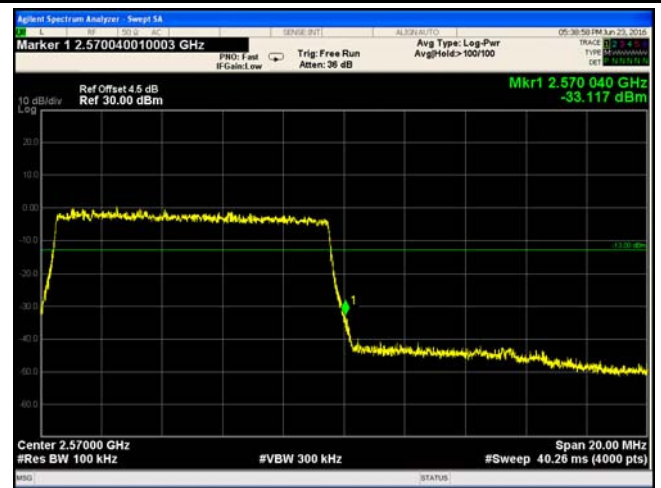

LTE Band 7 - High Channel 16QAM-10

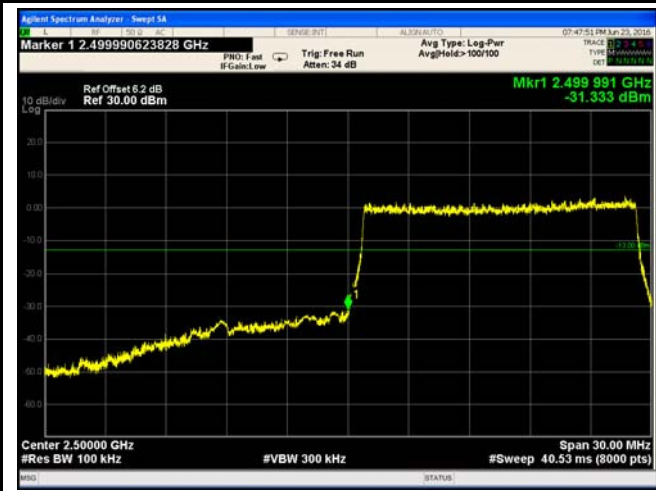


LTE Band 7 - Low Channel QPSK-15

Note: Offset=Cable loss (4.5) + 10log
(145.6/100)=4.5+1.7=6.2 dB




LTE Band 7 - High Channel QPSK-15

Note: Offset=Cable loss (4.5) + 10log
(145.5/100)=4.5+1.6=6.1 dB

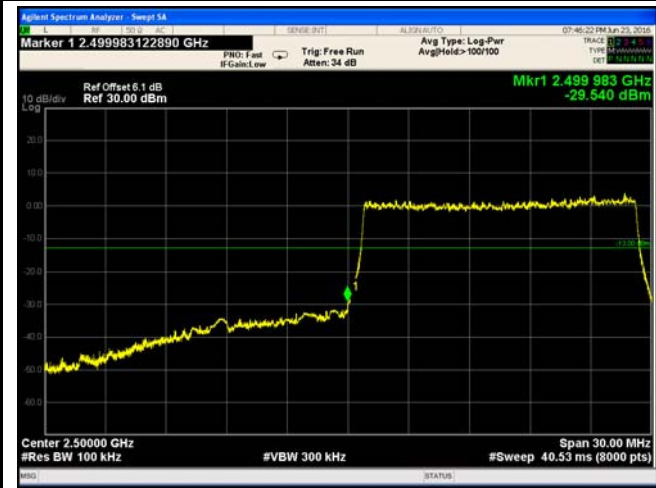

LTE Band 7 - Low Channel 16QAM-15

Note: Offset=Cable loss (4.5) + 10log
(145.9/100)=4.5+1.6=6.1dB

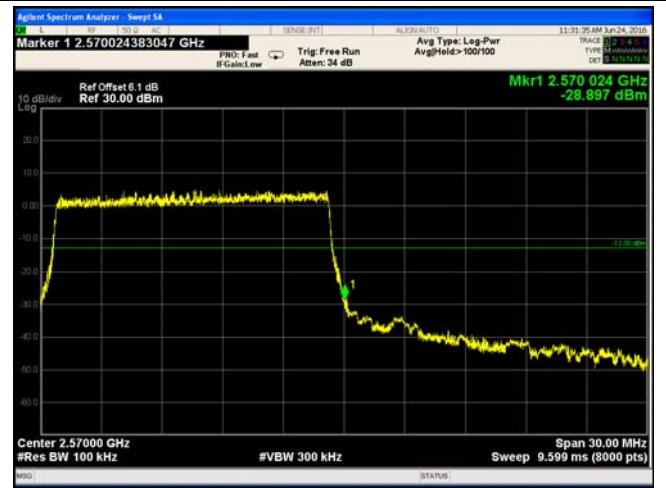


LTE Band 7 - High Channel 16QAM-15

Note: Offset=Cable loss (4.5) + 10log
(145.9/100)=4.5+1.6=6.1 dB




LTE Band 7 - Low Channel QPSK-20

Note: Offset=Cable loss (4.5) + 10log
(193.8/100)=4.5+2.9=7.4 dB

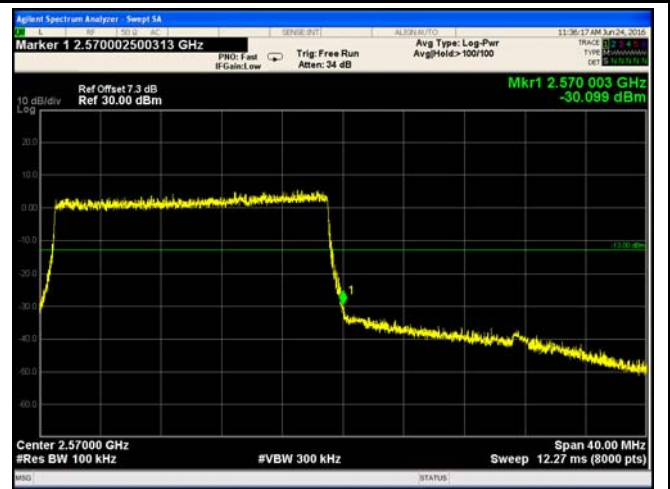


LTE Band 7 - High Channel QPSK-20

Note: Offset=Cable loss (4.5) + 10log
(191.8/100)=4.5+2.8=7.3dB

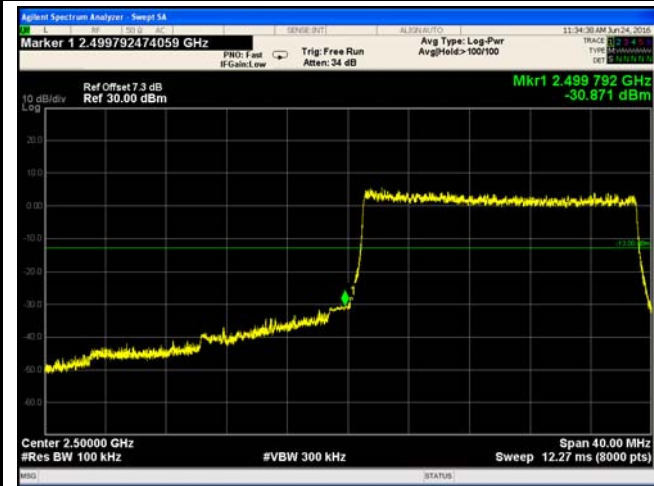

LTE Band 7 - Low Channel 16QAM-20

Note: Offset=Cable loss (4.5) + 10log
(192.3/100)=4.5+2.8=7.3 dB

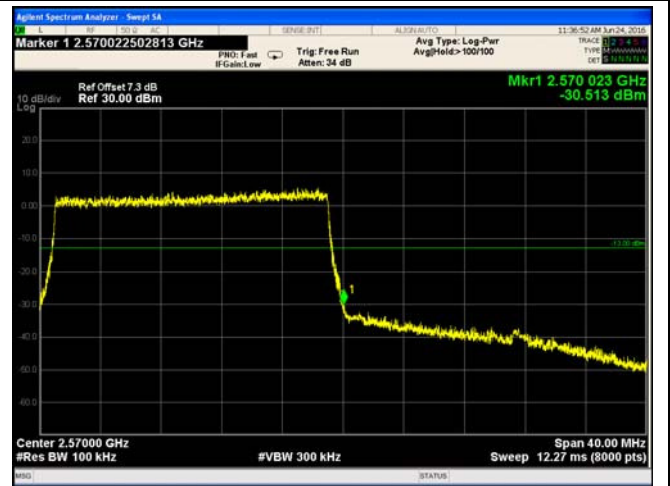

LTE Band 7 - High Channel 16QAM-20


Note: Offset=Cable loss (4.5) + 10log
(191.7/100)=4.5+2.8=7.3 dB

6.9 Frequency Stability

Temperature	23°C
Relative Humidity	55%
Atmospheric Pressure	1022mbar
Test date :	June 22, 2016
Tested By :	Loren Luo

Requirement(s):

Spec	Item	Requirement	Applicable																																
§2.1055, §22.355 & §24.235 § 27.5(h); § 27.54	a)	<p>According to §22.355, the carrier frequency of each transmitter in the Public Mobile Services must be maintained within the tolerances given in Table below:</p> <p>Frequency Tolerance for Transmitters in the Public Mobile Services</p> <table border="1"> <thead> <tr> <th>Frequency Range (MHz)</th> <th>Base, fixed (ppm)</th> <th>Mobile ≤ 3 watts (ppm)</th> <th>Mobile ≤ 3 watts (ppm)</th> </tr> </thead> <tbody> <tr> <td>25 to 50</td> <td>20.0</td> <td>20.0</td> <td>50.0</td> </tr> <tr> <td>to 450</td> <td>5.0</td> <td>5.0</td> <td>50.0</td> </tr> <tr> <td>450 to 512</td> <td>2.5</td> <td>5.0</td> <td>5 0</td> </tr> <tr> <td>821 to 896</td> <td>1.5</td> <td>2.5</td> <td>2.5</td> </tr> <tr> <td>928 to 929.</td> <td>5.0</td> <td>N/A</td> <td>N/A</td> </tr> <tr> <td>929 to 960.</td> <td>1.5</td> <td>N/A</td> <td>N/A</td> </tr> <tr> <td>2110 to 2220</td> <td>10.0</td> <td>N/A</td> <td>N/A</td> </tr> </tbody> </table> <p>According to §24.235, the frequency stability shall be sufficient to ensure that the fundamental emissions stay within the authorized frequency block.</p> <p>According to §27.54, The frequency stability shall be sufficient to ensure that the fundamental emissions stay within the authorized bands of operation.</p>	Frequency Range (MHz)	Base, fixed (ppm)	Mobile ≤ 3 watts (ppm)	Mobile ≤ 3 watts (ppm)	25 to 50	20.0	20.0	50.0	to 450	5.0	5.0	50.0	450 to 512	2.5	5.0	5 0	821 to 896	1.5	2.5	2.5	928 to 929.	5.0	N/A	N/A	929 to 960.	1.5	N/A	N/A	2110 to 2220	10.0	N/A	N/A	<input checked="" type="checkbox"/>
		Frequency Range (MHz)	Base, fixed (ppm)	Mobile ≤ 3 watts (ppm)	Mobile ≤ 3 watts (ppm)																														
		25 to 50	20.0	20.0	50.0																														
		to 450	5.0	5.0	50.0																														
		450 to 512	2.5	5.0	5 0																														
		821 to 896	1.5	2.5	2.5																														
		928 to 929.	5.0	N/A	N/A																														
		929 to 960.	1.5	N/A	N/A																														
		2110 to 2220	10.0	N/A	N/A																														

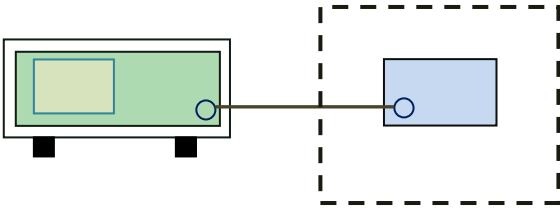Test setup	
Procedure	<p>A communication link was established between EUT and base station. The frequency error was monitored and measured by base station under variation of ambient temperature and variation of primary supply voltage.</p> <p>Limit: The frequency stability of the transmitter shall be maintained within $\pm 0.00025\%$ ($\pm 2.5\text{ppm}$) of the center frequency.</p>
Remark	<p>Frequency Stability versus Temperature: The Frequency tolerance of the carrier signal shall be maintained within 2.5ppm of the operating frequency over a temperature variation of -10°C to $+55^{\circ}\text{C}$ at normal supply voltage.</p>
Result	<input checked="" type="checkbox"/> Pass <input type="checkbox"/> Fail

Test Data Yes N/A
 Test Plot Yes (See below) N/A

LTE Band 2 (Part 24E) result

Middle Channel, f ₀ = 1880 MHz				
Temperature (°C)	Power Supplied (V _{DC})	Frequency Error (Hz)	Frequency Error (ppm)	Limit (ppm)
-10	3.7	-6	0.0032	2.5
0		-12	0.0064	2.5
10		-7	0.0037	2.5
20		-9	0.0048	2.5
30		-14	0.0074	2.5
40		-7	0.0037	2.5
50		-10	0.0053	2.5
55		-8	0.0043	2.5
25	4.2	-10	0.0053	2.5
	3.5	-12	0.0064	2.5

LTE Band 4 (Part 27) result

Middle Channel, f ₀ = 1732.5 MHz				
Temperature (°C)	Power Supplied (V _{DC})	Frequency Error (Hz)	Frequency Error (ppm)	Limit (ppm)
-10	3.7	-13	0.0075	2.5
0		-17	0.0098	2.5
10		-13	0.0075	2.5
20		-12	0.0069	2.5
30		-9	0.0052	2.5
40		-10	0.0058	2.5
50		-11	0.0063	2.5
55		-14	0.0081	2.5
25	4.2	-14	0.0081	2.5
	3.5	-15	0.0087	2.5

LTE Band 7 (Part 27) result

Middle Channel, $f_0 = 2535$ MHz				
Temperature (°C)	Power Supplied (V _{DC})	Frequency Error (Hz)	Frequency Error (ppm)	Limit (ppm)
-10	3.7	-12	0.0064	2.5
0		-7	0.0037	2.5
10		-9	0.0048	2.5
20		-10	0.0053	2.5
30		-11	0.0059	2.5
40		-9	0.0048	2.5
50		-12	0.0064	2.5
55		-9	0.0048	2.5
25		4.2	-8	0.0043
	3.5	-12	0.0064	2.5

LTE Band 17 (Part 27) result

Middle Channel, $f_0 = 710$ MHz				
Temperature (°C)	Power Supplied (V _{DC})	Frequency Error (Hz)	Frequency Error (ppm)	Limit (ppm)
-10	3.7	8	0.0113	2.5
0		6	0.0085	2.5
10		4	0.0056	2.5
20		5	0.0070	2.5
30		3	0.0042	2.5
40		4	0.0056	2.5
50		12	0.0169	2.5
55		7	0.0099	2.5
25		4.2	10	0.0141
	3.5	9	0.0127	2.5

Annex A. TEST INSTRUMENT


Instrument	Model	Serial #	Cal Date	Cal Due	In use
RF Conducted Test					
Agilent ESA-E SERIES SPECTRUM ANALYZER	E4407B	MY45108319	09/16/2015	09/15/2016	<input checked="" type="checkbox"/>
Power Splitter	1#	1#	09/01/2015	08/31/2016	<input checked="" type="checkbox"/>
Universal Radio Communication Tester	CMU200	121393	09/25/2015	09/24/2016	<input checked="" type="checkbox"/>
Wideband Radio Communication Tester	CMW500	120906	03/27/2016	03/26/2017	<input checked="" type="checkbox"/>
Temperature/Humidity Chamber	UHL-270	001	10/09/2015	10/08/2016	<input checked="" type="checkbox"/>
DC Power Supply	E3640A	MY40004013	09/17/2015	09/16/2016	<input checked="" type="checkbox"/>
RF Power Sensor	Dare RPR3006C/P/W	AY554013	09/17/2015	09/16/2016	<input checked="" type="checkbox"/>
Radiated Emissions					
EMI test receiver	ESL6	100262	09/17/2015	09/16/2016	<input checked="" type="checkbox"/>
OPT 010 AMPLIFIER (0.1-1300MHz)	8447E	2727A02430	09/01/2015	08/31/2016	<input checked="" type="checkbox"/>
Microwave Preamplifier (0.5 ~ 18GHz)	PAM-118	443008	09/01/2015	08/31/2016	<input checked="" type="checkbox"/>
Bilog Antenna (30MHz~6GHz)	JB6	A110712	09/21/2015	09/20/2016	<input checked="" type="checkbox"/>
Bilog Antenna (30MHz~2GHz)	JB1	A112017	09/21/2015	09/20/2016	<input checked="" type="checkbox"/>
Double Ridge Horn Antenna (1 ~18GHz)	AH-118	71259	09/24/2015	09/23/2016	<input checked="" type="checkbox"/>
Double Ridge Horn Antenna (1 ~18GHz)	AH-118	71283	09/24/2015	09/23/2016	<input checked="" type="checkbox"/>
SYNTHESIZED SIGNAL GENERATOR	8665B	3744A01293	09/17/2015	09/16/2016	<input checked="" type="checkbox"/>
Tunable Notch Filter	3NF-800/1000-S	AA4	09/01/2015	08/31/2016	<input checked="" type="checkbox"/>

Test Report	16070559-FCC-R5
Page	106 of 117

Tunable Notch Filter	3NF- 1000/2000-S	AM 4	09/01/2015	08/31/2016	<input checked="" type="checkbox"/>
----------------------	---------------------	------	------------	------------	-------------------------------------

Annex B. EUT And Test Setup Photographs

Annex B.i. Photograph: EUT External Photo

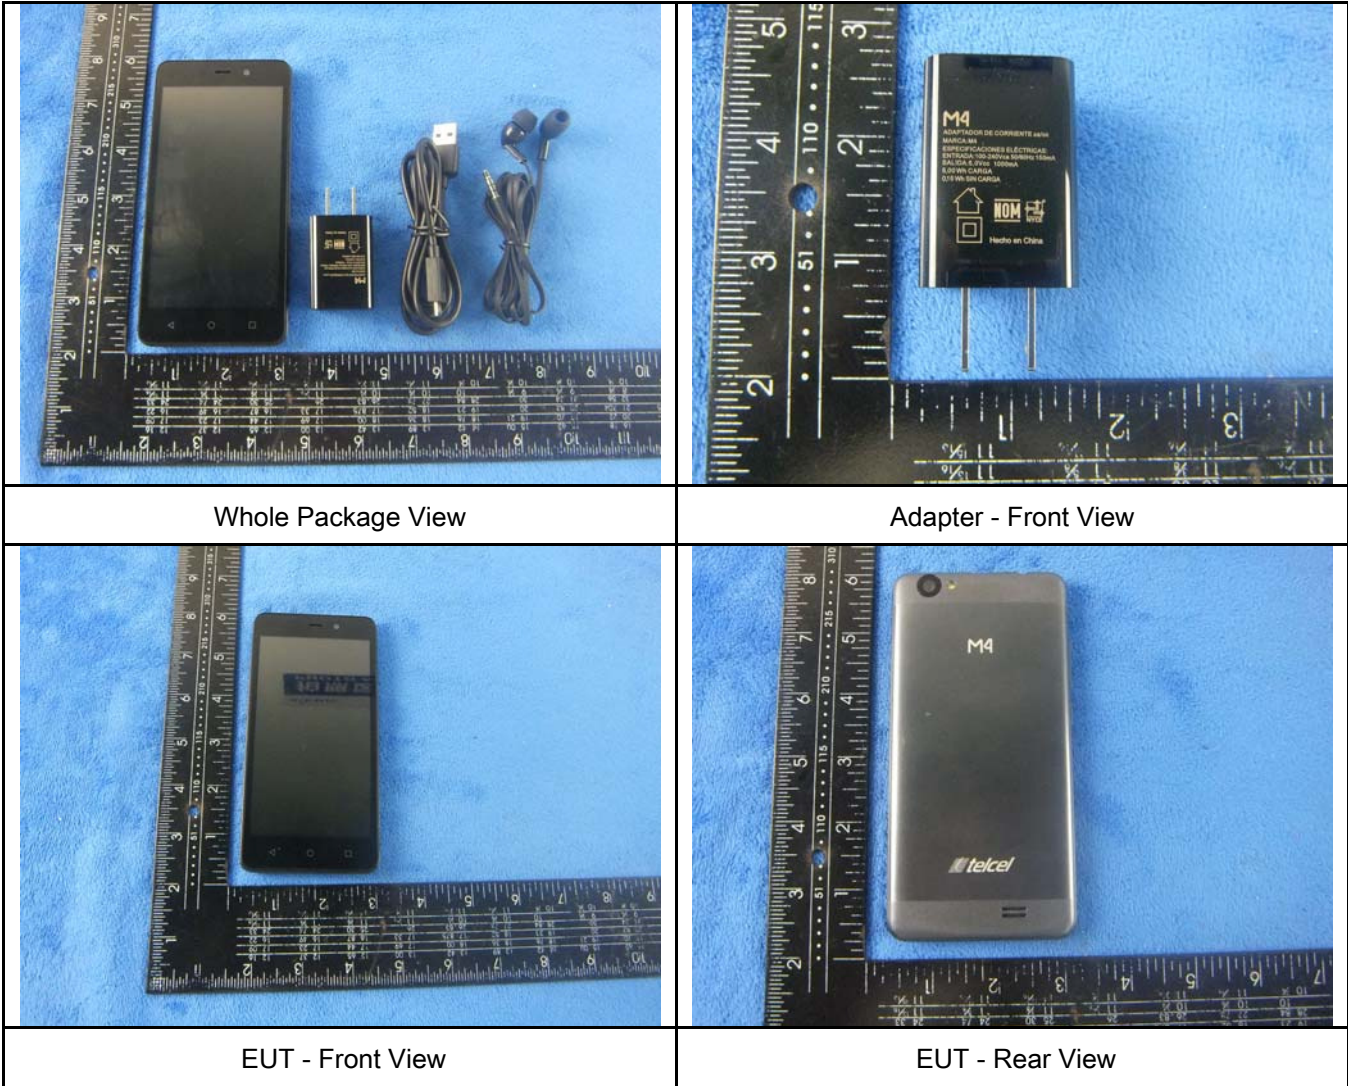



EUT - Top View



EUT - Bottom View



EUT - Left View



EUT - Right View

Annex B.ii. Photograph: EUT Internal Photo



Cover Off - Top View 1




Cover Off - Top View 2




Battery - Front View




Battery - Rear View

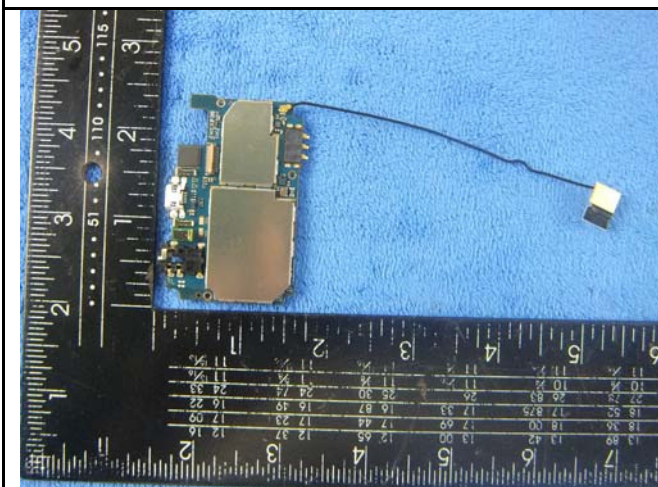


Mainboard with Shielding - Front View

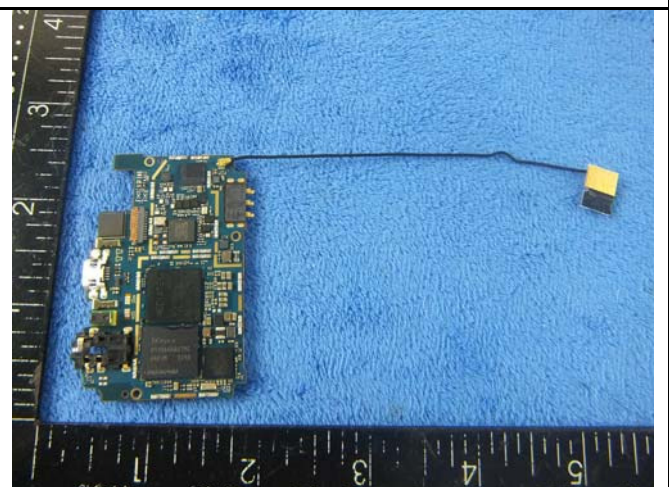

Mainboard without Shielding - Front View

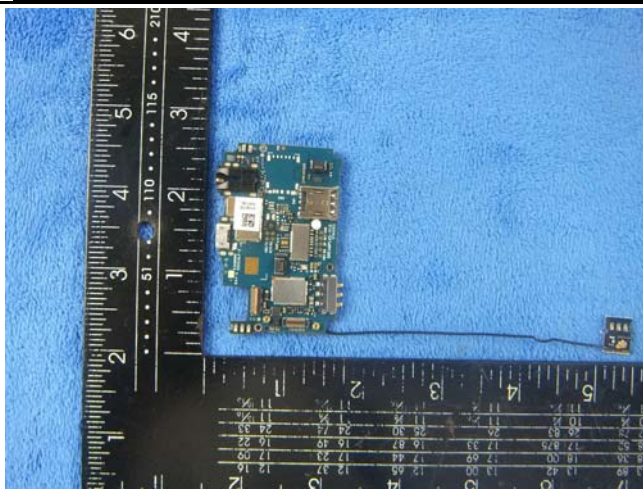

Mainboard with Shielding - Rear View

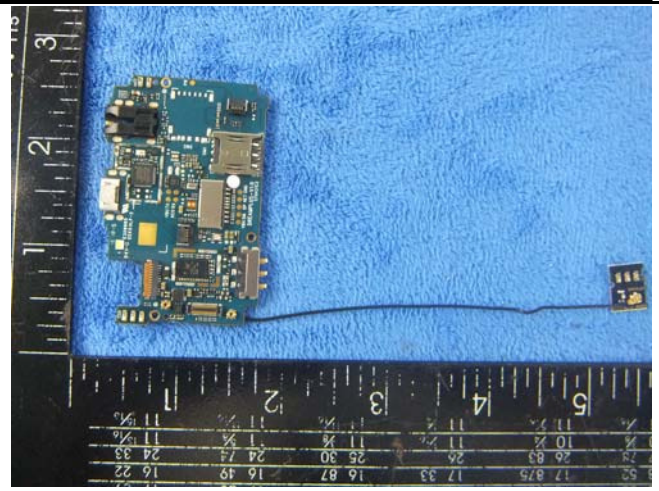

Mainboard without Shielding - Rear View



LCD – Front View



LCD – Rear View



GSM/PCS/UMTS-FDD/LTE Antenna View




WIFI/BT/BLE/GPS - Antenna View




LTE DRX Antenna

Annex B.iii. Photograph: Test Setup Photo

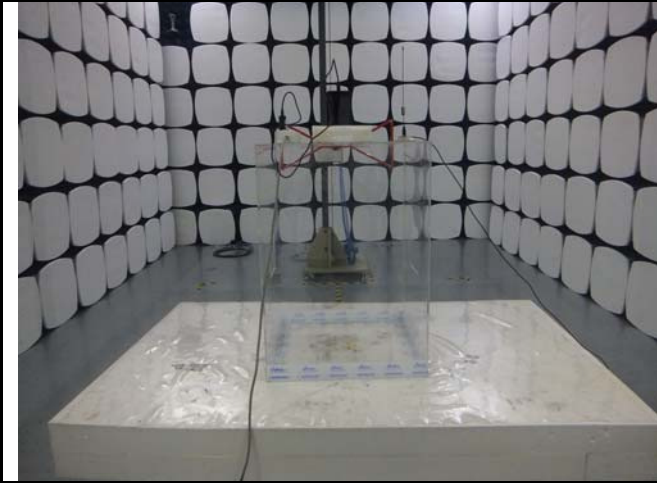

Radiated Spurious Emissions Test Setup Below 1GHz

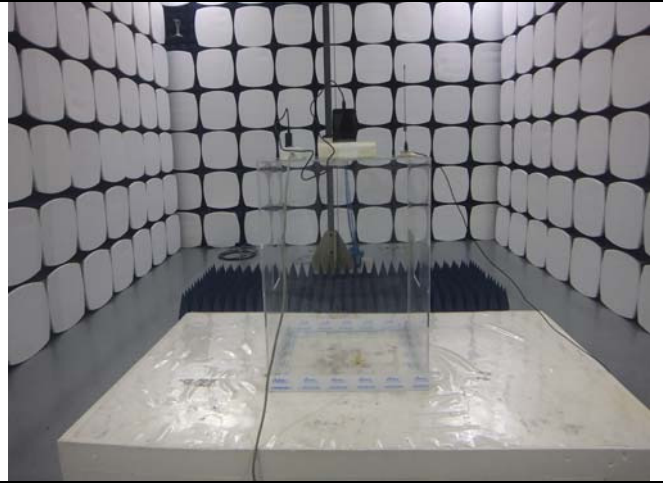


Radiated Spurious Emissions Test Setup Above
1GHz

Annex C. TEST SETUP AND SUPPORTING EQUIPMENT

Annex C.ii. TEST SET UP BLOCK

Block Configuration Diagram for Radiated Emissions

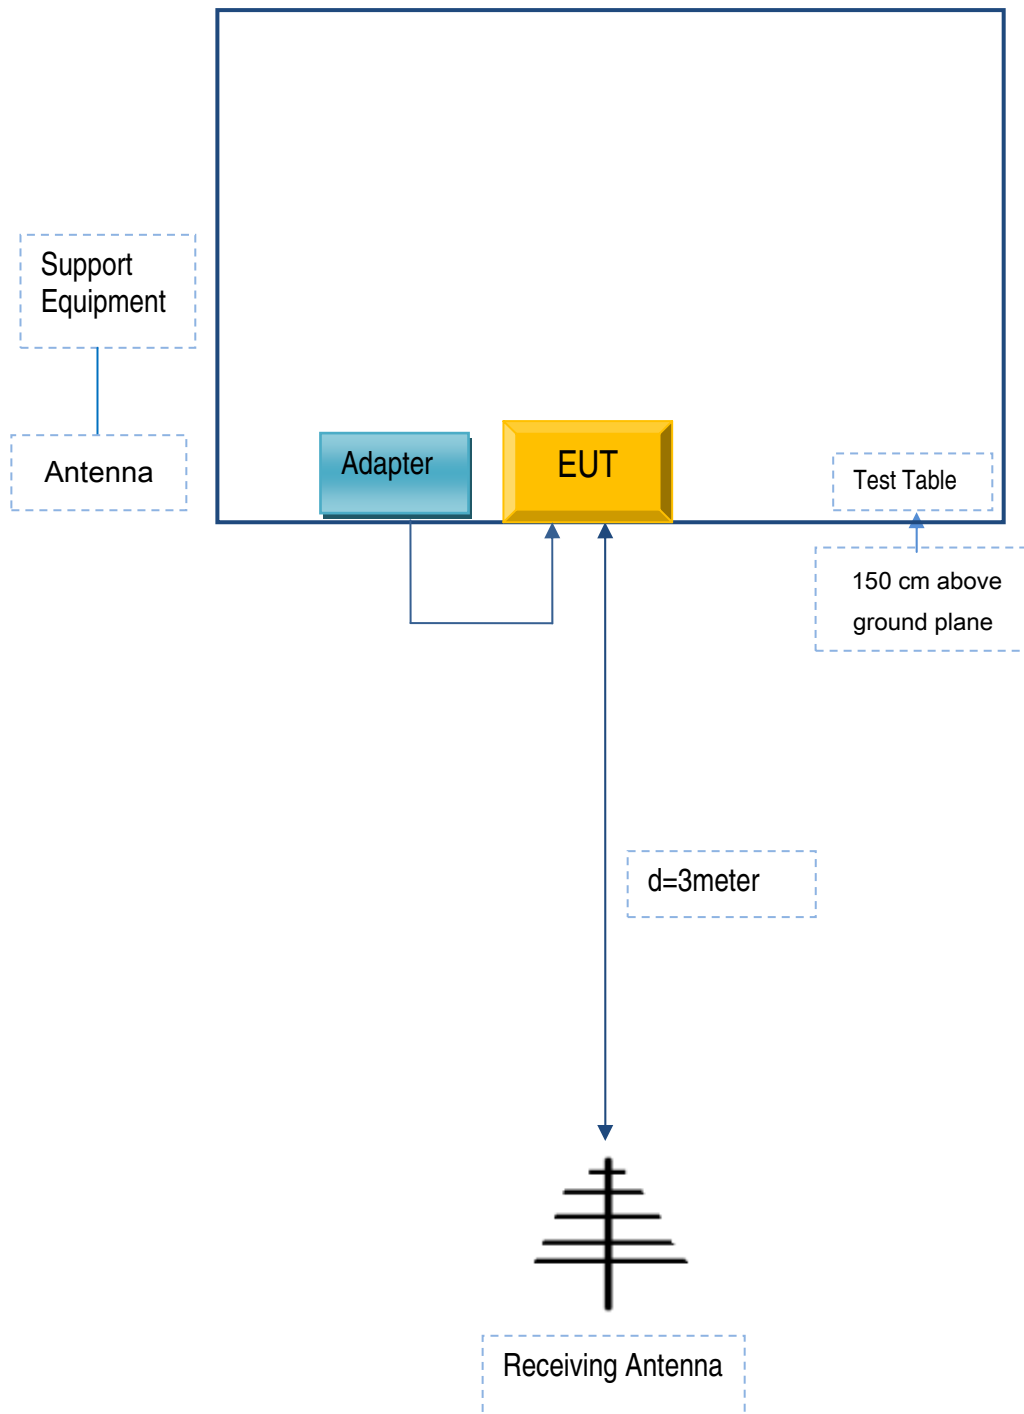

Annex C. ii. SUPPORTING EQUIPMENT DESCRIPTION

The following is a description of supporting equipment and details of cables used with the EUT.

Supporting Equipment:

Manufacturer	Equipment Description	Model	Serial No
MFOURTEL MEXICO S.A. DE C.V.	Adapter	M4	YK84201153021

Supporting Cable:

Cable type	Shield Type	Ferrite Core	Length	Serial No
USB Cable	Un-shielding	No	0.8m	YK84201153021

Test Report	16070559-FCC-R5
Page	115 of 117

Annex C.ii. EUT OPERATING CONKITIONS

N/A

Test Report	16070559-FCC-R5
Page	116 of 117

Annex D. User Manual / Block Diagram / Schematics / Partlist

N/A

Test Report	16070559-FCC-R5
Page	117 of 117

Annex E. DECLARATION OF SIMILARITY

N/A