



FCC PART 15.247  
TEST REPORT

For

**Optex Co., Ltd.**

5-8-12, Ogoto Otsu-Shiga-Ken, Japan

**FCC ID: DC9IVP-HU**

<b>Report Type:</b> Original Report	<b>Product Type:</b> Handheld Monitor Unit
<b>Test Engineer:</b> <u>Allen Qiao</u> <span style="float: right;"><i>Allen Qiao</i></span>	
<b>Report Number:</b> <u>R2DG131125017-00A</u>	
<b>Report Date:</b> <u>2013-12-23</u>	
<b>Reviewed By:</b> <u>RF Leader</u> <span style="float: right;"><i>Ivan Cao</i></span>	
<b>Test Laboratory:</b> Bay Area Compliance Laboratories Corp. (Dongguan) No.69 Pulongcun, Puxinhu Industrial Zone, Tangxia, Dongguan, Guangdong, China Tel: +86-769-86858888 Fax: +86-769-86858891 <a href="http://www.baclcorp.com.cn">www.baclcorp.com.cn</a>	

**Note:** This test report is prepared for the customer shown above and for the device described herein. It may not be duplicated or used in part without prior written consent from Bay Area Compliance Laboratories Corp. This report **must not** be used by the customer to claim product certification, approval, or endorsement by NVLAP\*, or any agency of the Federal Government.  
\* This report may contain data that are not covered by the NVLAP accreditation and shall be marked with an asterisk "★" (Rev.2).  
This report is valid only with a valid digital signature. The digital signature may be available only under the Adobe software above version 7.0.

## TABLE OF CONTENTS

<b>GENERAL INFORMATION.....</b>	<b>4</b>
PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT).....	4
OBJECTIVE .....	4
RELATED SUBMITTAL(S)/GRANT(S).....	4
TEST METHODOLOGY .....	4
TEST FACILITY .....	5
<b>SYSTEM TEST CONFIGURATION.....</b>	<b>6</b>
DESCRIPTION OF TEST CONFIGURATION .....	6
EUT EXERCISE SOFTWARE .....	6
EQUIPMENT MODIFICATIONS .....	6
EXTERNAL CABLE.....	6
BLOCK DIAGRAM OF TEST SETUP .....	7
<b>SUMMARY OF TEST RESULTS .....</b>	<b>8</b>
<b>FCC §15.247 (i) &amp; §1.1310 &amp; §2.1093- RF EXPOSURE .....</b>	<b>9</b>
APPLICABLE STANDARD .....	9
<b>FCC §15.203 - ANTENNA REQUIREMENT.....</b>	<b>10</b>
APPLICABLE STANDARD .....	10
ANTENNA CONNECTOR CONSTRUCTION .....	10
<b>FCC §15.207 (a) – AC LINE CONDUCTED EMISSIONS .....</b>	<b>11</b>
APPLICABLE STANDARD .....	11
MEASUREMENT UNCERTAINTY.....	11
EUT SETUP.....	11
EMI TEST RECEIVER SETUP.....	12
TEST PROCEDURE .....	12
CORRECTED AMPLITUDE & MARGIN CALCULATION .....	12
TEST EQUIPMENT LIST AND DETAILS.....	13
TEST RESULTS SUMMARY .....	13
TEST DATA .....	13
<b>FCC §15.209, §15.205 &amp; §15.247(d) - SPURIOUS EMISSIONS.....</b>	<b>16</b>
APPLICABLE STANDARD .....	16
MEASUREMENT UNCERTAINTY.....	16
EUT SETUP .....	16
EMI TEST RECEIVER & SPECTRUM ANALYZER SETUP .....	17
TEST PROCEDURE .....	17
TEST EQUIPMENT LIST AND DETAILS.....	18
CORRECTED AMPLITUDE & MARGIN CALCULATION .....	18
TEST RESULTS SUMMARY .....	18
TEST DATA .....	18
<b>FCC §15.247(a) (1) - CHANNEL SEPARATION TEST .....</b>	<b>24</b>
APPLICABLE STANDARD .....	24
TEST EQUIPMENT LIST AND DETAILS.....	24
TEST PROCEDURE .....	24
TEST DATA .....	24
<b>FCC §15.247(a) (1) – 20 dB BANDWIDTH TESTING.....</b>	<b>27</b>

APPLICABLE STANDARD .....27  
 TEST PROCEDURE .....27  
 TEST EQUIPMENT LIST AND DETAILS.....27  
 TEST DATA .....27

**FCC §15.247(a) (1) (iii) - QUANTITY OF HOPPING CHANNEL TEST .....30**  
 APPLICABLE STANDARD .....30  
 TEST PROCEDURE .....30  
 TEST EQUIPMENT LIST AND DETAILS.....30  
 TEST DATA .....30

**FCC §15.247(a) (1) (iii) - TIME OF OCCUPANCY (DWELL TIME).....32**  
 APPLICABLE STANDARD .....32  
 TEST PROCEDURE .....32  
 TEST EQUIPMENT LIST AND DETAILS.....32  
 TEST DATA .....32

**FCC §15.247(b) (1) - PEAK OUTPUT POWER MEASUREMENT .....35**  
 APPLICABLE STANDARD .....35  
 TEST PROCEDURE .....35  
 TEST EQUIPMENT LIST AND DETAILS.....35  
 TEST DATA .....35

**FCC §15.247(d) - BAND EDGES TESTING .....38**  
 APPLICABLE STANDARD .....38  
 TEST PROCEDURE .....38  
 TEST EQUIPMENT LIST AND DETAILS.....38  
 TEST DATA .....38

## GENERAL INFORMATION

---

### Product Description for Equipment under Test (EUT)

The *Optex Co., Ltd.*'s product, model number: *08871 IVP-HU (FCC ID: DCIVP-HU)* (the "EUT") in this report was a *Handheld Monitor Unit*, which was measured approximately: 15.0 cm (L) x 6.0cm (W) x 3.5 cm (H), rated input voltage: DC 5.5V from adapter or DC 3.6V from Ni-MH battery.

#### Adapter Information:

MODEL: SHB0550850PU

INPUT: AC 100-240V, 50/60Hz, 300mA

OUTPUT: DC 5.5V, 850mA

*\* All measurement and test data in this report was gathered from production sample serial number: 131125017 (Assigned by BACL.Dongguan). The EUT was received on 2013-11-26.*

### Objective

This report is prepared on behalf of *Optex Co., Ltd.* in accordance with Part 2, Subpart J, Part 15, Subparts A, B and C of the Federal Communication Commissions rules

The tests were performed in order to determine the Bluetooth of EUT compliance with FCC Part 15, Subpart C, and section 15.203, 15.205, 15.207, 15.209 and 15.247 rules.

### Related Submittal(s)/Grant(s)

No related submittal(s)/grant(s).

### Test Methodology

All measurements contained in this report were conducted with ANSI C63.4-2003, American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the range of 9 kHz to 40 GHz.

All emissions measurement was performed and Bay Area Compliance Laboratories Corp. (Dongguan). The radiated testing was performed at an antenna-to-EUT distance of 3 meters.

**Test Facility**

The Test site used by Bay Area Compliance Laboratories Corp. (Dongguan) to collect test data is located on the No.69 Pulongcun, Puxinhu Industrial Zone, Tangxia, Dongguan, Guangdong, China

Test site at Bay Area Compliance Laboratories Corp. (Dongguan) has been fully described in reports submitted to the Federal Communications Commission (FCC). The details of these reports have been found to be in compliance with the requirements of Section 2.948 of the FCC Rules on February 02, 2012. The facility also complies with the radiated and AC line conducted test site criteria set forth in ANSI C63.4-2003.

The Federal Communications Commission has the reports on file and is listed under FCC Registration No.: 273710. The test site has been approved by the FCC for public use and is listed in the FCC Public Access Link (PAL) database.

Additionally, Bay Area Compliance Laboratories Corp. (Dongguan) is an ISO/IEC 17025 accredited laboratory, and is accredited by National Voluntary Laboratory Accredited Program (Lab Code 500069-0).



The current scope of accreditations can be found at <http://ts.nist.gov/standards/scopes/5000690.htm>

## SYSTEM TEST CONFIGURATION

### Description of Test Configuration

The system was configured for testing in an engineering mode, which was provided by manufacturer. For the engineering mode, the maximum power was configured as default value and switched by the keys.

16 channels were provided:

Channel	Frequency (MHz)	Channel	Frequency (MHz)
1	2411	9	2438
2	2414	10	2440
3	2422	11	2442
4	2424	12	2446
5	2426	13	2452
6	2429	14	2454
7	2431	15	2458
8	2436	16	2461

EUT was tested with low channel: 2411 MHz, middle channel: 2436 MHz, and high channel: 2461MHz.

### EUT Exercise Software

No software was used.


### Equipment Modifications

No modification was made to the EUT.

### External Cable

Cable Description	Shielding Type	Ferrite Core	Length (m)	From Port	To
Adapter DC Cable	No	No	1.6	Adapter	EUT

**Block Diagram of Test Setup**

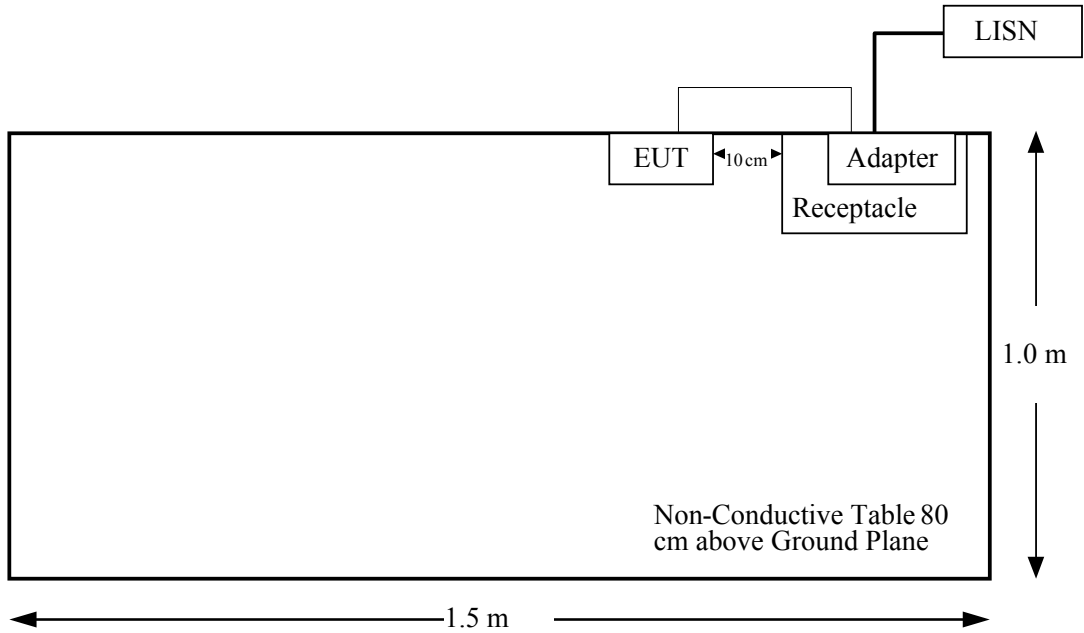

**SUMMARY OF TEST RESULTS**

<b>FCC Rules</b>	<b>Description of Test</b>	<b>Result</b>
FCC §15.247 (i) & §1.1310 & §2.1093	RF Exposure	Compliance
§15.203	Antenna Requirement	Compliance
§15.207 (a)	Conducted Emissions	Compliance
§15.205, §15.209, §15.247(d)	Radiated Emissions	Compliance
§15.247 (a)(1)	20 dB Bandwidth	Compliance
§15.247(a)(1)	Channel Separation Test	Compliance
§15.247(a)(1)(iii)	Time of Occupancy (Dwell Time)	Compliance
§15.247(a)(1)(iii)	Quantity of hopping channel Test	Compliance
§15.247(b)(1)	Peak Output Power Measurement	Compliance
§15.247(d)	Band Edges	Compliance



---

**FCC §15.247 (i) & §1.1310 & §2.1093- RF EXPOSURE**

---

**Applicable Standard**

According to §15.247(i) and §1.1310, systems operating under the provisions of this section shall be operated in a manner that ensure that the public is not exposed to radio frequency energy level in excess of the Commission's guideline.

According to KDB 447498 D01 Mobile Portable RF Exposure V05 Appendix A, SAR can be exempted if the output power is less than the SAR exclusion threshold:

For  $f=2450$  MHz, the output power is less 10 mW at distance of 5mm.

**Measurement Result**

Peak conducted output power= 13.54 dBm

Duty cycle=5%

The Average conducted output power= $13.54 \text{ dBm} + 10 \cdot \log(5\%) = 0.55 \text{ dBm}$

SAR exclusion threshold 10 mW (10dBm) > 0.55 dBm

**So the SAR evaluation is not necessary.**

---

## **FCC §15.203 - ANTENNA REQUIREMENT**

---

### **Applicable Standard**

According to FCC § 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

### **Antenna Connector Construction**

The EUT has one monopole antennas permanently soldered on the printed circuit boards, which complied with 15.203, the maximum gain is 0 dBi, please refer to the internal photos.

**Result:** Compliance.

**FCC §15.207 (a) – AC LINE CONDUCTED EMISSIONS**

**Applicable Standard**

FCC§15.207

**Measurement Uncertainty**

Compliance or non-compliance with a disturbance limit shall be determined in the following manner:

If  $U_{lab}$  is less than or equal to  $U_{cispr}$  of Table 1, then:

- compliance is deemed to occur if no measured disturbance level exceeds the disturbance limit;
- non-compliance is deemed to occur if any measured disturbance level exceeds the disturbance limit.

If  $U_{lab}$  is greater than  $U_{cispr}$  of Table 1, then:


- compliance is deemed to occur if no measured disturbance level, increased by  $(U_{lab} - U_{cispr})$ , exceeds the disturbance limit;
- non-compliance is deemed to occur if any measured disturbance level, increased by  $(U_{lab} - U_{cispr})$ , exceeds the disturbance limit.

Based on CISPR 16-4-2: 2011, measurement uncertainty of conducted disturbance at mains port using AMN at Bay Area Compliance Laboratories Corp. (Dongguan) is 3.46 dB (150 kHz to 30 MHz).

Table 1 – Values of  $U_{cispr}$

Measurement	$U_{cispr}$
Conducted disturbance at mains port using AMN (150 kHz to 30 MHz)	3.4 dB

**EUT Setup**

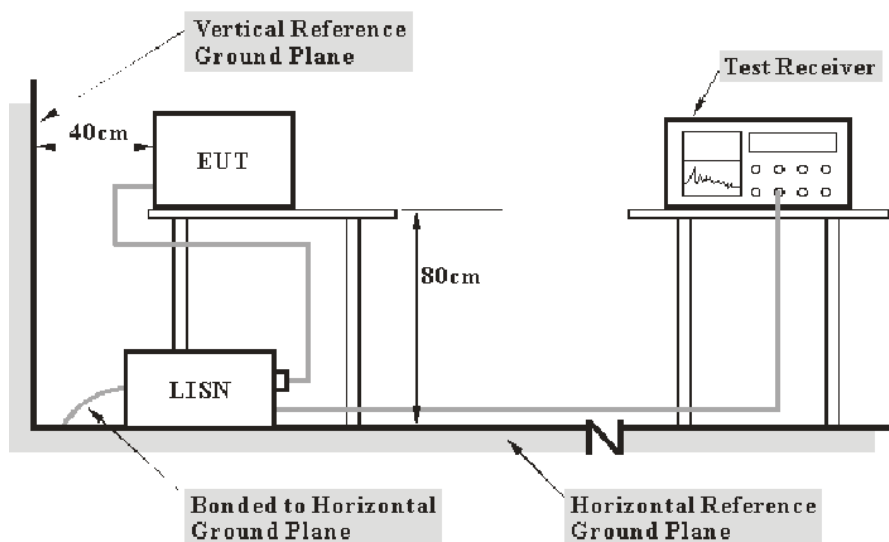

- Note: 1. Support units were connected to second LISN.  
 2. Both of LISNs (AMN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

The setup of EUT is according with per ANSI C63.4-2003 measurement procedure. The specification used was with the FCC Part 15.207 limits.

The spacing between the peripherals was 10 cm.

The adapter was connected to a 120 VAC/60 Hz power source

### EMI Test Receiver Setup

The EMI test receiver was set to investigate the spectrum from 150 kHz to 30 MHz.

During the conducted emission test, the EMI test receiver was set with the following configurations:

Frequency Range	IF B/W
150 kHz – 30 MHz	9 kHz

### Test Procedure

During the conducted emission test, the adapter was connected to the outlet of the first LISN.

Maximizing procedure was performed on the six (6) highest emissions of the EUT.

All data was recorded in the Quasi-peak and average detection mode.

### Corrected Amplitude & Margin Calculation

The basic equation is as follows:

$$V_C = V_R + A_C + VDF$$

Herein,

$V_C$ : corrected voltage amplitude

$V_R$ : reading voltage amplitude

$A_C$ : attenuation caused by cable loss

$VDF$ : voltage division factor of AMN or ISN

The “**Margin**” column of the following data tables indicates the degree of compliance within the applicable limit. For example, a margin of 7dB means the emission is 7dB below the maximum limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Limit} - \text{Corrected Amplitude}$$

### Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	EMI TEST RECEIVER	ESCS 30	830245/006	2013-11-20	2014-11-19
R&S	Two-line V-network	ENV216	3560.6550.12	2013-2-18	2014-2-17
R&S	L.I.S.N	ESH3-Z5	100113	N/A	N/A
BACL	Test Software	BACL-EMC	V1.0-2010	N/A	N/A

\* Statement of Traceability: Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed in accordance to NVLAP requirements, traceable to National Primary Standards and International System of Units (SI).

### Test Results Summary

According to the recorded data in following table, the EUT complied with the FCC Part 15.207, with the worst margin reading of:

**5.67 dB at 1.335 MHz in the Neutral conducted mode**

### Test Data


#### Environmental Conditions

<b>Temperature:</b>	20.2 °C
<b>Relative Humidity:</b>	44 %
<b>ATM Pressure:</b>	101.5 kPa

*The testing was performed by Allen Qiao on 2013-12-03.*


Test Mode: Transmitting

120 V, 60 Hz, Line:

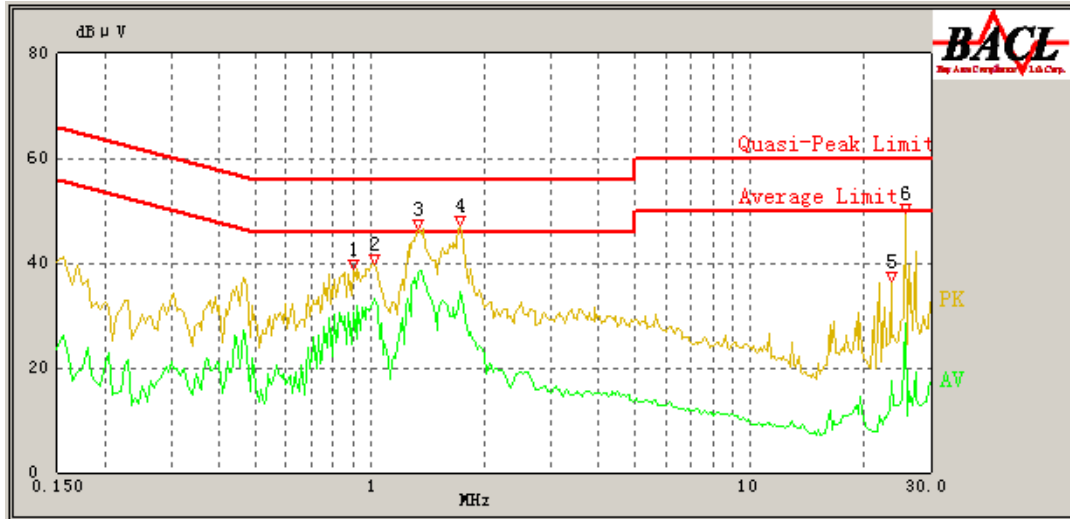

Frequency (MHz)	Cord. Reading (dBμV)	Correction Factor (dB)	Limit (dBμV)	Margin (dB)	Detector (PK/AV/QP)
0.900	35.93	9.68	56.00	20.07	QP
0.900	30.64	9.68	46.00	15.36	AV
1.025	37.83	9.68	56.00	18.17	QP
1.025	33.05	9.68	46.00	12.95	AV
1.335	45.72	9.68	56.00	10.28	QP
1.335	38.31	9.68	46.00	7.69	AV
1.720	42.94	9.68	56.00	13.06	QP
1.720	34.51	9.68	46.00	11.49	AV
23.620	18.74	9.81	60.00	41.26	QP
23.620	17.63	9.81	50.00	32.37	AV
25.615	29.13	9.80	60.00	30.87	QP
25.615	28.44	9.80	50.00	21.56	AV

**120 V, 60 Hz, Neutral:**

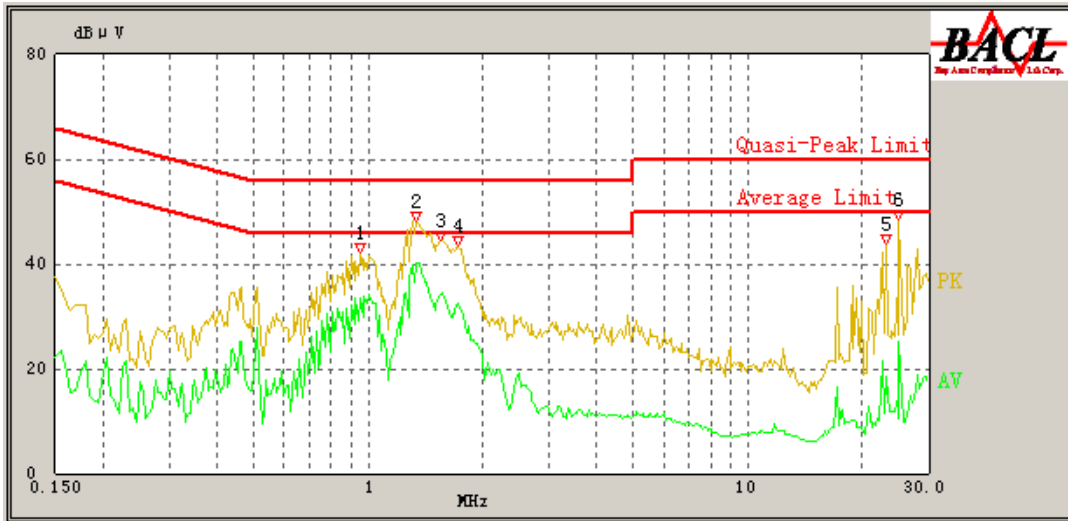

Frequency (MHz)	Cord. Reading (dBμV)	Correction Factor (dB)	Limit (dBμV)	Margin (dB)	Detector (PK/AV/QP)
0.950	39.10	9.69	56.00	16.90	QP
0.950	33.58	9.69	46.00	12.42	AV
1.335	46.85	9.69	56.00	9.15	QP
1.335	40.33	9.69	46.00	5.67	AV
1.550	41.66	9.68	56.00	14.34	QP
1.550	34.33	9.68	46.00	11.67	AV
1.720	42.99	9.68	56.00	13.01	QP
1.720	32.55	9.68	46.00	13.45	AV
23.130	20.11	9.90	60.00	39.89	QP
23.120	18.51	9.90	50.00	31.49	AV
25.025	28.82	9.91	60.00	31.18	QP
25.025	25.30	9.91	50.00	24.70	AV

**FCC §15.209, §15.205 & §15.247(d) - SPURIOUS EMISSIONS**

**Applicable Standard**

FCC §15.247 (d); §15.209; §15.205;

**Measurement Uncertainty**

Compliance or non-compliance with a disturbance limit shall be determined in the following manner:

If  $U_{lab}$  is less than or equal to  $U_{cispr}$  of Table 1, then:

- compliance is deemed to occur if no measured disturbance level exceeds the disturbance limit;
- non-compliance is deemed to occur if any measured disturbance level exceeds the disturbance limit.

If  $U_{lab}$  is greater than  $U_{cispr}$  of Table 1, then:

- compliance is deemed to occur if no measured disturbance level, increased by  $(U_{lab} - U_{cispr})$ , exceeds the disturbance limit;
- non-compliance is deemed to occur if any measured disturbance level, increased by  $(U_{lab} - U_{cispr})$ , exceeds the disturbance limit.

Based on CISPR 16-4-2: 2011, measurement uncertainty of radiated emission at a distance of 3m at Bay Area Compliance Laboratories Corp. (Dongguan) is:


- 30M~200MHz: 5.0 dB
- 200M~1GHz: 6.2 dB
- 1G~6GHz: 4.45 dB
- 6G~18GHz: 5.23 dB

Table 1 – Values of  $U_{cispr}$

Measurement	$U_{cispr}$
Radiated disturbance (electric field strength at an OATS or in a SAC) (30 MHz to 1000 MHz)	6.3 dB
Radiated disturbance (electric field strength in a FAR) (1 GHz to 6 GHz)	5.2 dB
Radiated disturbance (electric field strength in a FAR) (6 GHz to 18 GHz)	5.5 dB


**EUT Setup**

**Below 1GHz:**

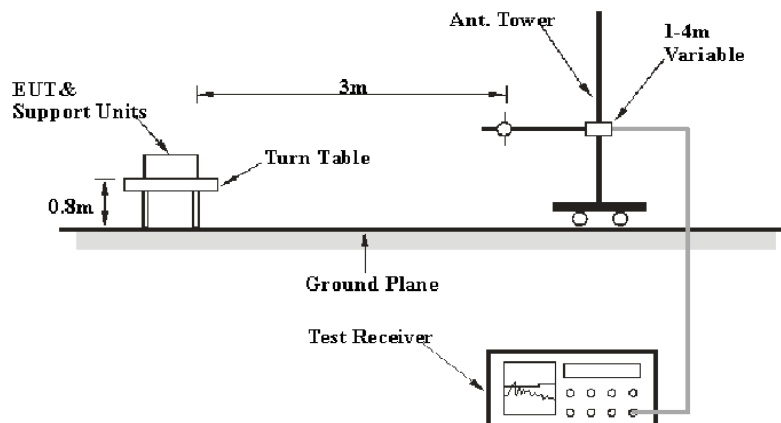



**Above 1GHz:**

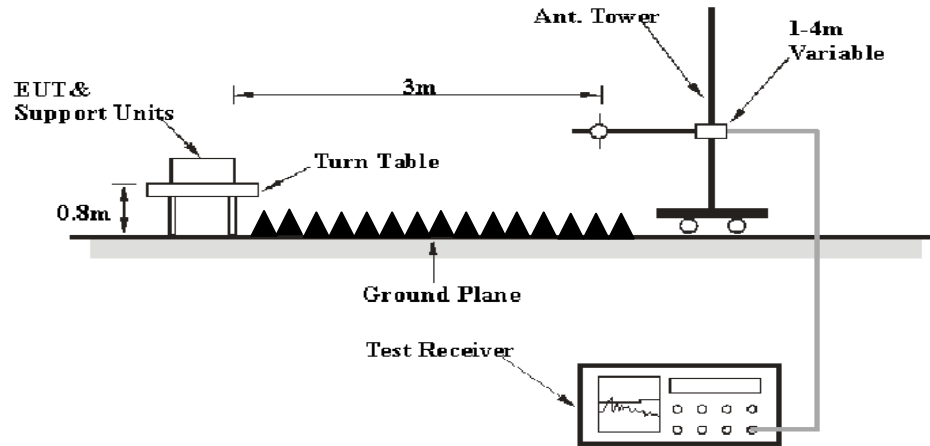

The radiated emission tests were performed in the 3 meters test site, using the setup accordance with the ANSI C63.4-2003. The specification used was the FCC 15.209, and FCC 15.247 limits.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle.

The spacing between the peripherals was 10 cm.

The adapter was connected to a 120 VAC/60 Hz power source

**EMI Test Receiver & Spectrum Analyzer Setup**

The system was investigated from 30 MHz to 25 GHz.

During the radiated emission test, the EMI test receiver & Spectrum Analyzer Setup were set with the following configurations:

Frequency Range	RBW	Video B/W	IF B/W	Detector
30MHz – 1000 MHz	120 kHz	300 kHz	120kHz	QP
Above 1 GHz	1MHz	3 MHz	/	PK

**Test Procedure**

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

Data was recorded in Quasi-peak detection mode for frequency range of 30 MHz - 1 GHz, peak detection mode for frequencies above 1 GHz. The average value was Calculated based on Duty Cycle Correction Factor.

### Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	EMI TEST RECEIVER	ESCI	100224	2013-5-6	2014-5-5
Sunol Sciences	Antenna	JB3	A060611-1	2011-9-6	2014-9-5
HP	AMPLIFIER	8447E	2434A02181	N/A	N/A
R&S	Spectrum analyzer	FSEM	DE31388	2013-5-7	2014-5-6
ETS LINDGREN	horn antenna	3115	000 527 35	2012-9-6	2015-9-5
Mini-Circuit	Amplifier	ZVA-213-S+	054201245	N/A	N/A
R&S	Spectrum analyzer	FSP 38	100478	2013-6-16	2014-6-15
Ducommun Technologies	Horn antenna	ARH-4223-02	1007726-02-1304	2013-6-16	2014-6-15
QUINSTAR	Amplifier	QLW-18045536-J0	15964001001	N/A	N/A

\* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed in accordance to NVLAP requirements, traceable to National Primary Standards and International System of Units (SI).

### Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and Cable Loss, and subtracting the Amplifier Gain from the Meter Reading. The basic equation is as follows:

$$\text{Corrected Amplitude} = \text{Meter Reading} + \text{Antenna Factor} + \text{Cable Loss} - \text{Amplifier Gain}$$

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of 7dB means the emission is 7dB below the limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Limit} - \text{Corrected Amplitude}$$

### Test Results Summary

According to the recorded data in following table, the EUT complied with the FCC Title 47, Part 15, Subpart C, and section 15.205, 15.209 and 15.247, with the worst margin reading of:

**2.76 dB at 2390 MHz in the Vertical polarization**

### Test Data

#### Environmental Conditions

<b>Temperature:</b>	22.9 ~ 24.1°C
<b>Relative Humidity:</b>	31 ~ 44 %
<b>ATM Pressure:</b>	101.6 ~ 102.1 kPa

*The testing was performed by Allen Qiao from 2013-11-28 to 2013-12-02*

Test Mode: Transmitting

Measured Results

Frequency (MHz)	Receiver		Rx Antenna		Cable loss (dB)	Amplifier Gain (dB)	Corrected Amplitude (dBµV/m)	FCC 15.247	
	Reading (dBµV)	Detector (PK/QP/AV)	Polar (H/V)	Factor (dB/m)				Limit (dBµV/m)	Margin (dB)
Low Channel: 2411 MHz									
2411	71.06	PK	H	25.67	4.42	0.00	101.15	N/A	N/A
2411	76.82	PK	V	25.67	4.42	0.00	106.91	N/A	N/A
2390	41.24	PK	V	25.61	4.39	0.00	71.24	74.00	2.76
2390	17.72	AV	V	25.61	4.39	0.00	47.72	54.00	6.28
4822	41.47	PK	V	30.64	6.02	27.26	50.87	74.00	23.13
7233	42.78	PK	V	34.16	7.47	26.36	58.05	74.00	15.95
9644	45.70	PK	V	36.05	8.8	26.08	64.47	74.00	9.53
1300.61	52.61	PK	H	23.08	2.91	27.2	51.4	74.00	22.6
1300.61	21.82	AV	H	23.08	2.91	27.20	20.61	54.00	33.39
46.49	42.00	QP	V	10.2	0.89	21.42	31.67	40.00	8.33
Middle Channel: 2436MHz									
2436	69.91	PK	H	25.73	4.41	0.00	100.05	N/A	N/A
2436	78.24	PK	V	25.73	4.41	0.00	108.38	N/A	N/A
4872	40.31	PK	V	30.77	6.09	27.26	49.91	74.00	24.09
7308	43.65	PK	V	34.34	7.51	26.5	59.00	74.00	15.00
9744	45.25	PK	V	36.29	8.83	25.69	64.68	74.00	9.32
1300.82	52.39	PK	H	23.08	2.91	27.2	51.18	74.00	22.82
1300.82	21.93	AV	H	23.08	2.91	27.20	20.72	54.00	33.28
2325.02	33.26	PK	H	25.45	4.25	27.18	35.78	74.00	38.22
2325.02	17.86	AV	H	25.45	4.25	27.18	20.38	54.00	33.62
46.82	41.6	QP	V	10.05	0.88	21.42	31.11	40.00	8.89
High Channel: 2461MHz									
2461	68.76	PK	H	25.8	4.43	0.00	98.99	N/A	N/A
2461	78.48	PK	V	25.8	4.43	0.00	108.71	N/A	N/A
2483.5	40.25	PK	V	25.86	4.49	0.00	70.60	74.00	3.40
2483.5	16.22	AV	V	25.86	4.49	0.00	46.57	54.00	7.43
4922	41.19	PK	V	30.9	5.98	27.27	50.8	74.00	23.2
7383	43.32	PK	V	34.52	7.55	26.65	58.74	74.00	15.26
9844	44.56	PK	V	36.53	8.85	25.49	64.45	74.00	9.55
1300.53	52.42	PK	H	23.08	2.91	27.2	51.21	74.00	22.79
1300.53	21.80	AV	H	23.08	2.91	27.20	20.59	54.00	33.41
46.28	41.1	QP	V	10.31	0.89	21.42	30.88	40.00	9.12

**Calculated average Results**

Frequency (MHz)	Peak Measurement @ 3m (dBµV/m)	Polar (H/V)	Duty Cycle Correction Factor (dB)	Average Amp. (dBµV/m)	FCC 15.247	
					Limit (dBµV/m)	Margin (dB)
Low Channel: 2411MHz						
2411	101.15	H	-20.26	80.89	N/A	N/A
2411	106.91	V	-20.26	86.65	N/A	N/A
4822	50.87	V	-20.26	30.61	54.00	23.39
7233	58.05	V	-20.26	37.79	54.00	16.21
9644	64.47	V	-20.26	44.21	54.00	9.79
Middle Channel: 2436MHz						
2436	100.05	H	-20.26	79.79	N/A	N/A
2436	108.38	V	-20.26	88.12	N/A	N/A
4872	49.91	V	-20.26	29.65	54.00	24.35
7308	59.00	V	-20.26	38.74	54.00	15.26
9744	64.68	V	-20.26	44.42	54.00	9.58
High Channel: 2461MHz						
2461	98.99	H	-20.26	78.73	N/A	N/A
2461	108.71	V	-20.26	88.45	N/A	N/A
4922	50.80	V	-20.26	30.54	54.00	23.46
7383	58.74	V	-20.26	38.48	54.00	15.52
9844	64.45	V	-20.26	44.19	54.00	9.81


Calculate Average value based on Duty Cycle Correction Factor:

Duty cycle=  $T_{ON}/T_{on+Off}=(0.2/2.06)ms =9.71\%$

Duty cycle correction factor =  $20*\log(\text{duty cycle})=20*\log(9.71\%) = -20.26 \text{ dB}$

Please refer to following plot:


### Duty Cycle

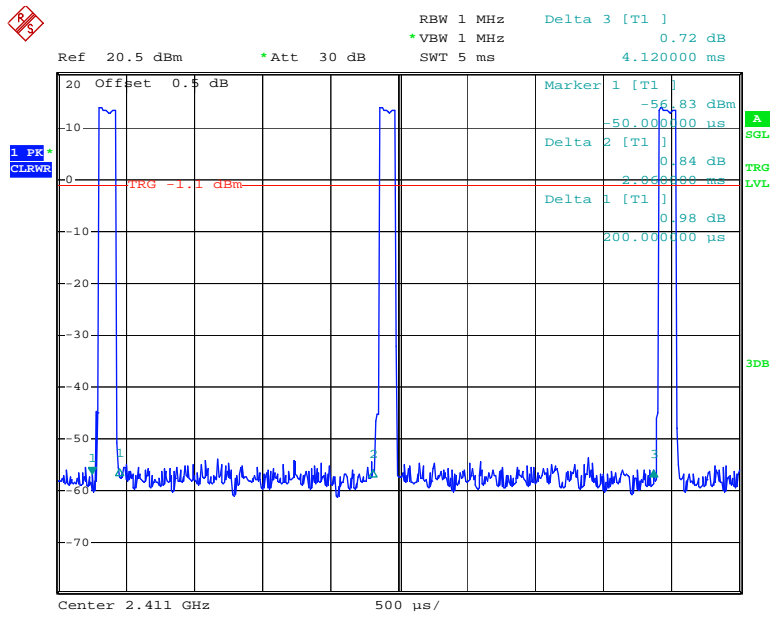

Date: 2.DEC.2013 10:16:01


### Conducted Spurious Emissions at Antenna Port

#### Low Channel

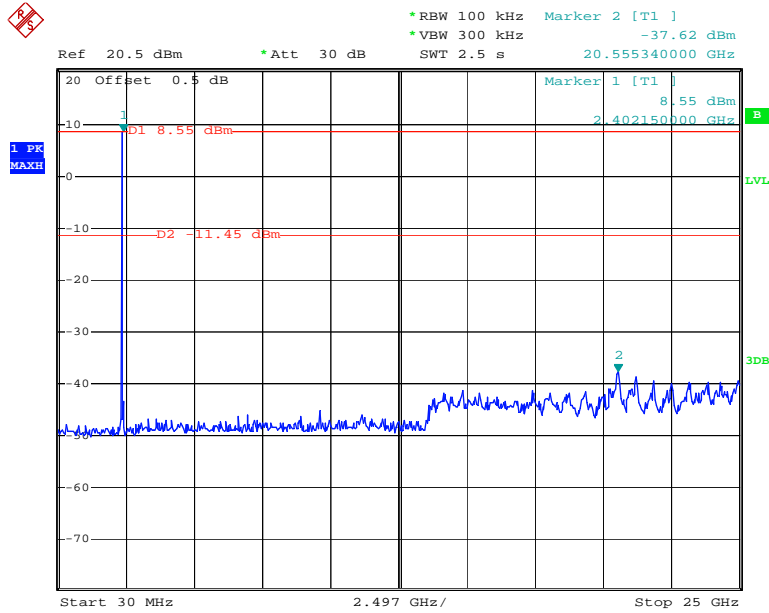


Date: 28.NOV.2013 15:14:07

#### Middle Channel

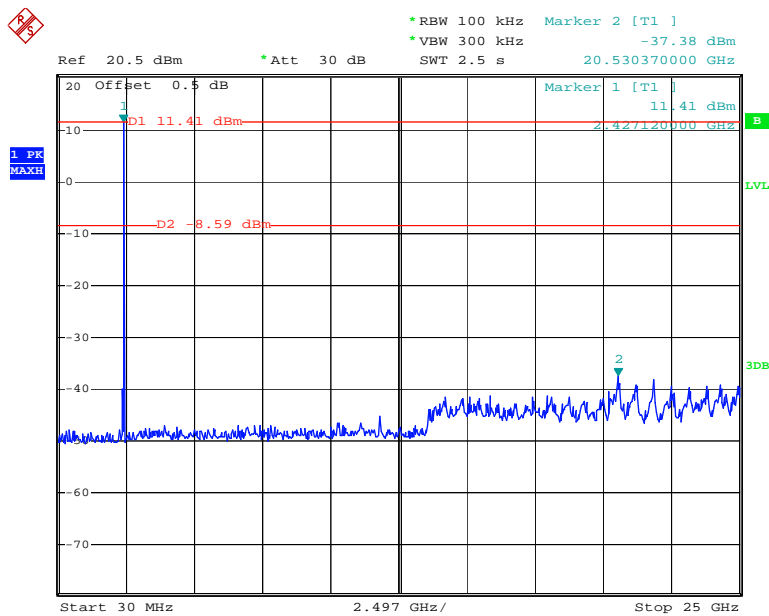

Date: 28.NOV.2013 15:15:57

### High Channel

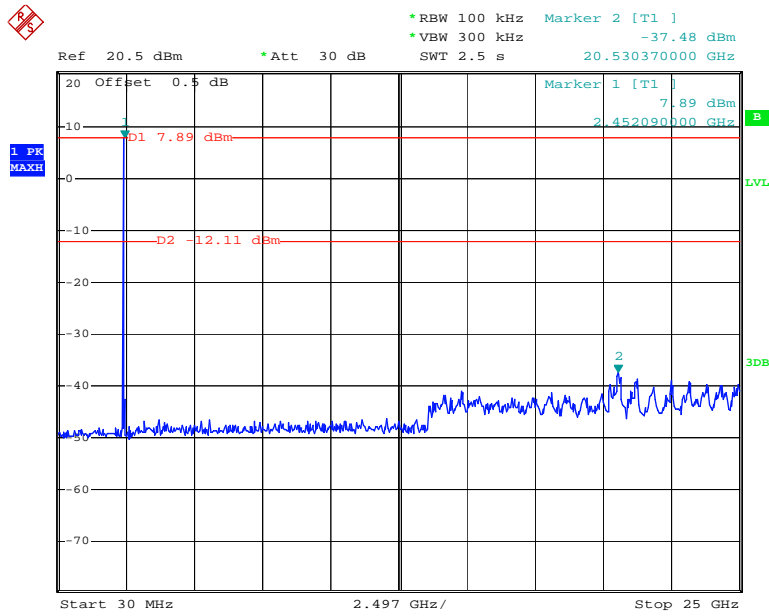

Date: 28.NOV.2013 15:18:16

## FCC §15.247(a) (1) - CHANNEL SEPARATION TEST

### Applicable Standard

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.50 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20dB bandwidth of the hopping channel, whichever is greater provided the systems operate with an output power no greater than 125 mW.

### Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Spectrum analyzer	FSP 38	100478	2013-6-16	2014-6-15

\* Statement of Traceability: Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed in accordance to NVLAP requirements, traceable to National Primary Standards and International System of Units (SI).

### Test Procedure

1. Set the EUT in transmitting mode, spectrum Bandwidth was set at 30 kHz, maxhold the channel.
2. Set the adjacent channel of the EUT maxhold another trace
3. Measure the channel separation.

### Test Data

#### Environmental Conditions

Temperature:	18.7°C
Relative Humidity:	37 %
ATM Pressure:	101.8 kPa

\* The testing was performed by Allen Qiao on 2013-12-13

**Test Result:** Compliance.


Please refer to following tables and plots



Test Mode: Hopping


Channel	Frequency (MHz)	Channel Separation (MHz)	Limit (MHz)	Result
Low	2411	3.024	1.407	Pass
Adjacent	2414			
Middle	2436	2.010	1.407	Pass
Adjacent	2438			
High	2458	3.012	1.407	Pass
Adjacent	2461			

Low Channel

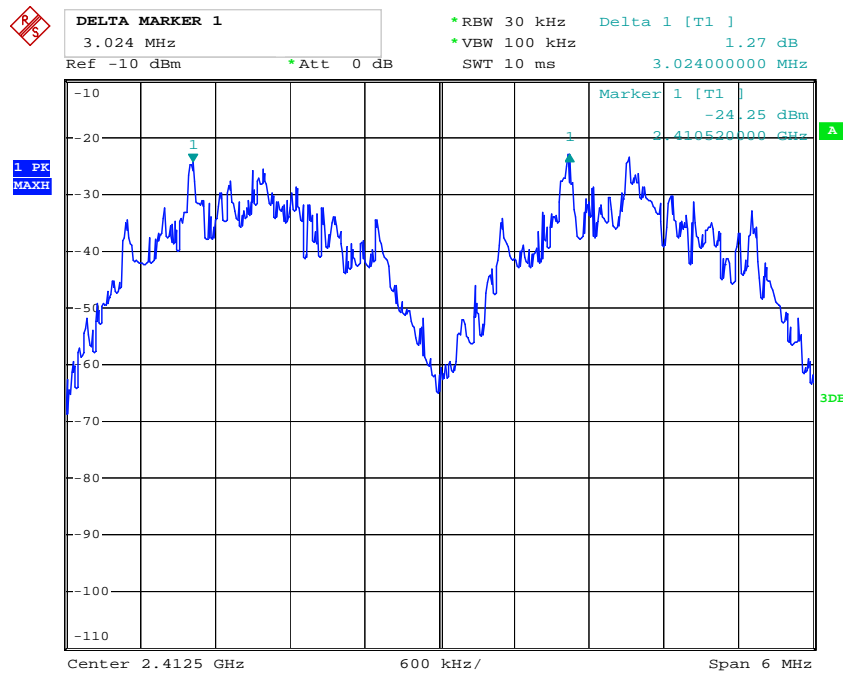


Date: 13.DEC.2013 13:44:34

### Middle Channel

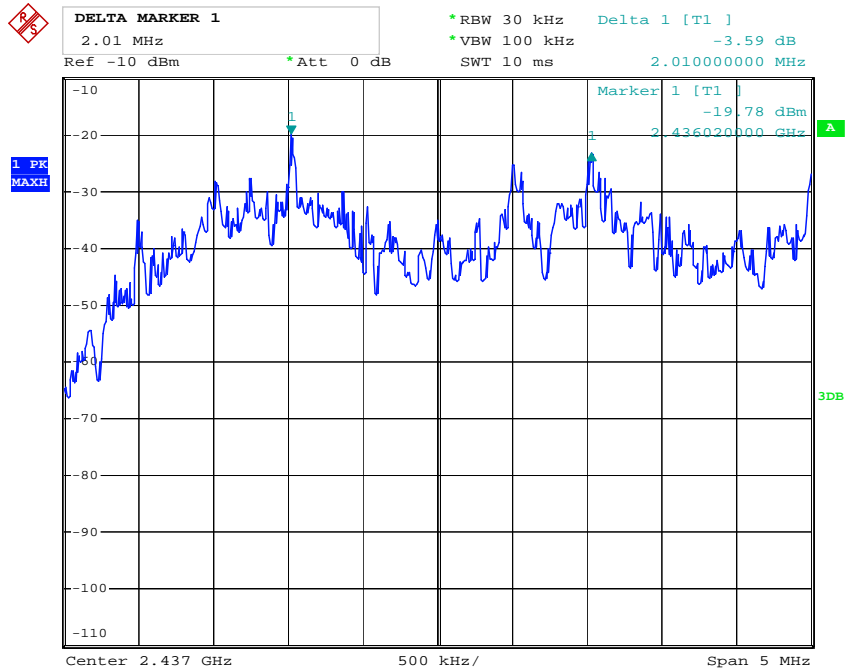

Date: 13.DEC.2013 13:46:06

### High Channel

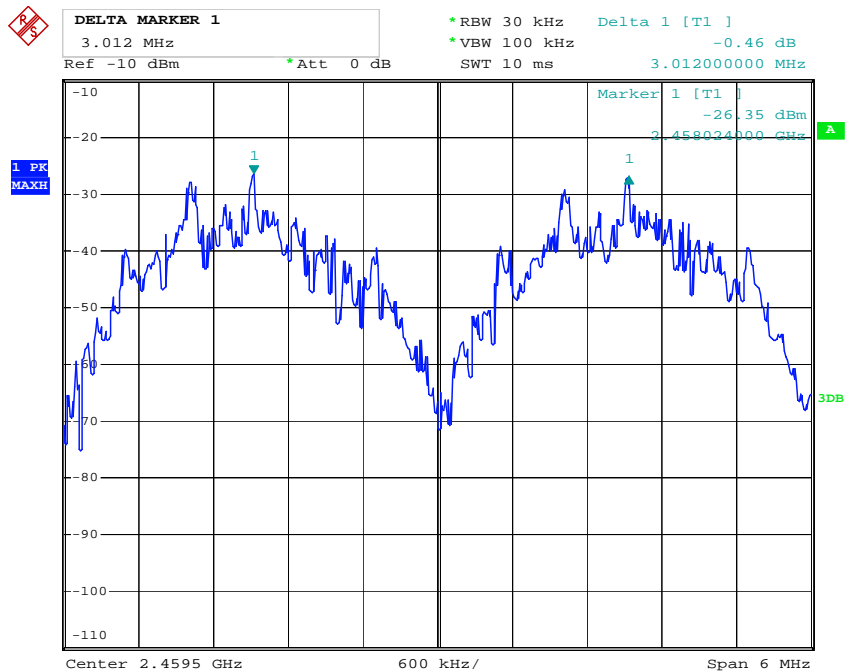

Date: 13.DEC.2013 13:47:21

## FCC §15.247(a) (1) – 20 dB BANDWIDTH TESTING

### Applicable Standard

Alternatively, frequency hopping systems operating in the 2400–2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.

### Test Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT on the test table without connection to measurement instrument. Turn on the EUT. Then set it to any one convenient frequency within its operating range. Set a reference level on the measuring instrument equal to the highest peak value.
3. Measure the frequency difference of two frequencies that were attenuated 20 dB from the reference level. Record the frequency difference as the emission bandwidth.
4. Repeat above procedures until all frequencies measured were complete.

### Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Spectrum analyzer	FSP 38	100478	2013-6-16	2014-6-15

\* Statement of Traceability: Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed in accordance to NVLAP requirements, traceable to National Primary Standards and International System of Units (SI).

### Test Data

#### Environmental Conditions

Temperature:	24.1 °C
Relative Humidity:	44 %
ATM Pressure:	101.9 kPa

*The testing was performed by Allen Qiao on 2013-11-28.*

**Test Result:** Compliance.


Please refer to following tables and plots

Test Mode: Transmitting

Channel	Frequency (MHz)	20 dB Bandwidth (MHz)
Low	2411	2.11
Middle	2436	2.11
High	2461	2.11


Please refer to the following plots.

Low Channel

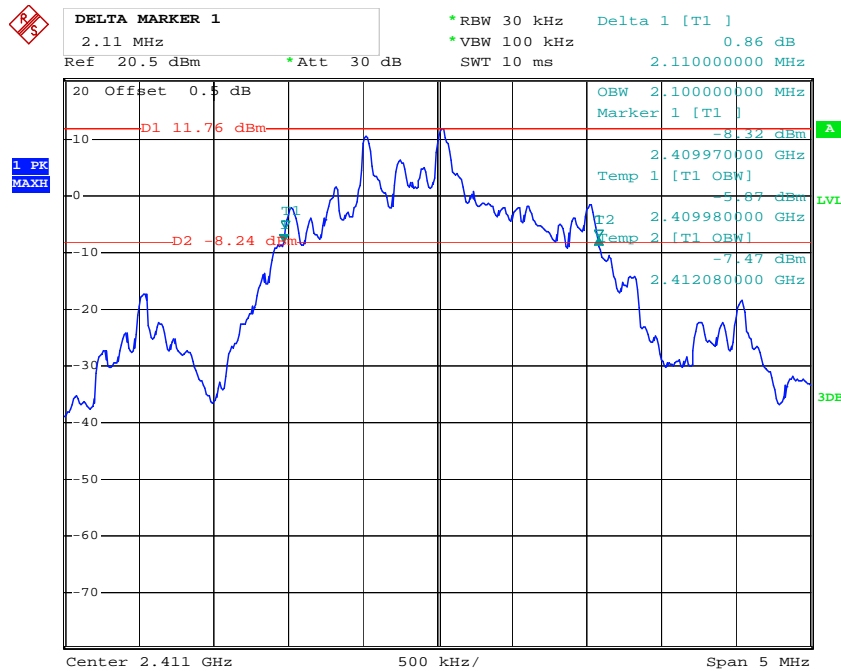


Date: 28.NOV.2013 14:32:33

### Middle Channel

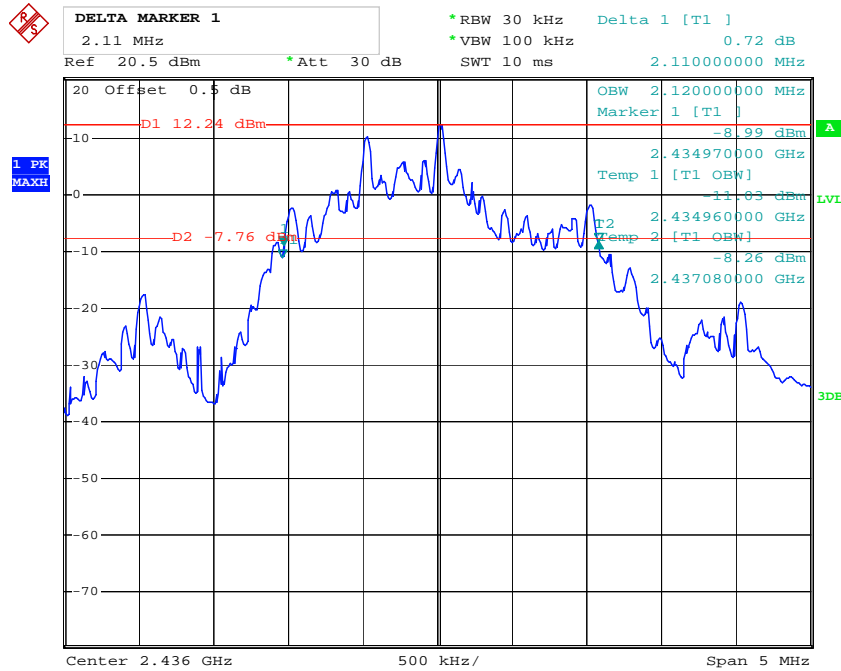

Date: 28.NOV.2013 14:33:39

### High Channel

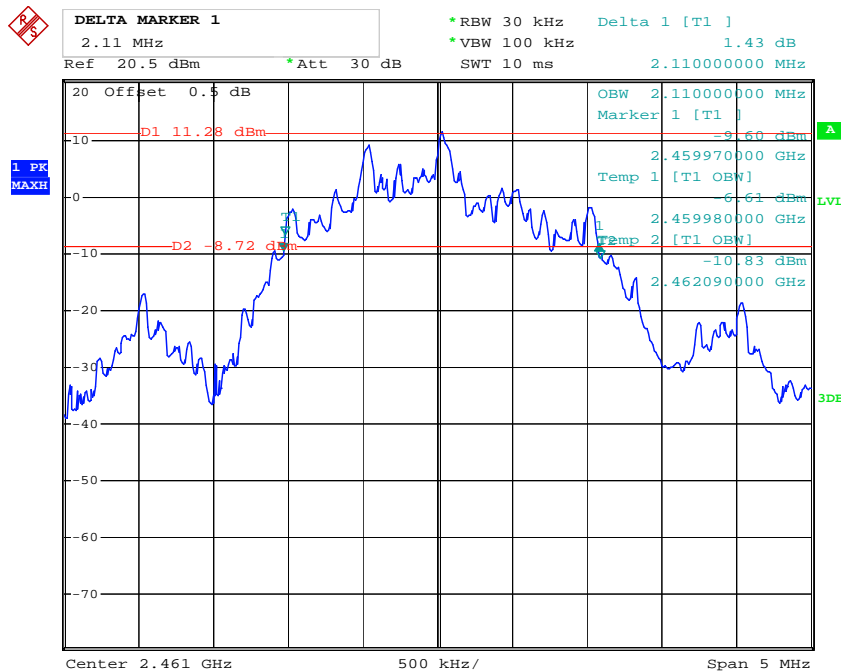

Date: 28.NOV.2013 14:36:33

## **FCC §15.247(a) (1) (iii) - QUANTITY OF HOPPING CHANNEL TEST**

### **Applicable Standard**

Frequency hopping systems in the 2400–2483.5 MHz band shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.

### **Test Procedure**

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Set the EUT in hopping mode from first channel to last.
3. By using the Max-Hold function record the Quantity of the channel.

### **Test Equipment List and Details**

<b>Manufacturer</b>	<b>Description</b>	<b>Model</b>	<b>Serial Number</b>	<b>Calibration Date</b>	<b>Calibration Due Date</b>
R&S	Spectrum analyzer	FSP 38	100478	2013-6-16	2014-6-15

\* Statement of Traceability: Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed in accordance to NVLAP requirements, traceable to National Primary Standards and International System of Units (SI).

### **Test Data**

#### **Environmental Conditions**

<b>Temperature:</b>	24.1°C
<b>Relative Humidity:</b>	44 %
<b>ATM Pressure:</b>	101.9 kPa

*The testing was performed by Allen Qiao on 2013-11-28.*


**Test Result:** Compliance.

Please refer to following tables and plots

Test Mode: Hopping

Frequency Range (MHz)	Number of Hopping Channel	Limit
2400-2483.5	16	≥15

Number of Hopping Channels

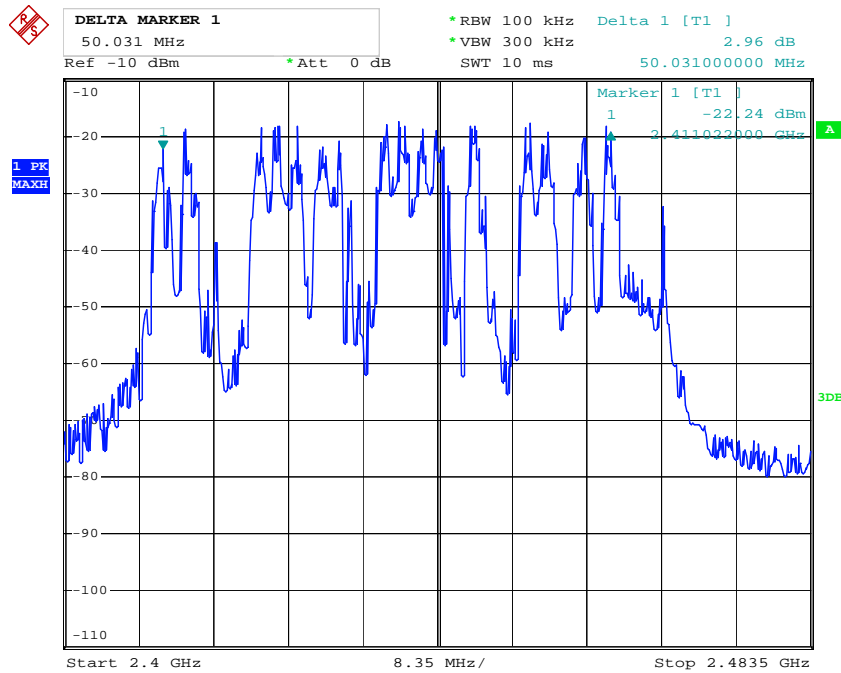

Date: 28.NOV.2013 16:38:57

**FCC §15.247(a) (1) (iii) - TIME OF OCCUPANCY (DWELL TIME)****Applicable Standard**

Frequency hopping systems in the 2400-2483.5 MHz shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.

**Test Procedure**

The EUT was worked in channel hopping; Spectrum SPAN was set as 0. Sweep was set as 0.4 \* channel no. (s), the quantity of pulse was get from single sweep. In addition, the time of single pulses was tested.

Dwell time=Pulse time × hopping rate × hopping channel number× 0.4 s

**Test Equipment List and Details**

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Spectrum analyzer	FSP 38	100478	2013-6-16	2014-6-15

\* Statement of Traceability: Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed in accordance to NVLAP requirements, traceable to National Primary Standards and International System of Units (SI).

**Test Data****Environmental Conditions**

<b>Temperature:</b>	24.1 °C
<b>Relative Humidity:</b>	44 %
<b>ATM Pressure:</b>	101.9 kPa

The testing was performed by Allen Qiao on 2013-11-28.

**Test Result:** Compliance. Please refer to following tables and plots


Test Mode: Hopping

Channel	Pulse Width (ms)	Dwell Time (s)	Limit (s)	Result
Low	0.103	0.0201	0.4	Pass
Middle	0.103	0.0201	0.4	Pass
High	0.102	0.0199	0.4	Pass
Dwell Time(s)= time slot length(s)* hopping rate /16*16* 0.4				

Note: the hopping rate is 488/s, which was declared by the manufacture.




### Low Channel

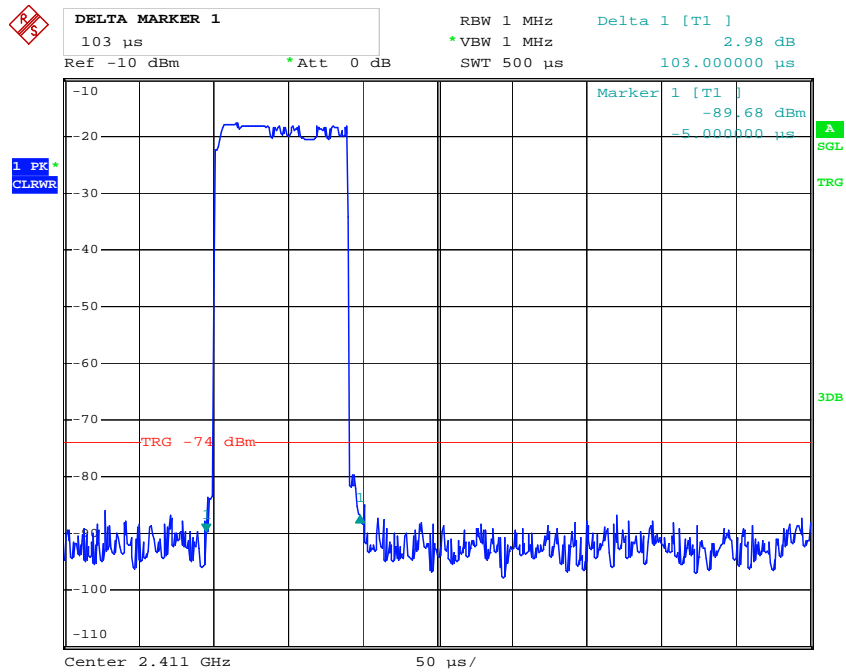


Date: 28.NOV.2013 16:34:05

### Middle Channel

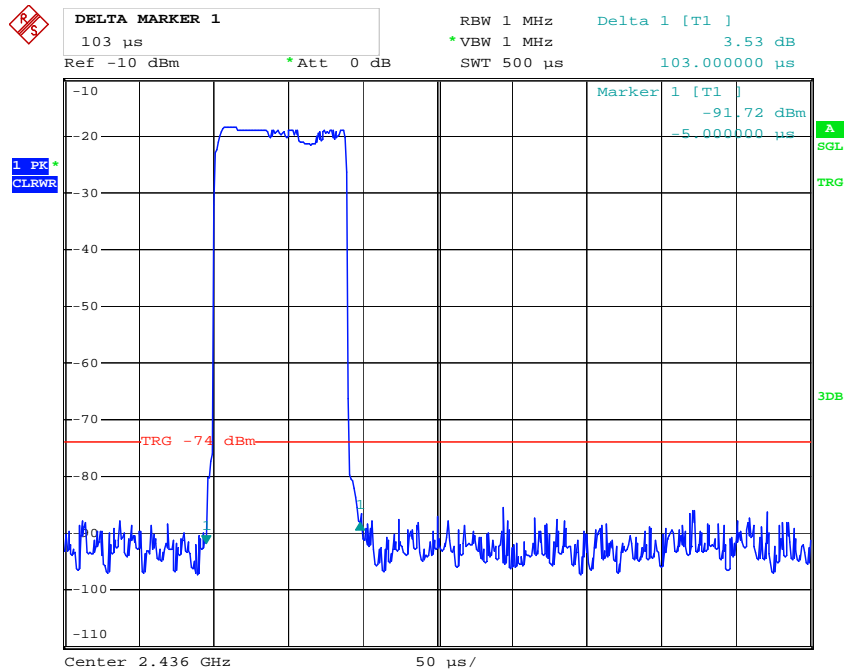

Date: 28.NOV.2013 16:34:38

### High Channel

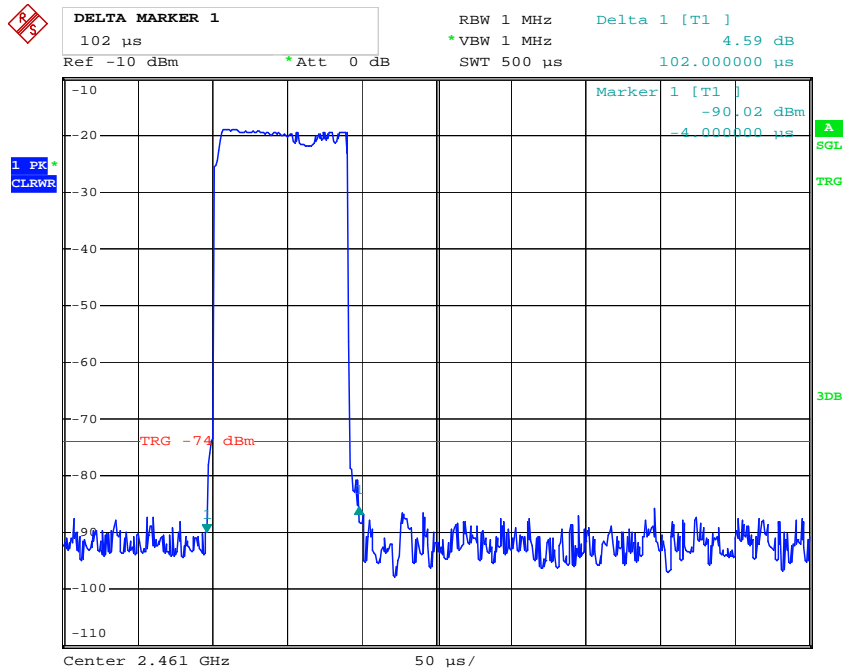

Date: 28.NOV.2013 16:35:26

## **FCC §15.247(b) (1) - PEAK OUTPUT POWER MEASUREMENT**

### **Applicable Standard**

According to §15.247(b) (1), for frequency hopping systems operating in the 2400–2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725–5850 MHz band: 1 watt. For all other frequency hopping systems in the 2400–2483.5 MHz band: 0.125 watts

### **Test Procedure**

1. Place the EUT on a bench and set in transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to an EMI test receiver.
3. Add a correction factor to the display.

### **Test Equipment List and Details**

<b>Manufacturer</b>	<b>Description</b>	<b>Model</b>	<b>Serial Number</b>	<b>Calibration Date</b>	<b>Calibration Due Date</b>
R&S	Spectrum analyzer	FSP 38	100478	2013-6-16	2014-6-15

\* Statement of Traceability: Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed in accordance to NVLAP requirements, traceable to National Primary Standards and International System of Units (SI).

### **Test Data**

#### **Environmental Conditions**

<b>Temperature:</b>	24.1 °C
<b>Relative Humidity:</b>	44 %
<b>ATM Pressure:</b>	101.9 kPa

*The testing was performed by Allen Qiao on 2013-11-28.*


**Test Result:** Compliance.

Test Mode: Transmitting

Channel	Frequency (MHz)	Conducted Output power (dBm)	Limit (dBm)
Low	2411	13.54	21
Middle	2436	13.48	21
High	2461	13.36	21


Note: The antenna gain is 0dBi.

Output Power, Low

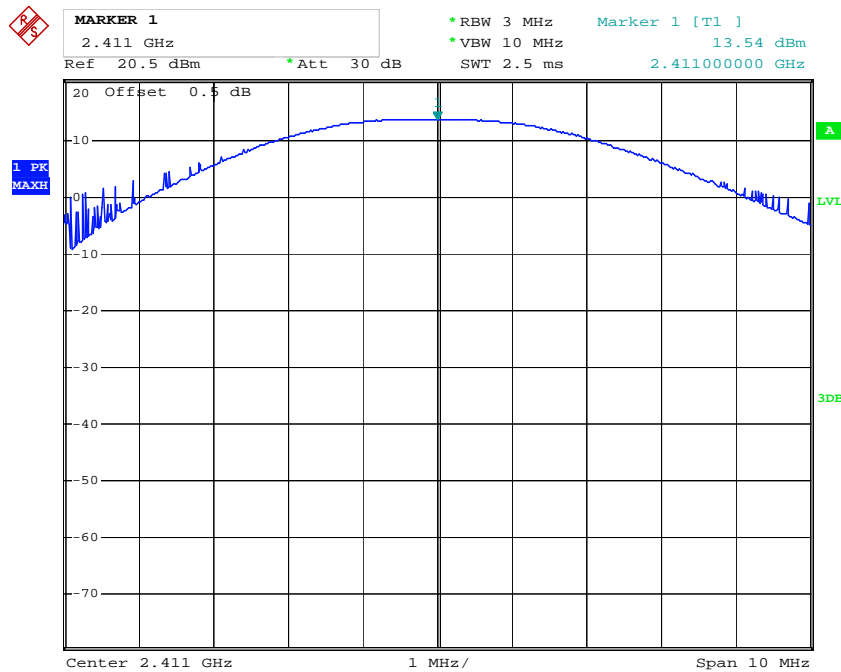


Date: 28.NOV.2013 14:37:12

### Output Power, Middle

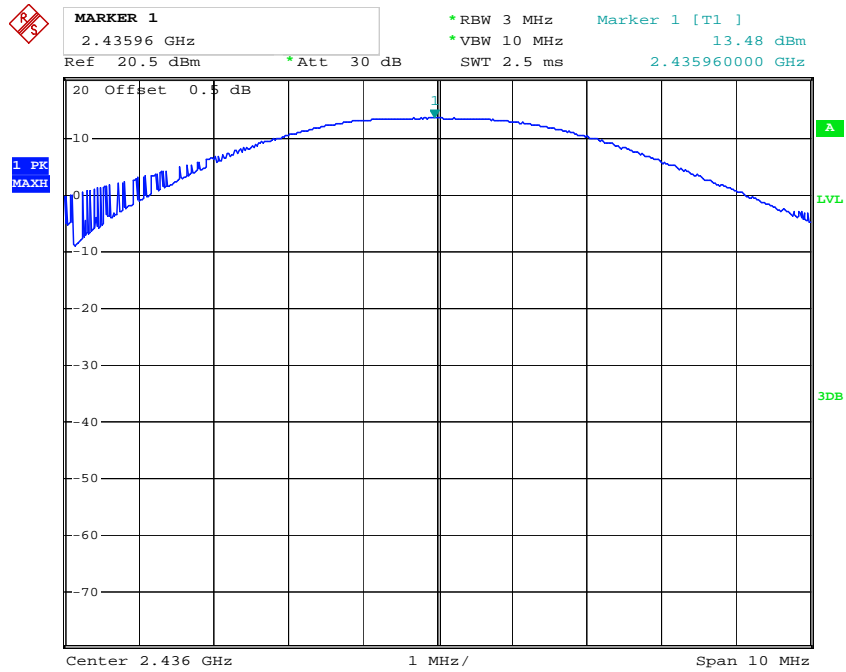

Date: 28.NOV.2013 14:37:31

### Output Power, High

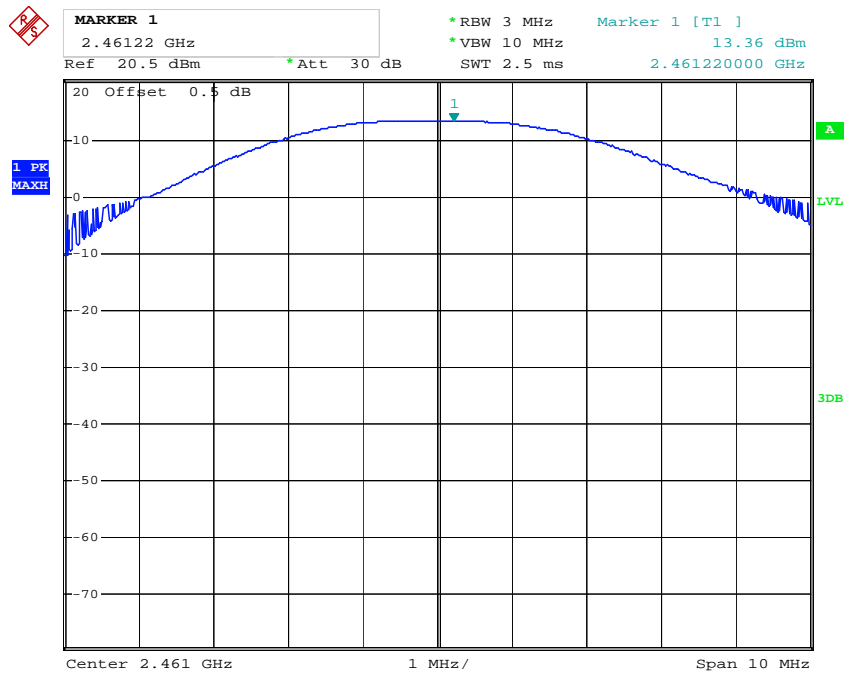

Date: 28.NOV.2013 14:37:02

## FCC §15.247(d) - BAND EDGES TESTING

### Applicable Standard

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

### Test Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Remove the antenna from the EUT and then connect to a low loss RF cable from the antenna port to a EMI test receiver, then turn on the EUT and make it operate in transmitting mode. Then set it to Low Channel and High Channel within its operating range, and make sure the instrument is operated in its linear range.
3. Set both RBW and VBW of spectrum analyzer to 100 kHz with a convenient frequency span including 100 kHz bandwidth from band edge.
4. Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
5. Repeat above procedures until all measured frequencies were complete.

### Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Spectrum analyzer	FSP 38	100478	2013-6-16	2014-6-15

\* Statement of Traceability: Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed in accordance to NVLAP requirements, traceable to National Primary Standards and International System of Units (SI).

### Test Data


#### Environmental Conditions

Temperature:	24.1°C
Relative Humidity:	44 %
ATM Pressure:	101.9 kPa

*The testing was performed by Allen Qiao on 2013-11-28.*


Test Result: Compliance

Band Edge, Left Side

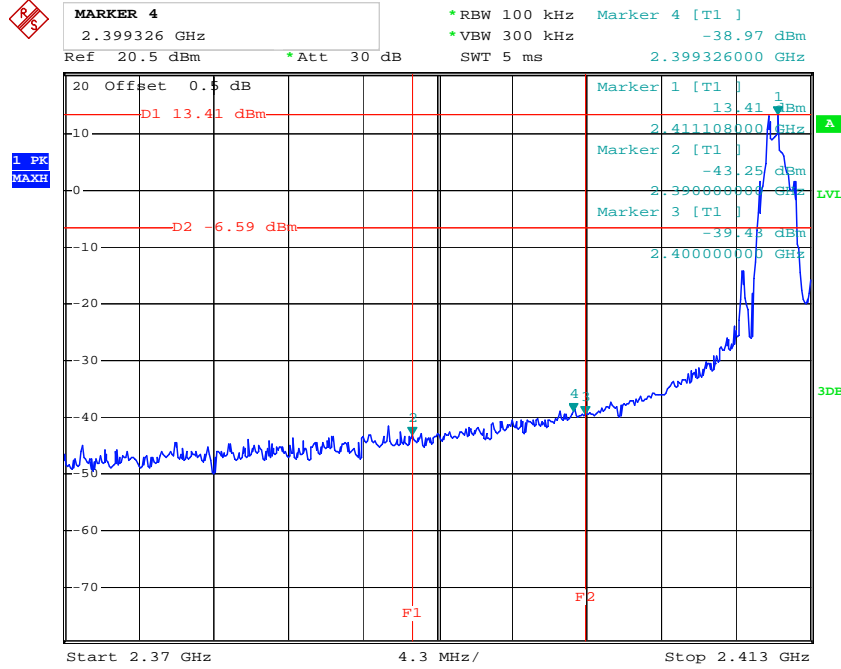

Date: 28.NOV.2013 14:40:11

Band Edge, Right Side

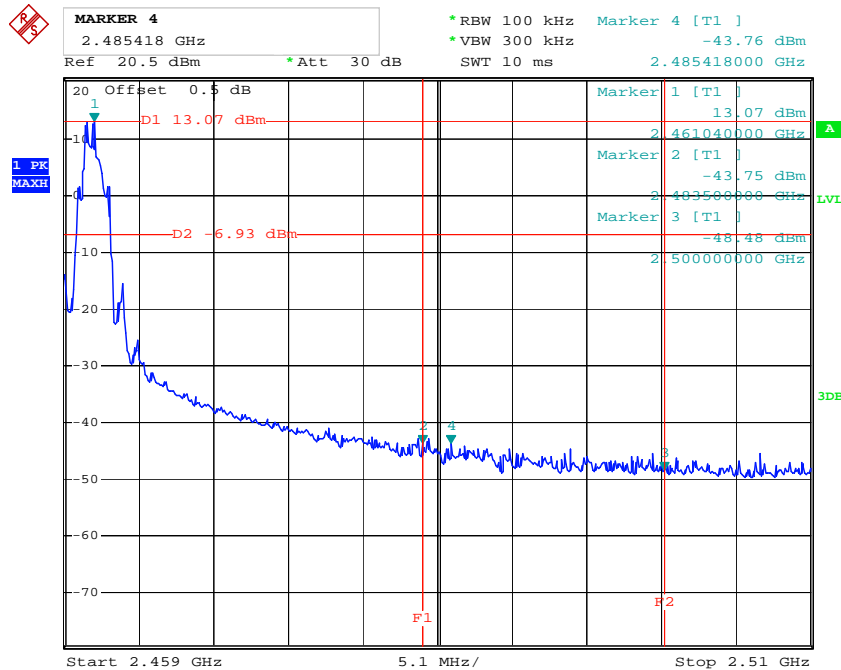

Date: 28.NOV.2013 14:38:56

\*\*\*\*\* END OF REPORT \*\*\*\*\*