



RF MEASUREMENT REPORT

FCC ID: DD4ADX3X55
APPLICANT: Shure Incorporated
Product: Digital Plug-on Transmitter
Model No.: ADX3 X55
Brand Name: , **SHURE**[®]
FCC Classification: Licensed LPAS Device (TLD)
FCC Rule Part(s): Part 74 Subpart H (Section 74.861)
Result: Complies
Received Date: 2022-12-26
Test Date: 2023-01-03 ~ 2023-02-07

Reviewed By:

Jame Yuan

Approved By:

Robin Wu



The test results relate only to the samples tested.

The test results shown in the test report are traceable to the national/international standards through the calibration of the equipment and evaluated measurement uncertainty herein.

The test report shall not be reproduced except in full without the written approval of MRT Technology (Suzhou) Co., Ltd.

Revision History

Report No.	Version	Description	Issue Date	Note
2211RSU077-U9	V01	Initial Report	2023-02-16	Valid

CONTENTS

Description	Page
1. General Information	5
1.1. Applicant	5
1.2. Manufacturer	5
1.3. Testing Facility	5
1.4. Product Information	6
1.5. Radio Specification under Test	6
1.6. Working Frequencies	7
2. Test Configuration	8
2.1. Test Mode	8
2.2. Test System Connection Diagram	8
2.3. Test Software	8
2.4. Applied Standards	9
2.5. Test Environment Condition	9
3. Measuring Instrument	10
4. Decision Rules and Measurement Uncertainty	11
4.1. Decision Rules	11
4.2. Measurement Uncertainty	11
5. Test Result	12
5.1. Summary	12
5.2. RF Output Power Measurement	13
5.2.1. Test Limit	13
5.2.2. Test Procedure	13
5.2.3. Test Setting	13
5.2.4. Test Setup	13
5.2.5. Test Result	13
5.3. Frequency Tolerance Measurement	14
5.3.1. Test Limit	14
5.3.2. Test Procedure	14
5.3.3. Test Setting	14
5.3.4. Test Setup	15
5.3.5. Test Result	15
5.4. 99% Occupied Bandwidth Measurement	16
5.4.1. Test Limit	16
5.4.2. Test Procedure	16
5.4.3. Test Setting	16

5.4.4.	Test Setup	16
5.4.5.	Test Result	16
5.5.	Necessary Bandwidth Measurement	17
5.5.1.	Test Limit	17
5.5.2.	Test Procedure	17
5.5.3.	Test Setting	17
5.5.4.	Test Setup	17
5.5.5.	Test Result	17
5.6.	Radiated Spurious Emissions Measurement	18
5.6.1.	Test Limit	18
5.6.2.	Test Procedure	18
5.6.3.	Test Setting	18
5.6.4.	Test Setup	19
5.6.5.	Test Result	20
Appendix A – Test Result		21
A.1	RF Output Power Test Result	21
A.2	Frequency Tolerance Test Result	22
A.3	99% Occupied Bandwidth Test Result	23
A.4	Necessary Bandwidth Test Result	28
A.5	Radiated Spurious Emissions Test Result	56
Appendix B – Test Setup Photograph		62
Appendix C – EUT Photograph		63

1. General Information

1.1. Applicant

Shure Incorporated

5800 West Touhy Avenue, Niles, IL 60714-4608, USA

1.2. Manufacturer

Shure Incorporated

5800 West Touhy Avenue, Niles, IL 60714-4608, USA

1.3. Testing Facility

☒	Test Site – MRT Suzhou Laboratory Laboratory Location (Suzhou - Wuzhong) D8 Building, No.2 Tian'edang Rd., Wuzhong Economic Development Zone, Suzhou, China Laboratory Location (Suzhou - SIP) 4b Building, Liando U Valley, No.200 Xingpu Rd., Shengpu Town, Suzhou Industrial Park, China Laboratory Accreditations A2LA: 3628.01 CNAS: L10551 FCC: CN1166 ISED: CN0001 VCCI: ☐ R-20025 ☐ G-20034 ☐ C-20020 ☐ T-20020 ☐ R-20141 ☐ G-20134 ☐ C-20103 ☐ T-20104
☐	Test Site – MRT Shenzhen Laboratory Laboratory Location (Shenzhen) 1G, Building A, Junxiangda Building, Zhongshanyuan Road West, Nanshan District, Shenzhen, China Laboratory Accreditations A2LA: 3628.02 CNAS: L10551 FCC: CN1284 ISED: CN0105
☐	Test Site – MRT Taiwan Laboratory Laboratory Location (Taiwan) No. 38, Fuxing 2nd Rd., Guishan Dist., Taoyuan City 333, Taiwan (R.O.C.) Laboratory Accreditations TAF: L3261-190725 FCC: 291082, TW3261 ISED: TW3261

1.4. Product Information

Product Name	Digital Plug-on Transmitter
Model No.	ADX3 X55
Serial No.	3BK03153952 (Radiated Testing) 95C52358 01 (Conducted Testing)
ZigBee Specification	802.15.4, 2405 ~ 2480 MHz
Wireless Microphone	UHF band, 941 ~ 960MHz
Power Type	Two AA batteries (3.0Vdc) or Li-ion battery
Operating Temperature	-10 ~ 50°C
Antenna Information	Refer to selection 1.5
Accessories	
Rechargeable Li-ion Battery	Model: SB900B Output: 3.7Vdc, 1240mAh, 4.59Wh

Note: The information of EUT was provided by the manufacturer, and the accuracy of the information shall be the responsibility of the manufacturer.

1.5. Radio Specification under Test

Frequency Range	941.5 ~ 952.0 MHz & 952.85 ~ 956.25 MHz & 956.45 ~ 959.85 MHz
Working Mode	STD Mode and HD Mode (Note 2)
Declared Power Level	STD: 2mW & 10mW & 35mW, HD: 2mW
Type of Modulation	16QAM
Channel Spacing	25kHz
Antenna Type	Dipole
Antenna Gain	3.90dBi

Note 1: Power level and transmit frequency can be selected using the front panel controls.

Note 2: STD means normal channel bandwidth mode, HD means high density channel bandwidth. End user can switch working modes through the digital wireless receiver.

1.6. Working Frequencies

Bottom Channel (MHz)	Middle Channel (MHz)	Top Channel (MHz)
941.50 ~ 952.00 MHz		
941.625	956.750	951.875
952.85 ~ 956.25 MHz		
952.975	N/A	956.125
956.45 ~ 959.85 MHz		
956.575	N/A	959.725


Note: Refer ANSI C63.26 clause 5.1.2 table 2, frequency range fall within 1 – 10 MHz, only two channels (Top and Bottom) shall be tested.

2. Test Configuration

2.1. Test Mode

Mode 1: Transmit by STD Mode
Mode 2: Transmit by HD Mode

2.2. Test System Connection Diagram

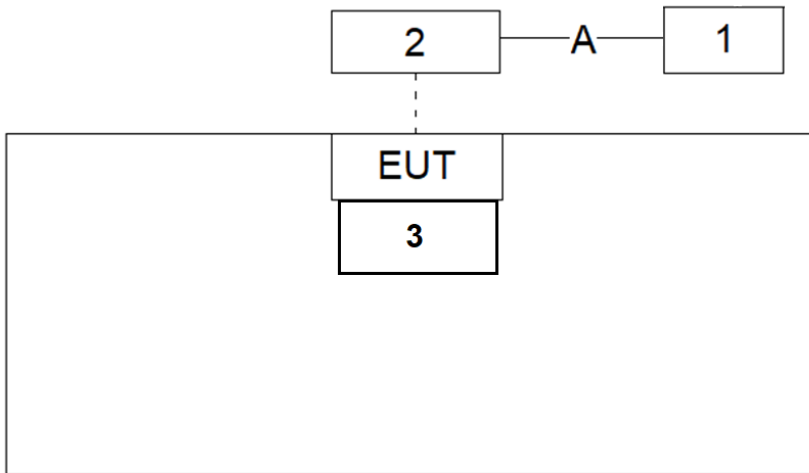Connection Diagram			
 The diagram shows a test setup. At the top, a box labeled '2' is connected to a box labeled '1' by a line labeled 'A'. A dashed line connects box '2' to a box labeled 'EUT'. Below 'EUT' is a box labeled '3'. A large rectangle encloses the 'EUT' and '3' boxes.			
Product	Manufacturer		Model No.
1	Notebook (for RF Test)	Lenovo	E495
2	IR Dongle	Shure	PT21071
3	Premium Modular Shotgun Microphone	Shure	VP89M
Cable Type		Cable Description	
A	USB Cable	Shielded, 1.8m	

2.3. Test Software

The test utility software used during testing was “teraterm”, and the version was V4.85, all test commands were provided by the manufacturer.

2.4. Applied Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- FCC Part 74.861
- KDB 206256 D01v02r01
- ANSI C63.26-2015
- ETSI EN 300 422 - 1 V 1.4.2

2.5. Test Environment Condition

Ambient Temperature	15 ~ 35°C
Relative Humidity	20 ~ 75%RH

3. Measuring Instrument

Instrument	Manufacturer	Model No.	Asset No.	Cali. Interval	Cali. Due Date	Test Site
TRILOG Antenna	Schwarzbeck	VULB 9162	MRTSUE06022	1 year	2023-05-20	WZ-AC2
EMI Test Receiver	Agilent	N9038A	MRTSUE06125	1 year	2023-06-04	WZ-AC2
Thermohygrometer	Mingle	ETH529	MRTSUE06170	1 year	2023-11-27	WZ-AC2
Horn Antenna	Schwarzbeck	BBHA 9120D	MRTSUE06171	1 year	2023-10-13	WZ-AC2
Preamplifier	Schwarzbeck	BBV 9718	MRTSUE06176	1 year	2023-05-08	WZ-AC2
Anechoic Chamber	RIKEN	WZ-AC2	MRTSUE06213	1 year	2023-04-21	WZ-AC2
Thermohygrometer	testo	608-H1	MRTSUE11038	1 year	2023-11-01	WZ-AC2
Loop Antenna	Schwarzbeck	FMZB 1519	MRTSUE06025	1 year	2023-09-29	WZ-AC2
USB Power Sensor	Keysight	U2021XA	MRTSUE06446	1 year	2023-06-04	WZ-SR5
Thermohygrometer	testo	608-H1	MRTSUE06402	1 year	2023-06-06	WZ-SR5
Shielding Room	HUAMING	WZ-SR5	MRTSUE06442	N/A	N/A	WZ-SR5
Signal Analyzer	Keysight	N9010B	MRTSUE06457	1 year	2023-06-04	WZ-SR5
Temperature Chamber	BAOYT	BYH-150CL	MRTSUE06051	1 year	2023-10-08	WZ-TR3
Thermohygrometer	testo	608-H1	MRTSUE06401	1 year	2023-06-06	WZ-TR3
Signal Analyzer	Keysight	N9010B	MRTSUE07027	1 year	2023-11-25	WZ-TR3
Attenuator	MVE	MVE2213	MRTSUE11071	1 year	2023-06-09	WZ
Attenuator	MVE	MVE2213	MRTSUE11072	1 year	2023-06-09	WZ

Software	Version	Function
EMI Software	V3.0.0	EMI Test Software
Controller_MF 7802	1.02	RE Antenna & Turntable
BenchVue Power Meter	2018.1	Power

4. Decision Rules and Measurement Uncertainty

4.1. Decision Rules

The Decision Rule is based on Simple Acceptance in accordance with ISO Guide 98-4: 2012 Clause 8.2.

(Measurement uncertainty is not taken into account when stating conformity with a specified requirement.)

4.2. Measurement Uncertainty

Where relevant, the following test uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k = 2$.

AC Conducted Emission Measurement	
The maximum measurement uncertainty is evaluated as:	
9kHz~150kHz:	3.58dB
150kHz~30MHz:	3.20dB
Radiated Emission Measurement	
The maximum measurement uncertainty is evaluated as:	
Coaxial:	9kHz~30MHz: 2.59dB
Coplanar:	9kHz~30MHz: 2.60dB
Horizontal:	30MHz~200MHz: 3.85dB
	200MHz~1GHz: 4.36dB
	1GHz~40GHz: 4.98dB
Vertical:	30MHz~200MHz: 4.06dB
	200MHz~1GHz: 5.28dB
	1GHz~40GHz: 4.91dB
Spurious Emissions, Conducted	
Measuring Uncertainty for a Level of Confidence of 95% ($U=2U_c(y)$):	
2.3dB	
Output Power	
Measuring Uncertainty for a Level of Confidence of 95% ($U=2U_c(y)$):	
1.5dB	
Occupied Bandwidth	
Measuring Uncertainty for a Level of Confidence of 95% ($U=2U_c(y)$):	
3.2%	

5. Test Result

5.1. Summary

FCC Part Section(s)	Test Description	Test Condition	Test Result
2.1046, 74.861(d)(1)	RF Output Power	Conducted	Pass
2.1055, 74.861(e)(4)	Frequency Stability		Pass
2.1049, 74.861(e)(5)	Occupied Bandwidth		Pass
74.861(d)(4)(ii)	Necessary Bandwidth		Pass
74.861(d)(4)(ii)	Radiated Spurious Emission	Radiated	Pass

Notes:

- 1) The analyzer plots shown in this section were all taken with a correction table loaded into the analyzer. The correction table was used to account for the losses of the cables and attenuators used as part of the system to connect the EUT to the analyzer at all frequencies of interest.
- 2) All modes of operation and data rates were investigated. For radiated emission test, every axis (X, Y, Z) was also verified. The test results shown in the following sections represent the worst emissions.
- 3) For STD mode, besides test items of necessary bandwidth & emission mask were assessed three power levels, any others test items were only assessed max power level.

5.2. RF Output Power Measurement

5.2.1. Test Limit

The maximum transmitter power which will be authorized is 1 watt.

5.2.2. Test Procedure

ANSI C63.26-2015 - Section 5.2.4.2


5.2.3. Test Setting

The output of the EUT was connected to an RF average power meter through fixed attenuation.

The EUT was set to transmit on the low, middle, and high frequencies in each power level.

Measure the average power of the transmitter. This EUT's duty cycle is 100%.

5.2.4. Test Setup

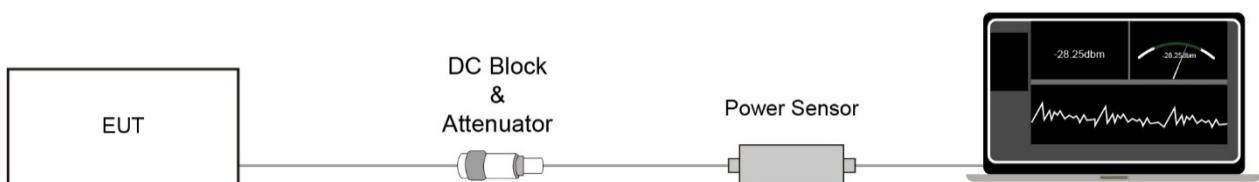

5.2.5. Test Result

Refer to Appendix A.1.

5.3. Frequency Tolerance Measurement

5.3.1. Test Limit

The frequency tolerance of the transmitter shall be 0.005 percent.

5.3.2. Test Procedure

ANSI C63.26 - Section 5.6.3

5.3.3. Test Setting

Frequency Stability Under Temperature Variations:


The equipment under test was connected to an external AC or DC power supply and input rated voltage. RF output was connected to a frequency counter or spectrum analyzer via feed through attenuators. The EUT was placed inside the temperature chamber. Set the spectrum analyzer RBW low enough to obtain the desired frequency resolution and measure EUT 20°C operating frequency as reference frequency. Turn EUT off and set the chamber temperature to highest. After the temperature stabilized for approximately 30 minutes recorded the frequency. Repeat step measure with 10°C decreased per stage until the lowest temperature reached.

Frequency Stability Under Voltage Variations:

Set chamber temperature to 20°C. Use a variable AC power supply / DC power source to power the EUT and set the voltage to rated voltage. Set the spectrum analyzer RBW low enough to obtain the desired frequency resolution and recorded the frequency.

Reduce the input voltage to specify extreme voltage variation ($\pm 15\%$) and endpoint (If a product is specified to operate over a range of input voltage then the -15% variation is applied to the lowermost voltage and the $+15\%$ is applied to the uppermost voltage), record the maximum frequency change.

5.3.4. Test Setup

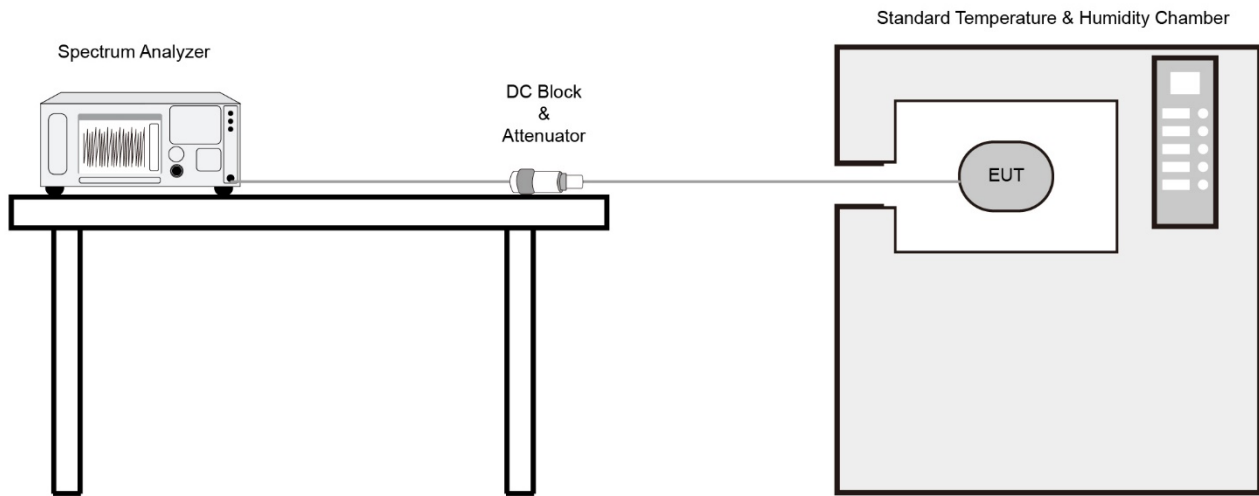

5.3.5. Test Result

Refer to Appendix A.2.

5.4. 99% Occupied Bandwidth Measurement

5.4.1. Test Limit

The operating bandwidth shall not exceed 200 kHz.


5.4.2. Test Procedure

ANSI C63.26-2015 - Section 5.4.4

5.4.3. Test Setting

1. The signal analyzer's automatic bandwidth measurement capability was used to perform the 99% occupied bandwidth. The bandwidth measurement was not influenced by any intermediate power nulls in the fundamental emission.
2. RBW = 1 - 5% of the expected OBW
3. VBW $\geq 3 \times$ RBW
4. Detector = Peak
5. Trace mode = max hold
6. Sweep = auto couple
7. The trace was allowed to stabilize
8. Reported the measured 99% occupied bandwidth

5.4.4. Test Setup

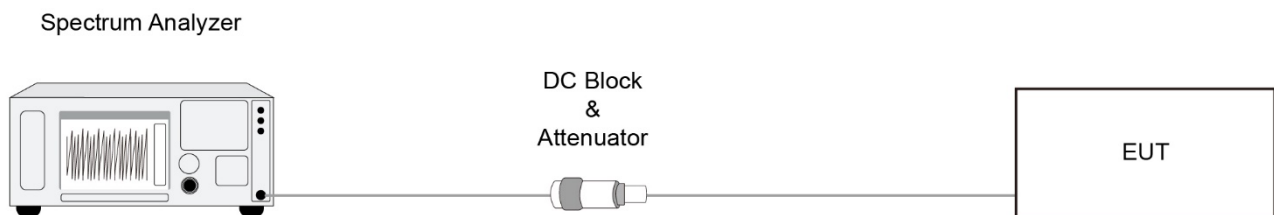


5.4.5. Test Result

Refer to Appendix A.3.

5.5. Necessary Bandwidth Measurement

5.5.1. Test Limit

Digital emissions within the band from one megahertz below to one megahertz above the carrier frequency shall comply with the emission mask in section 8.3.2.2 of the European Telecommunications Institute Standard ETSI EN 300 422-1 v1.4.2, the transmitter output spectrum shall be within the mask defined as below figure.

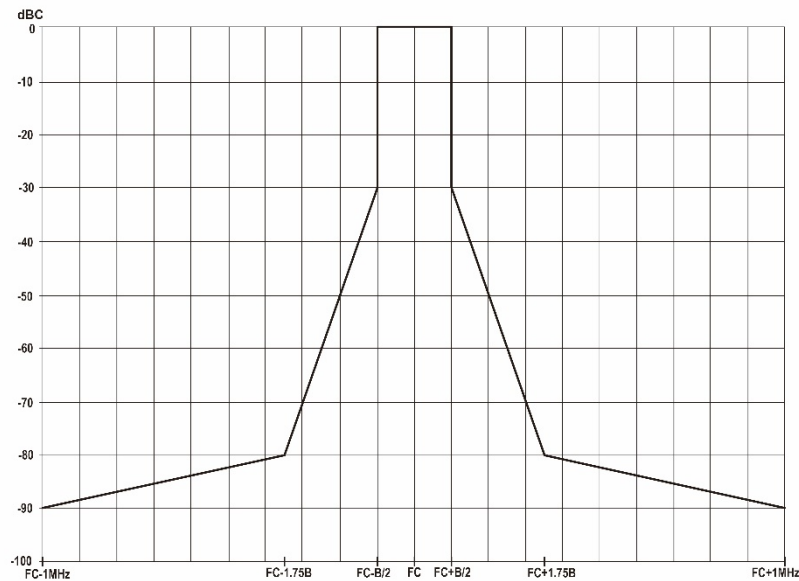

5.5.2. Test Procedure


EN 300 422-1 V1.4.2 clause 8.3.2.1.

5.5.3. Test Setting

The EUT was powered up and the transmit frequency & power output of the EUT were selected.

The spectrum analyzer center frequency is set to the nominal EUT channel center frequency.

5.5.4. Test Setup

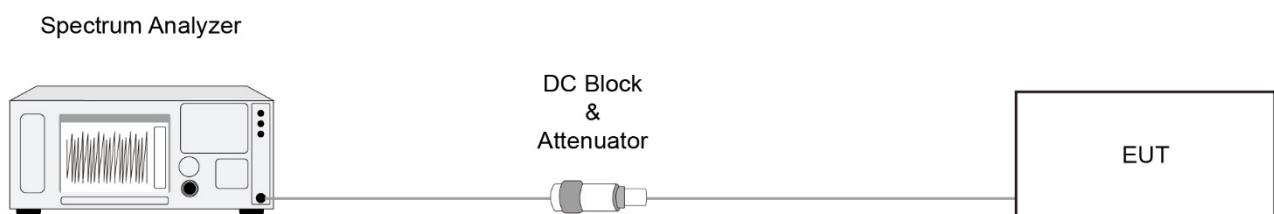

5.5.5. Test Result

Refer to Appendix A.4.

5.6. Radiated Spurious Emissions Measurement

5.6.1. Test Limit

According to FCC Part 74.861(e)(7), beyond one megahertz below and above the carrier frequency, emissions shall comply with the limits specified in section 8.4 of ETSI EN 300 422-1 v1.4.2.

State	Frequency Range		
	47MHz to 74MHz, 87.5MHz to 137MHz 174MHz to 230MHz, 470MHz to 862MHz	Other Frequencies below 1000MHz	Frequencies above 1000MHz
Operation	4nW	250nW	1uW
Standby	2nW	2nW	20nW

5.6.2. Test Procedure

ETSI EN 300 422-1 V1.4.2 clause 8.4.2.

5.6.3. Test Setting

Table 1 - RBW as a function of frequency

Frequency	RBW
25 ~ 30 MHz	9 kHz
30 ~ 1000 MHz	100 kHz
1000 ~ 6000 MHz	1 MHz

Emissions shall be investigated up to the 10th harmonic of the fundamental.


Compliance with the emission limits shall be demonstrated using an RMS Average detector.

All significant broadband and narrowband signals found in the preliminary sweeps were measured using a peak detector at a test distance of 3 meters.


At each frequency at which a component is detected, the sample shall be rotated to obtain maximum response and the effective radiated power of that component determined by a substitution measurement.

5.6.4. Test Setup

Below 1GHz Test Setup:

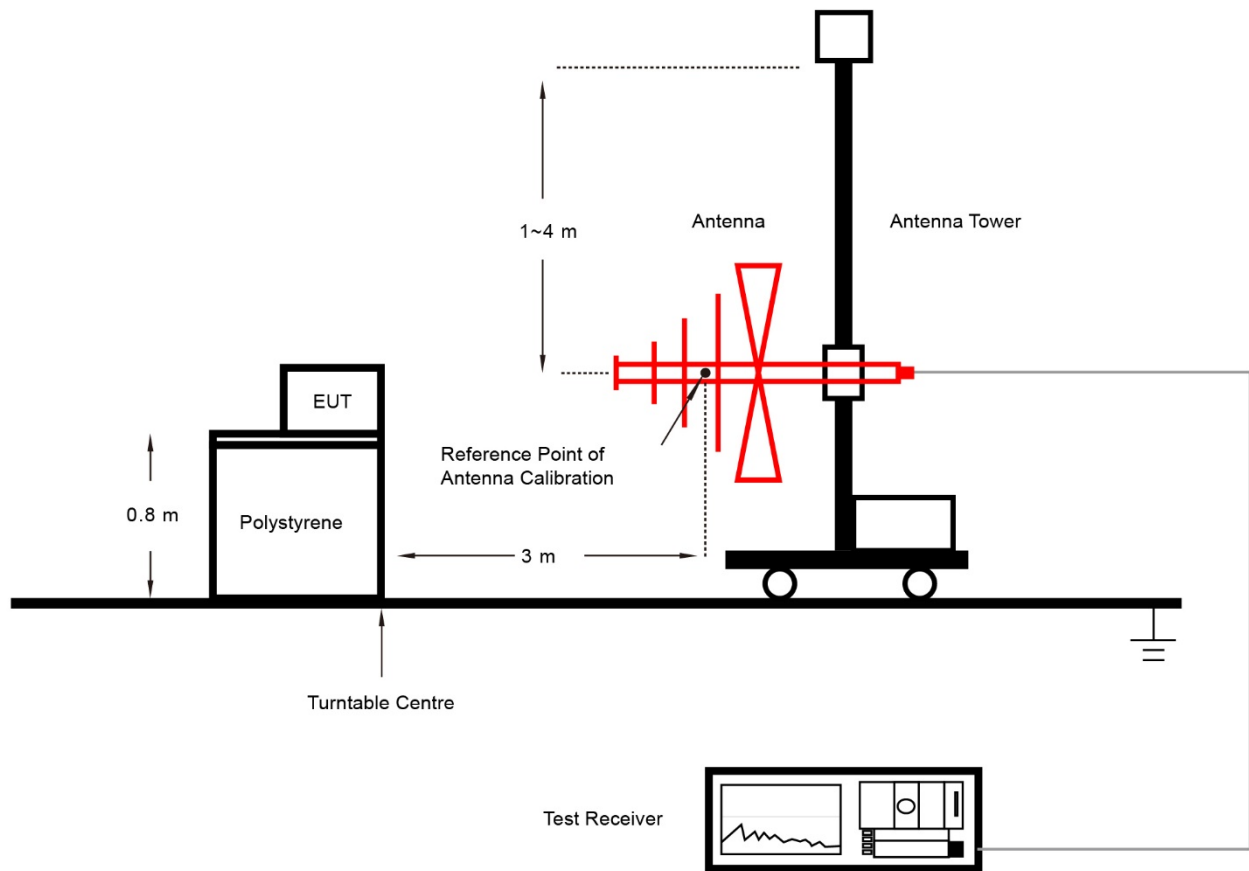

Above 1GHz Test Setup:

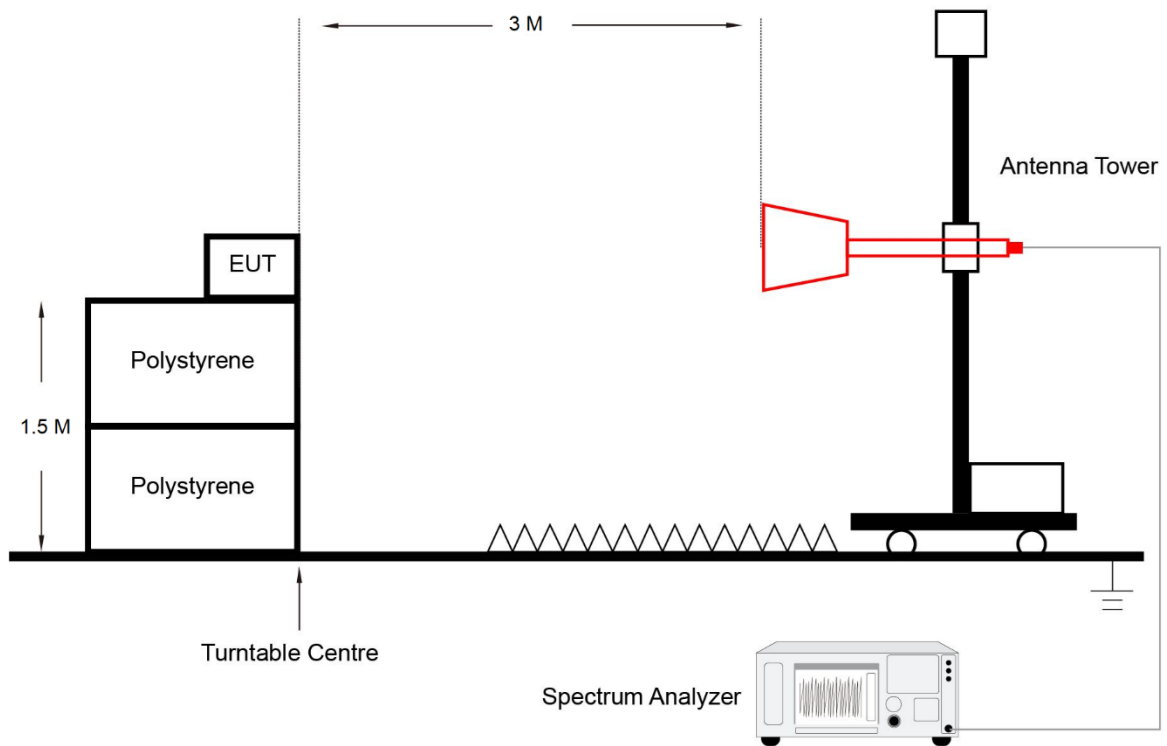

5.6.5. Test Result

Refer to Appendix A.5.

Appendix A – Test Result

A.1 RF Output Power Test Result

Test Site	WZ-SR5	Test Engineer	Dandy Li
Test Date	2023-01-03		

Frequency (MHz)	Conducted Output Power (dBm)	Limit (dBm)	Test Result
STD Mode - 35mW			
941.625	14.25	≤ 30.00	Pass
946.750	14.07	≤ 30.00	Pass
951.875	13.88	≤ 30.00	Pass
952.975	13.83	≤ 30.00	Pass
956.125	13.88	≤ 30.00	Pass
956.575	13.89	≤ 30.00	Pass
959.725	13.85	≤ 30.00	Pass
HD Mode - 2mW			
941.625	2.45	≤ 30.00	Pass
946.750	2.27	≤ 30.00	Pass
951.875	2.08	≤ 30.00	Pass
952.975	2.04	≤ 30.00	Pass
956.125	1.92	≤ 30.00	Pass
956.575	1.90	≤ 30.00	Pass
959.725	1.81	≤ 30.00	Pass

Note: Limit = $10 \cdot \log(1000\text{mW}) = 23.98 \text{ dBm}$.

A.2 Frequency Tolerance Test Result

Test Site	WZ-TR3	Test Engineer	Dandy Li
Test Date	2023-02-06	Test Mode	941.625MHz

Voltage (%)	Power (VDC)	Temp (°C)	Frequency Tolerance (ppm)			
			0 minutes	2 minutes	5 minutes	10 minutes
100	3.7	- 10	-1.73	-1.75	-1.75	-1.74
		0	-1.19	-1.24	-1.27	-1.27
		+ 10	-0.84	-0.88	-0.89	-0.89
		+ 20	-0.65	-0.65	-0.64	-0.64
		+ 30	-0.65	-0.63	-0.62	-0.62
		+ 40	-0.66	-0.67	-0.66	-0.66
		+ 50	-0.63	-0.63	-0.64	-0.64
115	4.2	+ 20	-0.65	-0.65	-0.65	-0.64
85	3.1	+ 20	-0.65	-0.65	-0.64	-0.64

Note: Frequency Tolerance (ppm) = {[Measured Frequency (Hz) - Declared Frequency (Hz)] / Declared Frequency (Hz)} *10⁶.


A.3 99% Occupied Bandwidth Test Result

Test Site	WZ-SR5	Test Engineer	Dandy Li
Test Date	2023-01-16		


Mode	Frequency (MHz)	99% Bandwidth (kHz)	Limit (kHz)	Result
STD (35mW)	941.625	180.28	< 200	Pass
	946.750	180.41	< 200	Pass
	951.875	180.84	< 200	Pass
	952.975	180.66	< 200	Pass
	956.125	180.28	< 200	Pass
	956.575	180.23	< 200	Pass
	959.725	180.28	< 200	Pass
HD (2mW)	941.625	97.152	< 200	Pass
	946.750	97.556	< 200	Pass
	951.875	97.292	< 200	Pass
	952.975	97.612	< 200	Pass
	956.125	97.681	< 200	Pass
	956.575	97.515	< 200	Pass
	959.725	97.371	< 200	Pass

99% Occupied Bandwidth - STD Mode, 35mW


941.625 MHz

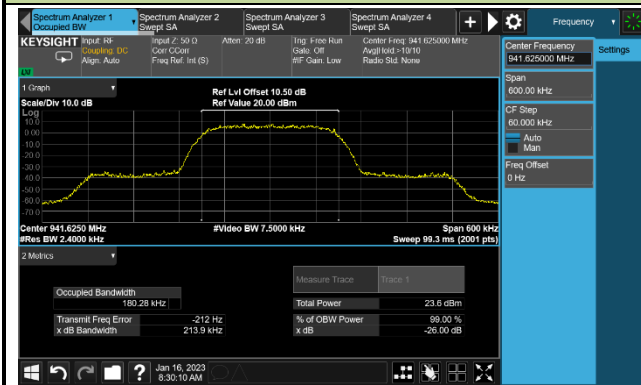

946.750MHz

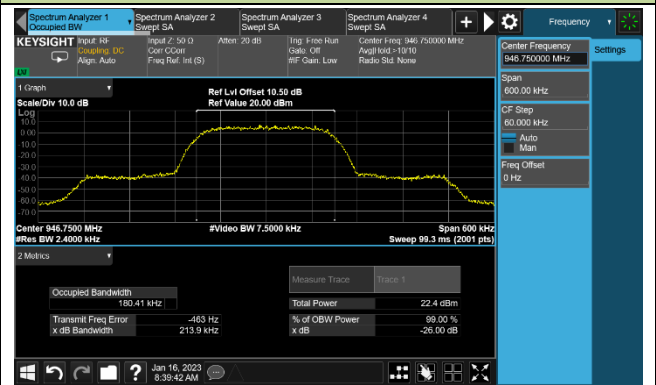


951.875MHz

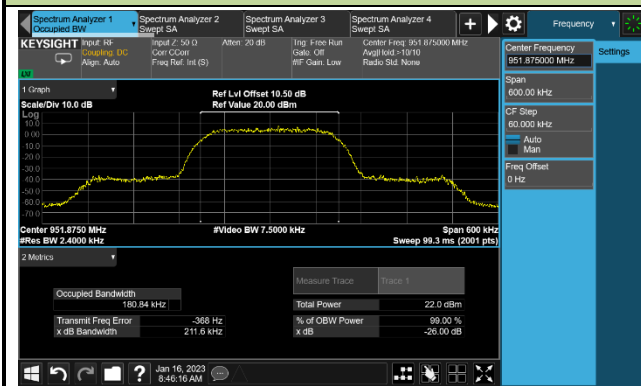


99% Occupied Bandwidth - STD Mode, 35mW


952.975 MHz

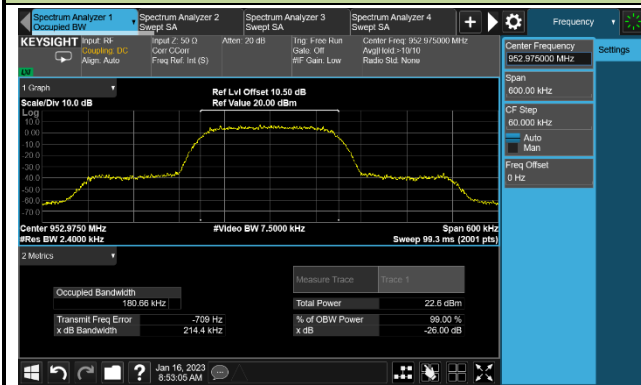


956.125MHz

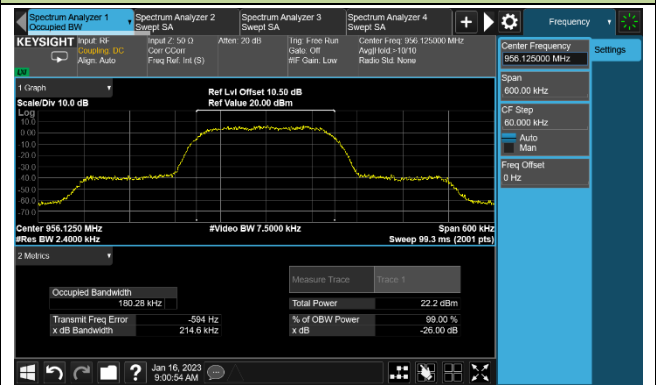

956.575 MHz

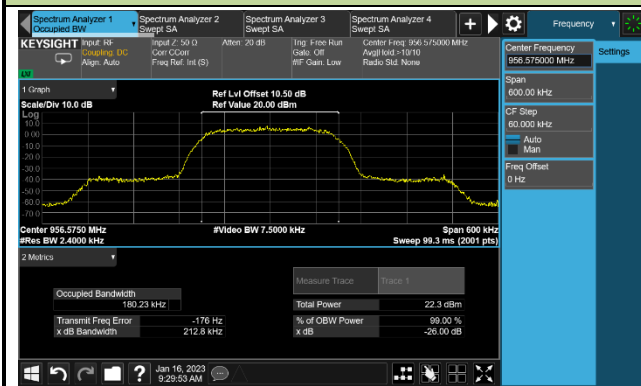


959.725MHz

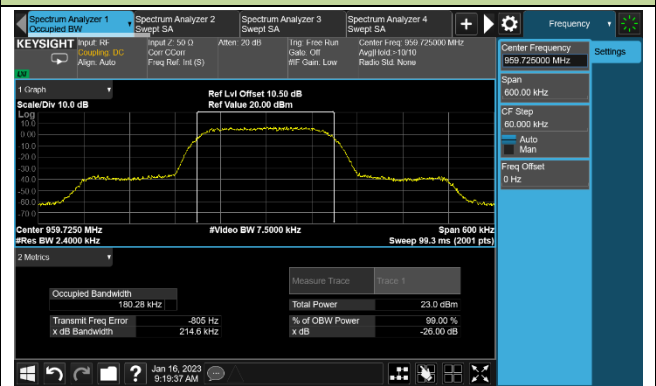


99% Occupied Bandwidth - HD Mode, 2mW


941.625 MHz

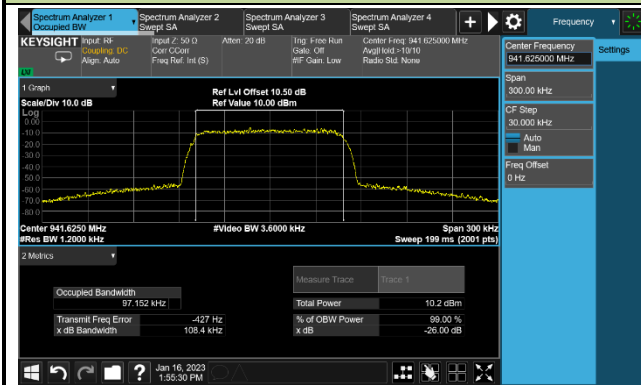

946.750MHz

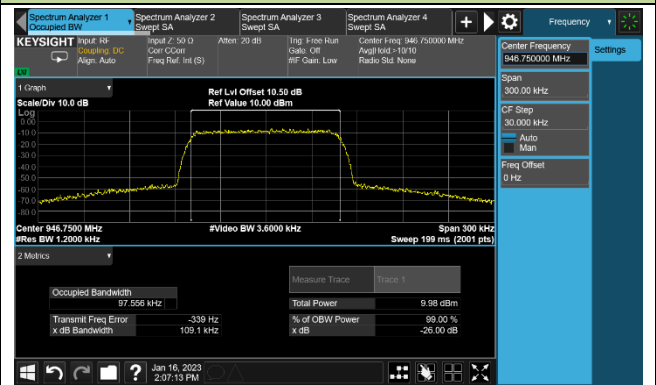


951.875MHz

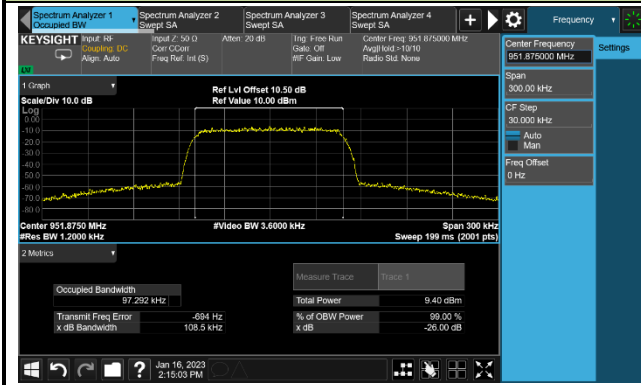


99% Occupied Bandwidth - HD Mode, 2mW


952.975 MHz

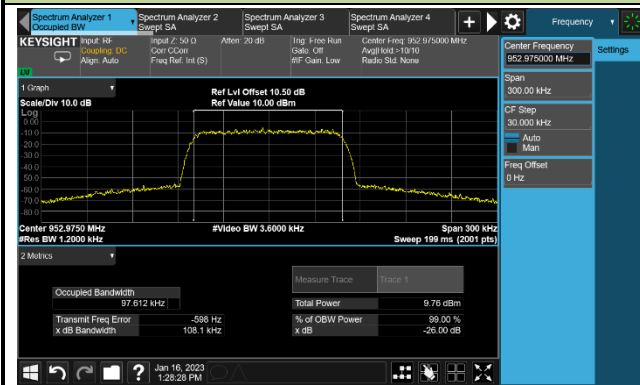


956.125MHz

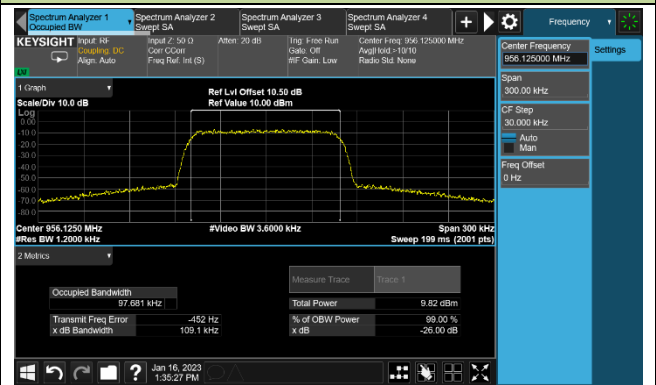

956.575 MHz

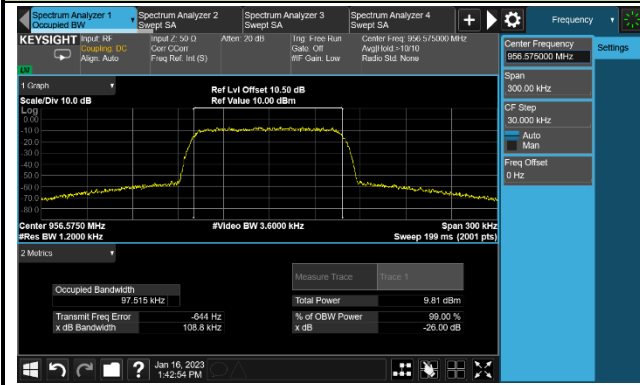

959.725MHz

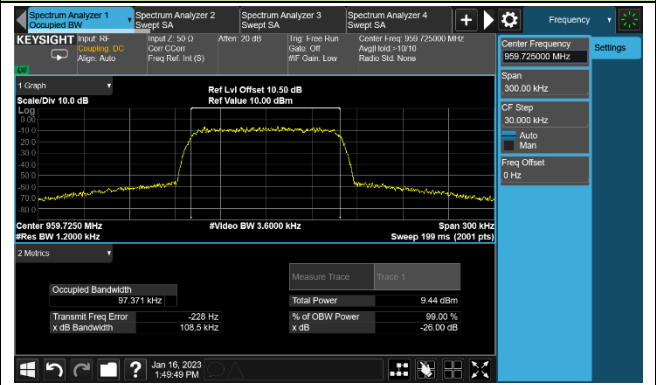


A.4 Necessary Bandwidth Test Result


Test Site	WZ-SR5	Test Engineer	Dandy Li
Test Date	2023-01-16		

Necessary Bandwidth - STD Mode, 2mW, 941.625MHz


Step 1

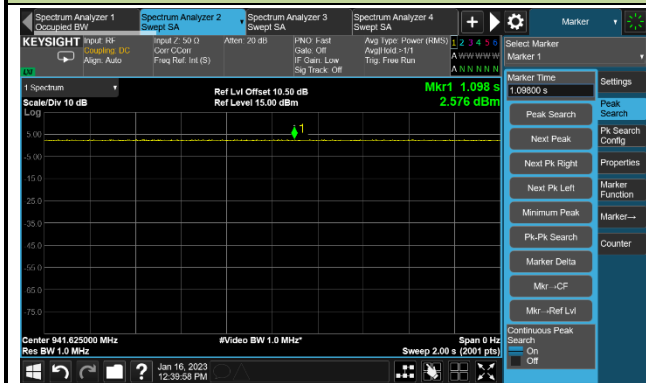

Step 2

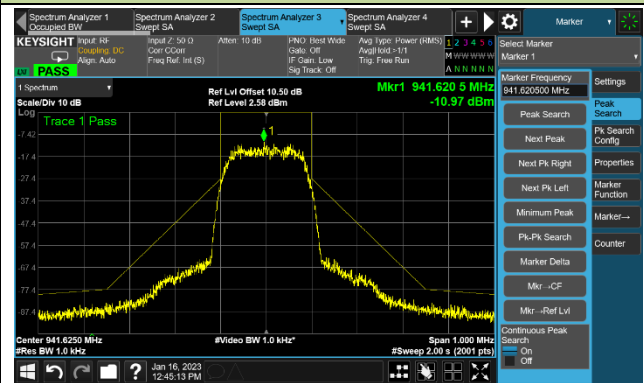


Step 3

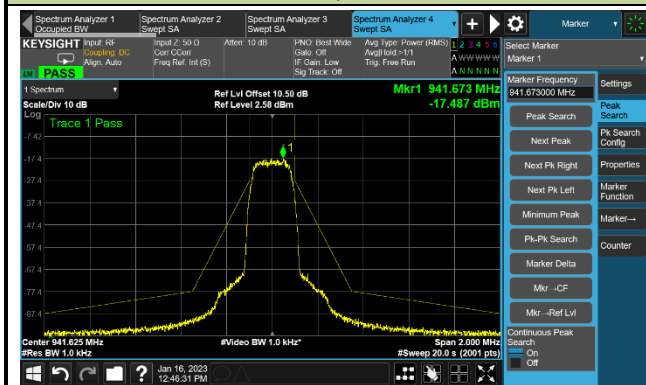


Necessary Bandwidth - STD Mode, 2mW, 946.750MHz


Step 1

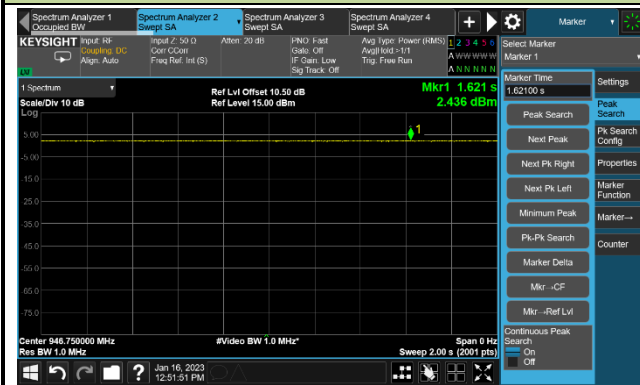

Step 2

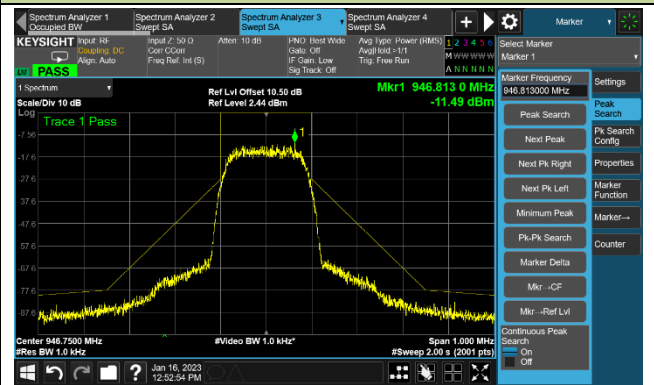


Step 3

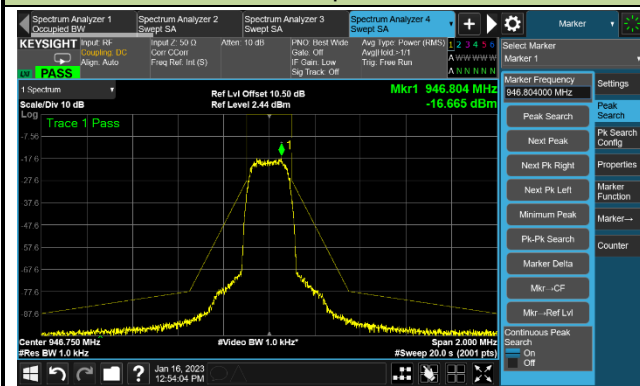


Necessary Bandwidth - STD Mode, 2mW, 951.875 MHz


Step 1

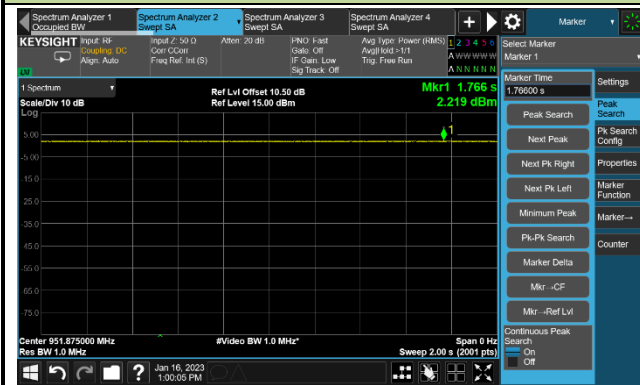

Step 2

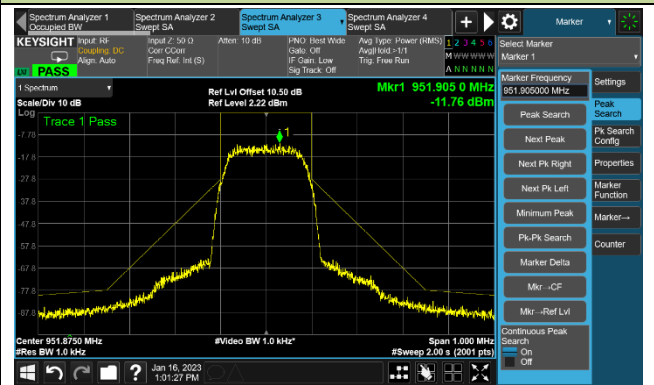


Step 3

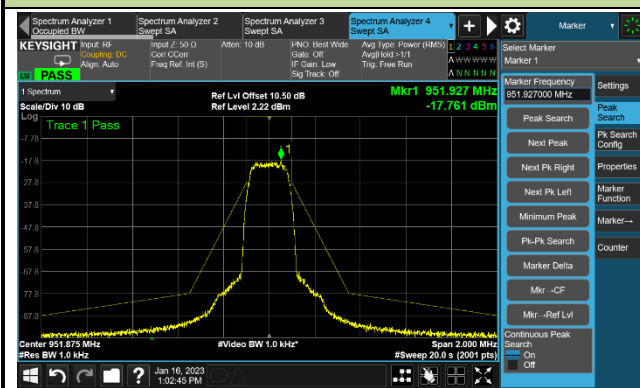


Necessary Bandwidth - STD Mode, 2mW, 952.975MHz


Step 1

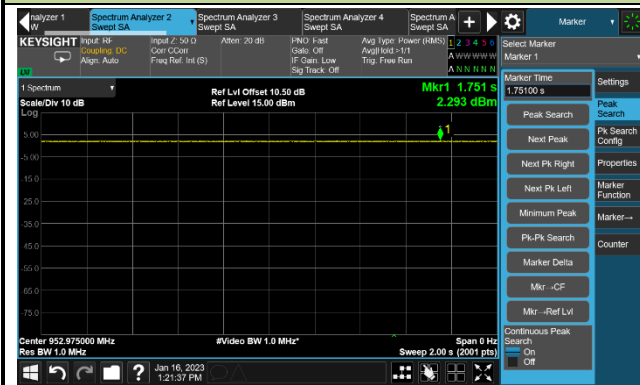

Step 2

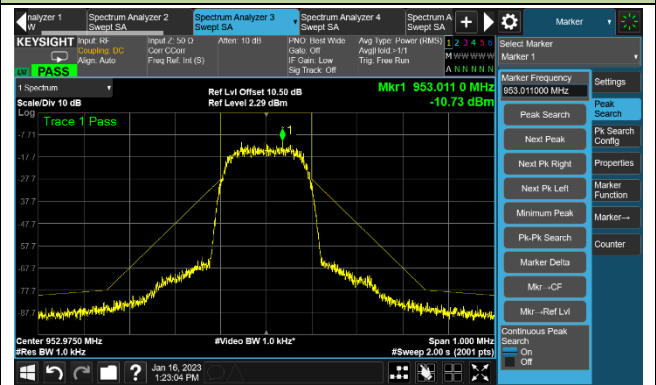


Step 3

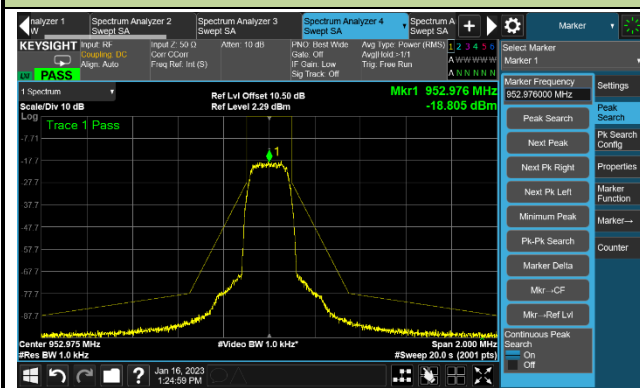


Necessary Bandwidth - STD Mode, 2mW, 956.125MHz


Step 1

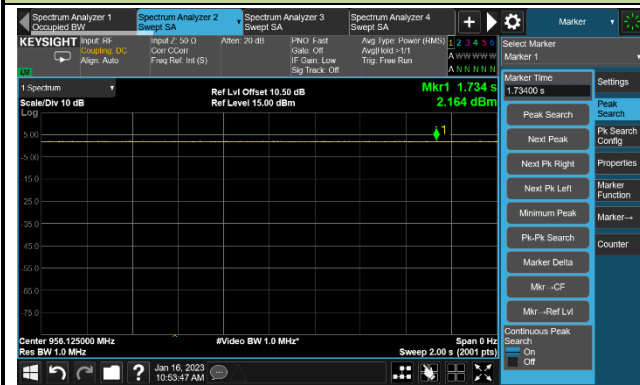

Step 2

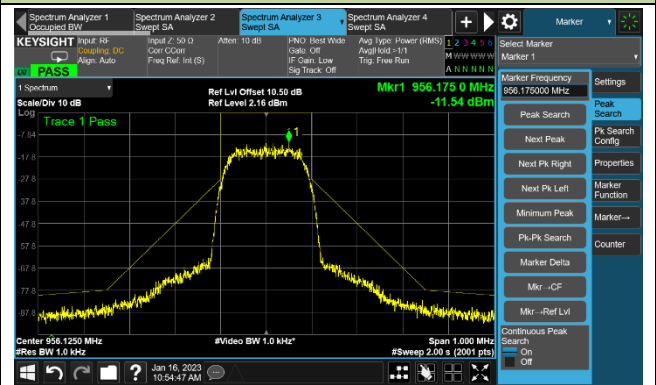


Step 3

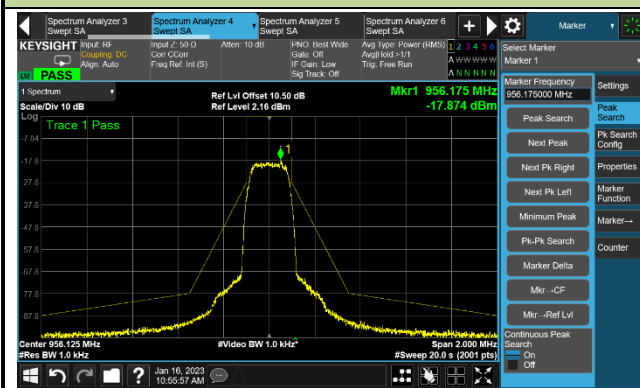


Necessary Bandwidth - STD Mode, 2mW, 956.575MHz


Step 1

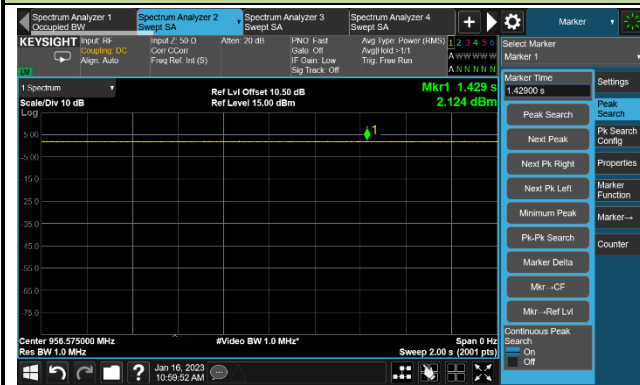

Step 2

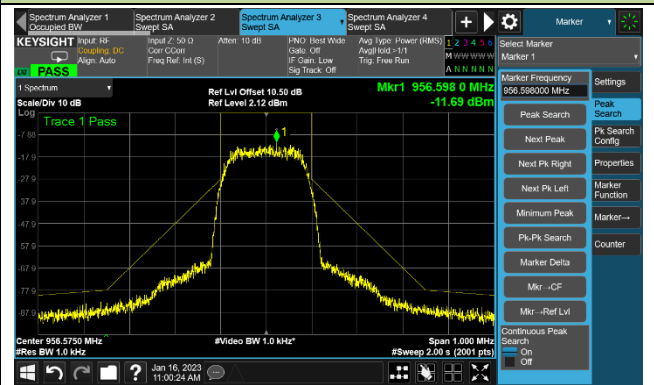


Step 3

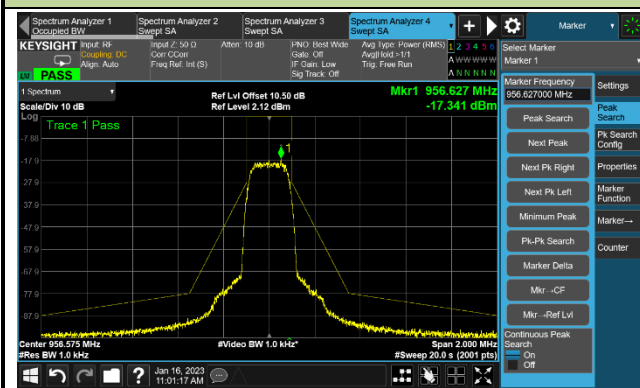


Necessary Bandwidth - STD Mode, 2mW, 959.725MHz


Step 1

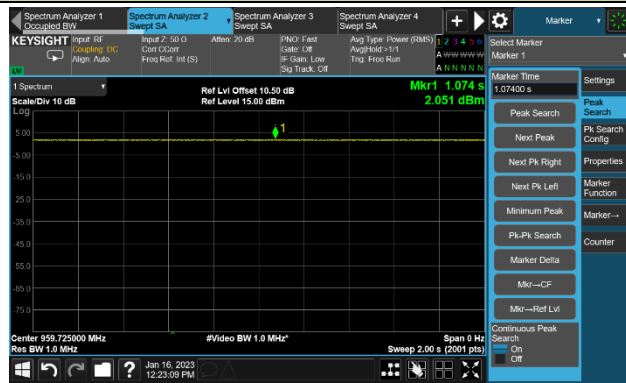

Step 2

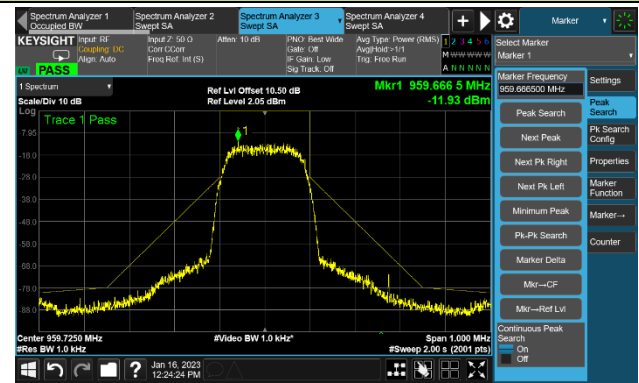


Step 3

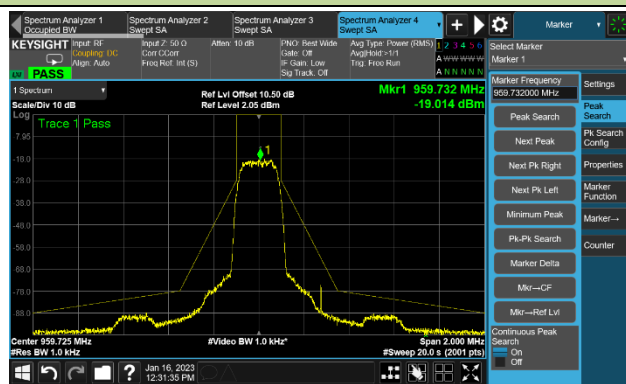


Necessary Bandwidth - STD Mode, 10mW, 941.625MHz


Step 1

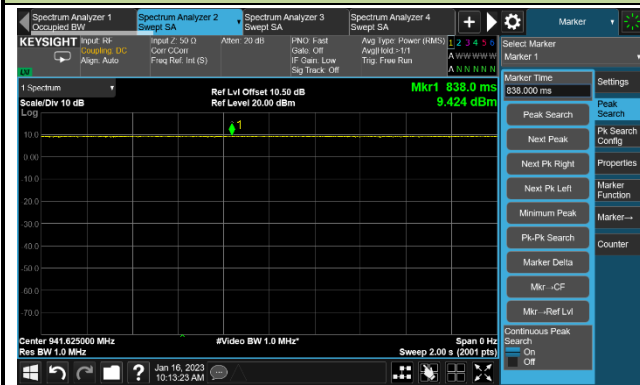

Step 2

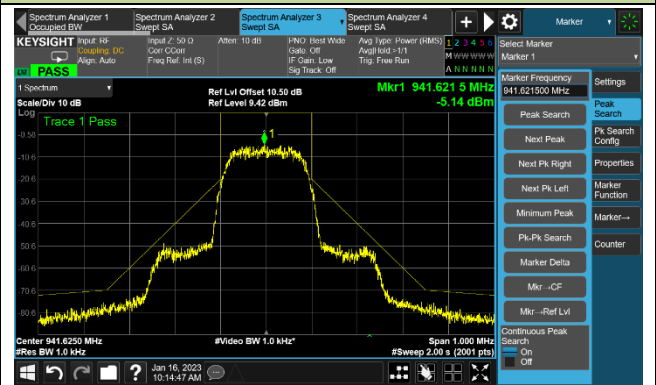


Step 3

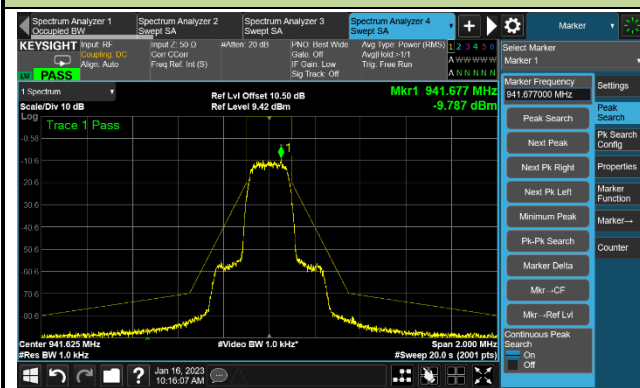


Necessary Bandwidth - STD Mode, 10mW, 946.750MHz


Step 1

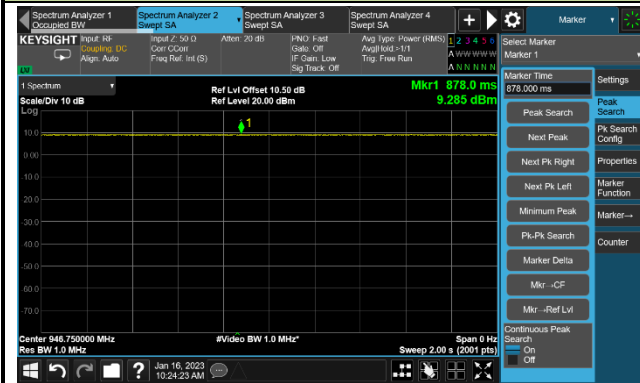

Step 2

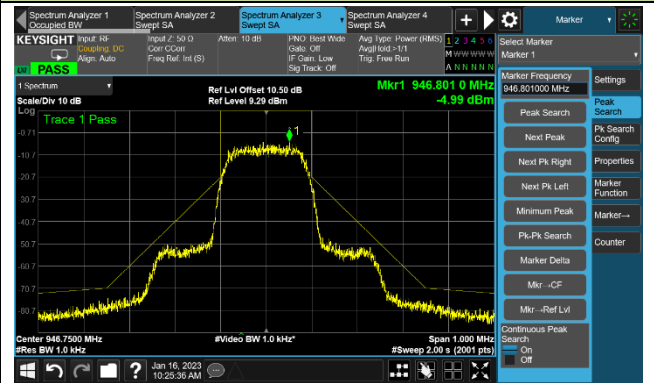


Step 3

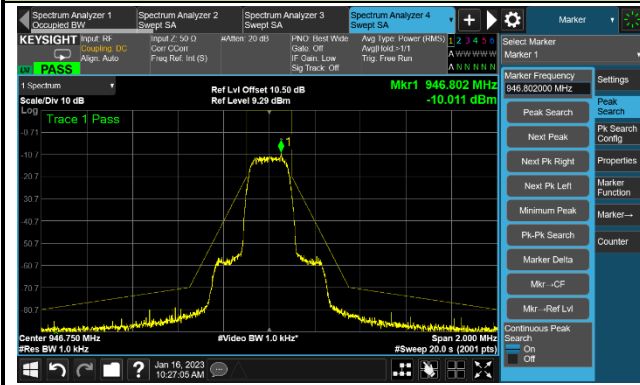


Necessary Bandwidth - STD Mode, 10mW, 951.875 MHz


Step 1

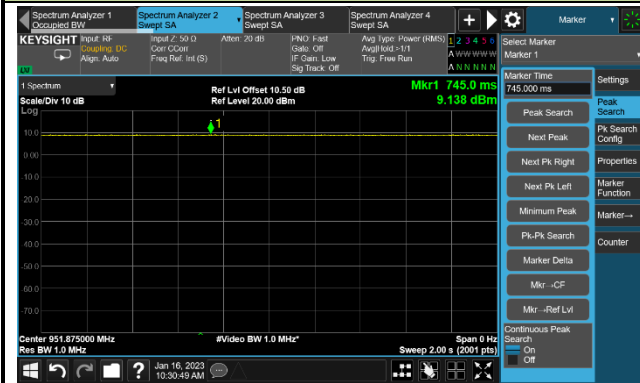

Step 2

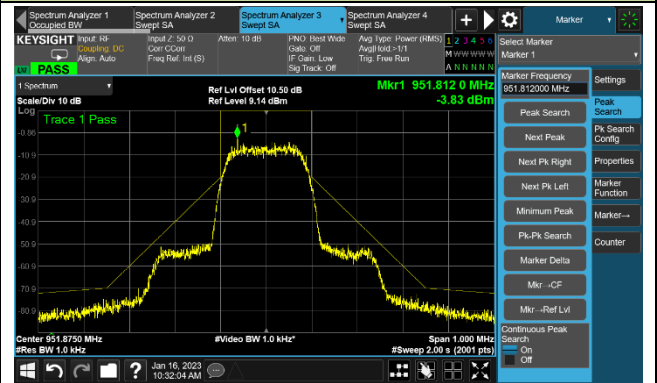


Step 3

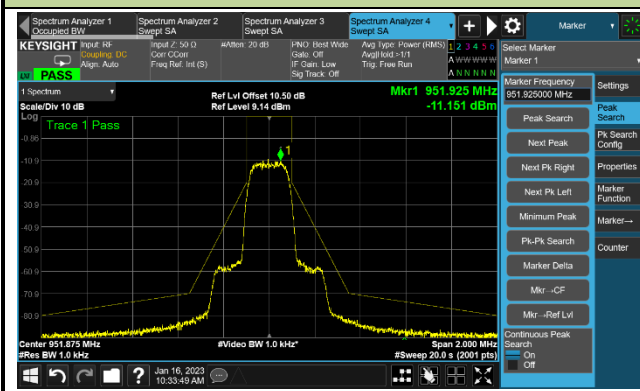


Necessary Bandwidth - STD Mode, 10mW, 952.975MHz

Step 1

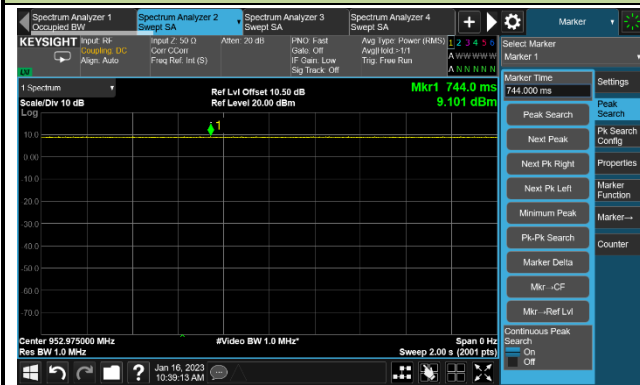

Step 2

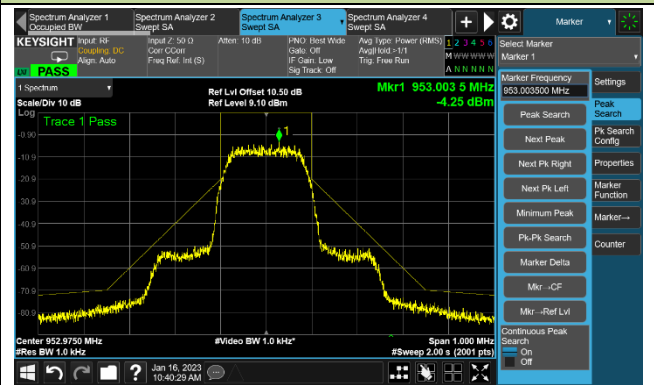

Step 3

