


RF MEASUREMENT REPORT

FCC ID: DD4SH-BLE
Applicant: Shure Incorporated
Product: BLE module
Model No.: SH-BLE
Trade Mark: 
FCC Classification: Digital Transmission System (DTS)
FCC Rule Part(s): Part 15 Subpart C (Section 15.247)
Result: Complies
Received Date: 2024-09-13
Test Date: 2024-09-19 ~ 2024-10-10

Reviewed By:

Jame Yuan

Approved By:

Robin Wu



The test results relate only to the samples tested.
This equipment has been shown to be capable of compliance with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in ANSI C63.10-2013. Test results reported herein relate only to the item(s) tested.
The test report shall not be reproduced except in full without the written approval of MRT Technology (Suzhou) Co., Ltd.

Revision History

Report No.	Version	Description	Issue Date	Note
2409RSU030-U1	V01	Initial Report	2024-10-18	Valid

CONTENTS

Description	Page
1. General Information	5
1.1. Applicant	5
1.2. Manufacturer	5
1.3. Testing Facility	5
1.4. Product Information.....	6
1.5. Radio Specification under Test	6
1.6. Working Frequencies	7
2. Test Configuration	8
2.1. Test Mode.....	8
2.2. Test System Connection Diagram.....	8
2.3. Test Software	9
2.4. Applied Standards.....	9
2.5. Test Environment Condition	9
3. Antenna Requirements	10
4. Measuring Instrument	11
5. Decision Rules and Measurement Uncertainty	12
5.1. Decision Rules	12
5.2. Measurement Uncertainty	12
6. Test Result.....	13
6.1. Summary.....	13
6.2. 6dB Bandwidth Measurement.....	14
6.2.1. Test Limit	14
6.2.2. Test Procedure.....	14
6.2.3. Test Setting	14
6.2.4. Test Setup	14
6.2.5. Test Result	14
6.3. Output Power Measurement	15
6.3.1. Test Limit	15
6.3.2. Test Procedure.....	15
6.3.3. Test Setting	15
6.3.4. Test Setup	15
6.3.5. Test Result	15
6.4. Power Spectral Density Measurement	16
6.4.1. Test Limit	16
6.4.2. Test Procedure.....	16

6.4.3.	Test Setting	16
6.4.4.	Test Setup	16
6.4.5.	Test Result	16
6.5.	Conducted Band Edge and Out-of-Band Emissions Measurement	17
6.5.1.	Test Limit	17
6.5.2.	Test Procedure	17
6.5.3.	Test Settintg	17
6.5.4.	Test Setup	18
6.5.5.	Test Result	18
6.6.	Radiated Spurious Emission Measurement.....	19
6.6.1.	Test Limit	19
6.6.2.	Test Procedure	19
6.6.3.	Test Setting	19
6.6.4.	Test Setup	21
6.6.5.	Test Result	22
6.7.	Radiated Restricted Band Edge Measurement	23
6.7.1.	Test Limit	23
6.7.2.	Test Procedure	24
6.7.3.	Test Setting	24
6.7.4.	Test Setup	25
6.7.5.	Test Result	26
6.8.	AC Conducted Emissions Measurement	27
6.8.1.	Test Limit	27
6.8.2.	Test Setup	27
6.8.3.	Test Result	27
Appendix A - Test Result.....		28
A.1	Duty Cycle Test Result	28
A.2	6dB Bandwidth Test Result	29
A.3	Output Power Test Result	31
A.4	Power Spectral Density Test Result.....	32
A.5	Conducted Band Edge and Out-of-Band Emissions Test Result.....	34
A.6	Radiated Spurious Emission Test Result	38
A.7	Radiated Restricted Band Edge Test Result.....	42
A.8	AC Conducted Emissions Test Result	58
Appendix B - Test Setup Photograph		62
Appendix C - EUT Photograph		63

1.4. Product Information

Product Name	BLE module
Model No.	SH-BLE
Serial No.	95A57153
Bluetooth Specification	BLE only
Operating Temperature	-18 ~50 °C
Antenna Information	Refer to section 1.5
Note: The information of EUT was provided by the manufacturer, and the accuracy of the information shall be the responsibility of the manufacturer.	

1.5. Radio Specification under Test

Bluetooth Frequency	2402 ~ 2480MHz
Channel Number	40
Type of modulation	GFSK
Data Rate	1Mbps & 2Mbps & S8(125kbps) & S2(500kbps)
Antenna Type	Chip Antenna
Antenna Gain	-0.7 dBi

1.6. Working Frequencies

Channel	Frequency	Channel	Frequency	Channel	Frequency
00	2402 MHz	01	2404 MHz	02	2406 MHz
03	2408 MHz	04	2410 MHz	05	2412 MHz
06	2414 MHz	07	2416 MHz	08	2418 MHz
09	2420 MHz	10	2422 MHz	11	2424 MHz
12	2426 MHz	13	2428 MHz	14	2430 MHz
15	2432 MHz	16	2434 MHz	17	2436 MHz
18	2438 MHz	19	2440 MHz	20	2442 MHz
21	2444 MHz	22	2446 MHz	23	2448 MHz
24	2450 MHz	25	2452 MHz	26	2454 MHz
27	2456 MHz	28	2458 MHz	29	2460 MHz
30	2462 MHz	31	2464 MHz	32	2466 MHz
33	2468 MHz	34	2470 MHz	35	2472 MHz
36	2474 MHz	37	2476 MHz	38	2478 MHz
39	2480 MHz	--	--	--	--


2. Test Configuration

2.1. Test Mode

Mode 1: Transmit by BLE-1Mbps
Mode 2: Transmit by BLE-2Mbps
Mode 3: Transmit by BLE-S2
Mode 4: Transmit by BLE-S8

2.2. Test System Connection Diagram

The device was tested per the guidance ANSI C63.10: 2013 was used to reference the appropriate EUT setup for radiated emissions testing and AC line conducted testing.

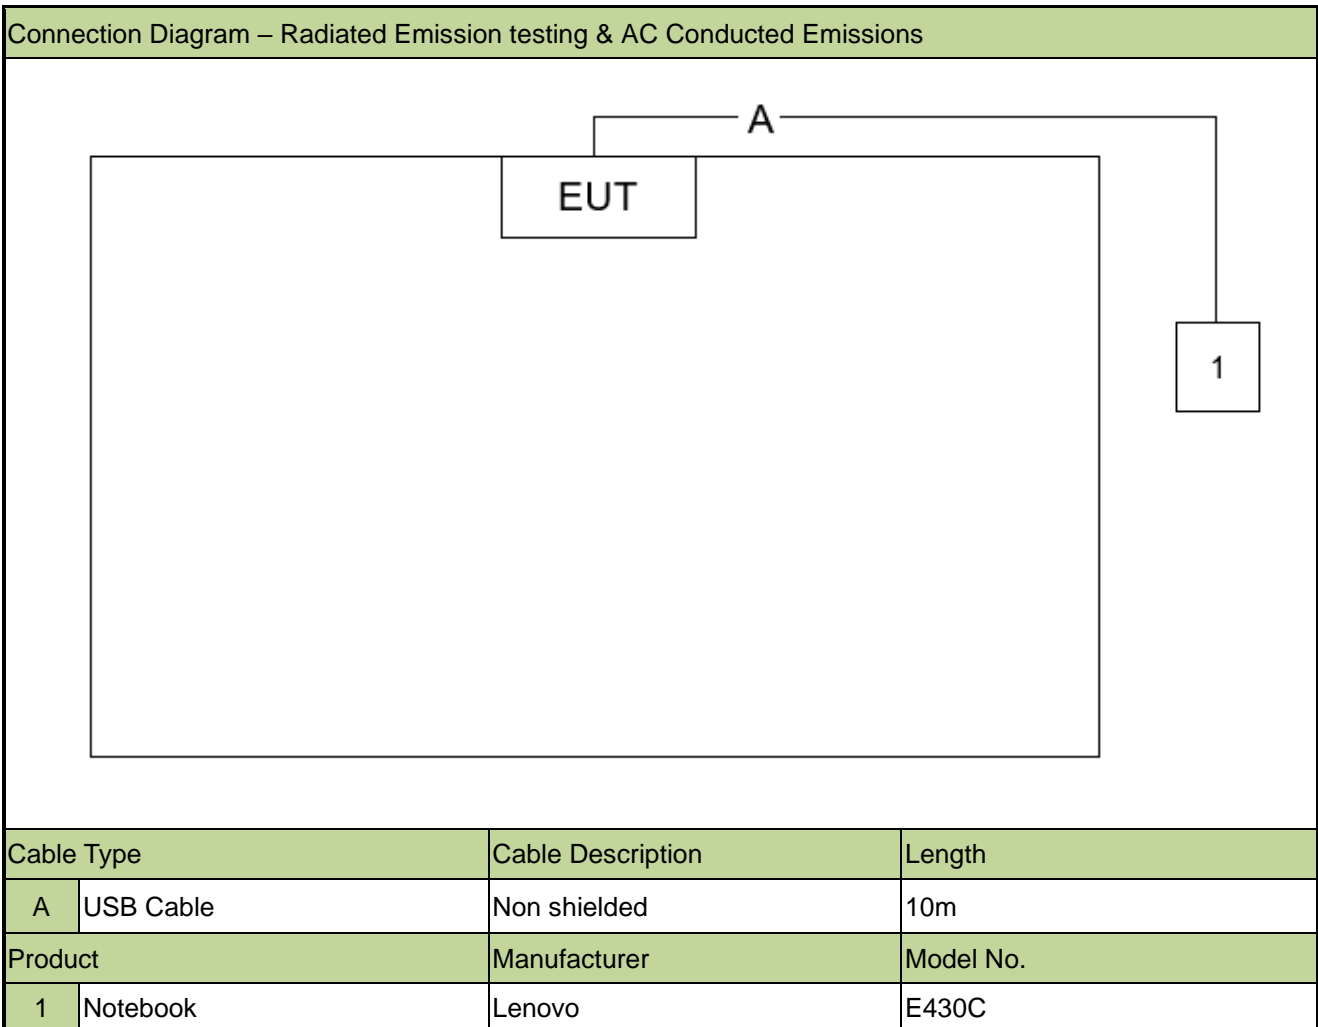

2.3. Test Software

The test utility software used during testing was “Shuer_Control”, and the version was 4.1.

2.4. Applied Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- FCC Part 15.247
- KDB 558074 D01v05r02
- ANSI C63.10-2013

2.5. Test Environment Condition

Ambient Temperature	15 ~ 35°C
Relative Humidity	20 ~75%RH

3. Antenna Requirements

Excerpt from §15.203 of the FCC Rules/Regulations:

“An intentional radiator antenna shall be designed to ensure that no antenna other than that furnished by the responsible party can be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.”

- The antenna of the device is **permanently attached**.
- There are no provisions for connection to an external antenna.

Conclusion:

The unit complies with the requirement of §15.203.

4. Measuring Instrument

Instrument	Manufacturer	Model No.	Asset No.	Cali. Interval	Cali. Due Date	Test Site
EMI Test Receiver	R&S	ESR7	MRTSUE06001	1 year	2024-12-17	WZ-AC1
Horn Antenna	Schwarzbeck	BBHA 9120D	MRTSUE06023	1 year	2025-07-26	WZ-AC1
Preamplifier	Agilent	83017A	MRTSUE06076	1 year	2024-11-09	WZ-AC1
TRILOG Antenna	Schwarzbeck	VULB 9168	MRTSUE06172	1 year	2025-05-15	WZ-AC1
Anechoic Chamber	TDK	WZ-AC1	MRTSUE06212	1 year	2025-04-19	WZ-AC1
Thermohygrometer	testo	608-H1	MRTSUE11039	1 year	2024-10-25	WZ-AC1
Signal Analyzer	Keysight	N9010B	MRTSUE06607	1 year	2024-10-23	WZ-AC1
Horn Antenna	Schwarzbeck	BBHA 9170	MRTSUE06597	1 year	2024-11-04	WZ-AC1
Preamplifier	EMCI	EMC184045SE	MRTSUE06640	1 year	2025-01-11	WZ-AC1
Active Loop Antenna	Schwarzbeck	FMZB 1519-60 D	MRTSUE07076	1 year	2024-12-04	WZ-AC1
USB Power Sensor	Agilent	U2021XA	MRTSUE06030	1 year	2025-09-11	WZ-SR5
Thermohygrometer	testo	608-H1	MRTSUE06402	1 year	2025-05-12	WZ-SR5
Signal Analyzer	Keysight	N9010B	MRTSUE06457	1 year	2025-05-08	WZ-SR5
Two-Line V-Network	R&S	ENV216	MRTSUE06002	1 year	2025-05-08	WZ-SR2
Shielding Room	MIX-BEP	WZ-SR2	MRTSUE06215	5 years	2026-12-20	WZ-SR2
Thermohygrometer	testo	608-H1	MRTSUE06404	1 year	2025-05-12	WZ-SR2
Four-Line V-Network	R&S	ENV432	MRTSUE06615	1 year	2025-09-05	WZ-SR2
EMI Test Receiver	R&S	ESR3	MRTSUE06909	1 year	2025-09-05	WZ-SR2

Software	Version	Function
e3	230711	RE & CE
BenchVue Power Meter	2018.1	Power
Controller_MF 7802	2.03C	RE Antenna & Turntable

5. Decision Rules and Measurement Uncertainty

5.1. Decision Rules

The Decision Rule is based on Simple Acceptance in accordance with ISO Guide 98-4: 2012 Clause 8.2. (Measurement uncertainty is not taken into account when stating conformity with a specified requirement.)

5.2. Measurement Uncertainty

Where relevant, the following test uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k = 2$.

AC Conducted Emission Measurement
The maximum measurement uncertainty is evaluated as: 9kHz~150kHz: 3.58dB 150kHz~30MHz: 3.20dB
Radiated Emission Measurement
The maximum measurement uncertainty is evaluated as: Coaxial: 9kHz~30MHz: 2.61dB Coplanar: 9kHz~30MHz: 2.62dB Horizontal: 30MHz~200MHz: 3.79dB 200MHz~1GHz: 3.91dB 1GHz~40GHz: 4.99dB Vertical: 30MHz~200MHz: 4.06dB 200MHz~1GHz: 5.21dB 1GHz~40GHz: 4.90dB
Spurious Emissions, Conducted
Measuring Uncertainty for a Level of Confidence of 95% ($U=2Uc(y)$): 2.2dB
Output Power
Measuring Uncertainty for a Level of Confidence of 95% ($U=2Uc(y)$): 1.4dB
Power Spectrum Density
Measuring Uncertainty for a Level of Confidence of 95% ($U=2Uc(y)$): 2.2dB
Occupied Bandwidth
Measuring Uncertainty for a Level of Confidence of 95% ($U=2Uc(y)$): 2.7%

6. Test Result

6.1. Summary

FCC Section(s)	Test Description	Test Condition	Verdict
15.247(a)(2)	6dB Bandwidth	Conducted	Pass
15.247(b)(3)	Output Power		Pass
15.247(e)	Power Spectral Density		Pass
15.247(d)	Band Edge / Out-of-Band Emissions		Pass
15.205 15.209	General Field Strength (Restricted Bands and Radiated Emission)	Radiated	Pass
15.207	AC Conducted Emissions 150kHz - 30MHz	Line Conducted	Pass

Notes:

- The analyzer plots shown in this section were all taken with a correction table loaded into the analyzer. The correction table was used to account for the losses of the cables and attenuators used as part of the system to connect the EUT to the analyzer at all frequencies of interest.
- For radiated emission test, every axis (X, Y, Z) was also verified. The test results shown in the following sections represent the worst-case emissions.

6.2. 6dB Bandwidth Measurement

6.2.1. Test Limit

The minimum 6dB bandwidth shall be at least 500 kHz.


6.2.2. Test Procedure

ANSI C63.10 - 2013 - Section 11.8

6.2.3. Test Setting

1. The Spectrum's automatic bandwidth measurement capability was used to perform the 6dB bandwidth measurement. The "X" dB bandwidth parameter was set to $X = 6$. The bandwidth measurement was not influenced by any intermediate power nulls in the fundamental emission.
2. Set RBW = 100 kHz
3. VBW $\geq 3 \times$ RBW
4. Detector = Peak
5. Trace mode = Max hold
6. Sweep = Auto couple
7. Allow the trace to stabilize

6.2.4. Test Setup

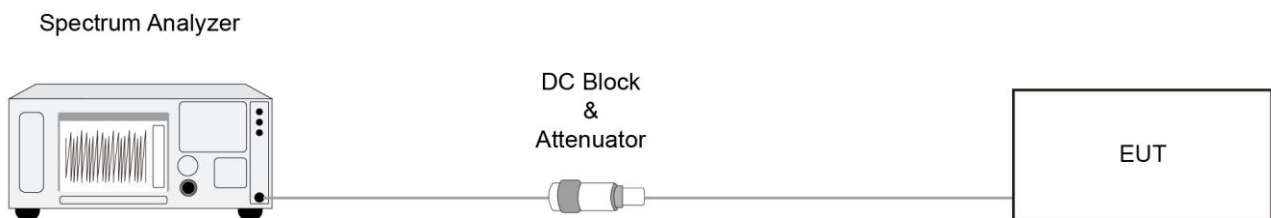

6.2.5. Test Result

Refer to Appendix A.2.

6.3. Output Power Measurement

6.3.1. Test Limit

The maximum output power shall be less 1 Watt (30dBm).

The conducted output power limit specified in paragraph FCC Part 15.247(b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. If transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs FCC Part 15.247(b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

6.3.2. Test Procedure

ANSI C63.10 - 2013 - Section 11.9.1.3

ANSI C63.10 - 2013 - Section 11.9.2.3.2

6.3.3. Test Setting


Method PKPM1 (Peak Power Measurement of Signals with DTS BW \leq 50MHz)

Peak power measurements were performed only when the EUT was transmitting at its maximum power control level using a broadband power meter with a pulse sensor. The pulse sensor employs a VBW = 50MHz so this method was only used for signals whose DTS bandwidth was less than or equal to 50MHz.

Average Power Measurement

Average power measurements were performed only when the EUT was transmitting at its maximum power control level using a broadband power meter with a pulse sensor. The power meter implemented triggering and gating capabilities which were set up such that power measurements were recorded only during the ON time of the transmitter.

6.3.4. Test Setup

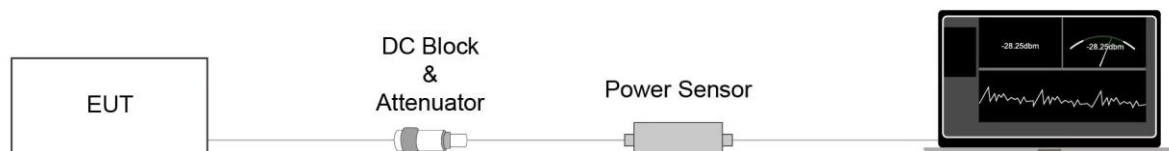

6.3.5. Test Result

Refer to Appendix A.3.

6.4. Power Spectral Density Measurement

6.4.1. Test Limit

The maximum permissible power spectral density is 8dBm in any 3 kHz band.

The same method of determining the conducted output power shall be used to determine the power spectral density.


6.4.2. Test Procedure

ANSI C63.10-2013 Section 11.10.2

6.4.3. Test Setting

1. Analyzer was set to the center frequency of the DTS channel under investigation
2. Span = 1.5 times the DTS channel bandwidth
3. RBW = 3kHz
4. VBW = 10kHz
5. Detector = peak
6. Sweep time = auto couple
7. Trace mode = max hold
8. Trace was allowed to stabilize

6.4.4. Test Setup

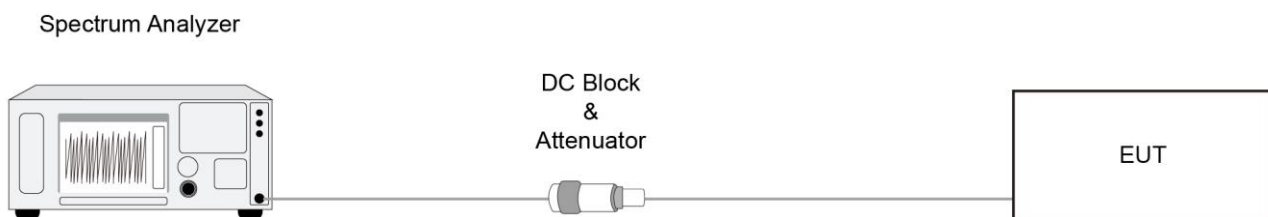

6.4.5. Test Result

Refer to Appendix A.4.

6.5. Conducted Band Edge and Out-of-Band Emissions Measurement

6.5.1. Test Limit

The limit for out-of-band spurious emissions at the band edge is 20dB below the fundamental emission level, as determined from the in-band power measurement of the DTS channel performed in a 100 kHz bandwidth per the PSD procedure.

6.5.2. Test Procedure

ANSI C63.10-2013 - Section 11.11

6.5.3. Test Setting

Reference level measurement


1. Set instrument center frequency to DTS channel center frequency
2. Set the span to ≥ 1.5 times the DTS bandwidth
3. Set the RBW = 100 kHz
4. Set the VBW $\geq 3 \times$ RBW
5. Detector = peak
6. Sweep time = auto couple
7. Trace mode = max hold
8. Allow trace to fully stabilize

Emission level measurement

1. Set the center frequency and span to encompass frequency range to be measured
2. RBW = 100kHz
3. VBW = 300kHz
4. Detector = Peak
5. Trace mode = max hold
6. Sweep time = auto couple
7. The trace was allowed to stabilize

6.5.4. Test Setup

Spectrum Analyzer



DC Block
&
Attenuator



6.5.5. Test Result

Refer to Appendix A.5.

6.6. Radiated Spurious Emission Measurement

6.6.1. Test Limit

All out of band emissions appearing in a restricted band as specified in Section 15.205 of the Title 47 CFR must not exceed the limits shown in Table per Section 15.209.

FCC Part 15 Subpart C Paragraph 15.209		
Frequency [MHz]	Field Strength [uV/m]	Measured Distance [Meters]
0.009 - 0.490	2400/F (kHz)	300
0.490 - 1.705	24000/F (kHz)	30
1.705 - 30	30	30
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
Above 960	500	3

6.6.2. Test Procedure

ANSI C63.10 - 2013 - Section 11.11 & 11.12

ANSI C63.10 - 2013 - Section 6.3 (General Requirements)

ANSI C63.10 - 2013 - Section 6.4 (Standard test method below 30MHz)

ANSI C63.10 - 2013 - Section 6.5 (Standard test method above 30MHz to 1GHz)

ANSI C63.10 - 2013 - Section 6.6 (Standard test method above 1GHz)

6.6.3. Test Setting

Table 1 - RBW as a function of frequency

Frequency	RBW
9 ~ 150 kHz	200 ~ 300 Hz
0.15 ~ 30 MHz	9 ~ 10 kHz
30 ~ 1000 MHz	100 ~ 120 kHz
> 1000MHz	1MHz

Quasi-Peak Measurements below 1GHz

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. Span was set greater than 1MHz
3. RBW = as specified in Table 1
4. Detector = CISPR quasi-peak
5. Sweep time = auto couple
6. Trace was allowed to stabilize

Peak Measurements above 1GHz


1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW = 3MHz
4. Detector = Peak
5. Sweep time = Auto couple
6. Trace mode = Max hold
7. Trace was allowed to stabilize

Average Measurements above 1GHz (Method VB)


1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW; if the EUT is configured to transmit with duty cycle $\geq 98\%$, set VBW = 10Hz
If the EUT duty cycle is $< 98\%$, set $VBW \geq 1/T$. T is the minimum transmission duration.
4. As an alternative, the instrument may be set to linear detector mode. Ensure that video filtering is applied in linear voltage domain (rather than in a log or dB domain). Some instruments require linear display mode in order to accomplish this. Others have a setting for Average-VBW Type, which can be set to "Voltage" regardless of the display mode
5. Detector = Peak
6. Sweep time = Auto
7. Trace mode = Max hold
8. Trace was allowed to stabilize

6.6.4. Test Setup


Below 30MHz Test Setup:

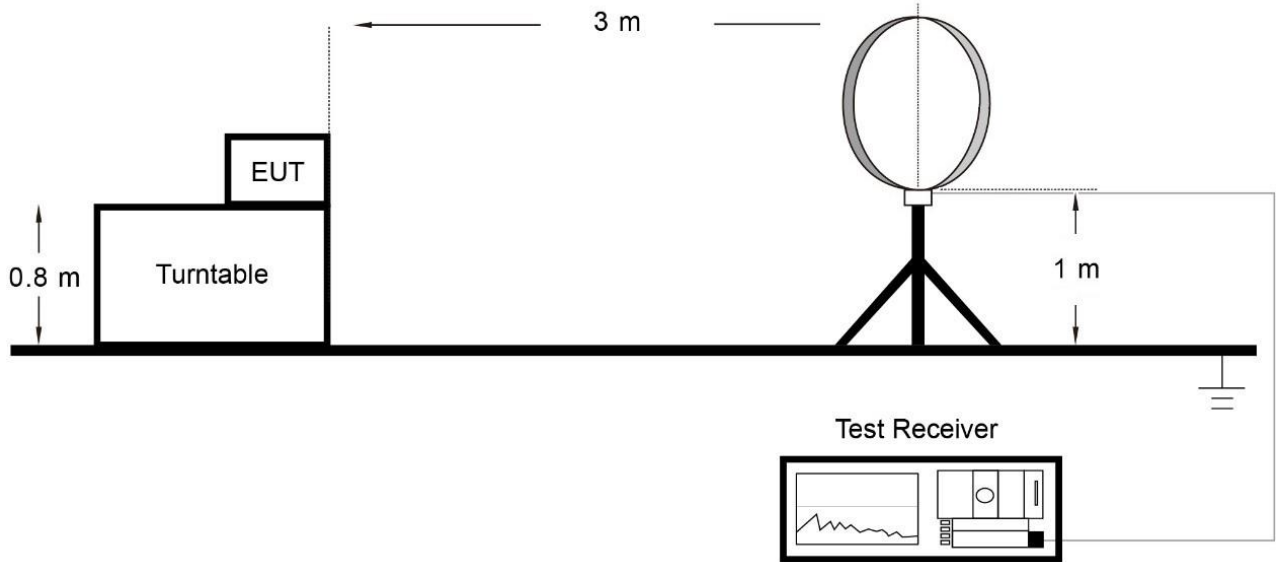

Below 1GHz Test Setup:

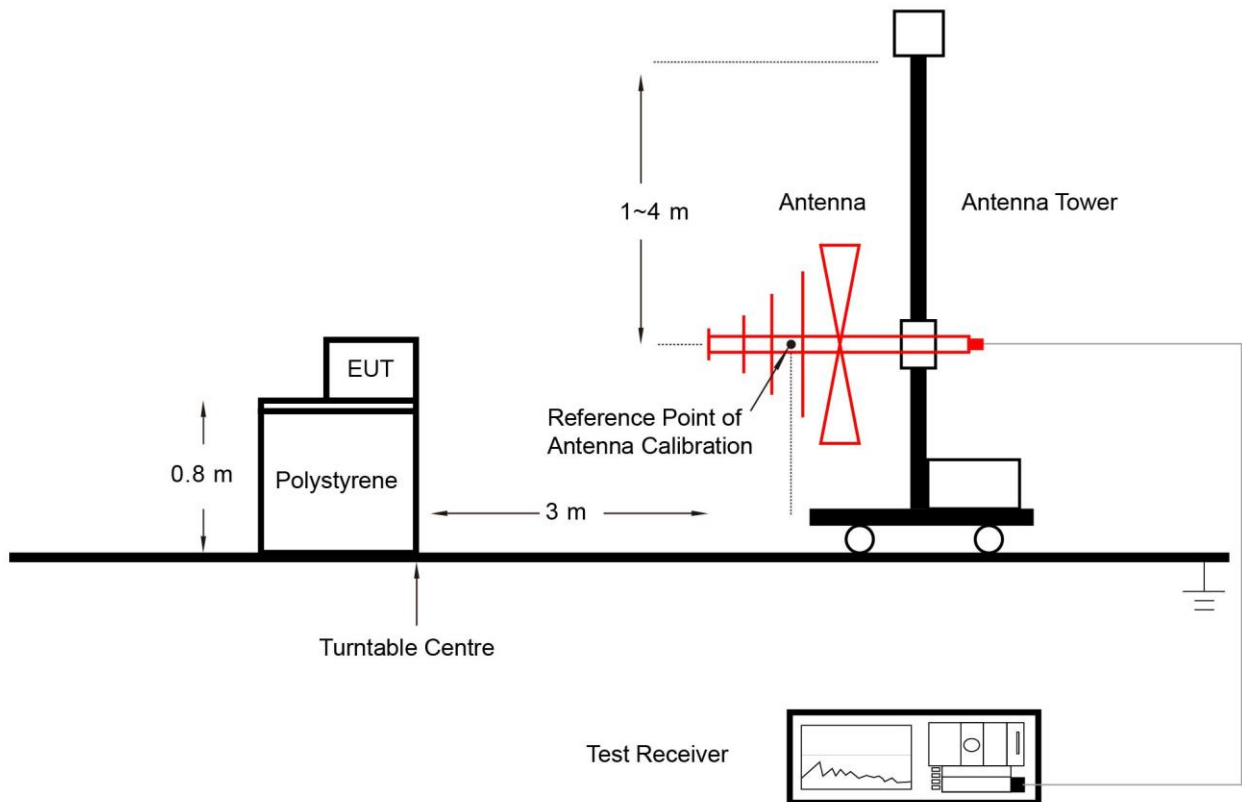

Above 1GHz Test Setup:

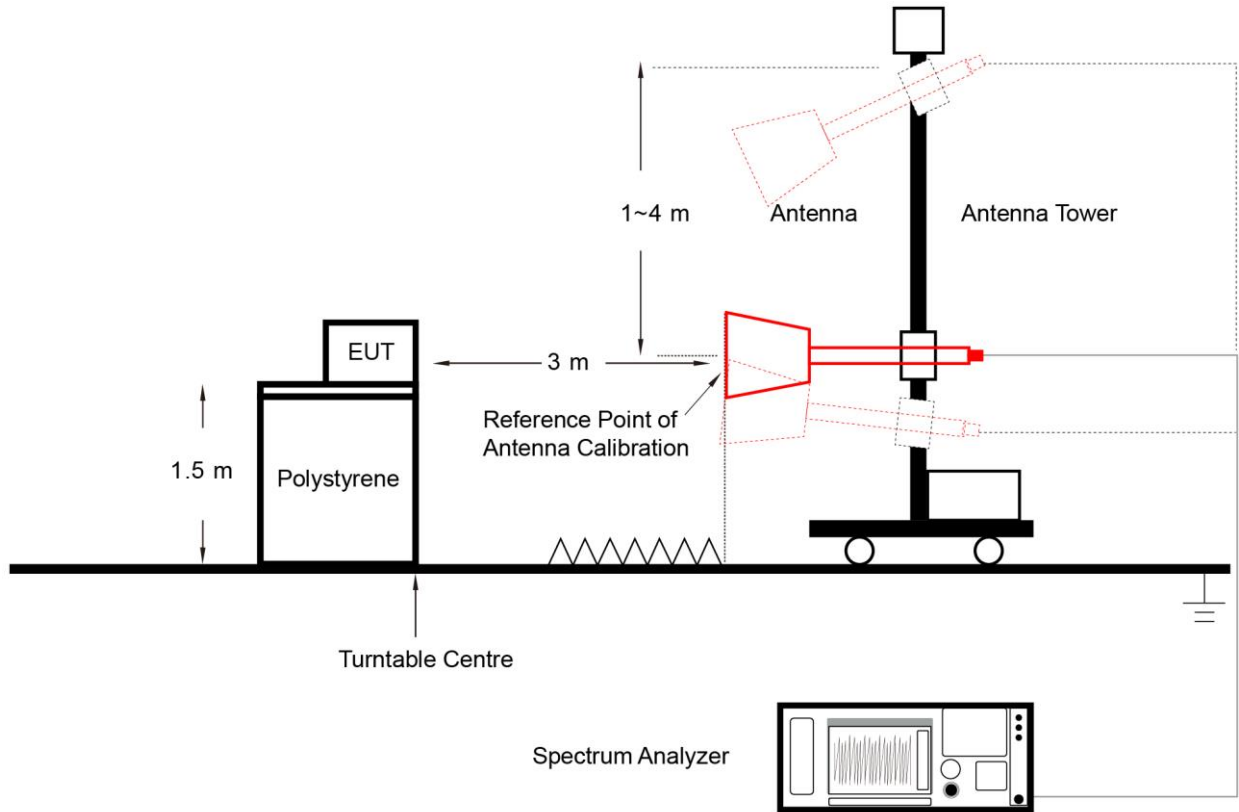

6.6.5. Test Result

Refer to Appendix A.6.

6.7. Radiated Restricted Band Edge Measurement

6.7.1. Test Limit

For 15.205 requirement:

Radiated emissions which fall in the restricted bands, as defined in Section 15.205(a) of FCC part 15, must also comply with the radiated emission limits specified in Section 15.209(a).

Frequency (MHz)	Frequency (MHz)	Frequency (MHz)	Frequency (GHz)
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
¹ 0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 - 156.52525	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.7 - 156.9	2690 - 2900	22.01 - 23.12
8.41425 - 8.41475	162.0125 - 167.17	3260 - 3267	23.6 - 24.0
12.29 - 12.293	167.72 - 173.2	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	240 - 285	3345.8 - 3358	36.43 - 36.5
12.57675 - 12.57725	322 - 335.4	3600 - 4400	(²)
13.36 - 13.41	--	--	--

All out of band emissions appearing in a restricted band as specified in Section 15.205 of the Title 47CFR must not exceed the limits shown in Table per Section 15.209.

FCC Part 15 Subpart C Paragraph 15.209		
Frequency [MHz]	Field Strength [uV/m]	Measured Distance [Meters]
0.009 - 0.490	2400/F (kHz)	300
0.490 - 1.705	24000/F (kHz)	30
1.705 - 30	30	30
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
Above 960	500	3

6.7.2. Test Procedure

ANSI C63.10-2013 Section 6.3 & 6.6 & 11.13

6.7.3. Test Setting

Peak Field Strength Measurements

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW = 3MHz
4. Detector = peak
5. Sweep time = auto couple
6. Trace mode = max hold
7. Trace was allowed to stabilize


Average Field Strength Measurements

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW; If the EUT is configured to transmit with duty cycle $\geq 98\%$, set VBW = 10 Hz.

If the EUT duty cycle is $< 98\%$, set VBW $\geq 1/T$. T is the minimum transmission duration.

4. As an alternative, the instrument may be set to linear detector mode. Ensure that video filtering is applied in linear voltage domain (rather than in a log or dB domain). Some instruments require linear display mode in order to accomplish this. Others have a setting for Average-VBW Type, which can be set to "Voltage" regardless of the display mode
5. Detector = Peak
6. Sweep time = auto
7. Trace mode = max hold
8. Allow max hold to run for at least 50 times (1/duty cycle) traces

6.7.4. Test Setup

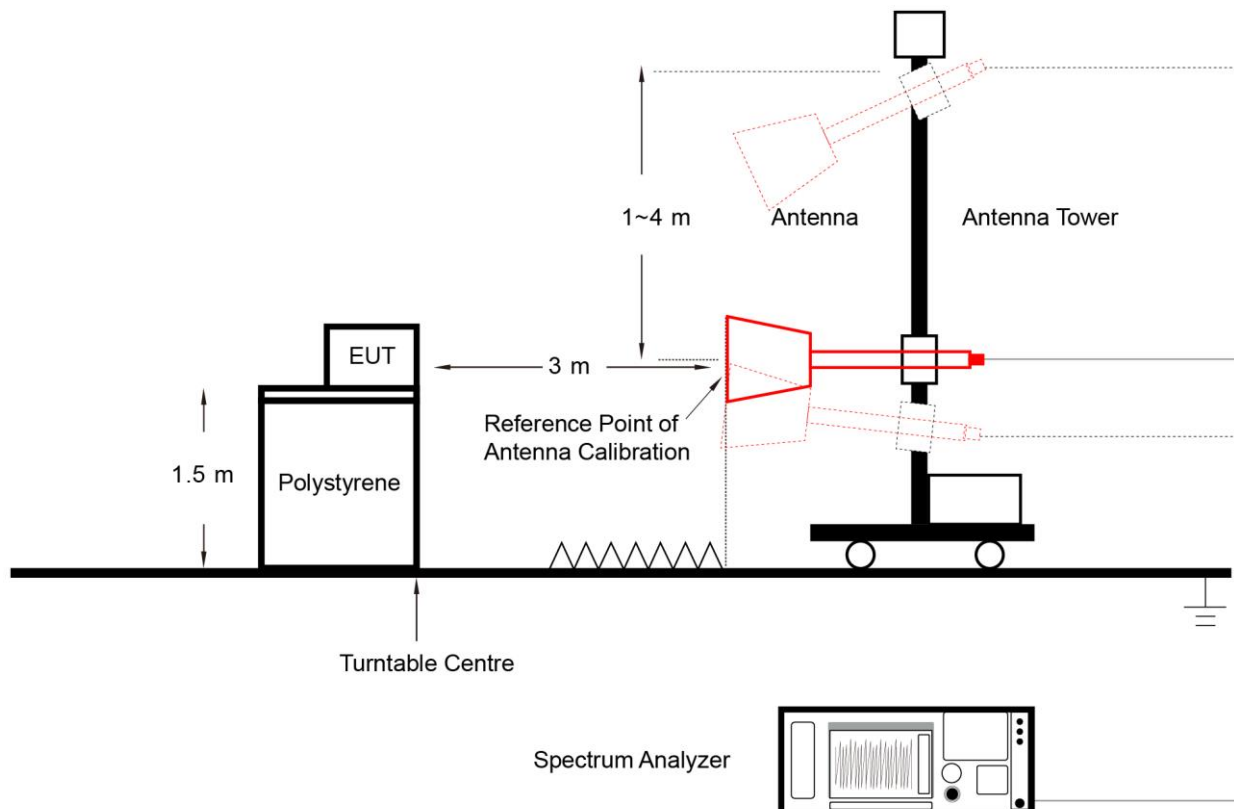

6.7.5. Test Result

Refer to Appendix A.7.

6.8. AC Conducted Emissions Measurement


6.8.1. Test Limit

FCC Part 15 Subpart C Paragraph 15.207 Limits		
Frequency (MHz)	QP (dBuV)	AV (dBuV)
0.15 - 0.50	66 - 56	56 - 46
0.50 - 5.0	56	46
5.0 - 30	60	50

Note 1: The lower limit shall apply at the transition frequencies.

Note 2: The limit decreases linearly with the logarithm of the frequency in the range 0.15MHz to 0.5MHz.

6.8.2. Test Setup

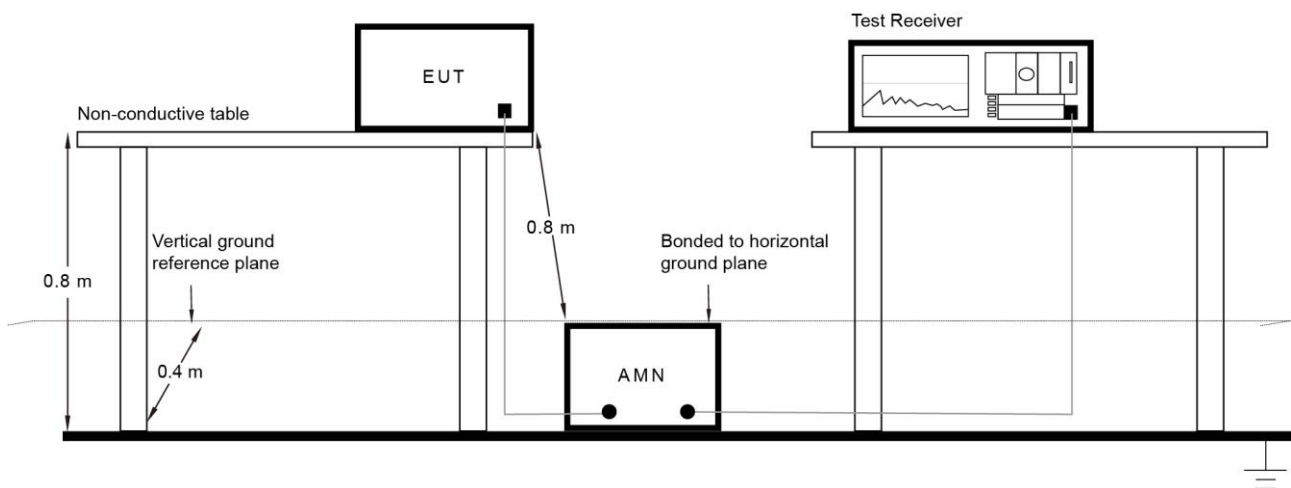

6.8.3. Test Result

Refer to Appendix A.8.

Appendix A - Test Result

A.1 Duty Cycle Test Result

Test Site	WZ-SR5	Test Engineer	Lynn Yang
Test Date	2024-09-19		


Test Mode	Duty Cycle
BLE-1Mbps	91.74%
BLE-2Mbps	81.35%
Duty Cycle (T = Transmission Duration)	




A.2 6dB Bandwidth Test Result

Test Site	WZ-SR5	Test Engineer	Lynn Yang
Test Date	2024-09-19		

Test Mode	Data Rate	Channel No.	Frequency (MHz)	6dB Bandwidth (MHz)	Limit (MHz)
BLE	1Mbps	00	2402	0.6931	≥ 0.5
BLE	1Mbps	19	2440	0.6903	≥ 0.5
BLE	1Mbps	39	2480	0.6822	≥ 0.5
BLE	2Mbps	00	2402	1.147	≥ 0.5
BLE	2Mbps	19	2440	1.160	≥ 0.5
BLE	2Mbps	39	2480	1.148	≥ 0.5

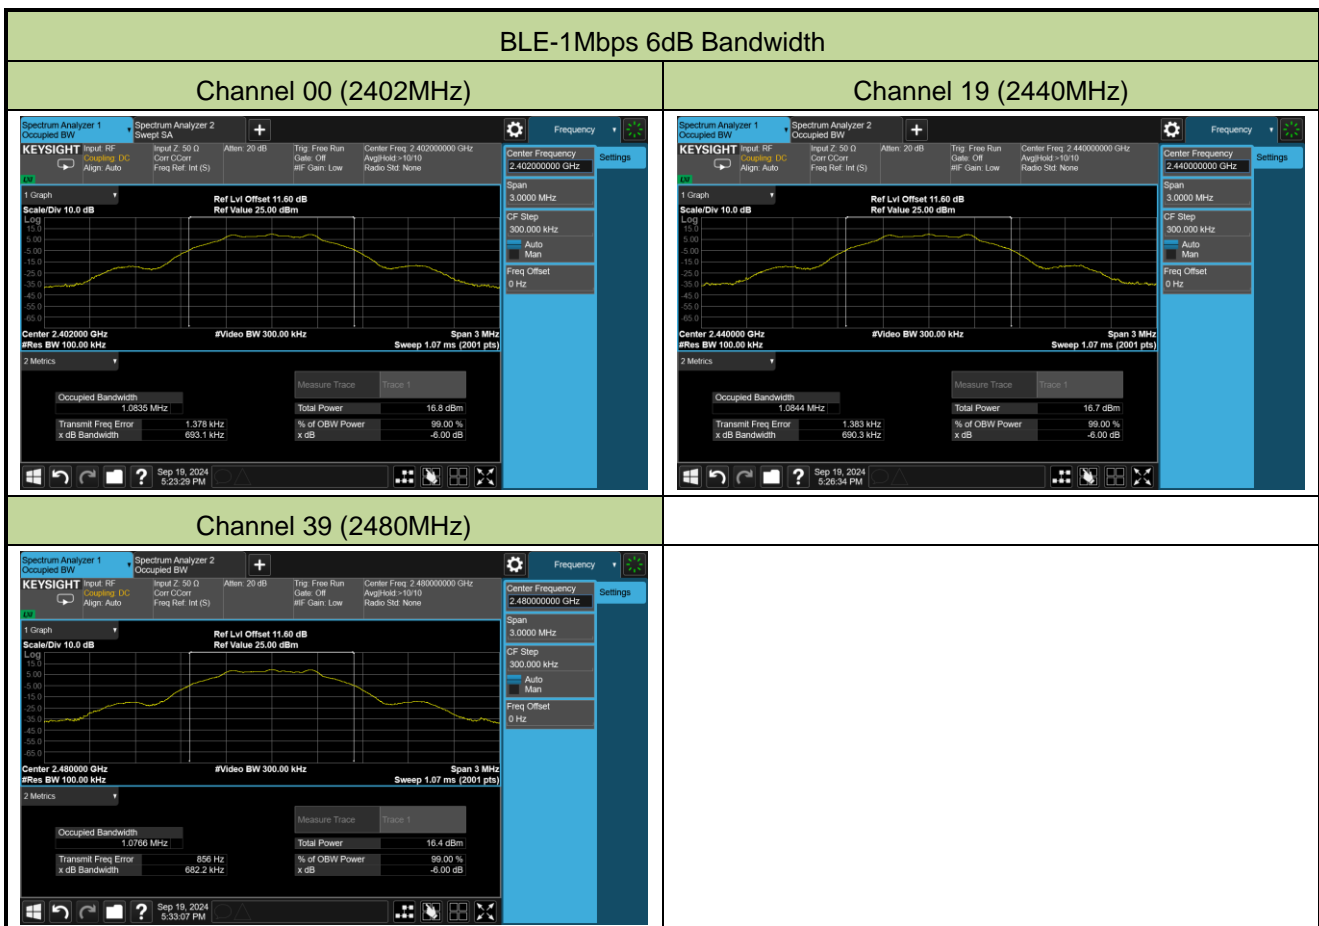

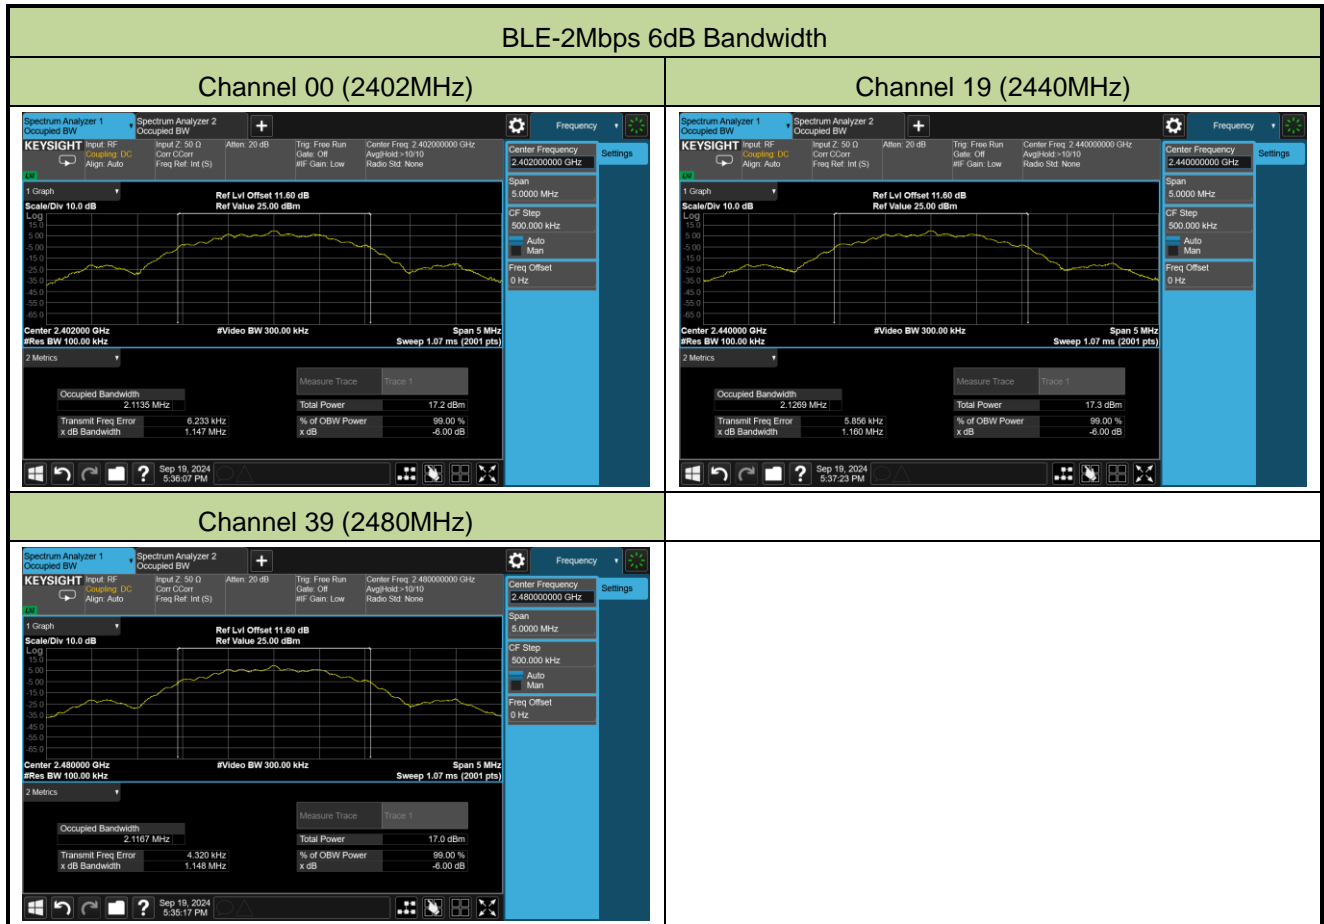

A.3 Output Power Test Result

Test Site	WZ-SR5	Test Engineer	Lynn Yang
Test Date	2024-09-19		

Test Result of Peak Output Power

Test Mode	Data Rate	Channel No.	Frequency (MHz)	Peak Power (dBm)	Limit (dBm)	Result
BLE	1Mbps	00	2402	9.95	≤ 30.00	Pass
BLE	1Mbps	19	2440	9.96	≤ 30.00	Pass
BLE	1Mbps	39	2480	9.73	≤ 30.00	Pass
BLE	2Mbps	00	2402	9.98	≤ 30.00	Pass
BLE	2Mbps	19	2440	9.98	≤ 30.00	Pass
BLE	2Mbps	39	2480	9.74	≤ 30.00	Pass
BLE	S2	00	2402	9.93	≤ 30.00	Pass
BLE	S2	19	2440	9.95	≤ 30.00	Pass
BLE	S2	39	2480	9.72	≤ 30.00	Pass
BLE	S8	00	2402	9.93	≤ 30.00	Pass
BLE	S8	19	2440	9.95	≤ 30.00	Pass
BLE	S8	39	2480	9.71	≤ 30.00	Pass


Test Result of Average Output Power (Reporting Only)

Test Mode	Data Rate	Channel No.	Frequency (MHz)	Average Power (dBm)	Limit (dBm)	Result
BLE	1Mbps	00	2402	9.89	≤ 30.00	Pass
BLE	1Mbps	19	2440	9.91	≤ 30.00	Pass
BLE	1Mbps	39	2480	9.66	≤ 30.00	Pass
BLE	2Mbps	00	2402	9.92	≤ 30.00	Pass
BLE	2Mbps	19	2440	9.92	≤ 30.00	Pass
BLE	2Mbps	39	2480	9.67	≤ 30.00	Pass
BLE	S2	00	2402	9.86	≤ 30.00	Pass
BLE	S2	19	2440	9.90	≤ 30.00	Pass
BLE	S2	39	2480	9.64	≤ 30.00	Pass
BLE	S8	00	2402	9.88	≤ 30.00	Pass
BLE	S8	19	2440	9.90	≤ 30.00	Pass
BLE	S8	39	2480	9.62	≤ 30.00	Pass

A.4 Power Spectral Density Test Result


Test Site	WZ-SR5	Test Engineer	Lynn Yang
Test Date	2024-09-19		

Test Mode	Data Rate	Channel No.	Frequency (MHz)	PSD Result (dBm / 3kHz)	Limit (dBm / 3kHz)	Result
BLE	1Mbps	00	2402	-6.06	≤ 8.00	Pass
BLE	1Mbps	19	2440	-5.87	≤ 8.00	Pass
BLE	1Mbps	39	2480	-6.11	≤ 8.00	Pass
BLE	2Mbps	00	2402	-7.50	≤ 8.00	Pass
BLE	2Mbps	19	2440	-7.49	≤ 8.00	Pass
BLE	2Mbps	39	2480	-7.75	≤ 8.00	Pass

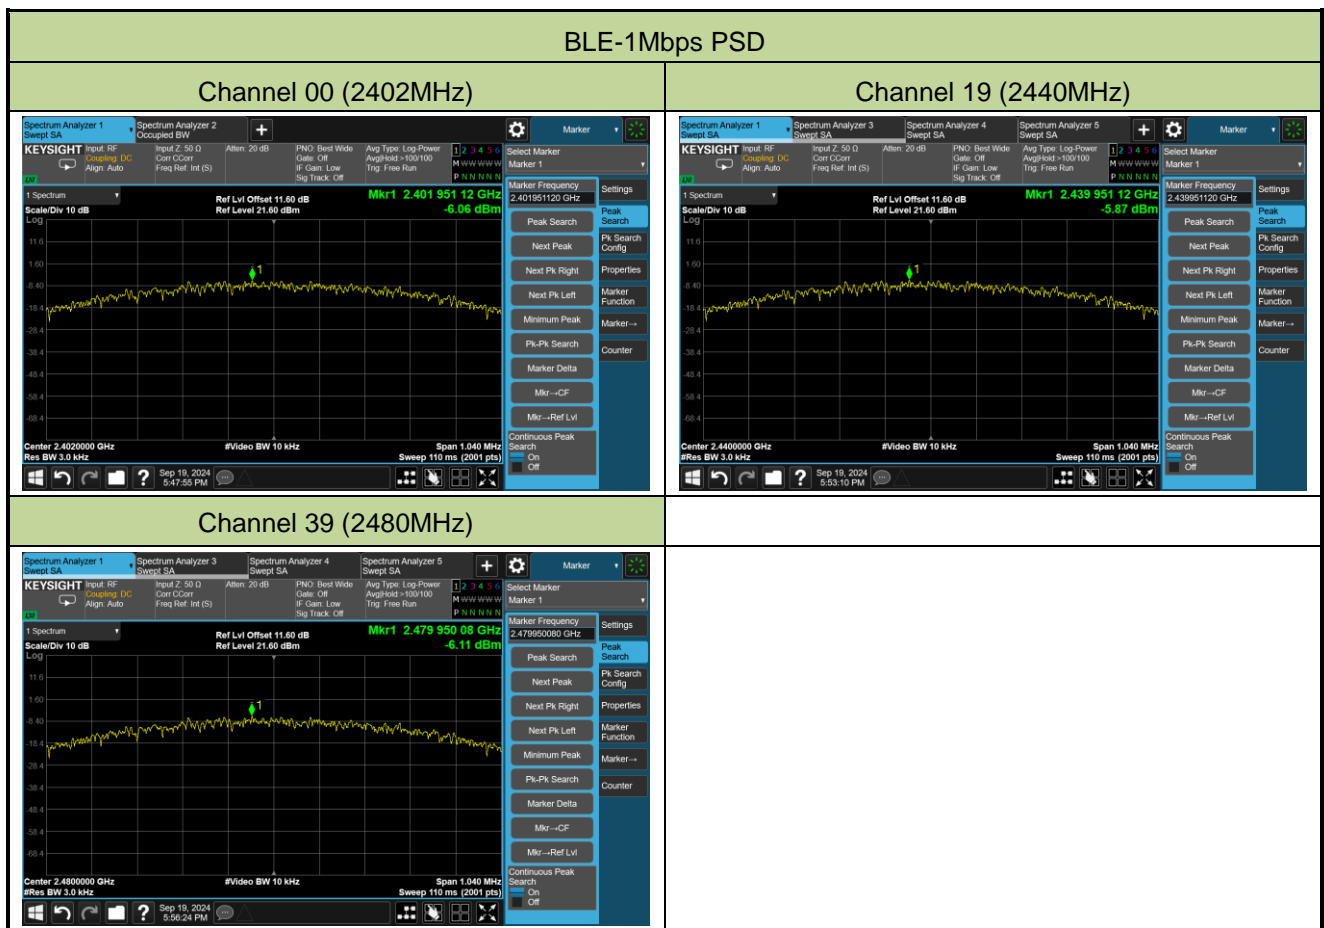

BLE-2Mbps PSD


Channel 00 (2402MHz)

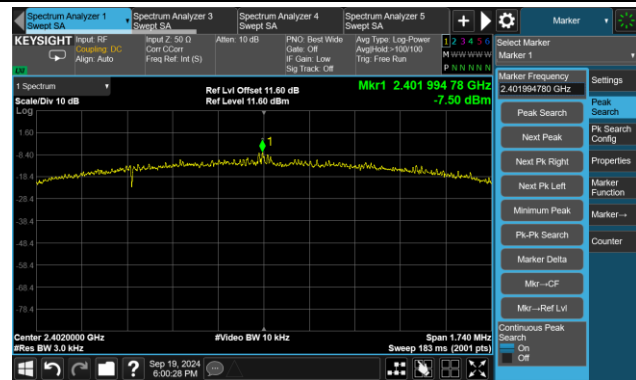

Channel 19 (2440MHz)




Channel 39 (2480MHz)

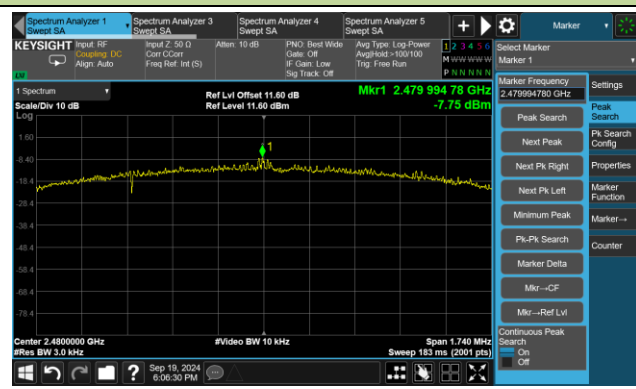

A.5 Conducted Band Edge and Out-of-Band Emissions Test Result


Test Site	WZ-SR5	Test Engineer	Lynn Yang
Test Date	2024-09-19		

Test Mode	Data Rate (Mbps)	Channel No.	Frequency (MHz)	Limit	Result
BLE	1	00	2402	20	Pass
BLE	1	19	2440	20	Pass
BLE	1	39	2480	20	Pass
BLE	2	00	2402	20	Pass
BLE	2	19	2440	20	Pass
BLE	2	39	2480	20	Pass

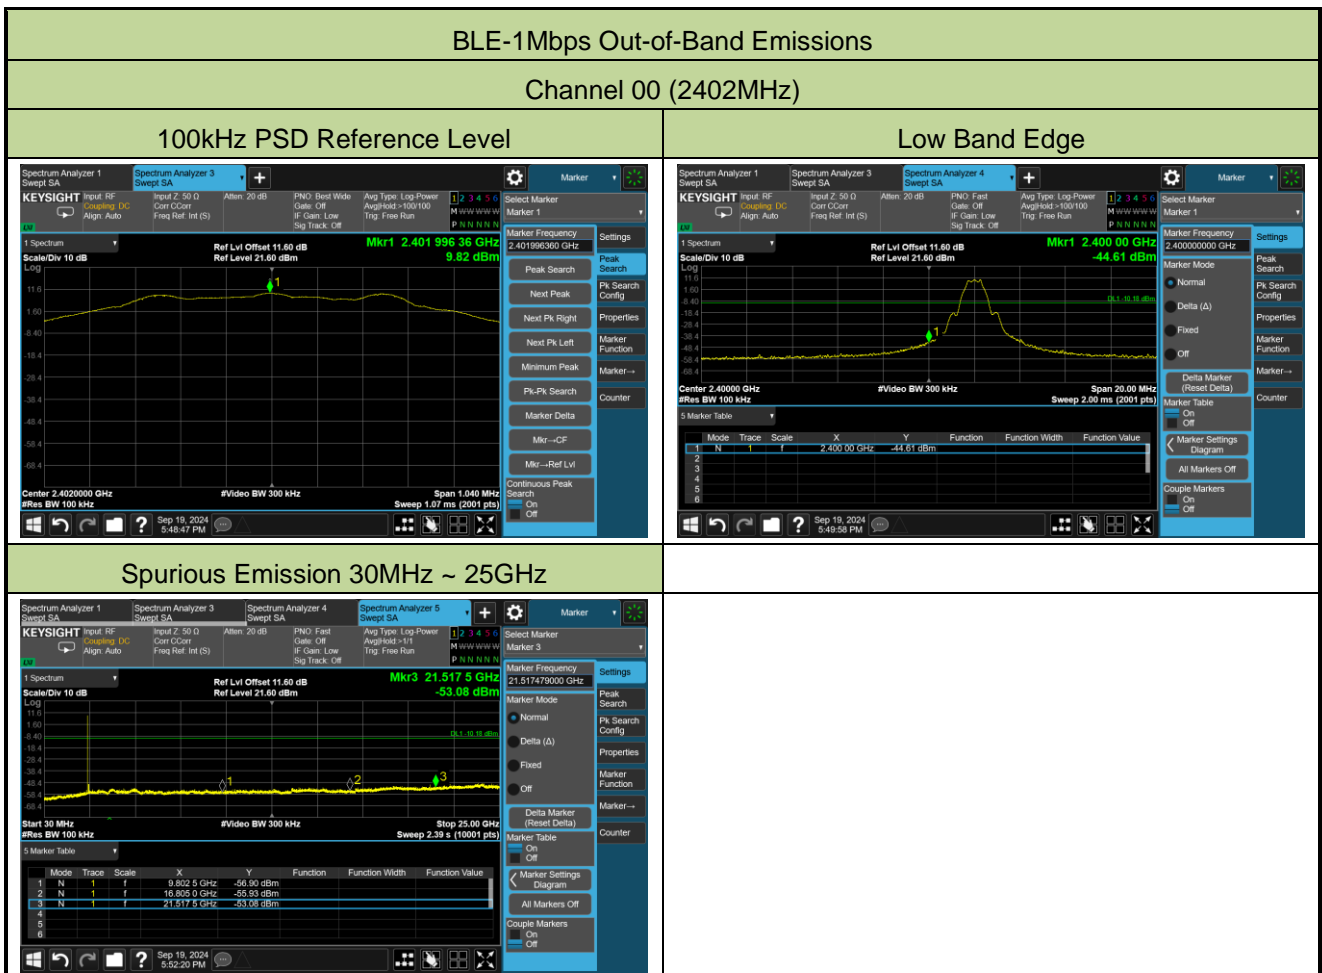


Channel 19 (2440MHz)

100kHz PSD Reference Level

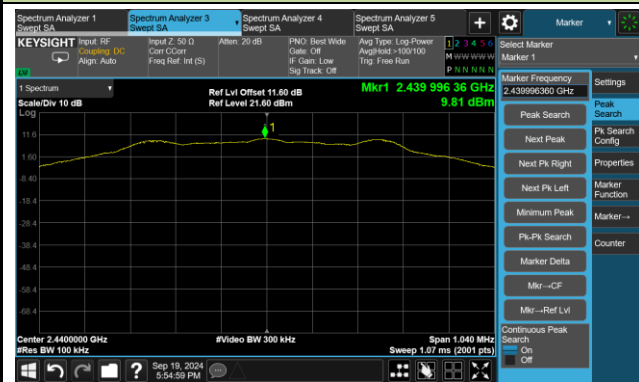


Spurious Emission 30MHz ~ 25GHz

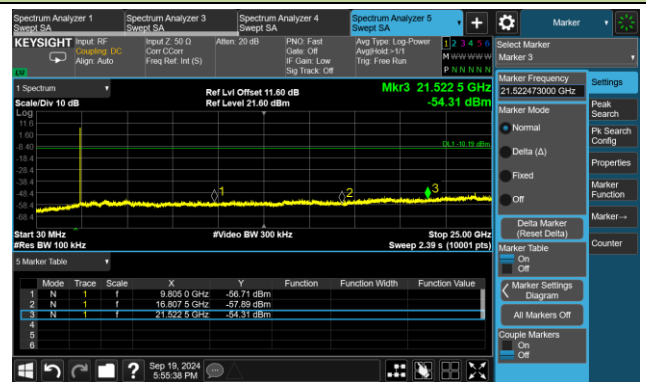


Channel 39 (2480MHz)


100kHz PSD Reference Level

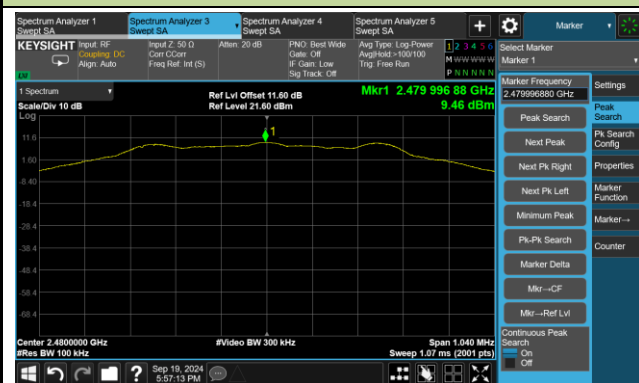

High Band Edge

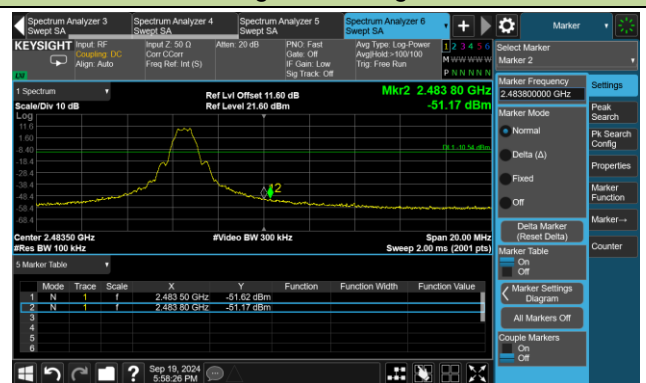


Spurious Emission 30MHz ~ 25GHz

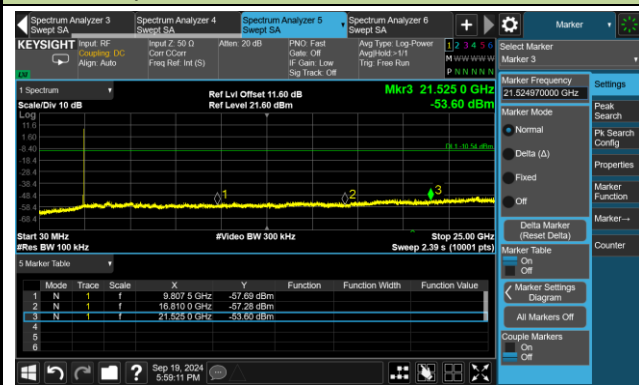


BLE-2Mbps Out-of-Band Emissions

Channel 00 (2402MHz)


100kHz PSD Reference Level

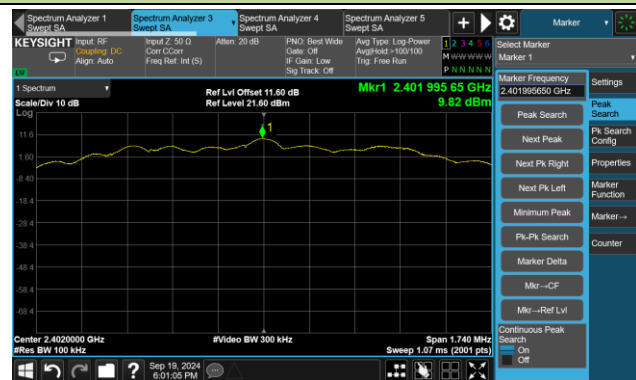

Low Band Edge

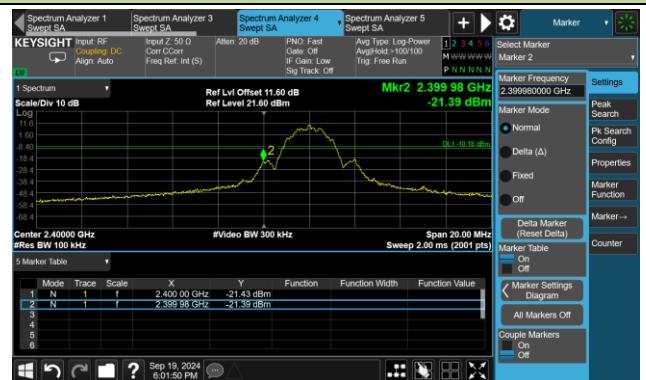


Spurious Emission 30MHz ~ 25GHz

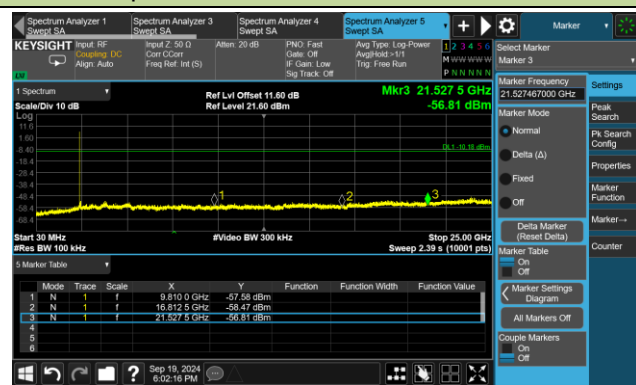


Channel 19 (2440MHz)

100kHz PSD Reference Level

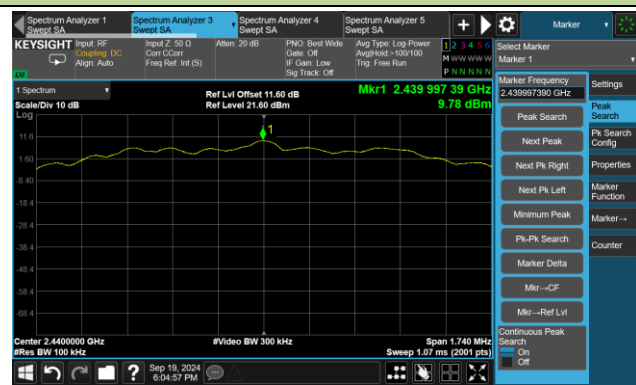


Spurious Emission 30MHz ~ 25GHz

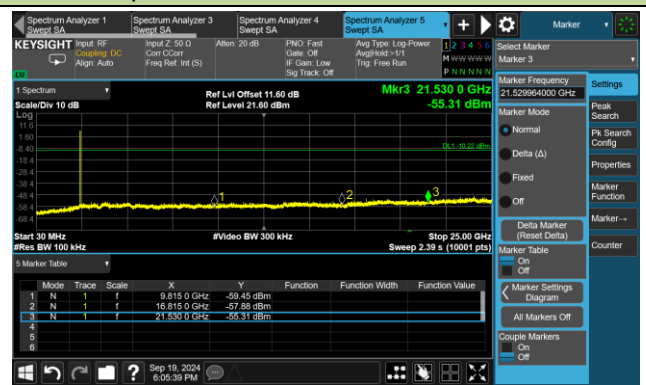


Channel 39 (2480MHz)


100kHz PSD Reference Level

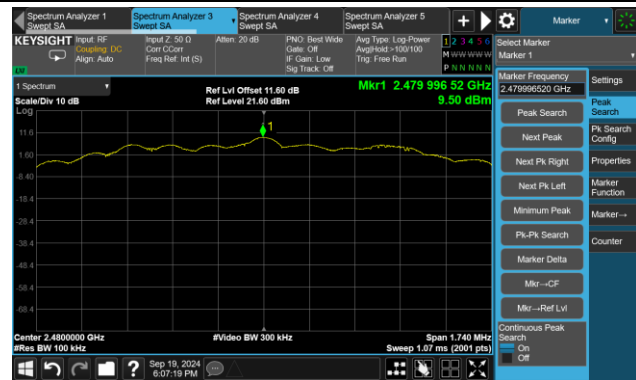

High Band Edge

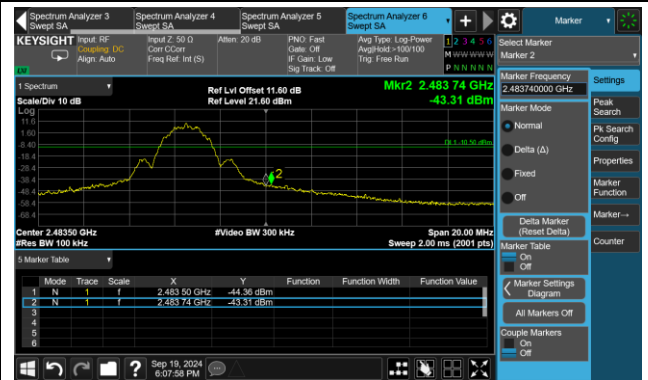

Spurious Emission 30MHz ~ 25GHz

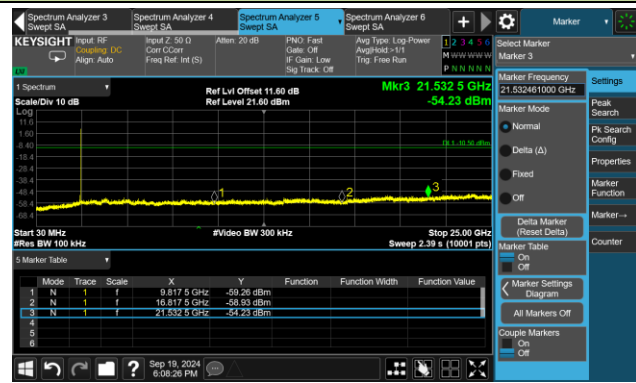

A.6 Radiated Spurious Emission Test Result

Test Site	WZ-AC1	Test Engineer	Ajin Fan
Test Date	2024-09-23	Test Mode	BLE-1Mbps
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Test Channel	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
00	3825.4	37.9	1.1	39.0	74.0	-35.0	Peak	Horizontal
	4847.1	36.6	3.7	40.3	74.0	-33.7	Peak	Horizontal
	11220.4	35.9	14.2	50.1	74.0	-23.9	Peak	Horizontal
	4046.4	36.8	1.7	38.5	74.0	-35.5	Peak	Vertical
	4826.7	36.2	3.6	39.8	74.0	-34.2	Peak	Vertical
	11631.8	37.0	13.8	50.8	74.0	-23.2	Peak	Vertical
19	3852.6	38.6	1.0	39.6	74.0	-34.4	Peak	Horizontal
	4789.3	36.3	3.4	39.7	74.0	-34.3	Peak	Horizontal
	11477.1	36.0	14.3	50.3	74.0	-23.7	Peak	Horizontal
	3895.1	37.3	1.2	38.5	74.0	-35.5	Peak	Vertical
	4845.4	36.5	3.7	40.2	74.0	-33.8	Peak	Vertical
	11679.4	37.3	13.6	50.9	74.0	-23.1	Peak	Vertical
39	3941.0	38.0	1.2	39.2	74.0	-34.8	Peak	Horizontal
	4889.6	36.0	3.9	39.9	74.0	-34.1	Peak	Horizontal
	11417.6	36.2	14.3	50.5	74.0	-23.5	Peak	Horizontal
	3935.9	38.3	1.1	39.4	74.0	-34.6	Peak	Vertical
	4845.4	36.9	3.7	40.6	74.0	-33.4	Peak	Vertical
	11681.1	36.6	13.6	50.2	74.0	-23.8	Peak	Vertical

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC1	Test Engineer	Ajin Fan
Test Date	2024-09-23	Test Mode	BLE-2Mbps
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		


Test Channel	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
00	4136.5	37.4	1.8	39.2	74.0	-34.8	Peak	Horizontal
	4743.4	37.4	3.5	40.9	74.0	-33.1	Peak	Horizontal
	11847.7	36.7	13.2	49.9	74.0	-24.1	Peak	Horizontal
	3966.5	37.3	1.4	38.7	74.0	-35.3	Peak	Vertical
	4723.0	37.4	3.3	40.7	74.0	-33.3	Peak	Vertical
	11477.1	36.7	14.3	51.0	74.0	-23.0	Peak	Vertical
19	4003.9	37.5	1.5	39.0	74.0	-35.0	Peak	Horizontal
	4770.6	37.0	3.5	40.5	74.0	-33.5	Peak	Horizontal
	11698.1	37.6	13.6	51.2	74.0	-22.8	Peak	Horizontal
	3794.8	37.7	1.2	38.9	74.0	-35.1	Peak	Vertical
	4726.4	37.3	3.4	40.7	74.0	-33.3	Peak	Vertical
	11001.1	27.5	15.0	42.5	54.0	-11.5	Average	Vertical
	11001.1	37.4	15.0	52.4	74.0	-21.6	Peak	Vertical
39	3907.0	37.7	1.3	39.0	74.0	-35.0	Peak	Horizontal
	4901.5	36.2	4.0	40.2	74.0	-33.8	Peak	Horizontal
	11198.3	36.1	14.3	50.4	74.0	-23.6	Peak	Horizontal
	4044.7	37.9	1.7	39.6	74.0	-34.4	Peak	Vertical
	4796.1	36.7	3.6	40.3	74.0	-33.7	Peak	Vertical
	11371.7	36.5	14.3	50.8	74.0	-23.2	Peak	Vertical

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

The Result of Radiated Emission below 1GHz:

Site	WZ-AC1	Test Date	2024-09-25
Test Engineer	Ajin Fan	Temp./Humidity	26.4°C /55.3%
Factor	VULB 9168_25-1000MHz	Polarity	Horizontal
EUT	BLE module	Test Voltage	By USB
Test Mode	Transmit by BLE 1Mbps at 2402MHz		

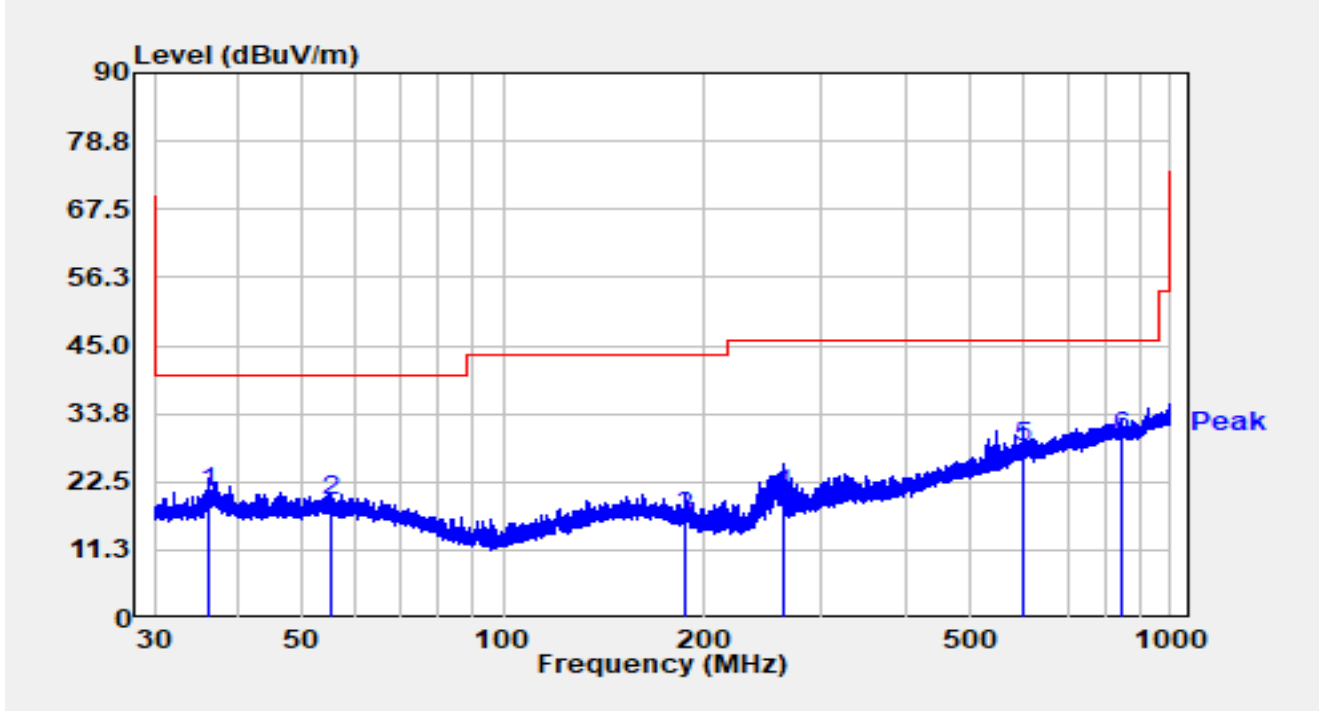


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		36.089	3.10	17.69	20.79	-19.21	40.00	QP
2		55.221	1.01	18.52	19.53	-20.47	40.00	QP
3		187.951	0.40	16.19	16.59	-26.91	43.50	QP
4		262.527	3.10	17.40	20.50	-25.50	46.00	QP
5		599.111	2.10	25.96	28.06	-17.94	46.00	QP
6	*	843.016	0.20	29.62	29.82	-16.18	46.00	QP

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m)+ Cable Loss (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).
4. The amplitude of radiated emissions (frequency range from 9kHz to 30MHz and 18GHz to 25GHz) is that proximity to ambient noise, which also are attenuated more than 20 dB below the permissible value. Therefore, the data is not presented in the report.

Site	WZ-AC1	Test Date	2024-09-25
Test Engineer	Ajin Fan	Temp./Humidity	26.4°C /55.3%
Factor	VULB 9168_25-1000MHz	Polarity	Vertical
EUT	BLE module	Test Voltage	By USB
Test Mode	Transmit by BLE 1Mbps at 2402MHz		

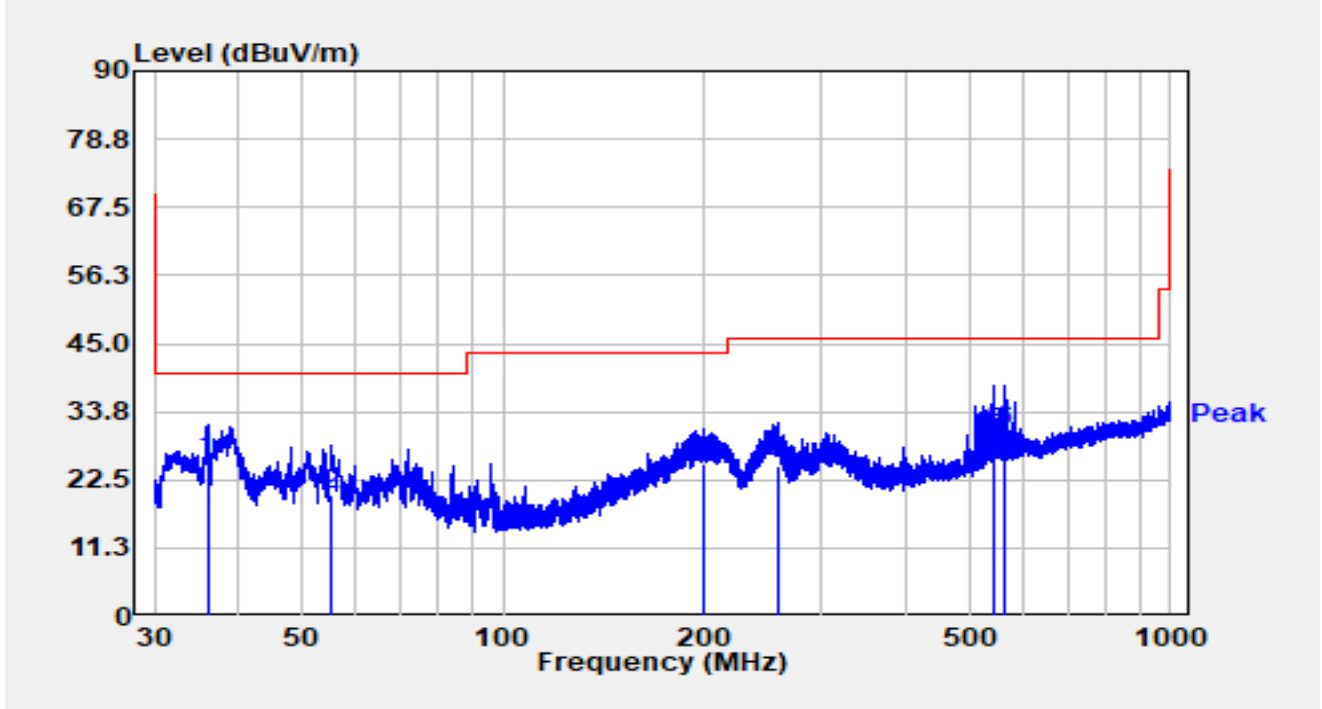


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	36.013	8.10	17.68	25.78	-14.22	40.00	QP
2		55.201	1.60	18.52	20.12	-19.88	40.00	QP
3		200.056	10.00	15.22	25.22	-18.28	43.50	QP
4		257.693	7.60	17.28	24.88	-21.12	46.00	QP
5		544.800	5.90	24.48	30.38	-15.62	46.00	QP
6		564.045	5.80	24.69	30.49	-15.51	46.00	QP

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m)+ Cable Loss (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).
4. The amplitude of radiated emissions (frequency range from 9kHz to 30MHz and 18GHz to 25GHz) is that proximity to ambient noise, which also are attenuated more than 20 dB below the permissible value. Therefore, the data is not presented in the report.

A.7 Radiated Restricted Band Edge Test Result

Site	WZ-AC1	Test Date	2024-09-21
Test Engineer	Ajin Fan	Temp./Humidity	26.4°C /55.3%
Factor	BBHA 9120D_1167_1-18GHz	Polarity	Horizontal
EUT	BLE module	Test Voltage	By USB
Test Mode	Transmit by BLE 1Mbps at 2402MHz		

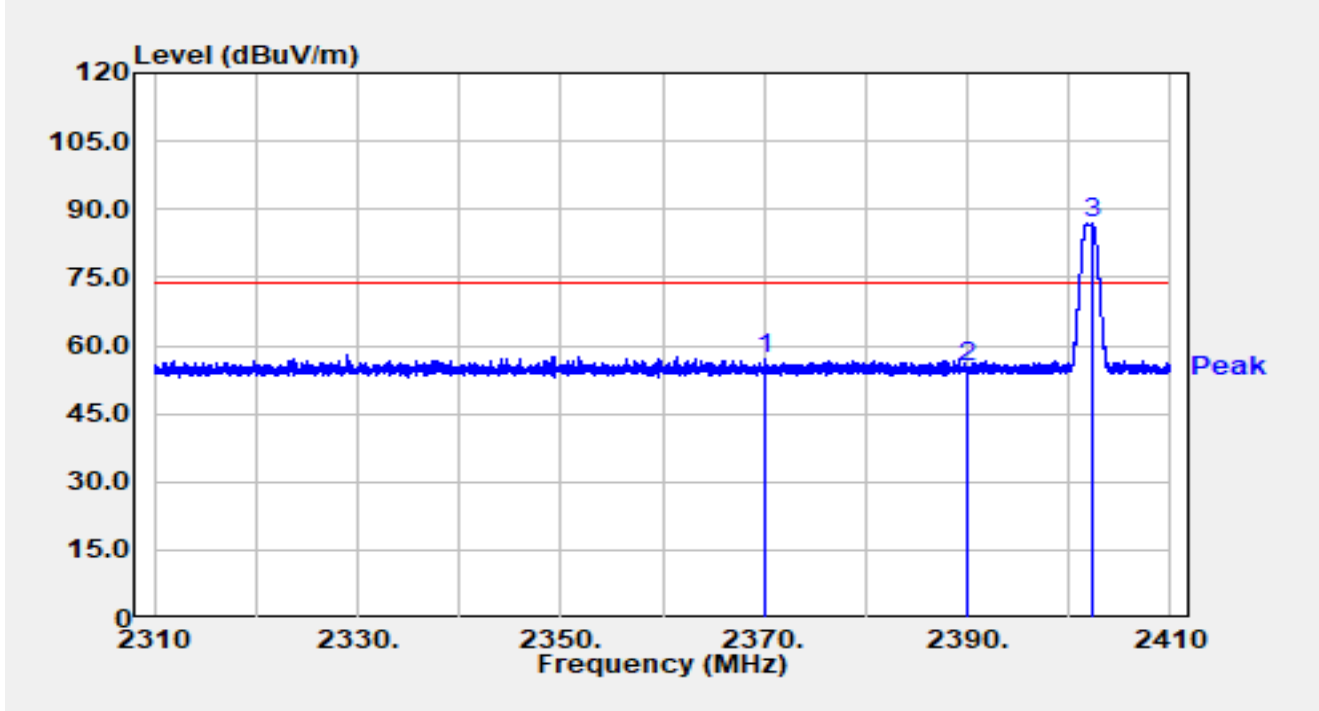


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	2370.010	25.27	31.96	57.23	-16.77	74.00	Peak
2		2390.000	23.24	31.96	55.20	-18.80	74.00	Peak
3		2402.270	54.95	31.90	86.85	N/A	N/A	Peak

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).
4. The point (3) is BLE fundamental frequency that is not evaluated in this item.

Site	WZ-AC1	Test Date	2024-09-21
Test Engineer	Ajin Fan	Temp./Humidity	26.4°C /55.3%
Factor	BBHA 9120D_1167_1-18GHz	Polarity	Horizontal
EUT	BLE module	Test Voltage	By USB
Test Mode	Transmit by BLE 1Mbps at 2402MHz		

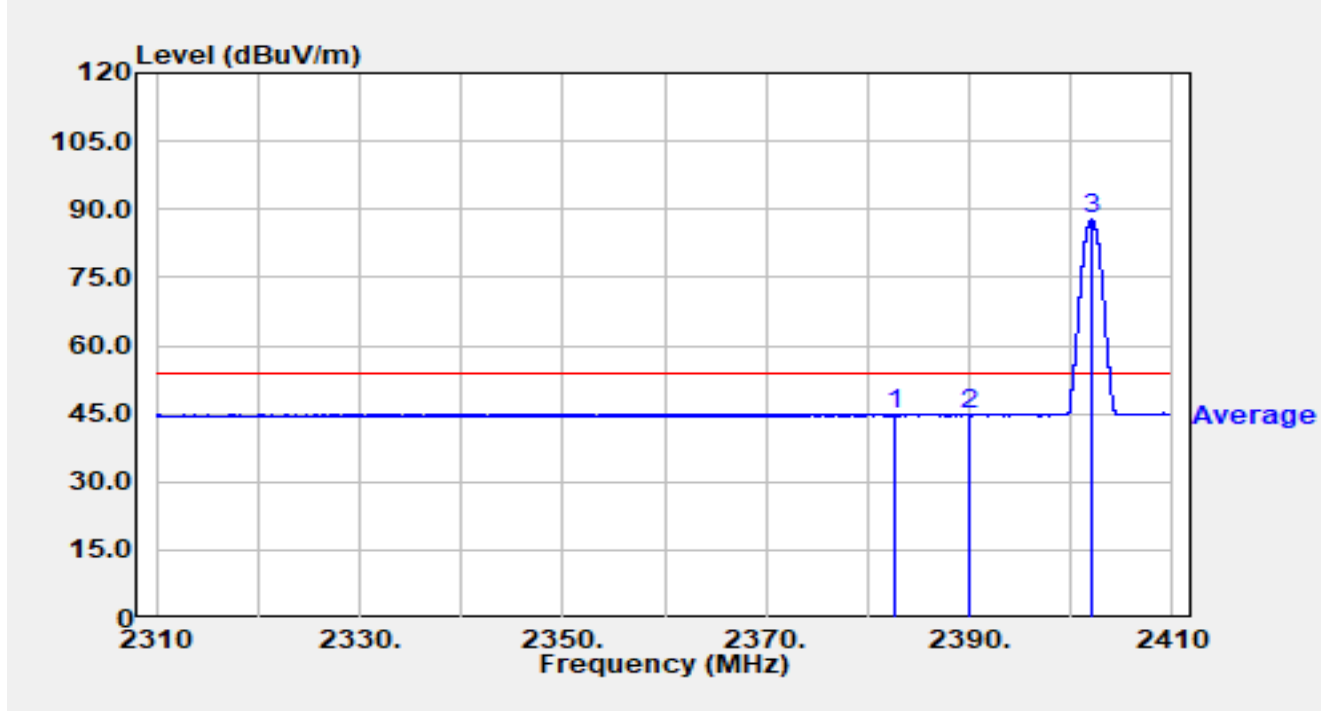


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	2382.700	12.97	31.97	44.95	-9.05	54.00	Average
2		2390.000	12.68	31.96	44.63	-9.37	54.00	Average
3		2402.060	55.91	31.90	87.81	N/A	N/A	Average

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).
4. The point (3) is BLE fundamental frequency that is not evaluated in this item.

Site	WZ-AC1	Test Date	2024-09-21
Test Engineer	Ajin Fan	Temp./Humidity	26.4°C /55.3%
Factor	BBHA 9120D_1167_1-18GHz	Polarity	Vertical
EUT	BLE module	Test Voltage	By USB
Test Mode	Transmit by BLE 1Mbps at 2402MHz		

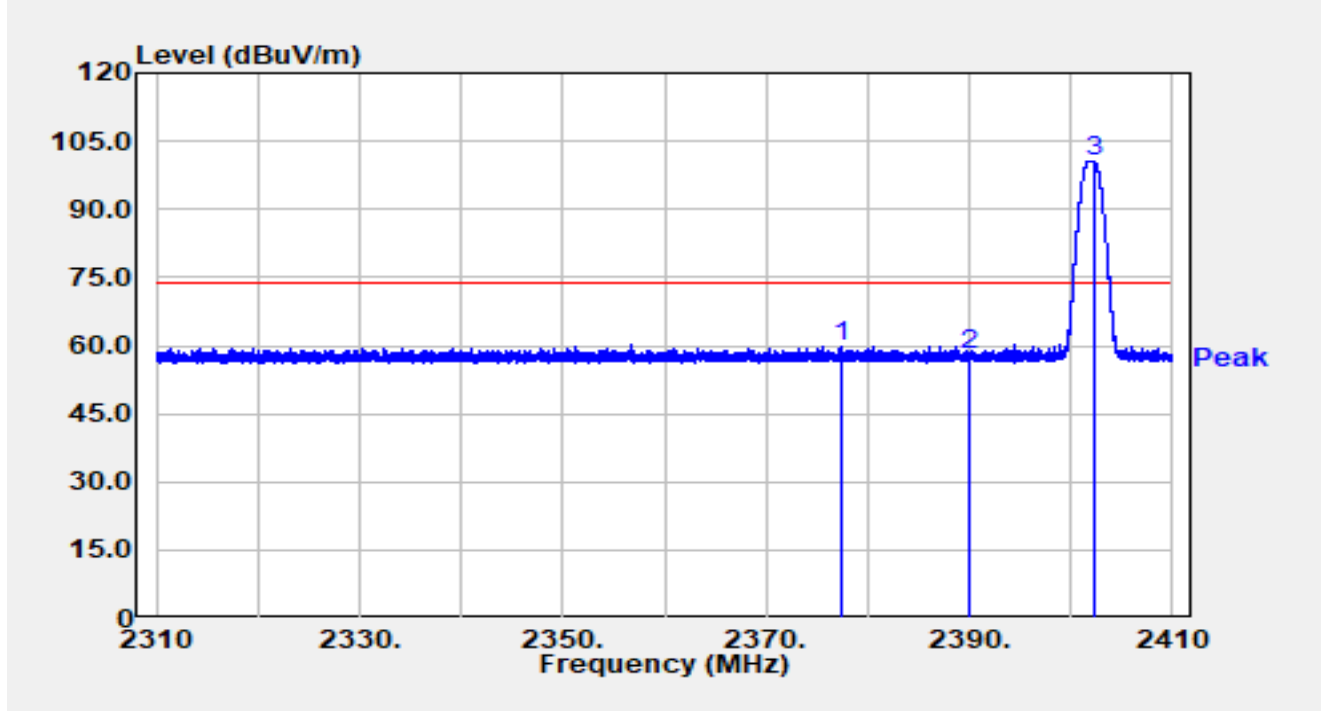


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	2377.540	27.87	31.97	59.84	-14.16	74.00	Peak
2		2390.000	26.19	31.96	58.14	-15.86	74.00	Peak
3		2402.260	68.65	31.90	100.55	N/A	N/A	Peak

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).
4. The point (3) is BLE fundamental frequency that is not evaluated in this item.

Site	WZ-AC1	Test Date	2024-09-21
Test Engineer	Ajin Fan	Temp./Humidity	26.4°C /55.3%
Factor	BBHA 9120D_1167_1-18GHz	Polarity	Vertical
EUT	BLE module	Test Voltage	By USB
Test Mode	Transmit by BLE 1Mbps at 2402MHz		

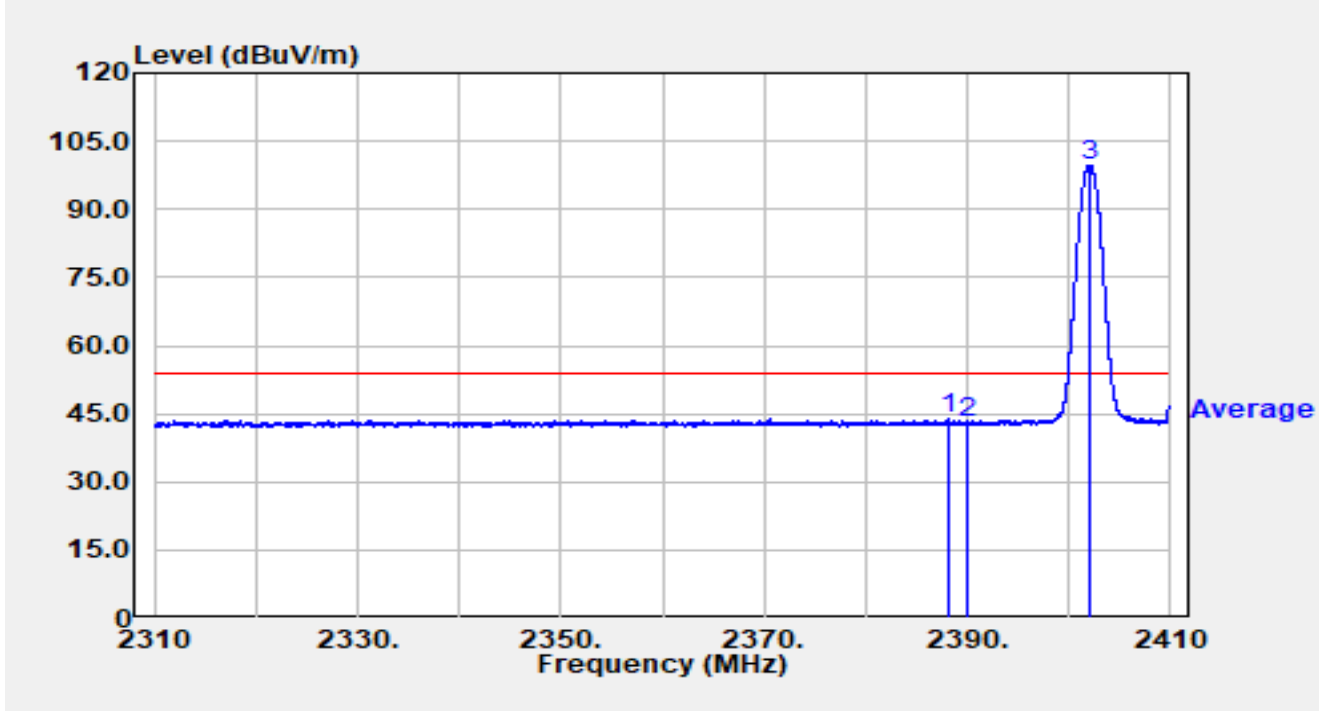


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	2388.120	11.79	31.96	43.75	-10.25	54.00	Average
2		2390.000	10.89	31.96	42.84	-11.16	54.00	Average
3		2402.050	67.92	31.90	99.82	N/A	N/A	Average

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).
4. The point (3) is BLE fundamental frequency that is not evaluated in this item.

Site	WZ-AC1	Test Date	2024-09-21
Test Engineer	Ajin Fan	Temp./Humidity	26.4°C /55.3%
Factor	BBHA 9120D_1167_1-18GHz	Polarity	Horizontal
EUT	BLE module	Test Voltage	By USB
Test Mode	Transmit by BLE 1Mbps at 2480MHz		

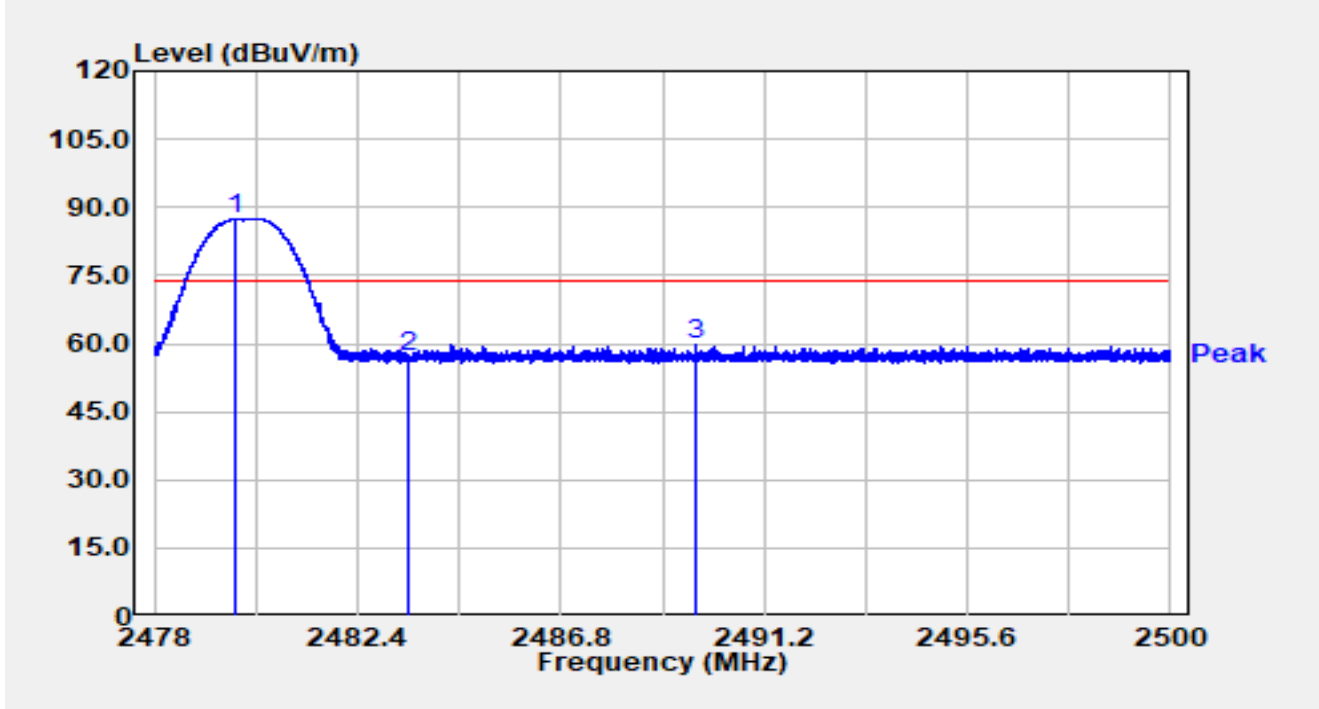


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		2479.767	55.69	31.80	87.50	N/A	N/A	Peak
2		2483.500	25.06	31.81	56.87	-17.13	74.00	Peak
3	*	2489.706	28.06	31.81	59.87	-14.13	74.00	Peak

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).
4. The point (1) is BLE fundamental frequency that is not evaluated in this item.

Site	WZ-AC1	Test Date	2024-09-21
Test Engineer	Ajin Fan	Temp./Humidity	26.4°C /55.3%
Factor	BBHA 9120D_1167_1-18GHz	Polarity	Horizontal
EUT	BLE module	Test Voltage	By USB
Test Mode	Transmit by BLE 1Mbps at 2480MHz		

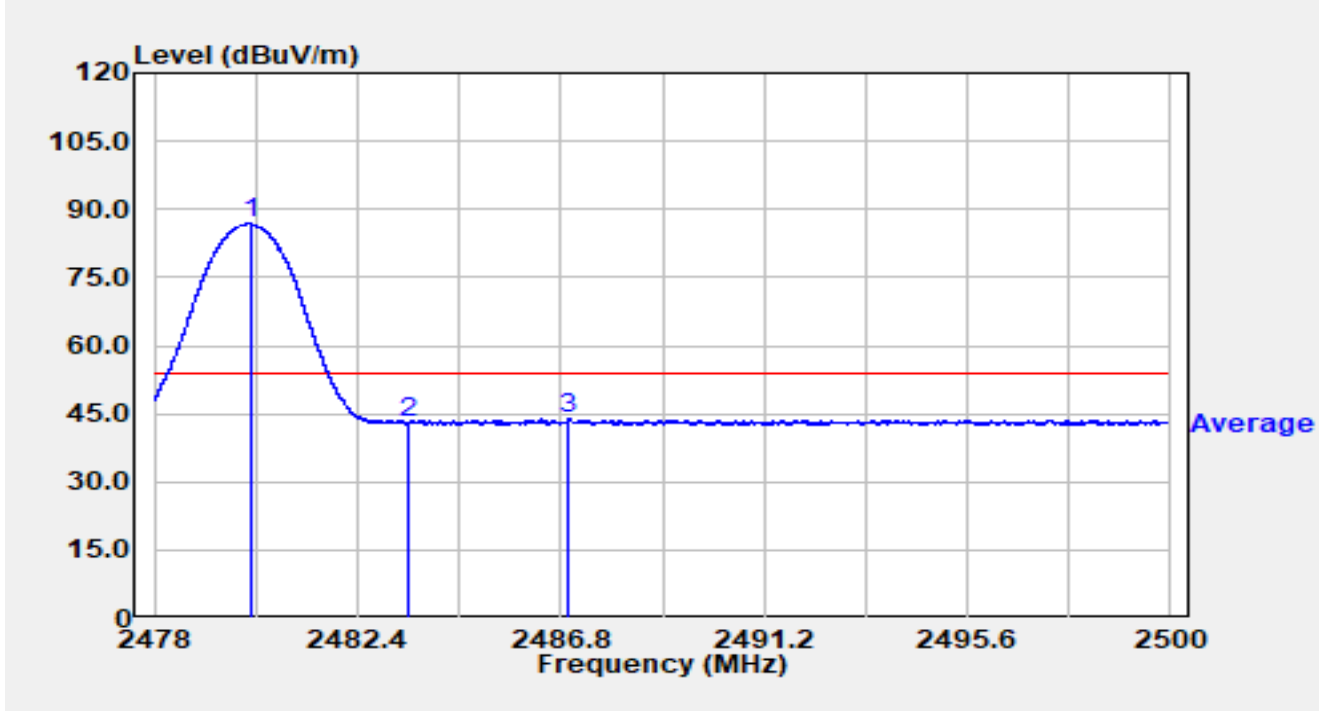


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		2480.070	55.02	31.80	86.82	N/A	N/A	Average
2		2483.500	11.08	31.81	42.89	-11.11	54.00	Average
3	*	2486.983	11.95	31.81	43.76	-10.24	54.00	Average

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).
4. The point (1) is BLE fundamental frequency that is not evaluated in this item.

Site	WZ-AC1	Test Date	2024-09-21
Test Engineer	Ajin Fan	Temp./Humidity	26.4°C /55.3%
Factor	BBHA 9120D_1167_1-18GHz	Polarity	Vertical
EUT	BLE module	Test Voltage	By USB
Test Mode	Transmit by BLE 1Mbps at 2480MHz		

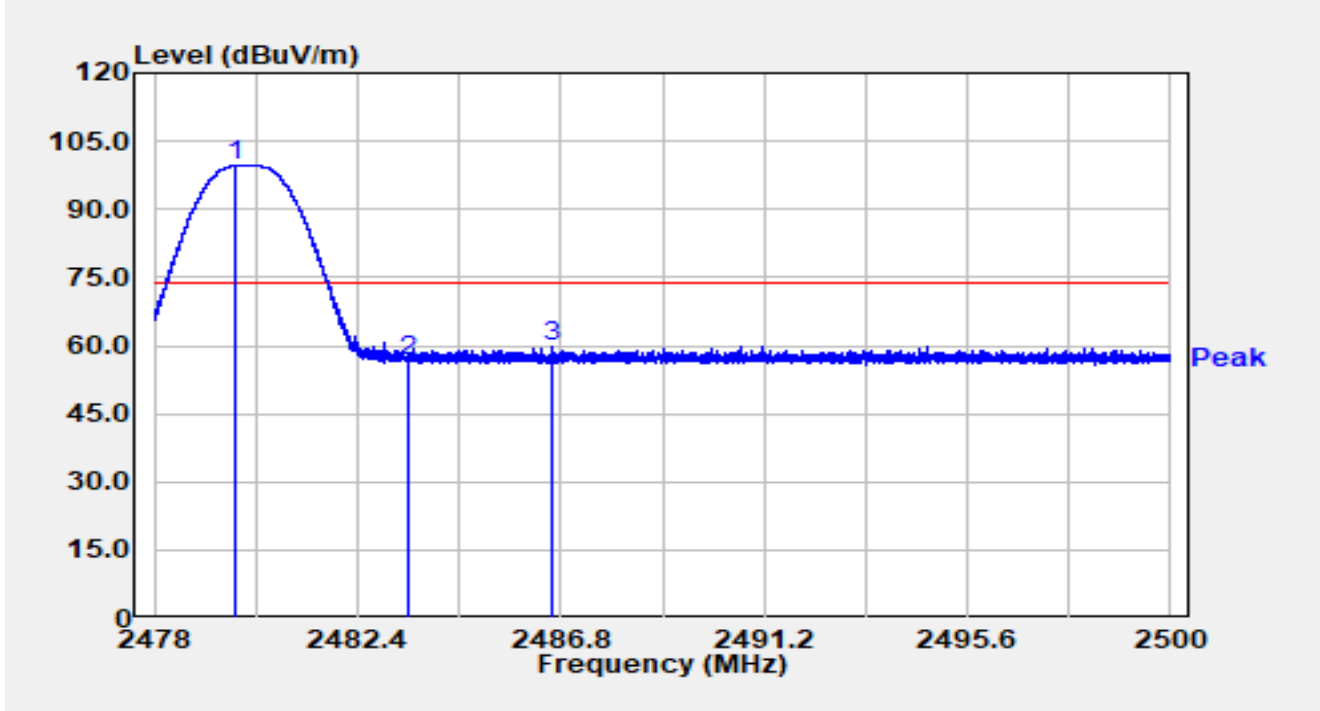


No	Mark	Frequency (MHz)	Reading (dB μ V)	C.F (dB/m)	Measurement (dB μ V/m)	Margin (dB)	Limit (dB μ V/m)	Detector
1		2479.740	67.76	31.80	99.56	N/A	N/A	Peak
2		2483.500	25.00	31.81	56.80	-17.20	74.00	Peak
3	*	2486.589	27.98	31.81	59.78	-14.22	74.00	Peak

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement(dB μ V/m) = Reading(dB μ V) + C.F (dB/m).
4. The point (1) is BLE fundamental frequency that is not evaluated in this item.

Site	WZ-AC1	Test Date	2024-09-21
Test Engineer	Ajin Fan	Temp./Humidity	26.4°C /55.3%
Factor	BBHA 9120D_1167_1-18GHz	Polarity	Vertical
EUT	BLE module	Test Voltage	By USB
Test Mode	Transmit by BLE 1Mbps at 2480MHz		

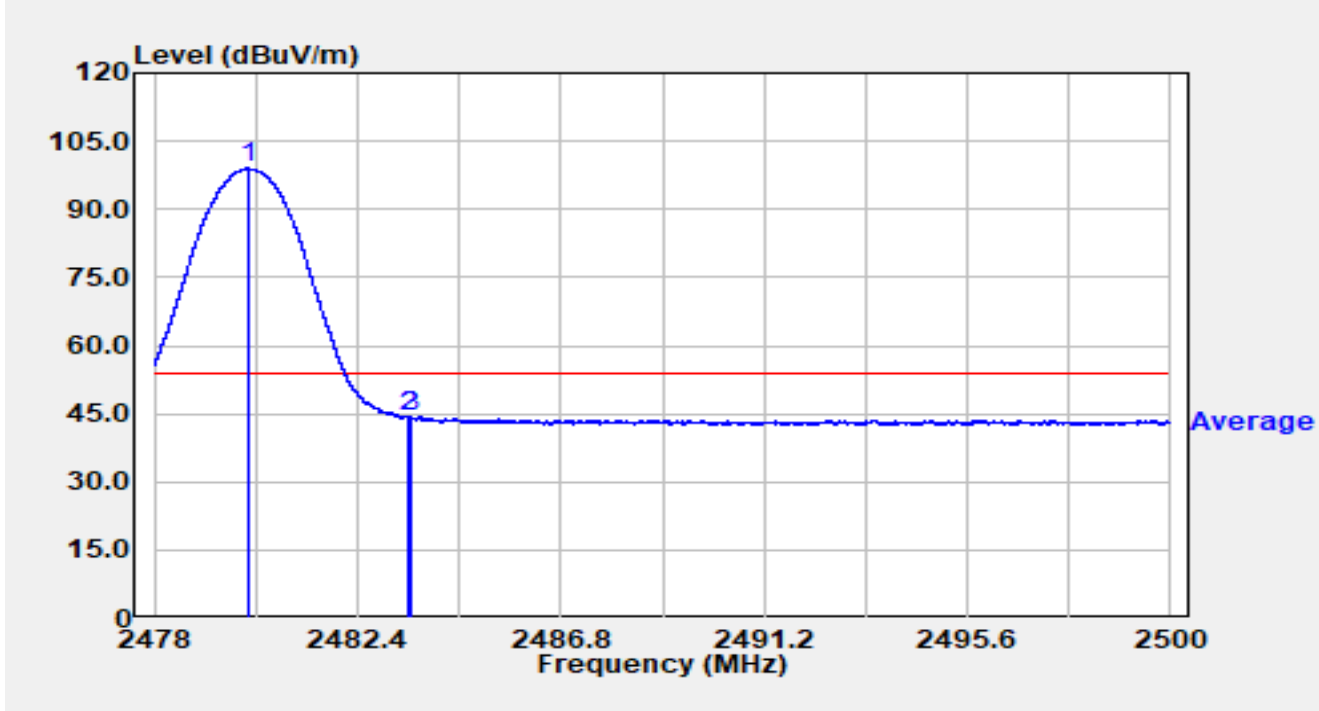


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		2480.024	67.18	31.80	98.99	N/A	N/A	Average
2		2483.500	12.42	31.81	44.23	-9.77	54.00	Average
3	*	2483.542	12.72	31.81	44.53	-9.47	54.00	Average

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).
4. The point (1) is BLE fundamental frequency that is not evaluated in this item.

Site	WZ-AC1	Test Date	2024-09-21
Test Engineer	Ajin Fan	Temp./Humidity	26.4°C /55.3%
Factor	BBHA 9120D_1167_1-18GHz	Polarity	Horizontal
EUT	BLE module	Test Voltage	By USB
Test Mode	Transmit by BLE 2Mbps at 2402MHz		

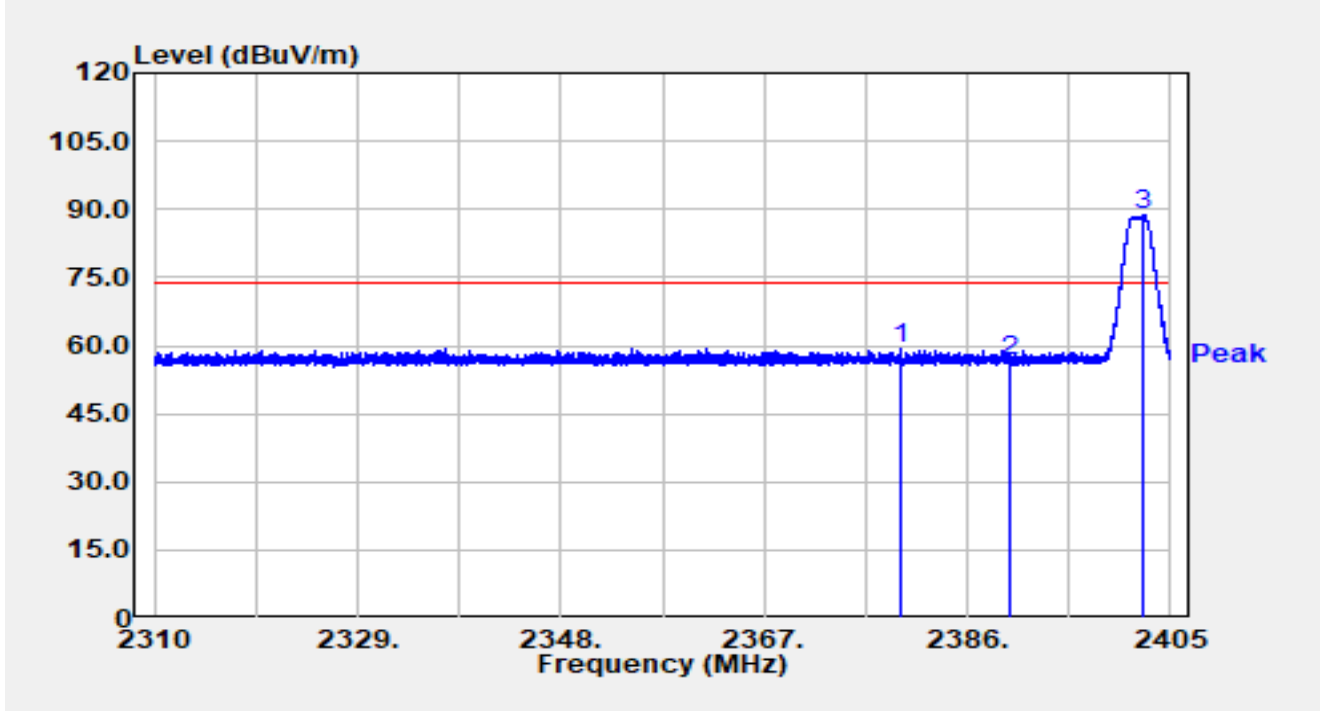


No	Mark	Frequency (MHz)	Reading (dB μ V)	C.F (dB/m)	Measurement (dB μ V/m)	Margin (dB)	Limit (dB μ V/m)	Detector
1	*	2379.768	27.23	31.97	59.20	-14.80	74.00	Peak
2		2390.000	24.47	31.96	56.42	-17.58	74.00	Peak
3		2402.463	56.70	31.90	88.60	N/A	N/A	Peak

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement(dB μ V/m) = Reading(dB μ V) + C.F (dB/m).
4. The point (3) is BLE fundamental frequency that is not evaluated in this item.

Site	WZ-AC1	Test Date	2024-09-21
Test Engineer	Ajin Fan	Temp./Humidity	26.4°C /55.3%
Factor	BBHA 9120D_1167_1-18GHz	Polarity	Horizontal
EUT	BLE module	Test Voltage	By USB
Test Mode	Transmit by BLE 2Mbps at 2402MHz		

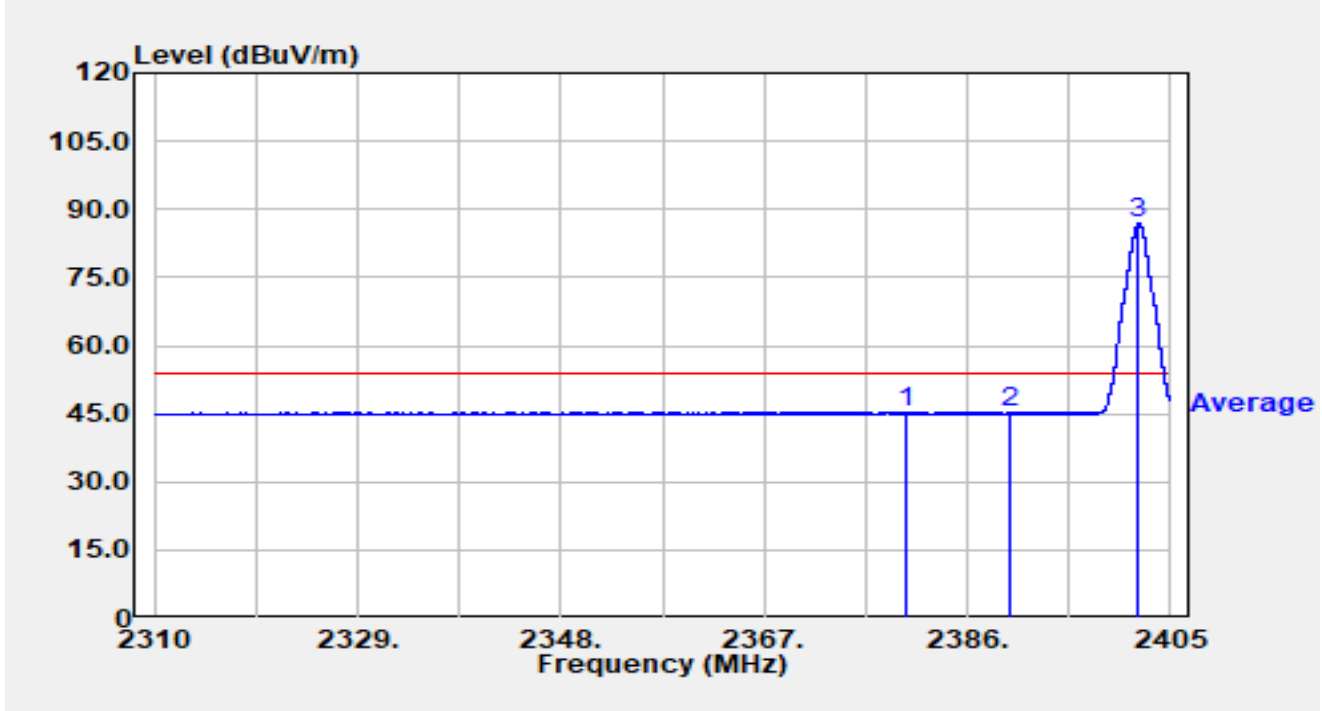


No	Mark	Frequency (MHz)	Reading (dB μ V)	C.F (dB/m)	Measurement (dB μ V/m)	Margin (dB)	Limit (dB μ V/m)	Detector
1	*	2380.186	13.42	31.97	45.39	-8.61	54.00	Average
2		2390.000	13.16	31.96	45.11	-8.89	54.00	Average
3		2402.036	55.04	31.90	86.93	N/A	N/A	Average

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement(dB μ V/m) = Reading(dB μ V) + C.F (dB/m).
4. The point (3) is BLE fundamental frequency that is not evaluated in this item.

Site	WZ-AC1	Test Date	2024-09-21
Test Engineer	Ajin Fan	Temp./Humidity	26.4°C /55.3%
Factor	BBHA 9120D_1167_1-18GHz	Polarity	Vertical
EUT	BLE module	Test Voltage	By USB
Test Mode	Transmit by BLE 2Mbps at 2402MHz		

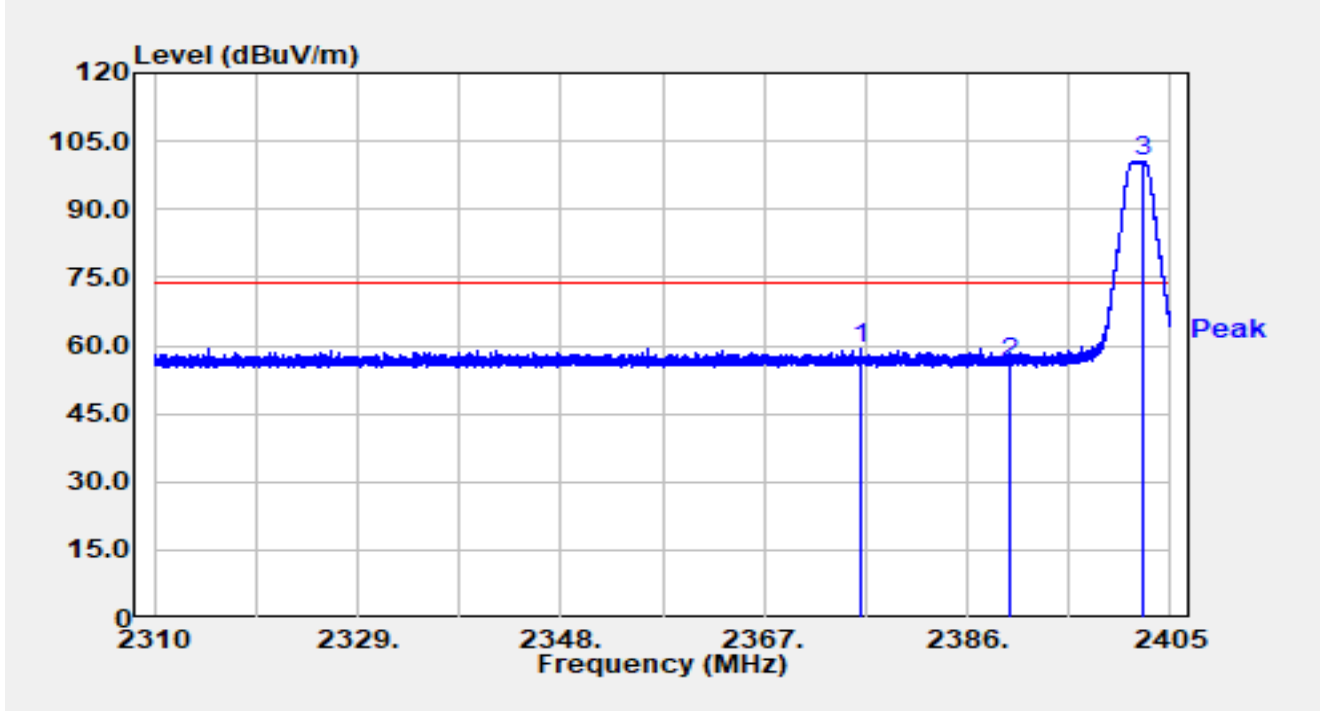


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	2376.139	27.26	31.97	59.23	-14.77	74.00	Peak
2		2390.000	24.34	31.96	56.30	-17.70	74.00	Peak
3		2402.492	68.84	31.90	100.73	N/A	N/A	Peak

Notes:

1. "*" , means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).
4. The point (3) is BLE fundamental frequency that is not evaluated in this item.

Site	WZ-AC1	Test Date	2024-09-21
Test Engineer	Ajin Fan	Temp./Humidity	26.4°C /55.3%
Factor	BBHA 9120D_1167_1-18GHz	Polarity	Vertical
EUT	BLE module	Test Voltage	By USB
Test Mode	Transmit by BLE 2Mbps at 2402MHz		

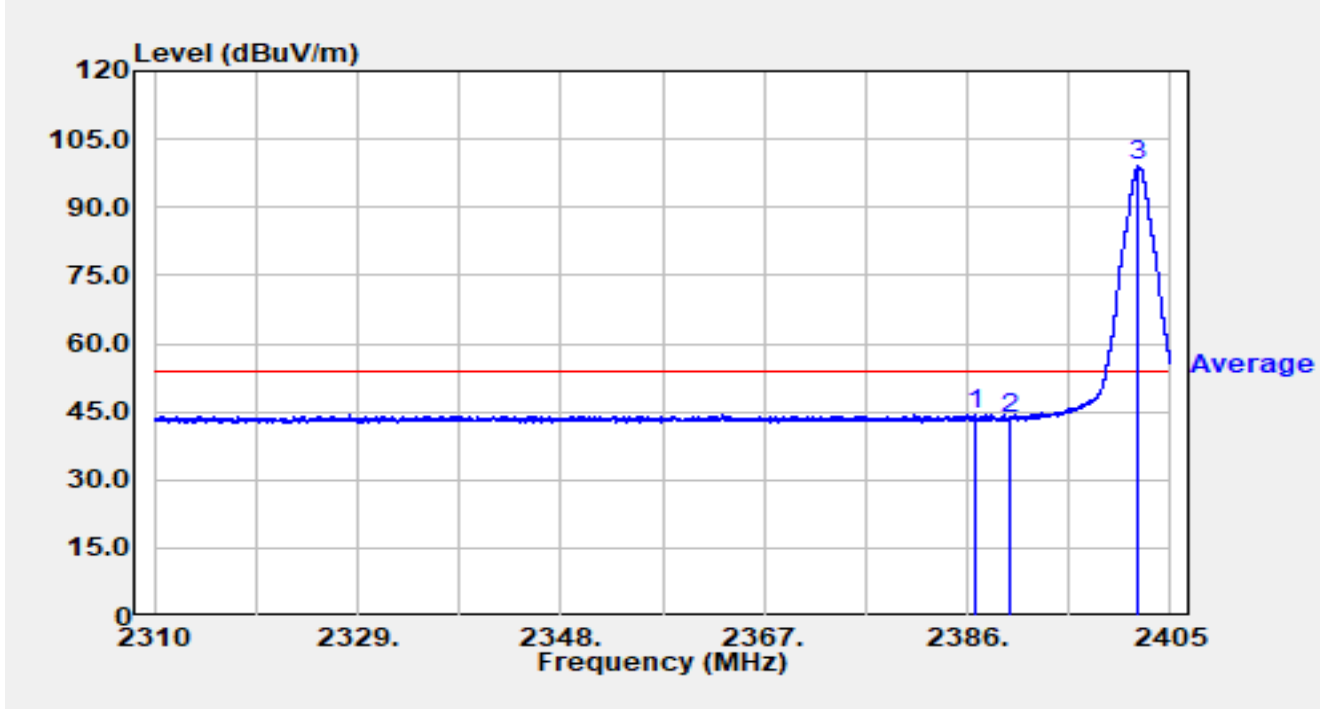


No	Mark	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Detector
1	*	2386.646	12.47	31.97	44.43	-9.57	54.00	Average
2		2390.000	11.67	31.96	43.62	-10.38	54.00	Average
3		2401.960	67.10	31.90	99.00	N/A	N/A	Average

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement(dBUV/m) = Reading(dBUV) + C.F (dB/m).
4. The point (3) is BLE fundamental frequency that is not evaluated in this item.

Site	WZ-AC1	Test Date	2024-09-21
Test Engineer	Ajin Fan	Temp./Humidity	26.4°C /55.3%
Factor	BBHA 9120D_1167_1-18GHz	Polarity	Horizontal
EUT	BLE module	Test Voltage	By USB
Test Mode	Transmit by BLE 2Mbps at 2480MHz		

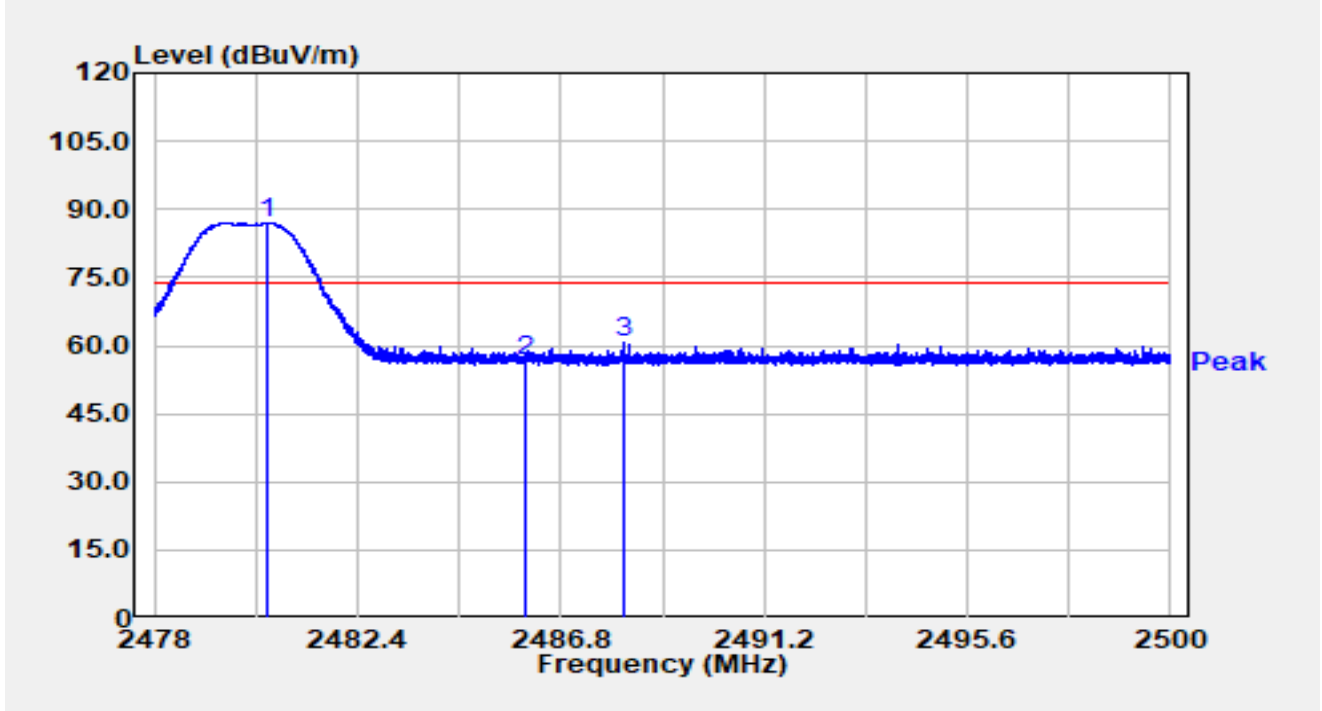


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		2480.446	55.30	31.80	87.11	N/A	N/A	Peak
2		2486.008	24.76	31.81	56.57	-17.43	74.00	Peak
3	*	2488.153	28.75	31.81	60.56	-13.44	74.00	Peak

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).
4. The point (1) is BLE fundamental frequency that is not evaluated in this item.

Site	WZ-AC1	Test Date	2024-09-21
Test Engineer	Ajin Fan	Temp./Humidity	26.4°C /55.3%
Factor	BBHA 9120D_1167_1-18GHz	Polarity	Horizontal
EUT	BLE module	Test Voltage	By USB
Test Mode	Transmit by BLE 2Mbps at 2480MHz		

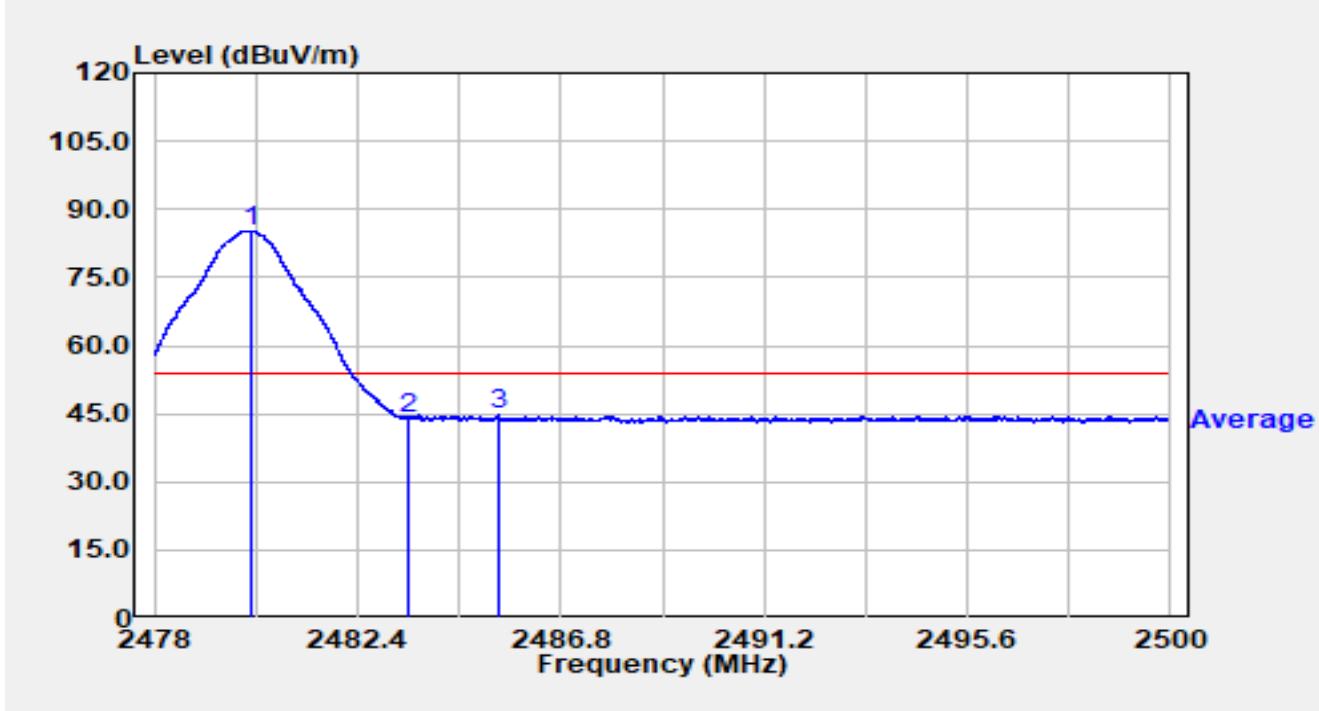


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		2480.070	53.50	31.80	85.31	N/A	N/A	Average
2		2483.500	12.17	31.81	43.97	-10.03	54.00	Average
3	*	2485.440	12.82	31.81	44.63	-9.37	54.00	Average

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).
4. The point (1) is BLE fundamental frequency that is not evaluated in this item.

Site	WZ-AC1	Test Date	2024-09-21
Test Engineer	Ajin Fan	Temp./Humidity	26.4°C /55.3%
Factor	BBHA 9120D_1167_1-18GHz	Polarity	Vertical
EUT	BLE module	Test Voltage	By USB
Test Mode	Transmit by BLE 2Mbps at 2480MHz		

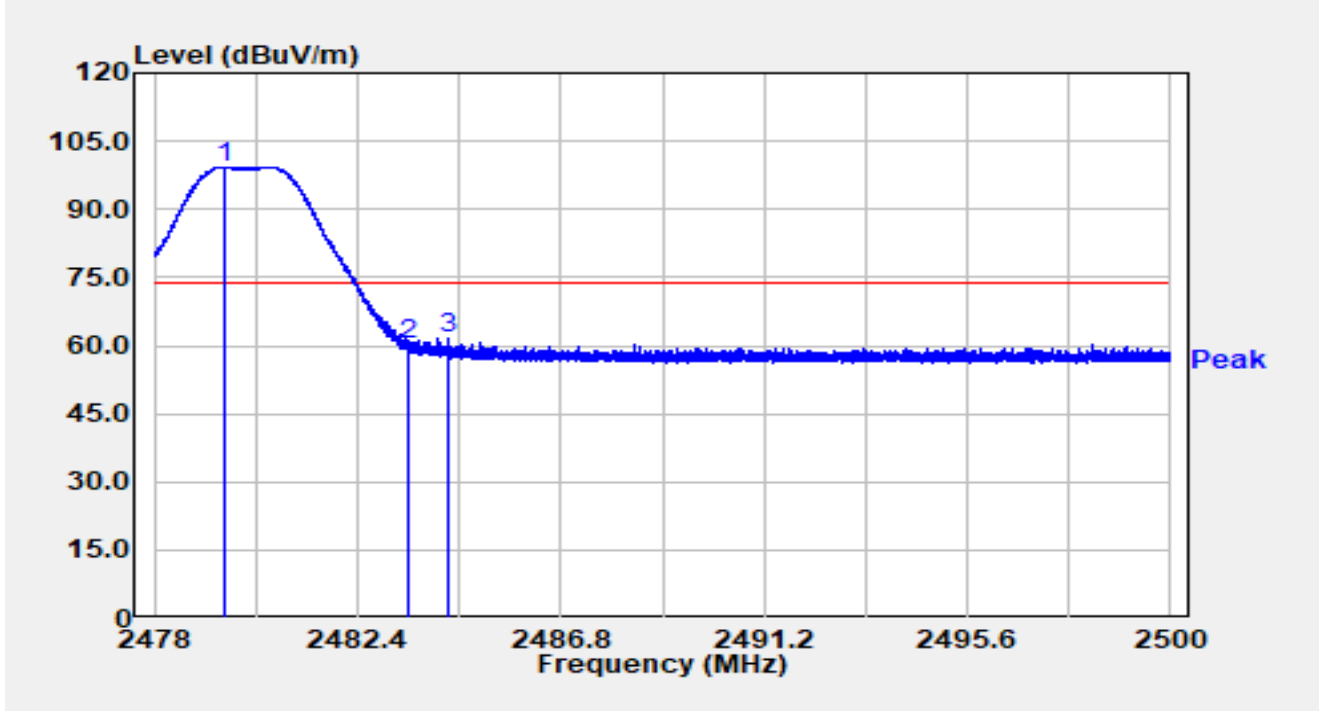


No	Mark	Frequency (MHz)	Reading (dB μ V)	C.F (dB/m)	Measurement (dB μ V/m)	Margin (dB)	Limit (dB μ V/m)	Detector
1		2479.507	67.52	31.80	99.32	N/A	N/A	Peak
2		2483.500	28.60	31.81	60.41	-13.59	74.00	Peak
3	*	2484.369	29.77	31.81	61.58	-12.42	74.00	Peak

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement(dB μ V/m) = Reading(dB μ V) + C.F (dB/m).
4. The point (1) is BLE fundamental frequency that is not evaluated in this item.

Site	WZ-AC1	Test Date	2024-09-21
Test Engineer	Ajin Fan	Temp./Humidity	26.4°C /55.3%
Factor	BBHA 9120D_1167_1-18GHz	Polarity	Vertical
EUT	BLE module	Test Voltage	By USB
Test Mode	Transmit by BLE 2Mbps at 2480MHz		

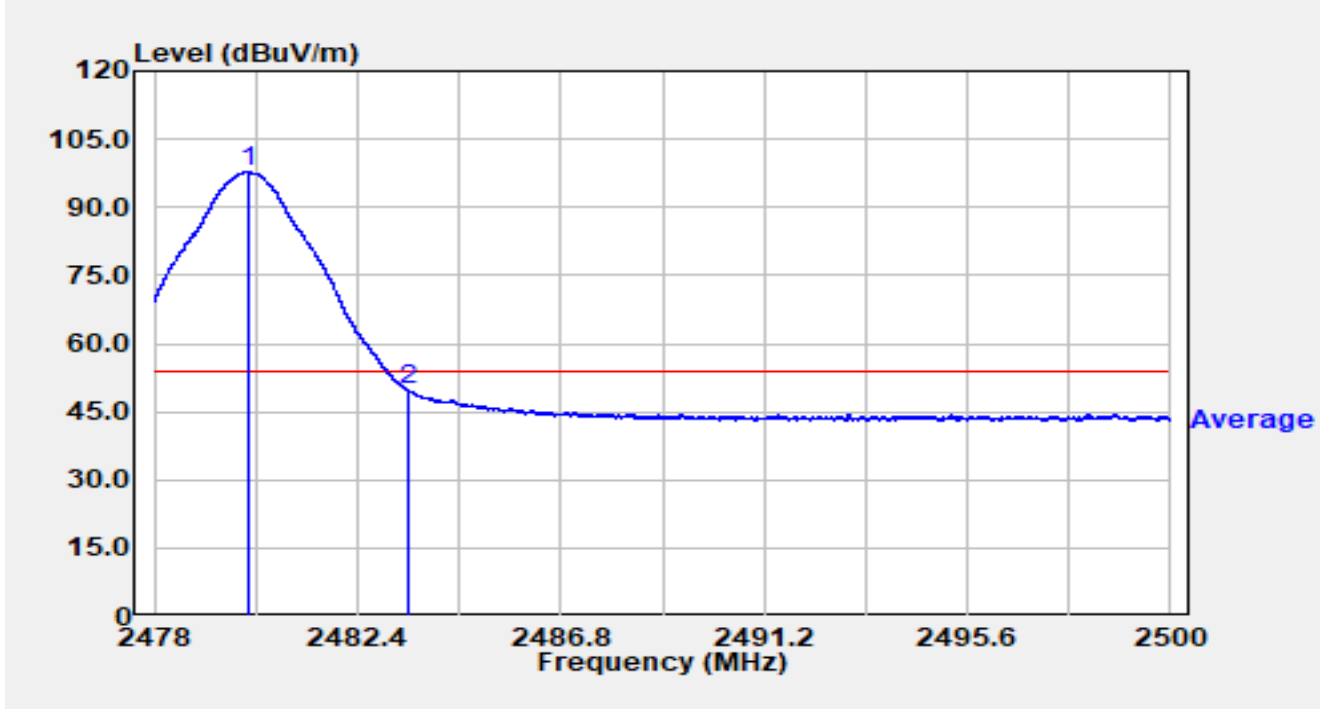


No	Mark	Frequency (MHz)	Reading (dB μ V)	C.F (dB/m)	Measurement (dB μ V/m)	Margin (dB)	Limit (dB μ V/m)	Detector
1		2480.015	65.96	31.80	97.77	N/A	N/A	Average
2	*	2483.500	17.91	31.81	49.71	-4.29	54.00	Average

Notes:

- "*", means this data is the worst emission level.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement(dB μ V/m) = Reading(dB μ V) + C.F (dB/m).
- The point (1) is BLE fundamental frequency that is not evaluated in this item.

A.8 AC Conducted Emissions Test Result

Site	WZ-SR2	Test Date	2024-10-10
Test Engineer	Linda Wei	Temp./Humidity	23.8°C/56.2%
Factor	ENV216_101683_L1_Filter Off_C	Polarity	Line1
EUT	BLE module	Test Voltage	By USB
Test Mode	Transmit by BLE 2Mbps at 2402MHz		

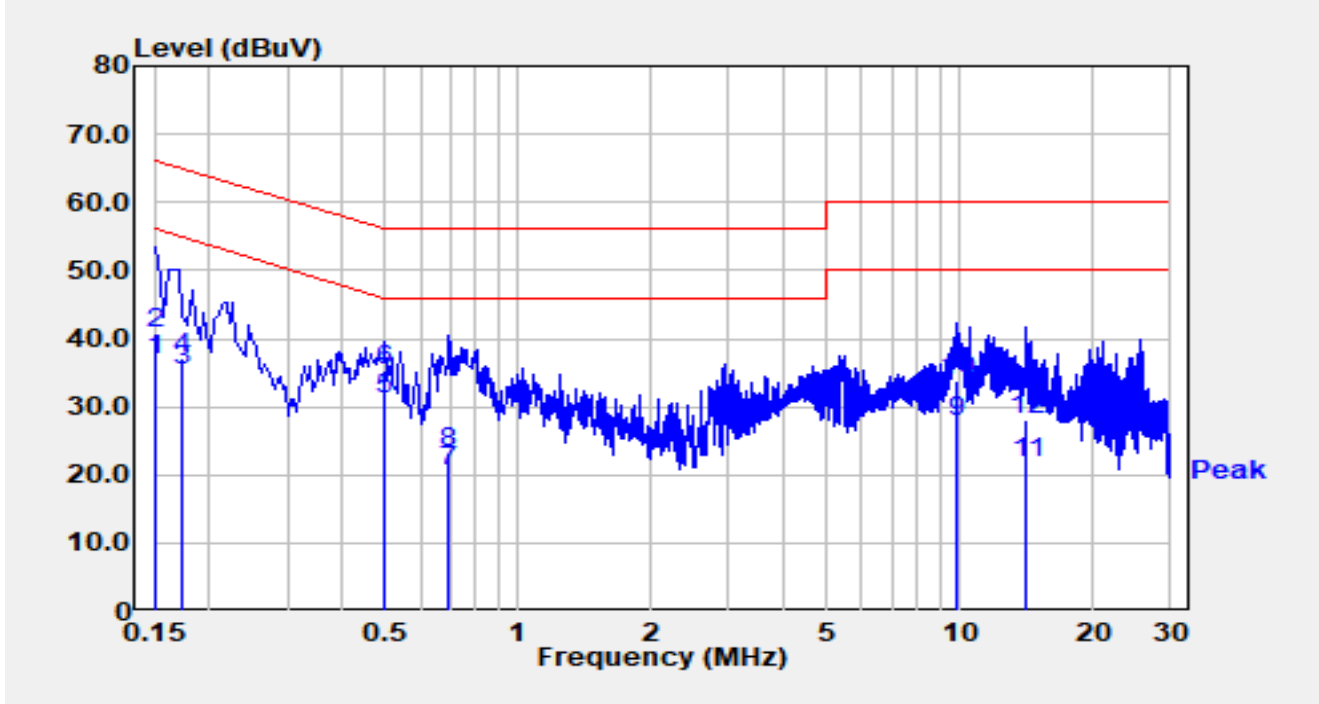


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB)	Measurement (dBμV)	Margin (dB)	Limit (dBμV)	Detector
1		0.150	27.00	9.82	36.82	-19.18	56.00	Average
2		0.150	30.80	9.82	40.62	-25.38	66.00	QP
3		0.173	25.40	9.82	35.22	-19.60	54.82	Average
4		0.173	27.20	9.82	37.02	-27.80	64.82	QP
5	*	0.499	21.10	9.93	31.03	-14.99	46.02	Average
6		0.499	25.30	9.93	35.23	-20.79	56.02	QP
7		0.694	10.40	9.99	20.39	-25.61	46.00	Average
8		0.694	13.20	9.99	23.19	-32.81	56.00	QP
9		9.890	17.50	10.36	27.86	-22.14	50.00	Average
10		9.890	23.50	10.36	33.86	-26.14	60.00	QP
11		14.170	11.20	10.51	21.71	-28.29	50.00	Average
12		14.170	17.50	10.51	28.01	-31.99	60.00	QP

Notes:

1. " * ", means this data is the worst emission level.

2. $C.F (dB) = LISN \text{ Factor } (dB) + \text{Cable Loss } (dB).$
3. $\text{Measurement } (dB\mu V) = \text{Reading } (dB\mu V) + C.F (dB).$

Site	WZ-SR2	Test Date	2024-10-10
Test Engineer	Linda Wei	Temp./Humidity	23.8°C/56.2%
Factor	ENV216_101683_N_Filter Off_C	Polarity	Neutral
EUT	BLE module	Test Voltage	By USB
Test Mode	Transmit by BLE 2Mbps at 2402MHz		

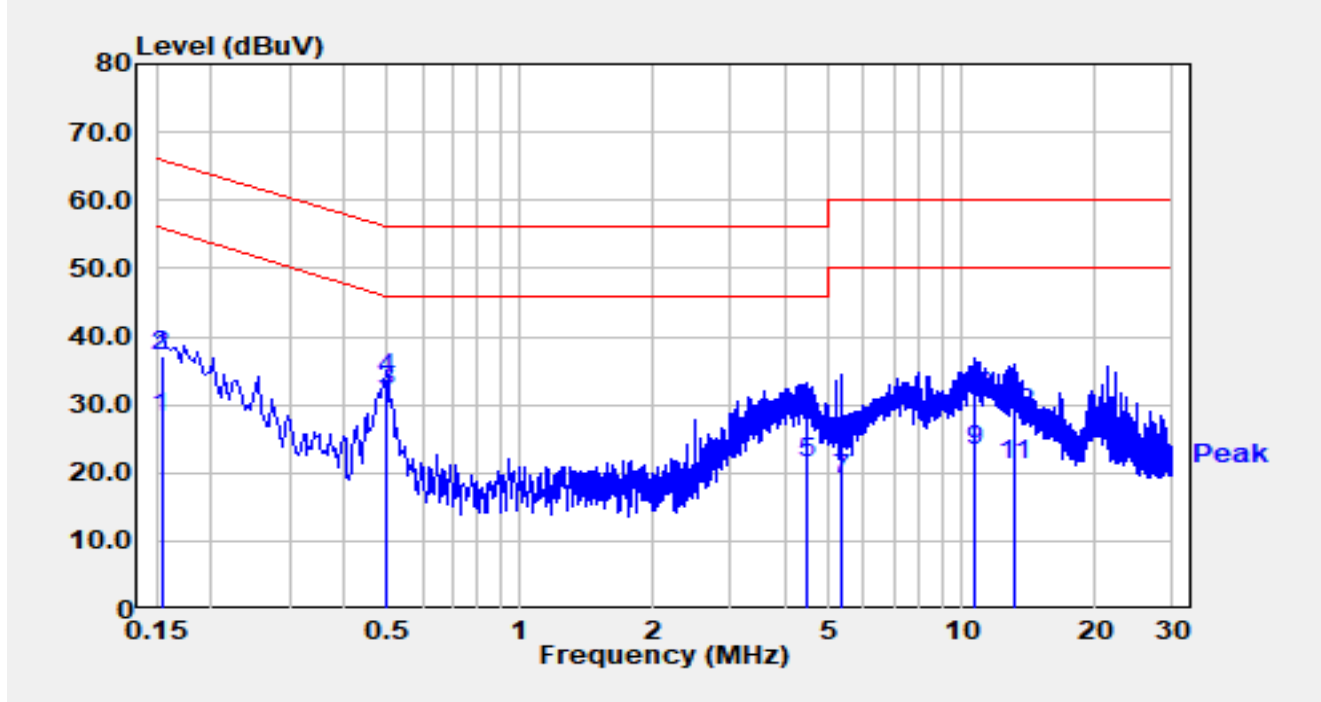

No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB)	Measurement (dBμV)	Margin (dB)	Limit (dBμV)	Detector
1		0.154	17.80	10.13	27.93	-27.85	55.78	Average
2		0.154	26.90	10.13	37.03	-28.75	65.78	QP
3	*	0.498	21.90	10.17	32.07	-13.96	46.03	Average
4		0.498	23.70	10.17	33.87	-22.16	56.03	QP
5		4.450	10.90	10.44	21.34	-24.66	46.00	Average
6		4.450	18.20	10.44	28.64	-27.36	56.00	QP
7		5.340	8.50	10.46	18.96	-31.04	50.00	Average
8		5.340	13.30	10.46	23.76	-36.24	60.00	QP
9		10.740	12.70	10.65	23.35	-26.65	50.00	Average
10		10.740	20.30	10.65	30.95	-29.05	60.00	QP
11		13.120	10.40	10.74	21.14	-28.86	50.00	Average
12		13.120	17.80	10.74	28.54	-31.46	60.00	QP

Notes:

1. " * ", means this data is the worst emission level.

2. $C.F (dB) = LISN \text{ Factor } (dB) + \text{ Cable Loss } (dB)$.
3. $\text{Measurement } (dB\mu V) = \text{Reading } (dB\mu V) + C.F (dB)$.

Appendix B - Test Setup Photograph

Refer to "2409RSU030-UT" file.

Appendix C - EUT Photograph

Refer to "2409RSU030-UE" file.

_____ The End _____