

**FCC
Electromagnetic Compatibility
Test Report**

For

3M™ BookCheck™ Model 946

FCC ID: DGFSSD946


**3M Security Systems Division
St. Paul, MN 55144-1000**

7 Dec 2006

Report Number F1006003

Prepared By:

**CR-SEMS Product Safety
Building 76-1-01
410 East Fillmore Avenue
St. Paul, Minnesota 55144-1000**

3M Product Safety SEMS Technology Center Building 76-1-01 St. Paul, MN 55144-1000	Phone: 651-778-4577 FAX: 651-778-6252	
--	--	---

CERTIFICATE OF COMPLIANCE

USA STANDARD 47 CODE OF FEDERAL REGULATIONS

Radiated Emissions (FCC Part 15, Subpart B, Class A)
Conducted Emissions (FCC Part 15, Subpart B, Class A)
Radiated Emissions (FCC Part 15, Subpart C)
Conducted Emissions (FCC Part 15, Subpart C)

MANUFACTURER'S NAME	3M Company
NAME OF EQUIPMENT	3M™ BookCheck™ Model 946
DESCRIPTION	Book Check with RFID
FCC ID	DGFSSD946
TEST REPORT NUMBER	F1006003
DATE	7 Dec 2006

As the responsible EMC Project Engineer, I hereby declare that the equipment tested, as specified in the test report, at the 3M Product Safety EMC Laboratory is in compliance with 47 CFR, Part 15, Subpart B and Subpart C. It is the manufacturer's responsibility to assure that additional production units of this model are manufactured with identical electrical and mechanical characteristics.

Steven D. Wytaske
EMC Engineer

3M	BookCheck™ Model 946	Report Number F1006003	3M
EMC Laboratory	Product Safety	7 Dec, 2006	Page 3 of 33

TABLE OF CONTENTS

- Title Page
- Certificate of Compliance
- Table of Contents
- 1.0 Test Summary
- 2.0 Introduction
 - 2.1 Scope
 - 2.2 EUT Description and Operation
 - 2.3 Block Diagram
 - 2.4 Parts List
 - 2.5 Modifications to EUT
 - 2.6 Measurement Uncertainty
- 3.0 Applicable Documents
- 4.0 Conducted Emissions
 - 4.1 Test Procedure
 - 4.2 Test Criteria
 - 4.3 Test Results
 - 4.4 Test Setup Photo
- 5.0 Radiated Emissions
 - 5.1 Frequency Stability
 - 5.1.1 Test Procedure
 - 5.1.2 Test Criteria
 - 5.1.3 Test Results
 - 5.1.4 Test Setup Photo
 - 5.2 Emissions Bandwidth
 - 5.2.1 Test Procedure
 - 5.2.2 Test Criteria
 - 5.2.3 Test Results
 - 5.2.4 Test Setup Photo
 - 5.3 Spurious Emissions (12.5 to 30 MHz)
 - 5.3.1 Test Procedure
 - 5.3.2 Test Criteria
 - 5.3.3 Test Results
 - 5.3.4 Test Setup Photo
 - 5.4 Spurious Emissions (30 MHz to 1000 MHz)
 - 5.4.1 Test Procedure
 - 5.4.2 Test Criteria
 - 5.4.3 Test Results
 - 5.5 Radiated Emissions (30 MHz - 18 GHz)
 - 5.5.1 Test Procedure
 - 5.5.2 Test Criteria
 - 5.5.3 Test Results
 - 5.5.4 Test Setup photo
- 6.0 List of Test Equipment
- 7.0 Labeling Information
- 8.0 Signatures

3M	BookCheck™ Model 946	Report Number F1006003	3M
EMC Laboratory	Product Safety	7 Dec, 2006	Page 4 of 33

1.0 TEST SUMMARY

Test Report Number: F1006003

Requester: Greg Amell

Company: 3M
Safety and Security Systems Division
Library Systems
Building 209
St. Paul, MN 55144

Telephone Number: (651) 736-9552

Test Dates: 6,8,10,17, & 22 Nov. 4,5 Dec 2006

Equipment Under Test 3M™ Model 946 BookCheck™
FCC ID DGFSSD946

Date Of Receipt: 31 Oct. 2006

Test Environment Temperature: 23 degrees C
Relative Humidity: 40 % RH

Test Results: Passed the following tests:
Conducted Emissions: FCC Part 15 Subpart B Class A
Radiated Emissions: FCC Part 15 Subpart B Class A
Conducted Emissions: FCC Part 15 Subpart C
Radiated Emissions: FCC Part 15 Subpart C

Modifications: Three modifications needed. See section 2.5

Test Location: 3M Product Safety EMC Laboratory
Building 76
410 Fillmore Ave.
St. Paul, MN 55144-1000

3M	BookCheck™ Model 946	Report Number F1006003	3M
EMC Laboratory	Product Safety	7 Dec, 2006	Page 5 of 33

2.0 INTRODUCTION

2.1 Scope

This report contains results describing the conformance of the Equipment Under Test (EUT) to FCC Part 15, Subpart B, "Class A" rules for unintentional radiators and FCC Part 15, Subpart C rules for intentional radiators.

This report is the confidential property of the client and applies only to the specific item tested under the stated test conditions. It is the manufacturer's responsibility to assure that additional production units of this model are manufactured with identical electrical and mechanical characteristics. This report shall not be reproduced without the written approval of the testing laboratory. When approval has been granted, the report shall be reproduced in its entirety.

The appropriate testing standards and references that were used are contained in Section 3.0. The worst case test data, test configuration, and photographs (worst case configuration) are provided in Sections 4.0 and 5.0. Equipment and documentation labeling information is contained in Sections 6.0 and 7.0.

Subsequent tests are necessary from time to time on equipment taken at random from production. Re-testing of the EUT is also required when the EMC profile has been changed or is suspected of being changed.

The 3M Product Safety EMC Laboratory is recognized under the United States Department of Commerce National Institute of Standards and Technology's National Voluntary Laboratory Program (NVLAP) for satisfactory compliance with criteria established in Title 15, Part 285 Code of Federal Regulations. These criteria encompass the requirements of ISO/IEC Guide 25 and the relevant requirements of ISO 9002 (ANSI/ASQ Q92-1987) as suppliers of test results. Accreditation by the National Voluntary Laboratory Accreditation Program is awarded for specific services, listed on the Scope of Accreditation for: Electromagnetic Compatibility and Telecommunications, FCC, under Lab Code 200033. A complete copy of the Scope of Accreditation is available upon request. The FCC Site Registration Number is 93334.

The NVLAP accreditation or this test report does not in any way constitute or imply product certification, approval, or endorsement by NVLAP, NIST, or any agency of the U.S. Government.

3M	BookCheck™ Model 946	Report Number F1006003	3M
EMC Laboratory	Product Safety	7 Dec, 2006	Page 6 of 33

2.2 EUT Descriptions and Operation

The Equipment Under Test (EUT) is the 3M™ Model 946 BokCheck™ System. The 3M™ Model 946 BookCheck™ is intended for use by library staff in the check-in and checkout of library materials that use electromagnetic (EM) or RFID tags. The 946 may be used on desktops or built into customized countertops. The system is designed for use in an indoor library environment and has not been evaluated for other locations or uses.

The reader has a transmit frequency of 13.56 MHz. And a measured power output level of 1.0 watt (30 dBm) as measured into a 50-ohm load. This maximum output of 1.0 watt (30 dBm) is factory preset.

The EUT contains 1 antenna with an area of 119.0 square inches. The antenna is located under the top cover of the Bookcheck 4 housing. The antenna is cabled to the reader via coax cable and SMA connectors. The reader is located in the Common Box.

All tests were made using an input of 120 V RMS, 60 Hz, and single-phase power. The EUT was tested while exercising all functions. The Reader was set to the fastest read time and was reading tags during all testing.

FCC ID DGFSSD946

3M	BookCheck™ Model 946	Report Number F1006003	3M
EMC Laboratory	Product Safety	7 Dec, 2006	Page 7 of 33

2.3 Block Diagram

Block Diagram submitted as separate file under Letter of Confidentiality

2.4 Parts List

Parts List submitted as separate file under Letter of Confidentiality

2.5 Modifications to the EUT

The following modifications are required for this model:

1. Ferrite – Steward # 28A20250A0 (or equivalent) 1 turn on DC power cable to Monitor, at the monitor end.
2. Ferrite – Steward # 28A20290A0 (or equivalent) 2 turn on RS232 cable to RF Com connector of common box at common box end.
2. Ferrite – Steward # 28A20250A0 (or equivalent) 2 turn on RF Antenna coax at common box end.

2.6 Measurement Uncertainty

The data and test results referenced in this report are true and accurate. However, there may be deviations within the calibration limits of the test equipment and facilities that can account for a nominal measurement deviation of ± 2 dB. Furthermore, EUT component and manufacturing process variables may result in additional deviation. The calculated confidence level is 95%.

3M	BookCheck™ Model 946	Report Number F1006003	3M
EMC Laboratory	Product Safety	7 Dec, 2006	Page 8 of 33

3.0 APPLICABLE DOCUMENTS

The following documents were used as reference for the limits and test procedures specified herein.

CFR 47	Part 15 Radio Frequency Devices	2005
ANSI C63.4	American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the range of 9 KHz to 40 GHz.	2003
CISPR 16-1	Radio disturbance and immunity measuring apparatus and methods	
	-1 Measuring Apparatus	2006
	-2 Ancillary Equipment – Conducted Disturbance	2004
	-3 Ancillary Equipment – Disturbance Power	2006
	-4 Ancillary Equipment – Radiated Disturbance	2004
CISPR 16-2	Radio disturbance and immunity measuring apparatus and methods	
	-1 Conducted Disturbance Measurements	2005
	-2 Measurements of Disturbance Power	2005
	-3 Radiated Disturbance Measurements	2003
CISPR 16-4	-1 Uncertainties in Standardized EMC Tests	2005

3M	BookCheck™ Model 946	Report Number F1006003	3M
EMC Laboratory	Product Safety	7 Dec, 2006	Page 9 of 33

4.0 CONDUCTED EMISSIONS

Testing of conducted emissions was performed in accordance with ANSI C63.4. The limits are prescribed in FCC Part 15, Subpart B and in FCC Part 15, Subpart C.

4.1 Test Procedure

A Line Impedance Stabilization Network (LISN) with 50Ω/50μH characteristic was used to isolate the EUT and give accurate and repeatable readings. An EMI test receiver was used for the emissions measurements in the range from 150kHz to 30MHz. Initial measurements were taken with the receiver in continuous frequency overview mode utilizing peak level signal detection. Initial results were measured at discrete frequencies utilizing quasi-peak detection. Measurement results were automatically calculated via software running the EMI receiver. The final quasi-peak and average measurements recorded were determined by the following:

$$\text{Result (dB}\mu\text{V)} = \text{receiver reading (}\mu\text{V)} + \text{LISN (dB)} + \text{cable loss (dB)}$$

4.2 Test Criteria

The FCC Class 'A' conducted limits are given below. The lower limit shall apply at the transition frequency.

Mains Terminal Disturbance Limits		
Frequency (MHz)	Quasi-Peak (dBμV)	Average (dBμV)
0.15 to 0.50	79	66
0.50 to 30.0	73	60

4.3 Test Results

The EUT met the FCC Class 'A' conducted emission requirements. The worst-case quasi-peak emission was as follows:

3M™BookCheck™ Model 946				
Frequency (MHz)	Limit (dBμV)	L1 (dBμV)	L2 (dBμV)	Passing Margin (dB)
2.6392	73	47.45	43.78	25.55

3M	BookCheck™ Model 946	Report Number F1006003	3M
EMC Laboratory	Product Safety	7 Dec, 2006	Page 10 of 33

CONDUCTED EMISSIONS



3M EMC Lab

TEST REPORT # F1006003 SHEET 1 OF 1
 EUT MODEL # 3M™ BookCheck™ Model 946 EUT SERIAL # N/A
 DESCRIPTION Book Check system

FREQUENCY (MHz)	PEAK (dBµV)		QUASI-PEAK (dBµV)				AVERAGE (dBµV)			
	L1 Line	L2 N	L1 Line	L2 N	Limit	Pass Margin	L1 Line	L2 N	Limit	Pass Margin
.2002	57.83	56.74	50.09	49.99	79	28.91			66	
.3943	62.45	61.05	48.85	48.64	79	30.15	-	-	66	-
2.6392	62.69	60.08	47.45	43.78	73	25.55	-	-	60	-
6.3627	57.21	57.21	41.85	41.85	73	31.15	-	-	60	-
9.1623	55.25	55.07	39.90	39.78	73	33.10	-	-	60	-
15.4468	45.16	43.24	25.14	25.14	73	47.86	-	-	60	-
23.5350	42.47	42.27	23.65	23.51	73	49.35	-	-	60	-
							-	-		-
							-	-		-
							-	-		-

Test Engineer: Bruce Jungwirth
 Date: 8 November 2006

3M	BookCheck™ Model 946	Report Number F1006003	3M
EMC Laboratory	Product Safety	7 Dec, 2006	Page 11 of 33

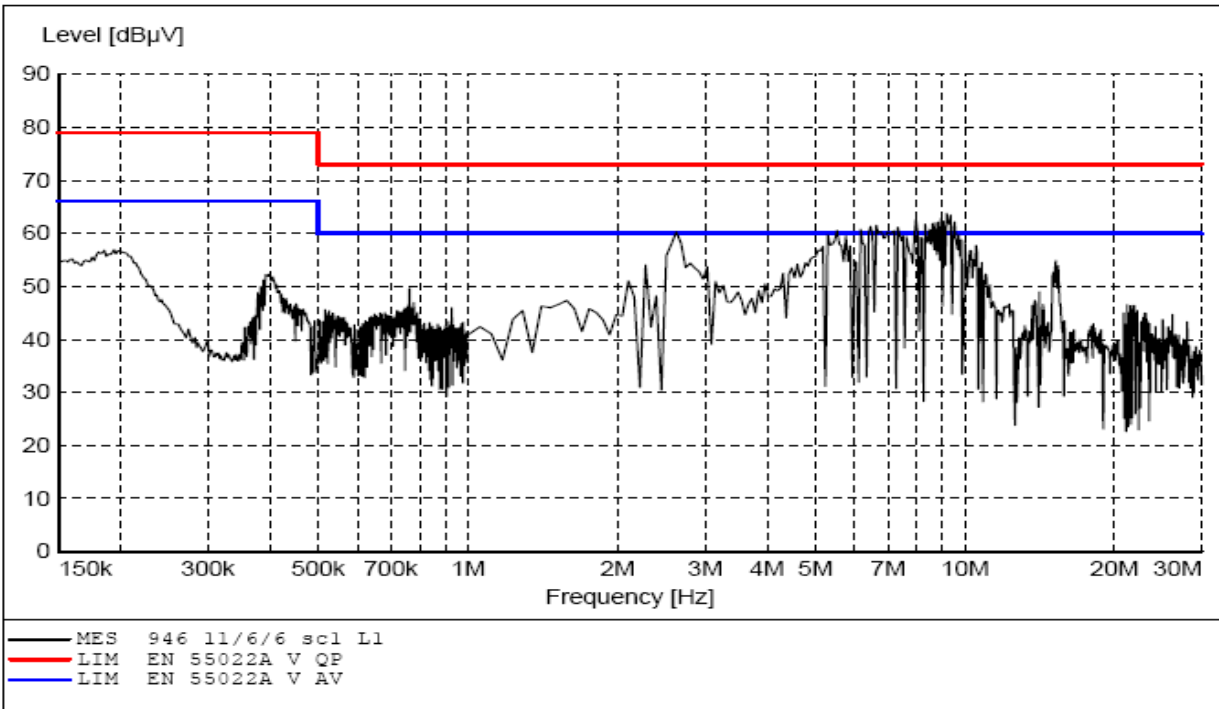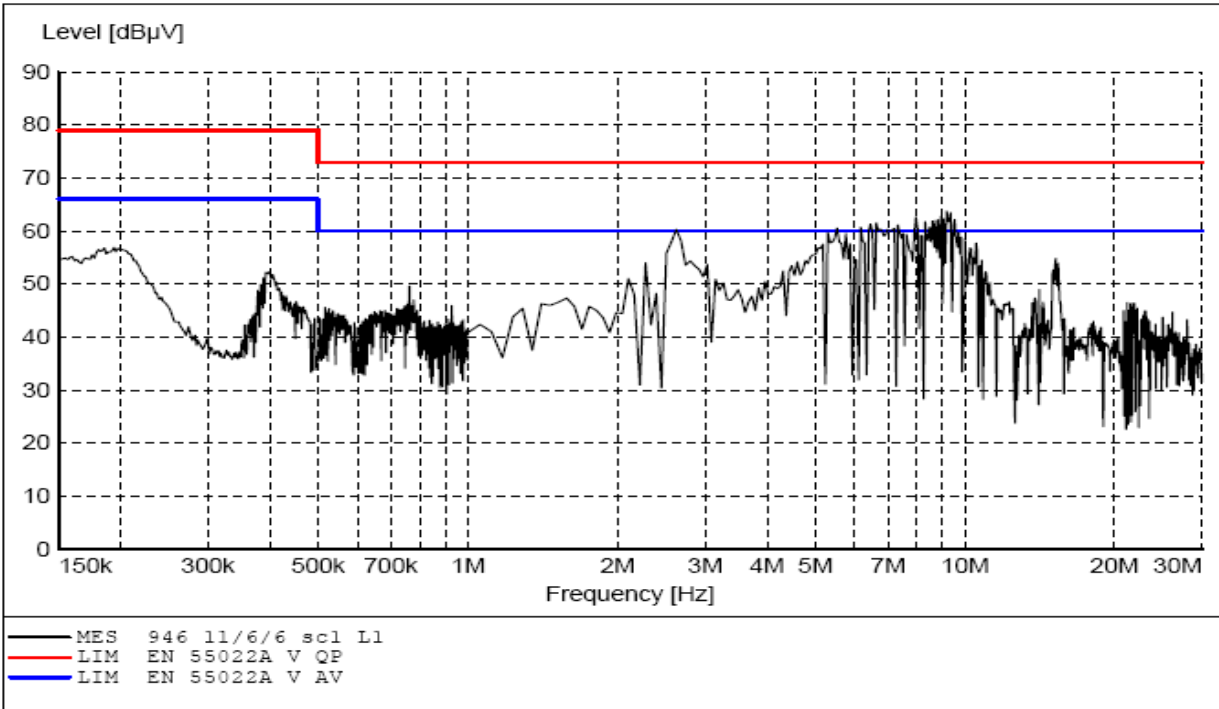

Conducted Emissions

NOTE: Plots show Max Peak values only

3M	BookCheck™ Model 946	Report Number F1006003	3M
EMC Laboratory	Product Safety	7 Dec, 2006	Page 12 of 33

4.4 Test Setup Photo



Conducted Emissions

3M	BookCheck™ Model 946	Report Number F1006003	3M
EMC Laboratory	Product Safety	7 Dec, 2006	Page 13 of 33

5.0 RADIATED EMISSIONS

Testing of radiated emissions was performed in accordance with ANSI C63.4. The limits are prescribed in FCC Part 15, Subpart B and in FCC Part 15, Subpart C.

5.1 Frequency Stability

The Frequency Stability testing was performed in accordance with ANSI C63.4 and FCC Part 15 to insure that the intentional radiator frequency stability was within the allowable limits for input power and temperature variations.

5.1.1 Test Procedure

The Frequency Stability was measured using the radiated signals from the EUT so that the measurement equipment would not load the radio frequency circuits. An EMI receiver was used for the frequency stability measurements. The Reader was put into a continuous output mode through instructions from the host computer (test mode of operation). 1) The frequency was measured while the input DC power to the Intentional Radiator (RFID Reader) was varied over the required input voltage range. 2) The frequency was also measured while the ambient air temperature was varied over the required ambient temperature range (at startup, 2 minutes, 5 minutes, and 10 minutes).

5.1.2 Test Criteria

The FCC Part 15, Subpart C for Frequency Stability Limits versus Supply Voltage are given as:

Carrier Frequency (MHz)	Voltage Range % of Nominal Supply (85 % to 115 %)	Max.Frequency Change (%)
13.56	10.8 to 13.2 V DC	+/- 0.01 %

The FCC Part 15, Subpart C for Frequency Stability Limits versus Temperature is given as:

Carrier Frequency (MHz)	Temperature Range (degrees C)	Max.Frequency Change (%)
13.56	-20 to +50	+/- 0.01 %

3M	BookCheck™ Model 946	Report Number F1006003	3M
EMC Laboratory	Product Safety	7 Dec, 2006	Page 14 of 33

5.1.3 Test Results

The EUT met all FCC Part 15, Subpart C Frequency Stability requirements.

Carrier Frequency Stability versus Supply Voltage			
Carrier Frequency (MHz)	Lowest Frequency (MHz)	Highest Frequency (MHz)	Max.Frequency Change (%)
13.5598	13.5596	13.5599	+/- 0.0015

Carrier Frequency Stability versus Temperature			
Carrier Frequency (MHz)	Lowest Frequency (MHz)	Highest Frequency (MHz)	Max.Frequency Change (%)
13.5598	13.5596	13.5599	+/- 0.0015

Frequency Stability Test Results			
Temperature	Input Voltage		
	10.8 VDC	12.0 VDC	13.2 VDC
-20° C	13.5598	13.5598	13.5598
0° C	13.5599	13.5599	13.5599
23° C	13.5598	13.5598	13.5598
50° C	13.5598	13.5596	13.5598
55° C	13.5596	13.5596	13.5596

3M	BookCheck™ Model 946	Report Number F1006003	3M
EMC Laboratory	Product Safety	7 Dec, 2006	Page 15 of 33

5.2 Emission Bandwidth

The EUT was placed in a semi-anechoic chamber and the Emission Bandwidth testing was performed in accordance with ANSI C63.4 and FCC Part 15, Paragraph 15.225. The Emission Bandwidth measurements were made to determine the intentional radiator frequency and determine the level of electromagnetic energy radiated at that frequency and at the band edges from the EUT.

5.2.1 Test Procedure

A measurement antenna (loop) was positioned at a distance of 5 meters (to insure far field measurements) from the center of the EUT. An EMI receiver was used for the emissions measurements. Initial sweep measurements were taken with the receiver in continuous frequency overview mode utilizing peak level signal detection. The intentional radiator frequency and band edge frequencies utilizing quasi-peak detection were then maximized. Maximizing a frequency involves finding the angle of the highest emission levels by rotating the EUT 360 degrees (sampling at least every 4 degrees). Then the antenna, which was fixed at 1-meter height, was rotated until the highest emissions levels found. Measurement results were automatically calculated via software running the EMI receiver. The final quasi-peak measurements recorded were determined by the following formula:

Result (dBμV/m) = receiver level (μV) + antenna factor (dB/m) + cable loss (dB) - preamp gain (dB) + lineal conversion (dB).

5.2.2 Test Criteria

The FCC Part 15 Subpart C, Paragraph 15.225 Carrier Frequency Limits are given as:

Lower Band Edge: 13.553 MHz
Upper Band Edge: 13.567 MHz

The FCC Part 15, Subpart C radiated limits are given as:

Frequency (MHz)	Distance (Meters)	Field Strength (dBμV/m)
1.705 to 13.110	10	48.62
13.110 to 13.410	10	59.58
13.410 to 13.553	10	69.55
13.553 to 13.567	10	103.00
13.567 to 13.710	10	69.55
13.710 to 14.010	10	59.58
14.010 to 30.000	10	48.62

Note: A 40 dB/decade extrapolation factor was used per 15.31.

3M	BookCheck™ Model 946	Report Number F1006003	3M
EMC Laboratory	Product Safety	7 Dec, 2006	Page 16 of 33

5.2.3 Test Results


The EUT met the FCC Part 15, Subpart C Emission Bandwidth requirements. The intentional radiator frequency was within the allowed band and all maximized quasi-peak measurements for the EUT were below the quasi-peak limits.

3M™ BookCheck™ Mode946						
Frequency (MHz)	BW (kHz)	QP Level (dBµV/m)	QP Limit (dBµV/m)	Passing Margin (dB)	Turntable (degrees)	Antenna Orientation/Angle (Polarity/degrees)
13.5598 ¹	9	62.6	103	40.4	110	Y + 15° clockwise
13.553 ²	1	25.3	69.6	44.3	110	Y + 15° clockwise
13.567 ²	1	24.85	69.6	44.75	110	Y + 15° clockwise
13.5485	9	41.2	69.6	28.4	110	Y + 15° clockwise
13.5715	9	40.84	69.6	28.76	110	Y + 15° clockwise
13.41	1	10.59	59.6	49.01	110	Y + 15° clockwise
13.71	1	12.31	59.6	47.29	110	Y + 15° clockwise
13.4055	9	23.74	59.6	35.86	110	Y + 15° clockwise
13.7141	9	25.37	59.6	34.23	110	Y + 15° clockwise
13.11	1	1.68	48.6	46.92	110	Y + 15° clockwise
14.01	1	2.97	48.6	45.63	110	Y + 15° clockwise
13.1055	9	15.26	48.6	33.34	110	Y + 15° clockwise
14.0145	9	16.03	48.6	32.57	110	Y + 15° clockwise


1 - Intentional Radiator Frequency

2 - Band edges measured with a receiver bandwidth setting of 1 KHz. Per ANSI C63.4 Paragraph 13.1.7.

3M	BookCheck™ Model 946	Report Number F1006003	3M
EMC Laboratory	Product Safety	7 Dec, 2006	Page 17 of 33

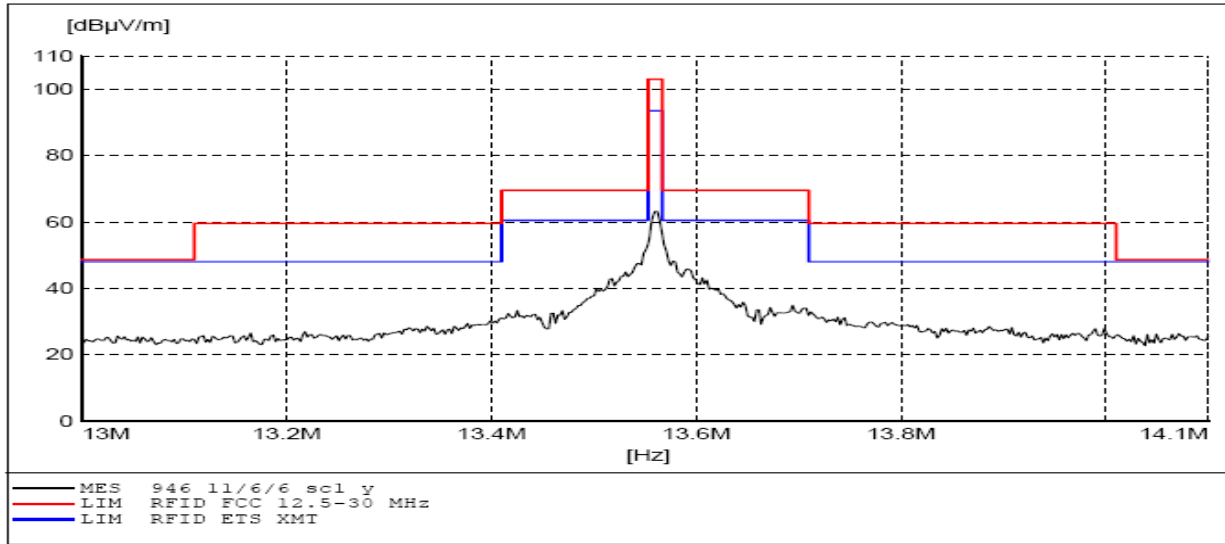

RF Emissions Output

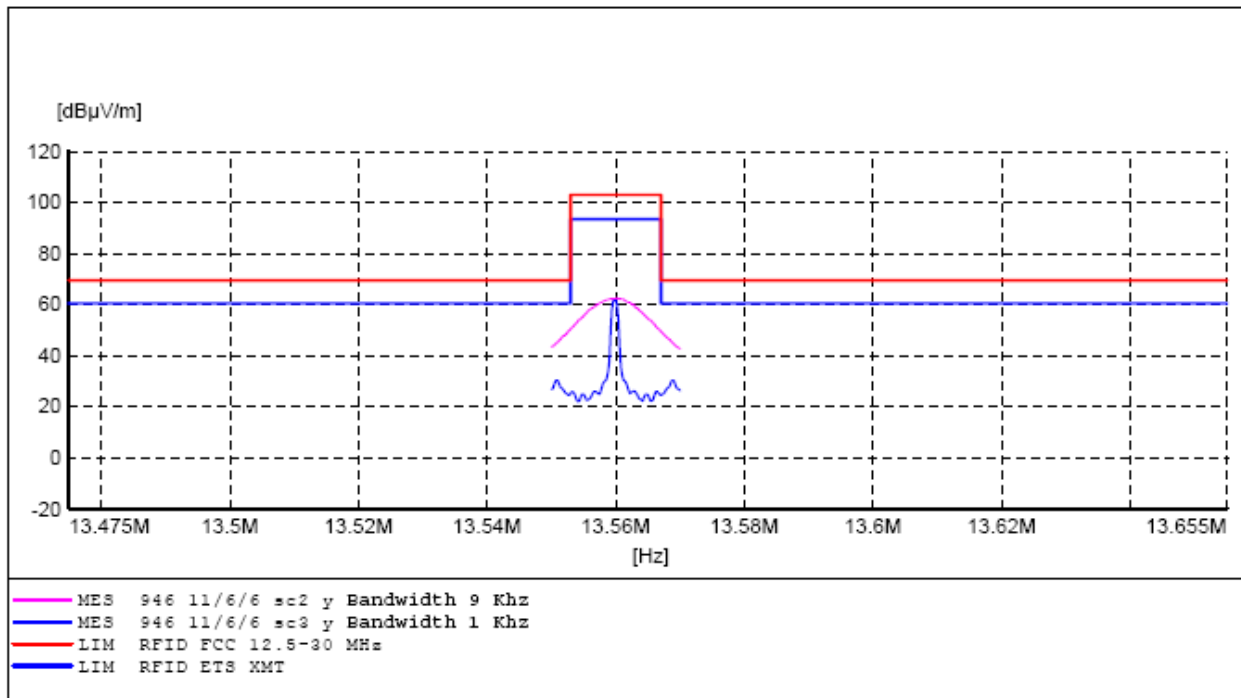

Emissions Bandwidth

3M	BookCheck™ Model 946	Report Number F1006003	3M
EMC Laboratory	Product Safety	7 Dec, 2006	Page 18 of 33

5.2.4 Test Setup Photo



Spurious Emissions (12.5 to 30 MHz)
Output & Bandwidth

3M	BookCheck™ Model 946	Report Number F1006003	3M
EMC Laboratory	Product Safety	7 Dec, 2006	Page 19 of 33

5.3 Spurious Emissions (12.5 to 30 MHz.)

The EUT was placed in an semi-anechoic chamber and the Spurious Emissions testing was performed in accordance with ANSI C63.4 and FCC Part 15, Subpart C. The Spurious Emission measurements were made to determine the level of spurious electromagnetic energy radiated from the EUT.

5.3.1 Test Procedure

A measurement antenna (loop) was positioned at a distance of 5 meters (to insure far field measurements) from the center of the EUT. An EMI receiver was used for the emissions measurements. Initial sweep measurements were taken with the receiver in continuous frequency overview mode utilizing peak level signal detection. Acceptance analysis of these sweeps was used to determine which discrete frequencies, other than the intentional radiator frequency and band edge frequencies, were to be maximized. Maximizing a frequency involves finding the angle of the highest emission levels by rotating the EUT 360 degrees (sampling at least every 4 degrees). Then the antenna, which was fixed at 1-meter height, was rotated until the highest emissions levels found. Final measurements were taken utilizing quasi-peak detection. Measurement results were automatically calculated via software running the EMI receiver. The final measurements recorded were determined by the following formula:

Result (dBµV/m) = receiver level (µV) + antenna factor (dB/m) + cable loss (dB) - preamp gain (dB) + lineal conversion (dB).

5.3.2 Test Criteria

The FCC Part 15, Subpart C radiated limits are given below.

Frequency (MHz)	Distance (Meters)	Field Strength (dBµV/m)
1.705 to 13.110	10	48.62
13.110 to 13.410	10	59.58
13.410 to 13.553	10	69.55
13.553 to 13.567	10	103.00
13.567 to 13.710	10	69.55
13.710 to 14.010	10	59.58
14.010 to 30.000	10	48.62

Note: A 40 dB/decade extrapolation factor was used per 15.31.

3M	BookCheck™ Model 946	Report Number F1006003	3M
EMC Laboratory	Product Safety	7 Dec, 2006	Page 20 of 33

5.3.3 Test Results

The EUT met the FCC Part 15, Subpart C Spurious Emissions (12.5 to 30 MHz.) requirements. The worst-case emission was as follows:

3M™ BookCheck™ Model 946			
Frequency (MHz)	Limit (dBμV)	Maximized QP Signal (dBμV)	Passing Margin (dB)
27.1196 ¹	48.6	16.38	32.22

1. 2nd Harmonic of Intentional Radiator

5.3.4 Test Setup Photo

See Section 5.2.4 Emissions Bandwidth

3M	BookCheck™ Model 946	Report Number F1006003	3M
EMC Laboratory	Product Safety	7 Dec, 2006	Page 21 of 33

5.4 Spurious Emissions (30 to 1000 MHz.)

The EUT was placed in a semi-anechoic chamber for spurious emissions testing in accordance with ANSI C63.4 and FCC Part 15, Subpart C. The Spurious Emission measurements were made to determine the level of spurious electromagnetic energy radiated from the EUT.

5.4.1 Test Procedure

The EUT was placed on a 0.80 meter high wooden table in the center of a turntable. An EMI receiver was used for the emissions measurements in the range of 30MHz to 1000MHz. Initial measurements were taken with the receiver in continuous frequency overview mode utilizing peak level signal detection. Peak results were maximized at discrete frequencies utilizing quasi-peak detection. Maximizing a frequency involves finding the angle of the highest emission levels by rotating the EUT 360 degrees (sampling every 4 degrees) and varying the antenna height between 1 and 4 meters at the angles of the highest emissions levels found. Measurements were taken in both vertical and horizontal antenna polarization. The final measurements recorded were determined by the following formula:

Result (dB μ V /m) = receiver level (μ V) + antenna factor (dB/m) + cable loss (dB) - preamp gain (dB) + lineal conversion (dB)

5.4.2 Test Criteria

The FCC Part 15, Subpart C radiated limits are given below.

Frequency (MHz)	Distance (Meters)	Field Strength (dB μ V/m)
30 - 88	10	29.54
88 - 216	10	33.06
216 - 960	10	35.56
960 and higher	10	43.52

5.4.3 Test Results

The EUT met the FCC Part 15, Subpart C Spurious Emissions (30 to 1000 MHz.) requirements.

3M	BookCheck™ Model 946	Report Number F1006003	3M
EMC Laboratory	Product Safety	7 Dec, 2006	Page 22 of 33

SPURIOUS EMISSIONS 30 - 1000 MHz

3M EMC Lab

TEST REPORT # F1006003 SHEET 1 OF 1

EUT MODEL # 3M™ BookCheck™ Model 946 EUT SERIAL # N/A



DESCRIPTION Book Check system

FREQ. (MHz)	MAXIMIZED QP SIGNAL		LIMIT LINE	PASSING MARGIN	MAXIMIZED POSITION		REMARKS
	H/V	(dBµV/m)			(dBµV/m)	(dB)	
40.677	V	20.73	29.54	8.81	98	1.0	Harmonic
298.316	H	30.14	35.56	5.42	171	1.05	Harmonic
583.066	H	29.83	35.56	5.73	36	1.0	Harmonic
610.188	H	29.06	35.56	6.5	151	1.0	Harmonic
664.424	H	30.34	35.56	5.22	325	1.0	Harmonic

Test Engineer: Bruce Jungwirth

Date: 2 Nov. 2006

3M	BookCheck™ Model 946	Report Number F1006003	3M
EMC Laboratory	Product Safety	7 Dec, 2006	Page 23 of 33

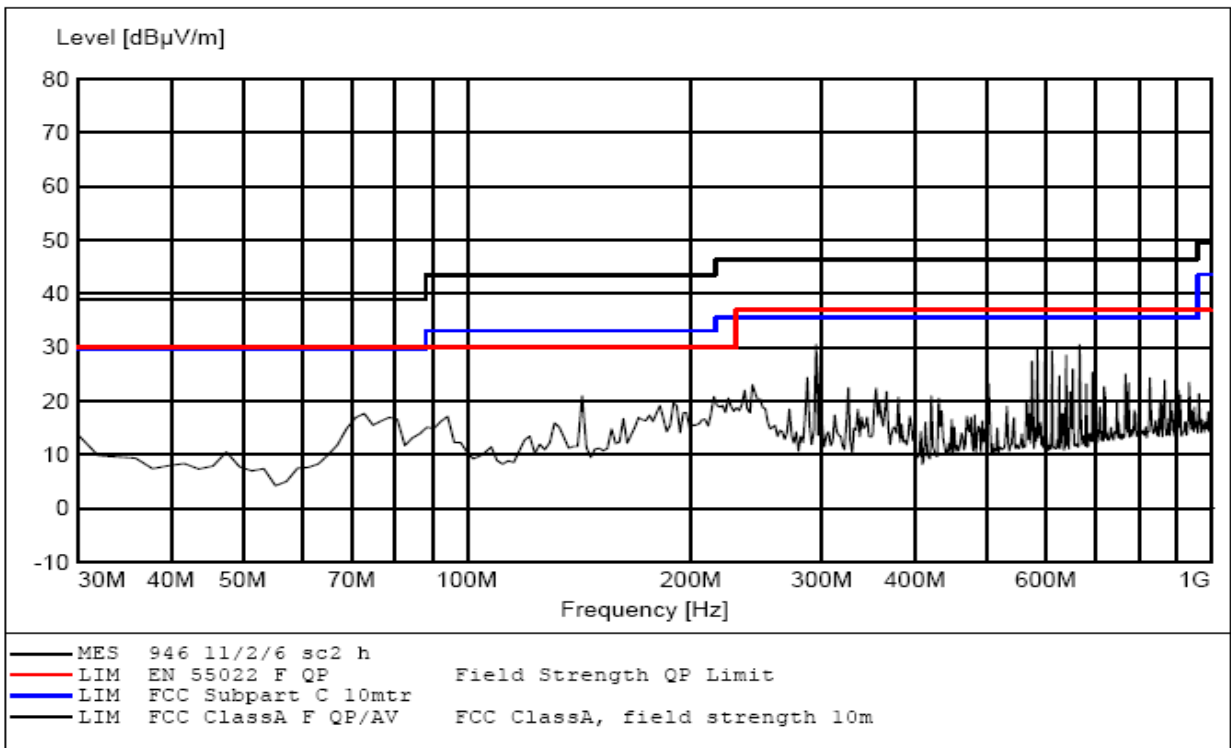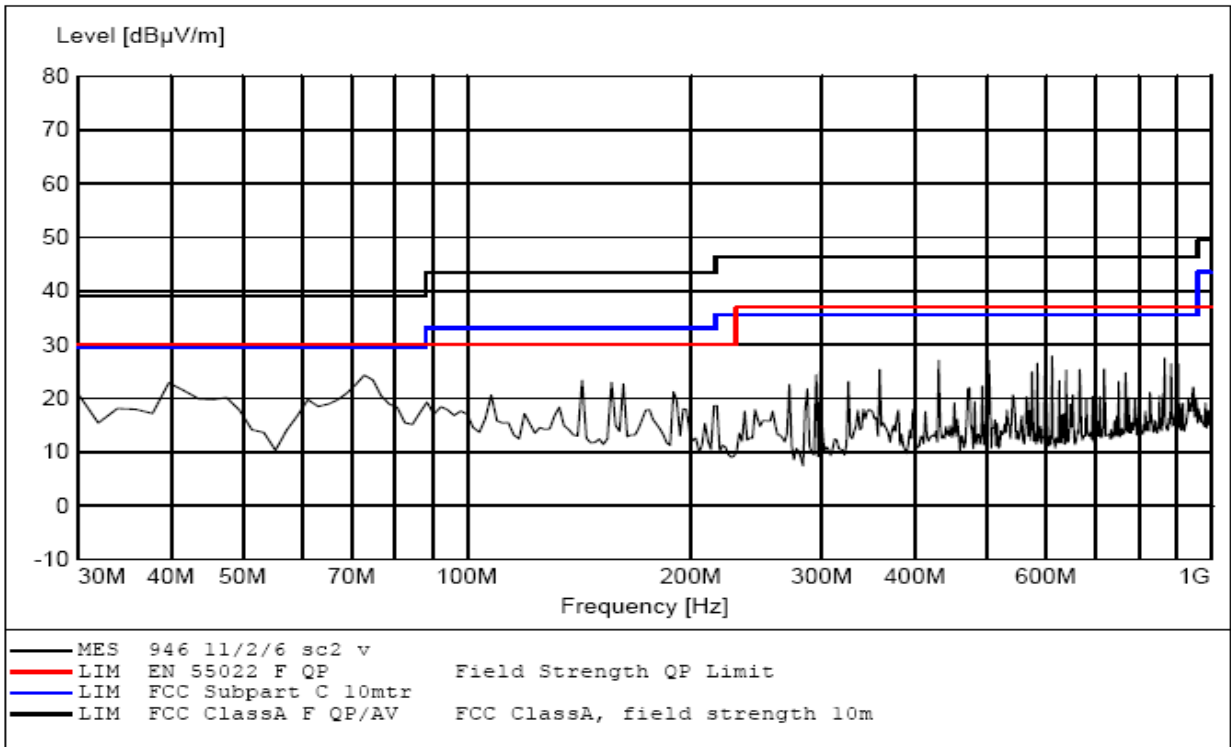

Spurious Emissions 30 to 1000 MHz

3M	BookCheck™ Model 946	Report Number F1006003	3M
EMC Laboratory	Product Safety	7 Dec, 2006	Page 24 of 33



Spurious Emissions 30 to 1000 MHz

3M	BookCheck™ Model 946	Report Number F1006003	3M
EMC Laboratory	Product Safety	7 Dec, 2006	Page 25 of 33

5.5 Radiated Emissions (30 MHz - 18 GHz)

The EUT was placed in a semi-anechoic chamber for radiated emissions testing in accordance with ANSI C63.4 and FCC Part 15. Radiated emissions measurements were made to determine the level of electromagnetic energy radiating from the EUT.

5.5.1 Test Procedure

The EUT was placed on a 0.80 meter high wooden table in the center of a turntable. An EMI receiver was used for the emissions measurements in the range of 30MHz to 18GHz (the upper limit of measurement is determined by the 5th harmonic of the highest frequency generated in the device or 40 GHz whichever is lower). Initial measurements were taken with the receiver in continuous frequency overview mode utilizing peak level signal detection. Peak results were maximized at discrete frequencies utilizing quasi-peak detection. Maximizing a frequency involves finding the angle of the highest emission levels by rotating the EUT 360 degrees (sampling every 4 degrees) and varying the antenna height between 1 and 4 meters at the angles of the highest emissions levels found. Measurements were taken in both vertical and horizontal antenna polarization. The final quasi-peak measurements recorded were determined by the following (the detector used above 1000 MHz is both average and peak):

Result (dB μ V /m) = receiver level (μ V) + antenna factor (dB/m) + cable loss (dB) - preamp gain (dB) + lineal conversion (dB)

5.5.2 Test Criteria

The FCC Class 'A' radiated limits are given below. The lower limit shall apply at the transition frequency.

Frequency (MHz)	Distance (Meters)	Field Strength (dB μ V/m)
30 - 88	10	39.08
88 - 216	10	43.52
216 - 960	10	46.44
960 - 1000	10	49.54
1000 – 40000	10	49.54 AVG 69.54 PEAK

3M	BookCheck™ Model 946	Report Number F1006003	3M
EMC Laboratory	Product Safety	7 Dec, 2006	Page 26 of 33

5.5.3 Test Results

The EUT met the FCC Class 'A' radiated emission requirements. No signals were detected above 5 GHz in either the horizontal or vertical polarization. All maximized quasi-peak measurements for the EUT were below the quasi-peak limit. The worst-case quasi-peak emission was as follows:

3M™ BookCheck™ Model 946					
Frequency (MHz)	Level (dBμV /m)	Limit (dBμV /m)	Passing Margin (dB)	Turntable (degrees)	Antenna (m/polarity)
664.424	30.34	46.44	15.10	325	1.0
1,998	42.47*	49.54*	4.07	68	1.3

* Ave.

RADIATED EMISSIONS 30 - 1000 MHz

3M EMC Lab

TEST REPORT # F1006003 SHEET 1 OF 1
 EUT MODEL # 3M™ BookCheck™ Model946 EUT SERIAL # N/A
 DESCRIPTION Book Check system

FREQ. (MHz)	MAXIMIZED QP SIGNAL		LIMIT LINE (dBμV/m)	PASSING MARGIN (dB)	MAXIMIZED POSITION		REMARKS
	H/V	(dBμV/m)			TURNTABLE (degrees)	ANTENNA (meters)	
40.677	V	20.73	39.08	18.35	98	1.0	Harmonic
73.086	V	21.88	39.08	17.20	106	1.0	
143.647	V	22.73	43.52	20.79	46	1.0	
294.905	H	30.18	46.44	16.26	104	1.0	
298.316	H	30.14	46.44	16.30	171	1.05	Harmonic
583.066	H	29.83	46.44	16.61	36	1.0	Harmonic
610.188	H	29.06	46.44	17.38	151	1.0	Harmonic
664.424	H	30.34	46.44	15.10	325	1.0	Harmonic

Test Engineer: Bruce Jungwirth
 Date: 2 Nov. 2006

3M	BookCheck™ Model 946	Report Number F1006003	3M
EMC Laboratory	Product Safety	7 Dec, 2006	Page 27 of 33

RADIATED EMISSIONS 1 - 5 GHz

3M EMC Lab



TEST REPORT # F1006003 SHEET 1 OF 1
 EUT MODEL # 3M™ BookCheck™ Model 946 EUT SERIAL # N/A
 DESCRIPTION Book Check system

FREQ. (GHz)	MAXIMIZED AVG SIGNAL		LIMIT LINE	PASSING MARGIN	MAXIMIZED PEAK SIGNAL		LIMIT LINE	PASSING MARGIN	Turn table	Antenna Height
	H/ V	(dBμV/m)	(dBμV/m)	(dB)	H/ V	(dBμV/m)	(dBμV/m)	(dB)	(deg.)	(m)
1.2018	V	43.38	49.54	6.16	V	46.98	69.54	22.56	327	1.0
1.596	V	27.91	49.54	18.63	V	53.11	69.54	16.43	19	1.0
1.998	V	42.47	49.54	4.07	V	49.40	69.54	20.14	68	1.3
4.0		*	49.54			*	69.54			

* Could not locate during maximization

Test Engineer: Bruce Jungwirth
 Date: 3 Nov. 2006


3M	BookCheck™ Model 946	Report Number F1006003	3M
EMC Laboratory	Product Safety	7 Dec, 2006	Page 28 of 33

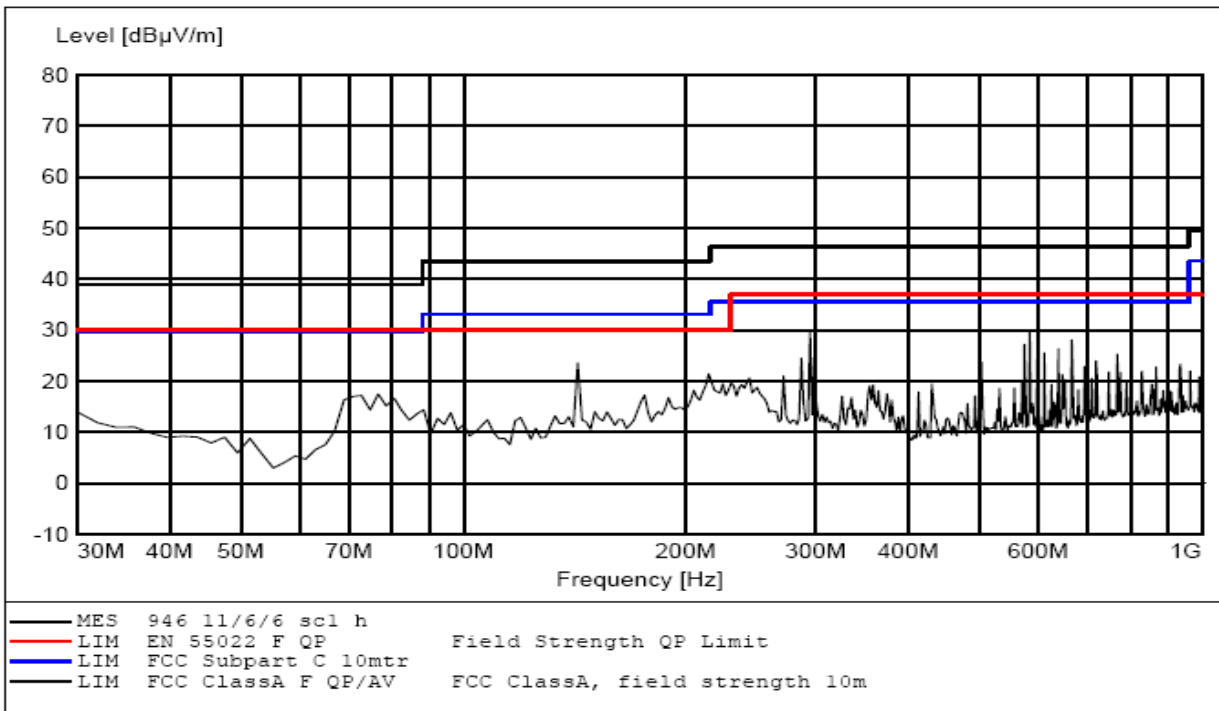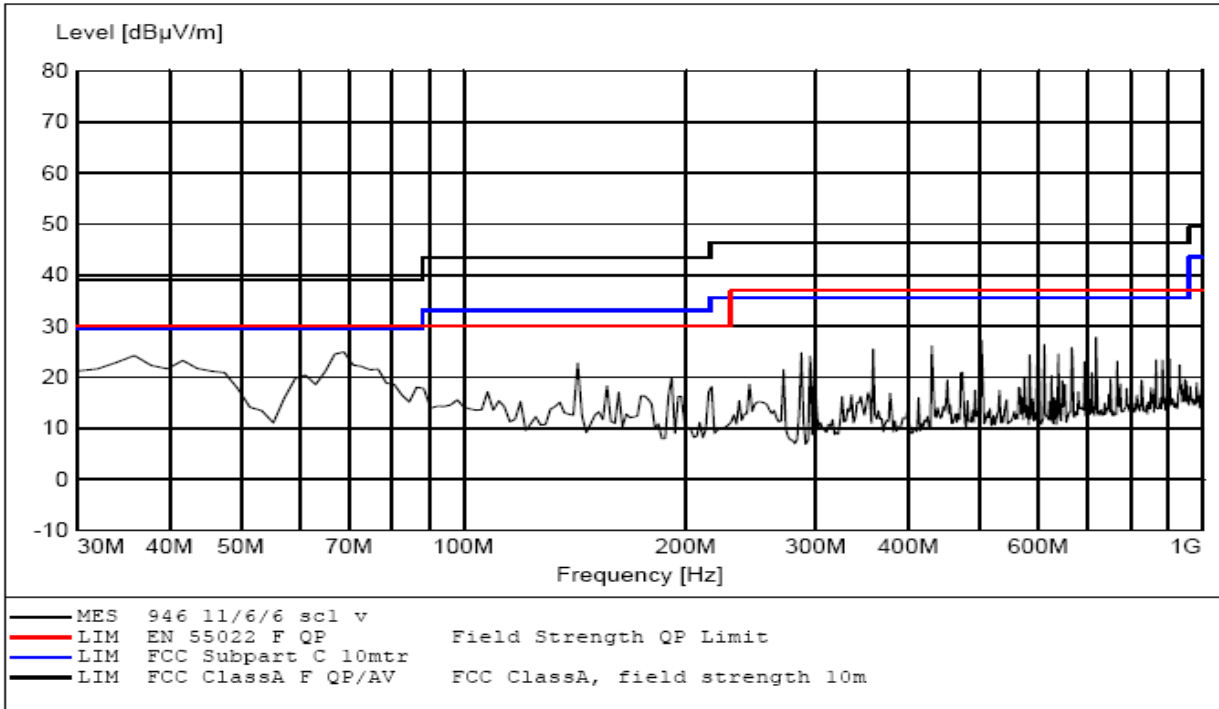

Radiated Emissions 30 to 1000 MHz

NOTE: Plots show Max Peak values

3M	BookCheck™ Model 946	Report Number F1006003	3M
EMC Laboratory	Product Safety	7 Dec, 2006	Page 29 of 33

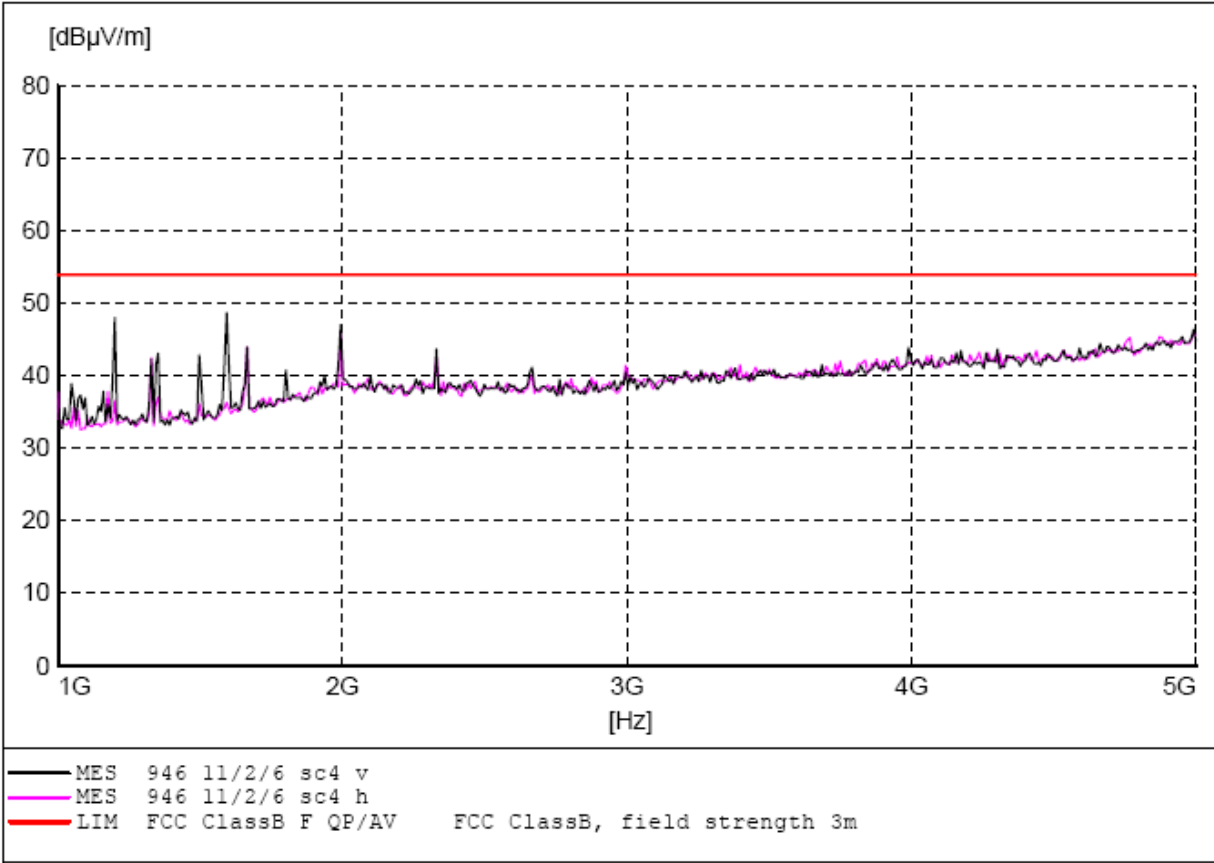

Radiated Emissions 1 to 5 GHz

NOTE: Plots show Max Peak values

3M	BookCheck™ Model 946	Report Number F1006003	3M
EMC Laboratory	Product Safety	7 Dec, 2006	Page 30 of 33

5.5.4 Test Setup Photo: 30-1000 MHz (top) 1-18 GHz (bottom)



3M	BookCheck™ Model 946	Report Number F1006003	3M
EMC Laboratory	Product Safety	7 Dec, 2006	Page 31 of 33

6.0 LIST OF TEST EQUIPMENT

The following test equipment was used to perform the indicated tests. All of the test equipment was calibrated by an accredited calibration laboratory or by the manufacturer. All calibration intervals are one year. All equipment calibrations, test procedures, and the test facility are traceable to the standards of the National Institute of Standards and Technology (NIST). The test facility site attenuation verification results fall within the normalized site attenuation (NSA) criteria for open area test sites using volumetric measurements.

FREQUENCY STABILITY / POWER OUTPUT

Advantest Spectrum Analyzer, Model R3272A, Serial No. J00233 (cal due date: 11 Sep 07)
Thermotron Environmental Chamber, Model SM-3SS, SN: 19972-S (cal due date: 27 June 07)

RADIATED EMISSIONS

ElectroMetrics Large Loop Antenna, Model ALR25M, Serial No. 603 (cal due date: 11 Sep 07)
A. H Systems Horn Antenna, Model SAS_200/571 Serial No: 234 (cal due date: 12 Sep 07)
Schaffner Biconilog Antenna, Model CBL6112B, Serial No. 27491 (cal due date: 11 Sep 07)
HP Pre-Amplifier, Model 8447D, Serial No. 2944A08064 (cal due date: 12 Sep 07)
Rohde & Schwarz EMI Receiver, Model ESIB 40, S/N 100235 (cal due date: 12 Sep 07)
Rohde & Schwarz ESIB 40 Firmware Version 4.32.3

CONDUCTED EMISSIONS

EMCO LISN, Model 3825-2, Serial No. 1039 (cal due date: 12 Sep 07)
Solar High Pass Filter, Model 8131 - 5.0 (cal due date: 30 Jun 07)
Rohde & Schwarz EMI Receiver, Model ESIB 40, S/N 100235 (cal due date: 12 Sep 07)
Rohde & Schwarz ESIB 40 Firmware Version 4.32.3

TEST FACILITY

Lindgren Semi-Anechoic Chamber, Model 11867A, serial No. 01211 (verification due date: 29 Aug 07)

The radiated and conducted emission measurements were performed in a semi-anechoic chamber located at 3M Building 76, 410 Fillmore Street, St. Paul, MN. Details concerning this site are on file with the FCC laboratory Division in Columbia Maryland.

The FCC Site Registration Number is 93334.

3M	BookCheck™ Model 946	Report Number F1006003	3M
EMC Laboratory	Product Safety	7 Dec, 2006	Page 32 of 33

7.0 LABELING INFORMATION

The FCC (Federal Communications Commission) requires the following labeling information. Since the equipment has intentional and unintentional radiators, it must be labeled as a digital device and as an intentional radiator.

Labels on the Product

The following statement shall be placed in a conspicuous location on the device:

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

FCC ID: DGFSSD946

Labels in the Manuals

The following statement shall be placed in a prominent location in the text of the user manual:

NOTE: This equipment has been tested and found to comply with the limits for a Class A digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide a reasonable protection against harmful interference when the equipment is operated in a commercial environment. This equipment generates, uses, and can radiate radio frequency energy and, if not installed and used in accordance with the instruction manual, may cause harmful interference to radio communications. Operation of this equipment in a residential area is likely to cause harmful interference in which case the user will be required to correct the interference at his/her own expense.

FCC ID: DGFSSD946

NO MODIFICATIONS. Modifications to this device shall not be made without the written consent of 3M, Company. Unauthorized modifications may void the authority granted under Federal Communications Commission Rules permitting the operation of this device.

3M	BookCheck™ Model 946	Report Number F1006003	3M
EMC Laboratory	Product Safety	7 Dec, 2006	Page 33 of 33

8.0 SIGNATURES

This page contains the secured digital signatures of the parties deemed responsible for reviewing and approving the contents of this report:

TEST ENGINEER: _____ **DATE:** Dec 7,2006

Bruce Jungwirth
3M EMC Laboratory

APPROVER: _____ **DATE:** Dec 7,2006

Steven D. Wytaske
3M EMC Laboratory

This is the last page