

ELECTROMAGNETIC EMISSION COMPLIANCE REPORT FOR LOW-POWER, NON-LICENSED TRANSMITTER

Test Report No. : W17NR-D062
AGR No. : A17NA-015
Applicant : Sennheiser Electronic Corp
Address : 1 Enterprise Drive Old Lyme Connecticut 06371 United States
Manufacturer : Sennheiser Communications A/S
Address : Industriparken 27, DK-2750 Ballerup, Denmark
Type of Equipment : In-ear headset
FCC ID. : DMOSCBT8
Model Name : SCBT8
Multiple Model Name: N/A
Serial number : N/A
Total page of Report : 81 pages (including this page)
Date of Incoming : November 06, 2017
Date of issue : November 20, 2017


SUMMARY

The equipment complies with the regulation; *FCC PART 15 SUBPART C Section 15.247*

This test report only contains the result of a single test of the sample supplied for the examination.

It is not a generally valid assessment of the features of the respective products of the mass-production.

Reviewed by: 
Jae-Ho Lee / Chief Engineer
ONETECH Corp.

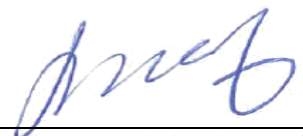Approved by: 
Keun-Young, Choi / Vice President
ONETECH Corp.

CONTENTS

	PAGE
1. VERIFICATION OF COMPLIANCE	6
2. TEST SUMMARY	7
2.1 TEST ITEMS AND RESULTS	7
2.2 ADDITIONS, DEVIATIONS, EXCLUSIONS FROM STANDARDS	7
2.3 RELATED SUBMITTAL(S) / GRANT(S)	7
2.4 PURPOSE OF THE TEST	7
2.5 TEST METHODOLOGY	7
2.6 TEST FACILITY	8
3. GENERAL INFORMATION	9
3.1 PRODUCT DESCRIPTION	9
3.2 ALTERNATIVE TYPE(S)/MODEL(S); ALSO COVERED BY THIS TEST REPORT	9
4. EUT MODIFICATIONS	9
5. SYSTEM TEST CONFIGURATION	10
5.1 JUSTIFICATION	10
5.2 PERIPHERAL EQUIPMENT	10
5.3 MODE OF OPERATION DURING THE TEST	11
5.4 CONFIGURATION OF TEST SYSTEM	11
5.5 ANTENNA REQUIREMENT	11
6. PRELIMINARY TEST	12
6.1 AC POWER LINE CONDUCTED EMISSIONS TESTS	12
6.2 GENERAL RADIATED EMISSIONS TESTS	12
7. MINIMUM 20 DB BANDWIDTH	13
7.1 OPERATING ENVIRONMENT	13
7.2 TEST SET-UP	13
7.3 TEST EQUIPMENT USED	13
7.4 TEST DATA FOR 1 MBPS	14
7.5 TEST DATA FOR 2 MBPS	16
7.6 TEST DATA FOR 3 MBPS	18
8. HOPPING FREQUENCY SEPARATION	20
8.1 OPERATING ENVIRONMENT	20
8.2 TEST SET-UP	20
8.3 TEST EQUIPMENT USED	20

8.4 TEST DATA FOR 1 MBPS	21
8.5 TEST DATA FOR 2 MBPS	22
8.6 TEST DATA FOR 3 MBPS	23
9. NUMBER OF HOPPING CHANNELS	24
9.1 OPERATING ENVIRONMENT	24
9.2 TEST SET-UP	24
9.3 TEST EQUIPMENT USED	24
9.4 TEST DATA FOR 1 MBPS	25
9.5 TEST DATA FOR 2 MBPS	28
9.6 TEST DATA FOR 3 MBPS	31
10. TIME OF OCCUPANCY	34
10.1 OPERATING ENVIRONMENT	34
10.2 TEST SET-UP	34
10.3 TEST EQUIPMENT USED	34
10.4 TEST DATA FOR 1 MBPS	35
10.5 TEST DATA FOR 2 MBPS	38
10.6 TEST DATA FOR 3 MBPS	41
11. MAXIMUM PEAK OUTPUT POWER	44
11.1 OPERATING ENVIRONMENT	44
11.2 TEST SET-UP	44
11.3 TEST EQUIPMENT USED	44
11.4 TEST DATA FOR 1 MBPS	45
11.5 TEST DATA FOR 2 MBPS	47
11.6 TEST DATA FOR 3 MBPS	49
12. 100 KHZ BANDWIDTH OUTSIDE THE FREQUENCY BAND.....	51
12.1 OPERATING ENVIRONMENT	51
12.2 TEST SET-UP FOR CONDUCTED MEASUREMENT	51
12.3 TEST SET-UP FOR RADIATED MEASUREMENT.....	51
12.4 TEST EQUIPMENT USED	51
12.5 TEST DATA FOR CONDUCTED EMISSION	52
12.5.1 Test data for 1 Mbps	52
12.5.2 Test data for 2 Mbps	58
12.5.3 Test data for 3 Mbps	64
12.6 TEST DATA FOR TRANSMITTING & CHARGING MODE RADIATED EMISSION	70
12.6.1 Radiated Emission which fall in the Restricted Band.....	70
12.6.2 Spurious & Harmonic Radiated Emission above 1 GHz.....	73

13. RADIATED EMISSION	76
13.1 OPERATING ENVIRONMENT	76
13.2 TEST SET-UP	76
13.3 TEST EQUIPMENT USED	76
13.4 TEST DATA TRANSMITTING & CHARGING MODE.....	77
<i>13.4.1 Test Data for 30 MHz ~ 1 000 MHz.....</i>	<i>77</i>
<i>13.4.2 Test Data for Below 30 MHz</i>	<i>78</i>
<i>13.4.3 Test Data for above 1 GHz</i>	<i>78</i>
14. CONDUCTED EMISSION TEST.....	79
14.1 OPERATING ENVIRONMENT	79
14.2 TEST SET-UP	79
14.3 TEST EQUIPMENT USED	79
14.4 TEST DATA FOR TRANSMITTING & CHARGING MODE.....	80

Revision History

Issued Report No.	Issued Date	Revisions	Effect Section
W17NR-D062	November 20, 2017	Initial Issue	All

1. VERIFICATION OF COMPLIANCE

APPLICANT : Sennheiser Electronic Corp
 ADDRESS : 1 Enterprise Drive Old Lyme Connecticut 06371 United States
 CONTACT PERSON : Michael Lieske
 TELEPHONE NO : 860-434-9190
 FCC ID : DMOSCBT8
 MODEL NAME : SCBT8
 SERIAL NUMBER : N/A
 DATE : November 20, 2017

EQUIPMENT CLASS	<i>DSS – PART 15 SPREAD SPECTRUM TRANSMITTER</i>
KIND OF EQUIPMENT	In-ear headset
THIS REPORT CONCERNS	Original Grant
MEASUREMENT PROCEDURES	ANSI C63.10: 2013
TYPE OF EQUIPMENT TESTED	Pre-Production
KIND OF EQUIPMENT AUTHORIZATION REQUESTED	Certification
EQUIPMENT WILL BE OPERATED UNDER FCC RULES PART(S)	FCC PART 15 SUBPART C Section 15.247
MODIFICATIONS ON THE EQUIPMENT TO ACHIEVE COMPLIANCE	None
FINAL TEST WAS CONDUCTED ON	3 m Semi Anechoic Chamber

-. The above equipment was tested by ONETECH Corp. for compliance with the requirement set forth in the FCC Rules and Regulations. This said equipment in the configuration described in this report, shows the maximum emission levels emanating from equipment are within the compliance requirements.

2. TEST SUMMARY

2.1 Test items and results

SECTION	TEST ITEMS	RESULTS
15.247 (a) (1)	Carrier Frequency Separation	Met the Limit / PASS
15.247 (a) (1) (iii)	Minimum Number of Hopping Channels	Met the Limit / PASS
15.247 (a) (1) (iii)	Average Time of Occupancy	Met the Limit / PASS
15.247 (b) (1)	Maximum Peak Conducted Output Power	Met the Limit / PASS
15.247 (d)	100 kHz Bandwidth Outside the Frequency Band	Met the Limit / PASS
15.247 (d)	Radiated Emission which fall in the Restricted Band	Met the Limit / PASS
15.209	Radiated Emission Limits, General Requirement	Met the Limit / PASS
15.207	Conducted Limits	Met the Limit / PASS
15.203	Antenna Requirement	Met requirement / PASS

2.2 Additions, deviations, exclusions from standards

No additions, deviations or exclusions have been made from standard.

2.3 Related Submittal(s) / Grant(s)

Original submittal only

2.4 Purpose of the test

To determine whether the equipment under test fulfills the requirements of the regulation stated in FCC PART 15 SUBPART C Section 15.247

2.5 Test Methodology

Both conducted and radiated testing was performed according to the procedures in ANSI C63.10: 2013. Radiated testing was performed at a distance of 3 m from EUT to the antenna.

2.6 Test Facility

The Onetech Corp. has been designated to perform equipment testing in compliance with ISO/IEC 17025.

The Electromagnetic compatibility measurement facilities are located at 43-14, Jinsaegol-gil, Chowol-eup, Gwangju-si, Gyeonggi-do, 12735, Korea

-. Site Filing:

VCCI (Voluntary Control Council for Interference) – Registration No. R-4112/ C-14617/ G-10666 / T-1842

IC (Industry Canada) – Registration No. Site# 3736A-3

-. Site Accreditation:

KOLAS (Korea Laboratory Accreditation Scheme) - Accreditation NO. KT085

FCC (Federal Communications Commission) - Accreditation No. KR0013

RRA (Radio Research Agency) – Designation No. KR0013

3. GENERAL INFORMATION

3.1 Product Description

The Sennheiser Electronic Corp, Model SCBT8 (referred to as the EUT in this report) is an In-ear headset. The product specification described herein was obtained from product data sheet or user’s manual.

DEVICE TYPE	In-ear headset	
OPERATING FREQUENCY	2 402 MHz ~ 2 480 MHz	
RF OUTPUT POWER	1 Mbps	7.57 dBm
	2 Mbps	6.27 dBm
	3 Mbps	6.41 dBm
NUMBER OF CHANNEL	79 Channels	
MODULATION TYPE	GFSK for 1 Mbps, $\pi/4$ -DQPSK for 2 Mbps, 8-DPSK for 3 Mbps	
ANTENNA TYPE	PCB Flex Antenna	
ANTENNA GAIN	1.7 dBi	
LIST OF EACH OSC. OR CRYSTAL. FREQ.(FREQ. \geq 1 MHz)	26 MHz	
RATED SUPPLY VOLTAGE	DC 3.7 V	

3.2 Alternative type(s)/model(s); also covered by this test report.

-. None

4. EUT MODIFICATIONS

-. None

5. SYSTEM TEST CONFIGURATION

5.1 Justification

This device was configured for testing in a typical way as a normal customer is supposed to be used. During the test, the following components were installed inside of the EUT.

DEVICE TYPE	MANUFACTURER	MODEL/PART NUMBER	FCC ID
Main Board	N/A	N/A	N/A
Battery	N/A	AHB421133PA-03	N/A
Antenna	N/A	N/A	N/A

5.2 Peripheral equipment

Model	Manufacturer	Description	Connected to
20091	Lenovo	Notebook PC	EUT
ADP-120LH B	DELTA ELECTRONICS(JIANGSU) LTD.	Adapter	Notebook PC

5.3 Mode of operation during the test

For Bluetooth function testing, software used to control the EUT for staying in continuous transmitting and receiving mode is programmed. The EUT was set at Low Channel (2 402 MHz), Middle Channel (2 441 MHz), and High Channel (2 480 MHz) with each data transfer rate, 1 Mbps, 2 Mbps, and 3 Mbps. To get a maximum radiated emission levels from the EUT, the EUT was moved throughout the XY, XZ, and YZ planes and the worst case is “XZ” axis, but the worst data was recorded in this test report.

5.4 Configuration of Test System

Line Conducted Test: The EUT was tested in Transmitting & Charging mode. The EUT was connected to USB and the power of USB was connected to Notebook PC. All supporting equipments were connected to another LISN. Preliminary Power line Conducted Emission test was performed by using the procedure in ANSI C63.10: 2013 to determine the worse operating conditions.

Radiated Emission Test: The EUT was tested in Transmitting & Charging mode. Preliminary radiated emissions test were conducted using the procedure in ANSI C63.10: 2013 to determine the worse operating conditions. Final radiated emission tests were conducted at 3 m Semi Anechoic Chamber.

The turntable was rotated through 360 degrees and the EUT was tested by positioned three orthogonal planes to obtain the highest reading on the field strength meter. Once maximum reading was determined, the search antenna was raised and lowered in both vertical and horizontal polarization.

5.5 Antenna Requirement

For intentional device, according to section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

Antenna Construction:

The transmitter antenna of the EUT is a PCB Flex Antenna, so no consideration of replacement by the user.

6. PRELIMINARY TEST

6.1 AC Power line Conducted Emissions Tests

During Preliminary Tests, the following operating mode was investigated

Operation Mode	The Worse operating condition (Please check one only)
Transmitting & Charging mode	X

6.2 General Radiated Emissions Tests

During Preliminary Tests, the following operating modes were investigated

Operation Mode	The Worse operating condition (Please check one only)
Transmitting & Charging mode	X


7. MINIMUM 20 dB BANDWIDTH

7.1 Operating environment

Temperature : 23 °C
 Relative humidity : 48 % R.H.

7.2 Test set-up

The antenna output of the EUT was connected to the spectrum analyzer. The resolution bandwidth is set to 10 kHz, and peak detection was used. The 20 dB bandwidth is defined as the total spectrum over which the power is higher than the peak power minus 20 dB.

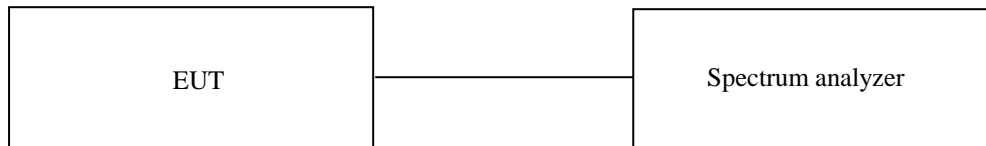

7.3 Test equipment used

Model Number	Manufacturer	Description	Serial Number	Last Cal.
■ - FSV30	Rohde & Schwarz	Signal Analyzer	101200	Oct.26, 2017 (1Y)


All test equipment used is calibrated on a regular basis.


7.4 Test data for 1 Mbps

- Test Date : November 07, 2017


CHANNEL	FREQUENCY (MHz)	20 dB Bandwidth (kHz)
Low	2 402	761.20
Middle	2 441	761.20
High	2 480	761.20

Tested by: Ju Yun Park / Engineer

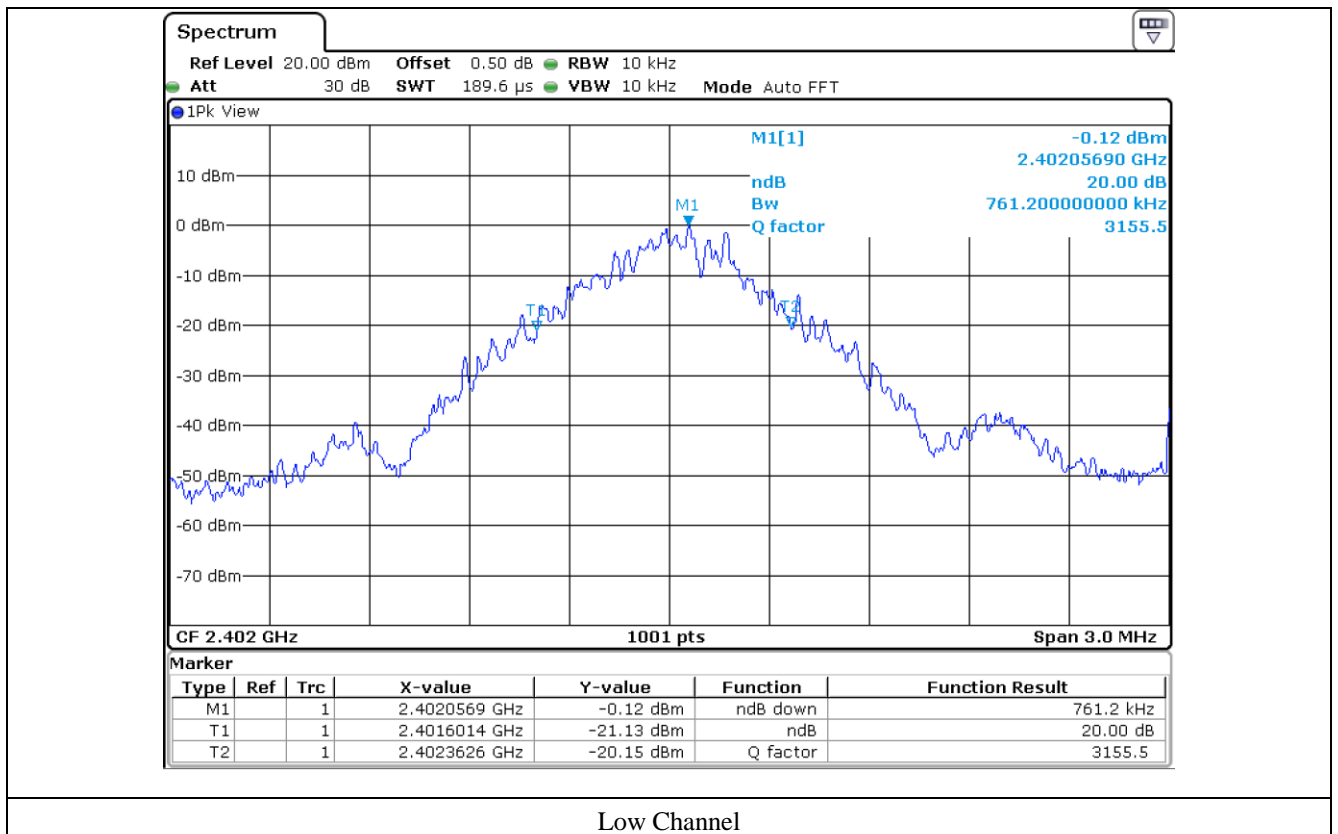

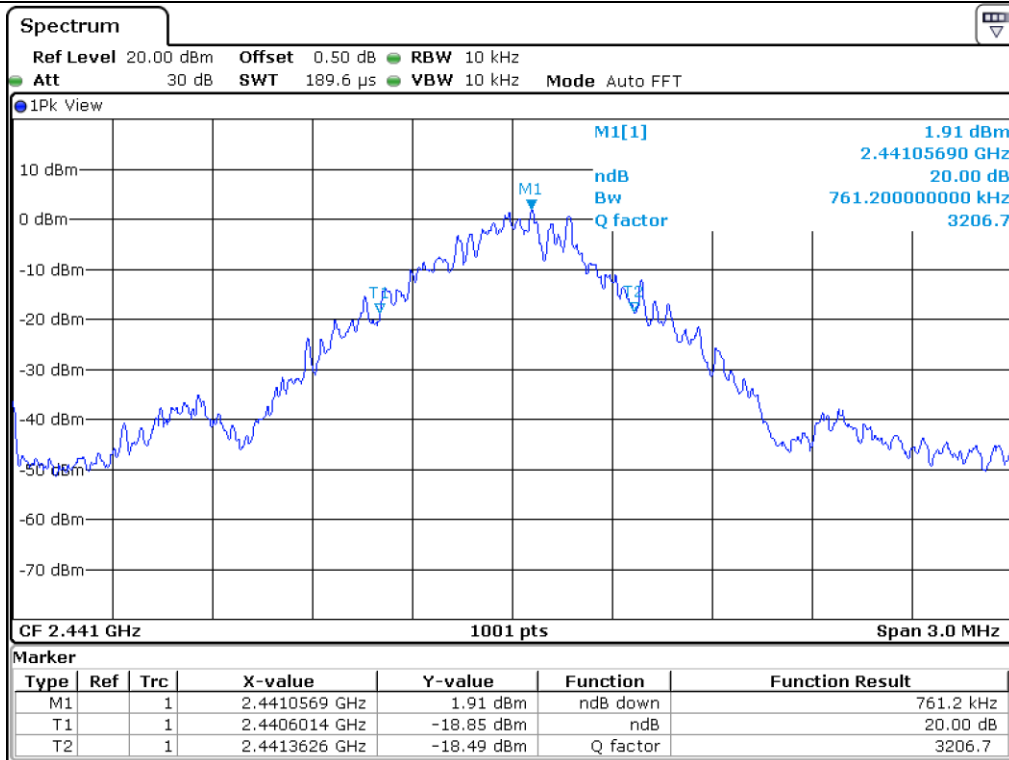

Middle Channel

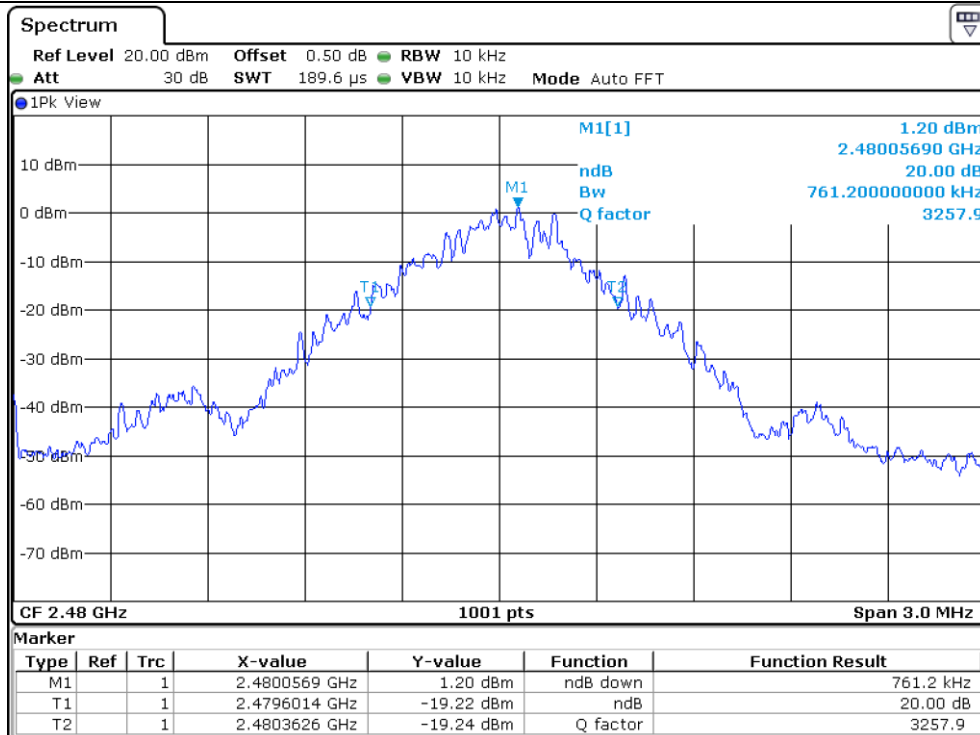


High Channel

7.5 Test data for 2 Mbps


-. Test Date : November 07, 2017

CHANNEL	FREQUENCY (MHz)	20 dB Bandwidth (kHz)
Low	2 402	1 206.80
Middle	2 441	1 210.80
High	2 480	1 210.80


Tested by: Ju Yun Park / Engineer

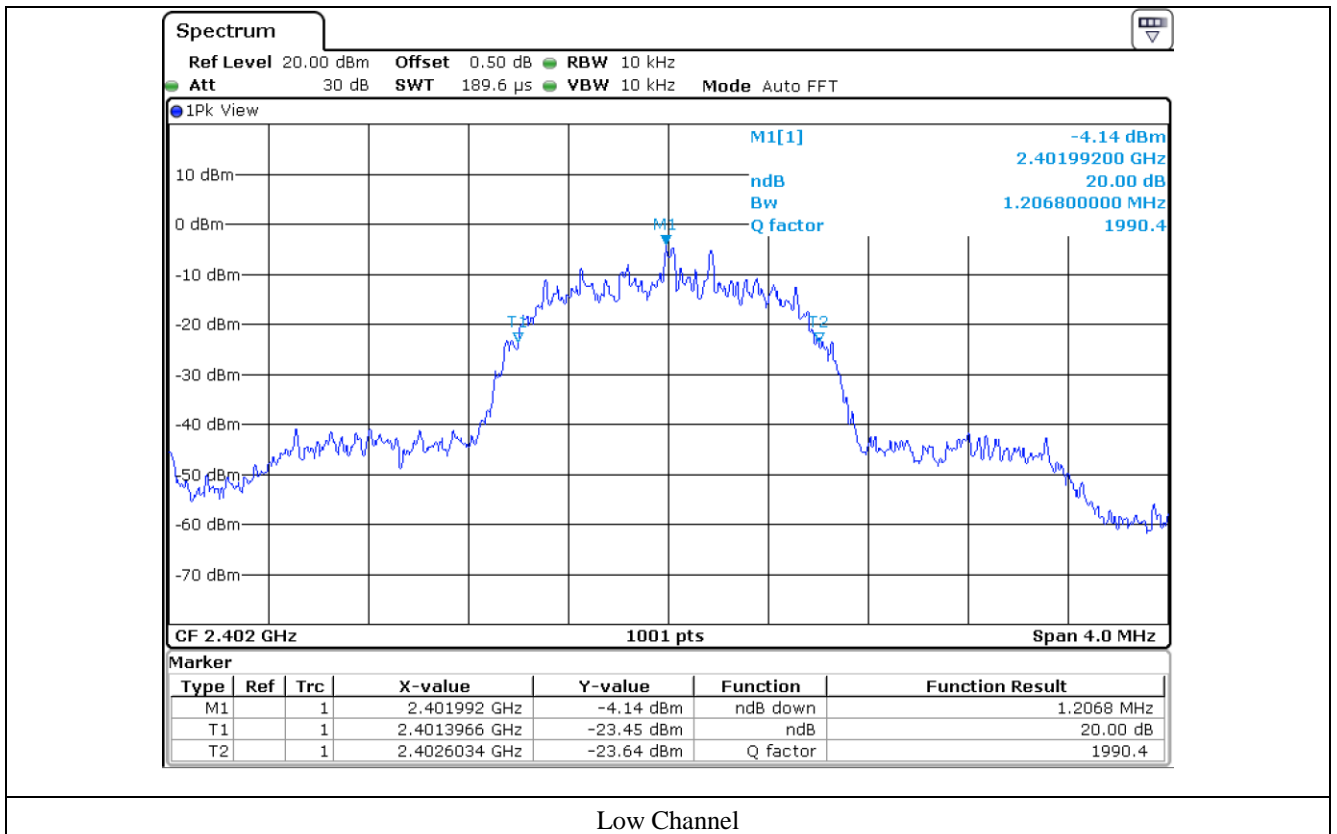

Low Channel

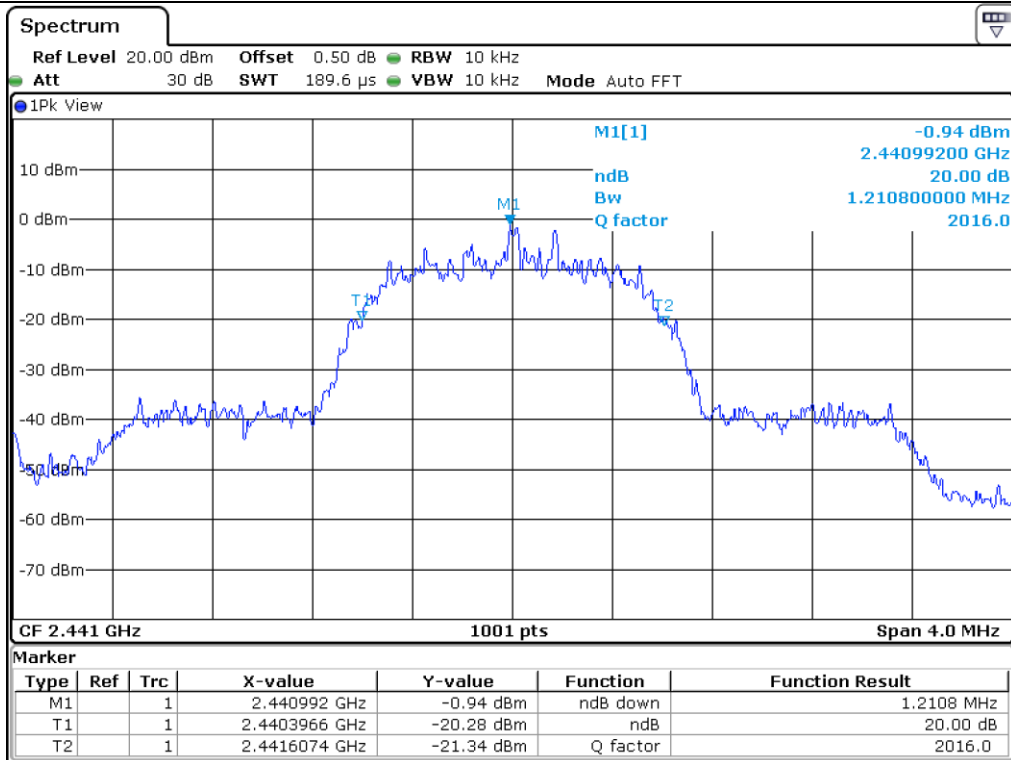

Middle Channel

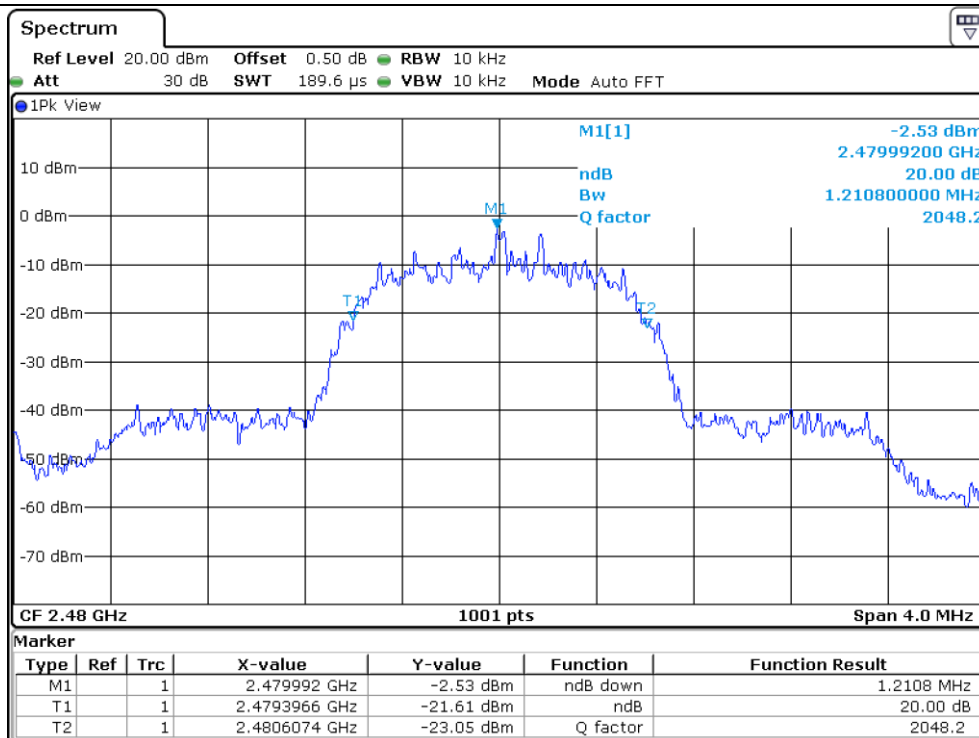


High Channel


7.6 Test data for 3 Mbps

-. Test Date : November 07, 2017


CHANNEL	FREQUENCY (MHz)	20 dB Bandwidth (kHz)
Low	2 402	1 262.70
Middle	2 441	1 266.70
High	2 480	1 266.70

Tested by: Ju Yun Park / Engineer

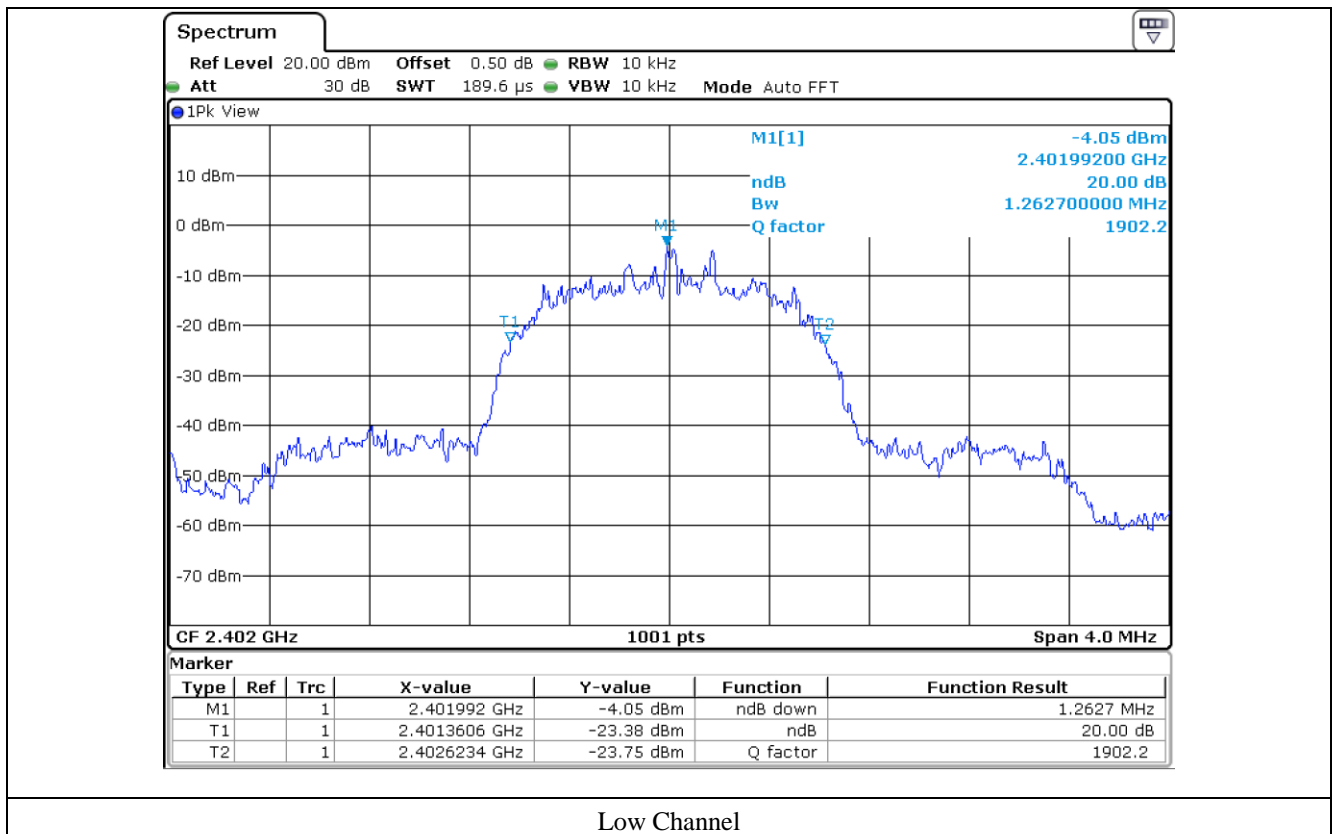

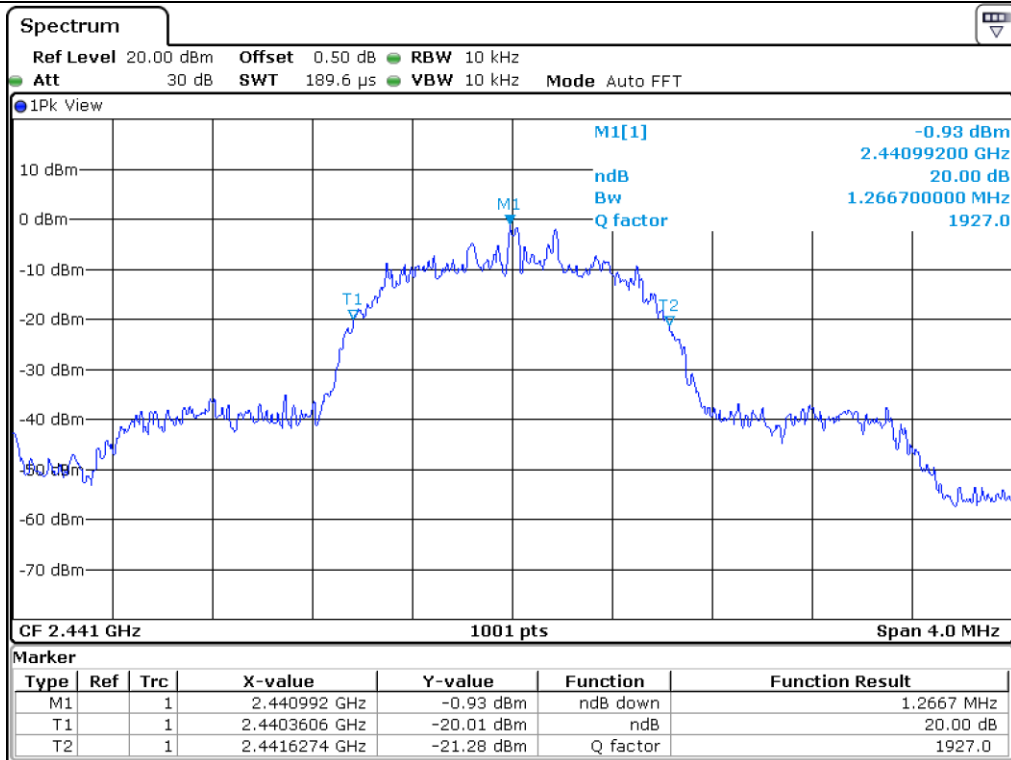

Middle Channel

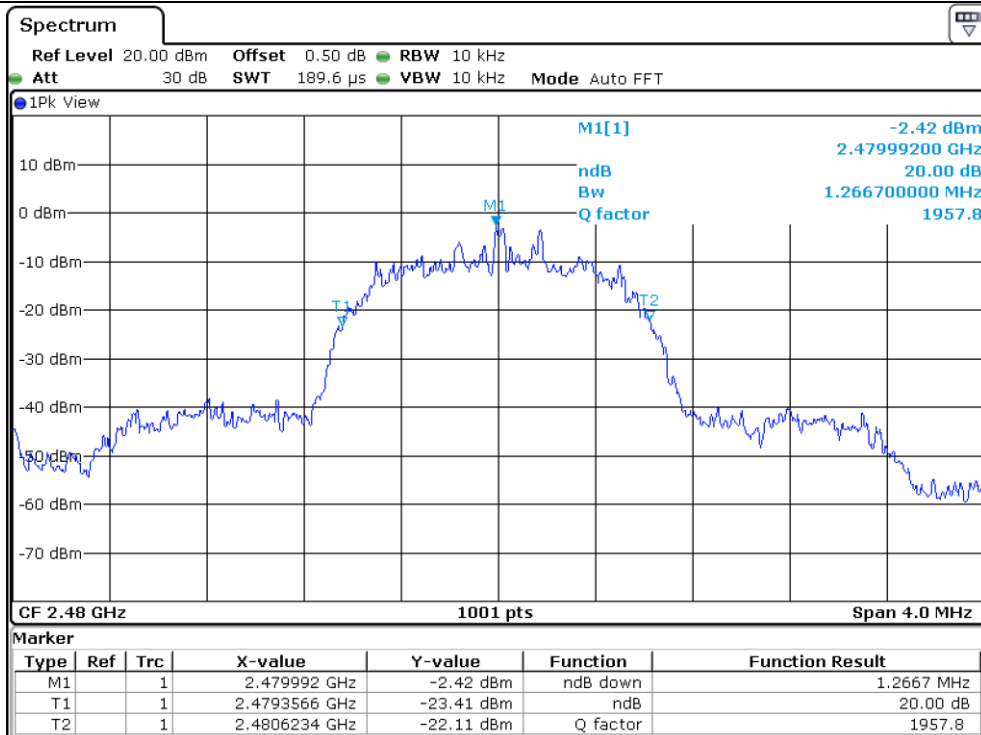

High Channel


8. HOPPING FREQUENCY SEPARATION

8.1 Operating environment

Temperature : 23 °C
 Relative humidity : 48 % R.H.

8.2 Test set-up

The antenna output of the EUT was connected to the spectrum analyzer. The frequency span is set to 5 MHz. The analyzer is set to peak hold then a pseudo-random hopping sequence of the transmitter is captured. The mark delta function was used to measure the frequency separation between two adjacent hopping channels.

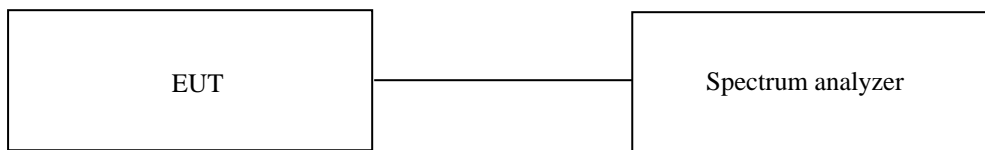

8.3 Test equipment used

Model Number	Manufacturer	Description	Serial Number	Last Cal.
■ - FSV30	Rohde & Schwarz	Signal Analyzer	101200	Oct.26, 2017 (1Y)

All test equipment used is calibrated on a regular basis.

8.4 Test data for 1 Mbps


- Test Date : November 07, 2017

- Test Result : Pass

MEASURED VLAUE (kHz)	Two-third of 20 dB Bandwidth (kHz)	LIMIT
999.00	507.47	Separated by a minimum of 25 kHz



Tested by: Ju Yun Park / Engineer

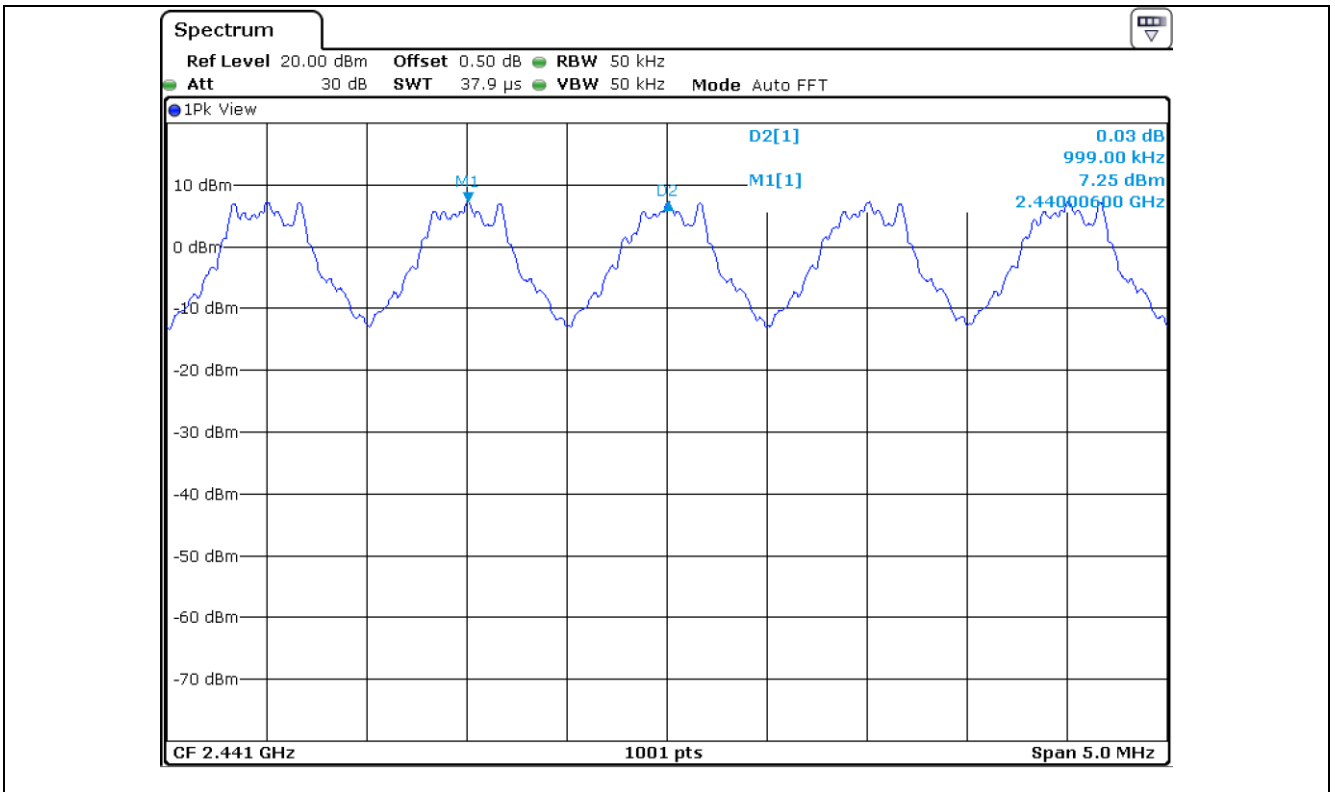


8.5 Test data for 2 Mbps

- Test Date : November 07, 2017

- Test Result : Pass

MEASURED VLAUE (kHz)	Two-third of 20 dB Bandwidth (kHz)	LIMIT
999.00	807.20	Separated by a minimum of 25 kHz

Tested by: Ju Yun Park / Engineer

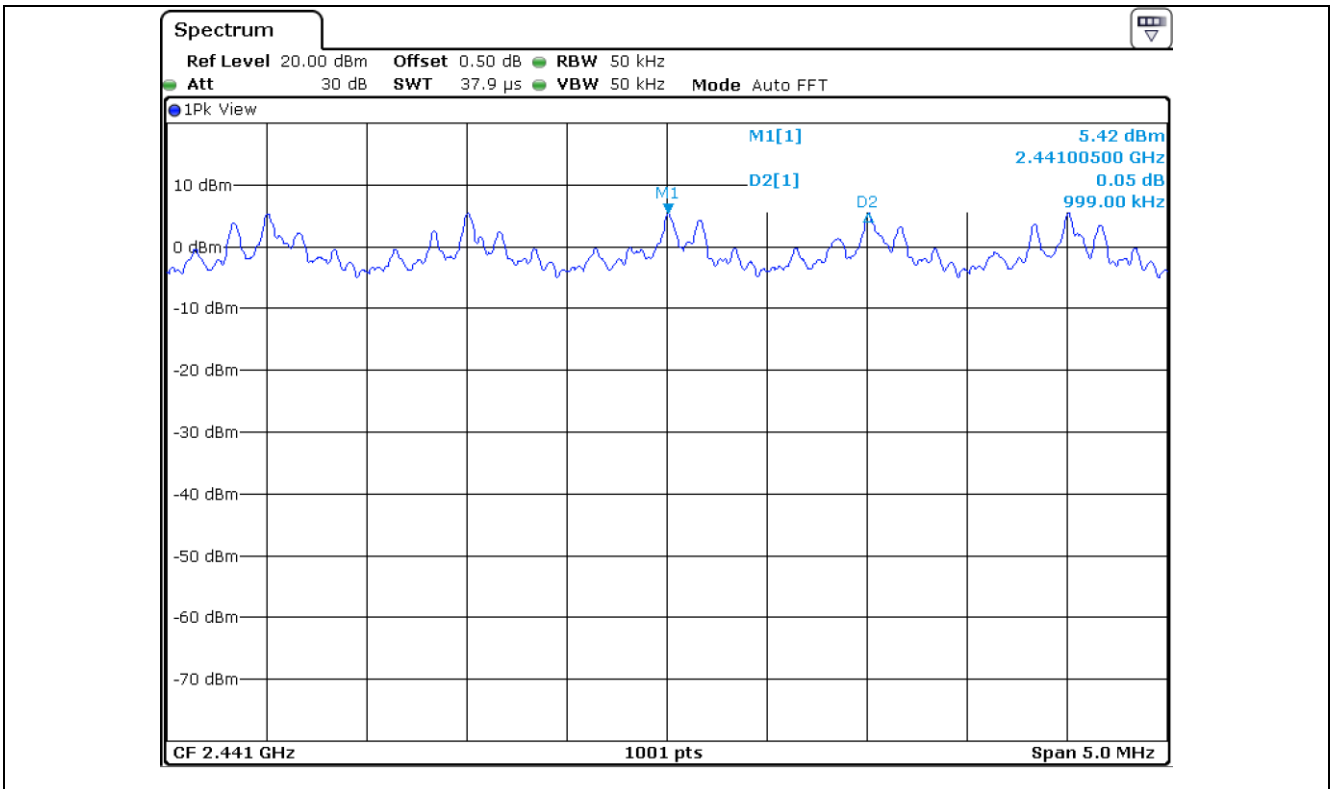


8.6 Test data for 3 Mbps

- Test Date : November 07, 2017

- Test Result : Pass

MEASURED VLAUE (kHz)	Two-third of 20 dB Bandwidth (kHz)	LIMIT
999.00	844.47	Separated by a minimum of 25 kHz

Tested by: Ju Yun Park / Engineer

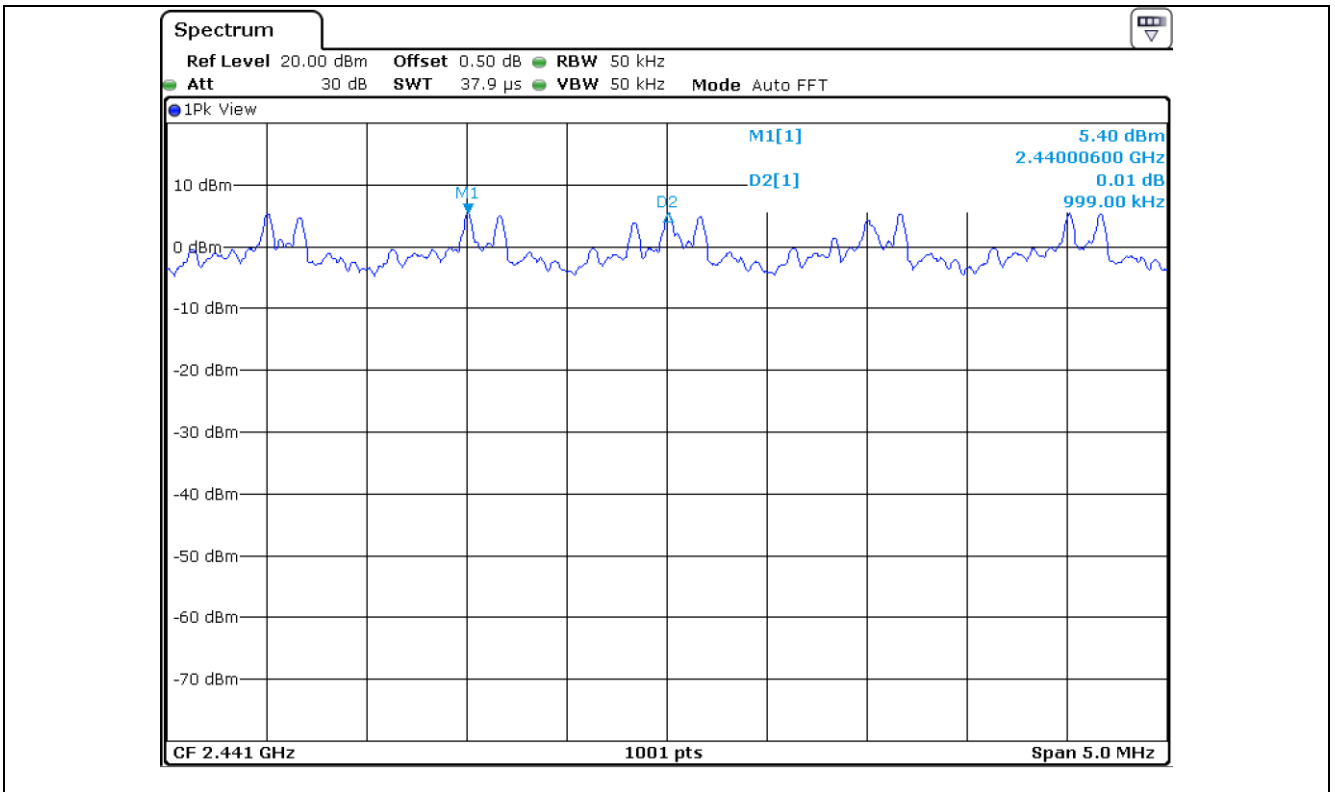


9. NUMBER OF HOPPING CHANNELS

9.1 Operating environment

Temperature : 23 °C
 Relative humidity : 48 % R.H.

9.2 Test set-up

The antenna output of the EUT was connected to the spectrum analyzer. The frequency span is set to frequency band of operation and the resolution bandwidth is set to 100 kHz. The analyzer is set to peak hold and then complete pseudo-random hopping sequence of the transmitter is captured.

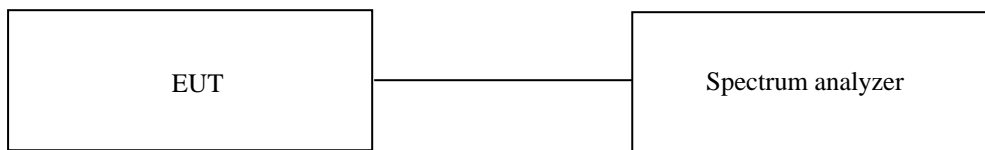

9.3 Test equipment used

Model Number	Manufacturer	Description	Serial Number	Last Cal.
■ - FSV30	Rohde & Schwarz	Signal Analyzer	101200	Oct.26, 2017 (1Y)

All test equipment used is calibrated on a regular basis.


9.4 Test data for 1 Mbps


- Test Date : November 07, 2017
- Test Result : Pass

Data Transfer Rate	Measured value (Number)	Limit (Number)	Margin (Number)
1 Mbps	79	Minimum of 15	64




Tested by: Ju Yun Park / Engineer

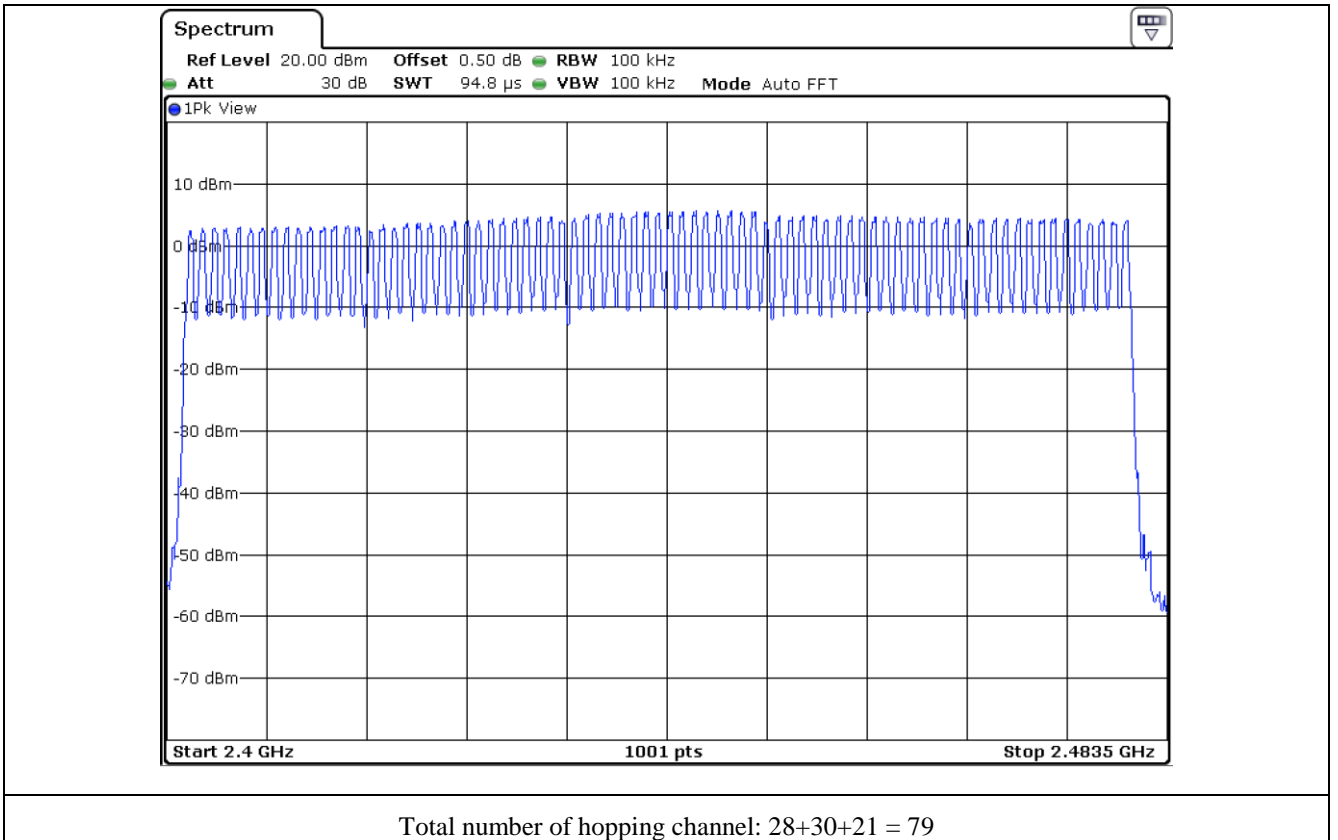


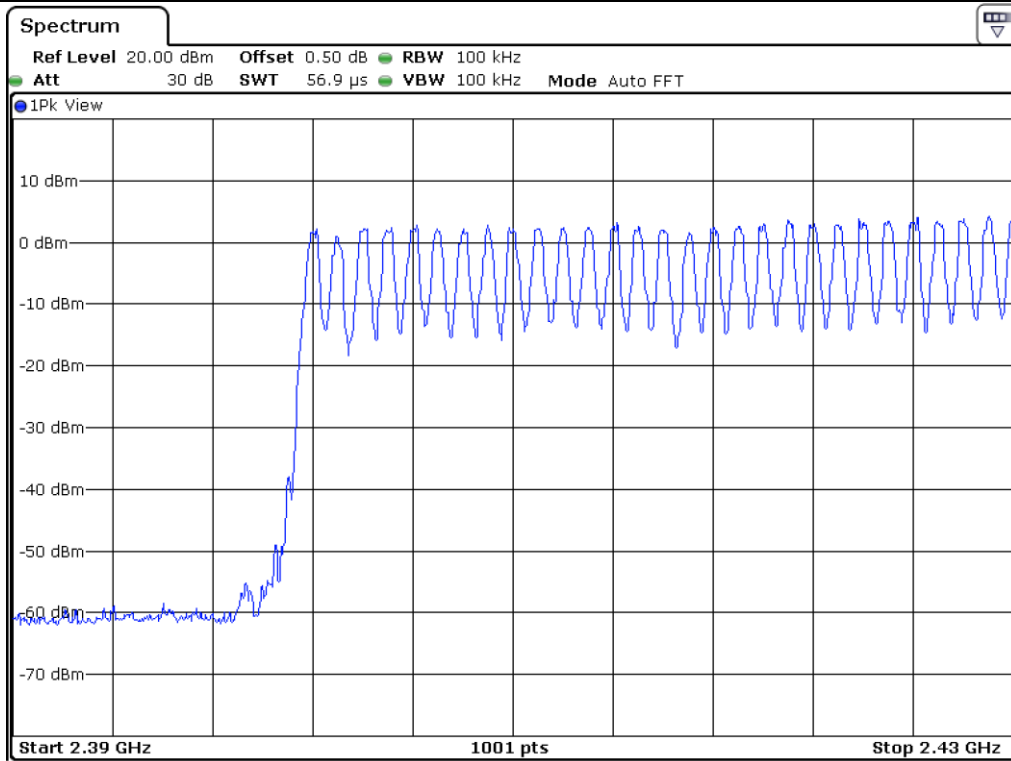

Number of hopping channel: 28

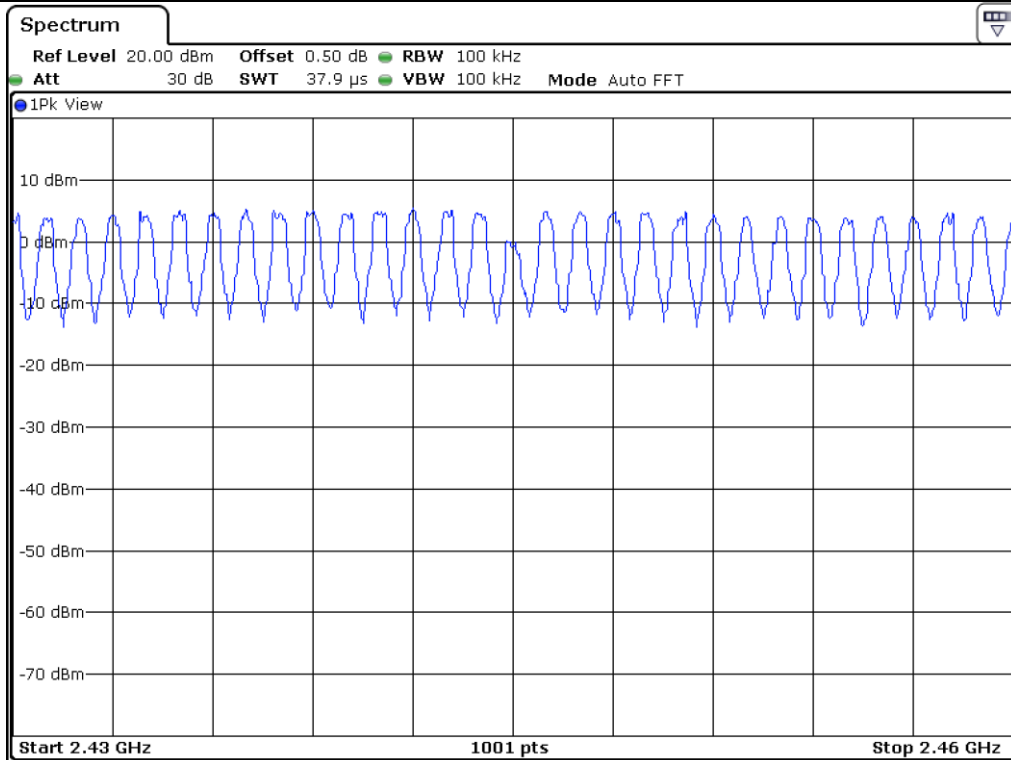


Number of hopping channel: 30

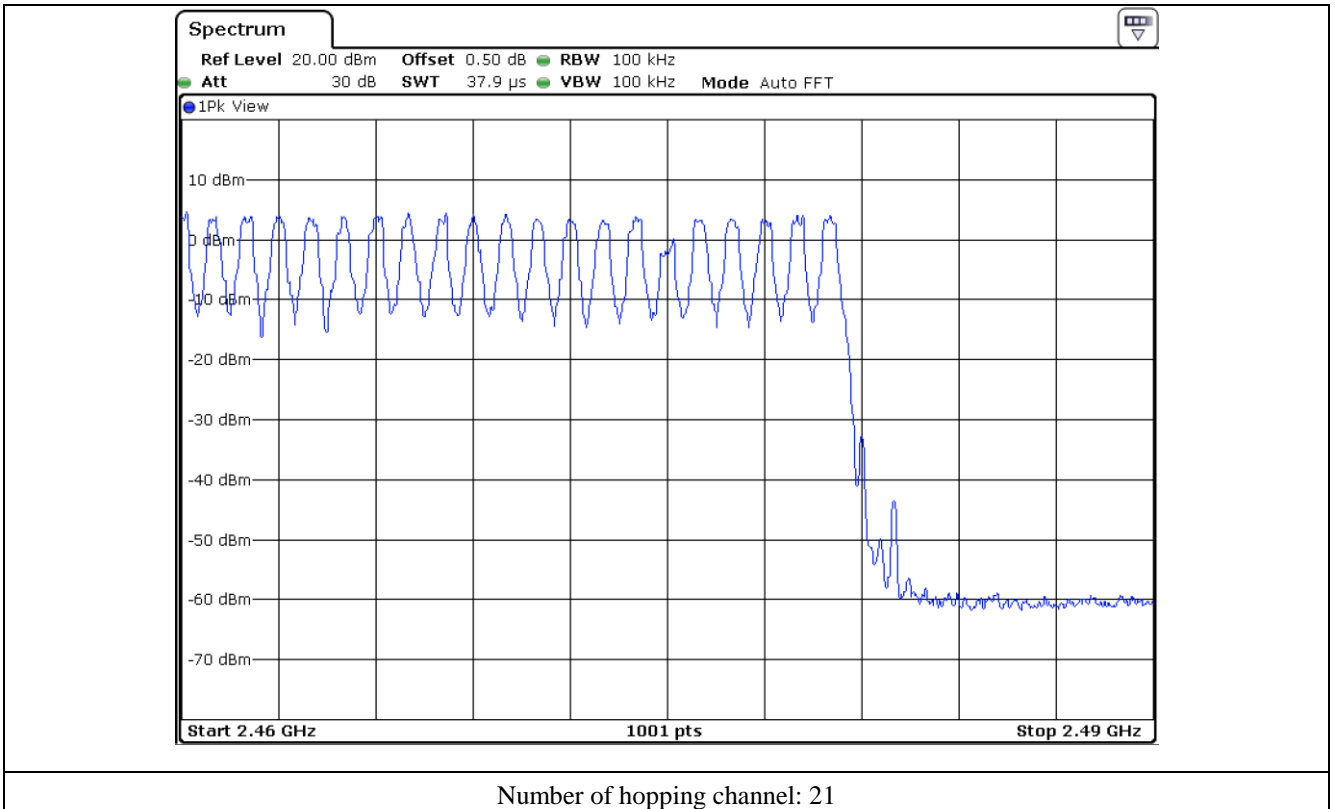


9.5 Test data for 2 Mbps


- Test Date : November 07, 2017
- Test Result : Pass

Data Transfer Rate	Measured value (Number)	Limit (Number)	Margin (Number)
2 Mbps	79	Minimum of 15	64




Tested by: Ju Yun Park / Engineer

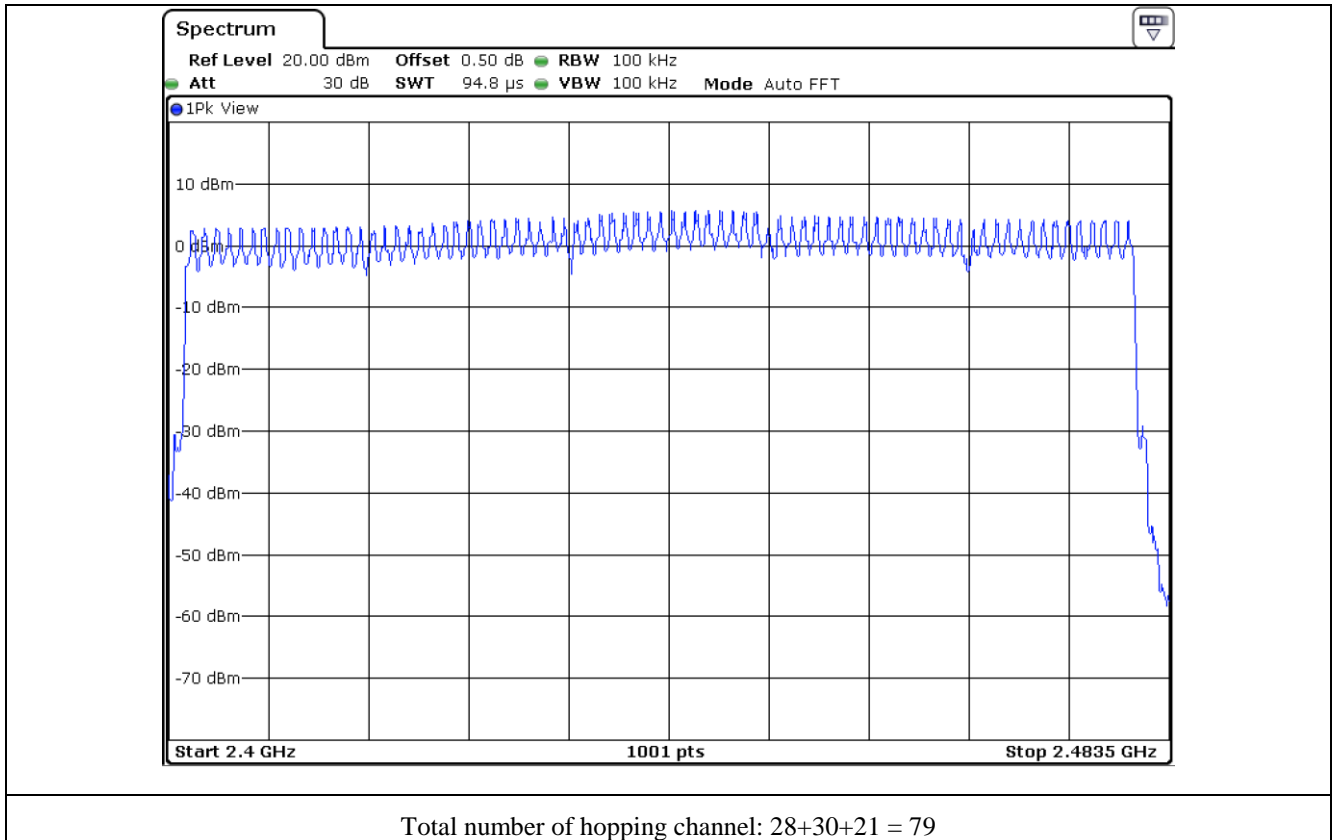


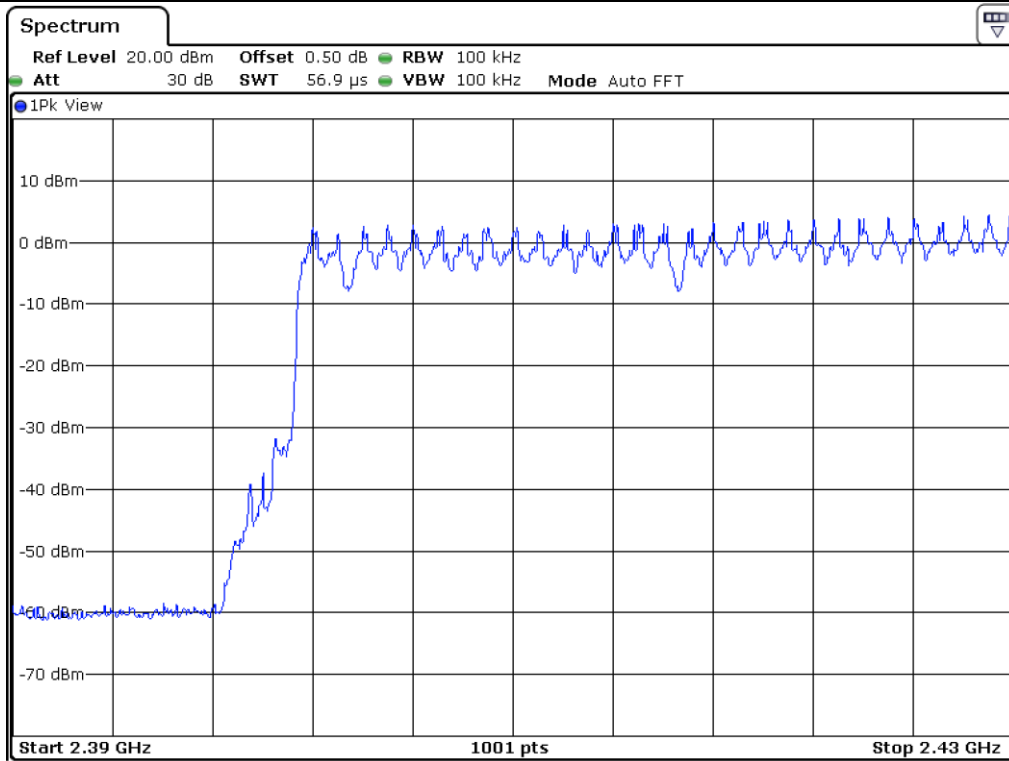

Number of hopping channel: 28

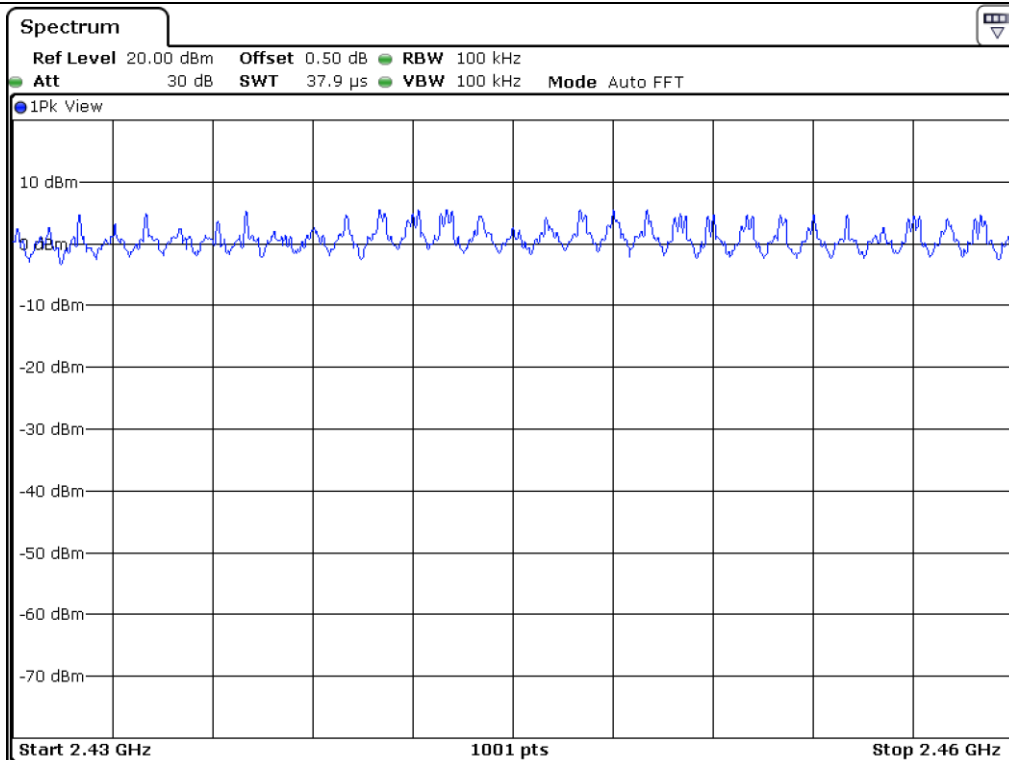

Number of hopping channel: 30

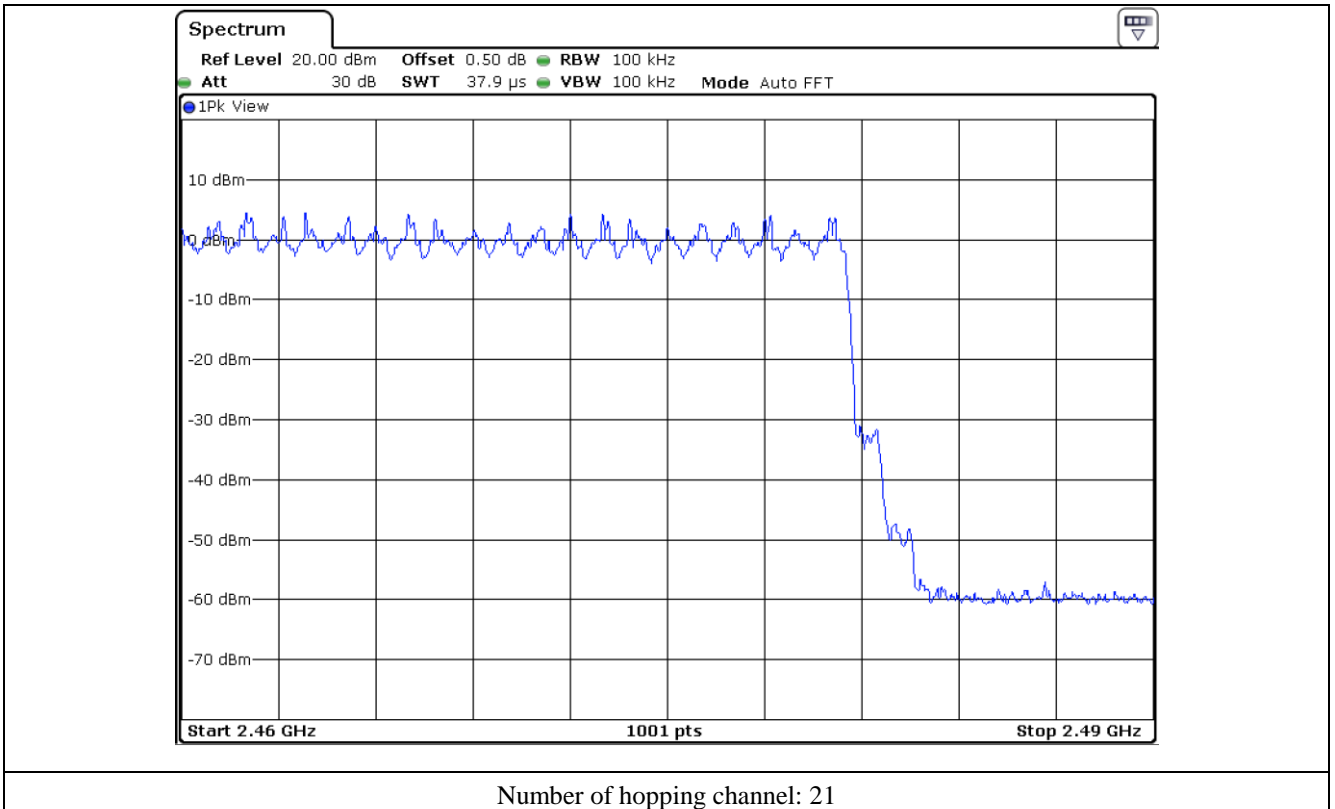


9.6 Test data for 3 Mbps


- Test Date : November 07, 2017
- Test Result : Pass

Data Transfer Rate	Measured value (Number)	Limit (Number)	Margin (Number)
3 Mbps	79	Minimum of 15	64




Tested by: Ju Yun Park / Engineer

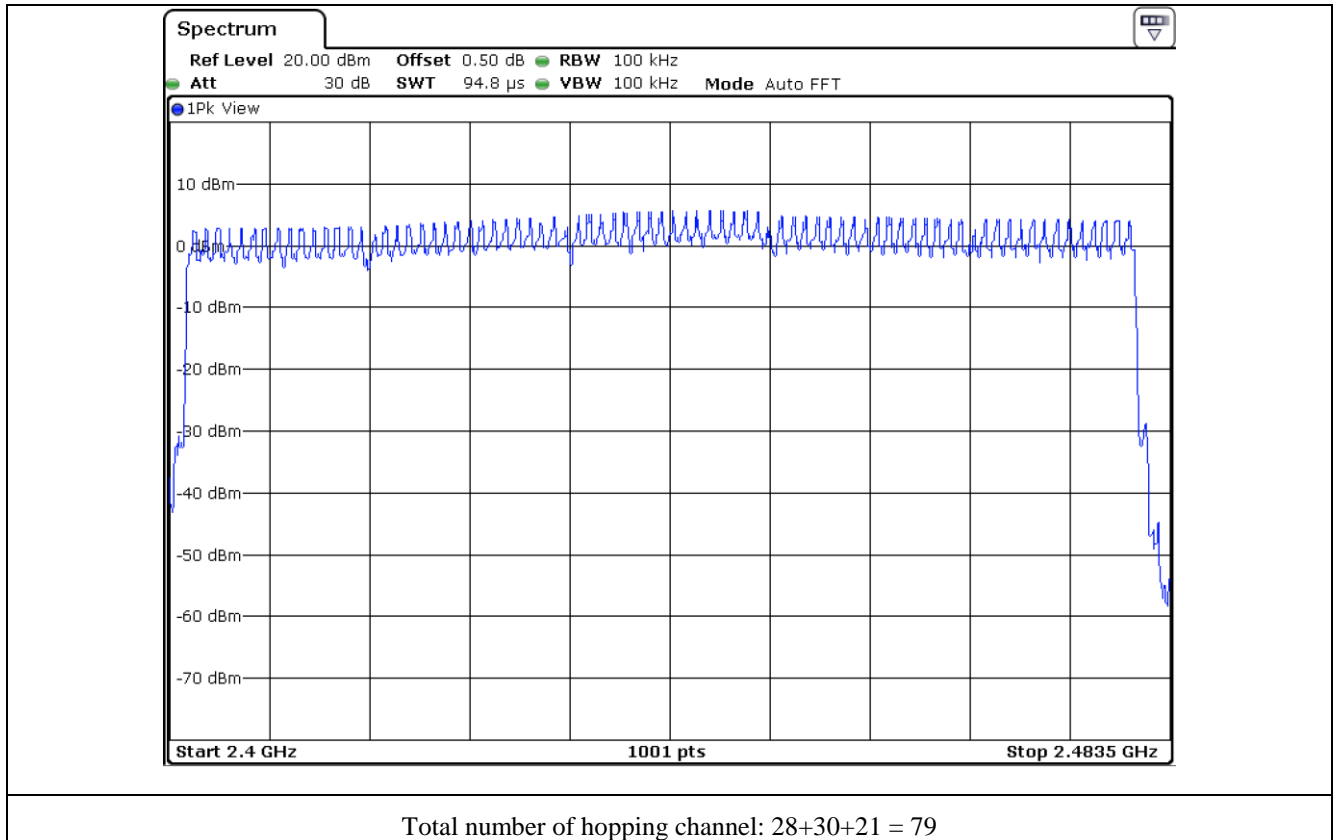


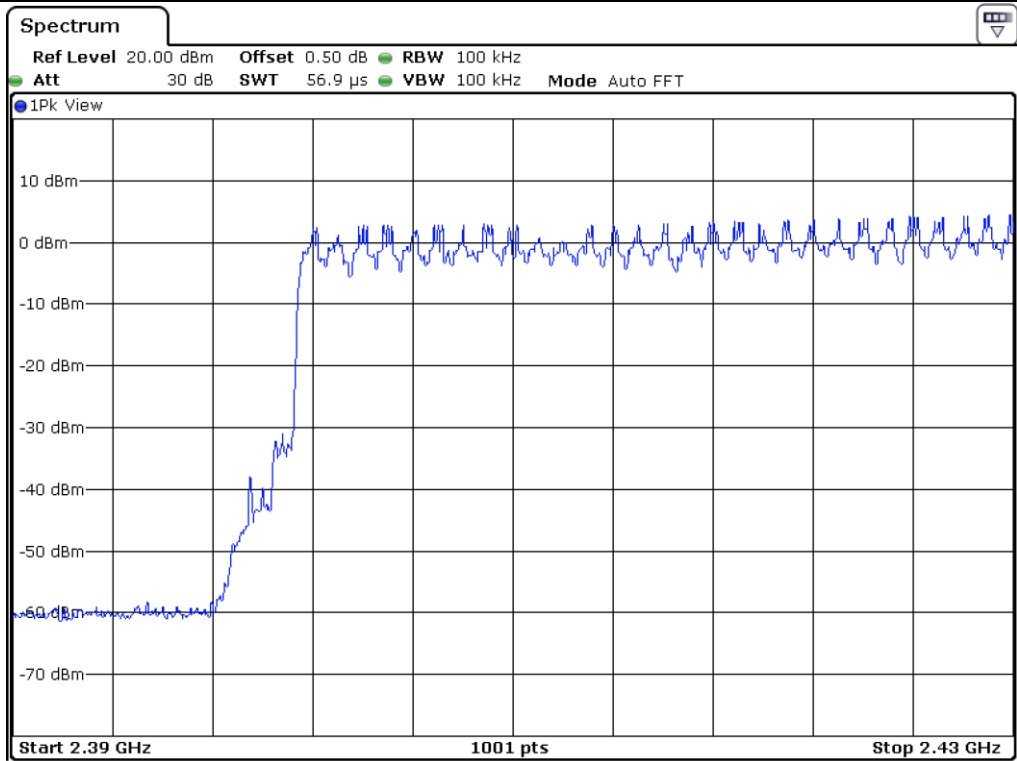

Number of hopping channel: 28

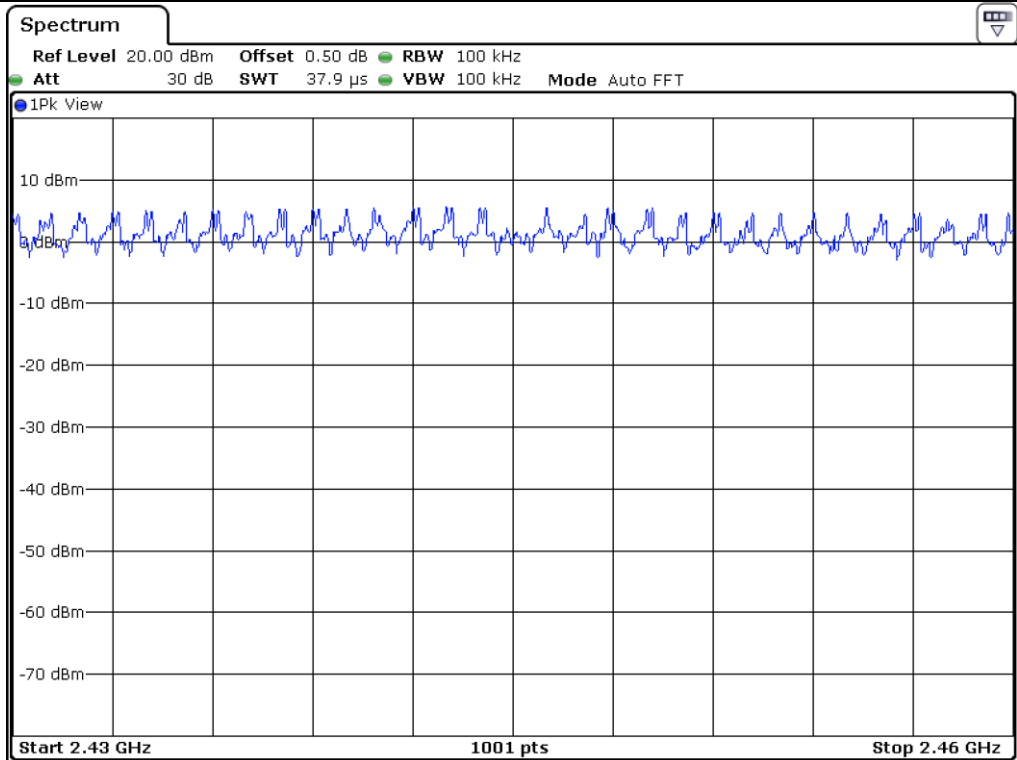

Number of hopping channel: 30

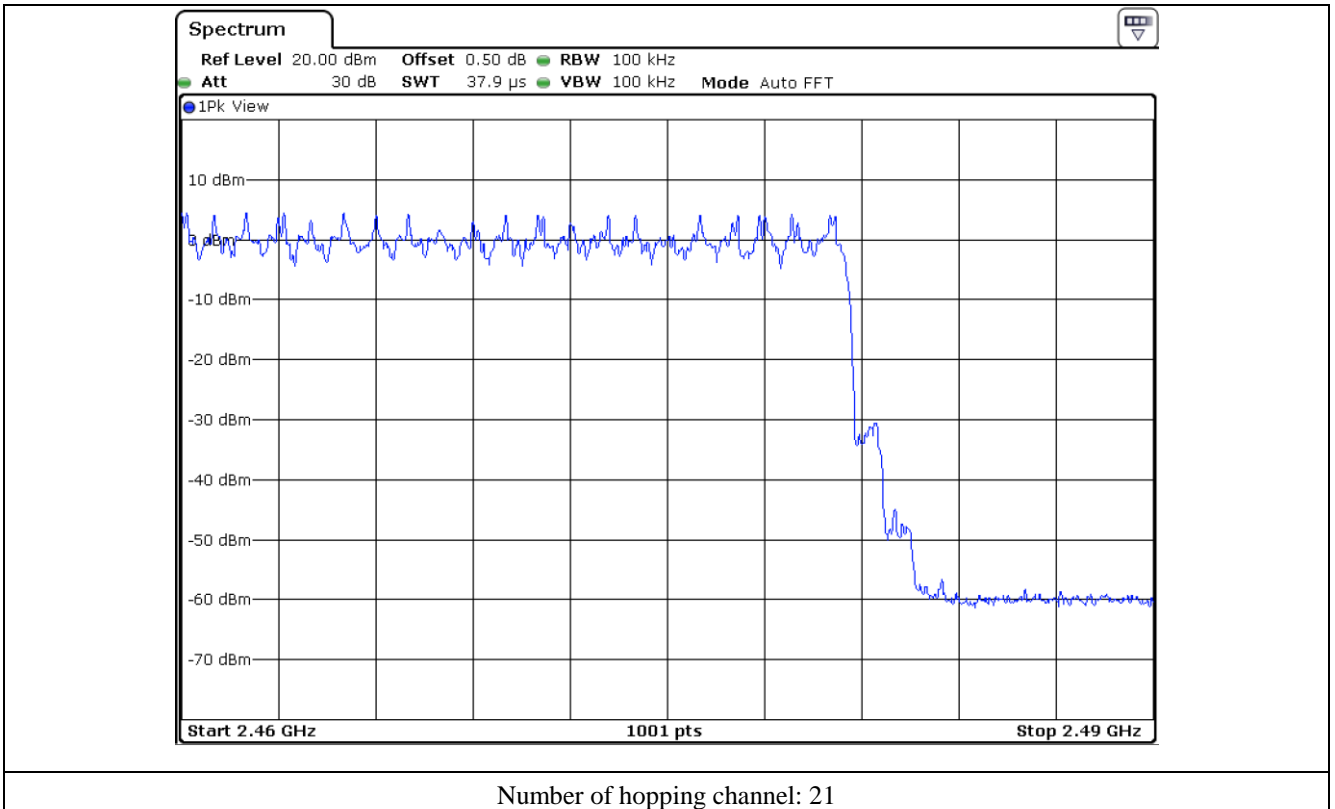


10. TIME OF OCCUPANCY

10.1 Operating environment

Temperature : 23 °C
 Relative humidity : 48 % R.H.

10.2 Test set-up

The antenna output of the EUT was connected to the spectrum analyzer. The transmitter is set to operate in its normal frequency hopping mode. The center frequency of the spectrum analyzer is set to one of hopping channels near the center of the operating band and span is set to zero Hz. The sweep time is set to display one complete pulse. The mark delta function is used to measure the duration of the pulses.

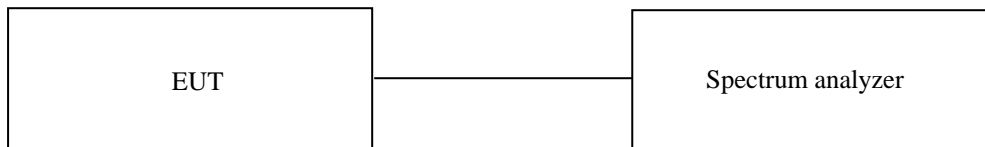

10.3 Test equipment used

Model Number	Manufacturer	Description	Serial Number	Last Cal.
■ - FSV30	Rohde & Schwarz	Signal Analyzer	101200	Oct.26, 2017 (1Y)

All test equipment used is calibrated on a regular basis.

10.4 Test data for 1 Mbps

- Test Date : November 07, 2017

The system makes worst case 1 600 hops per second or 1 time slot has a length of 625 μs with 79 channels.

For DH1 packet type, the EUT needs 1 time slot for transmitting and 1 time slot for receiving and for DH3 packet type, the EUT needs 3 times slots for transmitting and 1 time slot for receiving, and DH5 packet needs 5 times slots for transmitting and 1 time slot for receiving. So The EUT has each channel for 10.13 times per second (= 1 600/2/79) for DH1, and 5.06 times (= 1 600/4/79) for DH3, and 3.38 times (= 1 600/6/79) for DH5.

Packet Type	Pulse Time (ms)	Hops per second with channels	Period Time (s)	Total Dwell Time (ms)	Limit (ms)	Test Result
DH1	0.390	10.13	31.6	124.84	400	PASS
DH3	1.650	5.060	31.6	263.83	400	
DH5	2.890	3.38	31.6	308.68	400	


Total dwell time is calculated as following.

Total Dwell Time = Pulse time * Hops per second with channels * period time


Remark: See next page for an overview sweep performed with peak detector.




Tested by: Ju Yun Park / Engineer

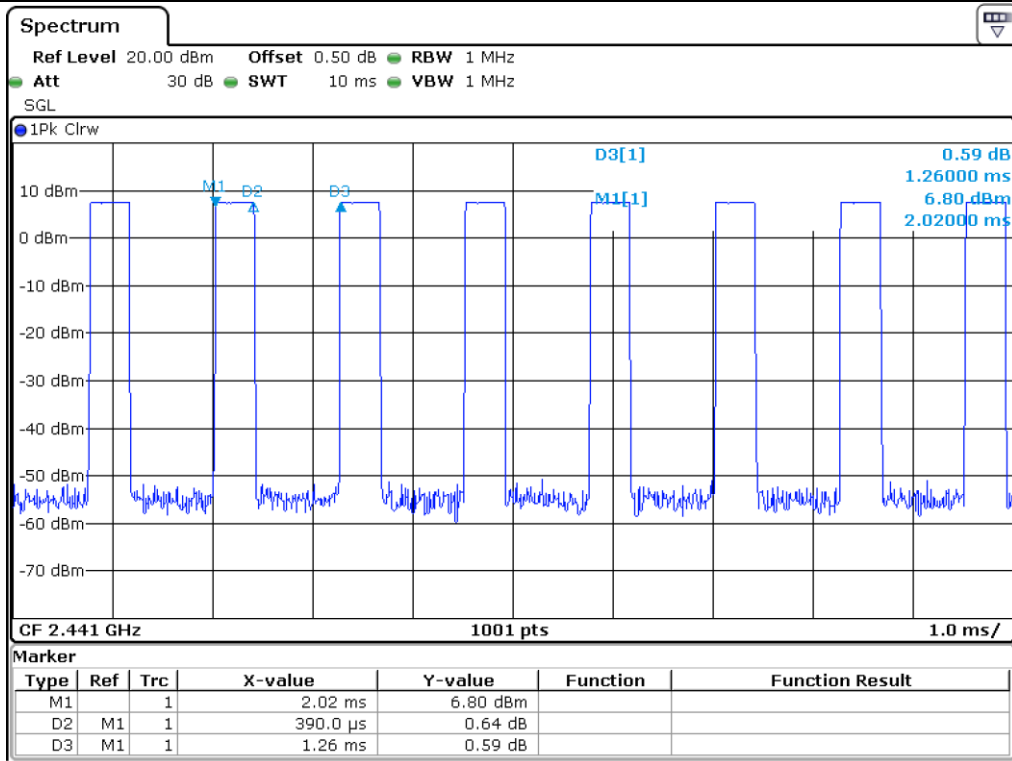

DH1

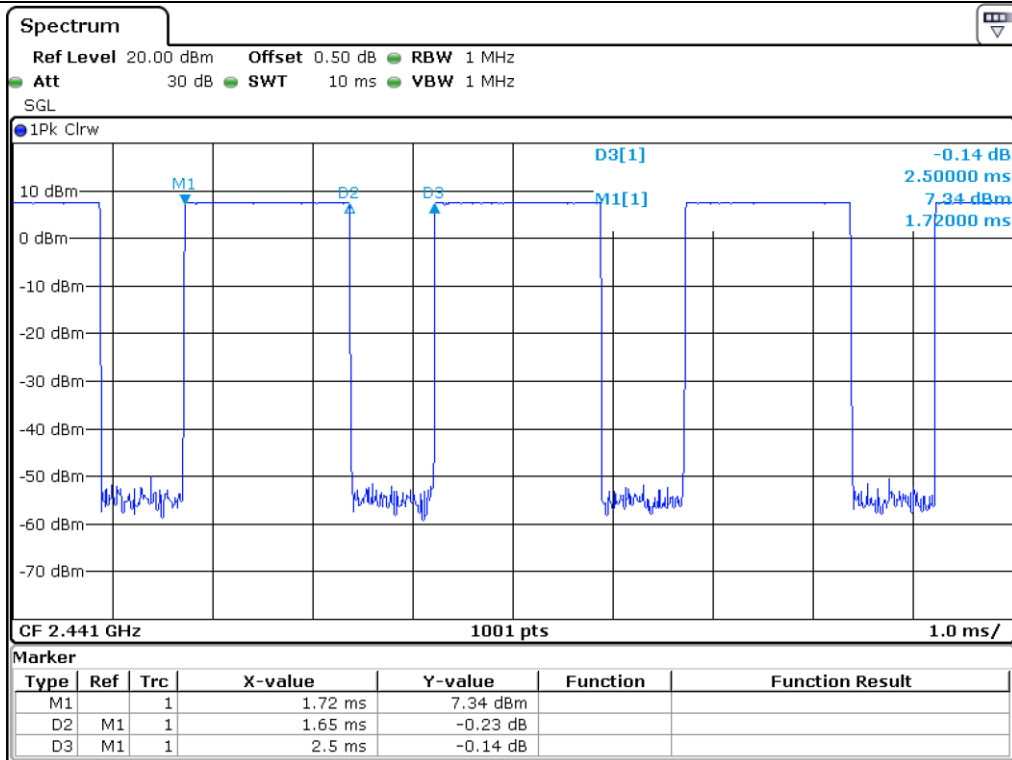

DH3

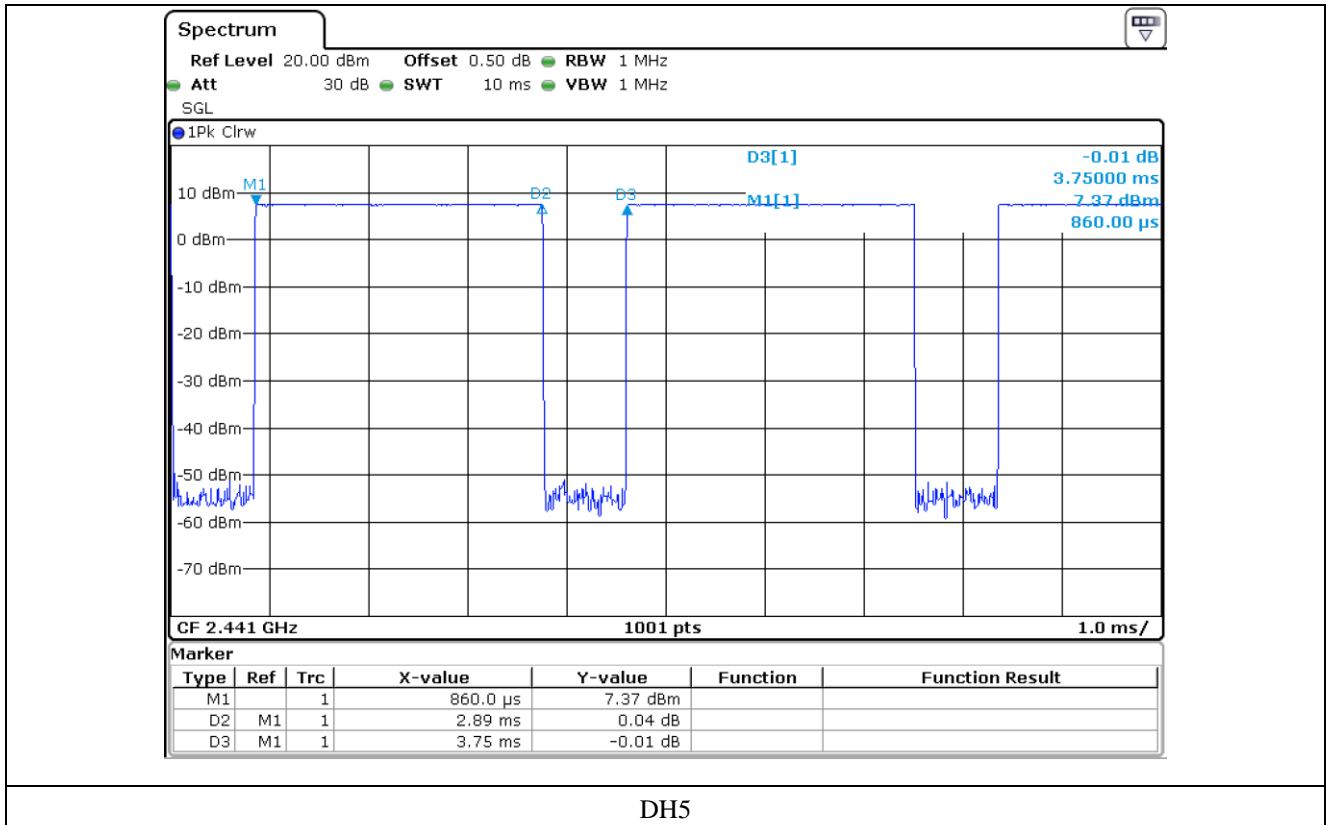

10.5 Test data for 2 Mbps

-. Test Date : November 07, 2017

The system makes worst case 1 600 hops per second or 1 time slot has a length of 625 μs with 79 channels.

For 2-DH1 packet type, the EUT needs 1 time slot for transmitting and 1 time slot for receiving and for 2-DH3 packet type, the EUT needs 3 times slots for transmitting and 1 time slot for receiving, and 2-DH5 packet needs 5 times slots for transmitting and 1 time slot for receiving. So The EUT has each channel for 10.13 times per second (= 1 600/2/79) for 2-DH1, and 5.06 times (= 1 600/4/79) for 2-DH3, and 3.38 times (= 1 600/6/79) for 2-DH5.

Packet Type	Pulse Time (ms)	Hops per second with channels	Period Time (s)	Total Dwell Time (ms)	Limit (ms)	Test Result
2-DH1	0.400	10.13	31.6	128.04	400	PASS
2-DH3	1.640	5.060	31.6	262.23	400	
2-DH5	1.710	3.38	31.6	182.64	400	


Total dwell time is calculated as following.

Total Dwell Time = Pulse time * Hops per second with channels * period time


Remark: See next page for an overview sweep performed with peak detector.




Tested by: Ju Yun Park / Engineer

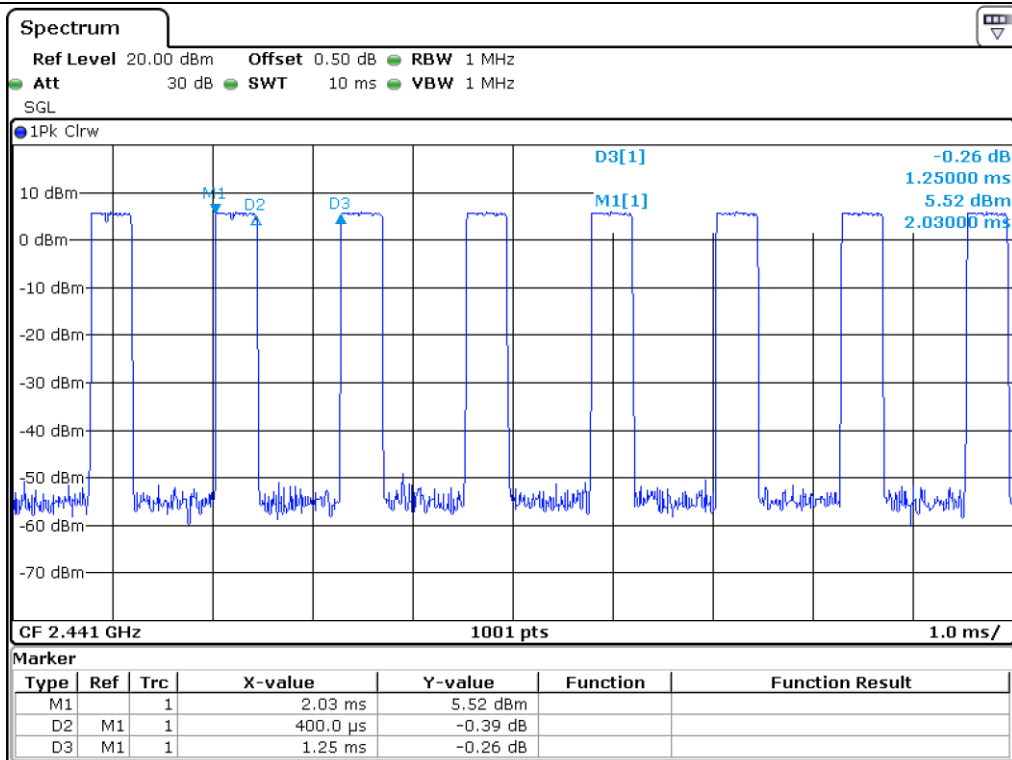

2-DH1

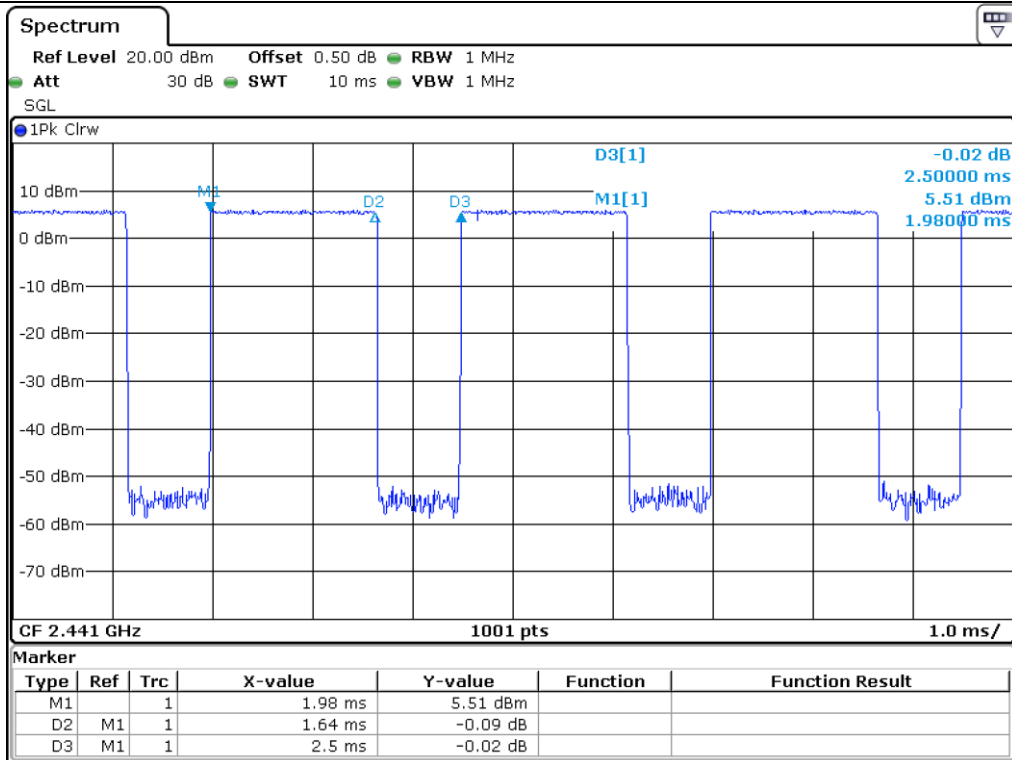

2-DH3

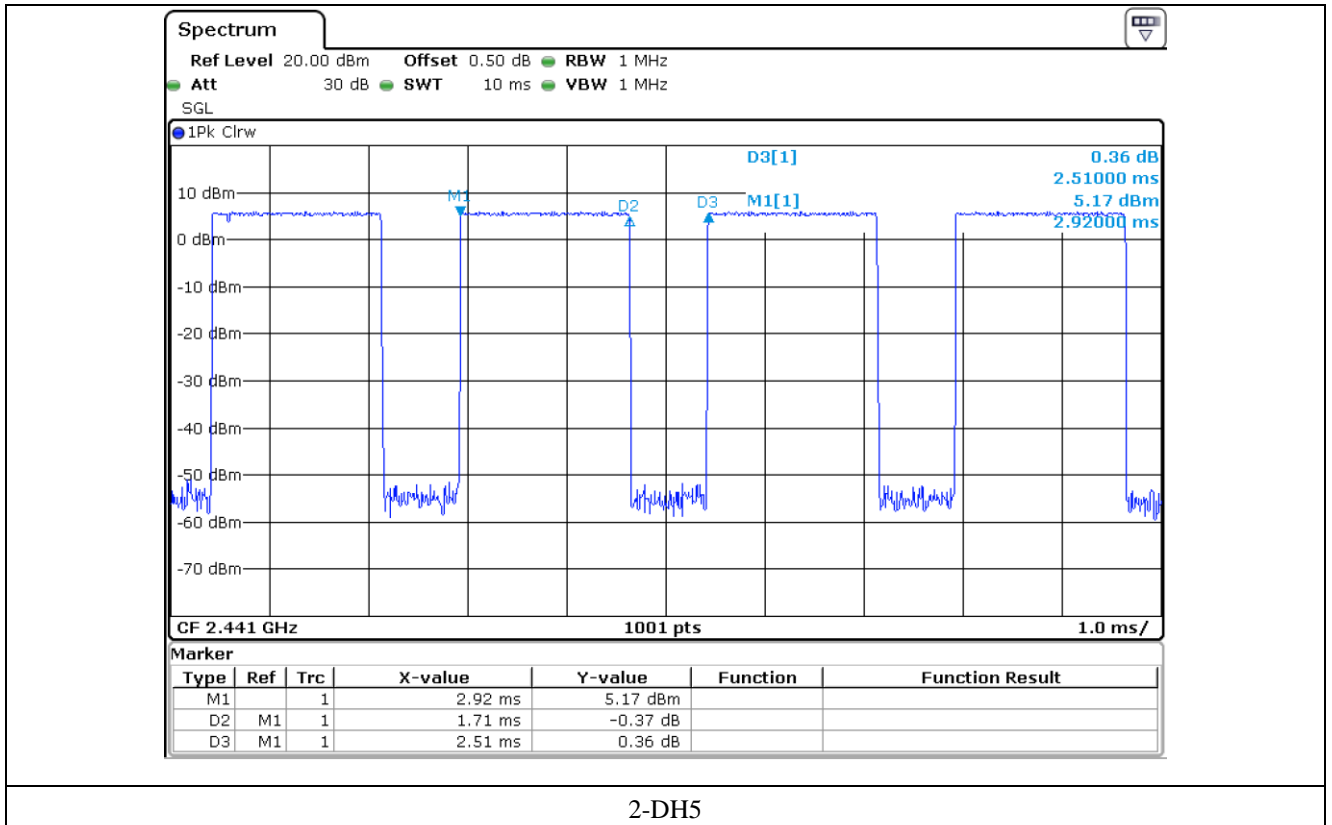

10.6 Test data for 3 Mbps

-. Test Date : November 07, 2017

The system makes worst case 1 600 hops per second or 1 time slot has a length of 625 μs with 79 channels.


For 3-DH1 packet type, the EUT needs 1 time slot for transmitting and 1 time slot for receiving and for 3-DH3 packet type, the EUT needs 3 times slots for transmitting and 1 time slot for receiving, and 3-DH5 packet needs 5 times slots for transmitting and 1 time slot for receiving. So The EUT has each channel for 10.13 times per second (= 1 600/2/79) for 3-DH1, and 5.06 times (= 1 600/4/79) for 3-DH3, and 3.38 times (= 1 600/6/79) for 3-DH5.

Packet Type	Pulse Time (ms)	Hops per second with channels	Period Time (s)	Total Dwell Time (ms)	Limit (ms)	Test Result
3-DH1	0.390	10.13	31.6	124.84	400	PASS
3-DH3	1.650	5.060	31.6	263.83	400	
3-DH5	2.890	3.38	31.6	308.68	400	


Total dwell time is calculated as following.

Total Dwell Time = Pulse time * Hops per second with channels * period time


Remark: See next page for an overview sweep performed with peak detector.




Tested by: Ju Yun Park / Engineer

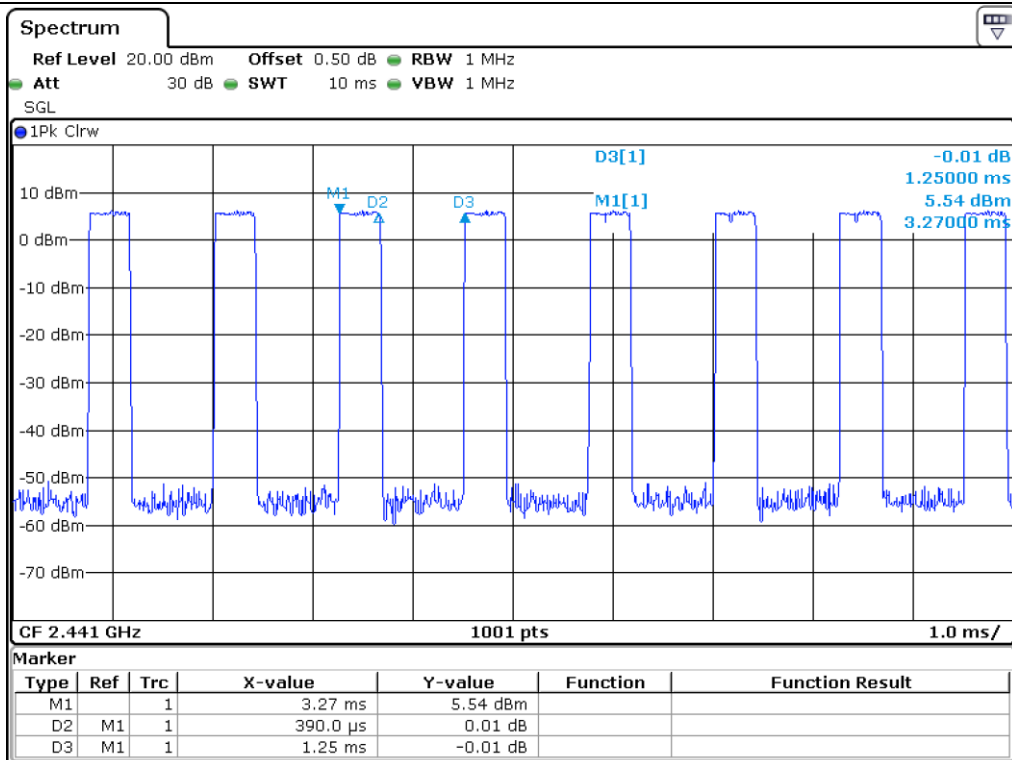

3-DH1

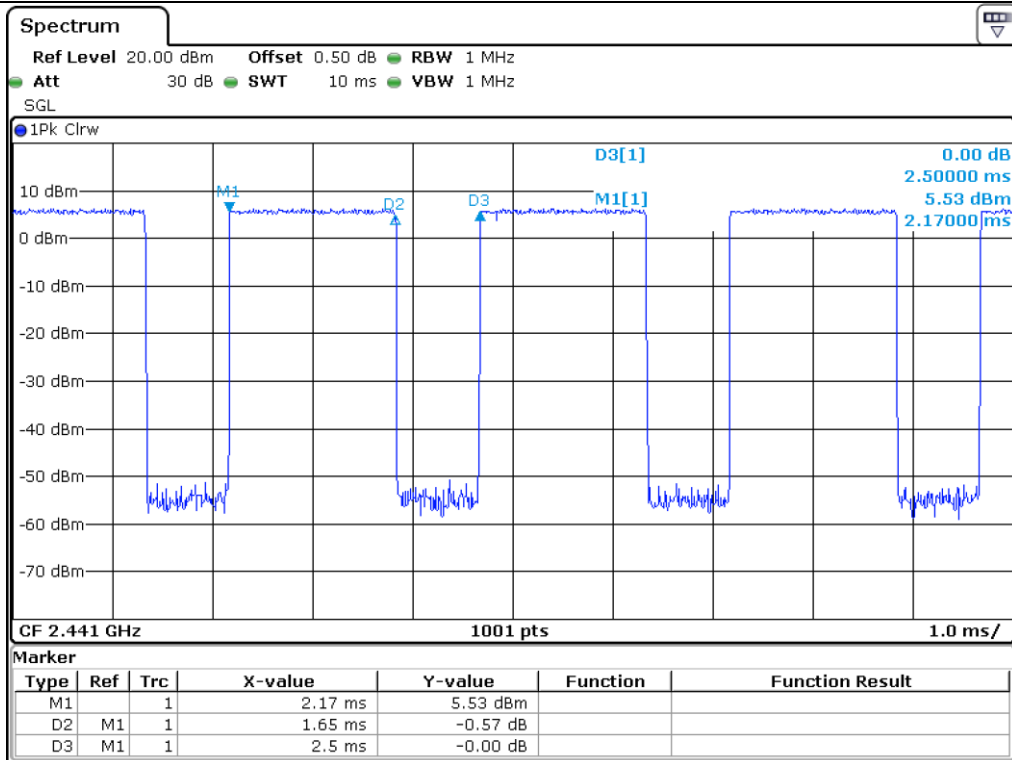

3-DH3

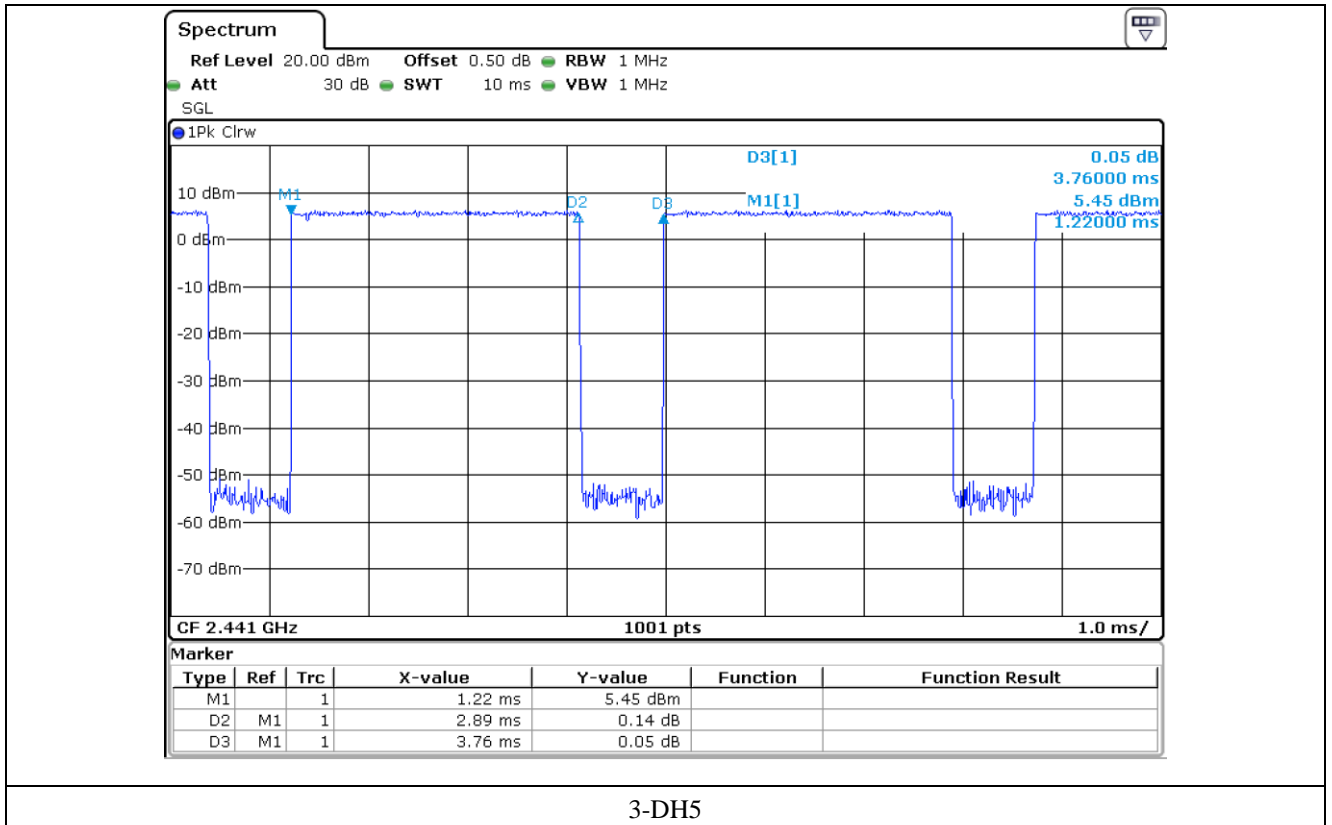


11. MAXIMUM PEAK OUTPUT POWER

11.1 Operating environment

Temperature : 23 °C
 Relative humidity : 48 % R.H

11.2 Test set-up

The maximum peak output power was measured with the spectrum analyzer connected to the antenna output of the EUT. The EUT was operating in transmit mode at the appropriate center frequency.

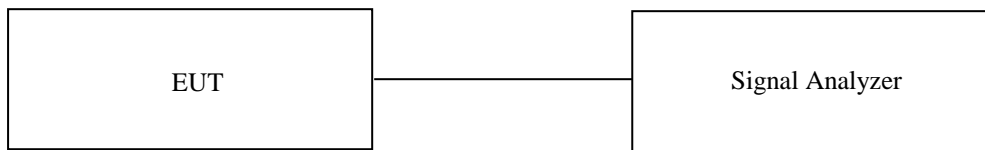

11.3 Test equipment used

Model Number	Manufacturer	Description	Serial Number	Last Cal.
■ - FSV30	Rohde & Schwarz	Signal Analyzer	101200	Oct.26, 2017 (1Y)

All test equipment used is calibrated on a regular basis.

11.4 Test data for 1 Mbps


-. Test Date : November 07, 2017


-. Test Result : Pass

CHANNEL	FREQUENCY (MHz)	MEASURED VLAUE (dBm)	LIMIT (dBm)	MARGIN (dB)
LOW	2 402	5.47	21.00	15.53
MIDDLE	2 441	7.57	21.00	13.43
HIGH	2 480	6.91	21.00	14.09


Remark. Margin = Limit – Measured Value (=Receiver Reading + Cable Loss)

Tested by: Ju Yun Park / Engineer

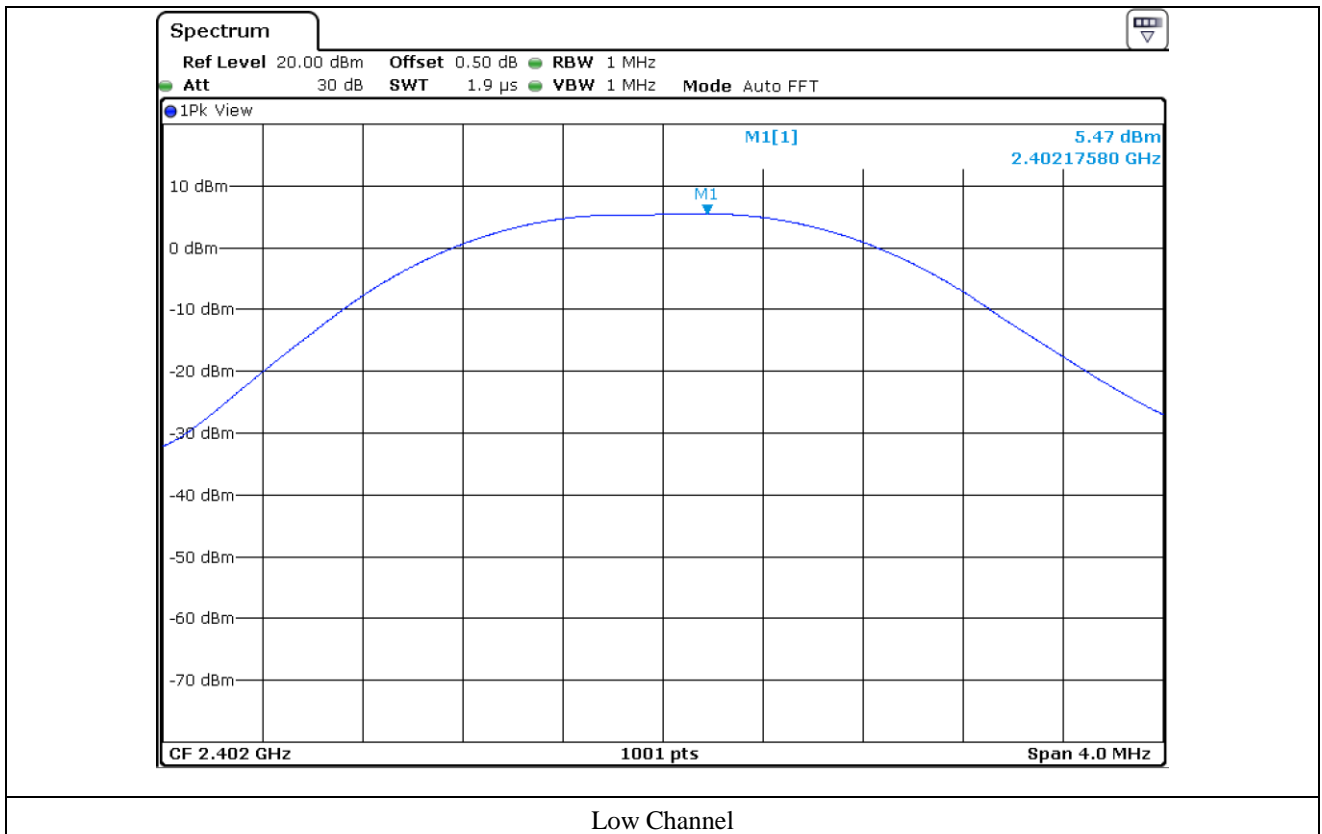

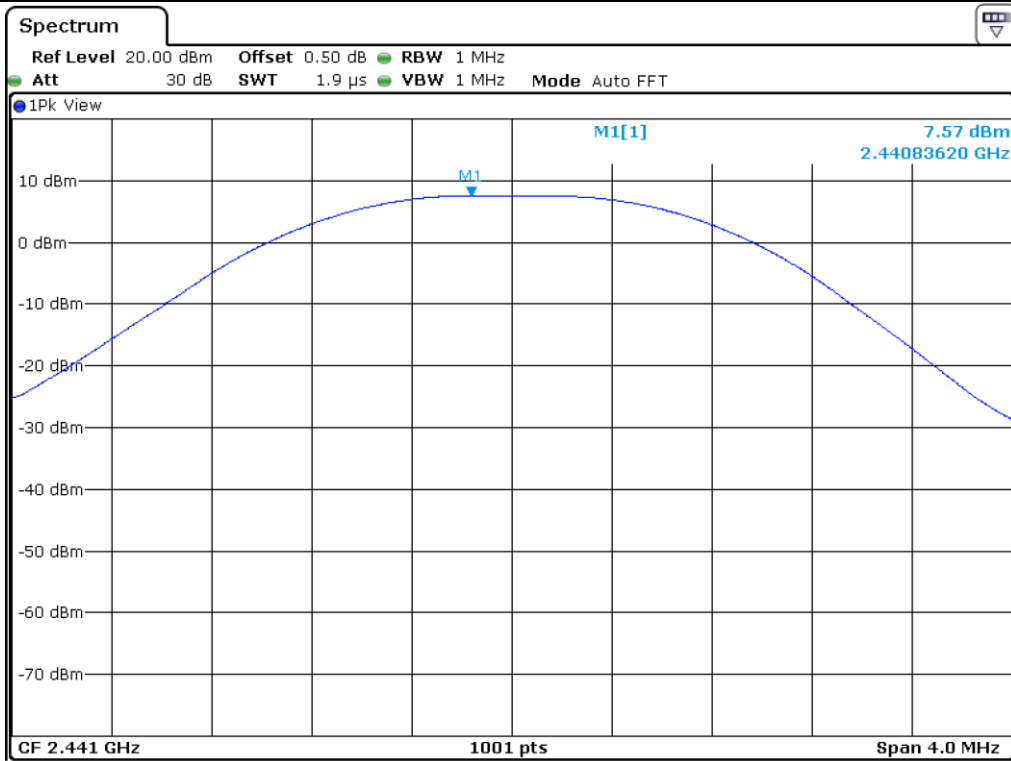

Middle Channel

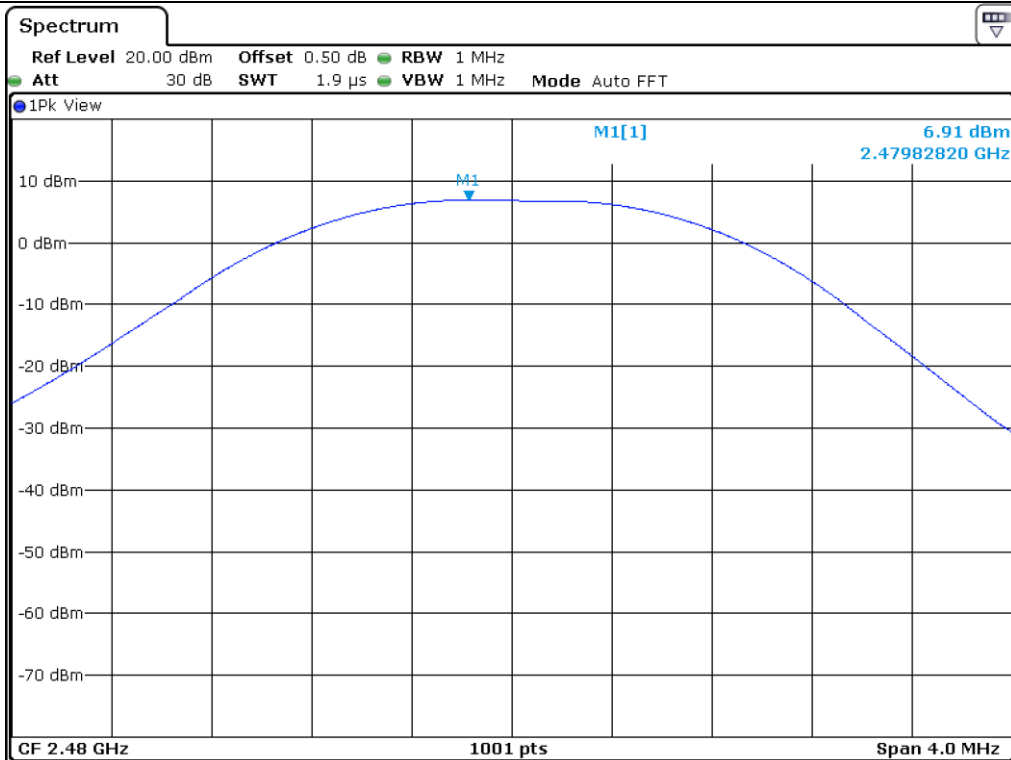

High Channel

11.5 Test data for 2 Mbps


-. Test Date : November 07, 2017

-. Test Result : Pass


CHANNEL	FREQUENCY (MHz)	MEASURED VLAUE (dBm)	LIMIT (dBm)	MARGIN (dB)
LOW	2 402	3.37	21.00	17.63
MIDDLE	2 441	6.27	21.00	14.73
HIGH	2 480	4.97	21.00	16.03

Remark. Margin = Limit – Measured Value (=Receiver Reading + Cable Loss)


Tested by: Ju Yun Park / Engineer

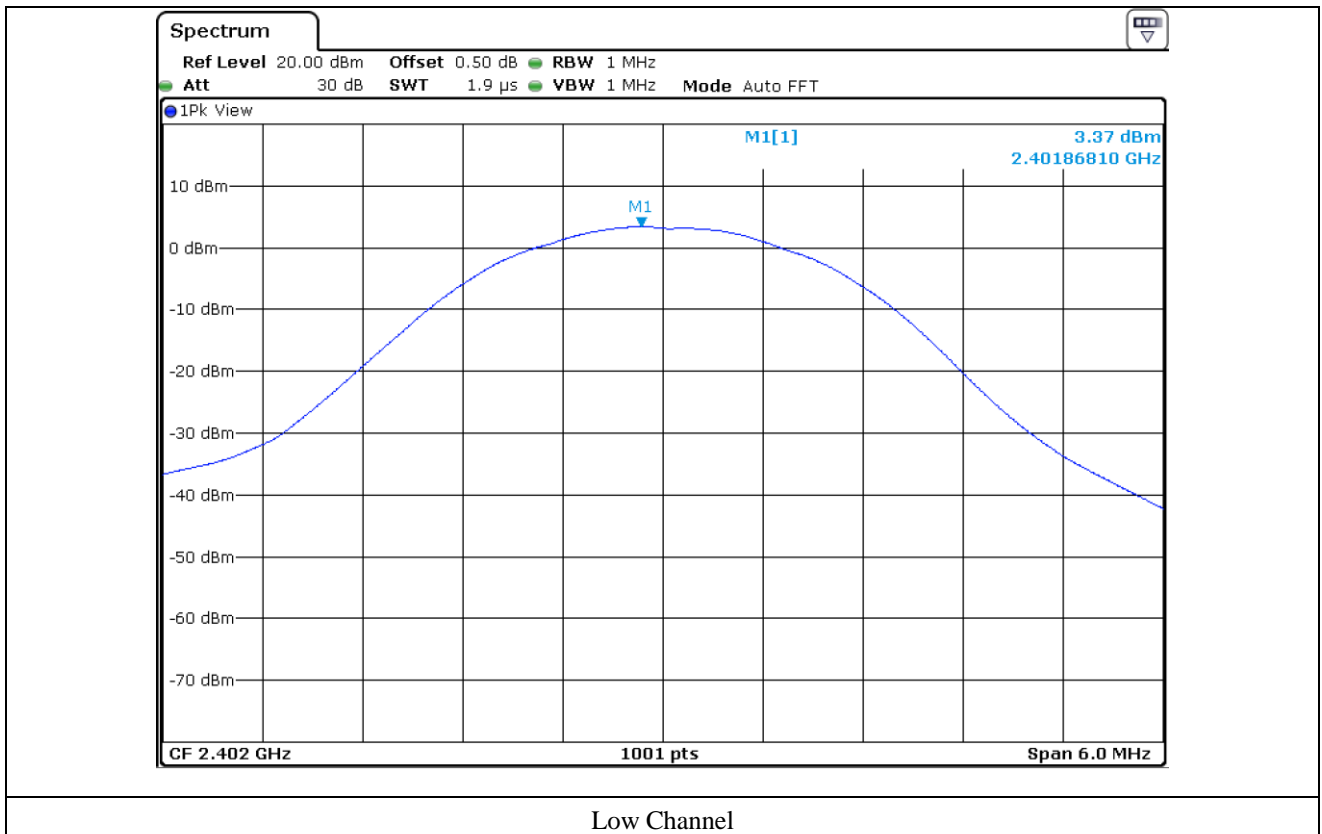

Low Channel

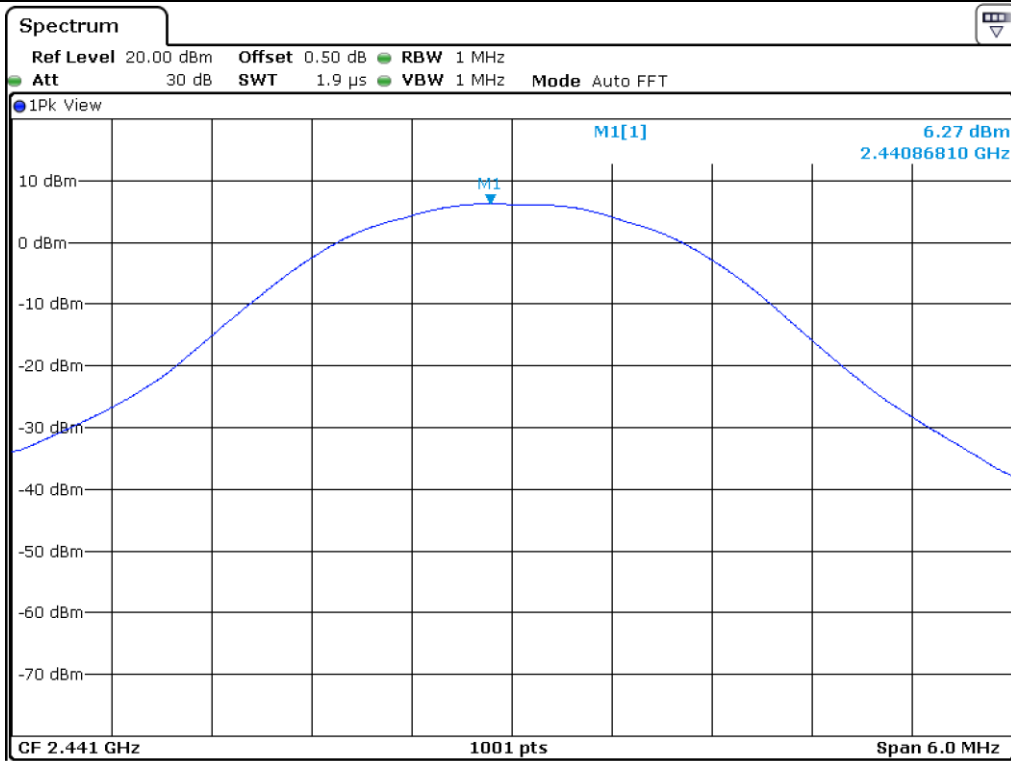

Middle Channel

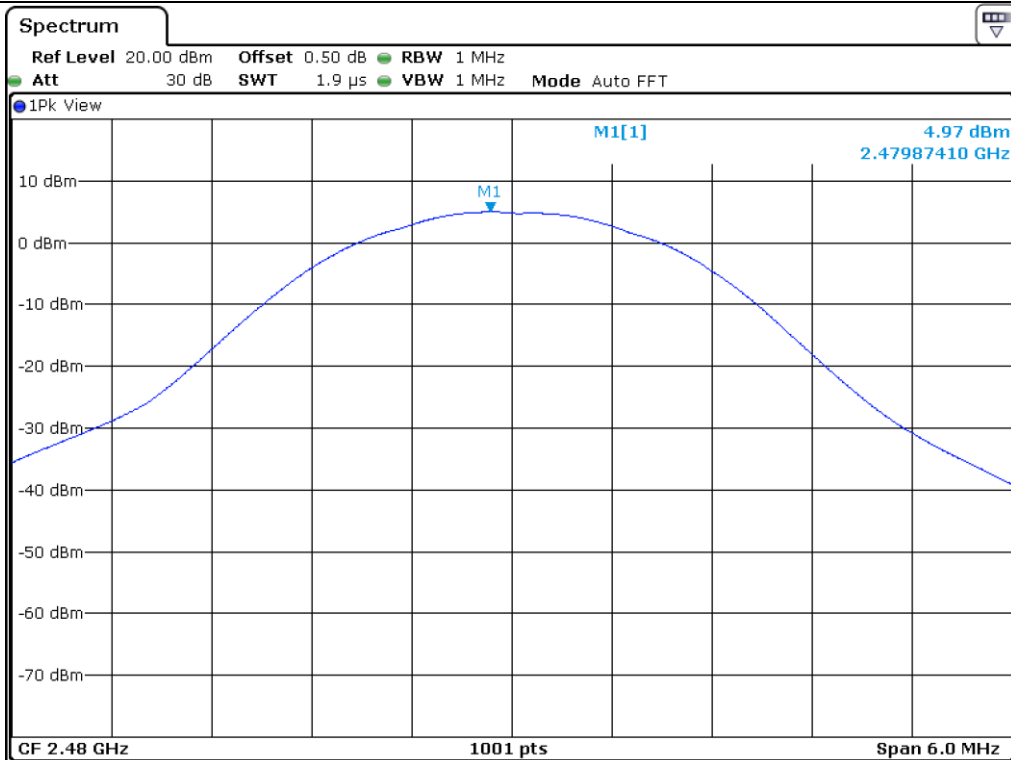

High Channel

11.6 Test data for 3 Mbps


-. Test Date : November 07, 2017


-. Test Result : Pass

CHANNEL	FREQUENCY (MHz)	MEASURED VLAUE (dBm)	LIMIT (dBm)	MARGIN (dB)
LOW	2 402	3.57	21.00	17.43
MIDDLE	2 441	6.41	21.00	14.59
HIGH	2 480	5.19	21.00	15.81


Remark. Margin = Limit – Measured Value (=Receiver Reading + Cable Loss)

Tested by: Ju Yun Park / Engineer

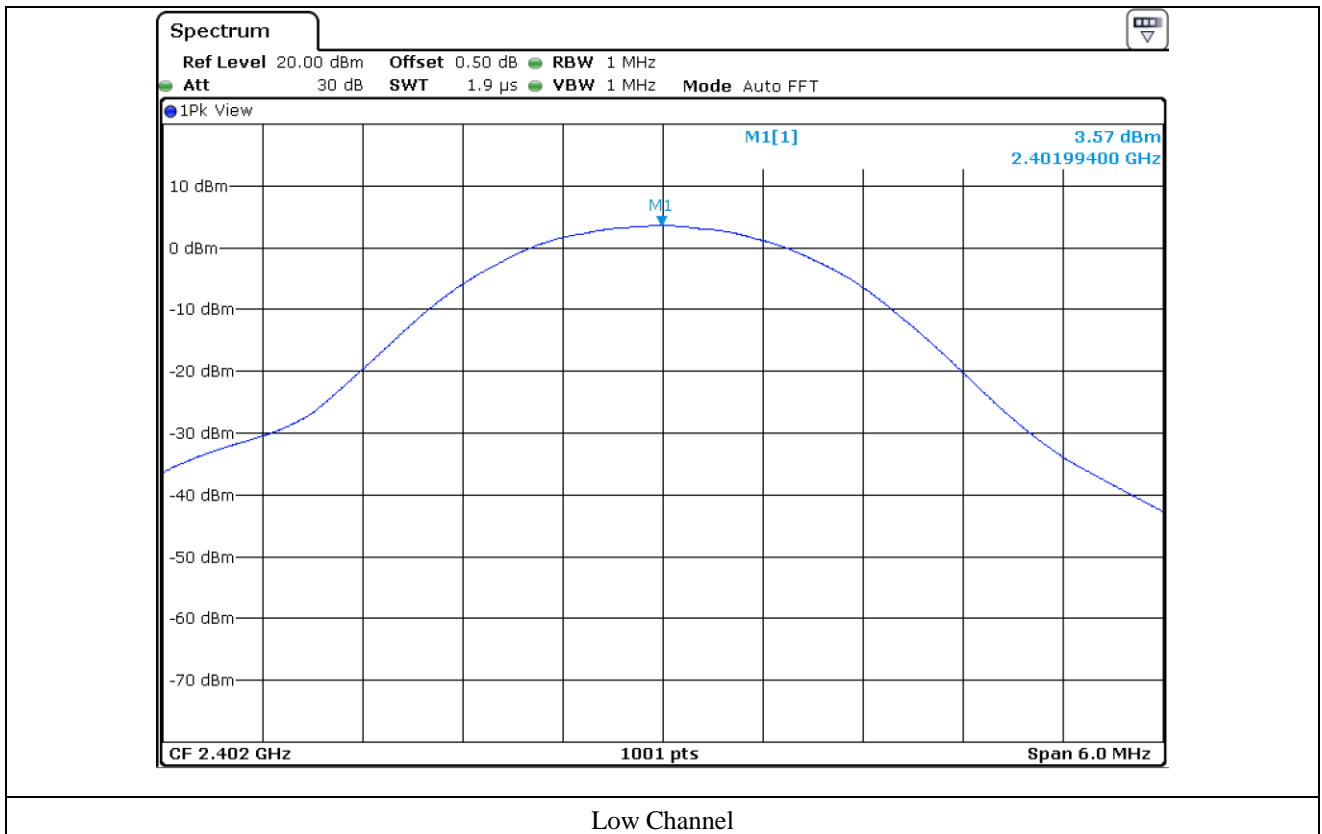

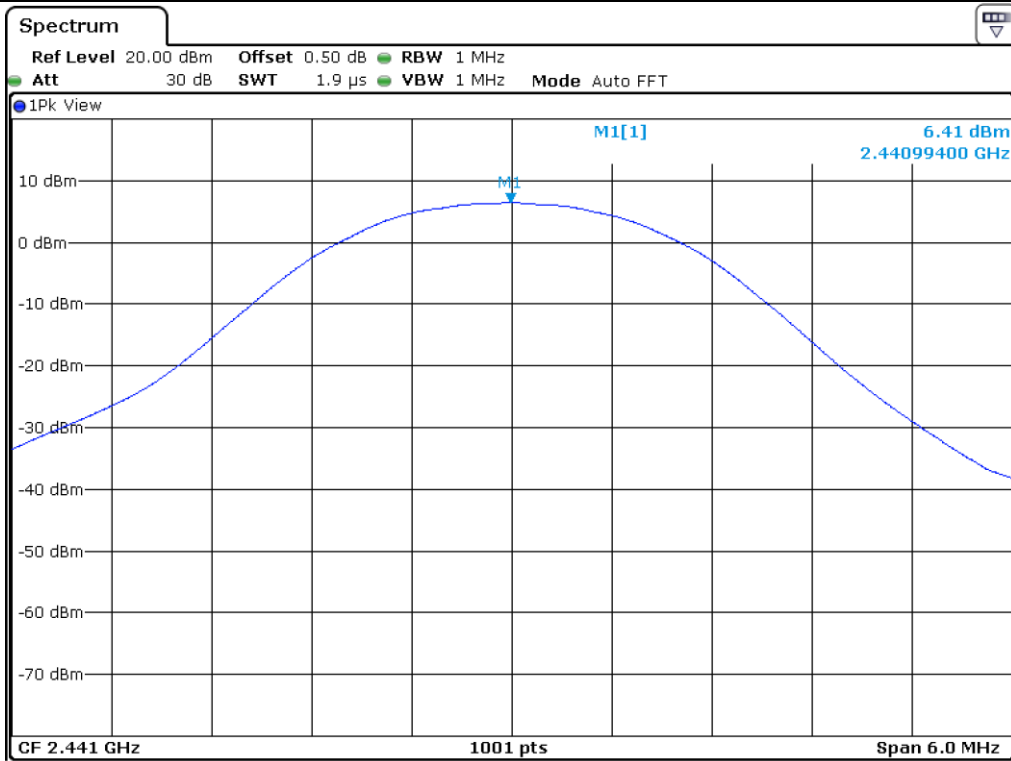

Middle Channel

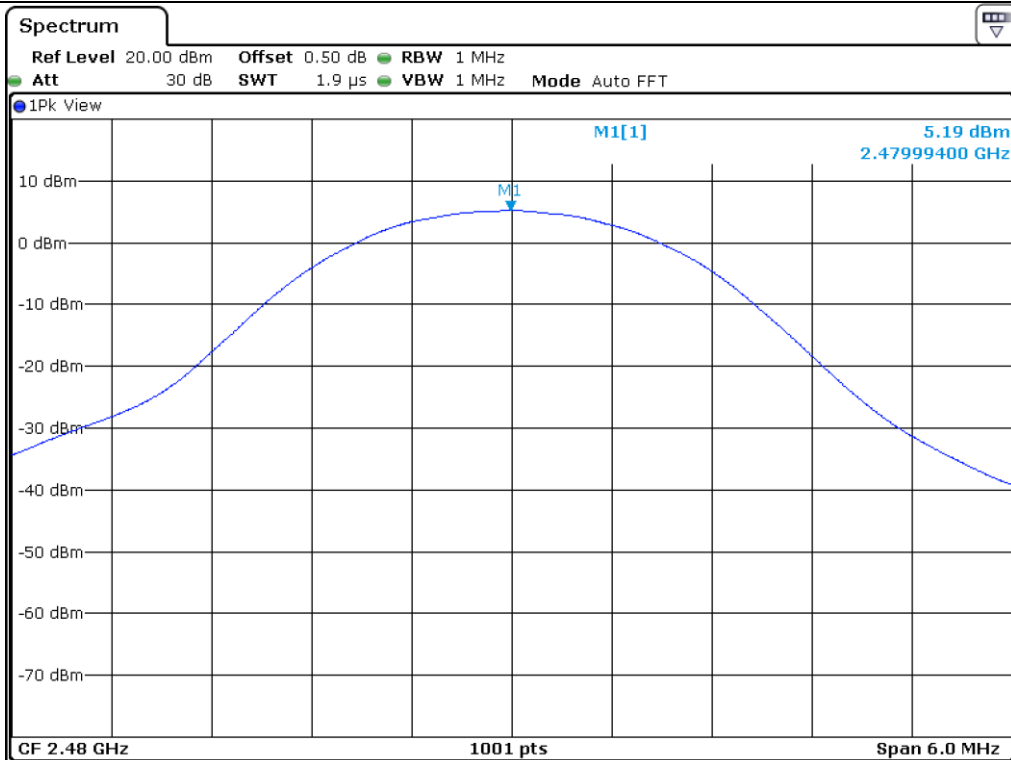

High Channel


12. 100 kHz BANDWIDTH OUTSIDE THE FREQUENCY BAND

12.1 Operating environment

Temperature : 23 °C
 Relative humidity : 48 % R.H

12.2 Test set-up for conducted measurement

The antenna output of the EUT was connected to the spectrum analyzer. The resolution and video bandwidth is set to 100 kHz, and peak detection was used.

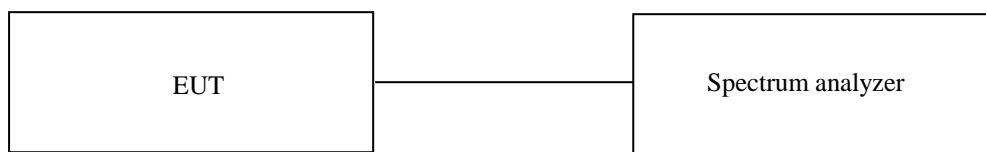

12.3 Test set-up for radiated measurement

The radiated emissions measurements were performed on the 3 m, open-field test site. The EUT was placed on a non-conductive turntable approximately 0.8 m above the ground plane.

The frequency spectrum from 30 kHz to 26.5 GHz was scanned and maximum emission levels at each frequency recorded. The system was rotated 360°, and the antenna was varied in the height between 1.0 m and 4.0 ms in order to determine the maximum emission levels. This procedure was performed for horizontal and vertical polarization of the receiving antenna.


12.4 Test equipment used

	Model Number	Manufacturer	Description	Serial Number	Last Cal. (Interval)
<input type="checkbox"/>	ESCI	Rohde & Schwarz	EMI Test Receiver	101012	Oct. 27, 2017 (1Y)
<input checked="" type="checkbox"/>	ESR	Rohde & Schwarz	EMI Test Receiver	101470	Oct. 27, 2017 (1Y)
<input type="checkbox"/>	FSP	Rohde & Schwarz	Spectrum Analyzer	100017	Sep. 04, 2017 (1Y)
<input checked="" type="checkbox"/>	310N	Sonoma Instrument	AMPLIFIER	312544	Apr. 04, 2017 (1Y)
<input checked="" type="checkbox"/>	FSV30	Rohde & Schwarz	Signal Analyzer	101200	Oct. 26, 2017 (1Y)
<input checked="" type="checkbox"/>	SCU-18	Rohde & Schwarz	Pre-Amplifier	102346	Oct. 24, 2017 (1Y)
<input checked="" type="checkbox"/>	MA-4000XPET	Innco Systems GmbH	Antenna Master	MA4000/509	N/A
<input type="checkbox"/>	HD100	HD GmbH	Position Controller	N/A	N/A
<input checked="" type="checkbox"/>	DT3000-3t	Innco Systems GmbH	Turn Table	N/A	N/A
<input type="checkbox"/>	FMZB 1513	Schwarzbeck	LOOP ANTENNA	1513-235	Jun. 10, 2016 (2Y)
<input checked="" type="checkbox"/>	VULB9163	Schwarzbeck	TRILOG Broadband Antenna	9163-255	May 20, 2016 (2Y)
<input checked="" type="checkbox"/>	BBHA9120D	Schwarzbeck	Horn Antenna	BBHA9120D295	Aug. 16, 2017 (2Y)
<input checked="" type="checkbox"/>	BBHA9170	Schwarzbeck	Horn Antenna	BBHA91700179	Jul. 28, 2017 (2Y)
<input checked="" type="checkbox"/>	SCU40A	Rohde & Schwarz	Pre-Amplifier	100436	Apr. 04, 2017 (1Y)


All test equipment used is calibrated on a regular basis.

12.5 Test data for conducted emission


12.5.1 Test data for 1 Mbps

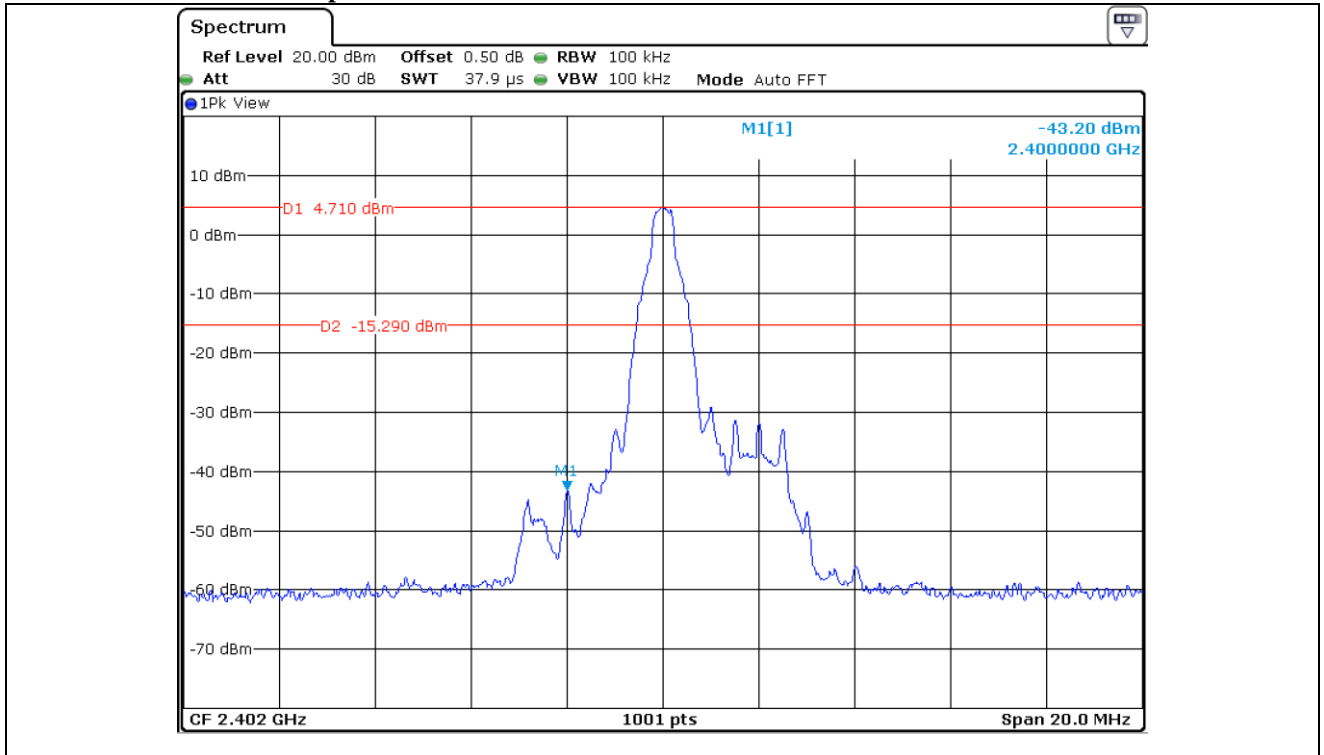


Low Channel

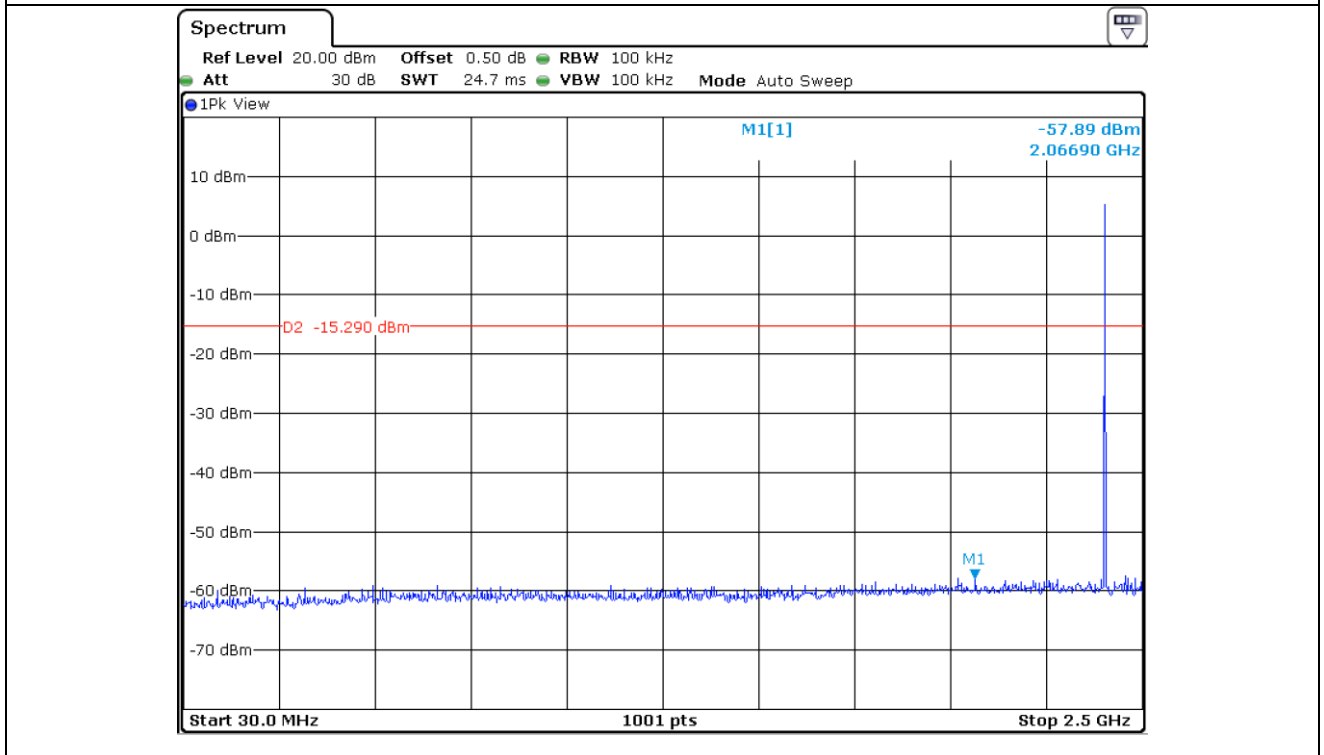


Low Channel

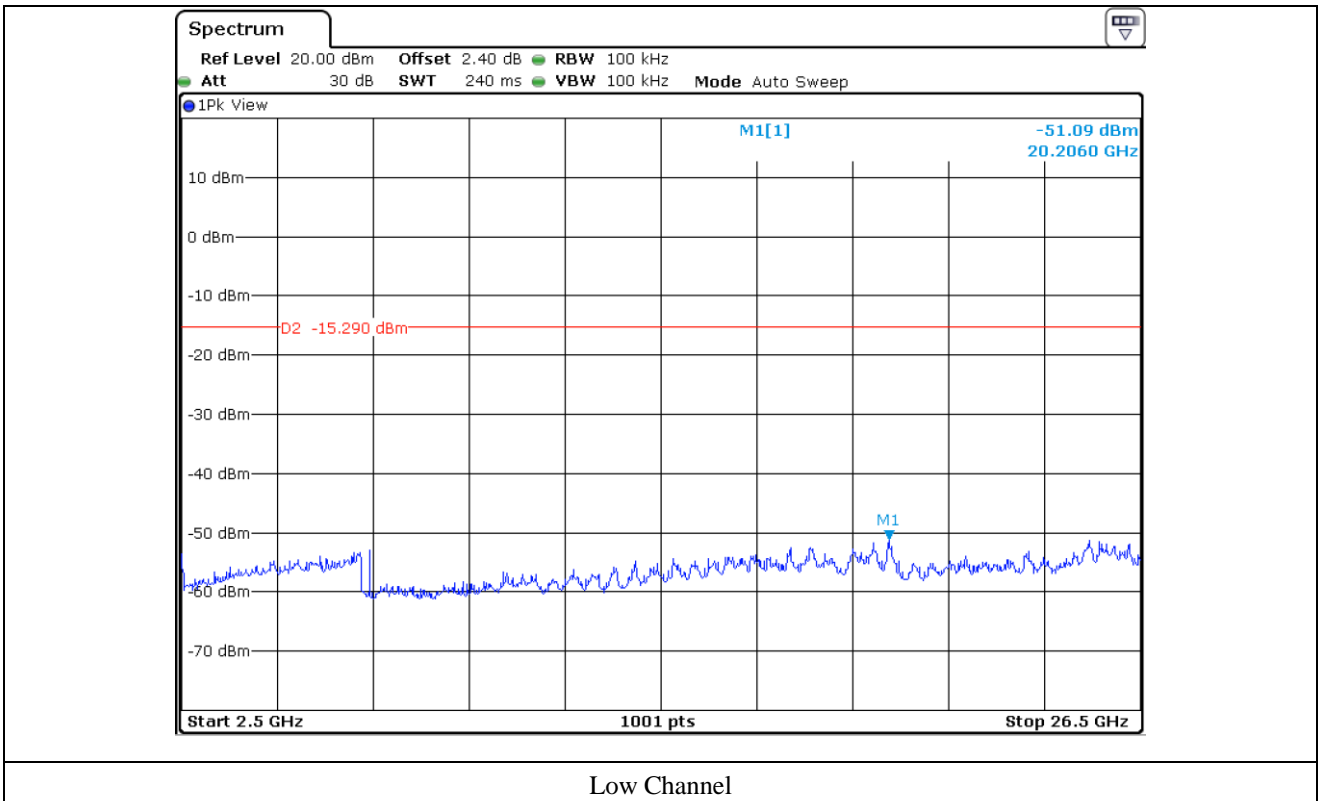


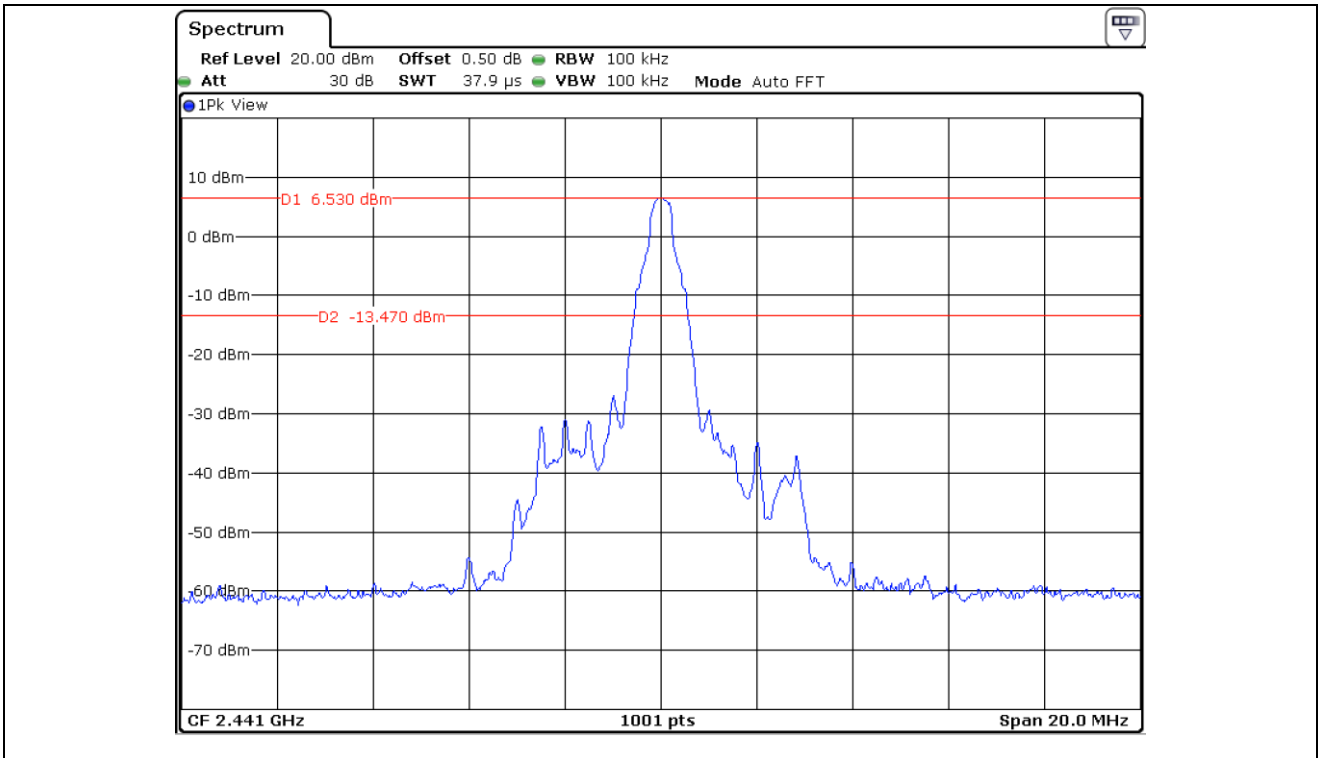


Middle Channel

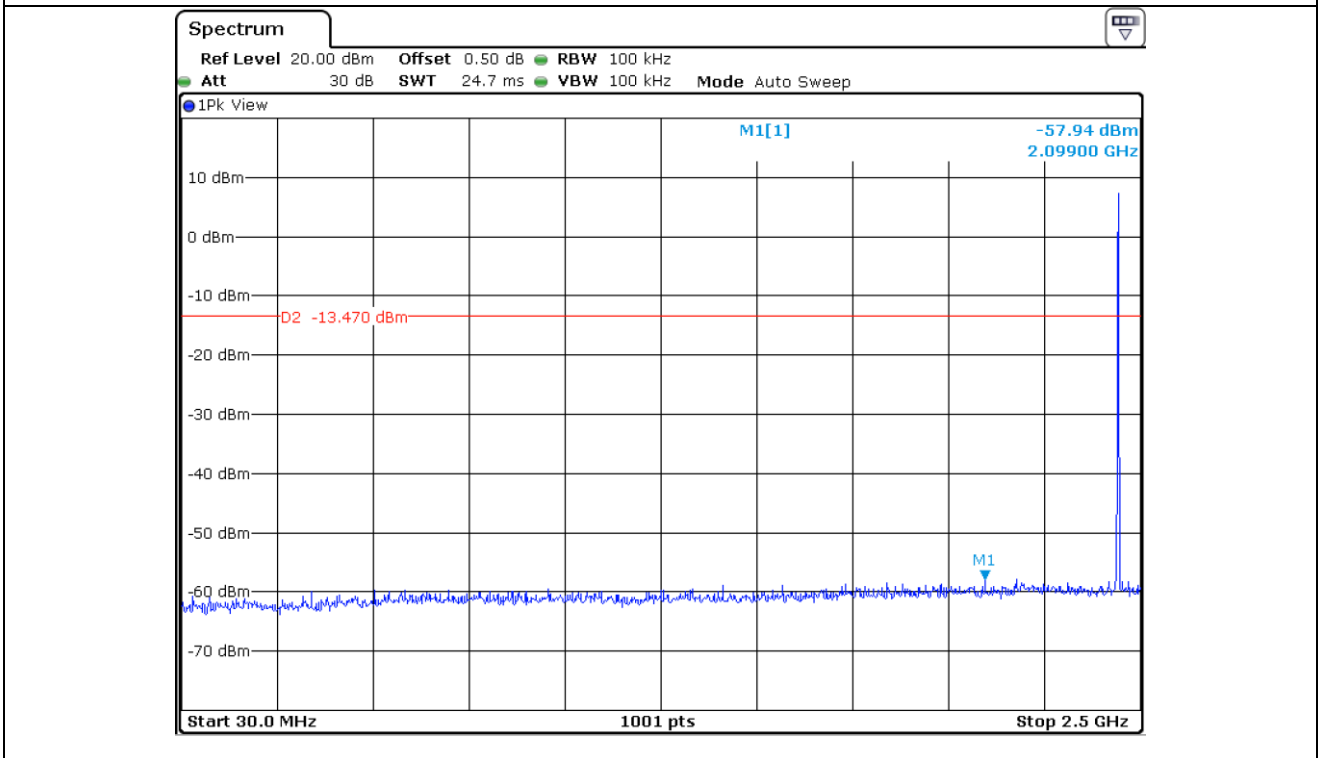


Middle Channel

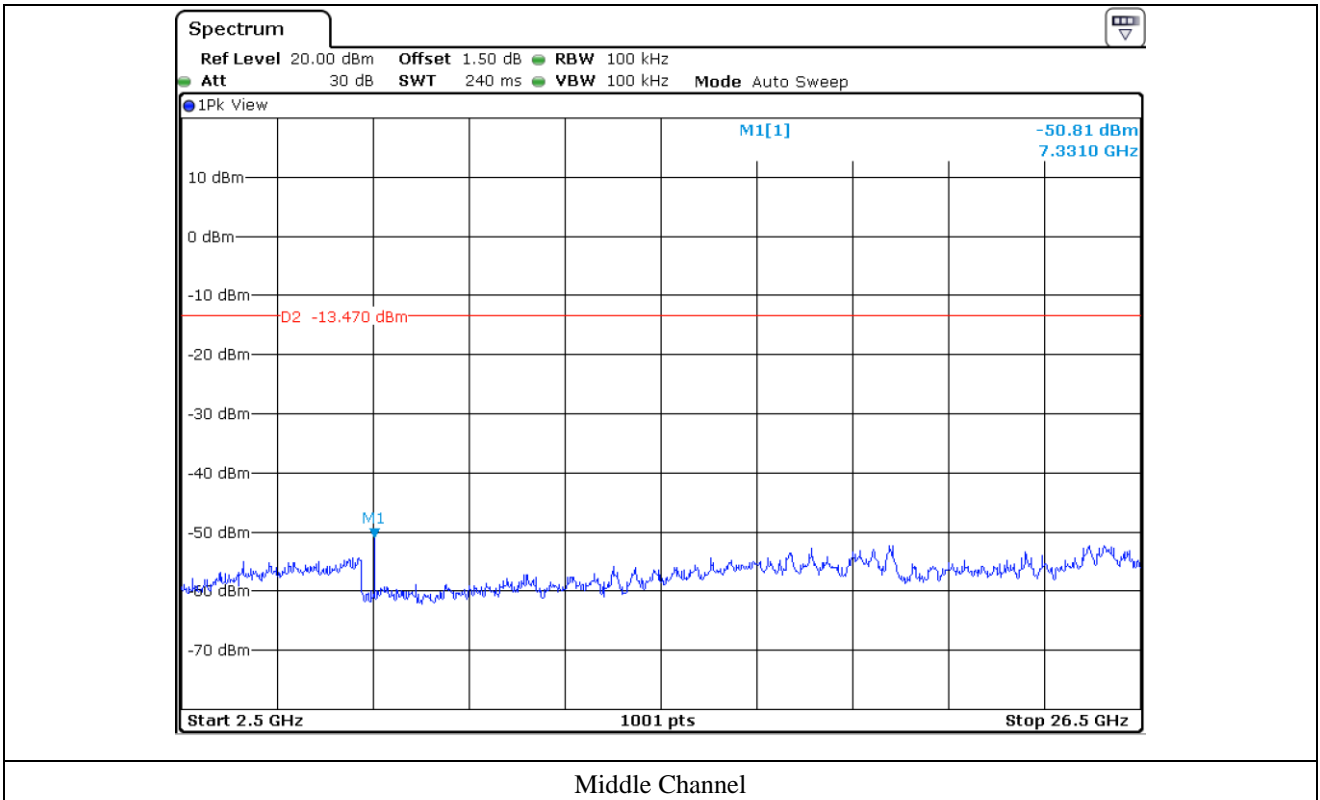


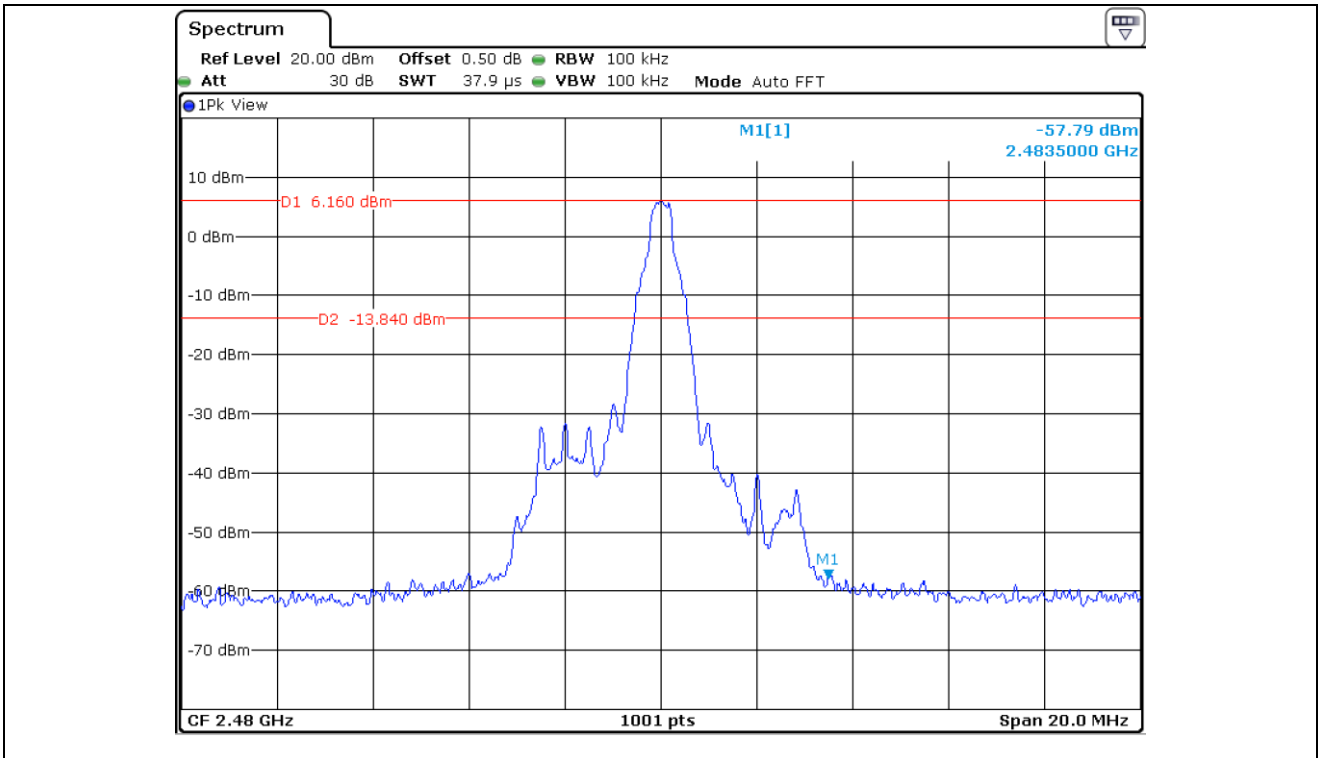


High Channel

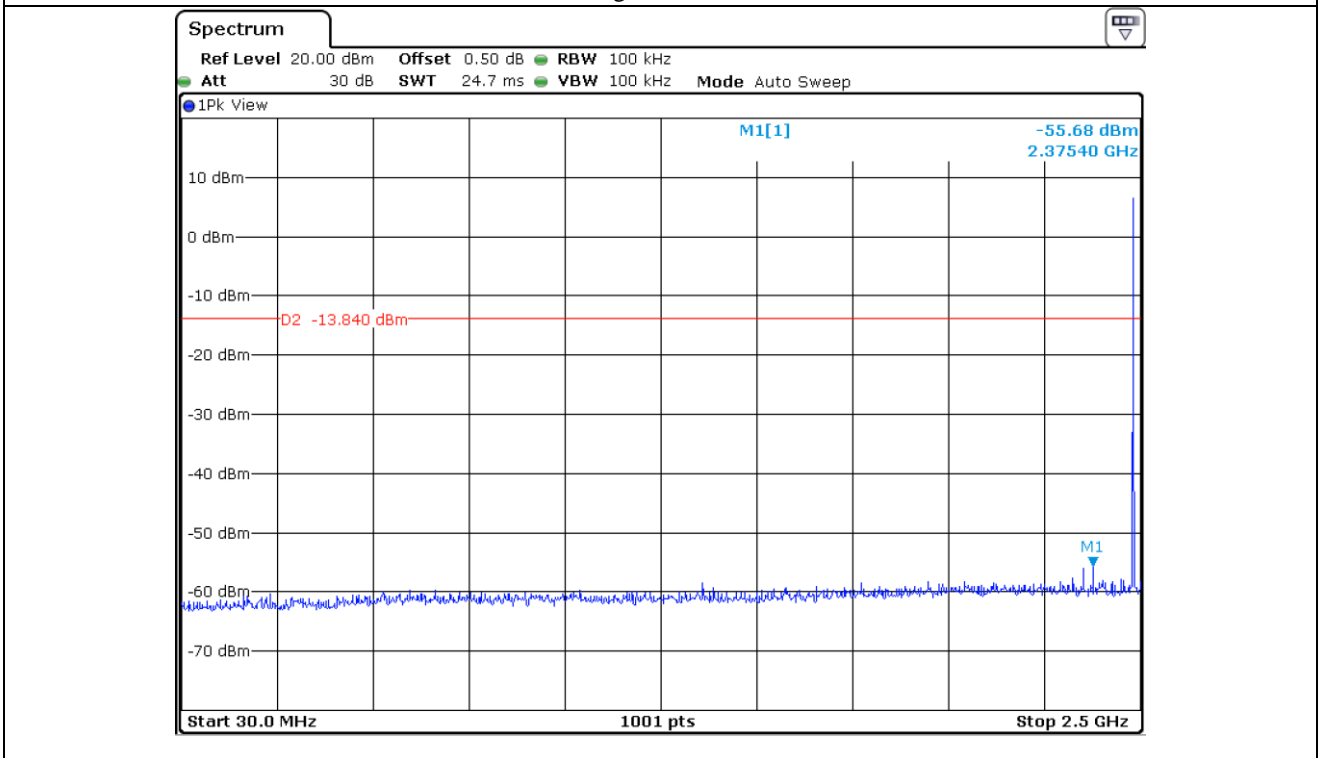


High Channel

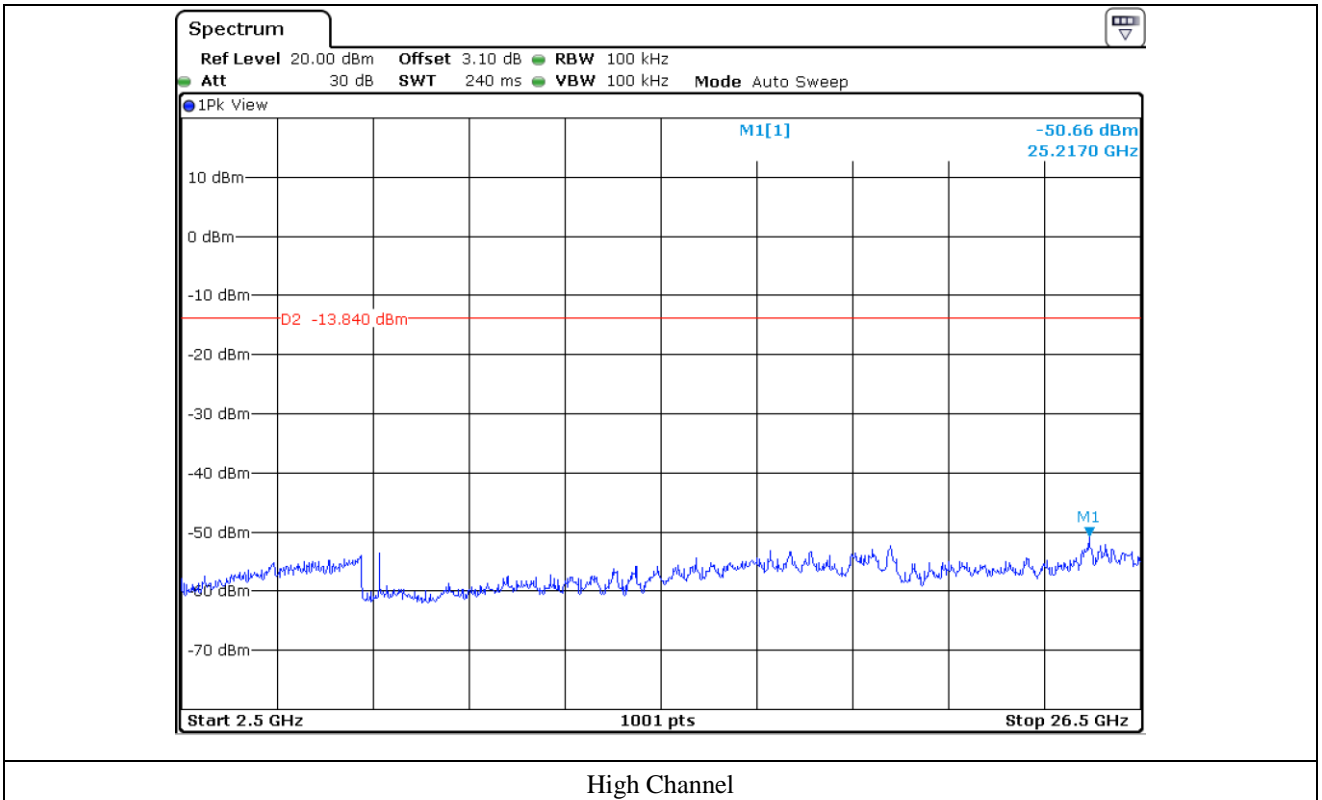


12.5.2 Test data for 2 Mbps

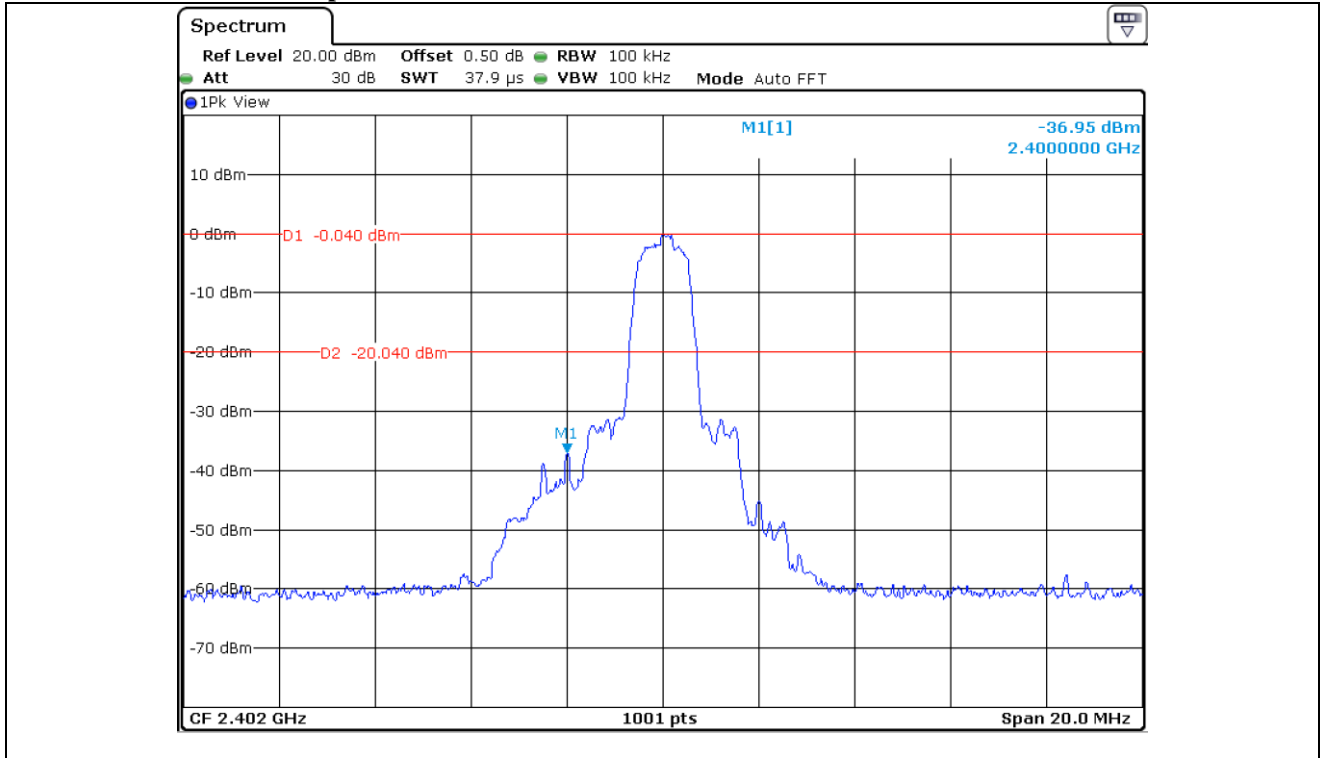


Low Channel

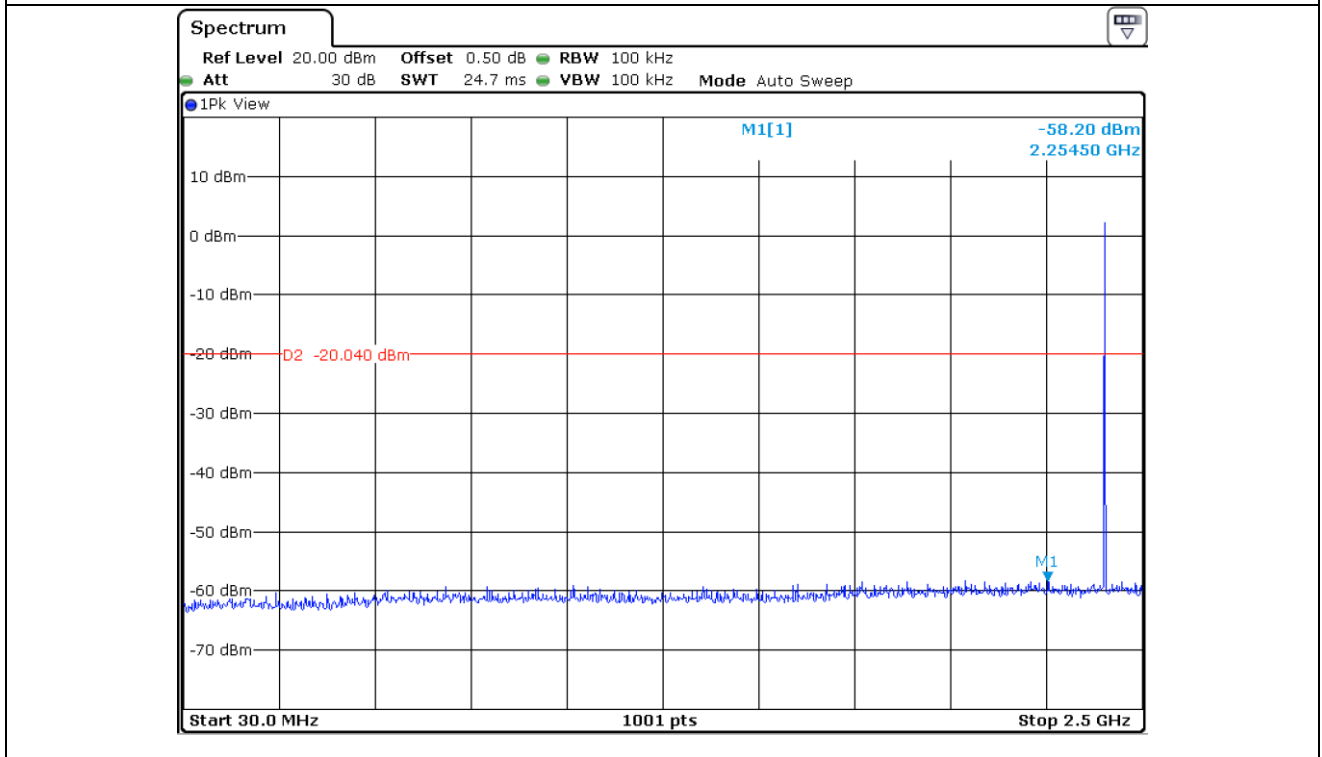


Low Channel

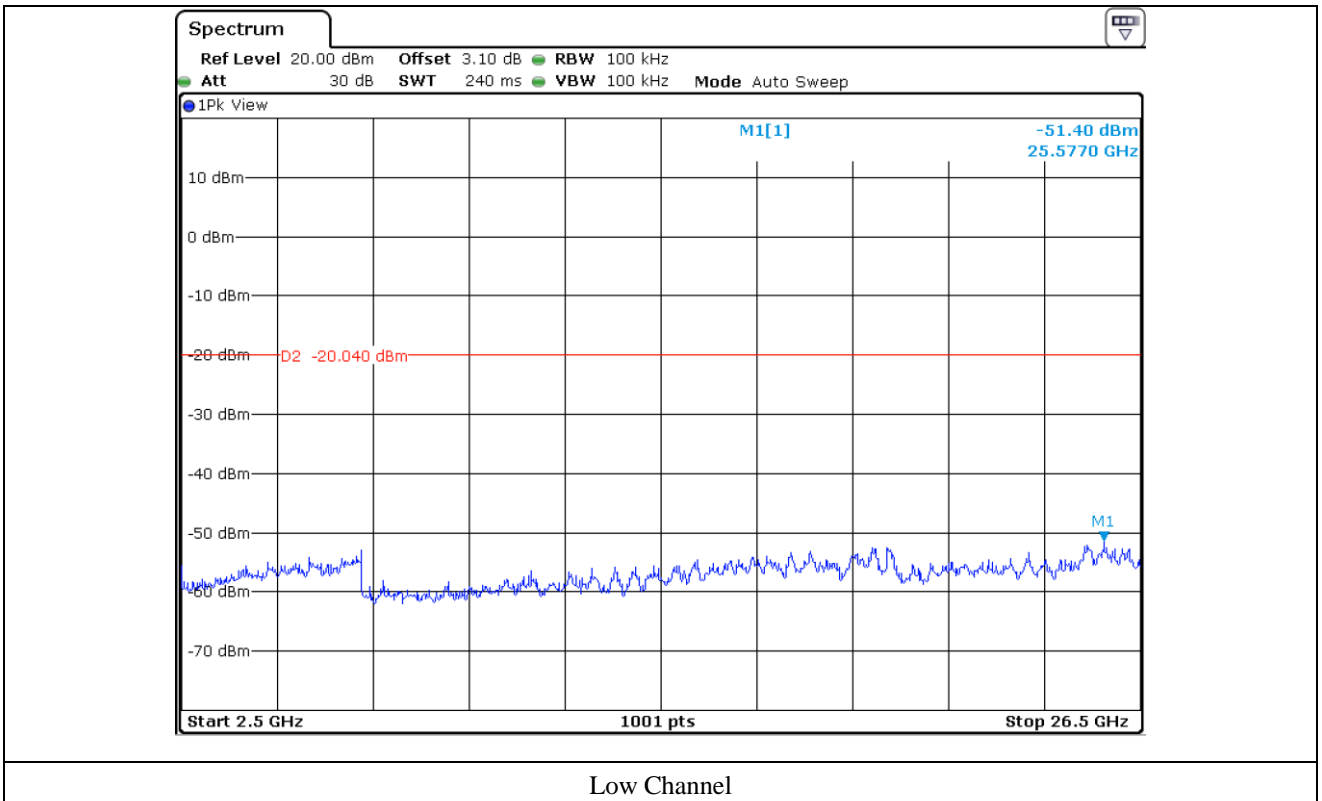


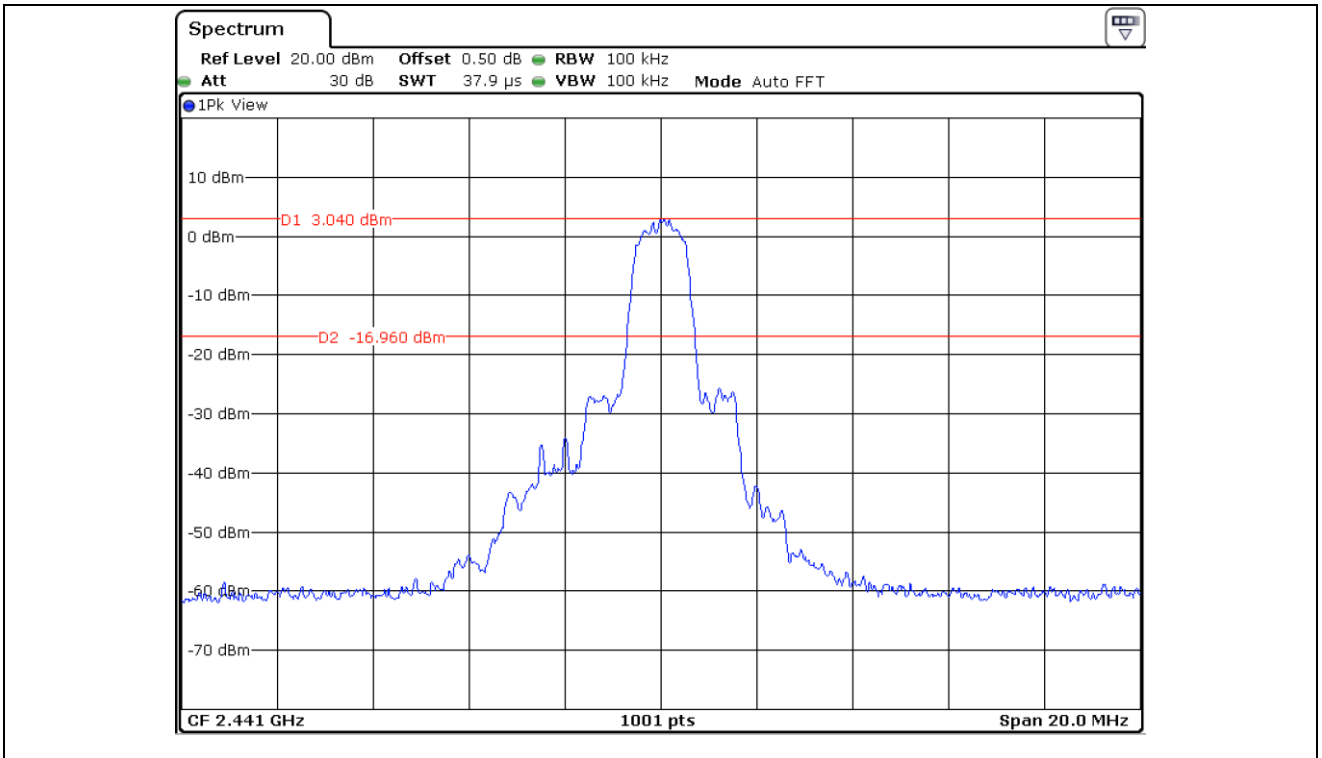


Middle Channel

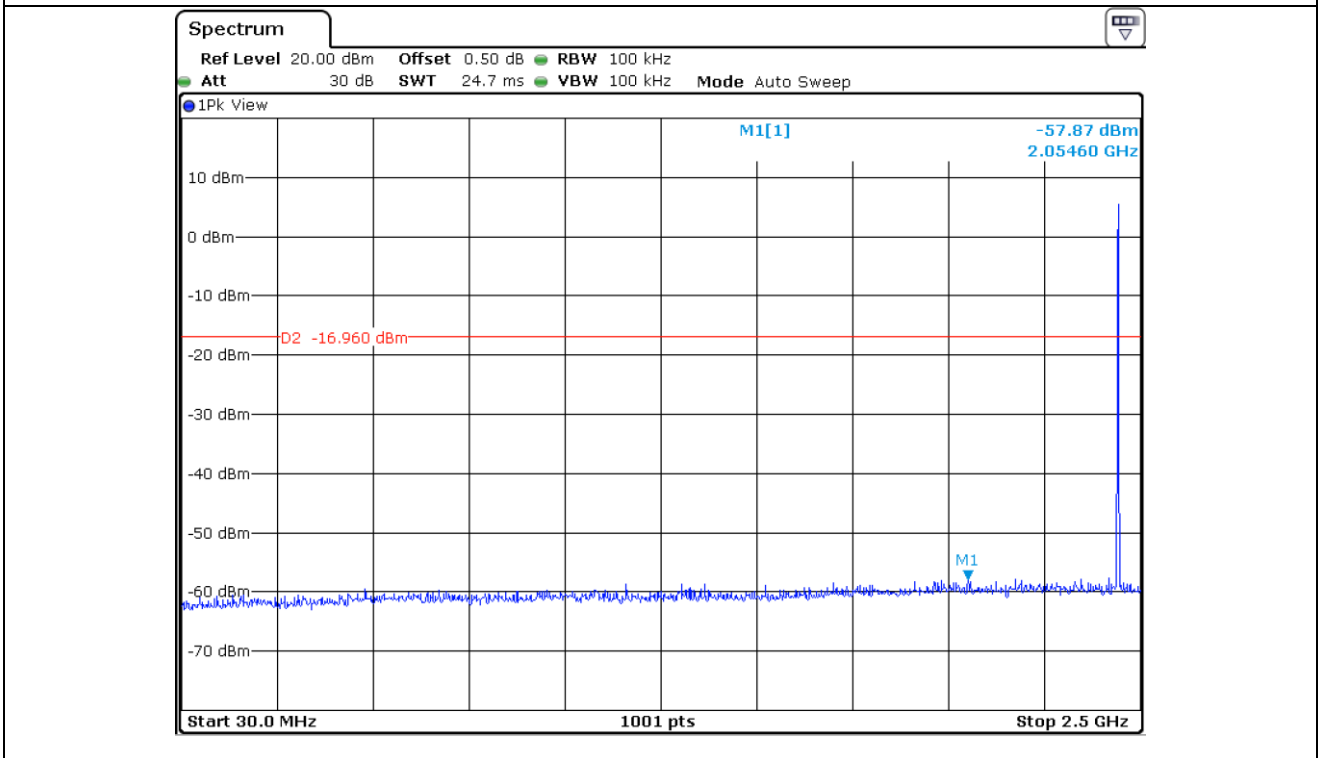


Middle Channel

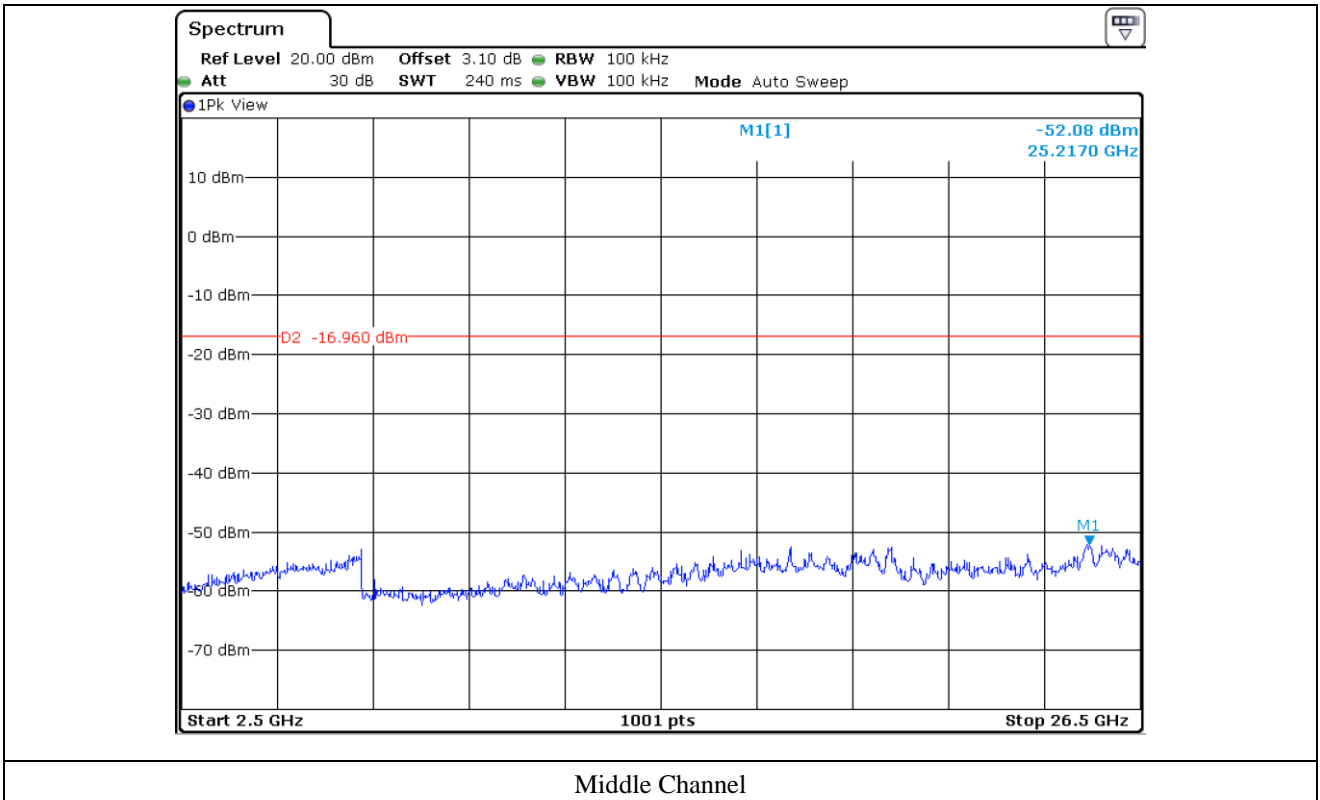


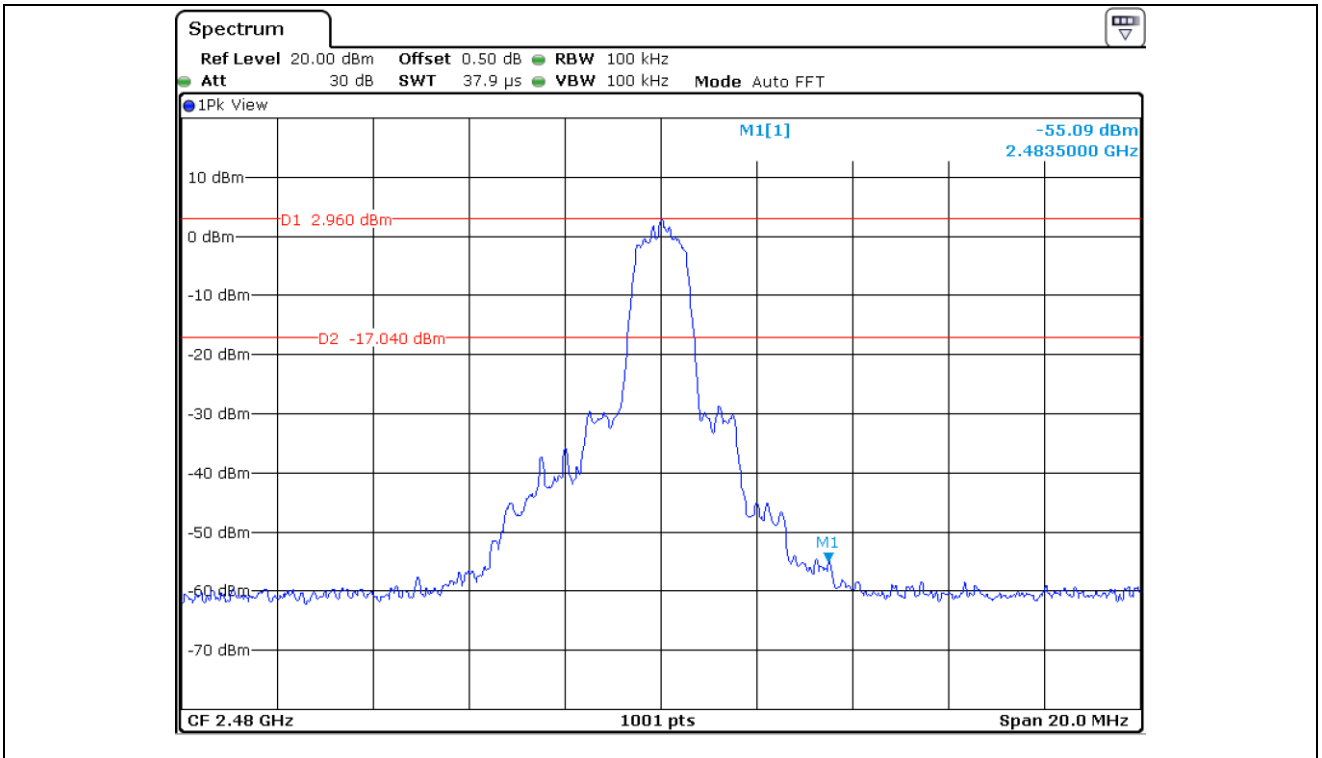


High Channel

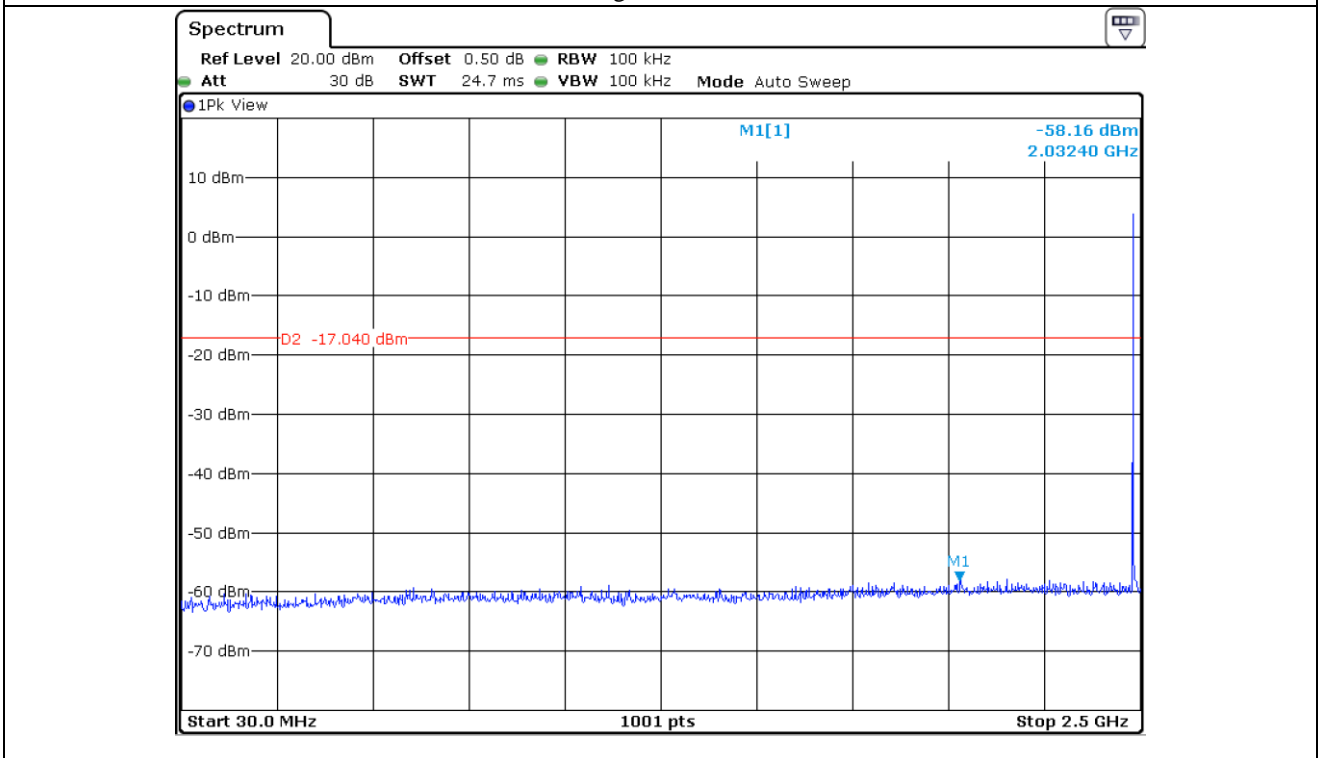


High Channel

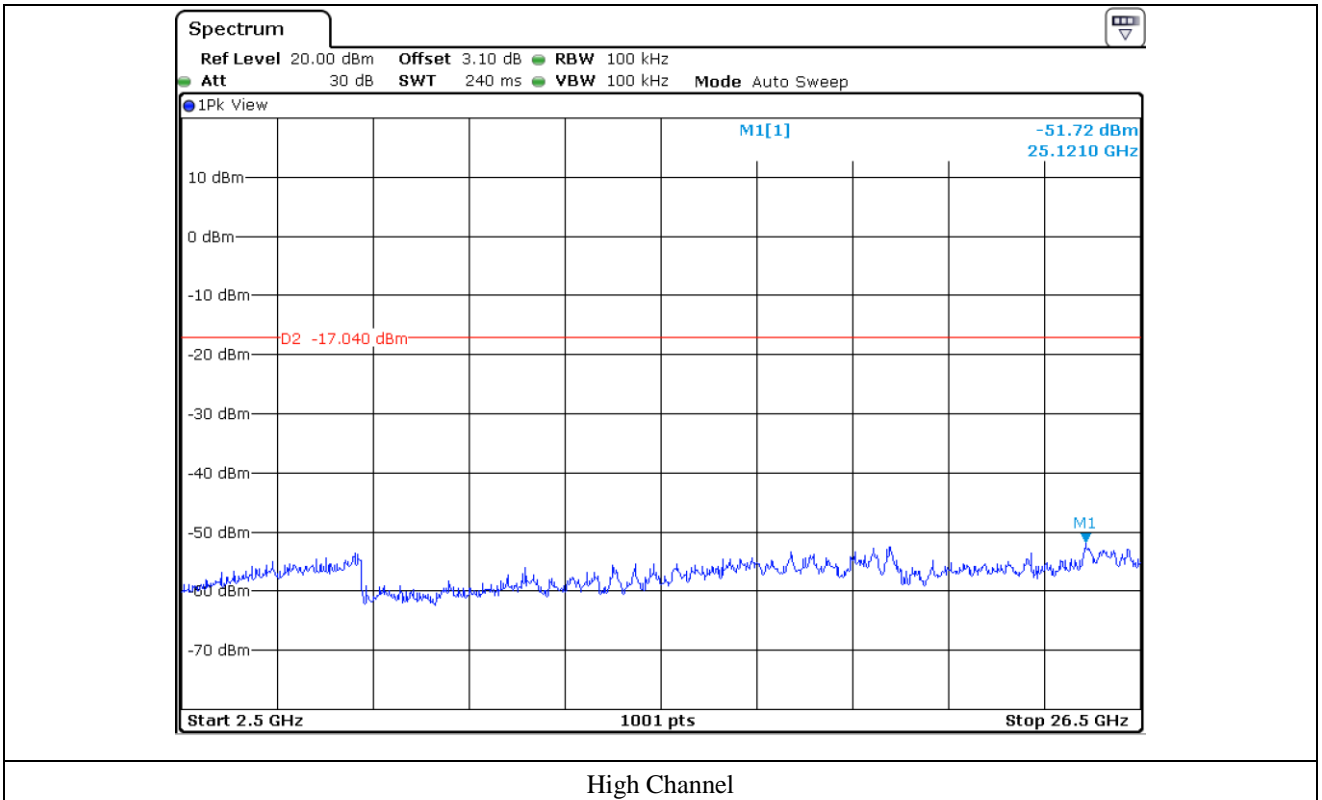


12.5.3 Test data for 3 Mbps

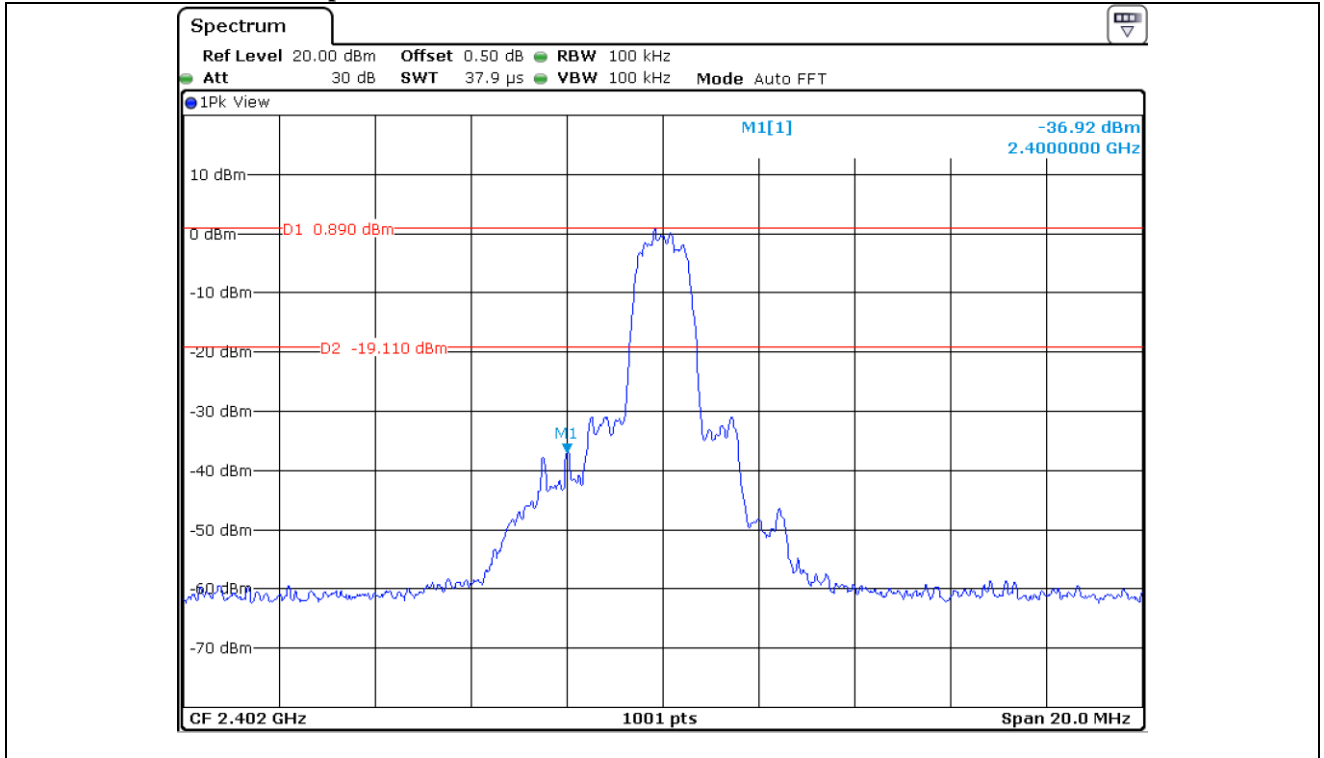


Low Channel

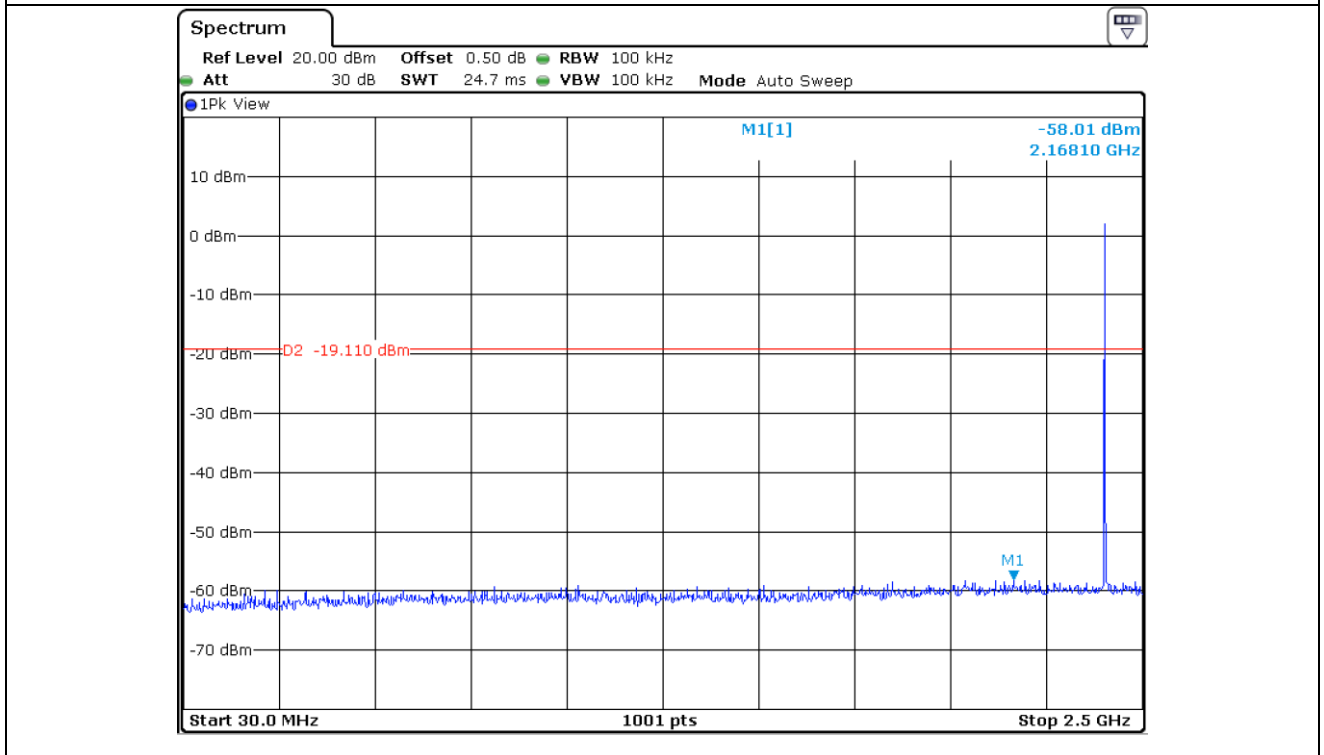


Low Channel

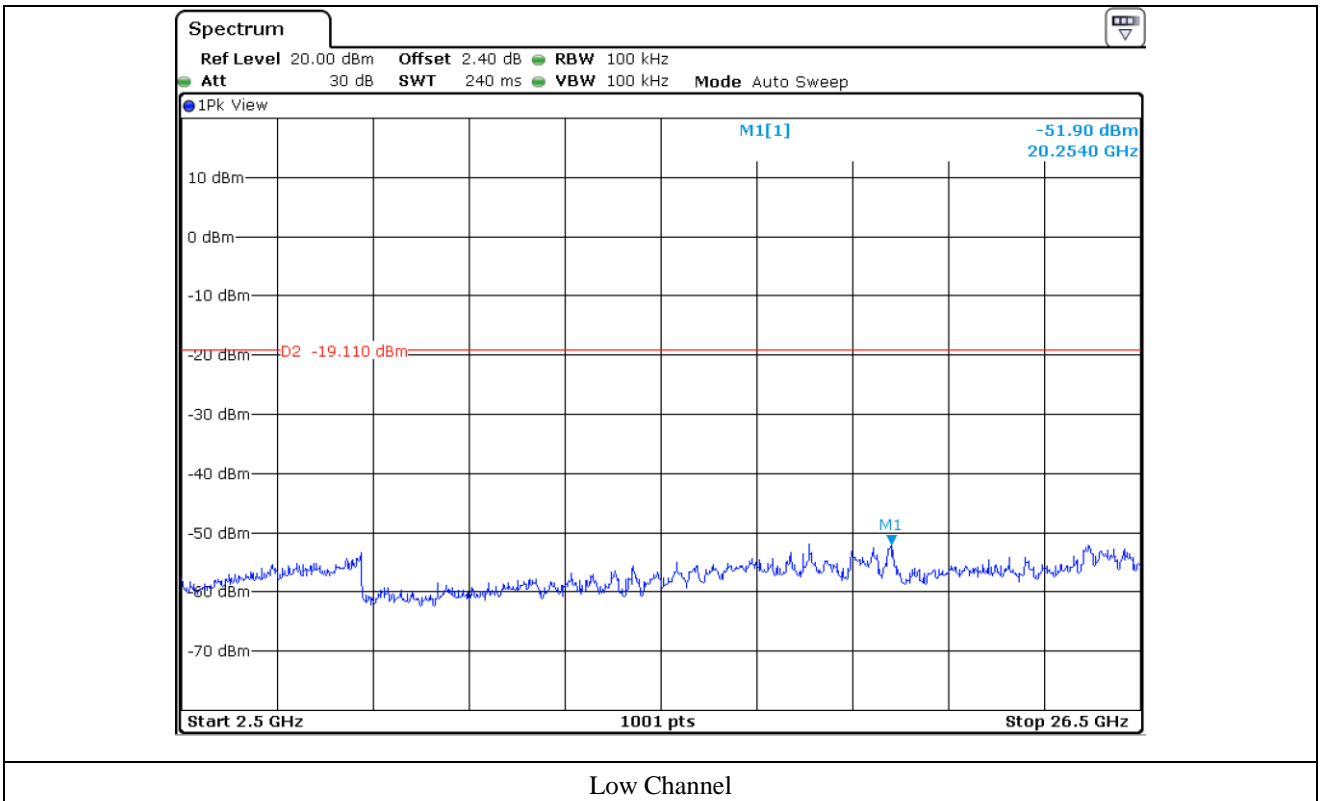


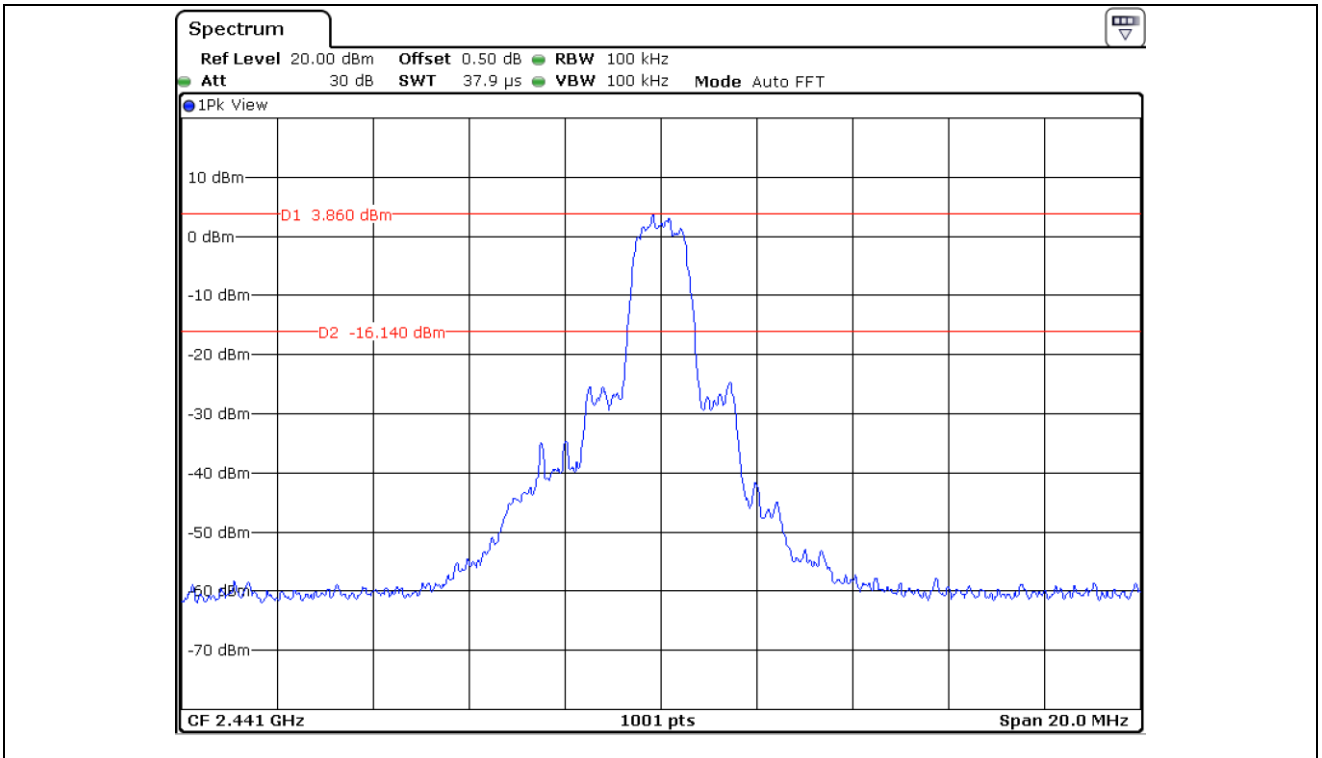


Middle Channel

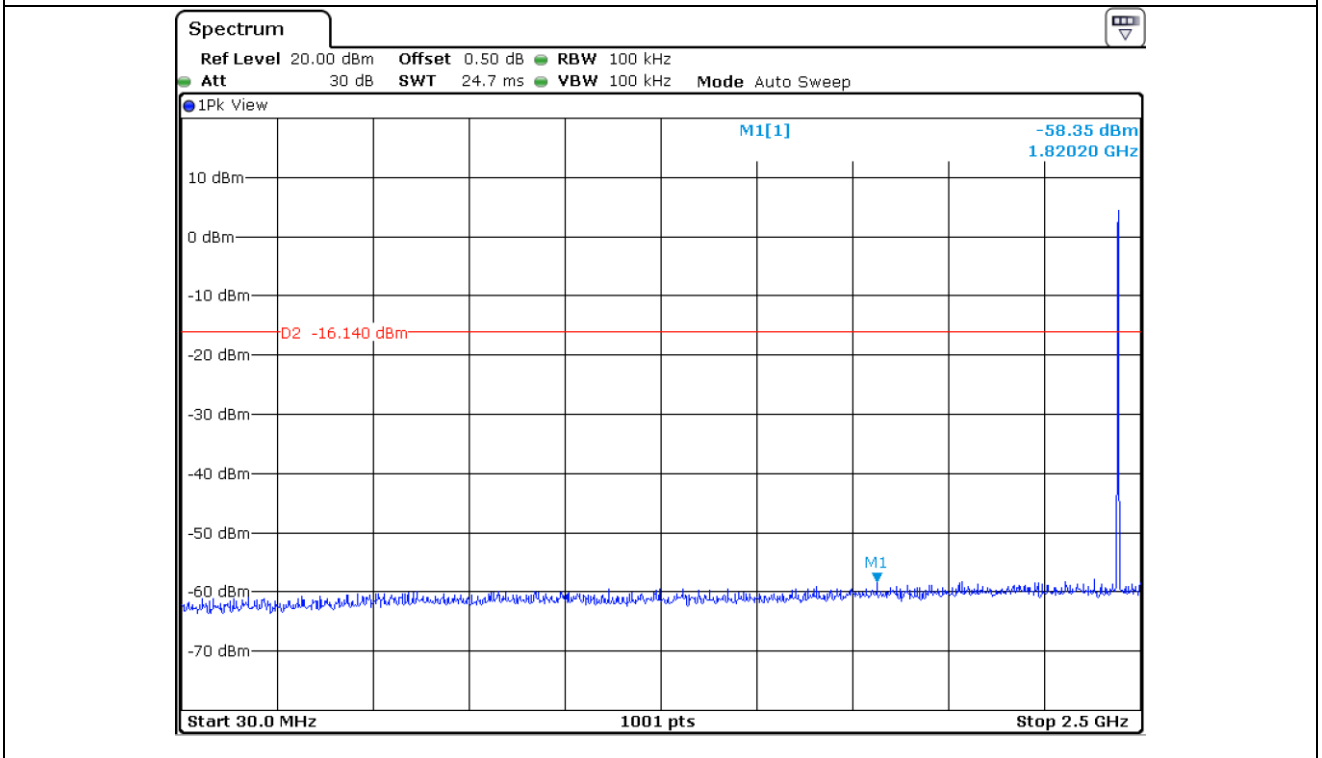


Middle Channel

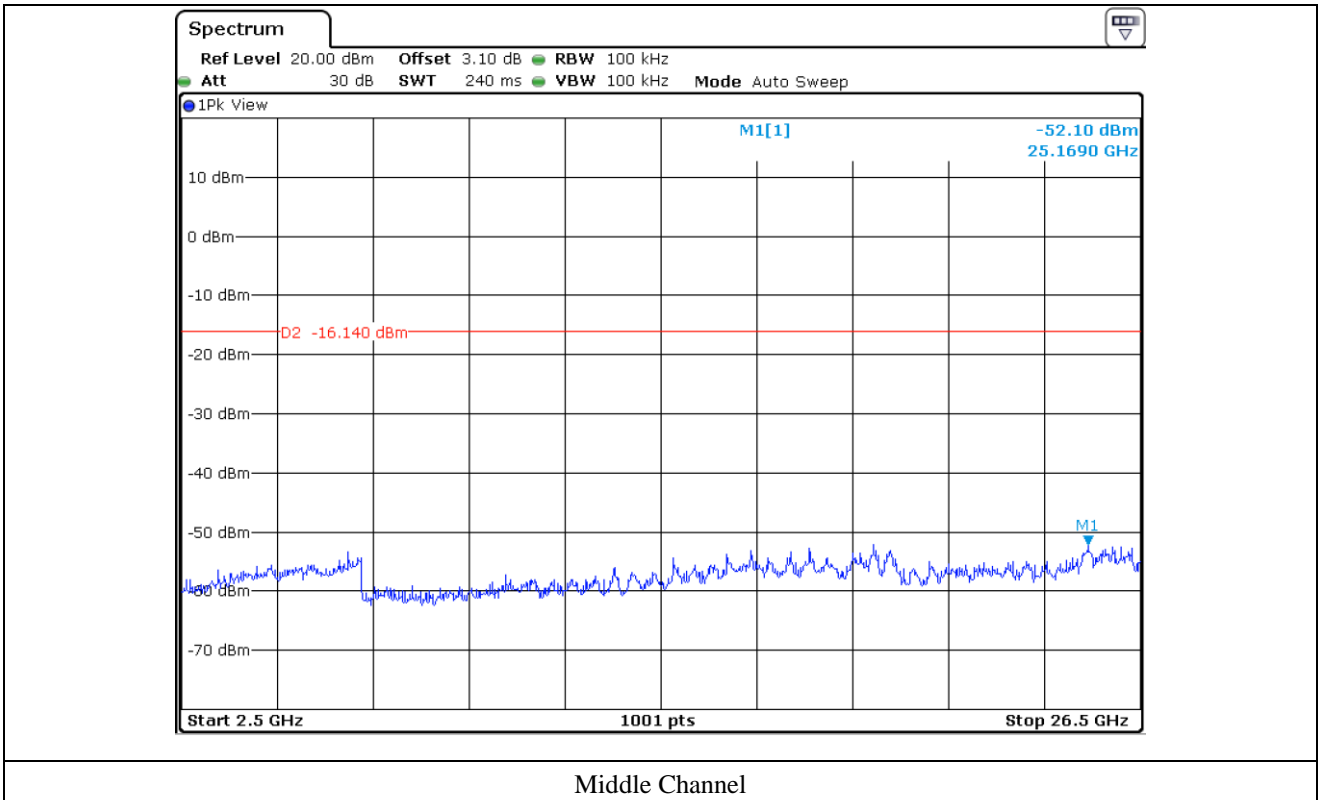


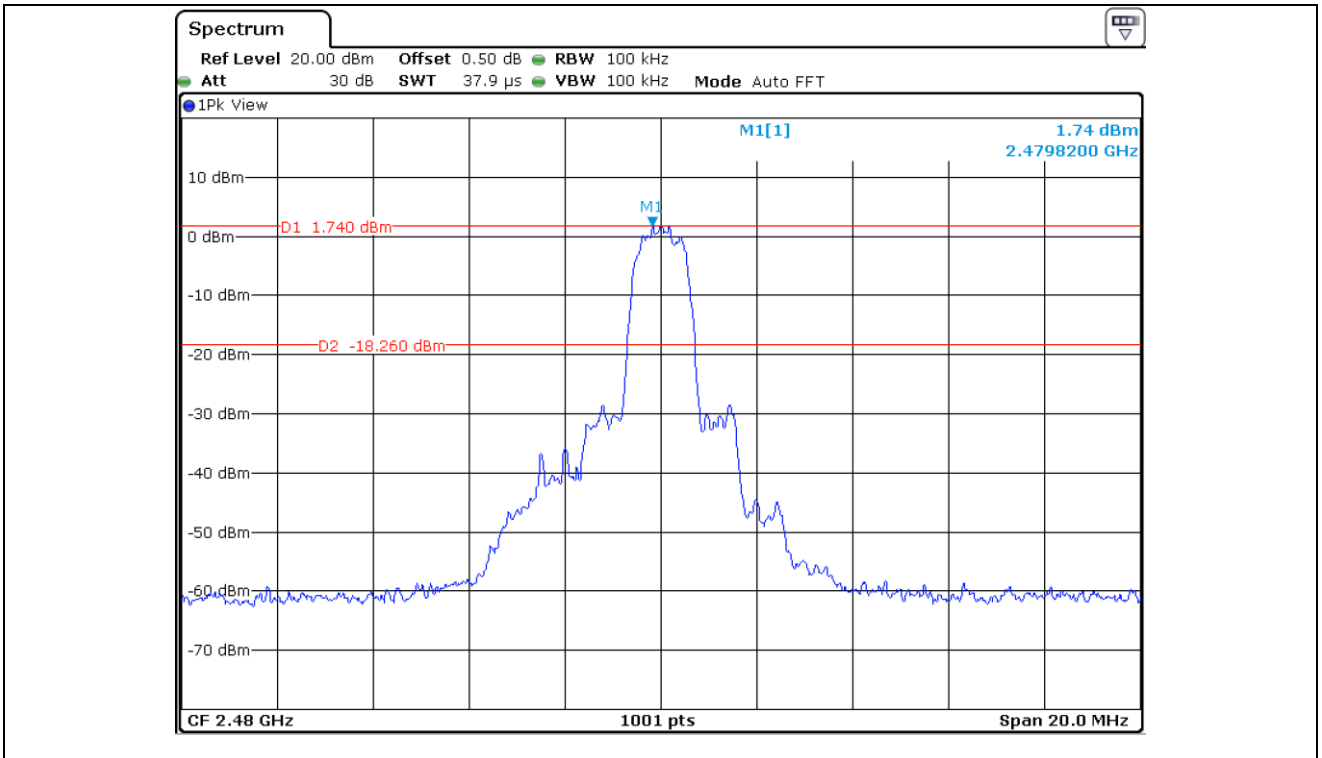

High Channel

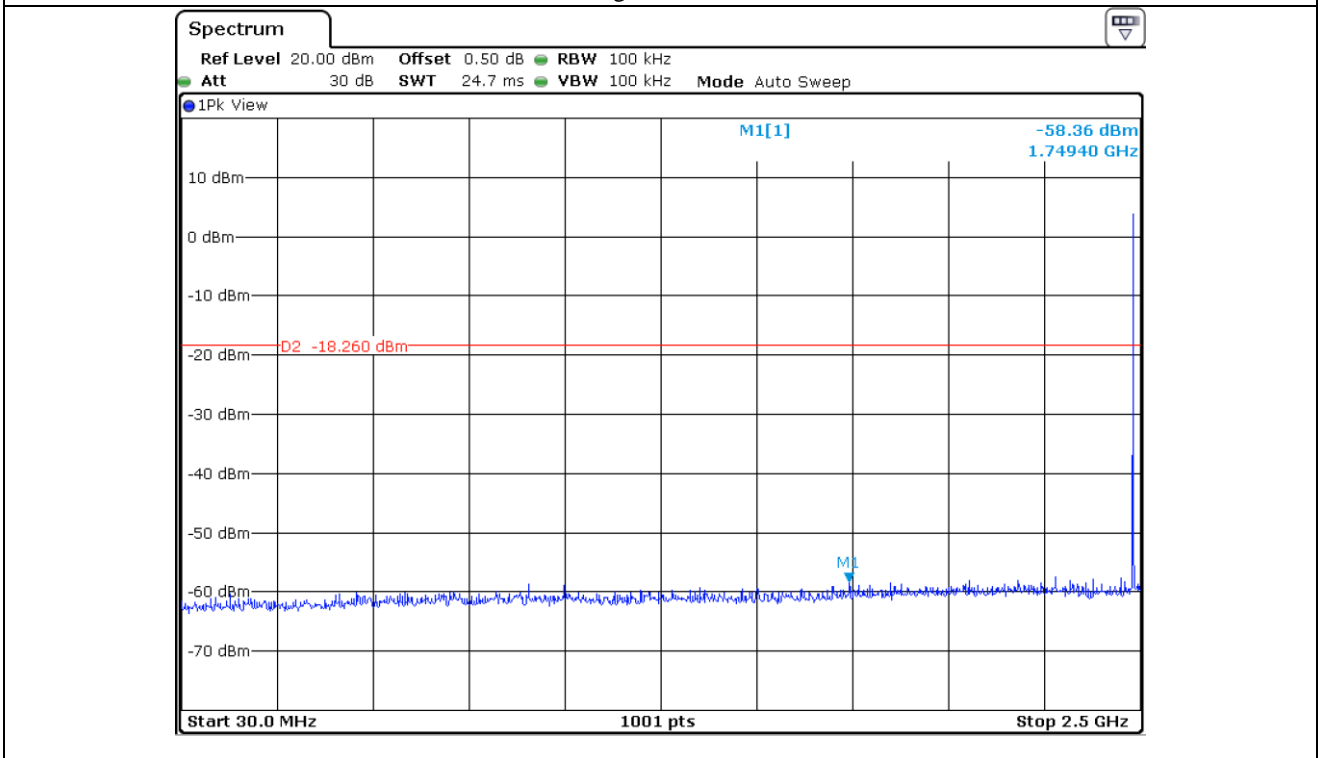

High Channel

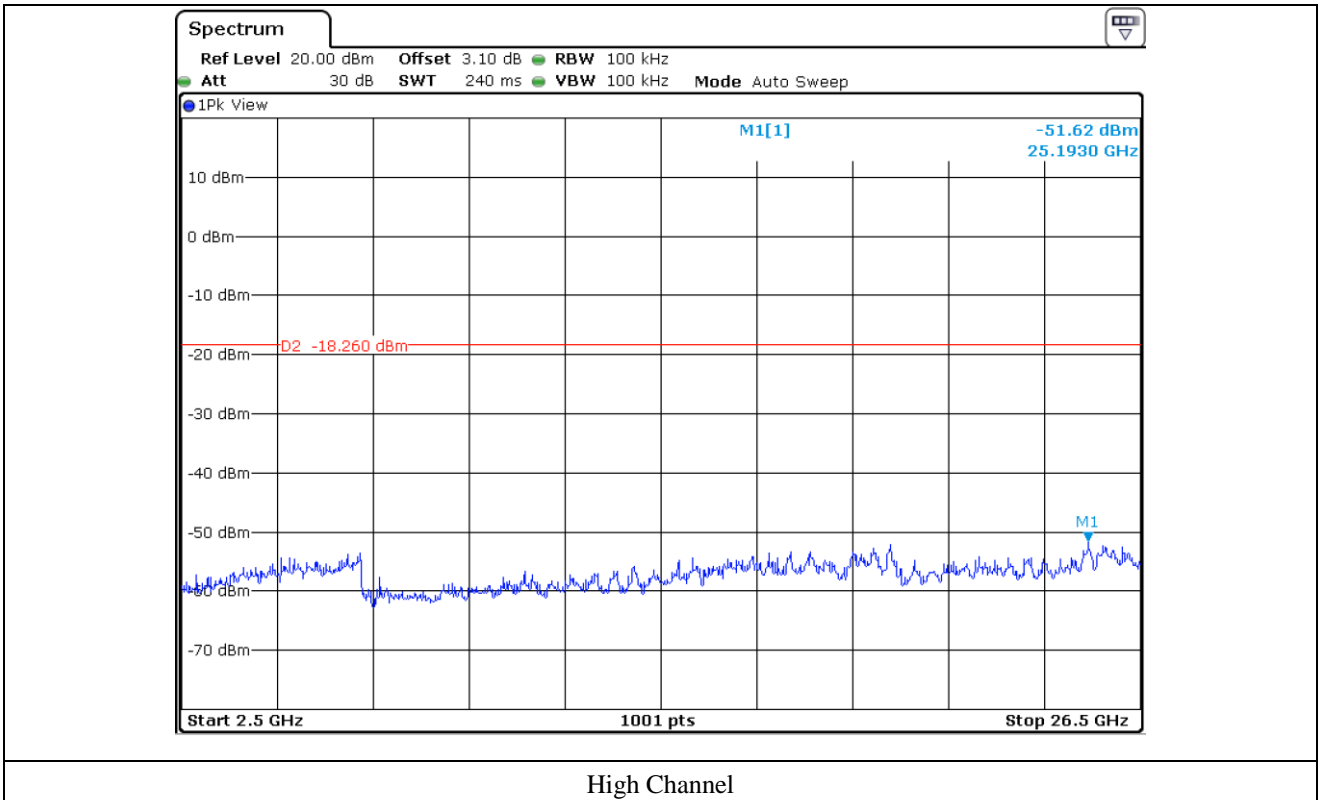

12.6 Test data for Transmitting & Charging mode radiated emission

12.6.1 Radiated Emission which fall in the Restricted Band

12.6.1.1 Test data for 1 Mbps

- . Test Date : November 12, 2017
- . Resolution bandwidth : 1 MHz for Peak and Average Mode
- . Video bandwidth : 3 MHz for Peak and Average Mode
- . Detector : Peak Mode(Peak), Average Mode(RMS)
- . Measurement distance : 3 m
- . Operating Condition : Highest Output Power Transmitting Mode(Low Channel and High Channel)
- . Result : PASSED

Frequency (MHz)	Reading (dB μ V)	Detector Mode	Ant. Pol. (H/V)	Ant. Factor	Cable Loss	Amp Gain	Total (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)
Test Data for Low Channel									
2 342.00	36.51	Peak	H	27.60	11.36	46.38	29.09	74.00	44.91
2 376.05	25.97	Average	H				18.55	54.00	35.45
2 311.39	36.30	Peak	V				28.88	74.00	45.12
2 375.89	25.66	Average	V				18.24	54.00	35.76
Test Data for High Channel									
2 483.50	41.50	Peak	H	27.80	11.36	46.38	34.28	74.00	39.72
	32.87	Average	H				25.65	54.00	28.35
	41.13	Peak	V				33.91	74.00	40.09
	30.94	Average	V				23.72	54.00	30.28

Tabulated test data for Restricted Band

Remark: "H": Horizontal, "V": Vertical



Tested by: Ju Yun Park / Engineer


12.6.1.2 Test data for 2 Mbps

- Test Date : November 12, 2017
- Resolution bandwidth : 1 MHz for Peak and Average Mode
- Video bandwidth : 3 MHz for Peak and Average Mode
- Detector : Peak Mode(Peak), Average Mode(RMS)
- Measurement distance : 3 m
- Operating Condition : Highest Output Power Transmitting Mode(Low Channel and High Channel)
- Result : PASSED

Frequency (MHz)	Reading (dBμV)	Detector Mode	Ant. Pol. (H/V)	Ant. Factor	Cable Loss	Amp Gain	Total (dBμV/m)	Limits (dBμV/m)	Margin (dB)
Test Data for Low Channel									
2 381.16	36.13	Peak	H	27.60	11.36	46.38	28.71	74.00	45.29
2 373.33	25.25	Average	H				17.83	54.00	36.17
2 319.87	36.76	Peak	V				29.34	74.00	44.66
2 345.28	25.69	Average	V				18.27	54.00	35.73
Test Data for High Channel									
2 483.50	41.19	Peak	H	27.80	11.36	46.38	33.97	74.00	40.03
	29.73	Average	H				22.51	54.00	31.49
	42.65	Peak	V				35.43	74.00	38.57
	29.16	Average	V				21.94	54.00	32.06

Tabulated test data for Restricted Band

Remark: “H”: Horizontal, “V”: Vertical



Tested by: Ju Yun Park / Engineer


12.6.1.3 Test data for 3 Mbps

- Test Date : November 12, 2017
- Resolution bandwidth : 1 MHz for Peak and Average Mode
- Video bandwidth : 3 MHz for Peak and Average Mode
- Detector : Peak Mode(Peak), Average Mode(RMS)
- Measurement distance : 3 m
- Operating Condition : Highest Output Power Transmitting Mode(Low Channel and High Channel)
- Result : PASSED

Frequency (MHz)	Reading (dBμV)	Detector Mode	Ant. Pol. (H/V)	Ant. Factor	Cable Loss	Amp Gain	Total (dBμV/m)	Limits (dBμV/m)	Margin (dB)
Test Data for Low Channel									
2 373.65	36.84	Peak	H	27.60	11.36	46.38	29.42	74.00	44.58
2 374.05	25.65	Average	H				18.23	54.00	35.77
2 380.13	36.61	Peak	V				29.19	74.00	44.81
2 345.52	25.39	Average	V				17.97	54.00	36.03
Test Data for High Channel									
2 483.50	40.07	Peak	H	27.80	11.36	46.38	32.85	74.00	41.15
	29.57	Average	H				22.35	54.00	31.65
	41.95	Peak	V				34.73	74.00	39.27
	29.11	Average	V				21.89	54.00	32.11

Tabulated test data for Restricted Band

Remark: “H”: Horizontal, “V”: Vertical



Tested by: Ju Yun Park / Engineer

12.6.2 Spurious & Harmonic Radiated Emission above 1 GHz

12.6.2.1 Test data for 1 Mbps

- Test Date : November 12, 2017
- Resolution bandwidth : 1 MHz for Peak and Average Mode
- Video bandwidth : 3 MHz for Peak and Average Mode
- Detector : Peak Mode(Peak), Average Mode(RMS)
- Frequency range : 1 GHz ~ 26.5 GHz
- Measurement distance : 3 m
- Operating Condition : Highest Output Power Transmitting Mode
- Result : PASSED

Frequency (GHz)	Reading (dBμV)	Detector Mode	Ant. Pol. (H/V)	Ant. Factor	Cable Loss	Amp Gain	Total (dBμV/m)	Limits (dBμV/m)	Margin (dB)
Test Data for Low Channel									
4 804.00	37.40	Peak	H	31.30	16.10	46.37	38.43	74.00	35.57
	26.83	Average	H				27.86	54.00	26.14
	37.72	Peak	V				38.75	74.00	35.25
	24.99	Average	V				26.02	54.00	27.98
Test Data for Middle Channel									
4 882.00	36.56	Peak	H	31.30	16.30	46.37	37.79	74.00	36.21
	27.37	Average	H				28.60	54.00	25.40
	36.08	Peak	V				37.31	74.00	36.69
	28.45	Average	V				29.68	54.00	24.32
Test Data for High Channel									
4 960.00	35.03	Peak	H	31.10	16.50	46.37	36.26	74.00	37.74
	24.99	Average	H				26.22	54.00	27.78
	34.54	Peak	V				35.77	74.00	38.23
	23.00	Average	V				24.23	54.00	29.77

Tabulated test data for Restricted Band

Remark: "H": Horizontal, "V": Vertical, "*" Frequency fall in restricted band



Tested by: Ju Yun Park / Engineer

12.6.2.2 Test data for 2 Mbps

- Test Date : November 12, 2017
- Resolution bandwidth : 1 MHz for Peak and Average Mode
- Video bandwidth : 3 MHz for Peak and Average Mode
- Detector : Peak Mode(Peak), Average Mode(RMS)
- Frequency range : 1 GHz ~ 26.5 GHz
- Measurement distance : 3 m
- Operating Condition : Highest Output Power Transmitting Mode
- Result : PASSED

Frequency (GHz)	Reading (dBμV)	Detector Mode	Ant. Pol. (H/V)	Ant. Factor	Cable Loss	Amp Gain	Total (dBμV/m)	Limits (dBμV/m)	Margin (dB)
Test Data for Low Channel									
4 804.00	36.32	Peak	H	31.30	16.10	46.37	37.35	74.00	36.65
	25.37	Average	H				26.40	54.00	27.60
	35.41	Peak	V				36.44	74.00	37.56
	25.10	Average	V				26.13	54.00	27.87
Test Data for Middle Channel									
4 882.00	32.93	Peak	H	31.30	16.30	46.37	34.16	74.00	39.84
	23.86	Average	H				25.09	54.00	28.91
	33.32	Peak	V				34.55	74.00	39.45
	23.30	Average	V				24.53	54.00	29.47
Test Data for High Channel									
4 960.00	33.58	Peak	H	31.10	16.50	46.37	34.81	74.00	39.19
	23.87	Average	H				25.10	54.00	28.90
	32.67	Peak	V				33.90	74.00	40.10
	23.10	Average	V				24.33	54.00	29.67

Tabulated test data for Restricted Band

Remark: “H”: Horizontal, “V”: Vertical, “*” Frequency fall in restricted band



Tested by: Ju Yun Park / Engineer


12.6.2.3 Test data for 3 Mbps

- Test Date : November 12, 2017
- Resolution bandwidth : 1 MHz for Peak and Average Mode
- Video bandwidth : 3 MHz for Peak and Average Mode
- Detector : Peak Mode(Peak), Average Mode(RMS)
- Frequency range : 1 GHz ~ 26.5 GHz
- Measurement distance : 3 m
- Operating Condition : Highest Output Power Transmitting Mode
- Result : PASSED

Frequency (GHz)	Reading (dBμV)	Detector Mode	Ant. Pol. (H/V)	Ant. Factor	Cable Loss	Amp Gain	Total (dBμV/m)	Limits (dBμV/m)	Margin (dB)
Test Data for Low Channel									
4 804.00	36.02	Peak	H	31.30	16.10	46.37	37.05	74.00	36.95
	26.62	Average	H				27.65	54.00	26.35
	35.69	Peak	V				36.72	74.00	37.28
	26.01	Average	V				27.04	54.00	26.96
Test Data for Middle Channel									
4 882.00	33.44	Peak	H	31.30	16.30	46.37	34.67	74.00	39.33
	23.00	Average	H				24.23	54.00	29.77
	32.63	Peak	V				33.86	74.00	40.14
	24.88	Average	V				26.11	54.00	27.89
Test Data for High Channel									
4 960.00	34.05	Peak	H	31.10	16.50	46.37	35.28	74.00	38.72
	23.61	Average	H				24.84	54.00	29.16
	33.61	Peak	V				34.84	74.00	39.16
	23.35	Average	V				24.58	54.00	29.42

Tabulated test data for Restricted Band

Remark: "H": Horizontal, "V": Vertical, "*" Frequency fall in restricted band



Tested by: Ju Yun Park / Engineer

13. Radiated Emission

13.1 Operating environment

Temperature : (23 ~ 24) °C
 Relative humidity : (48 ~ 49) % R.H

13.2 Test set-up

The radiated emissions measurements were performed on the 3 m, open-field test site. The EUT was placed on a non-conductive turntable approximately 0.8 m above the ground plane.

The frequency spectrum from 30 kHz to 26.5 GHz was scanned and maximum emission levels at each frequency recorded. The system was rotated 360°, and the antenna was varied in the height between 1.0 m and 4.0 ms in order to determine the maximum emission levels. This procedure was performed for horizontal and vertical polarization of the receiving antenna.

13.3 Test equipment used

Model Number	Manufacturer	Description	Serial Number	Last Cal. (Interval)
□ - ESCI	Rohde & Schwarz	EMI Test Receiver	101012	Oct. 27, 2017 (1Y)
■ - ESR	Rohde & Schwarz	EMI Test Receiver	101470	Oct. 27, 2017 (1Y)
□ - FSP	Rohde & Schwarz	Spectrum Analyzer	100017	Sep. 04, 2017 (1Y)
■ - 310N	Sonoma Instrument	AMPLIFIER	312544	Apr. 04, 2017 (1Y)
■ - FSV30	Rohde & Schwarz	Signal Analyzer	101200	Oct. 26, 2017 (1Y)
■ - SCU-18	Rohde & Schwarz	Pre-Amplifier	102346	Oct. 24, 2017 (1Y)
■ - MA-4000XPET	Innco Systems GmbH	Antenna Master	MA4000/509	N/A
□ - HD100	HD GmbH	Position Controller	N/A	N/A
■ - DT3000-3t	Innco Systems GmbH	Turn Table	N/A	N/A
□ - FMZB 1513	Schwarzbeck	LOOP ANTENNA	1513-235	Jun. 10, 2016 (2Y)
■ - VULB9163	Schwarzbeck	TRILOG Broadband Antenna	9163-255	May 20, 2016 (2Y)
■ - BBHA9120D	Schwarzbeck	Horn Antenna	BBHA9120D295	Aug. 16, 2017 (2Y)
■ - BBHA9170	Schwarzbeck	Horn Antenna	BBHA91700179	Jul. 28, 2017 (2Y)
■ - SCU40A	Rohde & Schwarz	Pre-Amplifier	100436	Apr. 04, 2017 (1Y)

All test equipment used is calibrated on a regular basis.

13.4 Test Data Transmitting & Charging mode

13.4.1 Test Data for 30 MHz ~ 1 000 MHz


Humidity Level : (48 ~ 49) % R.H. Temperature: (23 ~ 24) °C

Limits apply to : FCC CFR 47, PART 15, SUBPART C, SECTION 15.247

Result : PASSED

EUT : In-ear headset Date: November 12, 2017

Detector : CISPR Quasi-Peak (6 dB Bandwidth: 120 kHz)

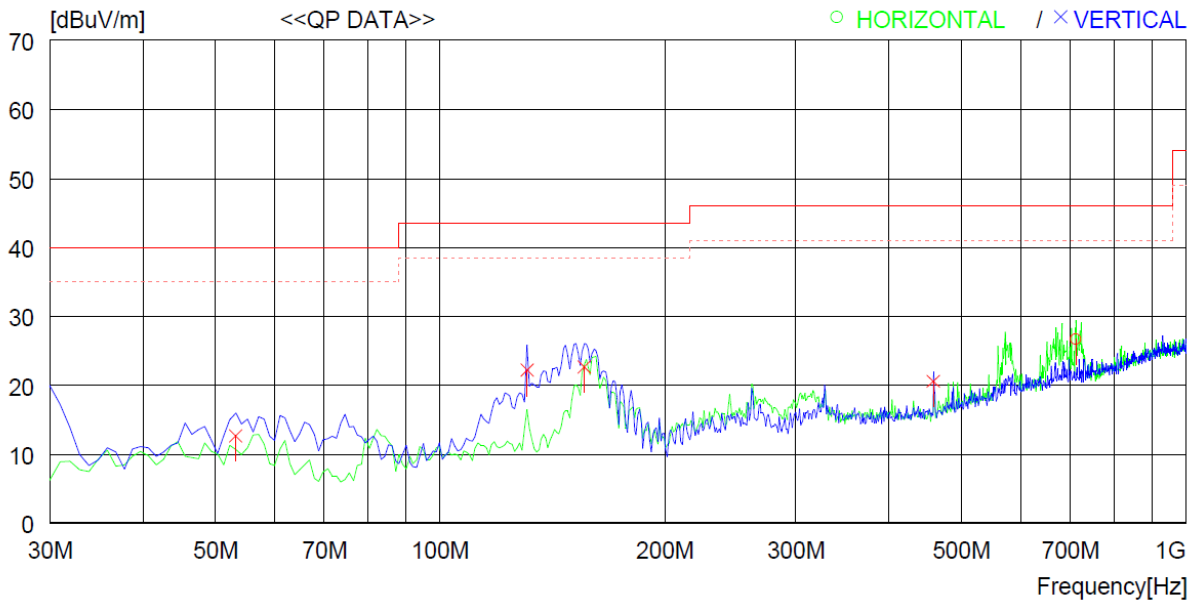

No.	FREQ [MHz]	READING QP [dBuV]	ANT FACTOR [dB]	LOSS [dB]	GAIN [dB]	RESULT [dBuV/m]	LIMIT [dBuV/m]	MARGIN [dB]	ANTENNA [cm]	TABLE [DEG]
----- Horizontal -----										
1	711.905	34.3	19.8	6.1	33.5	26.7	46.0	19.3	100	0
----- Vertical -----										
2	53.280	30.2	13.8	1.8	33.1	12.7	40.0	27.3	100	183
3	130.880	43.5	9.0	2.7	33.0	22.2	43.5	21.3	100	359
4	156.100	44.1	8.6	3.0	33.0	22.7	43.5	20.8	100	359
5	458.741	32.6	16.3	4.9	33.2	20.6	46.0	25.4	100	147

Tested by: Ju Yun Park / Engineer

13.4.2 Test Data for Below 30 MHz


- . Test Date : November 12, 2017
- . Resolution bandwidth : 200 Hz (from 9 kHz to 0.15 MHz), 9 kHz (from 0.15 MHz to 30 MHz)
- . Frequency range : 9 kHz ~ 30 MHz
- . Measurement distance : 3 m
- . Operating Condition : Highest Output Power Transmitting Mode
- . Result : PASSED

Frequency (MHz)	Reading (dBμV)	Ant. Pol. (H/V)	Ant. Factor (dB/m)	Cable Loss	Amp Gain	Emission Level(dBμV/m)	Limits (dBμV/m)	Margin (dB)
Any emissions were not observed from the EUT.								

13.4.3 Test Data for above 1 GHz

- . Test Date : November 12, 2017
- . Resolution bandwidth : 1 MHz for Peak and Average Mode
- . Frequency range : 1 GHz ~ 26.5 GHz
- . Measurement distance : 3 m
- . Operating Condition : Highest Output Power Transmitting Mode
- . Result : PASSED

Frequency (MHz)	Reading (dBμV)	Ant. Pol. (H/V)	Ant. Factor (dB/m)	Cable Loss	Amp Gain	Emission Level(dBμV/m)	Limits (dBμV/m)	Margin (dB)
Any emissions were not observed from the EUT.								



Tested by: Ju Yun Park / Engineer

14. CONDUCTED EMISSION TEST

14.1 Operating environment

Temperature : (23 ~ 24) °C
 Relative humidity : (45 ~ 46) % R.H.

14.2 Test set-up

The EUT was placed on a wooden table, 0.8 m height above the floor. Power was fed to the EUT through a 50 Ω / 50 μH + 5 Ω Artificial Mains Network (AMN). The ground plane was electrically bonded to the reference ground system and all power lines were filtered from ambient.


14.3 Test equipment used

Model Number	Manufacturer	Description	Serial Number	Last Cal. (Interval)
■ - ESCI	Rohde & Schwarz	EMI Test Receiver	101012	Oct. 27, 2017 (1Y)
□ - ESHS10	Rohde & Schwarz	EMI Test Receiver	834467/007	Apr. 03, 2017 (1Y)
■ - NSLK8128	Schwarzbeck	AMN	8128-216	Apr. 05, 2017 (1Y)
□ - NSLK8126	Schwarzbeck	AMN	8126-404	Apr. 03, 2017 (1Y)
□ - 3825/2	EMCO	AMN	9109-1869	Apr. 06, 2017 (1Y)

All test equipment used is calibrated on a regular basis.


14.4 Test data for Transmitting & Charging mode

- Test Date : November 13, 2017
- Resolution bandwidth : 9 kHz
- Frequency range : 0.15 MHz ~ 30 MHz
- Tested Line : HOT LINE

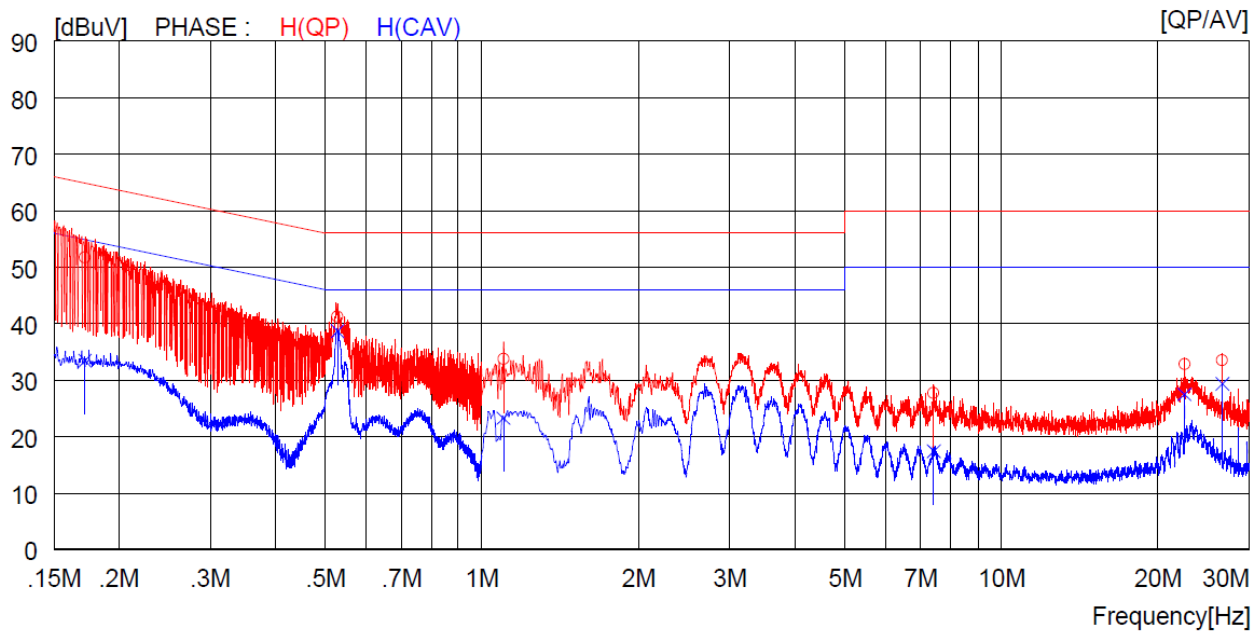

NO	FREQ [MHz]	READING		C. FACTOR [dB]	RESULT		LIMIT		MARGIN		PHASE
		QP [dBuV]	AV [dBuV]		QP [dBuV]	AV [dBuV]	QP [dBuV]	AV [dBuV]			
1	0.17200	41.8	----	9.9	51.7	----	64.9	----	13.2	----	H (QP)
2	0.52700	31.3	----	10.0	41.3	----	56.0	----	14.7	----	H (QP)
3	1.10000	23.8	----	10.0	33.8	----	56.0	----	22.2	----	H (QP)
4	7.41000	17.5	----	10.2	27.7	----	60.0	----	32.3	----	H (QP)
5	22.53000	22.4	----	10.4	32.8	----	60.0	----	27.2	----	H (QP)
6	26.63000	23.2	----	10.3	33.5	----	60.0	----	26.5	----	H (QP)
7	0.17200	----	23.6	9.9	----	33.5	----	54.9	----	21.4	H (CAV)
8	0.52700	----	28.7	10.0	----	38.7	----	46.0	----	7.3	H (CAV)
9	1.10000	----	13.3	10.0	----	23.3	----	46.0	----	22.7	H (CAV)
10	7.41000	----	7.2	10.2	----	17.4	----	50.0	----	32.6	H (CAV)
11	22.53000	----	17.1	10.4	----	27.5	----	50.0	----	22.5	H (CAV)
12	26.63000	----	19.1	10.3	----	29.4	----	50.0	----	20.6	H (CAV)

-. Tested Line : NEUTRAL LINE

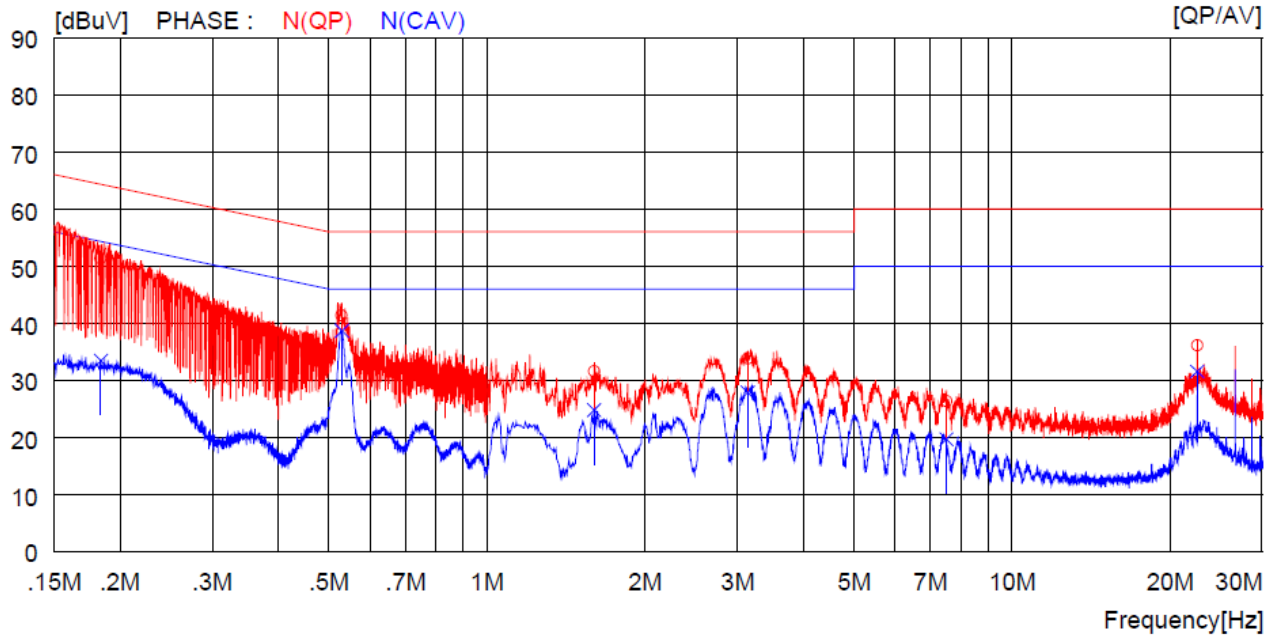

NO	FREQ [MHz]	READING		C. FACTOR [dB]	RESULT		LIMIT		MARGIN		PHASE
		QP [dBuV]	AV [dBuV]		QP [dBuV]	AV [dBuV]	QP [dBuV]	AV [dBuV]	QP [dBuV]	AV [dBuV]	
1	0.18400	41.5	----	9.9	51.4	----	64.3	----	12.9	----	N(QP)
2	0.52900	31.4	----	10.0	41.4	----	56.0	----	14.6	----	N(QP)
3	1.60000	21.6	----	10.0	31.6	----	56.0	----	24.4	----	N(QP)
4	3.14000	23.8	----	10.1	33.9	----	56.0	----	22.1	----	N(QP)
5	7.50500	16.2	----	10.2	26.4	----	60.0	----	33.6	----	N(QP)
6	22.53000	25.8	----	10.4	36.2	----	60.0	----	23.8	----	N(QP)
7	0.18400	----	23.6	9.9	----	33.5	----	54.3	----	20.8	N(CAV)
8	0.52900	----	28.7	10.0	----	38.7	----	46.0	----	7.3	N(CAV)
9	1.60000	----	14.8	10.0	----	24.8	----	46.0	----	21.2	N(CAV)
10	3.14000	----	17.8	10.1	----	27.9	----	46.0	----	18.1	N(CAV)
11	7.50500	----	9.5	10.2	----	19.7	----	50.0	----	30.3	N(CAV)
12	22.53000	----	21.2	10.4	----	31.6	----	50.0	----	18.4	N(CAV)

Remark: Margin (dB) = Limit – Level (Result)

The emission level in above table is included the transducer factor that means insertion loss (LISN), cable loss and attenuator.

Tested by: Ju Yun Park / Engineer