



# FCC RF Test Report

APPLICANT : Dell Inc.  
EQUIPMENT : Tablet PC  
BRAND NAME : DELL  
MODEL NAME : T02E002  
FCC ID : E2K-T02E002  
STANDARD : FCC 47 CFR Part 2, 22(H), 24(E), 27(L)  
CLASSIFICATION : PCS Licensed Transmitter (PCB)

The product was received on Jan. 06, 2015 and testing was completed on Jan. 27, 2015. We, SPORTON INTERNATIONAL INC., would like to declare that the tested sample has been evaluated in accordance with the test procedures given in ANSI / TIA / EIA-603-C-2004 and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL INC., the test report shall not be reproduced except in full.

Reviewed by: Joseph Lin / Supervisor

Approved by: Jones Tsai / Manager



## SPORTON INTERNATIONAL INC.

No. 52, Hwa Ya 1<sup>st</sup> Rd., Hwa Ya Technology Park, Kwei-Shan District, Tao Yuan City, Taiwan, R.O.C.



# TABLE OF CONTENTS

**REVISION HISTORY..... 3**

**SUMMARY OF TEST RESULT ..... 4**

**1 GENERAL DESCRIPTION ..... 5**

    1.1 Applicant..... 5

    1.2 Manufacturer ..... 5

    1.3 Product Feature of Equipment Under Test ..... 5

    1.4 Product Specification subjective to this standard ..... 6

    1.5 Modification of EUT ..... 6

    1.6 Maximum ERP/EIRP Power, Frequency Tolerance, and Emission Designator ..... 7

    1.7 Testing Location ..... 7

    1.8 Applicable Standards ..... 8

**2 TEST CONFIGURATION OF EQUIPMENT UNDER TEST ..... 9**

    2.1 Test Mode..... 9

    2.2 Connection Diagram of Test System ..... 11

    2.3 Support Unit used in test configuration ..... 11

    2.4 Measurement Results Explanation Example ..... 11

**3 TEST RESULT ..... 12**

    3.1 Conducted Output Power and ERP/EIRP Measurement ..... 12

    3.2 Peak-to-Average Ratio ..... 15

    3.3 99% Occupied Bandwidth and 26dB Bandwidth Measurement..... 31

    3.4 Band Edge Measurement..... 55

    3.5 Conducted Spurious Emission Measurement ..... 63

    3.6 Field Strength of Spurious Radiation Measurement ..... 85

    3.7 Frequency Stability Measurement..... 108

**4 LIST OF MEASURING EQUIPMENT ..... 114**

**5 UNCERTAINTY OF EVALUATION ..... 115**

**APPENDIX A. SETUP PHOTOGRAPHS**





## SUMMARY OF TEST RESULT

Report Section	FCC Rule	IC Rule	Description	Limit	Result	Remark
3.1	§2.1046	RSS-132 (5.4) RSS-133 (6.4) RSS-139 (6.4)	Conducted Output Power	Reporting Only	PASS	-
	§22.913(a)(2)	RSS-132(5.4) SRSP-503(5.1.3)	Effective Radiated Power	< 7 Watts	PASS	-
	§24.232(c)	RSS-133 (6.4) SRSP-510(5.1.2)	Equivalent Isotropic Radiated Power	< 2 Watts	PASS	-
	§27.50(d)(4)	RSS-139 (6.4) SRSP-513(5.1.2)	Equivalent Isotropic Radiated Power	< 1 Watts	PASS	-
3.2	§24.232(d)	RSS-132 (5.4) RSS-133 (6.4) RSS-139 (6.4)	Peak-to-Average Ratio	< 13 dB	PASS	-
3.3	§2.1049 §22.917(b) §24.238(b) §27.53(g)	RSS-GEN(4.6.1) RSS-133(6.5) RSS-139 (6.5)	Occupied Bandwidth	Reporting Only	PASS	-
3.4	§2.1051 §22.917(a) §24.238(a) §27.53(h)	RSS-GEN(4.9) RSS-132 (5.5) RSS-133 (6.5) RSS-139 (6.5)	Band Edge Measurement	< 43+10log10(P[Watts])	PASS	-
3.5	§2.1051 §22.917(a) §24.238(a) §27.53(h)	RSS-GEN(4.9) RSS-132 (5.5) RSS-133 (6.5) RSS-139 (6.5)	Conducted Emission	< 43+10log10(P[Watts])	PASS	-
3.6	§2.1053 §22.917(a) §24.238(a) §27.53(h)	RSS-GEN(4.9) RSS-132 (5.5) RSS-133 (6.5) RSS-139 (6.5)	Field Strength of Spurious Radiation	< 43+10log10(P[Watts])	PASS	Under limit 28.75 dB at 5548.000 MHz
3.7	§2.1055 §22.355	RSS-GEN(4.7) RSS-132 (5.3)	Frequency Stability for Temperature & Voltage	< 2.5 ppm for Part 22	PASS	-
	§2.1055 §24.235 §27.54	RSS-GEN(4.7) RSS-133 (6.3) RSS-139 (6.3)		Within Authorized Band		



# 1 General Description

## 1.1 Applicant

Dell Inc.  
One Dell Way, Round Rock, Texas 78682, USA

## 1.2 Manufacturer

Dell Inc.  
One Dell Way, Round Rock, Texas 78682, USA

## 1.3 Product Feature of Equipment Under Test

Product Feature	
Equipment	Tablet PC
Brand Name	DELL
Model Name	T02E002
FCC ID	E2K-T02E002
Integrated WWAN Chip	Brand Name: Intel Model Name: X-GOLD 726G
EUT supports Radios application	GSM/EGPRS/WCDMA/HSPA/LTE WLAN 11b/g/n HT20 WLAN 11a/n HT20/HT40 WLAN 11ac VHT20/VHT40/VHT80 Bluetooth v4.0 EDR/LE
EUT Stage	Identical Prototype

**Remark:** The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.



### 1.4 Product Specification subjective to this standard

Product Specification subjective to this standard	
<b>Tx Frequency</b>	GSM850: 824.2 MHz ~ 848.8 MHz GSM1900: 1850.2 MHz ~ 1909.8MHz WCDMA Band V: 826.4 MHz ~ 846.6 MHz WCDMA Band IV : 1712.4 MHz ~ 1752.6 MHz WCDMA Band II: 1852.4 MHz ~ 1907.6 MHz
<b>Rx Frequency</b>	GSM850: 869.2 MHz ~ 893.8 MHz GSM1900: 1930.2 MHz ~ 1989.8 MHz WCDMA Band V: 871.4 MHz ~ 891.6 MHz WCDMA Band IV : 2112.4 MHz ~ 2152.6 MHz WCDMA Band II: 1932.4 MHz ~ 1987.6 MHz
<b>Maximum Output Power to Antenna</b>	GSM850 : 32.96 dBm GSM1900 : 29.96 dBm WCDMA Band V : 24.09 dBm WCDMA Band IV : 24.49 dBm WCDMA Band II : 24.47 dBm
<b>99% Occupied Bandwidth</b>	GSM850: 0.259MHz GSM1900: 0.254MHz WCDMA Band V: 4.09MHz WCDMA Band IV: 4.08MHz WCDMA Band II: 4.08MHz
<b>Antenna Type</b>	Fixed Internal Antenna
<b>Antenna Gain</b>	Cellular Band: -1.50 dBi PCS Band: 1.50 dBi AWS Band: 1.00 dBi
<b>Type of Modulation</b>	GSM: GMSK GPRS: GMSK EDGE: GMSK / 8PSK WCDMA: QPSK (Uplink) HSDPA: QPSK (Uplink) HSUPA: QPSK (Uplink)

### 1.5 Modification of EUT

No modifications are made to the EUT during all test items.



### 1.6 Maximum ERP/EIRP Power, Frequency Tolerance, and Emission Designator

FCC Rule	System	Type of Modulation	Maximum ERP/EIRP (W)	Frequency Tolerance (ppm)	Emission Designator
Part 22	GSM850 GPRS class 8	GMSK	0.8531	0.0407 ppm	243KGXW
Part 22	GSM850 EDGE class 8	8PSK	0.2234	0.0430 ppm	259KG7W
Part 22	WCDMA Band V RMC 12.2Kbps	QPSK	0.1107	0.0215 ppm	4M09F9W
Part 24	GSM1900 GPRS class 8	GMSK	1.3996	0.0106 ppm	247KGXW
Part 24	GSM1900 EDGE class 8	8PSK	0.6237	0.0027 ppm	254KG7W
Part 24	WCDMA Band II RMC 12.2Kbps	QPSK	0.3954	0.0128 ppm	4M08F9W
Part 27	WCDMA Band IV RMC 12.2Kbps	QPSK	0.3540	0.0110 ppm	4M08F9W

### 1.7 Testing Location

Sporton Lab is accredited to ISO 17025 by Taiwan Accreditation Foundation (TAF code : 1190) and the FCC designation No. TW1022 under the FCC 2.948(e) by Mutual Recognition Agreement (MRA) in FCC Test.

<b>Test Site</b>	SPORTON INTERNATIONAL INC.	
<b>Test Site Location</b>	No. 52, Hwa Ya 1 <sup>st</sup> Rd., Hwa Ya Technology Park, Kwei-Shan District, Tao Yuan City, Taiwan, R.O.C. TEL: +886-3-327-3456 FAX: +886-3-328-4978	
<b>Test Site No.</b>	<b>Sporton Site No.</b>	
	TH02-HY	03CH07-HY



## 1.8 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ 47 CFR Part 2, 22(H), 24(E), 27(L)
- ♦ ANSI / TIA / EIA-603-C-2004
- ♦ FCC KDB 971168 D01 Power Meas. License Digital Systems v02r02
- ♦ FCC KDB 412172 D01 Determining ERP and ERIP v01

### **Remark:**

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.





## 2 Test Configuration of Equipment Under Test

### 2.1 Test Mode

Antenna port conducted and radiated test items were performed according to KDB 971168 D01 Power Meas. License Digital Systems v02r02 with maximum output power.

Radiated measurements were performed with rotating EUT in different three orthogonal test planes to find the maximum emission.

Radiated emissions were investigated as following frequency range:

1. 30 MHz to 9000 MHz for GSM850 and WCDMA Band V.
2. 30 MHz to 18000 MHz for WCDMA Band IV
3. 30 MHz to 19000 MHz for GSM1900 and WCDMA Band II.

All modes and data rates and positions were investigated.

Test modes are chosen to be reported as the worst case configuration below:

Test Modes		
Band	Radiated TCs	Conducted TCs
GSM 850	<ul style="list-style-type: none"> <li>■ GPRS class 8 Link</li> <li>■ EDGE class 8 Link</li> </ul>	<ul style="list-style-type: none"> <li>■ GPRS class 8 Link</li> <li>■ EDGE class 8 Link</li> </ul>
GSM 1900	<ul style="list-style-type: none"> <li>■ GPRS class 8 Link</li> <li>■ EDGE class 8 Link</li> </ul>	<ul style="list-style-type: none"> <li>■ GPRS class 8 Link</li> <li>■ EDGE class 8 Link</li> </ul>
WCDMA Band V	<ul style="list-style-type: none"> <li>■ RMC 12.2Kbps Link</li> </ul>	<ul style="list-style-type: none"> <li>■ RMC 12.2Kbps Link</li> </ul>
WCDMA Band II	<ul style="list-style-type: none"> <li>■ RMC 12.2Kbps Link</li> </ul>	<ul style="list-style-type: none"> <li>■ RMC 12.2Kbps Link</li> </ul>
WCDMA Band IV	<ul style="list-style-type: none"> <li>■ RMC 12.2Kbps Link</li> </ul>	<ul style="list-style-type: none"> <li>■ RMC 12.2Kbps Link</li> </ul>

**Note:** The maximum power levels are chosen to test as the worst case configuration as follows:

- GPRS multi-slot class 8 mode for GMSK modulation,
- EDGE multi-slot class 8 mode for 8PSK modulation,
- RMC 12.2Kbps mode for WCDMA band V and WCDMA band IV,
- RMC 12.2Kbps mode for WCDMA band II, only these modes were used for all tests.




Conducted Power Measurement Results:

Conducted Power (*Unit: dBm)						
Band	GSM850			GSM1900		
Channel	128	189	251	512	661	810
Frequency	824.2	836.4	848.8	1850.2	1880.0	1909.8
GPRS class 8	32.96	32.50	32.70	29.72	29.87	29.96
GPRS class 10	29.72	29.27	29.43	26.75	26.88	26.95
GPRS class 11	27.94	27.52	27.68	25.03	25.16	25.25
GPRS class 12	26.84	26.43	26.55	23.97	24.08	24.14
EGPRS class 8	27.14	26.99	26.84	26.27	26.35	26.43
EGPRS class 10	27.07	26.93	26.80	26.32	26.39	26.45
EGPRS class 11	26.23	26.08	25.95	25.20	25.32	25.30
EGPRS class 12	25.06	24.93	24.78	23.96	24.05	24.11

Conducted Power (*Unit: dBm)									
Band	WCDMA Band V			WCDMA Band II			WCDMA Band IV		
Channel	4132	4182	4233	9262	9400	9538	1312	1413	1513
Frequency	826.4	836.4	846.6	1852.4	1880	1907.6	1712.4	1732.6	1752.6
RMC 12.2K	24.09	23.67	23.82	23.98	24.24	24.47	24.49	24.36	24.34
HSDPA Subtest-1	24.03	23.60	23.76	23.91	24.18	24.37	24.39	24.35	24.32
HSDPA Subtest-2	23.53	23.06	23.28	23.46	23.71	23.93	23.97	23.88	23.86
HSDPA Subtest-3	22.97	22.55	22.71	22.99	23.22	23.42	23.47	23.40	23.41
HSDPA Subtest-4	22.84	22.30	22.56	22.79	22.98	23.28	23.45	23.14	23.16
HSUPA Subtest-1	23.01	22.60	22.75	23.02	23.24	23.43	23.76	23.43	23.43
HSUPA Subtest-2	21.14	20.81	20.93	21.38	21.50	21.71	22.08	21.62	21.76
HSUPA Subtest-3	22.20	21.83	21.98	22.34	22.51	22.67	22.85	22.61	22.66
HSUPA Subtest-4	21.22	21.07	20.98	21.45	21.73	21.92	22.16	21.87	21.84
HSUPA Subtest-5	23.48	23.17	23.29	23.36	23.68	23.85	24.15	23.82	23.85

## 2.2 Connection Diagram of Test System

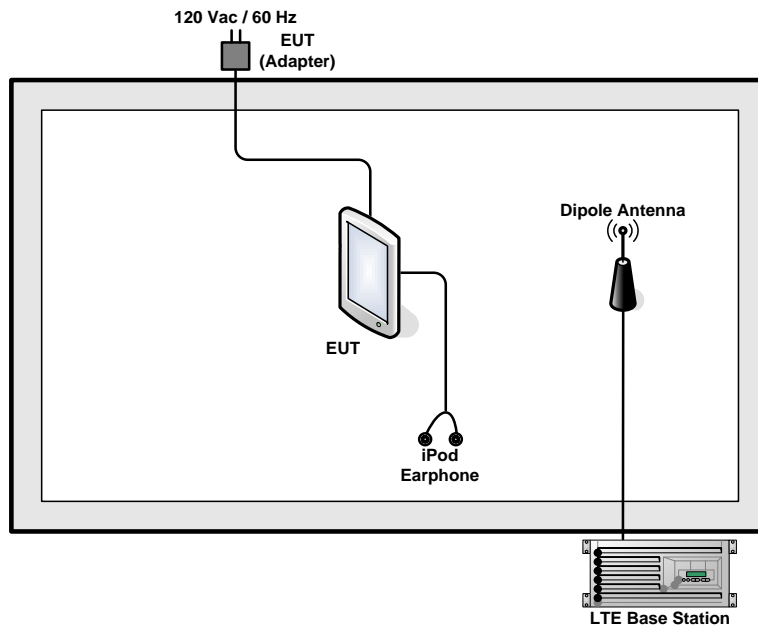

## 2.3 Support Unit used in test configuration

Item	Equipment	Trade Name	Model No.	FCC ID	Data Cable	Power Cord
1.	System Simulator	Agilent	E5515C	N/A	N/A	Unshielded, 1.8 m
2.	iPod Earphone	Apple	N/A	Verification	Unshielded, 1.0 m	N/A

## 2.4 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between RF conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level will be exactly the RF output level.

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

*Offset = RF cable loss + attenuator factor.*

The following shows an offset computation example with RF cable loss 4.2 dB and a 10dB attenuator.

Example :

$$\begin{aligned} \text{Offset(dB)} &= \text{RF cable loss(dB)} + \text{attenuator factor(dB)} \\ &= 4.2 + 10 = 14.2 \text{ (dB)} \end{aligned}$$

### 3 Test Result

#### 3.1 Conducted Output Power and ERP/EIRP Measurement

##### 3.1.1 Description of the Conducted Output Power and ERP/EIRP Measurement

A system simulator was used to establish communication with the EUT. Its parameters were set to enforce EUT transmitting at the maximum power. The measured power in the radio frequency on the transmitter output terminals shall be reported.

The ERP of mobile transmitters must not exceed 7 Watts (Cellular Band) and the EIRP of mobile transmitters are limited to 2 Watts (PCS Band) and 1 Watts (AWS Band). According to KDB 412172 D01 Power Approach,

$EIRP = P_T + G_T - L_C$ ,  $ERP = EIRP - 2.15$ , where

$P_T$  = transmitter output power in dBm

$G_T$  = gain of the transmitting antenna in dBi

$L_C$  = signal attenuation in the connecting cable between the transmitter and antenna in dB


##### 3.1.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

##### 3.1.3 Test Procedures

1. The transmitter output port was connected to the system simulator.
2. Set EUT at maximum power through system simulator.
3. Select lowest, middle, and highest channels for each band and different modulation.
4. Measure the maximum burst average power for GSM and maximum average power for other modulation signal.

##### 3.1.4 Test Setup

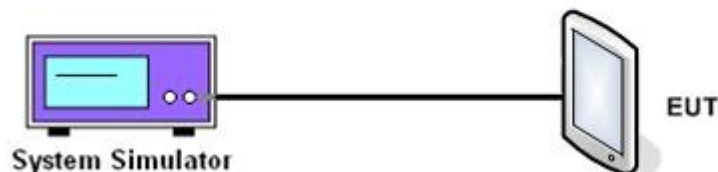



3.1.5 Test Result of Conducted Output Power

Cellular Band ( $G_T - L_C = -1.50$ dB)									
Modes	GSM850 (GPRS class 8)			GSM850 (EDGE class 8)			WCDMA Band V (RMC 12.2Kbps)		
Channel	128 (Low)	189 (Mid)	251 (High)	128 (Low)	189 (Mid)	251 (High)	4132 (Low)	4182 (Mid)	4233 (High)
Frequency (MHz)	824.2	836.4	848.8	824.2	836.4	848.8	826.4	836.4	846.6
Conducted Power (dBm)	32.96	32.5	32.7	27.14	26.99	26.84	24.09	23.67	23.82
Conducted Power (Watts)	1.98	1.78	1.86	0.52	0.50	0.48	0.26	0.23	0.24
ERP(dBm)	29.31	28.85	29.05	23.49	23.34	23.19	20.44	20.02	20.17
ERP(Watts)	0.8531	0.7674	0.8035	0.2234	0.2158	0.2084	0.1107	0.1005	0.1040

PCS Band ( $G_T - L_C = 1.50$ dB)									
Modes	GSM1900 (GPRS class 8)			GSM1900 (EDGE class 8)			WCDMA Band II (RMC 12.2Kbps)		
Channel	512 (Low)	661 (Mid)	810 (High)	512 (Low)	661 (Mid)	810 (High)	9262 (Low)	9400 (Mid)	9538 (High)
Frequency (MHz)	1850.2	1880	1909.8	1850.2	1880	1909.8	1852.4	1880	1907.6
Conducted Power (dBm)	29.72	29.87	29.96	26.32	26.39	26.45	23.98	24.24	24.47
Conducted Power (Watts)	0.94	0.97	0.99	0.43	0.44	0.44	0.25	0.27	0.28
EIRP(dBm)	31.22	31.37	31.46	27.82	27.89	27.95	25.48	25.74	25.97
EIRP(Watts)	1.3243	1.3709	1.3996	0.6053	0.6152	0.6237	0.3532	0.3750	0.3954



AWS Band ( $G_T - L_C = 1.00$ dB)			
Modes	WCDMA Band IV (RMC 12.2Kbps)		
Channel	1312(Low)	1413 (Mid)	1513 (High)
Frequency (MHz)	1712.4	1732.6	1752.6
Conducted Power (dBm)	24.49	24.36	24.34
Conducted Power (Watts)	0.28	0.27	0.27
EIRP(dBm)	25.49	25.36	25.34
EIRP(Watts)	0.3540	0.3436	0.3420

**Note:** maximum burst average power for GSM, and maximum average power for WCDMA.

$EIRP = P_T + G_T - L_C$ ,  $ERP = EIRP - 2.15$ , where

$P_T$  = transmitter output power in dBm

$G_T$  = gain of the transmitting antenna in dBi

$L_C$  = signal attenuation in the connecting cable between the transmitter and antenna in dB

## 3.2 Peak-to-Average Ratio

### 3.2.1 Description of the PAR Measurement

The peak-to-average ratio (PAR) of the transmission may not exceed 13 dB.


### 3.2.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

### 3.2.3 Test Procedures

1. The testing follows FCC KDB 971168 v02r02 Section 5.7.1.
2. The EUT was connected to spectrum analyzer and system simulator via a power divider.
3. Set EUT to transmit at maximum output power.
4. When the duty cycle is less than 98%, then signal gating will be implemented on the spectrum analyzer by triggering from the system simulator.
5. Set the CCDF (Complementary Cumulative Distribution Function) option of the spectrum analyzer.  
Record the maximum PAPR level associated with a probability of 0.1%.

### 3.2.4 Test Setup

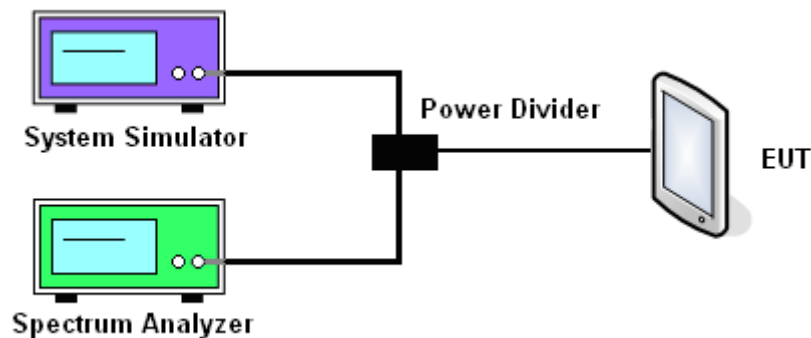



3.2.5 Test Result of Peak-to-Average Ratio

Cellular Band									
Modes	GSM850 (GPRS class 8)			GSM850 (EDGE class 8)			WCDMA Band V (RMC 12.2Kbps)		
Channel	128 (Low)	189 (Mid)	251 (High)	128 (Low)	189 (Mid)	251 (High)	4132 (Low)	4182 (Mid)	4233 (High)
Frequency (MHz)	824.2	836.4	848.8	824.2	836.4	848.8	826.4	836.4	846.6
Peak-to-Average Ratio (dB)	0.44	0.48	0.36	2.88	2.84	2.96	3.32	3.32	3.56

PCS Band									
Modes	GSM1900 (GPRS class 8)			GSM1900 (EDGE class 8)			WCDMA Band II (RMC 12.2Kbps)		
Channel	512 (Low)	661 (Mid)	810 (High)	512 (Low)	661 (Mid)	810 (High)	9262 (Low)	9400 (Mid)	9538 (High)
Frequency (MHz)	1850.2	1880	1909.8	1850.2	1880	1909.8	1852.4	1880	1907.6
Peak-to-Average Ratio (dB)	0.32	0.32	0.32	2.88	2.76	2.88	3.32	3.28	3.16

AWS Band			
Modes	WCDMA Band IV (RMC 12.2Kbps)		
Channel	1312(Low)		1413 (Mid)
Frequency (MHz)	1712.4		1732.6
Peak-to-Average Ratio (dB)	3.12		3.16
			3.08






### 3.2.6 Test Result (Plots) of Peak-to-Average Ratio

<b>Band :</b>	GSM 850	<b>Test Mode :</b>	GPRS class 8 Link (GMSK)
---------------	---------	--------------------	--------------------------

#### Peak-to-Average Ratio on Channel 128 (824.2 MHz)

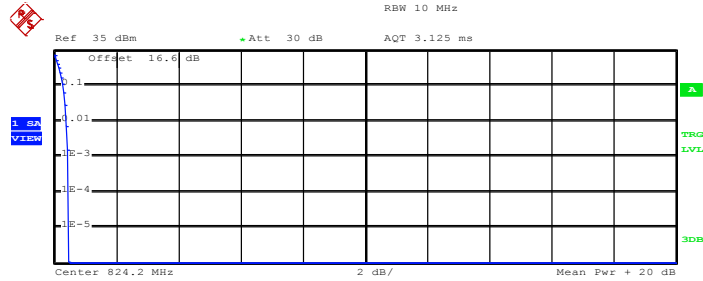


Complementary Cumulative Distribution Function (100000 samples)

Trace 1  
Mean    32.12 dBm  
Peak    32.57 dBm  
Crest    0.45 dB

10 %    0.28 dB  
1 %    0.40 dB  
.1 %    0.44 dB  
.01 %    0.48 dB

Date: 27.JAN.2015 16:29:10

#### Peak-to-Average Ratio on Channel 189 (836.4 MHz)

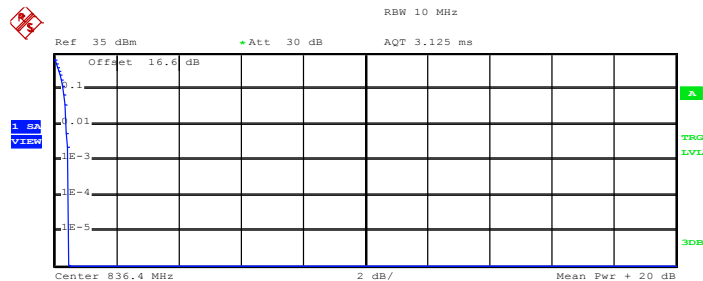

Complementary Cumulative Distribution Function (100000 samples)


Trace 1  
Mean    31.75 dBm  
Peak    32.22 dBm  
Crest    0.47 dB

10 %    0.28 dB  
1 %    0.40 dB  
.1 %    0.48 dB  
.01 %    0.48 dB

Date: 27.JAN.2015 16:29:24



Peak-to-Average Ratio on Channel 251 (848.8 MHz)

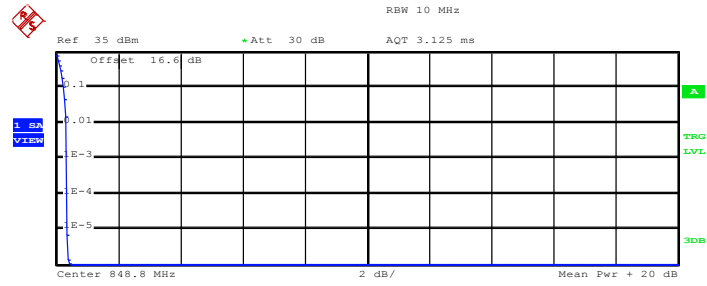

Complementary Cumulative Distribution Function (100000 samples)


Trace 1	
Mean	32.16 dBm
Peak	32.57 dBm
Crest	0.41 dB
10 %	0.24 dB
1 %	0.32 dB
.1 %	0.36 dB
.01 %	0.36 dB

Date: 27.JAN.2015 16:29:39



<b>Band :</b>	GSM 850	<b>Test Mode :</b>	EDGE class 8 Link (8PSK)
---------------	---------	--------------------	--------------------------

**Peak-to-Average Ratio on Channel 128 (824.2 MHz)**

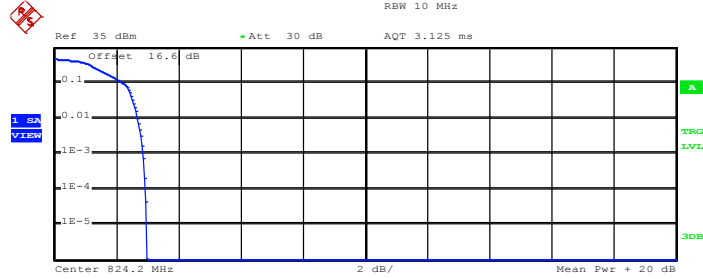


Complementary Cumulative Distribution Function (100000 samples)

Trace 1

Mean	26.71 dBm
Peak	29.68 dBm
Crest	2.97 dB
10 %	2.24 dB
1 %	2.68 dB
.1 %	2.88 dB
.01 %	2.96 dB

Date: 27.JAN.2015 16:45:36

**Peak-to-Average Ratio on Channel 189 (836.4 MHz)**

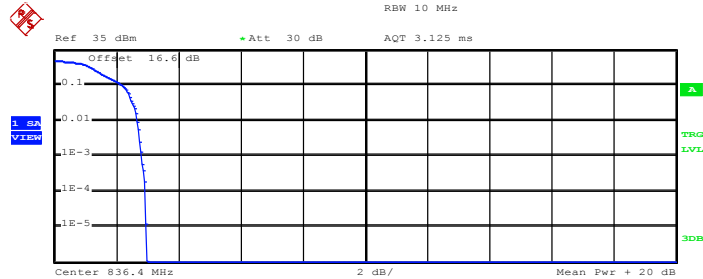

Complementary Cumulative Distribution Function (100000 samples)


Trace 1

Mean	26.58 dBm
Peak	29.54 dBm
Crest	2.96 dB
10 %	2.20 dB
1 %	2.68 dB
.1 %	2.84 dB
.01 %	2.96 dB

Date: 27.JAN.2015 16:45:47



Peak-to-Average Ratio on Channel 251 (848.8 MHz)

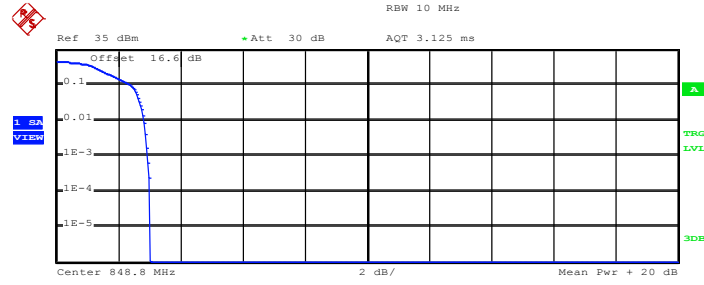

Complementary Cumulative Distribution Function (100000 samples)

Trace 1


Mean	26.44 dBm
Peak	29.47 dBm
Crest	3.03 dB
10 %	2.40 dB
1 %	2.84 dB
.1 %	2.96 dB
.01 %	3.04 dB

Date: 27.JAN.2015 16:45:57



<b>Band :</b>	GSM 1900	<b>Test Mode :</b>	GPRS class 8 Link (GMSK)
---------------	----------	--------------------	--------------------------

**Peak-to-Average Ratio on Channel 512 (1850.2 MHz)**

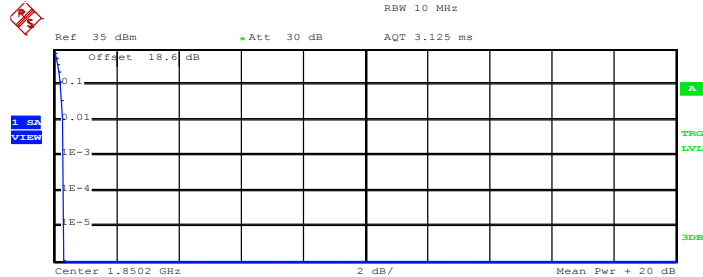


Complementary Cumulative Distribution Function (100000 samples)

Trace 1

Mean	29.60 dBm
Peak	29.89 dBm
Crest	0.30 dB
10 %	0.20 dB
1 %	0.28 dB
.1 %	0.32 dB
.01 %	0.32 dB

Date: 27.JAN.2015 16:59:07

**Peak-to-Average Ratio on Channel 661 (1880.0 MHz)**

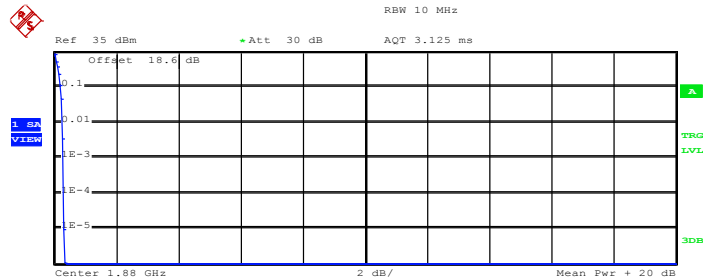

Complementary Cumulative Distribution Function (100000 samples)


Trace 1

Mean	29.40 dBm
Peak	29.75 dBm
Crest	0.35 dB
10 %	0.20 dB
1 %	0.28 dB
.1 %	0.32 dB
.01 %	0.32 dB

Date: 27.JAN.2015 16:59:19



Peak-to-Average Ratio on Channel 810 (1909.8 MHz)

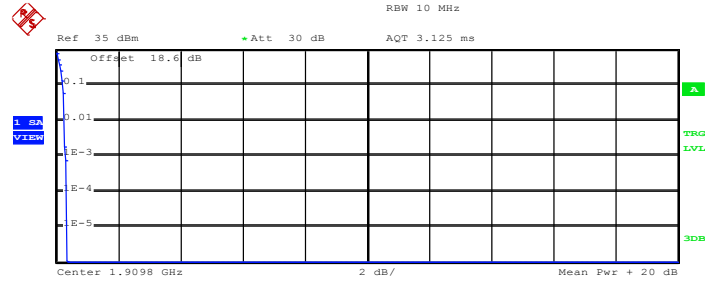

Complementary Cumulative Distribution Function (100000 samples)


Trace 1	
Mean	29.40 dBm
Peak	29.75 dBm
Crest	0.35 dB
10 %	0.24 dB
1 %	0.28 dB
.1 %	0.32 dB
.01 %	0.36 dB

Date: 27.JAN.2015 16:59:31



<b>Band :</b>	GSM 1900	<b>Test Mode :</b>	EDGE class 8 Link (8PSK)
---------------	----------	--------------------	--------------------------

**Peak-to-Average Ratio on Channel 512 (1850.2 MHz)**

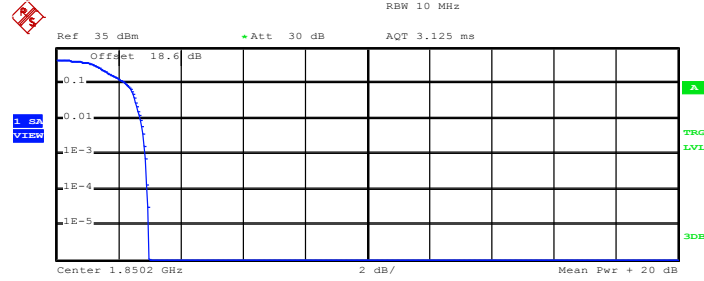


Complementary Cumulative Distribution Function (100000 samples)

Trace 1

Mean	25.94 dBm
Peak	28.90 dBm
Crest	2.97 dB
10 %	2.24 dB
1 %	2.72 dB
.1 %	2.88 dB
.01 %	2.92 dB

Date: 27.JAN.2015 17:26:00

**Peak-to-Average Ratio on Channel 661 (1880.0 MHz)**

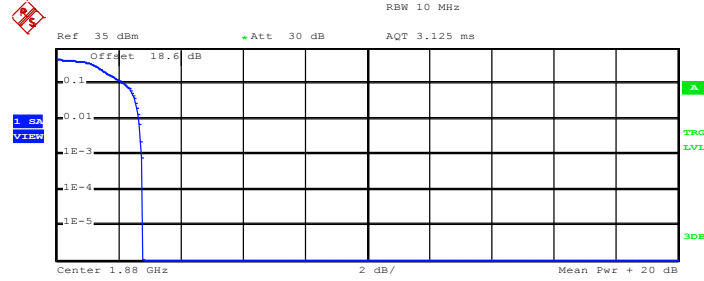

Complementary Cumulative Distribution Function (100000 samples)


Trace 1

Mean	25.97 dBm
Peak	28.76 dBm
Crest	2.79 dB
10 %	2.20 dB
1 %	2.68 dB
.1 %	2.76 dB
.01 %	2.80 dB

Date: 27.JAN.2015 17:26:15



Peak-to-Average Ratio on Channel 810 (1909.8 MHz)

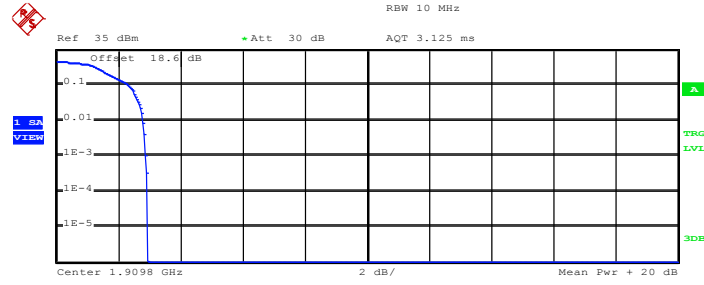

Complementary Cumulative Distribution Function (100000 samples)

Trace 1	
Mean	25.81 dBm
Peak	28.76 dBm
Crest	2.95 dB
10 %	2.32 dB
1 %	2.80 dB
.1 %	2.88 dB
.01 %	2.96 dB


Date: 27.JAN.2015 17:26:27





<b>Band :</b>	WCDMA Band V	<b>Test Mode :</b>	RMC 12.2Kbps Link (QPSK)
---------------	--------------	--------------------	--------------------------

**Peak-to-Average Ratio on Channel 4132 (826.4 MHz)**

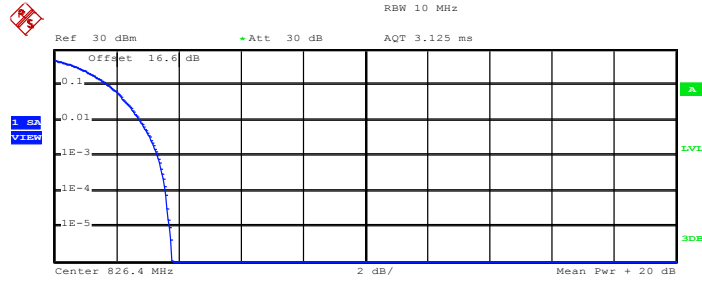


Complementary Cumulative Distribution Function (100000 samples)

Trace 1

Mean	23.51 dBm
Peak	27.29 dBm
Crest	3.78 dB
10 %	1.76 dB
1 %	2.76 dB
.1 %	3.32 dB
.01 %	3.60 dB

Date: 27.JAN.2015 18:10:13

**Peak-to-Average Ratio on Channel 4182 (836.4 MHz)**

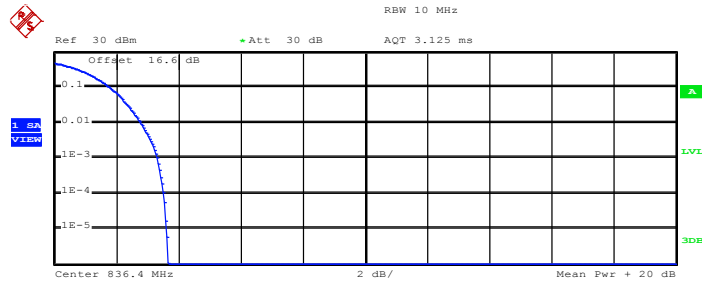

Complementary Cumulative Distribution Function (100000 samples)


Trace 1

Mean	23.07 dBm
Peak	26.73 dBm
Crest	3.65 dB
10 %	1.80 dB
1 %	2.80 dB
.1 %	3.32 dB
.01 %	3.52 dB

Date: 27.JAN.2015 18:10:22



Peak-to-Average Ratio on Channel 4233 (846.6 MHz)

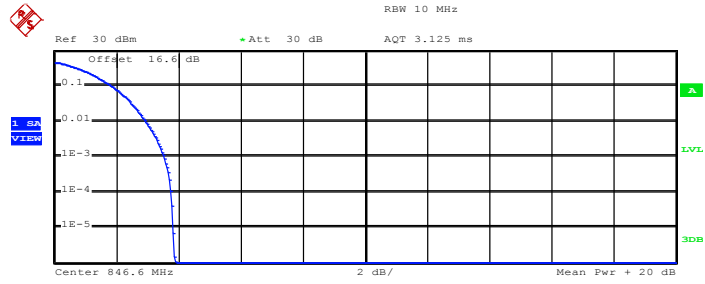

Complementary Cumulative Distribution Function (100000 samples)


Trace 1	
Mean	23.34 dBm
Peak	27.22 dBm
Crest	3.88 dB
10 %	1.88 dB
1 %	2.96 dB
.1 %	3.56 dB
.01 %	3.76 dB

Date: 27.JAN.2015 18:10:30



<b>Band :</b>	WCDMA Band IV	<b>Test Mode :</b>	RMC 12.2Kbps Link (QPSK)
---------------	---------------	--------------------	--------------------------

**Peak-to-Average Ratio on Channel 1312 (1712.4 MHz)**

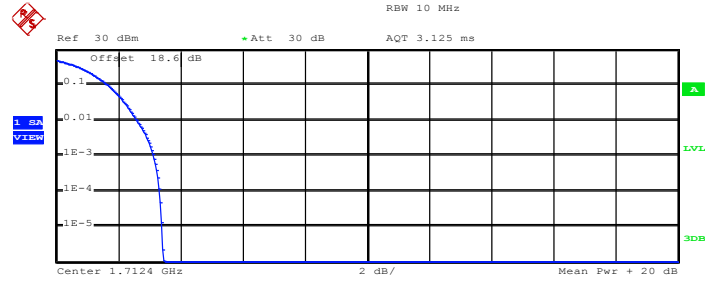


Complementary Cumulative Distribution Function (100000 samples)

Trace 1

Mean	24.06 dBm
Peak	27.50 dBm
Crest	3.44 dB
10 %	1.68 dB
1 %	2.60 dB
.1 %	3.12 dB
.01 %	3.32 dB

Date: 27.JAN.2015 17:46:12

**Peak-to-Average Ratio on Channel 1413 (1732.6 MHz)**

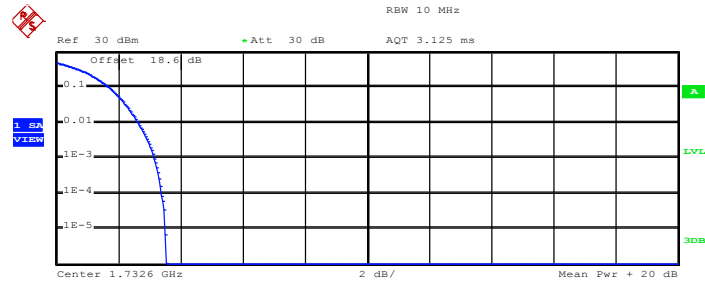

Complementary Cumulative Distribution Function (100000 samples)


Trace 1

Mean	23.91 dBm
Peak	27.43 dBm
Crest	3.52 dB
10 %	1.72 dB
1 %	2.64 dB
.1 %	3.16 dB
.01 %	3.40 dB

Date: 27.JAN.2015 17:46:28



Peak-to-Average Ratio on Channel 1513 (1752.6 MHz)

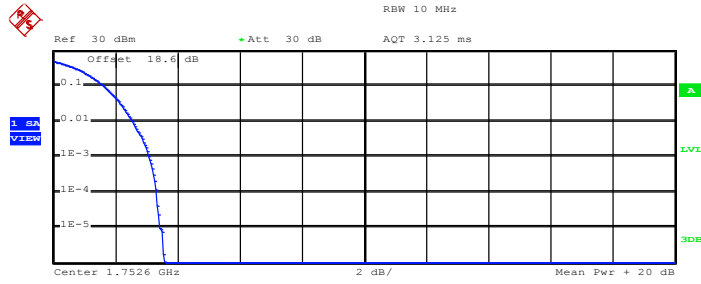

Complementary Cumulative Distribution Function (100000 samples)

Trace 1


Mean	23.65 dBm
Peak	27.22 dBm
Crest	3.57 dB
10 %	1.64 dB
1 %	2.56 dB
.1 %	3.08 dB
.01 %	3.32 dB

Date: 27.JAN.2015 17:46:37



<b>Band :</b>	WCDMA Band II	<b>Test Mode :</b>	RMC 12.2Kbps Link (QPSK)
---------------	---------------	--------------------	--------------------------

**Peak-to-Average Ratio on Channel 9262 (1852.4 MHz)**

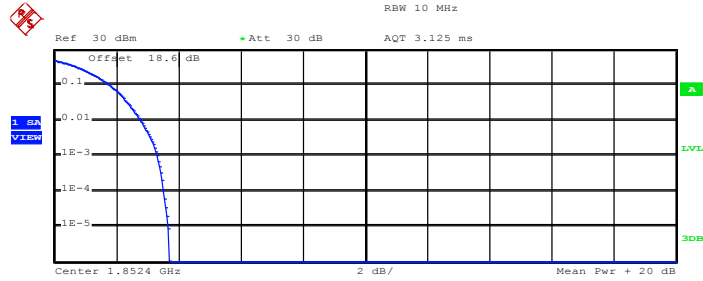


Complementary Cumulative Distribution Function (100000 samples)

Trace 1

Mean	23.94 dBm
Peak	27.64 dBm
Crest	3.71 dB
10 %	1.80 dB
1 %	2.80 dB
.1 %	3.32 dB
.01 %	3.52 dB

Date: 27.JAN.2015 17:58:54

**Peak-to-Average Ratio on Channel 9400 (1880.0 MHz)**

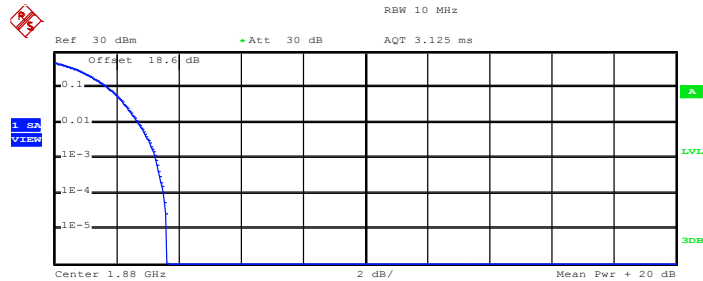

Complementary Cumulative Distribution Function (100000 samples)


Trace 1

Mean	23.52 dBm
Peak	27.15 dBm
Crest	3.63 dB
10 %	1.72 dB
1 %	2.72 dB
.1 %	3.28 dB
.01 %	3.52 dB

Date: 27.JAN.2015 17:59:02



Peak-to-Average Ratio on Channel 9538 (1907.6 MHz)

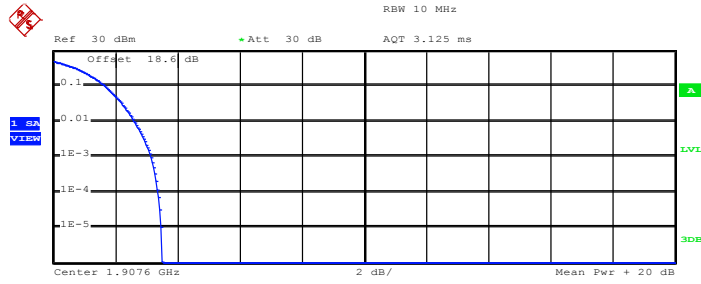

Complementary Cumulative Distribution Function (100000 samples)

Trace 1	
Mean	23.44 dBm
Peak	26.94 dBm
Crest	3.49 dB
10 %	1.68 dB
1 %	2.64 dB
.1 %	3.16 dB
.01 %	3.36 dB

Date: 27.JAN.2015 17:59:09

### 3.3 99% Occupied Bandwidth and 26dB Bandwidth Measurement

#### 3.3.1 Description of 99% Occupied Bandwidth and 26dB Bandwidth Measurement

The 99% occupied bandwidth is the width of a frequency band such that, below the lower and above the upper frequency limits, the mean powers emitted are each equal to a specified percentage 0.5% of the total mean transmitted power.

The emission bandwidth is defined as the width of the signal between two points, located at the 2 sides of the carrier frequency, outside of which all emissions are attenuated at least 26 dB below the transmitter power.


#### 3.3.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

#### 3.3.3 Test Procedures

1. The testing follows FCC KDB 971168 v02r02 Section 4.2.
2. The EUT was connected to the spectrum analyzer and system simulator via a power divider.
3. The RF output of the EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
4. The 99% occupied bandwidth were measured, set RBW= 1% of span, VBW= 3\*RBW, sample detector, trace maximum hold.
5. The 26dB bandwidth were measured, set RBW= 1% of EBW, VBW= 3\*RBW, peak detector, trace maximum hold.

#### 3.3.4 Test Setup

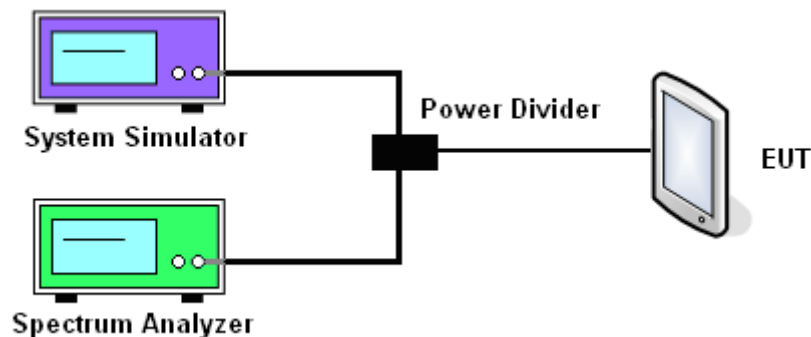



3.3.5 Test Result of Occupied Bandwidth and 26dB Bandwidth

Cellular Band						
Modes	GSM850 (GPRS class 8)			GSM850 (EDGE class 8)		
Channel	128 (Low)	189 (Mid)	251 (High)	128 (Low)	189 (Mid)	251 (High)
Frequency (MHz)	824.2	836.4	848.8	824.2	836.4	848.8
99% OBW (kHz)	243.00	238.00	240.00	251.00	251.00	259.00
26dB BW (kHz)	310.00	307.00	297.00	316.00	311.00	309.00

PCS Band						
Modes	GSM1900 (GPRS class 8)			GSM1900 (EDGE class 8)		
Channel	512 (Low)	661 (Mid)	810 (High)	512 (Low)	661 (Mid)	810 (High)
Frequency (MHz)	1850.2	1880	1909.8	1850.2	1880	1909.8
99% OBW (kHz)	247.00	246.00	243.00	254.00	254.00	253.00
26dB BW (kHz)	317.00	307.00	315.00	307.00	307.00	313.00

Cellular Band			
Modes	WCDMA Band V (RMC 12.2Kbps)		
Channel	4132 (Low)	4182 (Mid)	4233 (High)
Frequency (MHz)	826.4	836.4	846.6
99% OBW (MHz)	4.08	4.09	4.06
26dB BW (MHz)	4.62	4.63	4.59

AWS Band			
Modes	WCDMA Band IV (RMC 12.2Kbps)		
Channel	1312(Low)	1413 (Mid)	1513 (High)
Frequency (MHz)	1712.4	1732.6	1752.6
99% OBW (MHz)	4.08	4.08	4.08
26dB BW (MHz)	4.63	4.66	4.66






PCS Band			
Modes	WCDMA Band II (RMC 12.2Kbps)		
Channel	9262 (Low)	9400 (Mid)	9538 (High)
Frequency (MHz)	1852.4	1880	1907.6
99% OBW (MHz)	4.07	4.08	4.07
26dB BW (MHz)	4.63	4.64	4.63



### 3.3.6 Test Result (Plots) of Occupied Bandwidth and 26dB Bandwidth


Band :	GSM 850	Test Mode :	GPRS class 8 Link (GMSK)
--------	---------	-------------	--------------------------

99% Occupied Bandwidth Plot on Channel 128 (824.2 MHz)

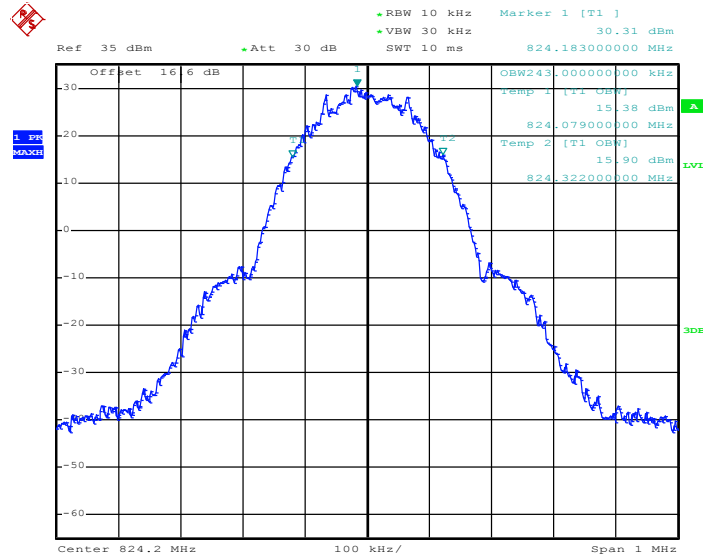

Date: 27.JAN.2015 16:21:28


26dB Bandwidth Plot on Channel 128 (824.2 MHz)

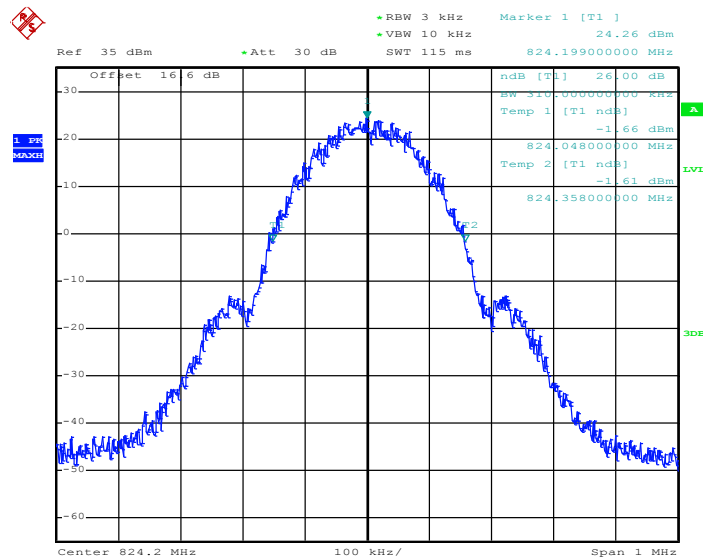

Date: 27.JAN.2015 16:19:26




### 99% Occupied Bandwidth Plot on Channel 189 (836.4 MHz)

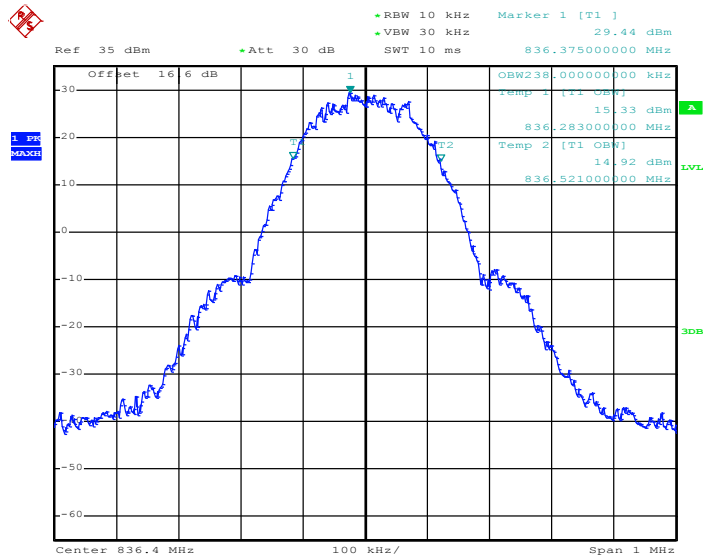

Date: 27.JAN.2015 16:22:01


### 26dB Bandwidth Plot on Channel 189 (836.4 MHz)

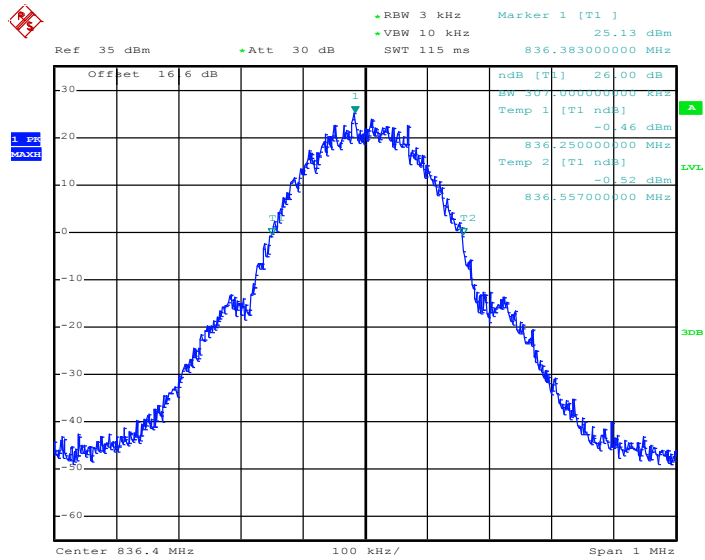

Date: 27.JAN.2015 16:20:00




99% Occupied Bandwidth Plot on Channel 251 (848.8 MHz)

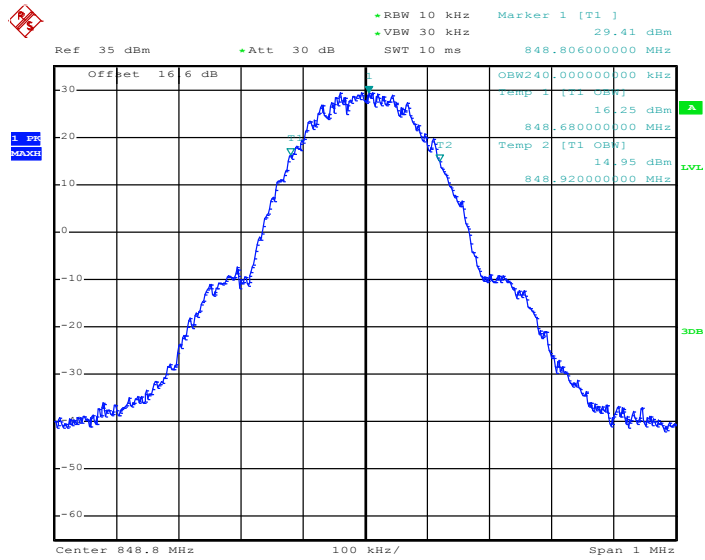

Date: 27.JAN.2015 16:22:35

26dB Bandwidth Plot on Channel 251 (848.8 MHz)

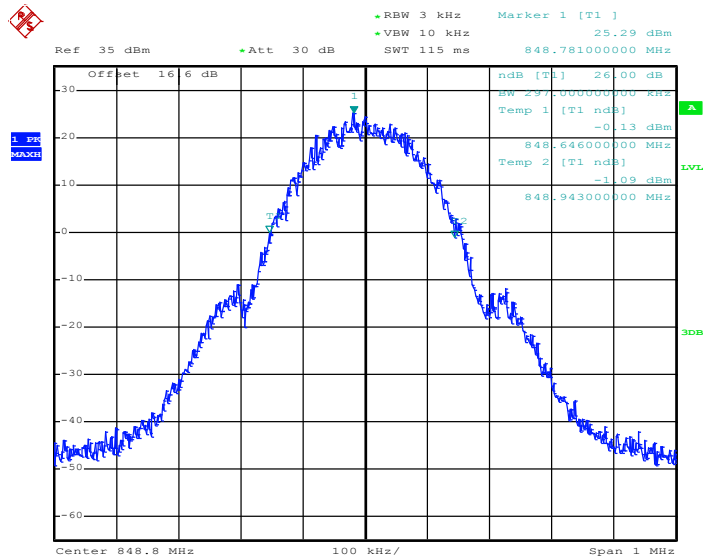


Date: 27.JAN.2015 16:20:36




<b>Band :</b>	GSM 850	<b>Test Mode :</b>	EDGE class 8 Link (8PSK)
---------------	---------	--------------------	--------------------------

99% Occupied Bandwidth Plot on Channel 128 (824.2 MHz)

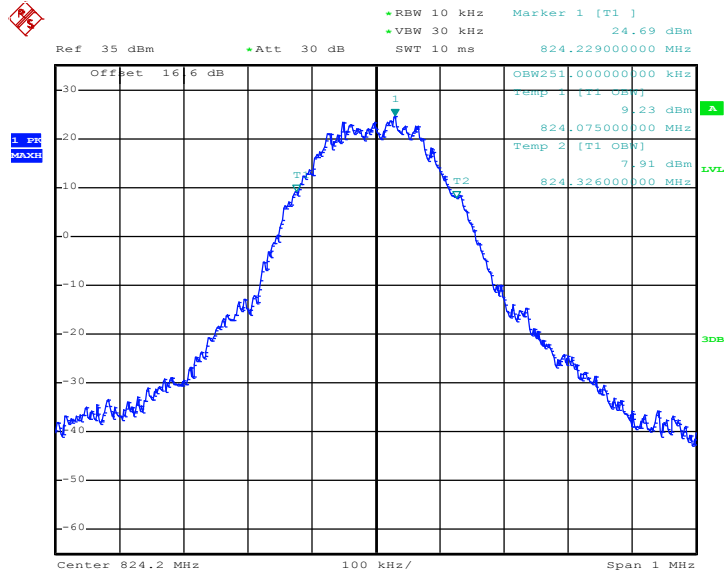

Date: 27.JAN.2015 16:36:06


26dB Bandwidth Plot on Channel 128 (824.2 MHz)

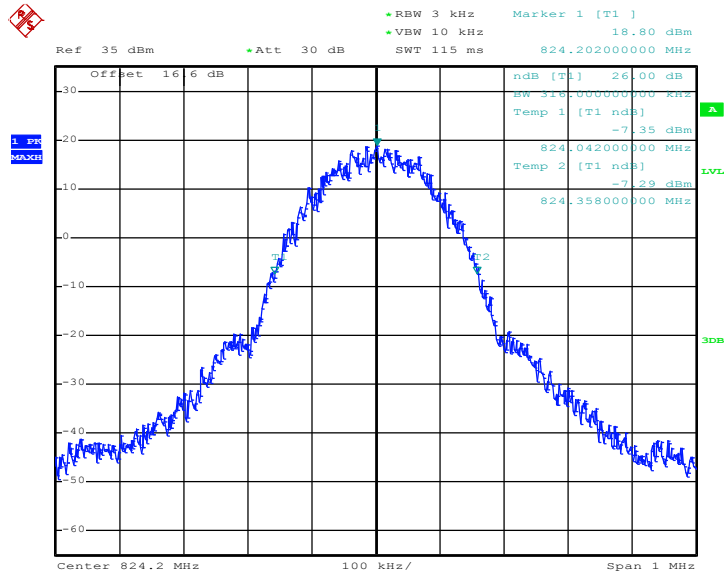

Date: 27.JAN.2015 16:33:43




99% Occupied Bandwidth Plot on Channel 189 (836.4 MHz)

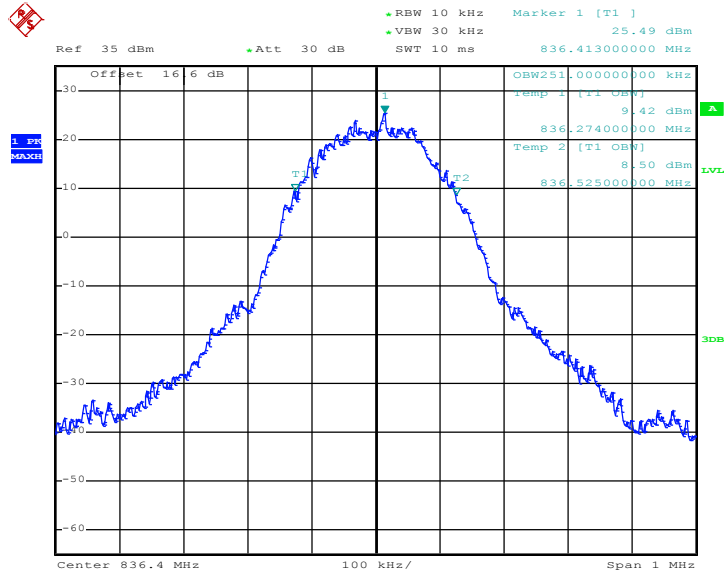

Date: 27.JAN.2015 16:36:45


26dB Bandwidth Plot on Channel 189 (836.4 MHz)

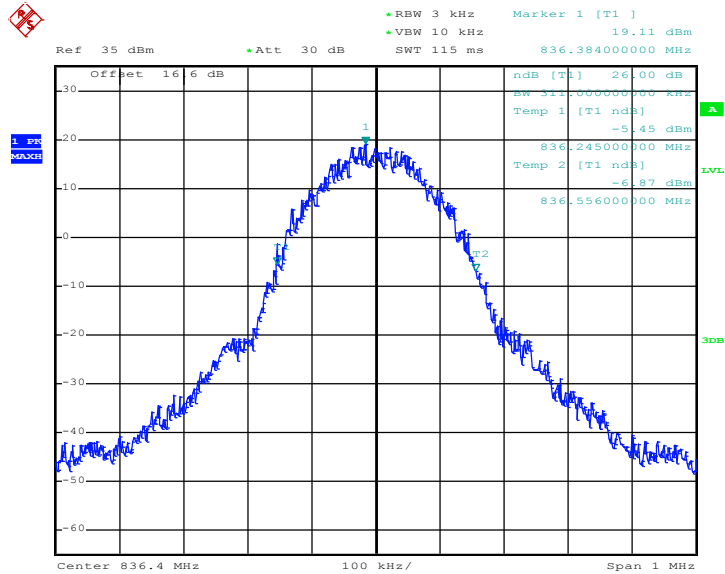

Date: 27.JAN.2015 16:34:15




99% Occupied Bandwidth Plot on Channel 251 (848.8 MHz)

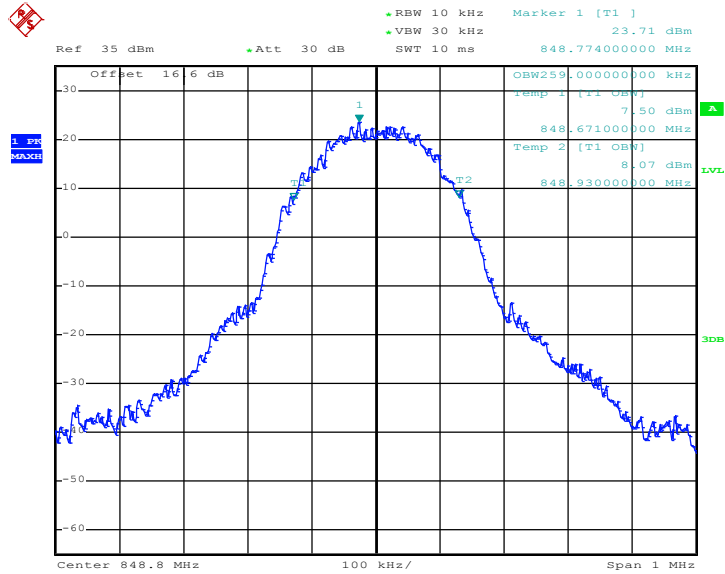

Date: 27.JAN.2015 16:37:42

26dB Bandwidth Plot on Channel 251 (848.8 MHz)

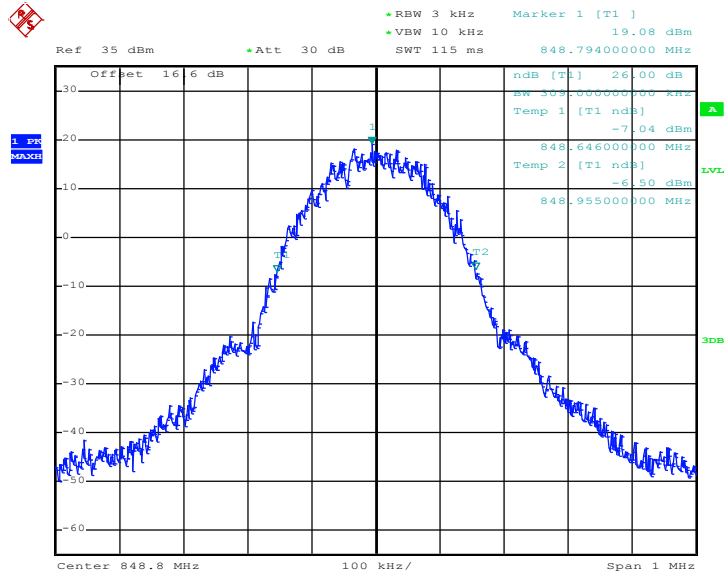


Date: 27.JAN.2015 16:34:55




<b>Band :</b>	GSM 1900	<b>Test Mode :</b>	GPRS class 8 Link (GMSK)
---------------	----------	--------------------	--------------------------

99% Occupied Bandwidth Plot on Channel 512 (1850.2 MHz)

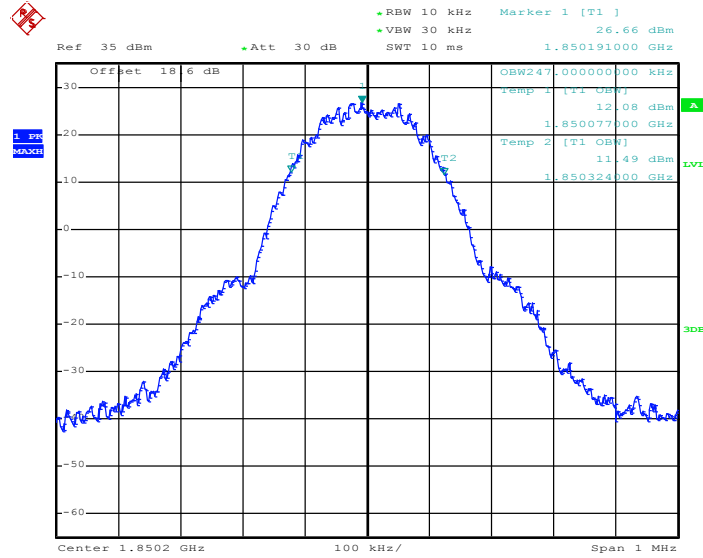

Date: 27.JAN.2015 16:51:58

26dB Bandwidth Plot on Channel 512 (1850.2 MHz)

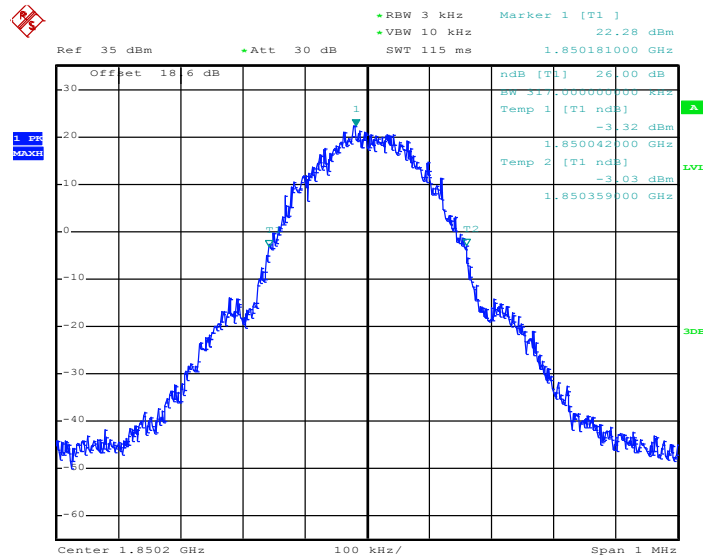


Date: 27.JAN.2015 16:49:43






99% Occupied Bandwidth Plot on Channel 661 (1880.0 MHz)

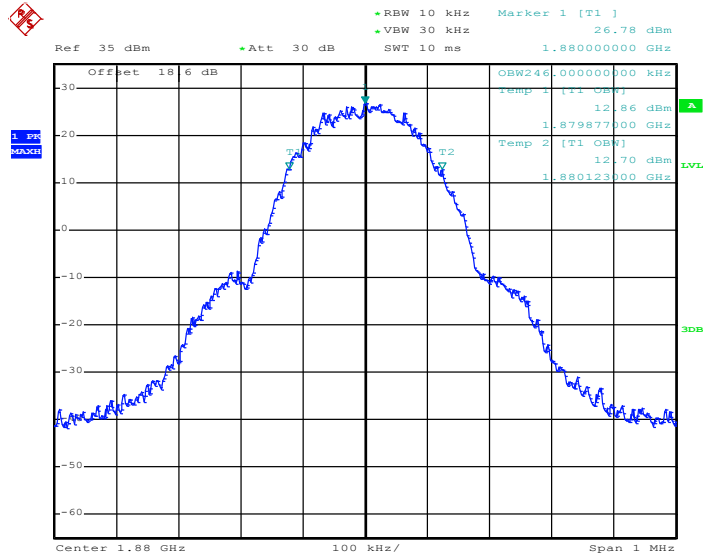

Date: 27.JAN.2015 16:52:35


26dB Bandwidth Plot on Channel 661 (1880.0 MHz)

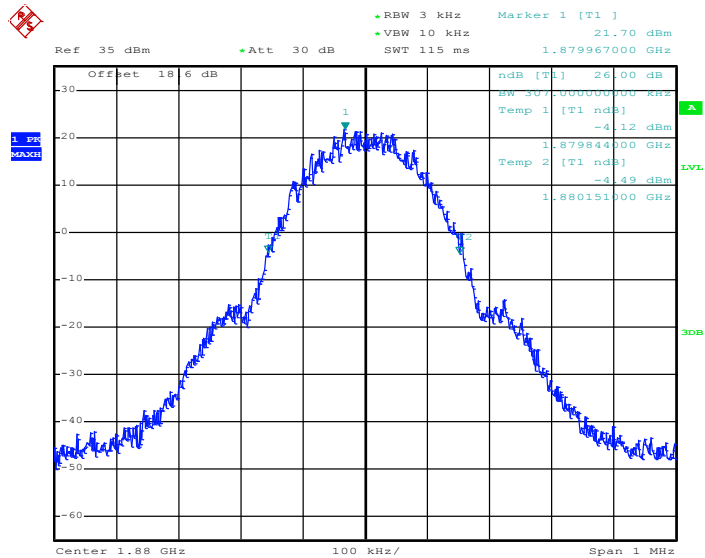

Date: 27.JAN.2015 16:50:23




### 99% Occupied Bandwidth Plot on Channel 810 (1909.8 MHz)

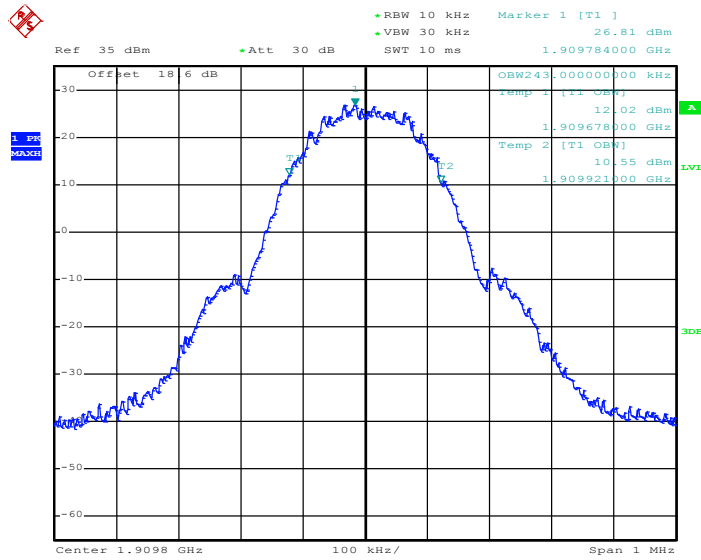

Date: 27.JAN.2015 16:53:11

### 26dB Bandwidth Plot on Channel 810 (1909.8 MHz)

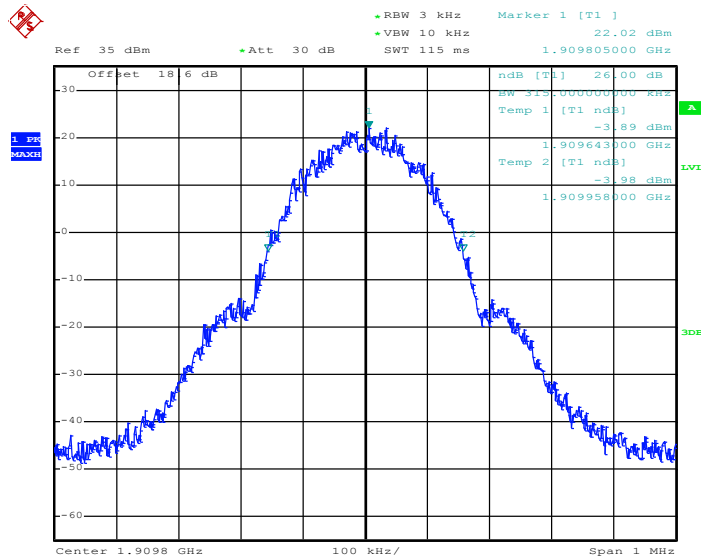


Date: 27.JAN.2015 16:50:58




<b>Band :</b>	GSM 1900	<b>Test Mode :</b>	EDGE class 8 Link (8PSK)
---------------	----------	--------------------	--------------------------

99% Occupied Bandwidth Plot on Channel 512 (1850.2 MHz)

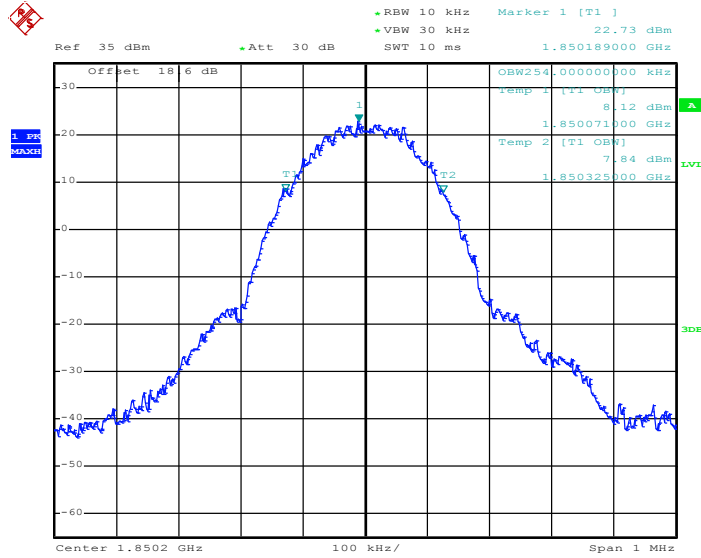

Date: 27.JAN.2015 17:14:53


26dB Bandwidth Plot on Channel 512 (1850.2 MHz)

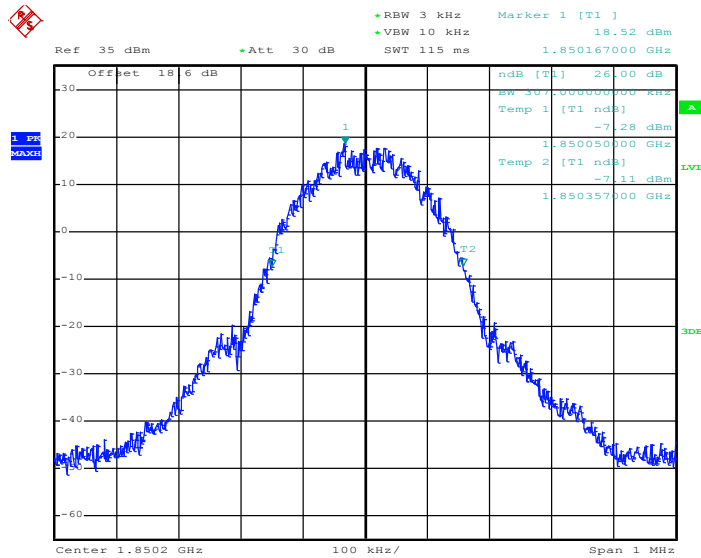

Date: 27.JAN.2015 17:01:56




### 99% Occupied Bandwidth Plot on Channel 661 (1880.0 MHz)

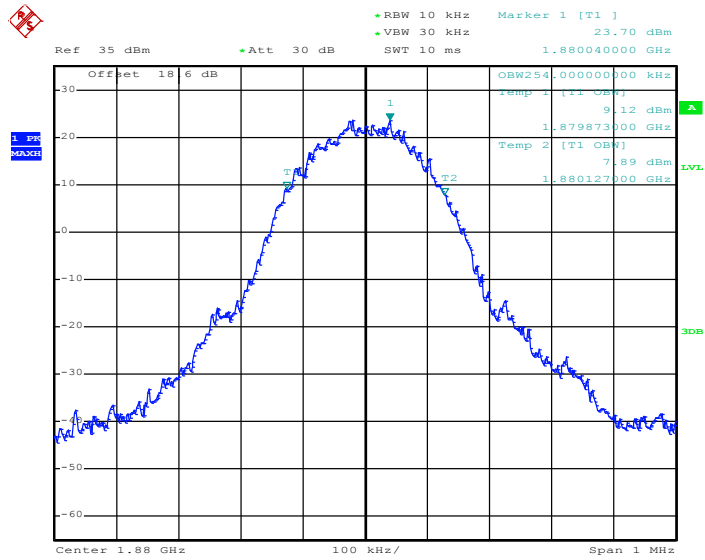

Date: 27.JAN.2015 17:15:29


### 26dB Bandwidth Plot on Channel 661 (1880.0 MHz)

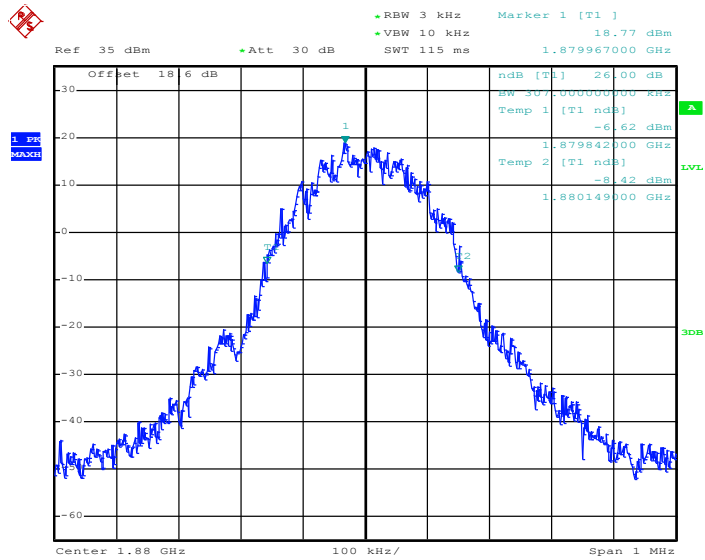

Date: 27.JAN.2015 17:03:09




### 99% Occupied Bandwidth Plot on Channel 810 (1909.8 MHz)

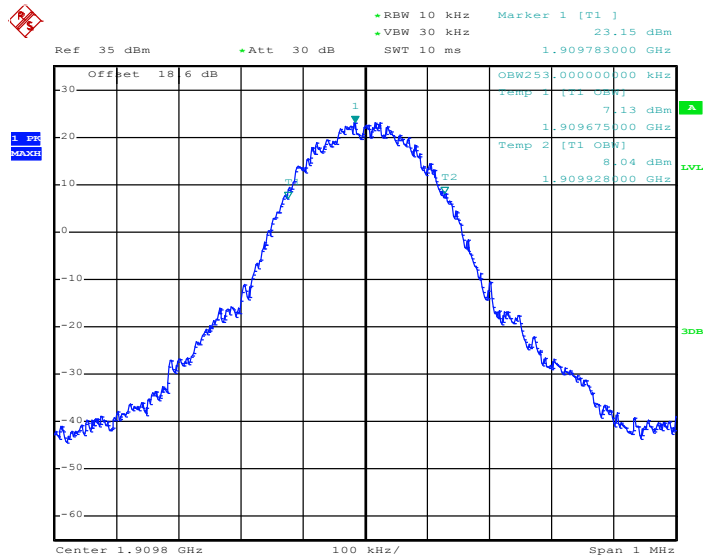

Date: 27.JAN.2015 17:16:14

### 26dB Bandwidth Plot on Channel 810 (1909.8 MHz)

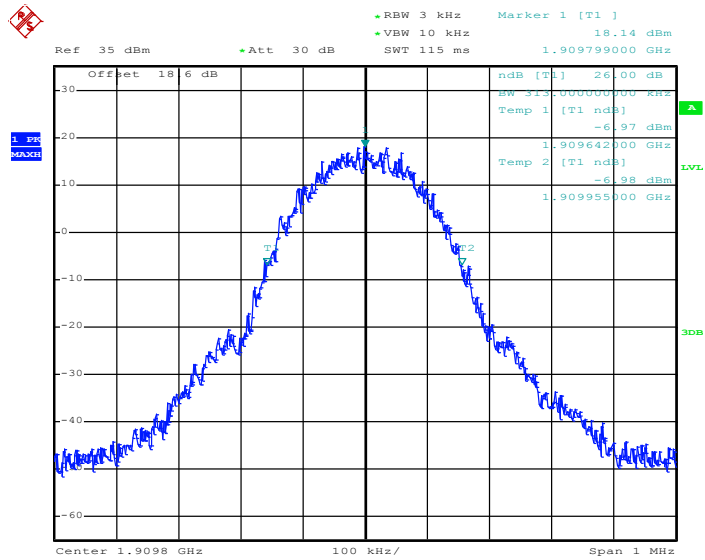


Date: 27.JAN.2015 17:03:45




<b>Band :</b>	WCDMA Band V	<b>Test Mode :</b>	RMC 12.2Kbps Link (QPSK)
---------------	--------------	--------------------	--------------------------

99% Occupied Bandwidth Plot on Channel 4132 (826.4 MHz)

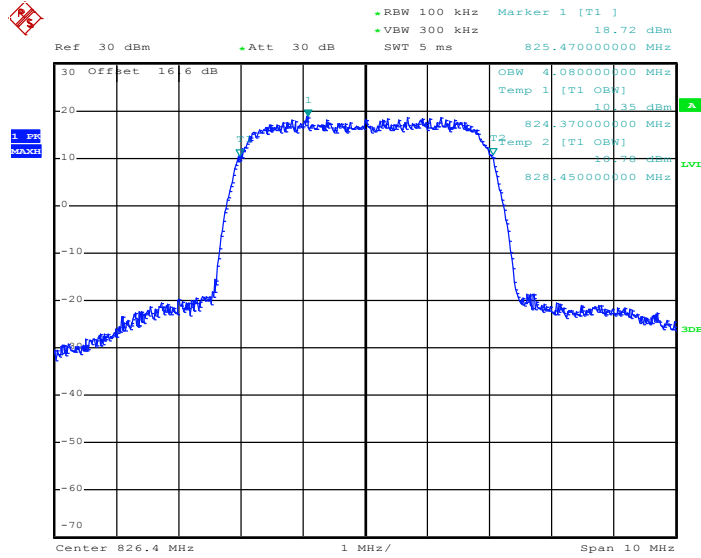

Date: 27.JAN.2015 18:03:38


26dB Bandwidth Plot on Channel 4132 (826.4 MHz)

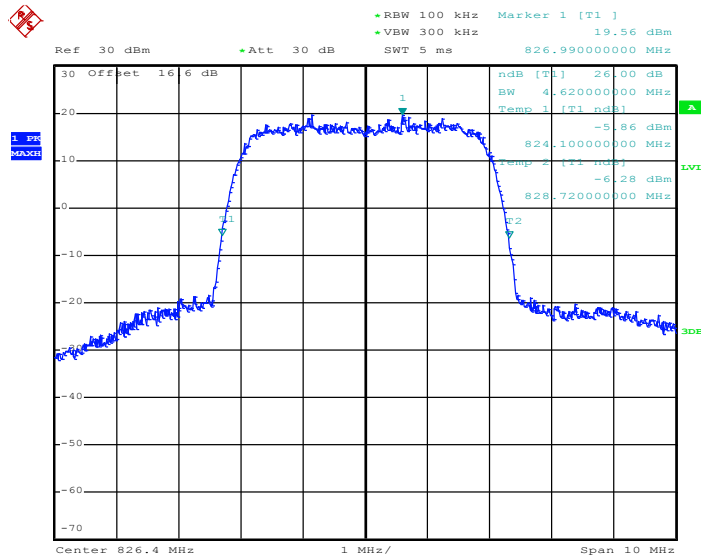

Date: 27.JAN.2015 18:01:12




99% Occupied Bandwidth Plot on Channel 4182 (836.4 MHz)

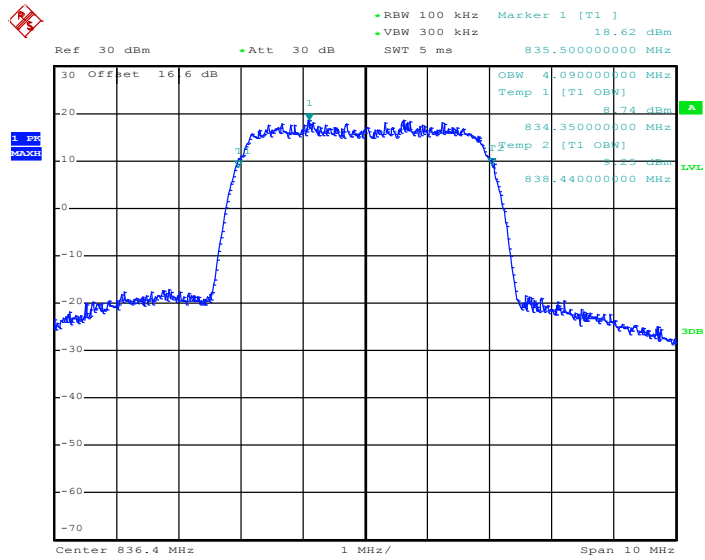

Date: 27.JAN.2015 18:04:06


26dB Bandwidth Plot on Channel 4182 (836.4 MHz)

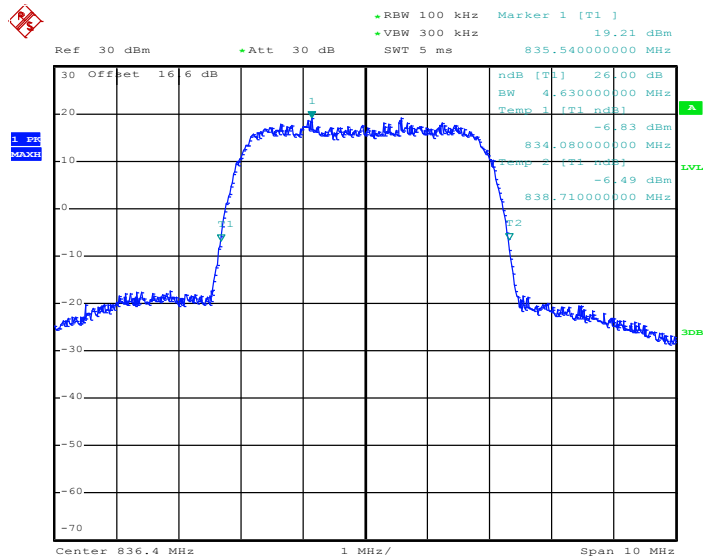

Date: 27.JAN.2015 18:01:40




99% Occupied Bandwidth Plot on Channel 4233 (846.6 MHz)

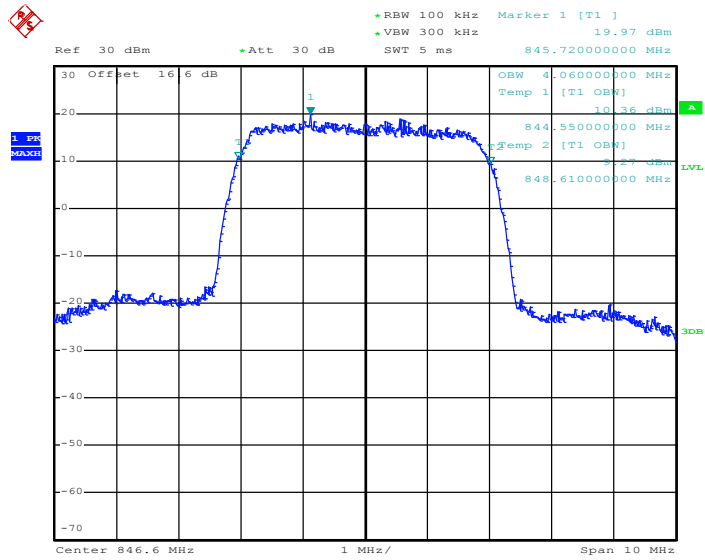

Date: 27.JAN.2015 18:04:34

26dB Bandwidth Plot on Channel 4233 (846.6 MHz)

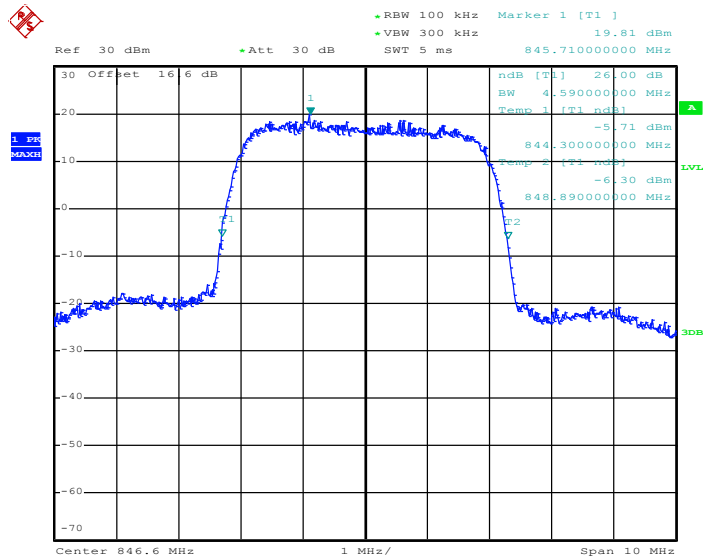


Date: 27.JAN.2015 18:02:08






<b>Band :</b>	WCDMA Band IV	<b>Test Mode :</b>	RMC 12.2Kbps Link (QPSK)
---------------	---------------	--------------------	--------------------------

99% Occupied Bandwidth Plot on Channel 1312 (1712.4 MHz)

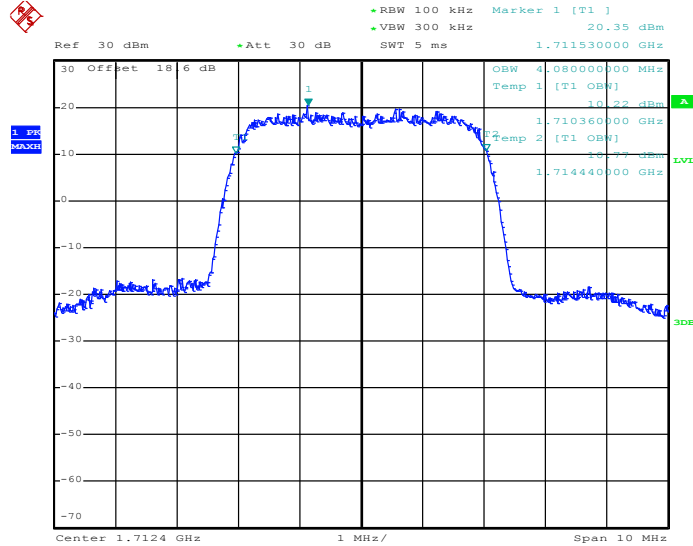

Date: 27.JAN.2015 17:39:21


26dB Bandwidth Plot on Channel 1312 (1712.4 MHz)

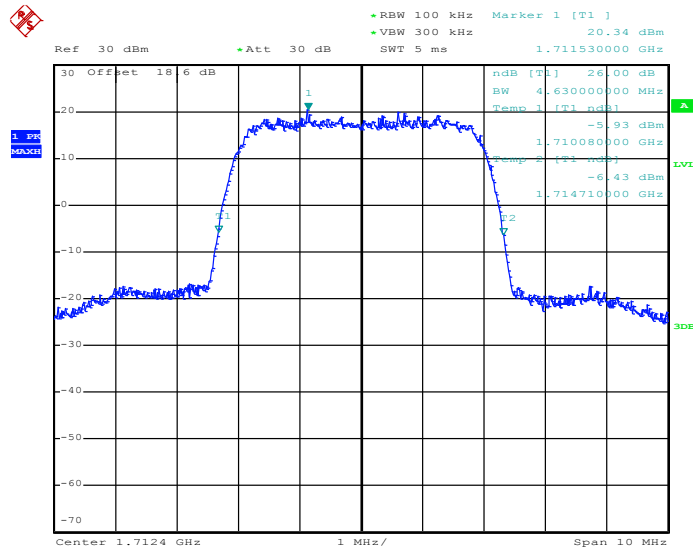

Date: 27.JAN.2015 17:37:27




99% Occupied Bandwidth Plot on Channel 1413 (1732.6 MHz)

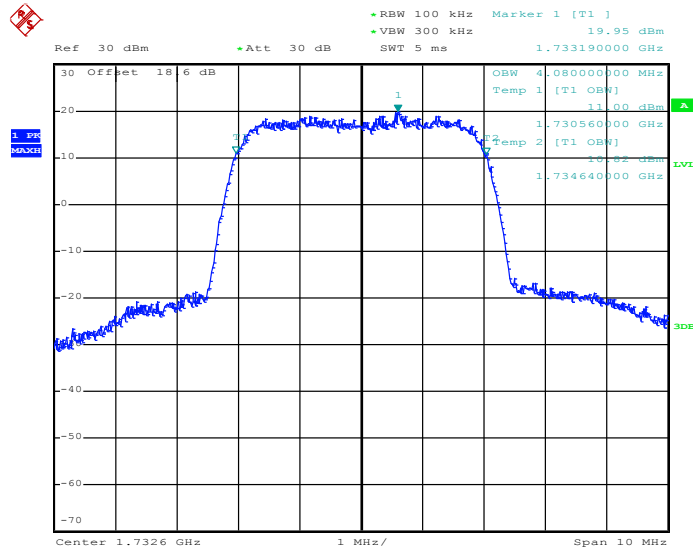

Date: 27.JAN.2015 17:39:49


26dB Bandwidth Plot on Channel 1413 (1732.6 MHz)

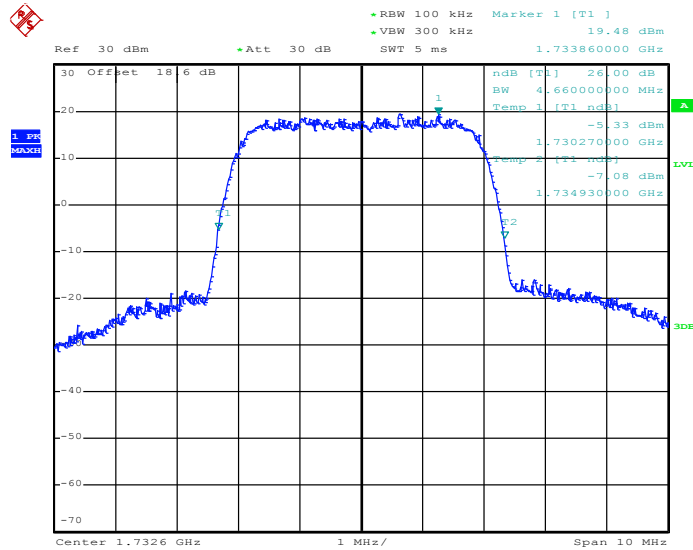

Date: 27.JAN.2015 17:37:56




99% Occupied Bandwidth Plot on Channel 1513 (1752.6 MHz)

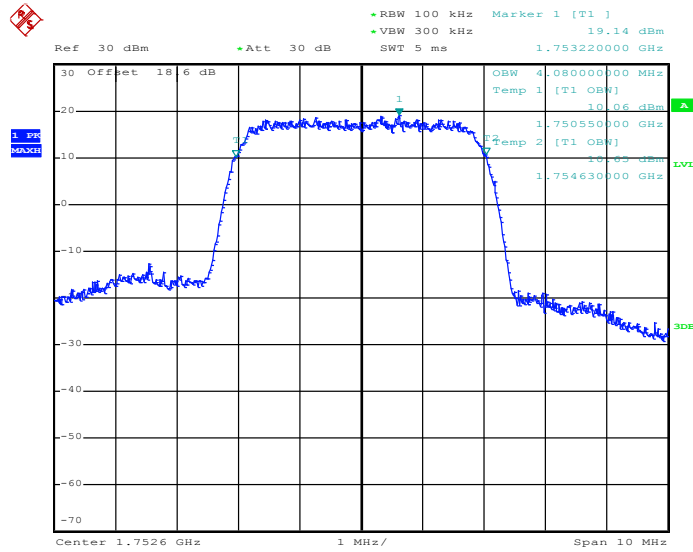

Date: 27.JAN.2015 17:40:17

26dB Bandwidth Plot on Channel 1513 (1752.6 MHz)

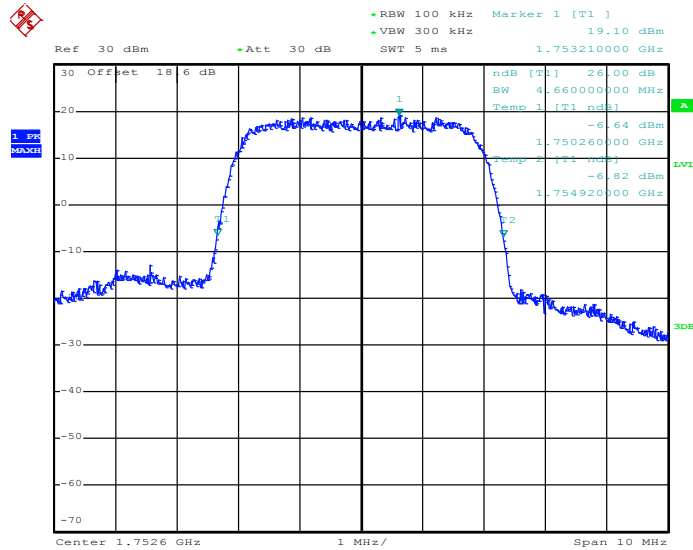


Date: 27.JAN.2015 17:38:24




<b>Band :</b>	WCDMA Band II	<b>Test Mode :</b>	RMC 12.2Kbps Link (QPSK)
---------------	---------------	--------------------	--------------------------

99% Occupied Bandwidth Plot on Channel 9262 (1852.4 MHz)

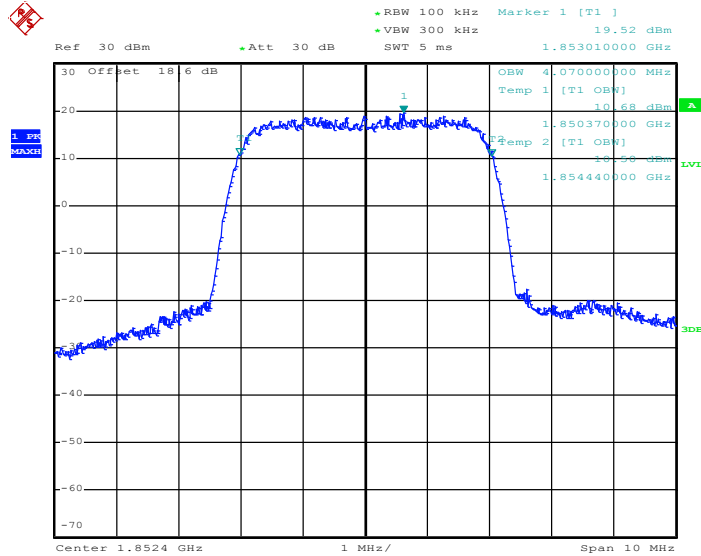

Date: 27.JAN.2015 17:52:26


26dB Bandwidth Plot on Channel 9262 (1852.4 MHz)

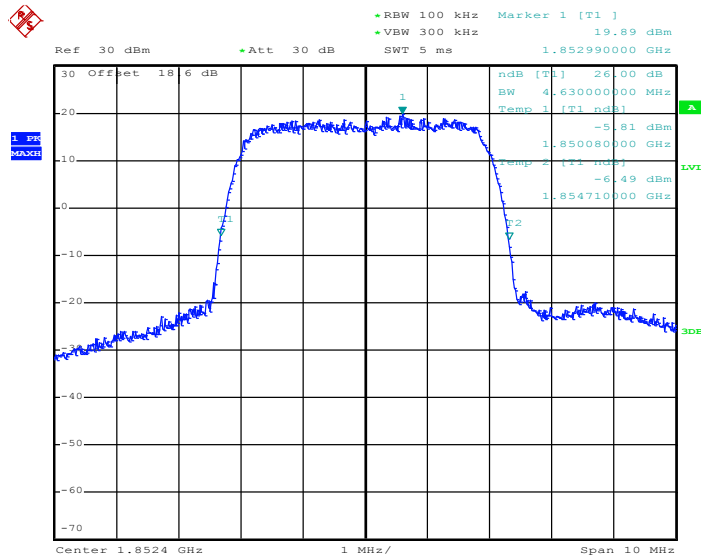

Date: 27.JAN.2015 17:49:50




### 99% Occupied Bandwidth Plot on Channel 9400 (1880.0 MHz)

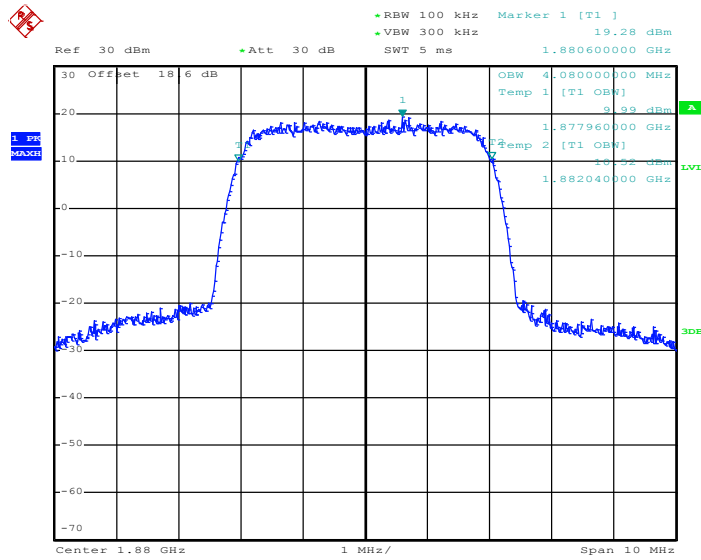

Date: 27.JAN.2015 17:52:54


### 26dB Bandwidth Plot on Channel 9400 (1880.0 MHz)

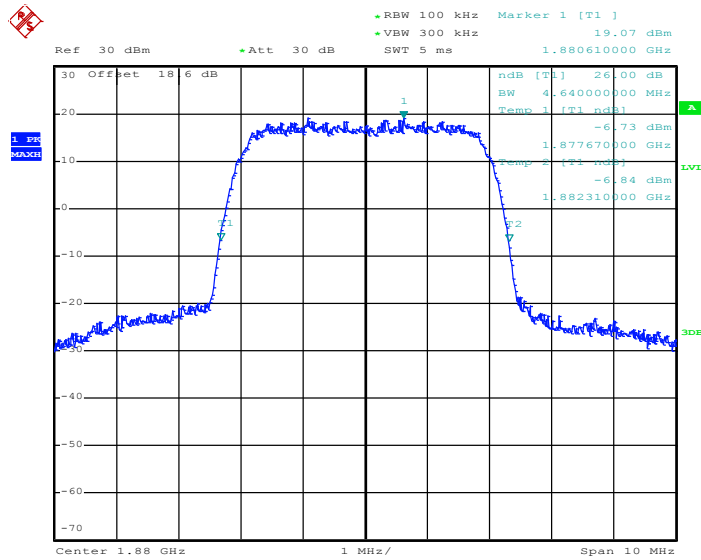

Date: 27.JAN.2015 17:50:18




### 99% Occupied Bandwidth Plot on Channel 9538 (1907.6 MHz)

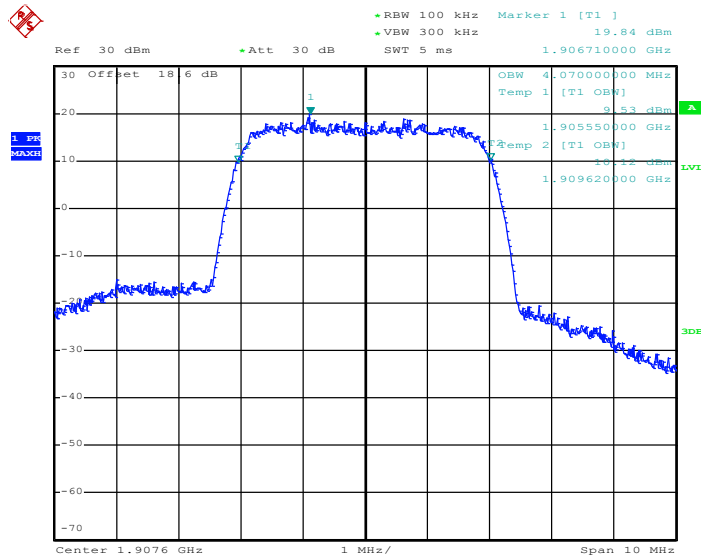

Date: 27.JAN.2015 17:53:22

### 26dB Bandwidth Plot on Channel 9538 (1907.6 MHz)

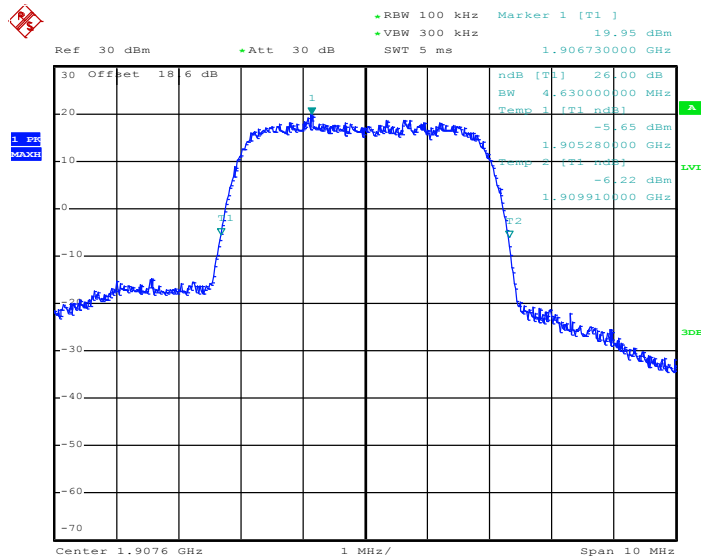

Date: 27.JAN.2015 17:50:46

## 3.4 Band Edge Measurement

### 3.4.1 Description of Band Edge Measurement

The power of any emission outside of the authorized operating frequency ranges must be lower than the transmitter power (P) by a factor of at least  $43 + 10 \log (P)$  dB.


### 3.4.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

### 3.4.3 Test Procedures

1. The testing follows FCC KDB 971168 v02r02 Section 6.0.
2. The EUT was connected to the spectrum analyzer and system simulator via a power divider.
3. The RF output of EUT was connected to the spectrum analyzer by an RF cable and attenuator. The path loss was compensated to the results for each measurement.
4. The band edges of low and high channels for the highest RF powers were measured.
5. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
6. The limit line is derived from  $43 + 10\log(P)$  dB below the transmitter power P(Watts)  
 $= P(W) - [43 + 10\log(P)] \text{ (dB)}$   
 $= [30 + 10\log(P)] \text{ (dBm)} - [43 + 10\log(P)] \text{ (dB)}$   
 $= -13\text{dBm}.$

### 3.4.4 Test Setup

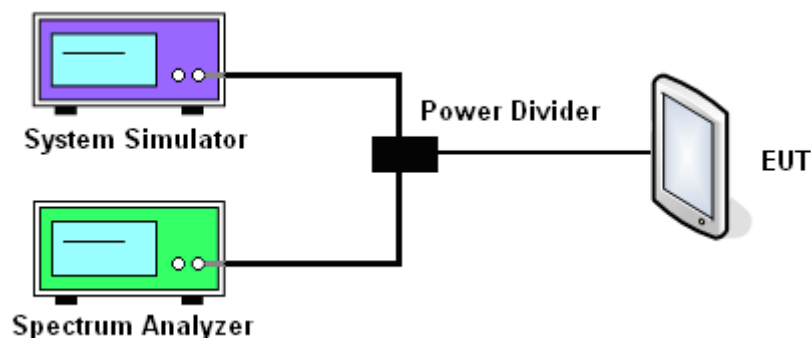




### 3.4.5 Test Result (Plots) of Conducted Band Edge


Band :	GSM850	Test Mode :	GPRS class 8 Link (GMSK)
--------	--------	-------------	--------------------------

Lower Band Edge Plot on Channel 128 (824.2 MHz)

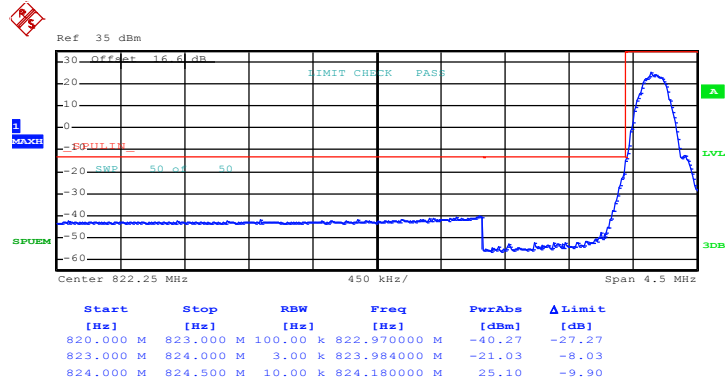

Date: 27.JAN.2015 16:24:03

Higher Band Edge Plot on Channel 251 (848.8 MHz)

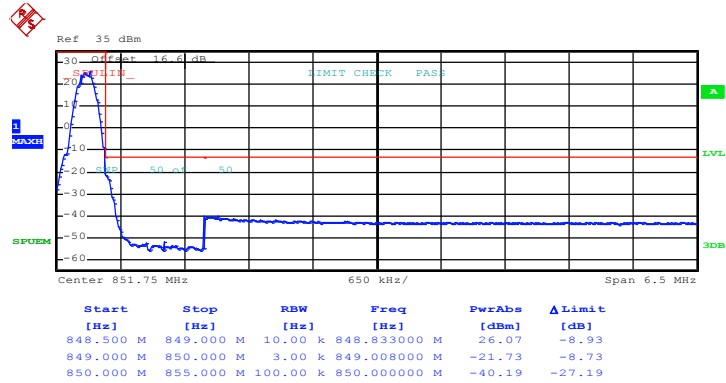


Date: 27.JAN.2015 16:25:20






Band :	GSM850	Test Mode :	EDGE class 8 Link (8PSK)
--------	--------	-------------	--------------------------

Lower Band Edge Plot on Channel 128 (824.2 MHz)

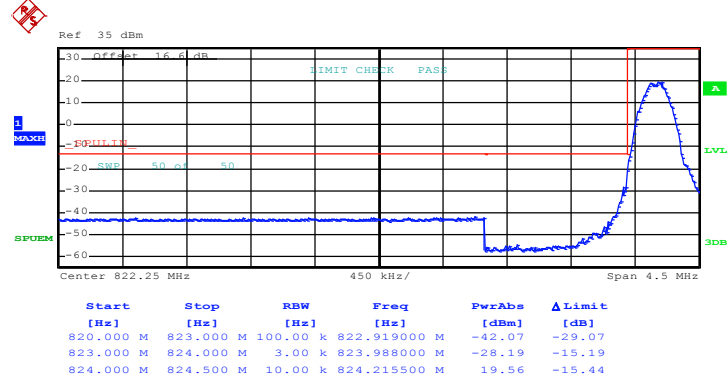

Date: 27.JAN.2015 16:39:13

Higher Band Edge Plot on Channel 251 (848.8 MHz)

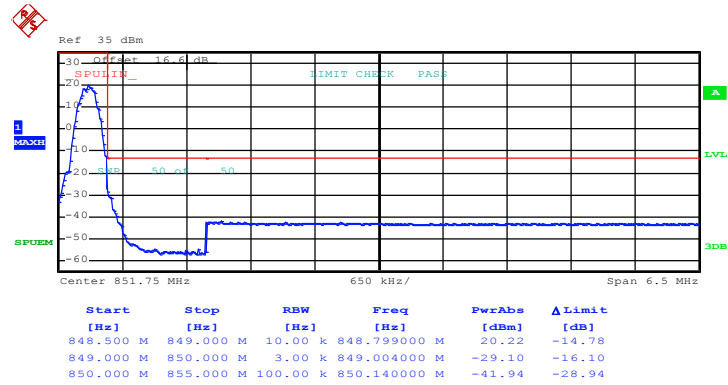


Date: 27.JAN.2015 16:42:28




Band :	GSM1900	Test Mode :	GPRS class 8 Link (GMSK)
--------	---------	-------------	--------------------------

Lower Band Edge Plot on Channel 512 (1850.2 MHz)

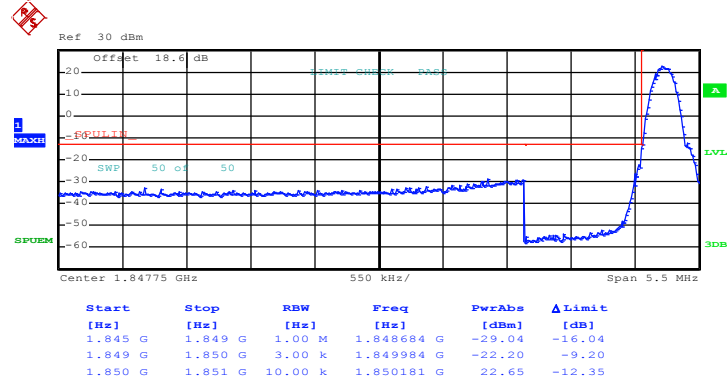

Date: 27.JAN.2015 16:55:14

Higher Band Edge Plot on Channel 810 (1909.8 MHz)

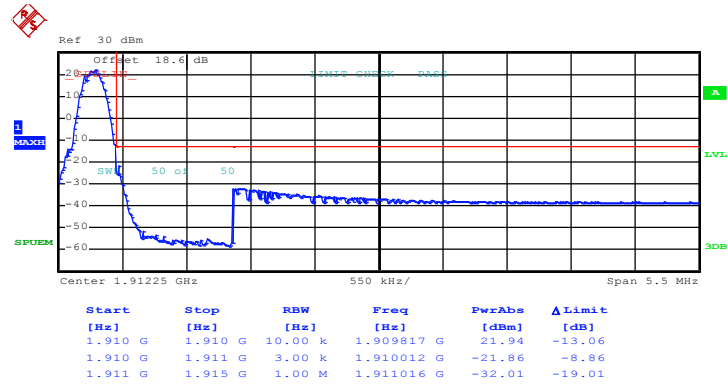


Date: 27.JAN.2015 16:56:40




Band :	GSM1900	Test Mode :	EDGE class 8 Link (8PSK)
--------	---------	-------------	--------------------------

Lower Band Edge Plot on Channel 512 (1850.2 MHz)

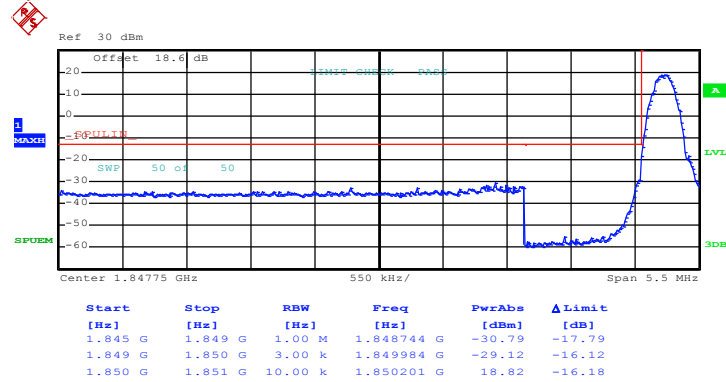

Date: 27.JAN.2015 17:18:03

Higher Band Edge Plot on Channel 810 (1909.8 MHz)

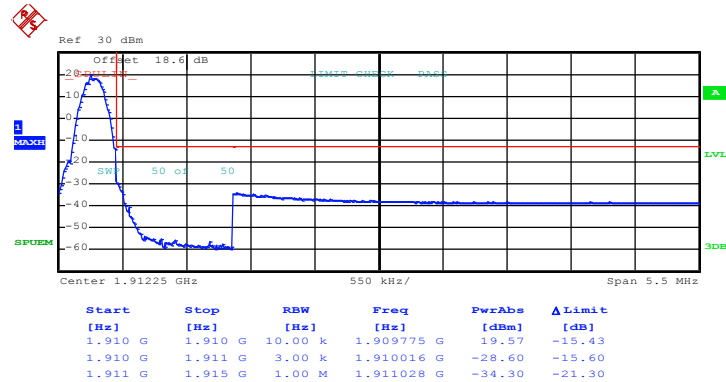


Date: 27.JAN.2015 17:19:31




Band :	WCDMA Band V	Test Mode :	RMC 12.2Kbps Link (QPSK)
--------	--------------	-------------	--------------------------

Lower Band Edge Plot on Channel 4132 (826.4 MHz)

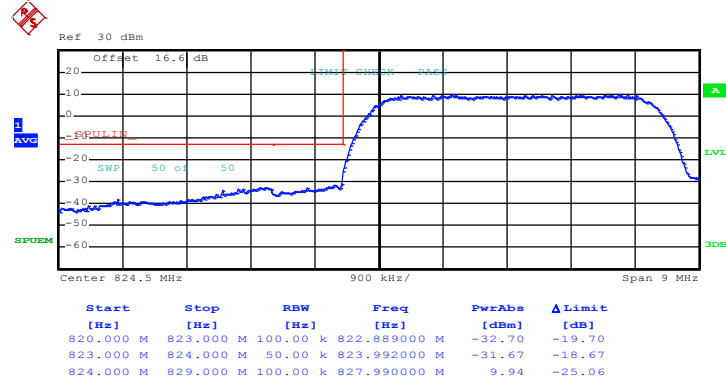

Date: 27.JAN.2015 18:06:53

Higher Band Edge Plot on Channel 4233 (846.6 MHz)

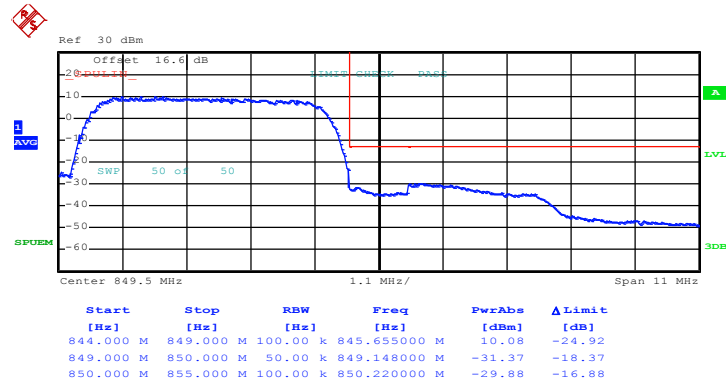


Date: 27.JAN.2015 18:08:05




Band :	WCDMA Band IV	Test Mode :	RMC 12.2Kbps Link (QPSK)
--------	---------------	-------------	--------------------------

Lower Band Edge Plot on Channel 1312 (1712.4 MHz)

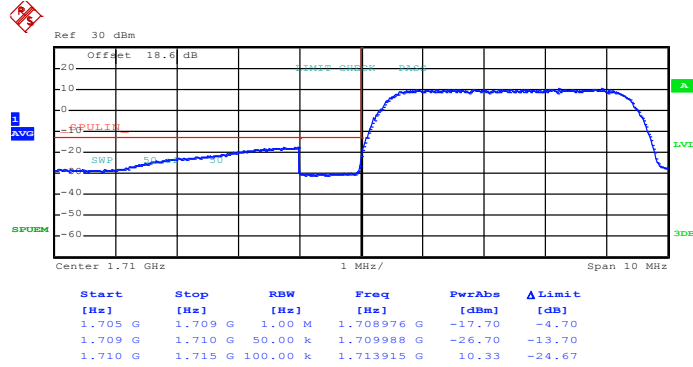

Date: 27.JAN.2015 17:42:20

Higher Band Edge Plot on Channel 1513 (1752.6 MHz)

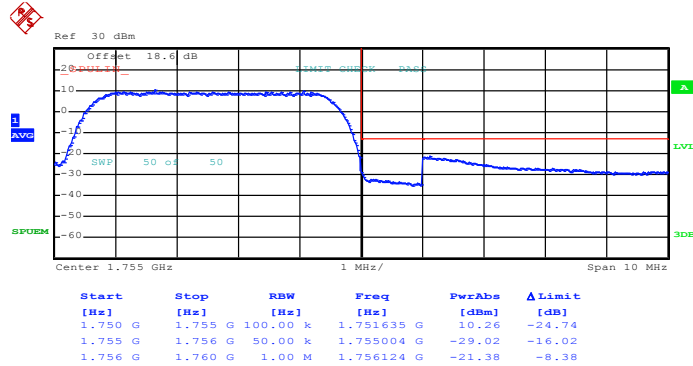


Date: 27.JAN.2015 17:43:33




<b>Band :</b>	WCDMA Band II	<b>Test Mode :</b>	RMC 12.2Kbps Link (QPSK)
---------------	---------------	--------------------	--------------------------

Lower Band Edge Plot on Channel 9262 (1852.4 MHz)

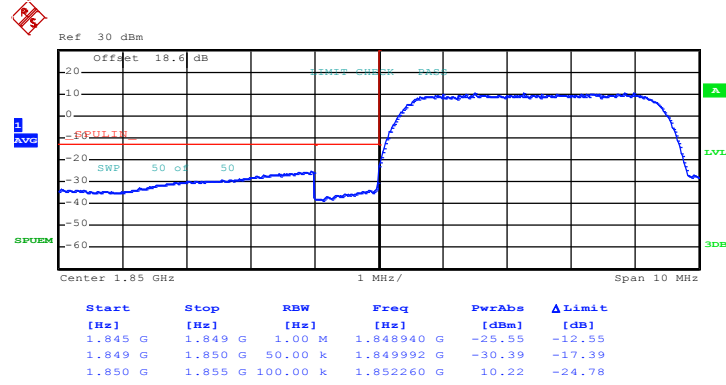

Date: 27.JAN.2015 17:54:40

Higher Band Edge Plot on Channel 9538 (1907.6 MHz)

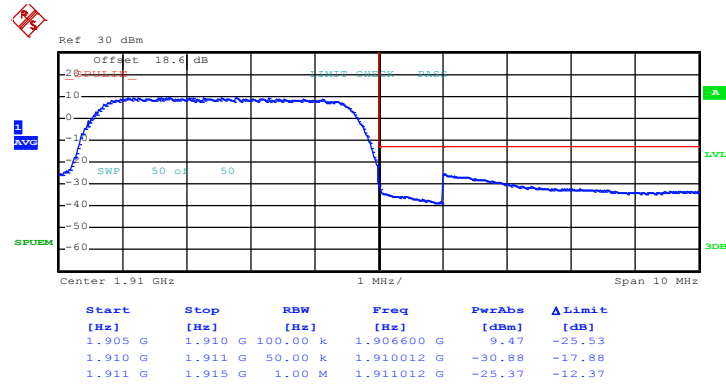

Date: 27.JAN.2015 17:55:52

## 3.5 Conducted Spurious Emission Measurement

### 3.5.1 Description of Conducted Spurious Emission Measurement

The power of any emission outside of the authorized operating frequency ranges must be lower than the transmitter power (P) by a factor of at least  $43 + 10 \log (P)$  dB.

It is measured by means of a calibrated spectrum analyzer and scanned from 30 MHz up to a frequency including its 10<sup>th</sup> harmonic.


### 3.5.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

### 3.5.3 Test Procedures

1. The testing follows FCC KDB 971168 v02r02 Section 6.0.
2. The EUT was connected to the spectrum analyzer and system simulator via a power divider.
3. The RF output of EUT was connected to the spectrum analyzer by an RF cable and attenuator. The path loss was compensated to the results for each measurement.
4. The middle channel for the highest RF power within the transmitting frequency was measured.
5. The conducted spurious emission for the whole frequency range was taken.
6. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
7. The limit line is derived from  $43 + 10\log(P)$  dB below the transmitter power P(Watts)  
 $= P(W) - [43 + 10\log(P)]$  (dB)  
 $= [30 + 10\log(P)]$  (dBm) -  $[43 + 10\log(P)]$  (dB)  
 $= -13\text{dBm}$ .

### 3.5.4 Test Setup

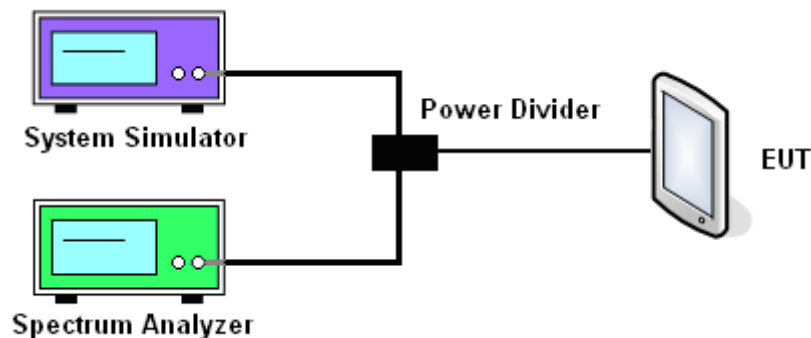




### 3.5.5 Test Result (Plots) of Conducted Spurious Emission

Band :	GSM850	Channel :	CH128
Test Mode :	GPRS class 8 Link (GMSK)	Frequency :	824.2 MHz

Conducted Spurious Emission Plot between 30MHz ~ 9GHz

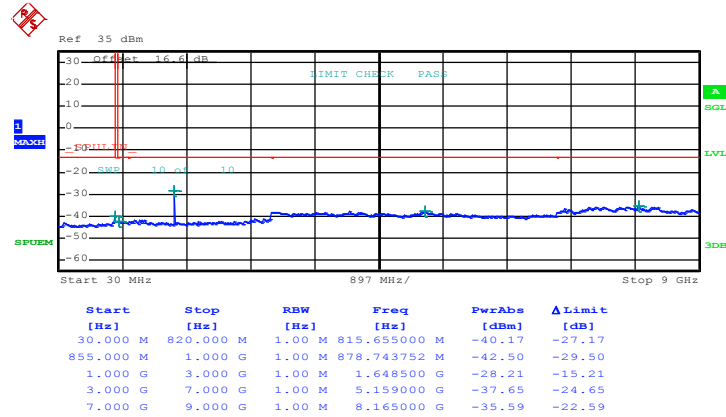


Date: 27.JAN.2015 16:27:32





<b>Band :</b>	GSM850	<b>Channel :</b>	CH189
<b>Test Mode :</b>	GPRS class 8 Link (GMSK)	<b>Frequency :</b>	836.4 MHz

Conducted Spurious Emission Plot between 30MHz ~ 9GHz

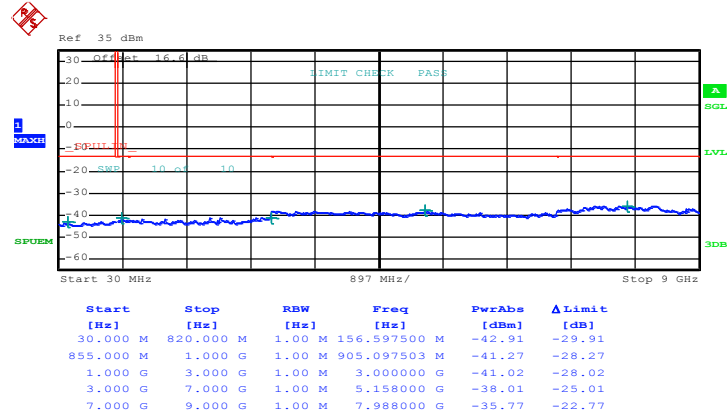


Date: 27.JAN.2015 16:28:14



<b>Band :</b>	GSM850	<b>Channel :</b>	CH251
<b>Test Mode :</b>	GPRS class 8 Link (GMSK)	<b>Frequency :</b>	848.8 MHz

Conducted Spurious Emission Plot between 30MHz ~ 9GHz

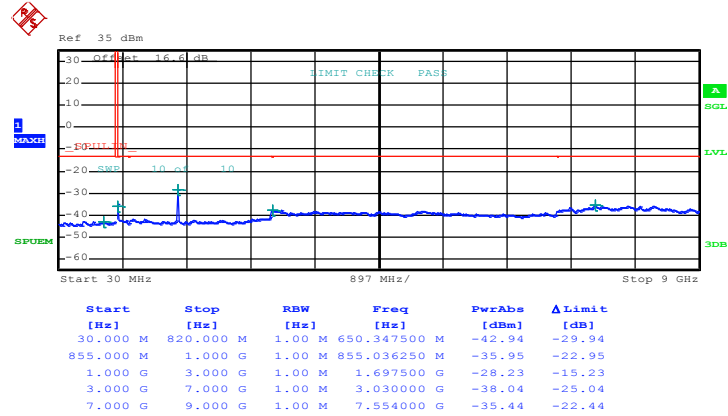


Date: 27.JAN.2015 16:28:43



<b>Band :</b>	GSM850	<b>Channel :</b>	CH128
<b>Test Mode :</b>	EDGE class 8 Link (8PSK)	<b>Frequency :</b>	824.2 MHz

Conducted Spurious Emission Plot between 30MHz ~ 9GHz

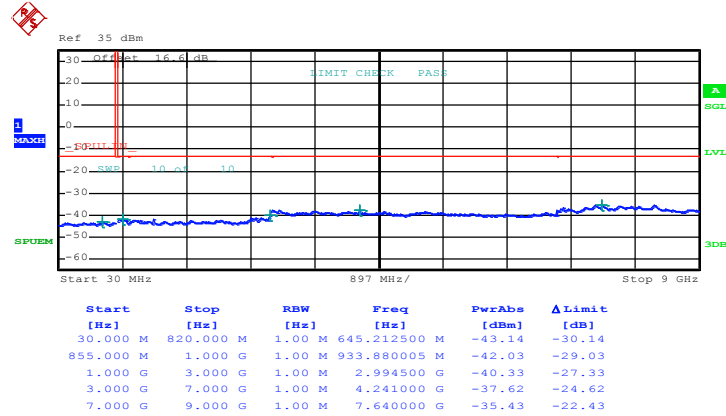


Date: 27.JAN.2015 16:44:12



<b>Band :</b>	GSM850	<b>Channel :</b>	CH189
<b>Test Mode :</b>	EDGE class 8 Link (8PSK)	<b>Frequency :</b>	836.4 MHz

Conducted Spurious Emission Plot between 30MHz ~ 9GHz

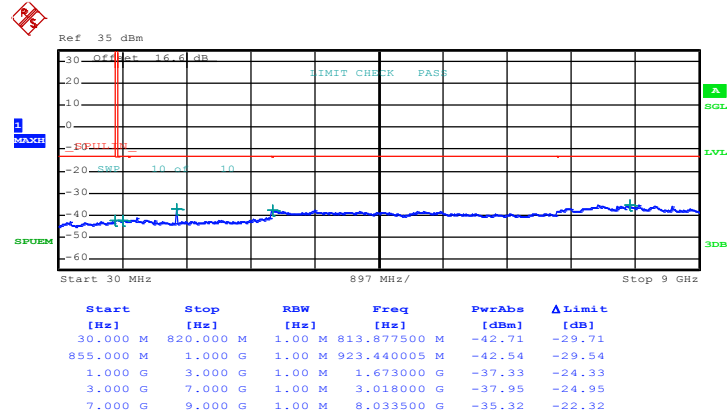


Date: 27.JAN.2015 16:44:42



<b>Band :</b>	GSM850	<b>Channel :</b>	CH251
<b>Test Mode :</b>	EDGE class 8 Link (8PSK)	<b>Frequency :</b>	848.8 MHz

Conducted Spurious Emission Plot between 30MHz ~ 9GHz

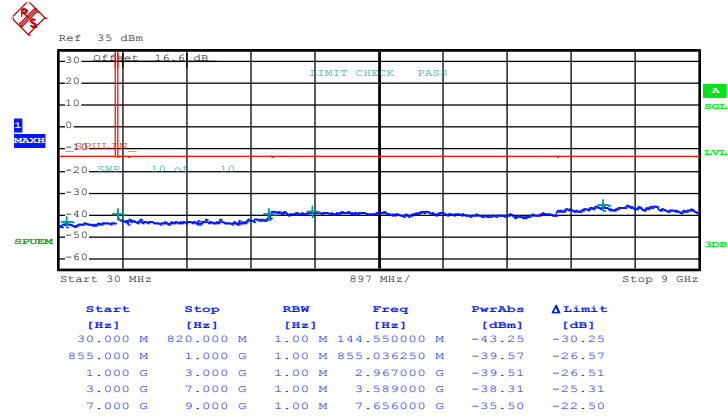


Date: 27.JAN.2015 16:45:15



<b>Band :</b>	GSM1900	<b>Channel :</b>	CH512
<b>Test Mode :</b>	GPRS class 8 Link (GMSK)	<b>Frequency :</b>	1850.2 MHz

Conducted Spurious Emission Plot between 30MHz ~ 19.1GHz

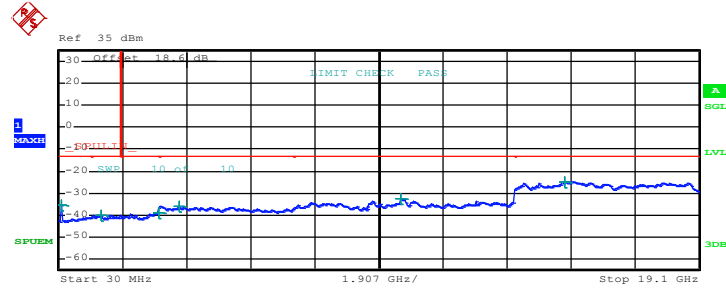


Start [Hz]	Stop [Hz]	RBW [Hz]	Freq [Hz]	PwrAbs [dBm]	Δ Limit [dB]
30.000 M	1.000 G	1.00 M	112.207500 M	-35.19	-22.19
1.000 G	1.845 G	1.00 M	1.269978 G	-40.08	-27.08
1.915 G	3.000 G	1.00 M	2.988608 G	-38.71	-25.71
3.000 G	7.000 G	1.00 M	3.623000 G	-35.99	-22.99
7.000 G	13.600 G	1.00 M	10.222450 G	-32.32	-19.32
13.600 G	19.100 G	1.00 M	15.088438 G	-24.73	-11.73

Date: 27.JAN.2015 16:57:45



<b>Band :</b>	GSM1900	<b>Channel :</b>	CH661
<b>Test Mode :</b>	GPRS class 8 Link (GMSK)	<b>Frequency :</b>	1880.0 MHz

Conducted Spurious Emission Plot between 30MHz ~ 19.1GHz

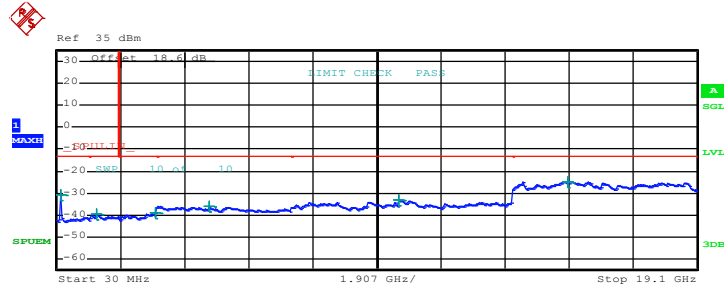


Date: 27.JAN.2015 16:58:15



<b>Band :</b>	GSM1900	<b>Channel :</b>	CH810
<b>Test Mode :</b>	GPRS class 8 Link (GMSK)	<b>Frequency :</b>	1909.8 MHz

Conducted Spurious Emission Plot between 30MHz ~ 19.1GHz

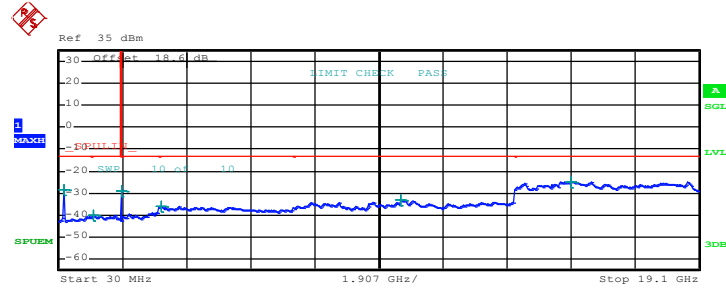

Start [Hz]	Stop [Hz]	RBW [Hz]	Freq [Hz]	PwrAbs [dBm]	Δ Limit [dB]
30.000 M	1.000 G	1.00 M	171.620000 M	-28.70	-15.70
1.000 G	1.845 G	1.00 M	1.063798 G	-39.99	-26.99
1.915 G	3.000 G	1.00 M	1.915271 G	-28.90	-15.90
3.000 G	7.000 G	1.00 M	3.096000 G	-36.00	-23.00
7.000 G	13.600 G	1.00 M	10.222450 G	-32.99	-19.99
13.600 G	19.100 G	1.00 M	15.305000 G	-24.71	-11.71


Date: 27.JAN.2015 16:58:46





<b>Band :</b>	GSM1900	<b>Channel :</b>	CH512
<b>Test Mode :</b>	EDGE class 8 Link (8PSK)	<b>Frequency :</b>	1850.2 MHz

Conducted Spurious Emission Plot between 30MHz ~ 19.1GHz

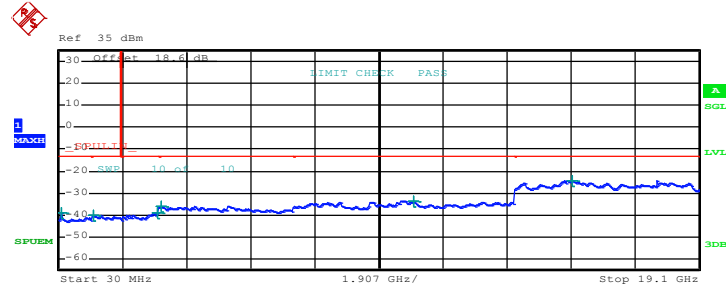


Start [Hz]	Stop [Hz]	RBW [Hz]	Freq [Hz]	PwrAbs [dBm]	Δ Limit [dB]
30.000 M	1.000 G	1.00 M	111.965000 M	-38.73	-25.73
1.000 G	1.845 G	1.00 M	1.055770 G	-40.28	-27.28
1.915 G	3.000 G	1.00 M	2.976401 G	-38.74	-25.74
3.000 G	7.000 G	1.00 M	3.096000 G	-36.08	-23.08
7.000 G	13.600 G	1.00 M	10.594525 G	-33.44	-20.44
13.600 G	19.100 G	1.00 M	15.311188 G	-24.22	-11.22

Date: 27.JAN.2015 17:20:29



<b>Band :</b>	GSM1900	<b>Channel :</b>	CH661
<b>Test Mode :</b>	EDGE class 8 Link (8PSK)	<b>Frequency :</b>	1880.0 MHz

Conducted Spurious Emission Plot between 30MHz ~ 19.1GHz

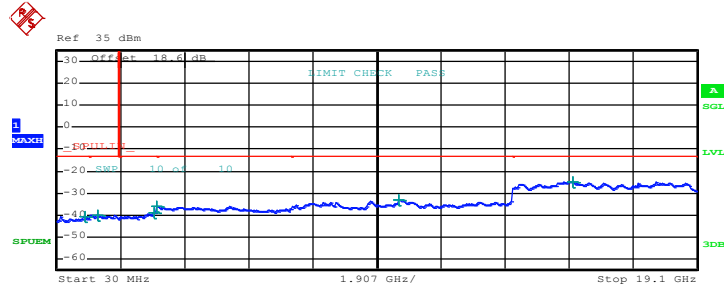


Start [Hz]	Stop [Hz]	RBW [Hz]	Freq [Hz]	PwrAbs [dBm]	Δ Limit [dB]
30.000 M	1.000 G	1.00 M	850.135000 M	-40.68	-27.68
1.000 G	1.845 G	1.00 M	1.269344 G	-39.92	-26.92
1.915 G	3.000 G	1.00 M	2.910759 G	-38.73	-25.73
3.000 G	7.000 G	1.00 M	3.018000 G	-36.03	-23.03
7.000 G	13.600 G	1.00 M	10.224925 G	-33.26	-20.26
13.600 G	19.100 G	1.00 M	15.410187 G	-24.75	-11.75

Date: 27.JAN.2015 17:20:56



<b>Band :</b>	GSM1900	<b>Channel :</b>	CH810
<b>Test Mode :</b>	EDGE class 8 Link (8PSK)	<b>Frequency :</b>	1909.8 MHz

Conducted Spurious Emission Plot between 30MHz ~ 19.1GHz

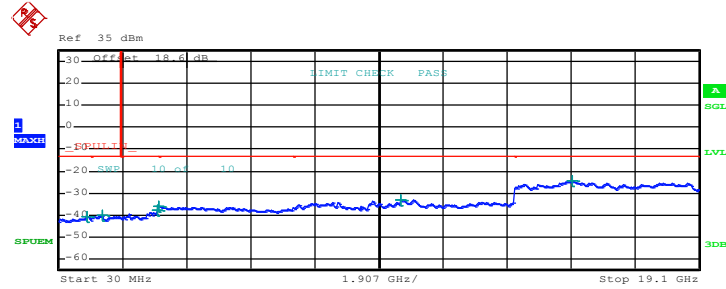


Start [Hz]	Stop [Hz]	RBW [Hz]	Freq [Hz]	PwrAbs [dBm]	Δ Limit [dB]
30.000 M	1.000 G	1.00 M	876.567500 M	-40.79	-27.79
1.000 G	1.845 G	1.00 M	1.343704 G	-40.04	-27.04
1.915 G	3.000 G	1.00 M	2.984539 G	-37.98	-24.98
3.000 G	7.000 G	1.00 M	3.019000 G	-35.98	-22.98
7.000 G	13.600 G	1.00 M	10.213375 G	-33.09	-20.09
13.600 G	19.100 G	1.00 M	15.316688 G	-24.57	-11.57

Date: 27.JAN.2015 17:21:26



<b>Band :</b>	WCDMA Band V	<b>Channel :</b>	CH4132
<b>Test Mode :</b>	RMC 12.2Kbps Link (QPSK)	<b>Frequency :</b>	826.4 MHz

Conducted Spurious Emission Plot between 30MHz ~ 9GHz

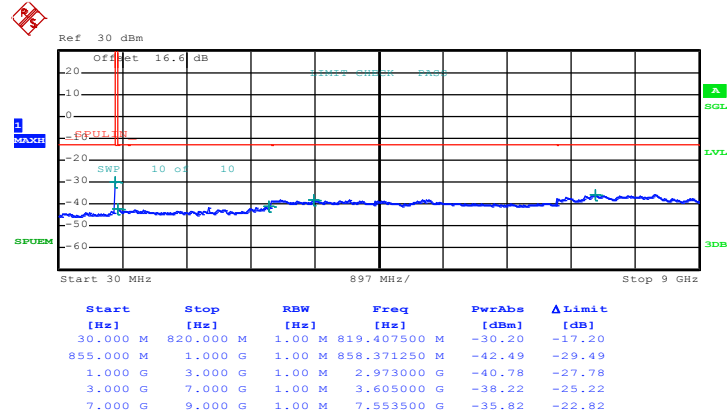


Date: 27.JAN.2015 18:09:06



<b>Band :</b>	WCDMA Band V	<b>Channel :</b>	CH4182
<b>Test Mode :</b>	RMC 12.2Kbps Link (QPSK)	<b>Frequency :</b>	836.4 MHz

Conducted Spurious Emission Plot between 30MHz ~ 9GHz

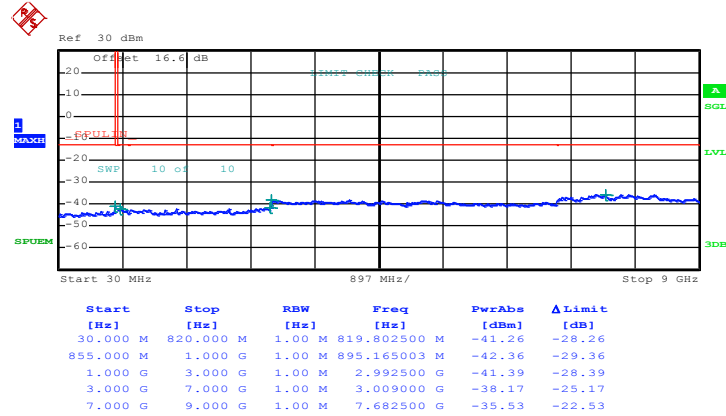


Date: 27.JAN.2015 18:09:31



<b>Band :</b>	WCDMA Band V	<b>Channel :</b>	CH4233
<b>Test Mode :</b>	RMC 12.2Kbps Link (QPSK)	<b>Frequency :</b>	846.6 MHz

Conducted Spurious Emission Plot between 30MHz ~ 9GHz

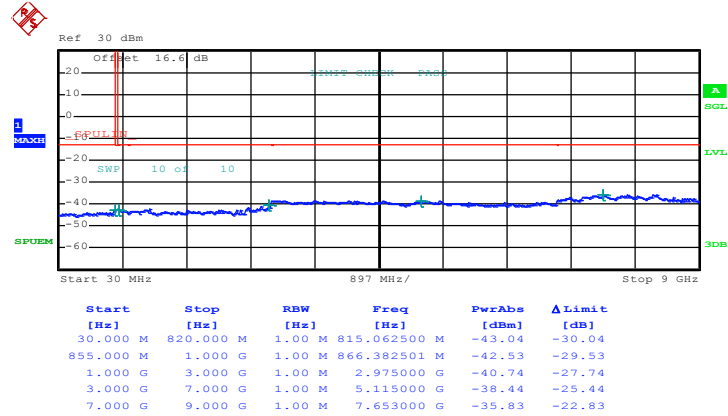


Date: 27.JAN.2015 18:09:56



<b>Band :</b>	WCDMA Band IV	<b>Channel :</b>	CH1312
<b>Test Mode :</b>	RMC 12.2Kbps Link (QPSK)	<b>Frequency :</b>	1712.4 MHz

**Conducted Spurious Emission Plot between 30MHz ~ 18GHz**

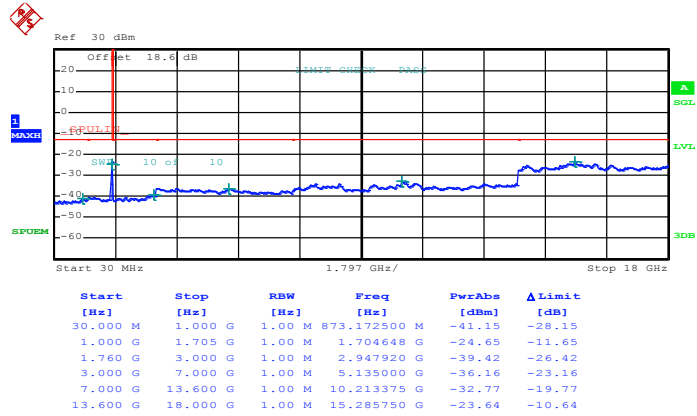


Date: 27.JAN.2015 17:44:06



<b>Band :</b>	WCDMA Band IV	<b>Channel :</b>	CH1413
<b>Test Mode :</b>	RMC 12.2Kbps Link (QPSK)	<b>Frequency :</b>	1732.6 MHz

Conducted Spurious Emission Plot between 30MHz ~ 18GHz

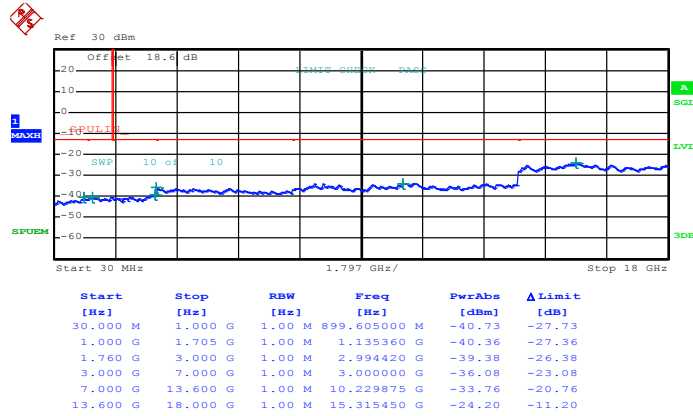


Date: 27.JAN.2015 17:44:31





<b>Band :</b>	WCDMA Band IV	<b>Channel :</b>	CH1513
<b>Test Mode :</b>	RMC 12.2Kbps Link (QPSK)	<b>Frequency :</b>	1752.6 MHz

**Conducted Spurious Emission Plot between 30MHz ~ 18GHz**

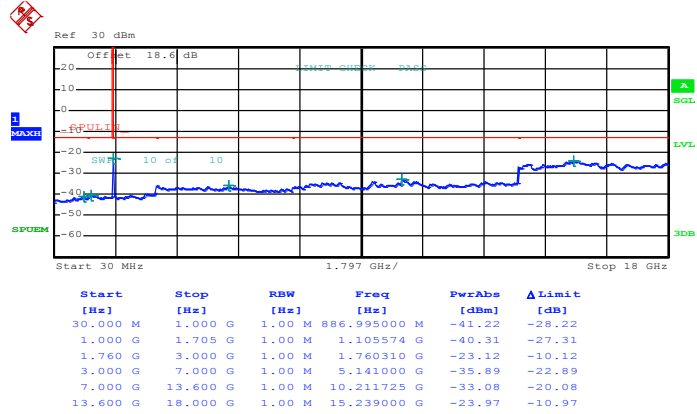


Date: 27.JAN.2015 17:44:56



<b>Band :</b>	WCDMA Band II	<b>Channel :</b>	CH9262
<b>Test Mode :</b>	RMC 12.2Kbps Link (QPSK)	<b>Frequency :</b>	1852.4 MHz

**Conducted Spurious Emission Plot between 30MHz ~ 19.1GHz**

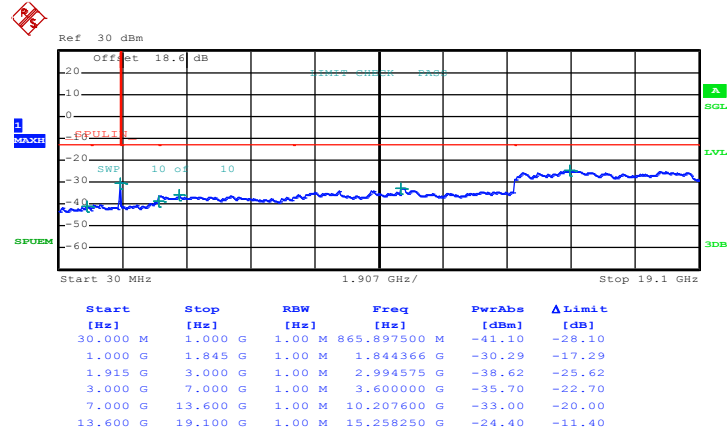


Date: 27.JAN.2015 17:57:10



Band :	WCDMA Band II	Channel :	CH9400
Test Mode :	RMC 12.2Kbps Link (QPSK)	Frequency :	1880.0 MHz

Conducted Spurious Emission Plot between 30MHz ~ 19.1GHz

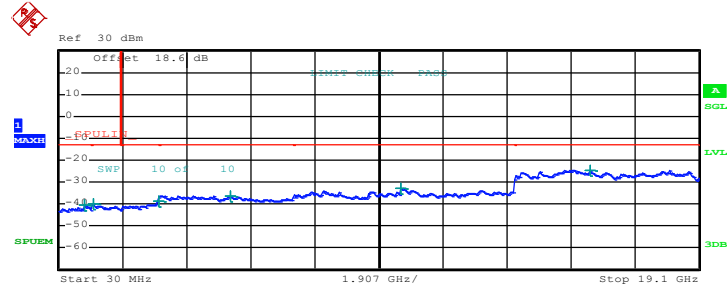


Start [Hz]	Stop [Hz]	RBW [Hz]	Freq [Hz]	PwrAbs [dBm]	Δ Limit [dB]
30.000 M	1.000 G	1.00 M	805.515000 M	-40.67	-27.67
1.000 G	1.845 G	1.00 M	1.073726 G	-39.90	-26.90
1.915 G	3.000 G	1.00 M	2.991320 G	-38.84	-25.84
3.000 G	7.000 G	1.00 M	5.132000 G	-36.26	-23.26
7.000 G	13.600 G	1.00 M	10.210075 G	-32.80	-19.80
13.600 G	19.100 G	1.00 M	15.839875 G	-24.46	-11.46

Date: 27.JAN.2015 17:57:36



<b>Band :</b>	WCDMA Band II	<b>Channel :</b>	CH9538
<b>Test Mode :</b>	RMC 12.2Kbps Link (QPSK)	<b>Frequency :</b>	1907.6 MHz

Conducted Spurious Emission Plot between 30MHz ~ 19.1GHz

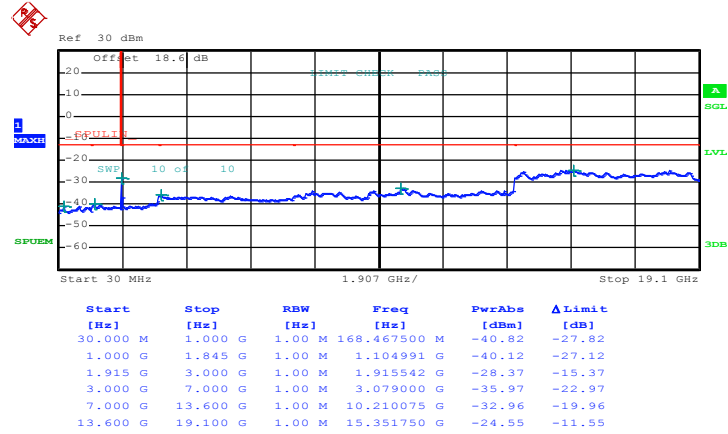

Date: 27.JAN.2015 17:58:01



### 3.6 Field Strength of Spurious Radiation Measurement

#### 3.6.1 Description of Field Strength of Spurious Radiated Measurement

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitter power (P) by a factor of at least  $43 + 10 \log (P)$  dB. The spectrum is scanned from 30 MHz up to a frequency including its 10th harmonic.

#### 3.6.2 Measuring Instruments


The measuring equipment is listed in the section 4 of this test report.

#### 3.6.3 Test Procedures


1. The testing follows FCC KDB 971168 v02r02 Section 5.8 and ANSI / TIA-603-C-2004 Section 2.2.12.
2. The EUT was placed on a rotatable wooden table 0.8 meters above the ground.
3. The EUT was set 3 meters from the receiving antenna, which was mounted on the antenna tower.
4. The table was rotated 360 degrees to determine the position of the highest spurious emission.
5. The height of the receiving antenna is varied between one meter and four meters to search for the maximum spurious emission for both horizontal and vertical polarizations.
6. Make the measurement with the spectrum analyzer's RBW = 1MHz, VBW = 3MHz, taking record of maximum spurious emission.
7. A horn antenna was substituted in place of the EUT and was driven by a signal generator.
8. Tune the output power of signal generator to the same emission level with EUT maximum spurious emission.
9. Taking the record of output power at antenna port.
10. Repeat step 7 to step 8 for another polarization.
11.  $EIRP \text{ (dBm)} = S.G. \text{ Power} - Tx \text{ Cable Loss} + Tx \text{ Antenna Gain}$
12.  $ERP \text{ (dBm)} = EIRP - 2.15$
13. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
14. The limit line is derived from  $43 + 10\log(P)$  dB below the transmitter power P(Watts)  
=  $P(W) - [43 + 10\log(P)] \text{ (dB)}$   
=  $[30 + 10\log(P)] \text{ (dBm)} - [43 + 10\log(P)] \text{ (dB)}$   
= -13dBm.

### 3.6.4 Test Setup

For radiated emissions from 30MHz to 1GHz

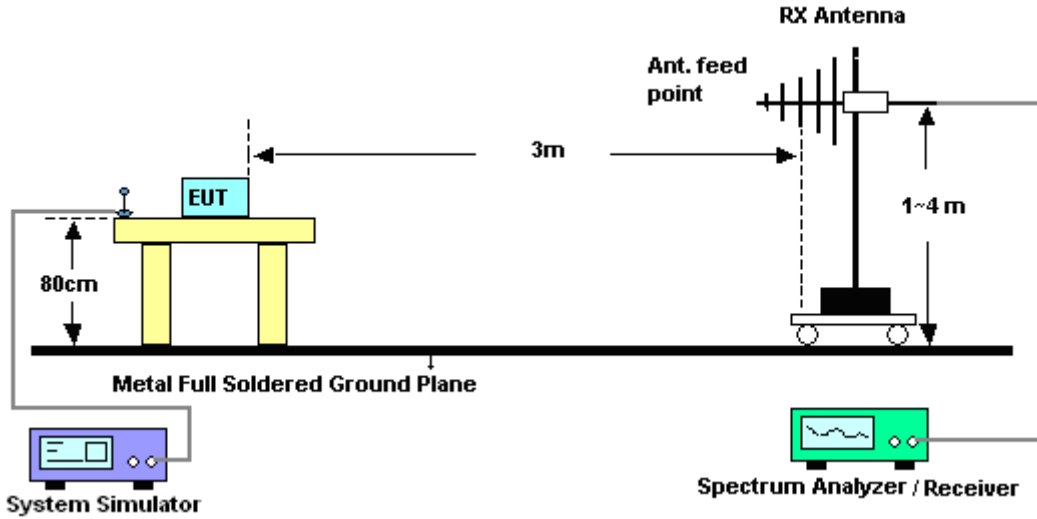

For radiated emissions above 1GHz

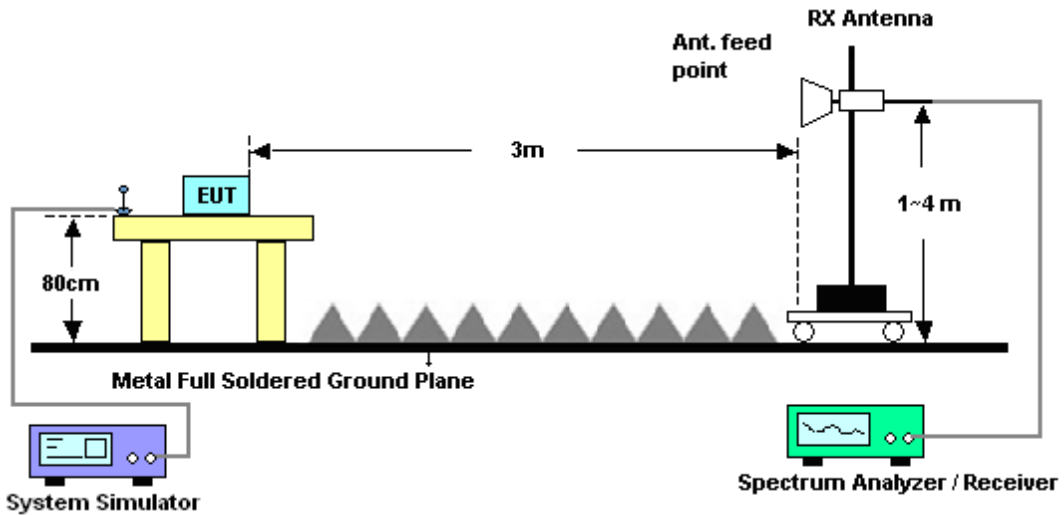



3.6.5 Test Result of Field Strength of Spurious Radiated

<Low Channel>

<b>Band :</b>	GSM850					<b>Temperature :</b>	23~24°C		
<b>Test Mode :</b>	GPRS class 8 Link (GMSK)					<b>Relative Humidity :</b>	46~48%		
<b>Test Engineer :</b>	Nick Yu and Derreck Chen and Ken Wu					<b>Polarization :</b>	Horizontal		
<b>Remark :</b>	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.								
Frequency ( MHz )	ERP ( dBm )	Limit ( dBm )	Over Limit ( dB )	SPA Reading ( dBm )	S.G. Power ( dBm )	TX Cable loss ( dB )	TX Antenna Gain ( dBi )	Polarization ( H/V )	Result
1648	-54.95	-13	-41.95	-65.85	-56.71	0.98	4.89	H	Pass
2472	-50.45	-13	-37.45	-66.77	-52.33	1.28	5.32	H	Pass
3296	-59.51	-13	-46.51	-76.45	-62.92	1.54	7.10	H	Pass

<b>Band :</b>	GSM850					<b>Temperature :</b>	23~24°C		
<b>Test Mode :</b>	GPRS class 8 Link (GMSK)					<b>Relative Humidity :</b>	46~48%		
<b>Test Engineer :</b>	Nick Yu and Derreck Chen and Ken Wu					<b>Polarization :</b>	Vertical		
<b>Remark :</b>	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.								
Frequency ( MHz )	ERP ( dBm )	Limit ( dBm )	Over Limit ( dB )	SPA Reading ( dBm )	S.G. Power ( dBm )	TX Cable loss ( dB )	TX Antenna Gain ( dBi )	Polarization ( H/V )	Result
1648	-55.03	-13	-42.03	-66.83	-56.79	0.98	4.89	V	Pass
2472	-52.08	-13	-39.08	-69.83	-53.96	1.28	5.32	V	Pass
3296	-58.18	-13	-45.18	-76.7	-61.59	1.54	7.10	V	Pass



<Middle Channel>

<b>Band :</b>	GSM850					<b>Temperature :</b>	23~24°C		
<b>Test Mode :</b>	GPRS class 8 Link (GMSK)					<b>Relative Humidity :</b>	46~48%		
<b>Test Engineer :</b>	Nick Yu and Derreck Chen and Ken Wu					<b>Polarization :</b>	Horizontal		
<b>Remark :</b>	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.								
Frequency ( MHz )	ERP ( dBm )	Limit ( dBm )	Over Limit ( dB )	SPA Reading ( dBm )	S.G. Power ( dBm )	TX Cable loss ( dB )	TX Antenna Gain ( dBi )	Polarization ( H/V )	Result
1672	-57.78	-13	-44.78	-68.76	-59.46	0.99	4.82	H	Pass
2512	-50.71	-13	-37.71	-66.91	-52.68	1.29	5.41	H	Pass
3344	-59.54	-13	-46.54	-76.76	-63.15	1.56	7.31	H	Pass

<b>Band :</b>	GSM850					<b>Temperature :</b>	23~24°C		
<b>Test Mode :</b>	GPRS class 8 Link (GMSK)					<b>Relative Humidity :</b>	46~48%		
<b>Test Engineer :</b>	Nick Yu and Derreck Chen and Ken Wu					<b>Polarization :</b>	Vertical		
<b>Remark :</b>	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.								
Frequency ( MHz )	ERP ( dBm )	Limit ( dBm )	Over Limit ( dB )	SPA Reading ( dBm )	S.G. Power ( dBm )	TX Cable loss ( dB )	TX Antenna Gain ( dBi )	Polarization ( H/V )	Result
1672	-57.50	-13	-44.50	-69.21	-59.18	0.99	4.82	V	Pass
2512	-50.35	-13	-37.35	-68.06	-52.32	1.29	5.41	V	Pass
3345	-58.21	-13	-45.21	-76.92	-61.82	1.56	7.32	V	Pass





<High Channel>

<b>Band :</b>	GSM850					<b>Temperature :</b>	23~24°C		
<b>Test Mode :</b>	GPRS class 8 Link (GMSK)					<b>Relative Humidity :</b>	46~48%		
<b>Test Engineer :</b>	Nick Yu and Derreck Chen and Ken Wu					<b>Polarization :</b>	Horizontal		
<b>Remark :</b>	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.								
Frequency	ERP	Limit	Over Limit	SPA Reading	S.G. Power	TX Cable loss	TX Antenna Gain	Polarization	Result
1696	-54.29	-13	-41.29	-65.68	-55.89	1.00	4.75	H	Pass
2544	-54.70	-13	-41.70	-70.74	-56.68	1.30	5.44	H	Pass
3392	-59.09	-13	-46.09	-76.63	-62.89	1.57	7.52	H	Pass

<b>Band :</b>	GSM850					<b>Temperature :</b>	23~24°C		
<b>Test Mode :</b>	GPRS class 8 Link (GMSK)					<b>Relative Humidity :</b>	46~48%		
<b>Test Engineer :</b>	Nick Yu and Derreck Chen and Ken Wu					<b>Polarization :</b>	Vertical		
<b>Remark :</b>	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.								
Frequency ( MHz )	ERP ( dBm )	Limit ( dBm )	Over Limit ( dB )	SPA Reading ( dBm )	S.G. Power ( dBm )	TX Cable loss ( dB )	TX Antenna Gain ( dBi )	Polarization ( H/V )	Result
1696	-51.99	-13	-38.99	-64.1	-53.59	1.00	4.75	V	Pass
2544	-48.55	-13	-35.55	-66.82	-50.53	1.30	5.44	V	Pass
3392	-58.17	-13	-45.17	-76.99	-61.97	1.57	7.52	V	Pass



<Low Channel>

<b>Band :</b>	GSM850					<b>Temperature :</b>	23~24°C		
<b>Test Mode :</b>	EDGE class 8 Link (8PSK)					<b>Relative Humidity :</b>	46~48%		
<b>Test Engineer :</b>	Nick Yu and Derreck Chen and Ken Wu					<b>Polarization :</b>	Horizontal		
<b>Remark :</b>	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.								
Frequency ( MHz )	ERP ( dBm )	Limit ( dBm )	Over Limit ( dB )	SPA Reading ( dBm )	S.G. Power ( dBm )	TX Cable loss ( dB )	TX Antenna Gain ( dBi )	Polarization ( H/V )	Result
1648	-53.77	-13	-40.77	-64.68	-55.53	0.98	4.89	H	Pass
2472	-55.80	-13	-42.80	-71.7	-57.68	1.28	5.32	H	Pass
3296	-59.28	-13	-46.28	-76.23	-62.69	1.54	7.10	H	Pass

<b>Band :</b>	GSM850					<b>Temperature :</b>	23~24°C		
<b>Test Mode :</b>	EDGE class 8 Link (8PSK)					<b>Relative Humidity :</b>	46~48%		
<b>Test Engineer :</b>	Nick Yu and Derreck Chen and Ken Wu					<b>Polarization :</b>	Vertical		
<b>Remark :</b>	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.								
Frequency ( MHz )	ERP ( dBm )	Limit ( dBm )	Over Limit ( dB )	SPA Reading ( dBm )	S.G. Power ( dBm )	TX Cable loss ( dB )	TX Antenna Gain ( dBi )	Polarization ( H/V )	Result
1648	-51.75	-13	-38.75	-63.41	-53.51	0.98	4.89	V	Pass
2472	-44.88	-13	-31.88	-62.4	-46.76	1.28	5.32	V	Pass
3296	-57.92	-13	-44.92	-76.44	-61.33	1.54	7.10	V	Pass



<Middle Channel>

<b>Band :</b>	GSM850					<b>Temperature :</b>	23~24°C		
<b>Test Mode :</b>	EDGE class 8 Link (8PSK)					<b>Relative Humidity :</b>	46~48%		
<b>Test Engineer :</b>	Nick Yu and Derreck Chen and Ken Wu					<b>Polarization :</b>	Horizontal		
<b>Remark :</b>	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.								
Frequency ( MHz )	ERP ( dBm )	Limit ( dBm )	Over Limit ( dB )	SPA Reading ( dBm )	S.G. Power ( dBm )	TX Cable loss ( dB )	TX Antenna Gain ( dBi )	Polarization ( H/V )	Result
1672	-56.28	-13	-43.28	-67.26	-57.96	0.99	4.82	H	Pass
2512	-52.39	-13	-39.39	-69.06	-54.36	1.29	5.41	H	Pass
3344	-59.57	-13	-46.57	-76.67	-63.18	1.56	7.31	H	Pass

<b>Band :</b>	GSM850					<b>Temperature :</b>	23~24°C		
<b>Test Mode :</b>	EDGE class 8 Link (8PSK)					<b>Relative Humidity :</b>	46~48%		
<b>Test Engineer :</b>	Nick Yu and Derreck Chen and Ken Wu					<b>Polarization :</b>	Vertical		
<b>Remark :</b>	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.								
Frequency ( MHz )	ERP ( dBm )	Limit ( dBm )	Over Limit ( dB )	SPA Reading ( dBm )	S.G. Power ( dBm )	TX Cable loss ( dB )	TX Antenna Gain ( dBi )	Polarization ( H/V )	Result
1672	-52.06	-13	-39.06	-63.78	-53.74	0.99	4.82	V	Pass
2512	-46.82	-13	-33.82	-64.76	-48.79	1.29	5.41	V	Pass
3344	-57.94	-13	-44.94	-76.65	-61.55	1.56	7.31	V	Pass



<High Channel>

<b>Band :</b>	GSM850					<b>Temperature :</b>	23~24°C		
<b>Test Mode :</b>	EDGE class 8 Link (8PSK)					<b>Relative Humidity :</b>	46~48%		
<b>Test Engineer :</b>	Nick Yu and Derreck Chen and Ken Wu					<b>Polarization :</b>	Horizontal		
<b>Remark :</b>	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.								
Frequency ( MHz )	ERP ( dBm )	Limit ( dBm )	Over Limit ( dB )	SPA Reading ( dBm )	S.G. Power ( dBm )	TX Cable loss ( dB )	TX Antenna Gain ( dBi )	Polarization ( H/V )	Result
1696	-51.02	-13	-38.02	-62.41	-52.62	1.00	4.75	H	Pass
2544	-53.51	-13	-40.51	-70.22	-55.49	1.30	5.44	H	Pass
3392	-58.78	-13	-45.78	-76.32	-62.58	1.57	7.52	H	Pass

<b>Band :</b>	GSM850					<b>Temperature :</b>	23~24°C		
<b>Test Mode :</b>	EDGE class 8 Link (8PSK)					<b>Relative Humidity :</b>	46~48%		
<b>Test Engineer :</b>	Nick Yu and Derreck Chen and Ken Wu					<b>Polarization :</b>	Vertical		
<b>Remark :</b>	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.								
Frequency ( MHz )	ERP ( dBm )	Limit ( dBm )	Over Limit ( dB )	SPA Reading ( dBm )	S.G. Power ( dBm )	TX Cable loss ( dB )	TX Antenna Gain ( dBi )	Polarization ( H/V )	Result
1696	-51.87	-13	-38.87	-63.98	-53.47	1.00	4.75	V	Pass
2544	-50.39	-13	-37.39	-67.81	-54.52	1.30	5.44	V	Pass
3392	-58.36	-13	-45.36	-76.86	-64.31	1.57	7.52	V	Pass



<Low Channel>

<b>Band :</b>	GSM1900					<b>Temperature :</b>	23~24°C		
<b>Test Mode :</b>	GPRS class 8 Link (GMSK)					<b>Relative Humidity :</b>	46~48%		
<b>Test Engineer :</b>	Nick Yu and Derreck Chen and Ken Wu					<b>Polarization :</b>	Horizontal		
<b>Remark :</b>	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.								
Frequency ( MHz )	EIRP ( dBm )	Limit ( dBm )	Over Limit ( dB )	SPA Reading ( dBm )	S.G. Power ( dBm )	TX Cable loss ( dB )	TX Antenna Gain ( dBi )	Polarization ( H/V )	Result
3700	-58.13	-13	-45.13	-76.96	-64.7	1.67	8.24	H	Pass
5548	-46.72	-13	-33.72	-70.66	-53.79	2.65	9.72	H	Pass
7403	-53.13	-13	-40.13	-78.91	-62.28	2.46	11.61	H	Pass

<b>Band :</b>	GSM1900					<b>Temperature :</b>	23~24°C		
<b>Test Mode :</b>	GPRS class 8 Link (GMSK)					<b>Relative Humidity :</b>	46~48%		
<b>Test Engineer :</b>	Nick Yu and Derreck Chen and Ken Wu					<b>Polarization :</b>	Vertical		
<b>Remark :</b>	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.								
Frequency ( MHz )	EIRP ( dBm )	Limit ( dBm )	Over Limit ( dB )	SPA Reading ( dBm )	S.G. Power ( dBm )	TX Cable loss ( dB )	TX Antenna Gain ( dBi )	Polarization ( H/V )	Result
3700	-57.55	-13	-44.55	-77.23	-64.12	1.67	8.24	V	Pass
5548	-41.75	-13	-28.75	-66.79	-48.82	2.65	9.72	V	Pass
7403	-51.34	-13	-38.34	-78.86	-60.49	2.46	11.61	V	Pass



<Middle Channel>

<b>Band :</b>	GSM1900					<b>Temperature :</b>	23~24°C		
<b>Test Mode :</b>	GPRS class 8 Link (GMSK)					<b>Relative Humidity :</b>	46~48%		
<b>Test Engineer :</b>	Nick Yu and Derreck Chen and Ken Wu					<b>Polarization :</b>	Horizontal		
<b>Remark :</b>	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.								
Frequency ( MHz )	EIRP ( dBm )	Limit ( dBm )	Over Limit ( dB )	SPA Reading ( dBm )	S.G. Power ( dBm )	TX Cable loss ( dB )	TX Antenna Gain ( dBi )	Polarization ( H/V )	Result
3763	-57.43	-13	-44.43	-77.01	-64.06	1.69	8.32	H	Pass
5639	-49.78	-13	-36.78	-73.68	-56.83	2.71	9.76	H	Pass
7522	-52.46	-13	-39.46	-78.98	-61.85	2.42	11.81	H	Pass

<b>Band :</b>	GSM1900					<b>Temperature :</b>	23~24°C		
<b>Test Mode :</b>	GPRS class 8 Link (GMSK)					<b>Relative Humidity :</b>	46~48%		
<b>Test Engineer :</b>	Nick Yu and Derreck Chen and Ken Wu					<b>Polarization :</b>	Vertical		
<b>Remark :</b>	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.								
Frequency ( MHz )	EIRP ( dBm )	Limit ( dBm )	Over Limit ( dB )	SPA Reading ( dBm )	S.G. Power ( dBm )	TX Cable loss ( dB )	TX Antenna Gain ( dBi )	Polarization ( H/V )	Result
3763	-56.62	-13	-43.62	-76.92	-63.25	1.69	8.32	V	Pass
5639	-45.74	-13	-32.74	-70.67	-52.79	2.71	9.76	V	Pass
7522	-50.77	-13	-37.77	-79	-60.16	2.42	11.81	V	Pass



<High Channel>

<b>Band :</b>	GSM1900				<b>Temperature :</b>	23~24°C			
<b>Test Mode :</b>	GPRS class 8 Link (GMSK)				<b>Relative Humidity :</b>	46~48%			
<b>Test Engineer :</b>	Nick Yu and Derreck Chen and Ken Wu				<b>Polarization :</b>	Horizontal			
<b>Remark :</b>	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.								
Frequency ( MHz )	EIRP ( dBm )	Limit ( dBm )	Over Limit ( dB )	SPA Reading ( dBm )	S.G. Power ( dBm )	TX Cable loss ( dB )	TX Antenna Gain ( dBi )	Polarization ( H/V )	Result
3819	-54.84	-13	-41.84	-75.73	-61.52	1.70	8.38	H	Pass
5729	-51.33	-13	-38.33	-75.63	-58.36	2.76	9.79	H	Pass
7639	-51.71	-13	-38.71	-78.75	-61.21	2.38	11.88	H	Pass

<b>Band :</b>	GSM1900				<b>Temperature :</b>	23~24°C			
<b>Test Mode :</b>	GPRS class 8 Link (GMSK)				<b>Relative Humidity :</b>	46~48%			
<b>Test Engineer :</b>	Nick Yu and Derreck Chen and Ken Wu				<b>Polarization :</b>	Vertical			
<b>Remark :</b>	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.								
Frequency ( MHz )	EIRP ( dBm )	Limit ( dBm )	Over Limit ( dB )	SPA Reading ( dBm )	S.G. Power ( dBm )	TX Cable loss ( dB )	TX Antenna Gain ( dBi )	Polarization ( H/V )	Result
3819	-55.73	-13	-42.73	-77.12	-62.41	1.70	8.38	V	Pass
5729	-53.28	-13	-40.28	-78.4	-60.31	2.76	9.79	V	Pass
7639	-49.97	-13	-36.97	-78.95	-59.47	2.38	11.88	V	Pass



<Low Channel>

<b>Band :</b>	GSM1900				<b>Temperature :</b>	23~24°C			
<b>Test Mode :</b>	EDGE class 8 Link (8PSK)				<b>Relative Humidity :</b>	46~48%			
<b>Test Engineer :</b>	Nick Yu and Derreck Chen and Ken Wu				<b>Polarization :</b>	Horizontal			
<b>Remark :</b>	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.								
Frequency ( MHz )	EIRP ( dBm )	Limit ( dBm )	Over Limit ( dB )	SPA Reading ( dBm )	S.G. Power ( dBm )	TX Cable loss ( dB )	TX Antenna Gain ( dBi )	Polarization ( H/V )	Result
3700	-61.64	-13	-48.64	-77.64	-68.21	1.67	8.24	H	Pass
5550	-49.95	-13	-36.95	-74.09	-57.02	2.65	9.72	H	Pass
7400	-52.93	-13	-39.93	-79.18	-62.07	2.46	11.60	H	Pass

<b>Band :</b>	GSM1900				<b>Temperature :</b>	23~24°C			
<b>Test Mode :</b>	EDGE class 8 Link (8PSK)				<b>Relative Humidity :</b>	46~48%			
<b>Test Engineer :</b>	Nick Yu and Derreck Chen and Ken Wu				<b>Polarization :</b>	Vertical			
<b>Remark :</b>	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.								
Frequency ( MHz )	EIRP ( dBm )	Limit ( dBm )	Over Limit ( dB )	SPA Reading ( dBm )	S.G. Power ( dBm )	TX Cable loss ( dB )	TX Antenna Gain ( dBi )	Polarization ( H/V )	Result
3700	-58.18	-13	-45.18	-77.98	-64.753	1.67	8.24	V	Pass
5550	-47.56	-13	-34.56	-72.88	-54.63	2.65	9.72	V	Pass
7400	-51.87	-13	-38.87	-79.39	-61.01	2.46	11.60	V	Pass





<Middle Channel>

<b>Band :</b>	GSM1900					<b>Temperature :</b>	23~24°C		
<b>Test Mode :</b>	EDGE class 8 Link (8PSK)					<b>Relative Humidity :</b>	46~48%		
<b>Test Engineer :</b>	Nick Yu and Derreck Chen and Ken Wu					<b>Polarization :</b>	Horizontal		
<b>Remark :</b>	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.								
Frequency ( MHz )	EIRP ( dBm )	Limit ( dBm )	Over Limit ( dB )	SPA Reading ( dBm )	S.G. Power ( dBm )	TX Cable loss ( dB )	TX Antenna Gain ( dBi )	Polarization ( H/V )	Result
3760	-57.76	-13	-44.76	-77.49	-64.39	1.69	8.31	H	Pass
5640	-50.96	-13	-37.96	-75.7	-58.01	2.71	9.76	H	Pass
7520	-52.93	-13	-39.93	-79.21	-62.32	2.42	11.81	H	Pass

<b>Band :</b>	GSM1900					<b>Temperature :</b>	23~24°C		
<b>Test Mode :</b>	EDGE class 8 Link (8PSK)					<b>Relative Humidity :</b>	46~48%		
<b>Test Engineer :</b>	Nick Yu and Derreck Chen and Ken Wu					<b>Polarization :</b>	Vertical		
<b>Remark :</b>	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.								
Frequency ( MHz )	EIRP ( dBm )	Limit ( dBm )	Over Limit ( dB )	SPA Reading ( dBm )	S.G. Power ( dBm )	TX Cable loss ( dB )	TX Antenna Gain ( dBi )	Polarization ( H/V )	Result
3760	-57.33	-13	-44.33	-77.63	-63.96	1.69	8.31	V	Pass
5640	-49.96	-13	-36.96	-75.04	-57.01	2.71	9.76	V	Pass
7520	-50.86	-13	-37.86	-79.2	-60.25	2.42	11.81	V	Pass



<High Channel>

<b>Band :</b>	GSM1900		<b>Temperature :</b>	23~24°C					
<b>Test Mode :</b>	EDGE class 8 Link (8PSK)		<b>Relative Humidity :</b>	46~48%					
<b>Test Engineer :</b>	Nick Yu and Derreck Chen and Ken Wu		<b>Polarization :</b>	Horizontal					
<b>Remark :</b>	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.								
Frequency ( MHz )	EIRP ( dBm )	Limit ( dBm )	Over Limit ( dB )	SPA Reading ( dBm )	S.G. Power ( dBm )	TX Cable loss ( dB )	TX Antenna Gain ( dBi )	Polarization ( H/V )	Result
3819	-56.57	-13	-43.57	-77.18	-63.25	1.70	8.38	H	Pass
5729	-54.46	-13	-41.46	-78.8	-61.49	2.76	9.79	H	Pass
7639	-51.67	-13	-38.67	-78.89	-61.17	2.38	11.88	H	Pass

<b>Band :</b>	GSM1900		<b>Temperature :</b>	23~24°C					
<b>Test Mode :</b>	EDGE class 8 Link (8PSK)		<b>Relative Humidity :</b>	46~48%					
<b>Test Engineer :</b>	Nick Yu and Derreck Chen and Ken Wu		<b>Polarization :</b>	Vertical					
<b>Remark :</b>	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.								
Frequency ( MHz )	EIRP ( dBm )	Limit ( dBm )	Over Limit ( dB )	SPA Reading ( dBm )	S.G. Power ( dBm )	TX Cable loss ( dB )	TX Antenna Gain ( dBi )	Polarization ( H/V )	Result
3819	-59.21	-13	-46.21	-77.36	-65.89	1.70	8.38	V	Pass
5729	-53.69	-13	-40.69	-78.82	-60.72	2.76	9.79	V	Pass
7639	-50.13	-13	-37.13	-79.07	-59.63	2.38	11.88	V	Pass



<Low Channel>

<b>Band :</b>	WCDMA Band V				<b>Temperature :</b>	23~24°C			
<b>Test Mode :</b>	RMC 12.2Kbps Link (QPSK)				<b>Relative Humidity :</b>	46~48%			
<b>Test Engineer :</b>	Nick Yu and Derreck Chen and Ken Wu				<b>Polarization :</b>	Horizontal			
<b>Remark :</b>	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.								
Frequency ( MHz )	ERP ( dBm )	Limit ( dBm )	Over Limit ( dB )	SPA Reading ( dBm )	S.G. Power ( dBm )	TX Cable loss ( dB )	TX Antenna Gain ( dBi )	Polarization ( H/V )	Result
1656	-63.62	-13	-50.62	-74.29	-65.35	0.98	4.86	H	Pass
2480	-59.67	-13	-46.67	-75.59	-61.58	1.28	5.34	H	Pass
3304	-59.40	-13	-46.40	-76.39	-62.84	1.54	7.14	H	Pass

<b>Band :</b>	WCDMA Band V				<b>Temperature :</b>	23~24°C			
<b>Test Mode :</b>	RMC 12.2Kbps Link (QPSK)				<b>Relative Humidity :</b>	46~48%			
<b>Test Engineer :</b>	Nick Yu and Derreck Chen and Ken Wu				<b>Polarization :</b>	Vertical			
<b>Remark :</b>	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.								
Frequency ( MHz )	ERP ( dBm )	Limit ( dBm )	Over Limit ( dB )	SPA Reading ( dBm )	S.G. Power ( dBm )	TX Cable loss ( dB )	TX Antenna Gain ( dBi )	Polarization ( H/V )	Result
1656	-63.00	-13	-50.00	-74.64	-64.73	0.98	4.86	V	Pass
2480	-58.05	-13	-45.05	-75.59	-59.96	1.28	5.34	V	Pass
3304	-58.03	-13	-45.03	-76.58	-61.47	1.54	7.14	V	Pass



<Middle Channel>

<b>Band :</b>	WCDMA Band V					<b>Temperature :</b>	23~24°C		
<b>Test Mode :</b>	RMC 12.2Kbps Link (QPSK)					<b>Relative Humidity :</b>	46~48%		
<b>Test Engineer :</b>	Nick Yu and Derreck Chen and Ken Wu					<b>Polarization :</b>	Horizontal		
<b>Remark :</b>	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.								
Frequency ( MHz )	ERP ( dBm )	Limit ( dBm )	Over Limit ( dB )	SPA Reading ( dBm )	S.G. Power ( dBm )	TX Cable loss ( dB )	TX Antenna Gain ( dBi )	Polarization ( H/V )	Result
1672	-64.03	-13	-51.03	-75.01	-65.71	0.99	4.82	H	Pass
2512	-59.50	-13	-46.50	-76.17	-61.47	1.29	5.41	H	Pass
3344	-59.45	-13	-46.45	-76.67	-63.06	1.56	7.31	H	Pass

<b>Band :</b>	WCDMA Band V					<b>Temperature :</b>	23~24°C		
<b>Test Mode :</b>	RMC 12.2Kbps Link (QPSK)					<b>Relative Humidity :</b>	46~48%		
<b>Test Engineer :</b>	Nick Yu and Derreck Chen and Ken Wu					<b>Polarization :</b>	Vertical		
<b>Remark :</b>	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.								
Frequency ( MHz )	ERP ( dBm )	Limit ( dBm )	Over Limit ( dB )	SPA Reading ( dBm )	S.G. Power ( dBm )	TX Cable loss ( dB )	TX Antenna Gain ( dBi )	Polarization ( H/V )	Result
1672	-63.51	-13	-50.51	-75.23	-65.19	0.99	4.82	V	Pass
2512	-58.15	-13	-45.15	-75.84	-60.12	1.29	5.41	V	Pass
3344	-58.28	-13	-45.28	-76.71	-61.89	1.56	7.31	V	Pass



<High Channel>

<b>Band :</b>	WCDMA Band V					<b>Temperature :</b>	23~24°C		
<b>Test Mode :</b>	RMC 12.2Kbps Link (QPSK)					<b>Relative Humidity :</b>	46~48%		
<b>Test Engineer :</b>	Nick Yu and Derreck Chen and Ken Wu					<b>Polarization :</b>	Horizontal		
<b>Remark :</b>	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.								
Frequency ( MHz )	ERP ( dBm )	Limit ( dBm )	Over Limit ( dB )	SPA Reading ( dBm )	S.G. Power ( dBm )	TX Cable loss ( dB )	TX Antenna Gain ( dBi )	Polarization ( H/V )	Result
1693	-63.25	-13	-50.25	-74.65	-64.86	1.00	4.76	H	Pass
2539	-58.96	-13	-45.96	-75.65	-60.94	1.30	5.43	H	Pass
3386	-59.08	-13	-46.08	-76.6	-62.86	1.57	7.50	H	Pass

<b>Band :</b>	WCDMA Band V					<b>Temperature :</b>	23~24°C		
<b>Test Mode :</b>	RMC 12.2Kbps Link (QPSK)					<b>Relative Humidity :</b>	46~48%		
<b>Test Engineer :</b>	Nick Yu and Derreck Chen and Ken Wu					<b>Polarization :</b>	Vertical		
<b>Remark :</b>	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.								
Frequency ( MHz )	ERP ( dBm )	Limit ( dBm )	Over Limit ( dB )	SPA Reading ( dBm )	S.G. Power ( dBm )	TX Cable loss ( dB )	TX Antenna Gain ( dBi )	Polarization ( H/V )	Result
1693	-62.66	-13	-49.66	-74.78	-64.27	1.00	4.76	V	Pass
2539	-58.23	-13	-45.23	-75.99	-60.21	1.30	5.43	V	Pass
3386	-58.20	-13	-45.20	-76.7	-61.98	1.57	7.50	V	Pass



<Low Channel>

<b>Band :</b>	WCDMA Band IV					<b>Temperature :</b>	23~24°C		
<b>Test Mode :</b>	RMC 12.2Kbps Link (QPSK)					<b>Relative Humidity :</b>	46~48%		
<b>Test Engineer :</b>	Nick Yu and Derreck Chen and Ken Wu					<b>Polarization :</b>	Horizontal		
<b>Remark :</b>	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.								
Frequency ( MHz )	EIRP ( dBm )	Limit ( dBm )	Over Limit ( dB )	SPA Reading ( dBm )	S.G. Power ( dBm )	TX Cable loss ( dB )	TX Antenna Gain ( dBi )	Polarization ( H/V )	Result
3424.8	-59.49	-13	-46.49	-76.77	-65.58	1.58	7.67	H	Pass
5137.2	-55.74	-13	-42.74	-78.71	-63.02	2.42	9.70	H	Pass
6849.6	-52.14	-13	-39.14	-78.59	-60.12	2.64	10.62	H	Pass

<b>Band :</b>	WCDMA Band IV					<b>Temperature :</b>	23~24°C		
<b>Test Mode :</b>	RMC 12.2Kbps Link (QPSK)					<b>Relative Humidity :</b>	46~48%		
<b>Test Engineer :</b>	Nick Yu and Derreck Chen and Ken Wu					<b>Polarization :</b>	Vertical		
<b>Remark :</b>	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.								
Frequency ( MHz )	EIRP ( dBm )	Limit ( dBm )	Over Limit ( dB )	SPA Reading ( dBm )	S.G. Power ( dBm )	TX Cable loss ( dB )	TX Antenna Gain ( dBi )	Polarization ( H/V )	Result
3424.8	-58.43	-13	-45.43	-76.91	-64.52	1.58	7.67	V	Pass
5137.2	-54.11	-13	-41.11	-78.46	-61.39	2.42	9.70	V	Pass
6849.6	-51.65	-13	-38.65	-78.7	-59.63	2.64	10.62	V	Pass



<Middle Channel>

<b>Band :</b>	WCDMA Band IV					<b>Temperature :</b>	23~24°C		
<b>Test Mode :</b>	RMC 12.2Kbps Link (QPSK)					<b>Relative Humidity :</b>	46~48%		
<b>Test Engineer :</b>	Nick Yu and Derreck Chen and Ken Wu					<b>Polarization :</b>	Horizontal		
<b>Remark :</b>	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.								
Frequency ( MHz )	EIRP ( dBm )	Limit ( dBm )	Over Limit ( dB )	SPA Reading ( dBm )	S.G. Power ( dBm )	TX Cable loss ( dB )	TX Antenna Gain ( dBi )	Polarization ( H/V )	Result
3462	-59.34	-13	-46.34	-76.6	-65.58	1.59	7.83	H	Pass
5196	-54.61	-13	-41.61	-78.07	-61.86	2.45	9.70	H	Pass
6928	-52.92	-13	-39.92	-78.85	-61.02	2.61	10.71	H	Pass

<b>Band :</b>	WCDMA Band IV					<b>Temperature :</b>	23~24°C		
<b>Test Mode :</b>	RMC 12.2Kbps Link (QPSK)					<b>Relative Humidity :</b>	46~48%		
<b>Test Engineer :</b>	Nick Yu and Derreck Chen and Ken Wu					<b>Polarization :</b>	Vertical		
<b>Remark :</b>	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.								
Frequency ( MHz )	EIRP ( dBm )	Limit ( dBm )	Over Limit ( dB )	SPA Reading ( dBm )	S.G. Power ( dBm )	TX Cable loss ( dB )	TX Antenna Gain ( dBi )	Polarization ( H/V )	Result
3462	-58.39	-13	-45.39	-76.77	-64.63	1.59	7.83	V	Pass
5196	-54.49	-13	-41.49	-78.33	-61.74	2.45	9.70	V	Pass
6928	-51.91	-13	-38.91	-78.58	-60.01	2.61	10.71	V	Pass



<High Channel>

<b>Band :</b>	WCDMA Band IV					<b>Temperature :</b>	23~24°C		
<b>Test Mode :</b>	RMC 12.2Kbps Link (QPSK)					<b>Relative Humidity :</b>	46~48%		
<b>Test Engineer :</b>	Nick Yu and Derreck Chen and Ken Wu					<b>Polarization :</b>	Horizontal		
<b>Remark :</b>	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.								
Frequency ( MHz )	EIRP ( dBm )	Limit ( dBm )	Over Limit ( dB )	SPA Reading ( dBm )	S.G. Power ( dBm )	TX Cable loss ( dB )	TX Antenna Gain ( dBi )	Polarization ( H/V )	Result
3504	-59.23	-13	-46.23	-76.64	-65.63	1.61	8.00	H	Pass
5257	-54.65	-13	-41.65	-78.68	-61.86	2.49	9.70	H	Pass
7010	-53.13	-13	-40.13	-78.89	-61.36	2.59	10.82	H	Pass

<b>Band :</b>	WCDMA Band IV					<b>Temperature :</b>	23~24°C		
<b>Test Mode :</b>	RMC 12.2Kbps Link (QPSK)					<b>Relative Humidity :</b>	46~48%		
<b>Test Engineer :</b>	Nick Yu and Derreck Chen and Ken Wu					<b>Polarization :</b>	Vertical		
<b>Remark :</b>	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.								
Frequency ( MHz )	EIRP ( dBm )	Limit ( dBm )	Over Limit ( dB )	SPA Reading ( dBm )	S.G. Power ( dBm )	TX Cable loss ( dB )	TX Antenna Gain ( dBi )	Polarization ( H/V )	Result
3504	-58.18	-13	-45.18	-76.97	-64.58	1.61	8.00	V	Pass
5257	-53.92	-13	-40.92	-78.51	-61.13	2.49	9.70	V	Pass
7010	-51.95	-13	-38.95	-78.83	-60.18	2.59	10.82	V	Pass





<Low Channel>

<b>Band :</b>	WCDMA Band II					<b>Temperature :</b>	23~24°C		
<b>Test Mode :</b>	RMC 12.2Kbps Link (QPSK)					<b>Relative Humidity :</b>	46~48%		
<b>Test Engineer :</b>	Nick Yu and Derreck Chen and Ken Wu					<b>Polarization :</b>	Horizontal		
<b>Remark :</b>	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.								
Frequency ( MHz )	EIRP ( dBm )	Limit ( dBm )	Over Limit ( dB )	SPA Reading ( dBm )	S.G. Power ( dBm )	TX Cable loss ( dB )	TX Antenna Gain ( dBi )	Polarization ( H/V )	Result
3707	-58.70	-13	-45.70	-77.69	-65.28	1.67	8.25	H	Pass
5557	-55.68	-13	-42.68	-78.59	-62.74	2.66	9.72	H	Pass
7409	-53.39	-13	-40.39	-79.48	-62.55	2.46	11.62	H	Pass

<b>Band :</b>	WCDMA Band II					<b>Temperature :</b>	23~24°C		
<b>Test Mode :</b>	RMC 12.2Kbps Link (QPSK)					<b>Relative Humidity :</b>	46~48%		
<b>Test Engineer :</b>	Nick Yu and Derreck Chen and Ken Wu					<b>Polarization :</b>	Vertical		
<b>Remark :</b>	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.								
Frequency ( MHz )	EIRP ( dBm )	Limit ( dBm )	Over Limit ( dB )	SPA Reading ( dBm )	S.G. Power ( dBm )	TX Cable loss ( dB )	TX Antenna Gain ( dBi )	Polarization ( H/V )	Result
3707	-57.93	-13	-44.93	-77.77	-64.51	1.67	8.25	V	Pass
5557	-52.63	-13	-39.63	-77.62	-59.69	2.66	9.72	V	Pass
7409	-51.31	-13	-38.31	-79.01	-60.47	2.46	11.62	V	Pass



<Middle Channel>

<b>Band :</b>	WCDMA Band II		<b>Temperature :</b>	23~24°C					
<b>Test Mode :</b>	RMC 12.2Kbps Link (QPSK)		<b>Relative Humidity :</b>	46~48%					
<b>Test Engineer :</b>	Nick Yu and Derreck Chen and Ken Wu		<b>Polarization :</b>	Horizontal					
<b>Remark :</b>	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.								
Frequency ( MHz )	EIRP ( dBm )	Limit ( dBm )	Over Limit ( dB )	SPA Reading ( dBm )	S.G. Power ( dBm )	TX Cable loss ( dB )	TX Antenna Gain ( dBi )	Polarization ( H/V )	Result
3760	-58.15	-13	-45.15	-77.62	-64.78	1.69	8.31	H	Pass
5640	-54.53	-13	-41.53	-78.77	-61.58	2.71	9.76	H	Pass
7520	-53.00	-13	-40.00	-79.29	-62.39	2.42	11.81	H	Pass

<b>Band :</b>	WCDMA Band II		<b>Temperature :</b>	23~24°C					
<b>Test Mode :</b>	RMC 12.2Kbps Link (QPSK)		<b>Relative Humidity :</b>	46~48%					
<b>Test Engineer :</b>	Nick Yu and Derreck Chen and Ken Wu		<b>Polarization :</b>	Vertical					
<b>Remark :</b>	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.								
Frequency ( MHz )	EIRP ( dBm )	Limit ( dBm )	Over Limit ( dB )	SPA Reading ( dBm )	S.G. Power ( dBm )	TX Cable loss ( dB )	TX Antenna Gain ( dBi )	Polarization ( H/V )	Result
3760	-57.21	-13	-44.21	-77.55	-63.84	1.69	8.31	V	Pass
5640	-52.13	-13	-39.13	-77.16	-59.18	2.71	9.76	V	Pass
7520	-51.24	-13	-38.24	-79.36	-60.63	2.42	11.81	V	Pass



<High Channel>

<b>Band :</b>	WCDMA Band II	<b>Temperature :</b>	23~24°C						
<b>Test Mode :</b>	RMC 12.2Kbps Link (QPSK)	<b>Relative Humidity :</b>	46~48%						
<b>Test Engineer :</b>	Nick Yu and Derreck Chen and Ken Wu	<b>Polarization :</b>	Horizontal						
<b>Remark :</b>	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.								
Frequency ( MHz )	EIRP ( dBm )	Limit ( dBm )	Over Limit ( dB )	SPA Reading ( dBm )	S.G. Power ( dBm )	TX Cable loss ( dB )	TX Antenna Gain ( dBi )	Polarization ( H/V )	Result
3812	-56.47	-13	-43.47	-77.11	-63.14	1.70	8.37	H	Pass
5722	-53.40	-13	-40.40	-77.91	-60.44	2.75	9.79	H	Pass
7630	-51.93	-13	-38.93	-79.32	-61.42	2.39	11.88	H	Pass

<b>Band :</b>	WCDMA Band II	<b>Temperature :</b>	23~24°C						
<b>Test Mode :</b>	RMC 12.2Kbps Link (QPSK)	<b>Relative Humidity :</b>	46~48%						
<b>Test Engineer :</b>	Nick Yu and Derreck Chen and Ken Wu	<b>Polarization :</b>	Vertical						
<b>Remark :</b>	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.								
Frequency ( MHz )	EIRP ( dBm )	Limit ( dBm )	Over Limit ( dB )	SPA Reading ( dBm )	S.G. Power ( dBm )	TX Cable loss ( dB )	TX Antenna Gain ( dBi )	Polarization ( H/V )	Result
3812	-56.34	-13	-43.34	-77.36	-63.01	1.70	8.37	V	Pass
5722	-53.20	-13	-40.20	-78.35	-60.24	2.75	9.79	V	Pass
7630	-50.14	-13	-37.14	-79.23	-59.63	2.39	11.88	V	Pass



## 3.7 Frequency Stability Measurement

### 3.7.1 Description of Frequency Stability Measurement

The frequency stability shall be measured by variation of ambient temperature and variation of primary supply voltage to ensure that the fundamental emission stays within the authorized frequency block. The frequency stability of the transmitter shall be maintained within  $\pm 0.00025\%$  ( $\pm 2.5\text{ppm}$ ) of the center frequency.

### 3.7.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.


### 3.7.3 Test Procedures for Temperature Variation

1. The testing follows FCC KDB 971168 v02r02 Section 9.0.
2. The EUT was set up in the thermal chamber and connected with the system simulator.
3. With power OFF, the temperature was decreased to  $-30^{\circ}\text{C}$  and the EUT was stabilized before testing. Power was applied and the maximum change in frequency was recorded within one minute.
4. With power OFF, the temperature was raised in  $10^{\circ}\text{C}$  steps up to  $50^{\circ}\text{C}$ . The EUT was stabilized at each step for at least half an hour. Power was applied and the maximum frequency change was recorded within one minute.

### 3.7.4 Test Procedures for Voltage Variation

1. The testing follows FCC KDB 971168 v02r02 Section 9.0.
2. The EUT was placed in a temperature chamber at  $25\pm 5^{\circ}\text{C}$  and connected with the system simulator.
3. The power supply voltage to the EUT was varied from BEP to 115% of the nominal value measured at the input to the EUT.
4. The variation in frequency was measured for the worst case.

### 3.7.5 Test Setup

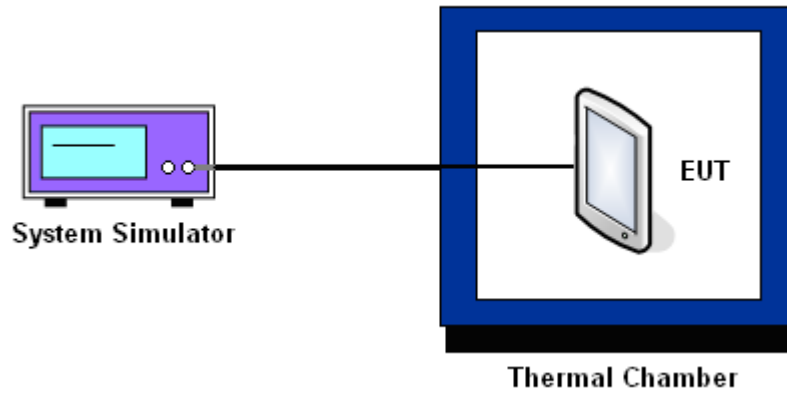



3.7.6 Test Result of Temperature Variation

Band :	GSM 850	Channel :	189
Limit (ppm) :	2.5	Frequency :	836.4 MHz

Temperature (°C)	GPRS class 8	EDGE class 8	Result
	Deviation (ppm)	Deviation (ppm)	
50	0.0024	0.0012	PASS
40	0.0048	0.0060	
30	0.0323	0.0407	
20(Ref.)	0.0000	0.0000	
10	0.0036	0.0048	
0	0.0072	0.0036	
-10	0.0036	0.0143	
-20	0.0371	0.0072	
-30	0.0407	0.0132	

Band :	GSM 1900	Channel :	661
Limit (ppm) :	within authorized band	Frequency :	1880.0 MHz

Temperature (°C)	GPRS class 8	EDGE class 8	Result
	Deviation (ppm)	Deviation (ppm)	
50	0.0074	0.0027	PASS
40	0.0027	0.0027	
30	0.0043	0.0011	
20(Ref.)	0.0000	0.0000	
10	0.0053	0.0011	
0	0.0106	0.0021	
-10	0.0021	0.0016	
-20	0.0032	0.0005	
-30	0.0064	0.0027	

Note: The frequency fundamental emissions stay within the authorized frequency block based on the frequency deviation measured is small.



<b>Band :</b>	WCDMA Band V	<b>Channel :</b>	4182
<b>Limit (ppm) :</b>	2.5	<b>Frequency :</b>	836.4 MHz

Temperature (°C)	RMC 12.2Kbps	Result
	Deviation (ppm)	
50	0.0215	PASS
40	0.0012	
30	0.0024	
20(Ref.)	0.0000	
10	0.0024	
0	0.0179	
-10	0.0012	
-20	0.0024	
-30	0.0024	

<b>Band :</b>	WCDMA Band IV	<b>Channel :</b>	1413
<b>Limit (ppm) :</b>	within authorized band	<b>Frequency :</b>	1732.6 MHz

Temperature (°C)	RMC 12.2Kbps	Result
	Deviation (ppm)	
50	0.0006	PASS
40	0.0012	
30	0.0029	
20(Ref.)	0.0000	
10	0.0006	
0	0.0012	
-10	0.0110	
-20	0.0012	
-30	0.0017	

Note: The frequency fundamental emissions stay within the authorized frequency block based on the frequency deviation measured is small.



<b>Band :</b>	WCDMA Band II	<b>Channel :</b>	9400
<b>Limit (ppm) :</b>	within authorized band	<b>Frequency :</b>	1880.0 MHz

Temperature (°C)	RMC 12.2Kbps	Result
	Deviation (ppm)	
50	0.0000	PASS
40	0.0005	
30	0.0021	
20(Ref.)	0.0000	
10	0.0027	
0	0.0005	
-10	0.0021	
-20	0.0128	
-30	0.0005	

Note: The frequency fundamental emissions stay within the authorized frequency block based on the frequency deviation measured is small.





3.7.7 Test Result of Voltage Variation

Band & Channel	Mode	Voltage (Volt)	Deviation (ppm)	Limit (ppm)	Result
GSM 850 CH189	GPRS class 8	4.35	0.0359	2.5	PASS
		3.8	0.0048		
		BEP	0.0060		
	EDGE class 8	4.35	0.0000		
		3.8	0.0430		
		BEP	0.0407		
GSM 1900 CH661	GPRS class 8	4.35	0.0027	(Note 3.)	
		3.8	0.0059		
		BEP	0.0037		
	EDGE class 8	4.35	0.0027		
		3.8	0.0005		
		BEP	0.0021		
WCDMA Band V CH4182	RMC 12.2Kbps	4.35	0.0024	2.5	
		3.8	0.0167		
		BEP	0.0036		
WCDMA Band IV CH1413	RMC 12.2Kbps	4.35	0.0023	(Note 3.)	
		3.8	0.0006		
		BEP	0.0017		
WCDMA Band II CH9400	RMC 12.2Kbps	4.35	0.0016	(Note 3.)	
		3.8	0.0005		
		BEP	0.0128		

Note:

1. Normal Voltage = 3.8V.
2. Battery End Point (BEP) = 3.5 V.
3. The frequency fundamental emissions stay within the authorized frequency block based on the frequency deviation measured is small.



## 4 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
System Simulator	Rohde & Schwarz	CMU200	117995	N/A	Jul. 29, 2014	Jan. 27, 2015	Jul. 28, 2015	Conducted (TH02-HY)
Spectrum Analyzer	Rohde & Schwarz	FSP40	100055	9kHz~40GHz	Jun. 09, 2014	Jan. 27, 2015	Jun. 08, 2015	Conducted (TH02-HY)
Thermal Chamber	Ten Billion	TTH-D3SP	TBN-930701	N/A	Jul. 17, 2014	Jan. 27, 2015	Jul. 16, 2015	Conducted (TH02-HY)
Spectrum Analyzer	Rohde & Schwarz	FSV30	101749	10Hz ~ 30GHz	Feb. 10, 2014	Jan. 17, 2015	Feb. 09, 2015	Radiation (03CH07-HY)
Bilog Antenna	Schaffner	CBL6111C	2726	30MHz ~ 1GHz	Sep. 27, 2014	Jan. 17, 2015	Sep. 26, 2015	Radiation (03CH07-HY)
Double Ridge Horn Antenna	ESCO	3117	75962	1GHz~18GHz	Aug. 19, 2014	Jan. 17, 2015	Aug. 18, 2015	Radiation (03CH07-HY)
Preamplifier	COM-POWER	PA-103A	161241	10 MHz ~ 1000MHz	Mar. 17, 2014	Jan. 17, 2015	Mar. 16, 2015	Radiation (03CH07-HY)
Preamplifier	Agilent	8449B	3008A02362	1 GHz~26.5 GHz	Oct. 21, 2014	Jan. 17, 2015	Oct. 20, 2015	Radiation (03CH07-HY)
Turn Table	ChainTek	ChainTek 3000	N/A	0 ~ 360 degree	N/A	Jan. 17, 2015	N/A	Radiation (03CH07-HY)
Antenna Mast	ChainTek	M-400-0	114/8000604/L	N/A	N/A	Jan. 17, 2015	N/A	Radiation (03CH07-HY)
SHF-EHF Horn Antenna	SCHWARZBECK	BBHA 9170	BBHA9170251	18GHz~40GHz	Oct. 02, 2014	Jan. 17, 2015	Oct. 01, 2015	Radiation (03CH07-HY)



## 5 Uncertainty of Evaluation

### Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ( $U = 2Uc(y)$ )	4.50
---	------