

Regulatory WLAN Antenna Information

(English Language Required for Intel Regulatory Review / Approval)

**(OEM/ODM or antenna vendor is required to complete this document with platform antenna information.
Remove Intel references and make this your own document)**

Platform	
Platform Owner	Dell
Brand Name	Dell
Model Name	Hanks(FM9)
ODM	Quanta Computer Inc.
Target Launch Date	
Antenna	
Brand Name	<i>Smart Approach Co., Ltd.</i>
Part Number	<input type="checkbox"/> WLAN Main Antenna: PE-11000C(Main)
	<input type="checkbox"/> WLAN AUX Antenna: PE-11000C(Aux)
	<input type="checkbox"/> WLAN MIMO(or Rx3) Antenna: PE-08000C
Module	
With WLAN Module	<input type="checkbox"/> WM3B2200BG
(Check Box)	<input type="checkbox"/> WM3B2915ABG
	<input type="checkbox"/> WM3945ABG
	<input type="checkbox"/> 4965AGN

Antenna Sample / Antenna Data Requirements for worldwide regulatory approval

Section	Description of Required OEM / ODM Antenna Information	US / IC	EU	Japan	Taiwan	S.Korea
1A	Part Number for Antenna only	Required	Required	Required	Required	Required
1B	Antenna Manufacturer Name	Required	Required	Required	Required	Required
1C	Description of Antenna Type	Required	N/A	N/A	N/A	N/A
1D	Part number of Antenna Assembly / cable impedance, length & diameter.	Required	Desired	Desired	Desired	Desired
1E	Tx1, Tx2 & Tx3 antenna (Peak Gain W/ cable loss) *	Required	Required	Required	Required	Required
	1E OR 1F, 1G, 1H					
1F	Tx1, Tx2 & Tx3 antenna (Peak Gain only) *	Required	Required	Required	Required	Required
1G	VSWR of cable including connector	Required	Required	Required	Required	Required
1H	Tx1, Tx2 & Tx3 antenna (Cable loss W/ connector) *	Required	Required	Required	Required	Required
2	Dimensioned Photographs and Drawings of Tx1, Tx2, and Tx3 (or Rx3) antennas	Required	Required	Required	Required	Required
3	Radiation patterns of antennas loaded in the host platform.	Required	Desired	Required	N/A	Required
4	Platform model name / number - correlated to antenna manufacturer and antenna part number	Required	Required	Desired	Required	Desired
5	Photograph(s) or Drawings showing location of antennas in platform. (S. Korea requires photographs of antennas for approval submission). Taiwan requires pictures of each antenna type shown in the system.	Required	Required	Desired	Required (Photos)	Required (Photos)
6	Mech. drawings / photos with dimensions of antenna locations and distance from end-user (For evaluation of SAR testing requirement).	Required	N/A	N/A	N/A	N/A
7	Photograph(s) or Drawings showing the location of all antennas (WLAN, other) and distance between those transmitting antennas. Information will be used to evaluate whether co-location testing is required.	Required	N/A	N/A	N/A	N/A
8	Local representative contact information for LMA/ PARS process.	Required	N/A	N/A	N/A	N/A

NOTE:

(*) if 3rd antenna is Rx only (e.g. receive only for 4965AGN) then peak gain and cable loss not required

Antenna Information

Section 1. Antenna Assembly Specifications

Antenna Assembly Summary:

1A Antenna Part Number	1B Manufacture	1C Antenna Type	1D Cable Assembly Part Number and Information	1E *Peak Gain W/ Cable loss (dBi)	1F Peak Gain w/o Cable Loss (dBi)	1G VSWR	1H Cable Loss (dBi)
Tx1 Antenna Main White PE-11000C (Main)	Example: Smart Approach Co., Ltd.	Example: PIFA (RHoS:Yes), Stamped Metal	Example: 50 ohm Coaxial. length:69.2cm diameter: 1.13mm Connector: IPX (RHoS:Yes)	2400-2500MHz 1.86 dBi (peak)	2400-2500MHz 3.52 dBi (peak)	2400-2500MHz 2.5 max	2400-2500MHz 1.66 dBi (peak)
				2500-2700MHz 1.72 dBi (peak)	2500-2700MHz 3.45 dBi (peak)	2500-2700MHz 2.5 max	2500-2700MHz 1.73 dBi (peak)
				5150-5350MHz -0.63 dBi (peak)	5150-5350MHz 1.93 dBi (peak)	5150-5350MHz 2.5 max	5150-5350MHz 2.56dBi (peak)
				5470-5725MHz -0.93 dBi (peak)	5470-5725MHz 1.70 dBi (peak)	5470-5725MHz 2.5 max	5470-5725MHz 2.63 dBi (peak)
				5725-5850MHz -1.78 dBi (peak)	5725-5850MHz 0.88 dBi (peak)	5725-5850MHz 2.5 max	5725-5850MHz 2.66 dBi (peak)
Tx2 antenna Aux Black PE-11000C (Aux)	Example: Smart Approach Co., Ltd.	Example: PIFA (RHoS:Yes), Stamped Metal	Example: 50 ohm Coaxial. length:76.7cm diameter: 1.13mm Connector: IPX (RHoS:Yes)	2400-2500MHz 1.75 dBi (peak) *	2400-2500MHz 3.59 dBi (peak) *	2400-2500MHz 2.5 max *	2400-2500MHz 1.84 dBi (peak) *
				2500-2700MHz 1.90 dBi (peak) *	2500-2700MHz 3.82 dBi (peak) *	2500-2700MHz 2.5 max *	2500-2700MHz 1.92 dBi (peak) *
				5150-5350MHz 0.09 dBi (peak) *	5150-5350MHz 2.93 dBi (peak) *	5150-5350MHz 2.5 max *	5150-5350MHz 2.84 dBi (peak) *
				5470-5725MHz -0.02 dBi(peak) *	5470-5725MHz 2.89 dBi (peak) *	5470-5725MHz 2.5 max *	5470-5725MHz 2.91 dBi (peak) *
				5725-5850MHz 0.25 dBi (peak) *	5725-5850MHz 3.20 dBi (peak) *	5725-5850MHz 2.5 max *	5725-5850MHz 2.95 dBi (peak) *
Tx3 (or Rx3) antenna Gray MIMO PE-08000C	Example: Smart Approach Co., Ltd.	Example: PIFA (RHoS:Yes), Stamped Metal	Example: 50 ohm Coaxial. length:62.1cm diameter: 1.13mm Connector: IPX (RHoS:Yes)	2400-2500MHz -0.10dBi (peak)	2400-2500MHz 1.7 dBi (peak)	2400-2500MHz 2.5 max	2400-2500MHz 1.80 dBi (peak)
				5150-5350MHz 1.94 dBi (peak)	5150-5350MHz 4.67 dBi (peak)	5150-5350MHz 2.5 max	5150-5350MHz 2.73 dBi (peak)
				5470-5725MHz 1.55 dBi (peak)	5470-5725MHz 4.41 dBi (peak)	5470-5725MHz 2.5 max	5470-5725MHz 2.86 dBi (peak)
				5725-5850MHz 1.85 dBi (peak)	5725-5850MHz 4.77 dBi (peak)	5725-5850MHz 2.5 max	5725-5850MHz 2.92 dBi (peak)

NOTE:

(*) If Rx3 only (3rd antenna receives only, e.g. for 4965AGN) then the information marked with * is not required


Antenna Peak Gain Table:

Frequency (MHz)	Main antenna		AUX Antenna		MIMO Antenna	
	Horizontal (dBi)	Vertical (dBi)	Horizontal (dBi)	Vertical (dBi)	Horizontal (dBi)	Vertical (dBi)
2400	-0.63	-1.09	-1.20	-1.60	-0.12	-1.41
2450	0.23	0.43	1.75	1.40	-0.10	-0.98
2500	1.12	1.72	0.04	0.49	-0.45	-0.50
2600	-1.23	1.66	1.50	1.22		
2700	-1.30	0.71	-0.17	0.09		
5150	-1.98	-0.63	0.09	0.09	1.94	1.94
5350	-1.65	-1.89	0.01	-0.76	0.56	0.77
5470	-0.93	-1.76	-0.02	-1.74	1.19	-0.09
5725	-2.12	-2.87	-1.90	-1.63	1.55	-2.17
5850	-1.78	-2.29	0.25	-0.15	1.85	-1.06

- Antenna Peak Gain required being test in system basis.
- 1E frame contend absolutely peak antenna gain include H/V
- If Rx3 only (3rd antenna receives only, e.g. for 4965AGN) then the information is not required for Rx3.

Section 2. Dimensioned Photos or Drawings of Antennas

Main & AUX Antenna Dimensioned Drawing:

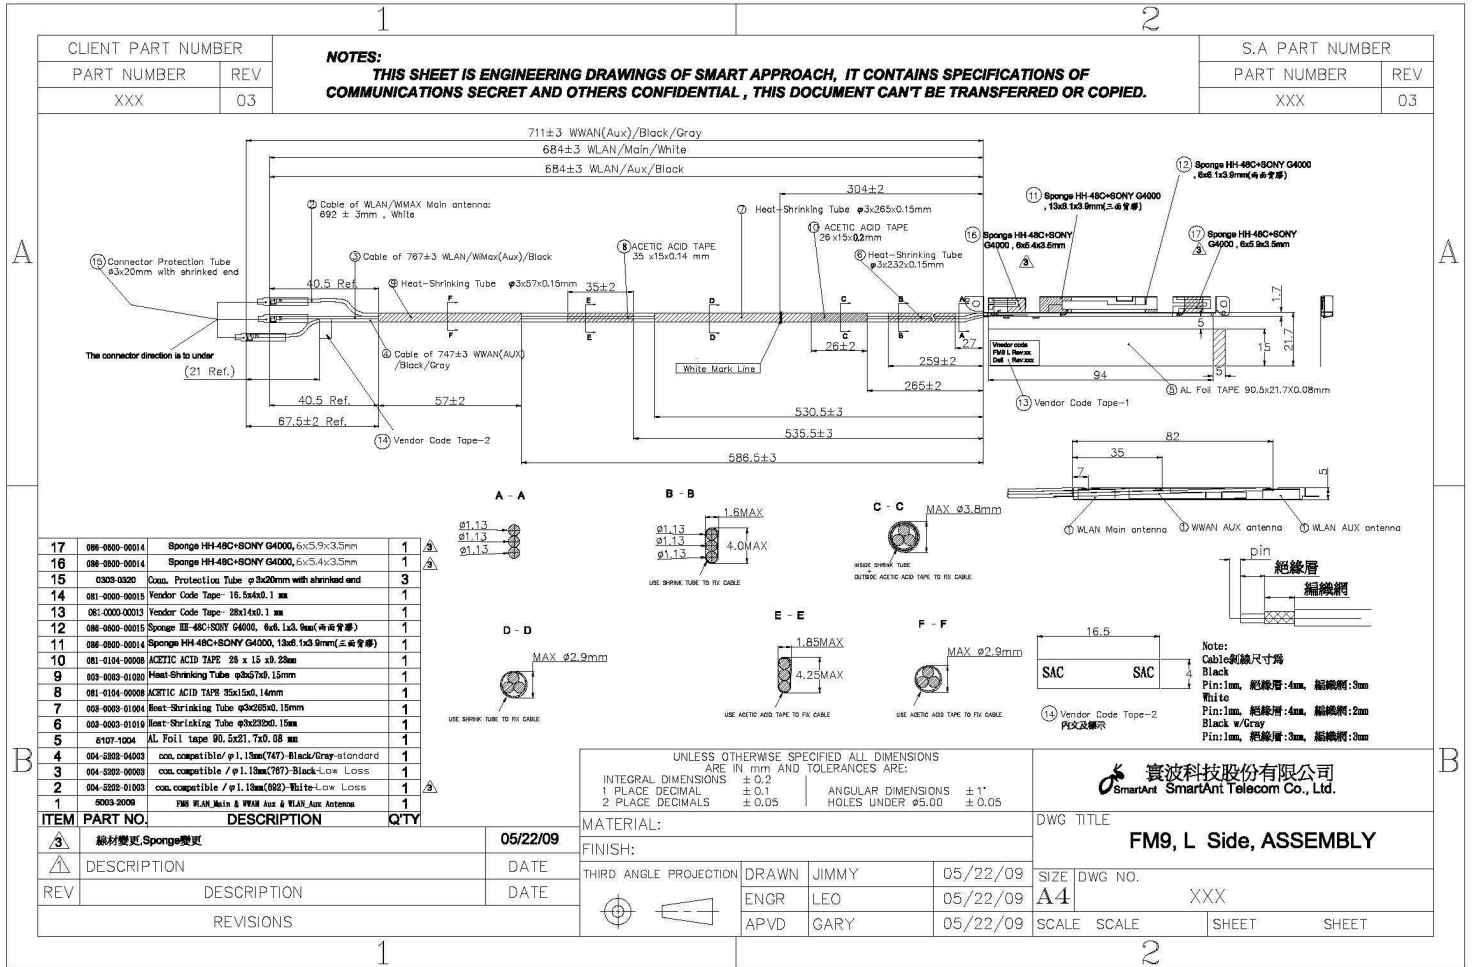


Main & AUX Antenna Photo:

Main Antenna

AUX Antenna



MIMO Antenna Dimensioned Drawing:

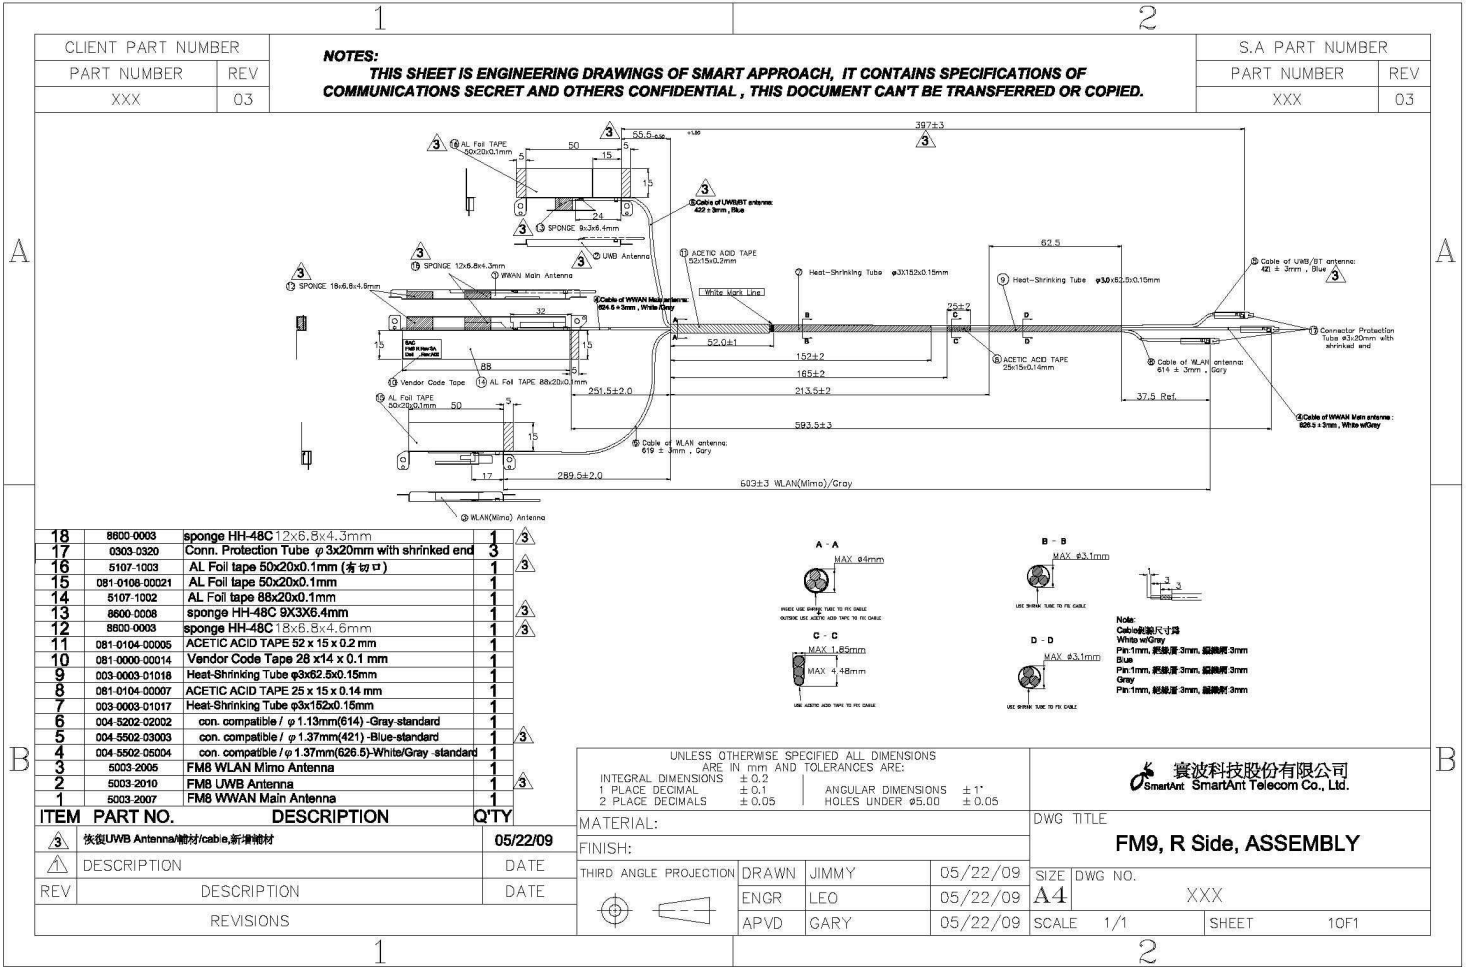


WLAN MIMO Antenna Photo:



Section 3. Radiation characteristics of antennae Loaded in Host Platform


2400-2500MHz radiation characteristic

Main antenna: 2400 MHz

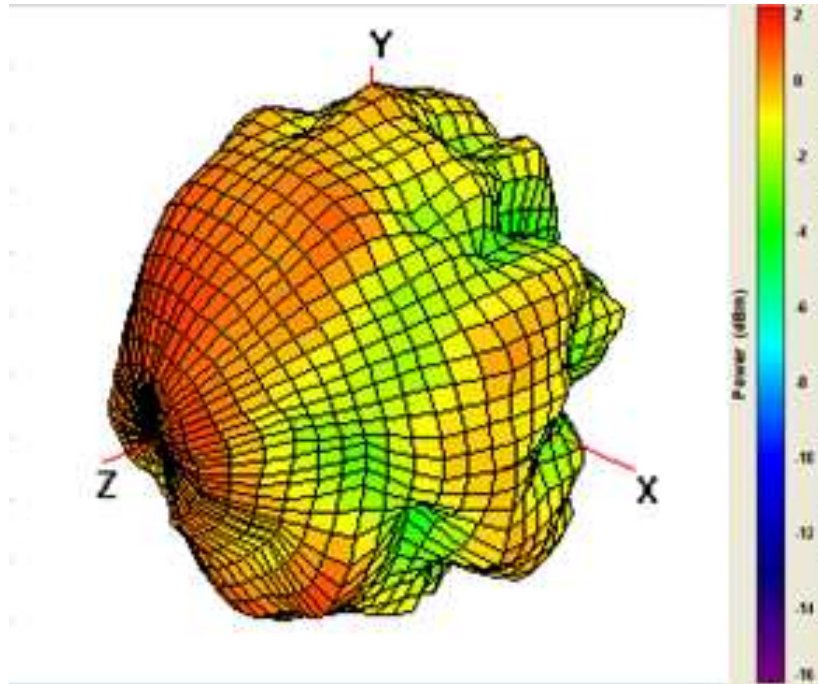


Center Frequency	2400 MHz	Center Frequency	2400 MHz
Horizontal (dBi) peak	-0.63	Horizontal (dBi) average	-8.60
Vertical (dBi) peak	-1.09	Vertical (dBi) average	-7.85
H+V (dBi) peak	-0.38	H+V (dBi) average	-5.20

Main antenna: 2450 MHz

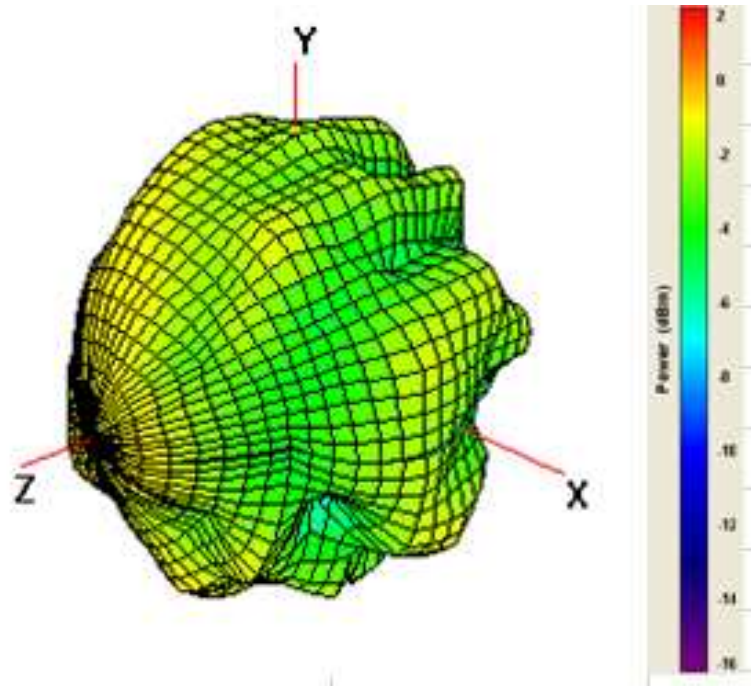


Center Frequency	2450 MHz	Center Frequency	2450 MHz
Horizontal (dBi) peak	0.23	Horizontal (dBi) average	-7.28
Vertical (dBi) peak	0.43	Vertical (dBi) average	-6.17
H+V (dBi) peak	0.62	H+V (dBi) average	-3.68

Main antenna: 2500 MHz

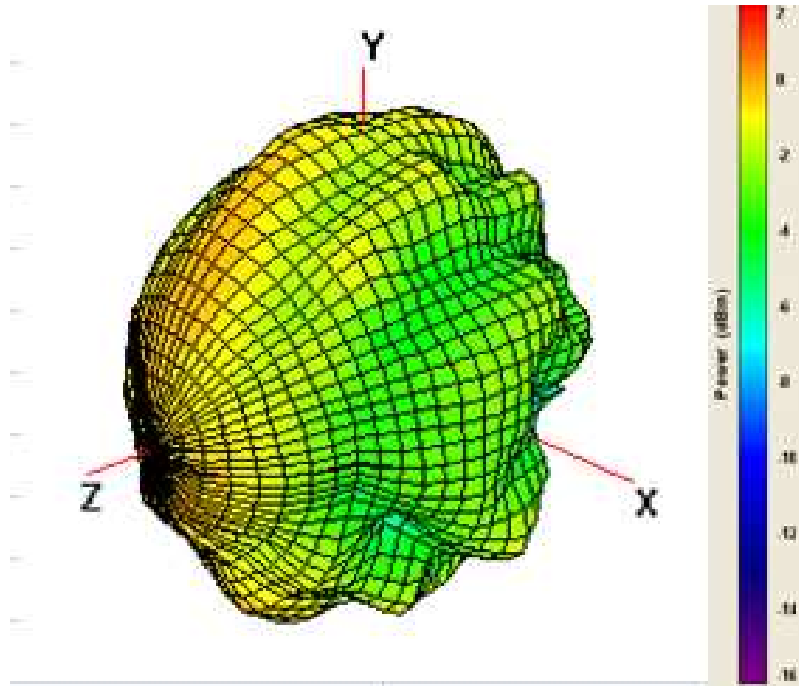


Center Frequency	2500 MHz	Center Frequency	2500 MHz
Horizontal (dBi) peak	1.12	Horizontal (dBi) average	-7.02
Vertical (dBi) peak	1.72	Vertical (dBi) average	-5.39
H+V (dBi) peak	1.82	H+V (dBi) average	-3.12

Aux antenna: 2400 MHz

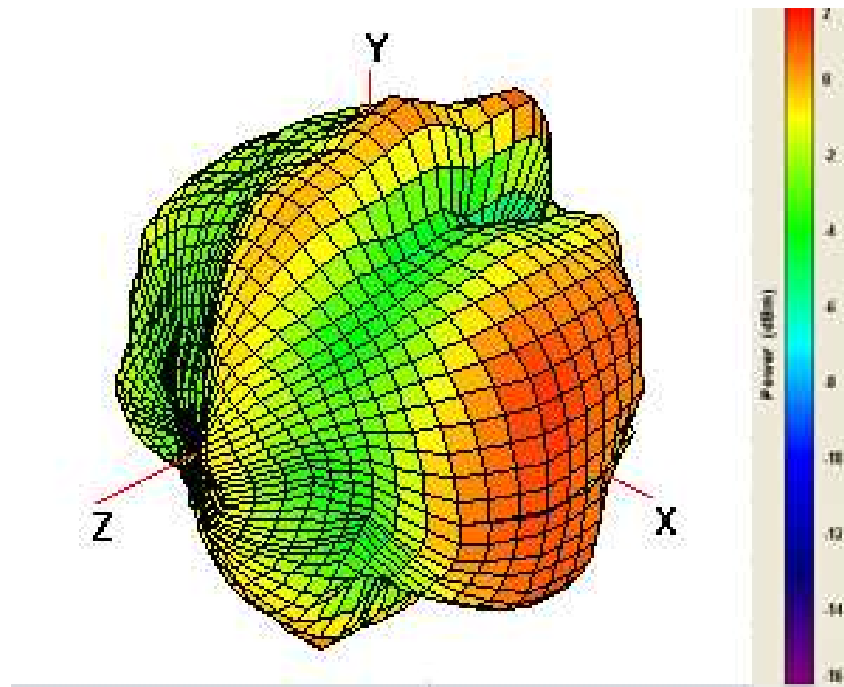


Center Frequency	2400 MHz	Center Frequency	2400 MHz
Horizontal (dBi) peak	-1.20	Horizontal (dBi) average	-8.23
Vertical (dBi) peak	-1.60	Vertical (dBi) average	-8.08
H+V (dBi) peak	-0.66	H+V (dBi) average	-5.15

Aux antenna: 2450 MHz

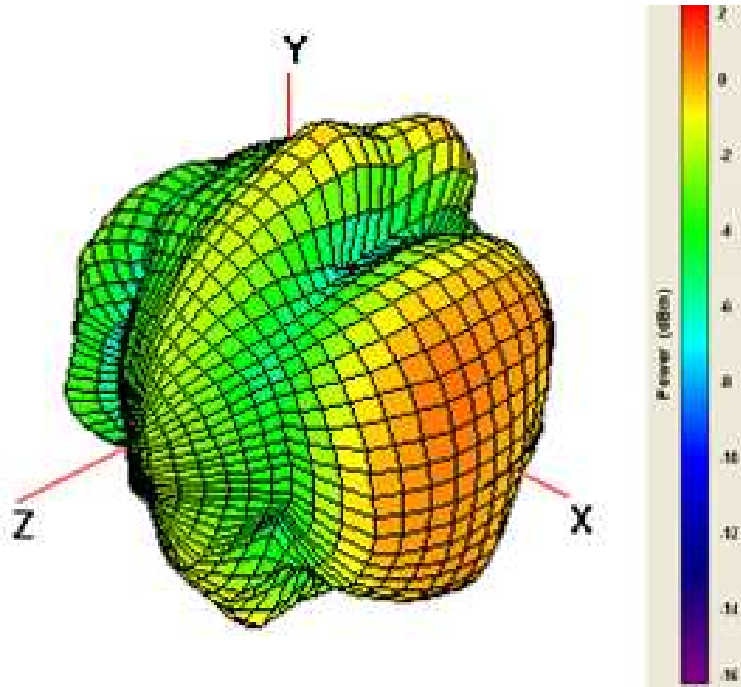


Center Frequency	2450 MHz	Center Frequency	2450 MHz
Horizontal (dBi) peak	1.75	Horizontal (dBi) average	-6.94
Vertical (dBi) peak	1.40	Vertical (dBi) average	-6.93
H+V (dBi) peak	1.98	H+V (dBi) average	-3.92

Aux antenna: 2500 MHz

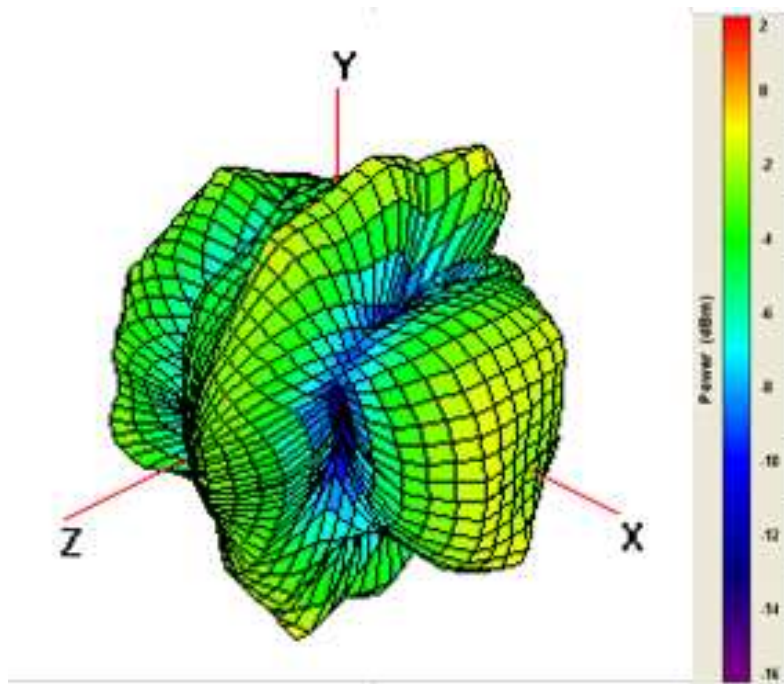


Center Frequency	2500 MHz	Center Frequency	2500 MHz
Horizontal (dBi) peak	0.04	Horizontal (dBi) average	-6.94
Vertical (dBi) peak	0.49	Vertical (dBi) average	-6.46
H+V (dBi) peak	1.54	H+V (dBi) average	-3.68

MIMO antenna: 2400 MHz

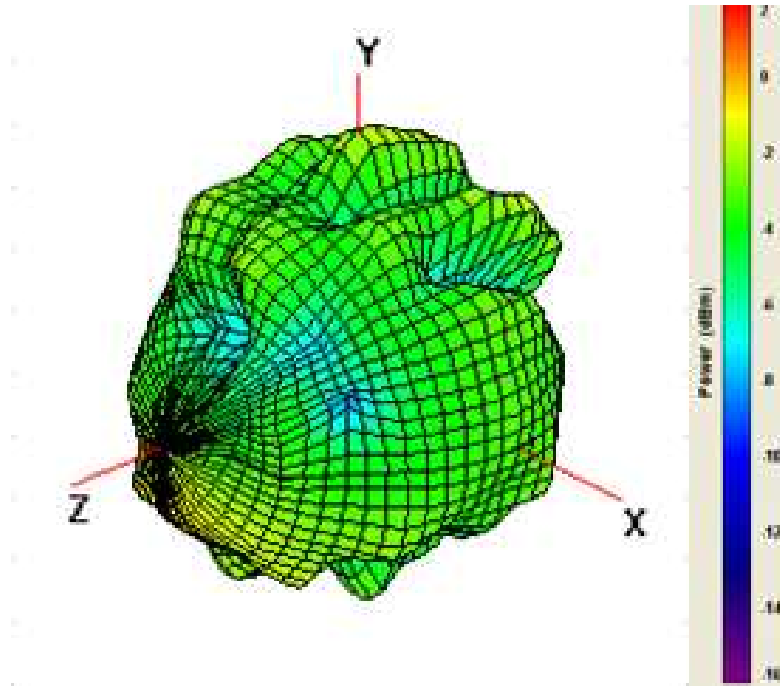


Center Frequency	2400 MHz	Center Frequency	2400 MHz
Horizontal (dBi) peak	-0.12	Horizontal (dBi) average	-7.44
Vertical (dBi) peak	-1.41	Vertical (dBi) average	-9.44
H+V (dBi) peak	0.31	H+V (dBi) average	-5.32

MIMO antenna: 2450 MHz

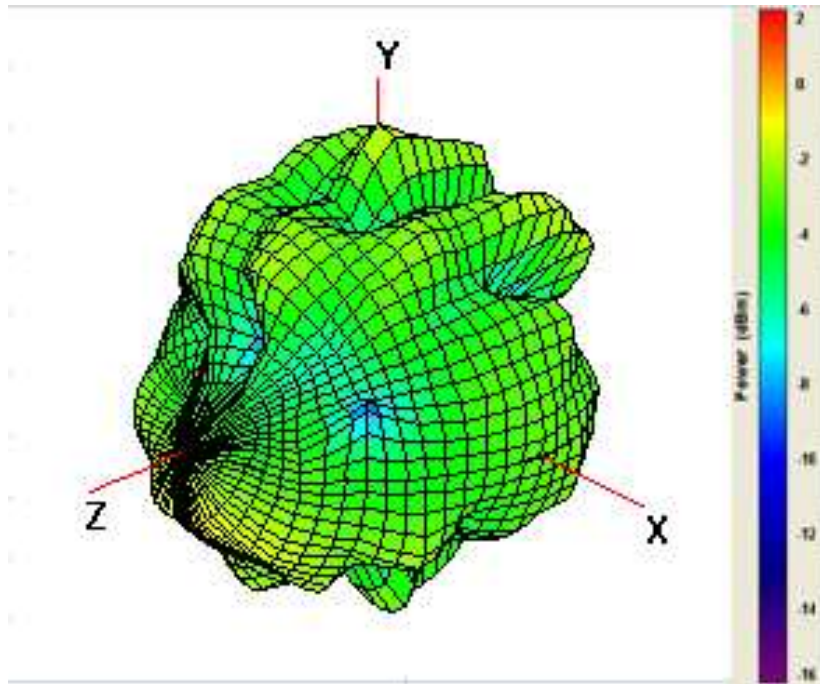

Center Frequency	2450 MHz	Center Frequency	2450 MHz
Horizontal (dBi) peak	-0.10	Horizontal (dBi) average	-7.00
Vertical (dBi) peak	-0.98	Vertical (dBi) average	-9.07
H+V (dBi) peak	-0.48	H+V (dBi) average	-4.90


MIMO antenna: 2500 MHz

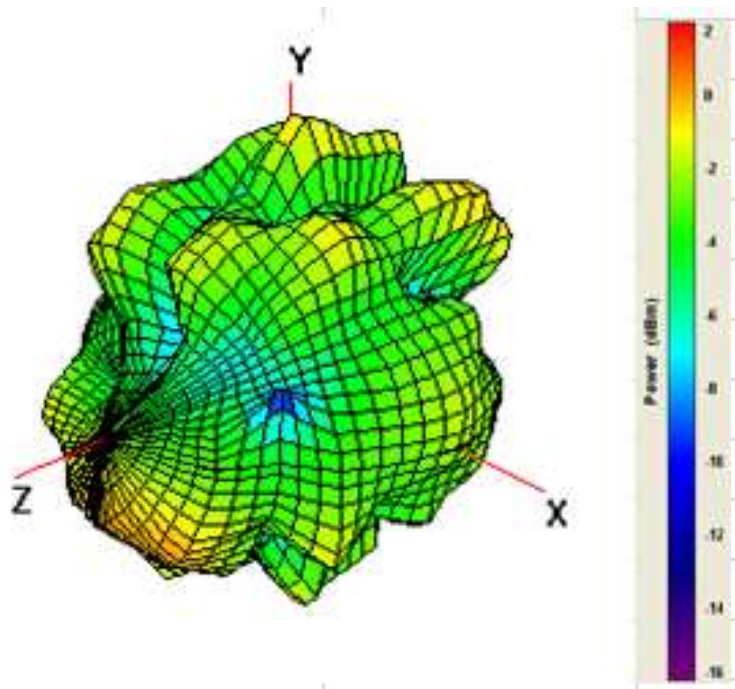

Center Frequency	2500 MHz	Center Frequency	2500 MHz
Horizontal (dBi) peak	-0.45	Horizontal (dBi) average	-7.51
Vertical (dBi) peak	-0.50	Vertical (dBi) average	-9.11
H+V (dBi) peak	0.24	H+V (dBi) average	-5.23


2600-2700MHz radiation characteristic

MAIN antenna: 2600 MHz

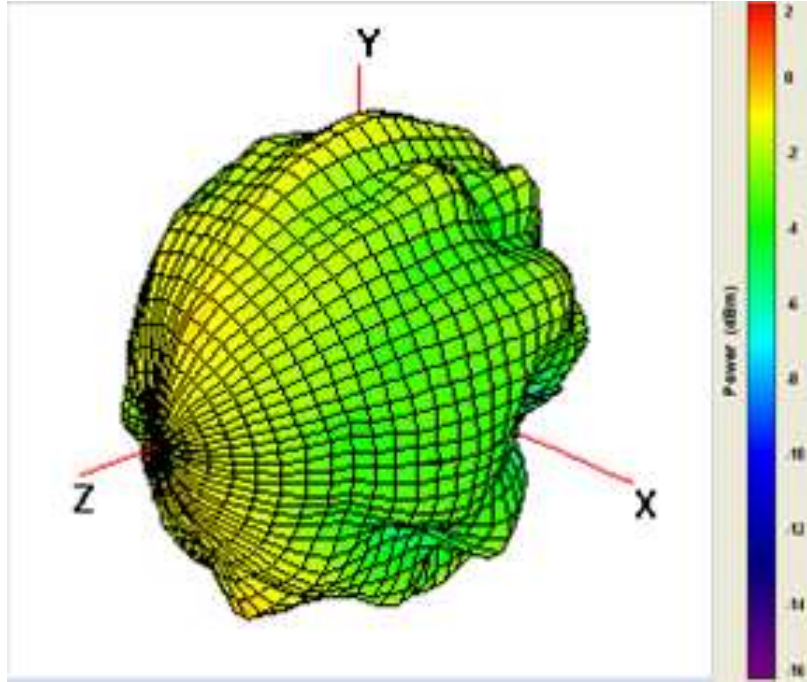


Center Frequency	2600 MHz	Center Frequency	2600 MHz
Horizontal (dBi) peak	-1.23	Horizontal (dBi) average	-8.06
Vertical (dBi) peak	1.66	Vertical (dBi) average	-6.53
H+V (dBi) peak	1.70	H+V (dBi) average	-4.22

MAIN antenna:2700 MHz

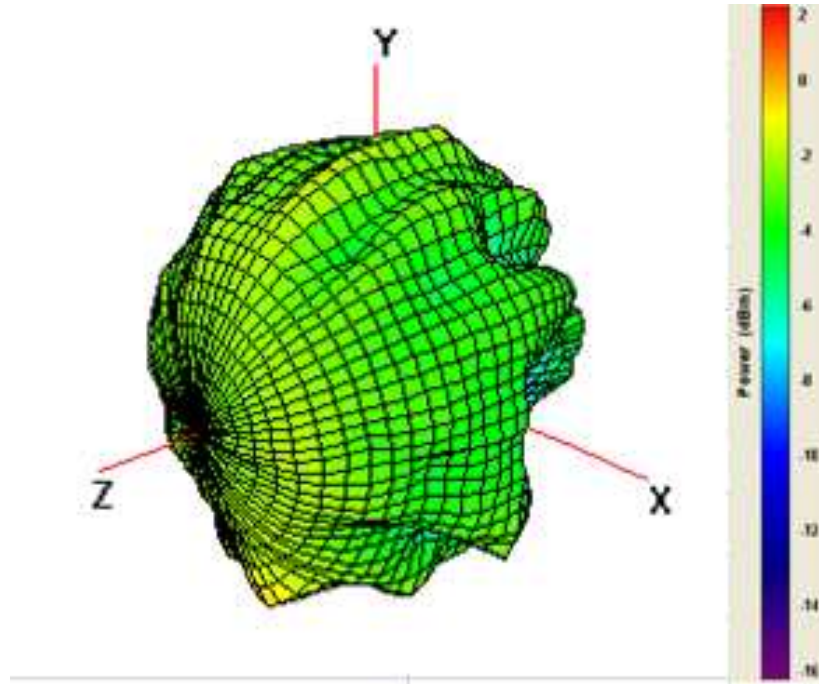


Center Frequency	2700 MHz	Center Frequency	2700 MHz
Horizontal (dBi) peak	-1.30	Horizontal (dBi) average	-7.69
Vertical (dBi) peak	0.71	Vertical (dBi) average	-6.44
H+V (dBi) peak	1.23	H+V (dBi) average	-4.01

AUX antenna: 2600 MHz

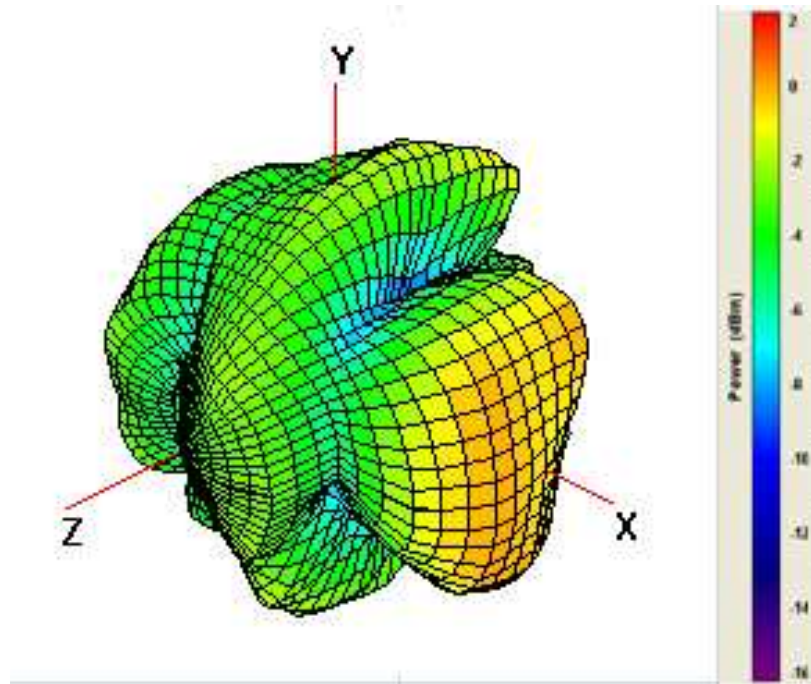

Center Frequency	2600 MHz	Center Frequency	2600 MHz
Horizontal (dBi) peak	1.50	Horizontal (dBi) average	-6.90
Vertical (dBi) peak	1.22	Vertical (dBi) average	-6.99
H+V (dBi) peak	1.90	H+V (dBi) average	-3.94


AUX antenna: 2700 MHz

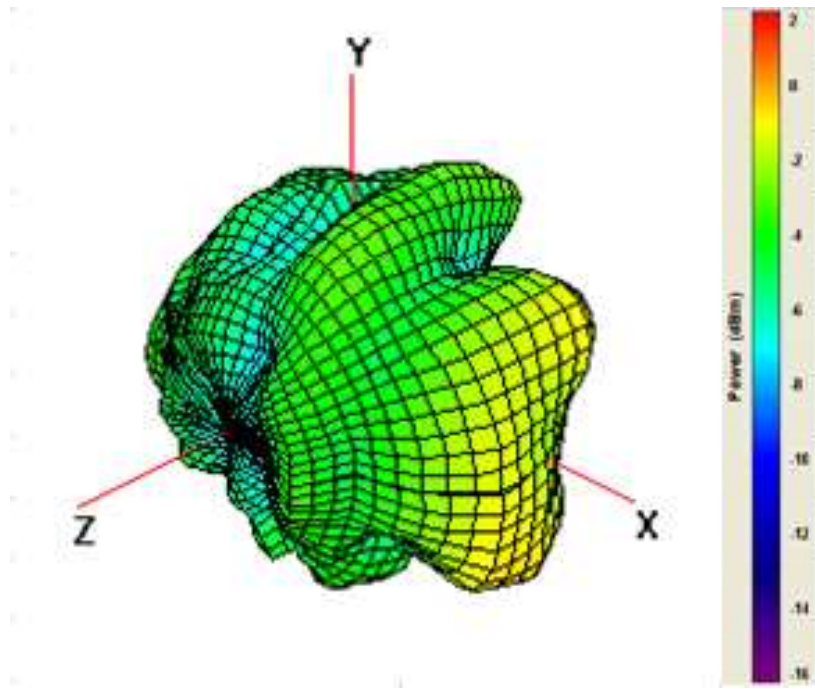

Center Frequency	2700 MHz	Center Frequency	2700 MHz
Horizontal (dBi) peak	0.17	Horizontal (dBi) average	-8.58
Vertical (dBi) peak	0.09	Vertical (dBi) average	-8.50
H+V (dBi) peak	1.34	H+V (dBi) average	-5.53


5150-5850 MHz radiation characteristic

Main antenna: 5150 MHz

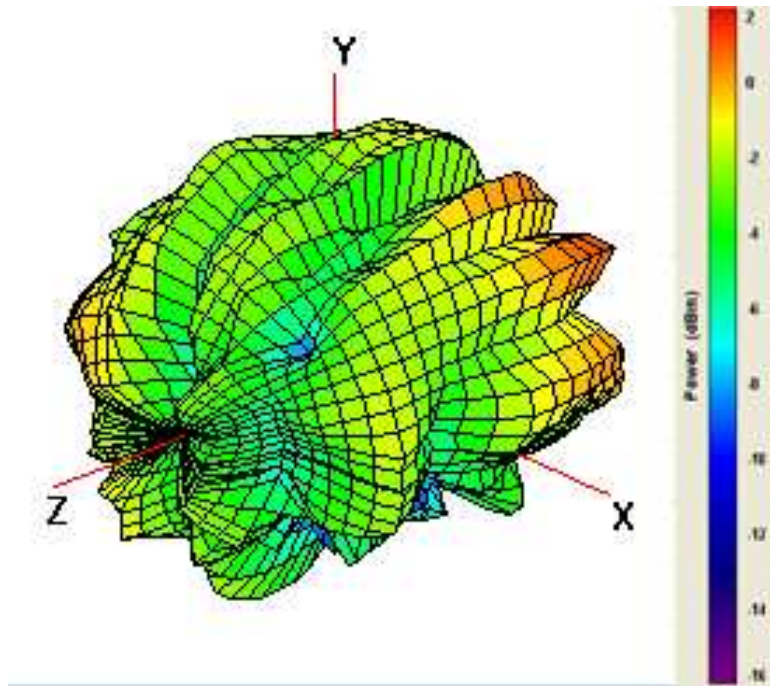


Center Frequency	5150 MHz	Center Frequency	5150 MHz
Horizontal (dBi) peak	-1.98	Horizontal (dBi) average	-9.40
Vertical (dBi) peak	-0.62	Vertical (dBi) average	-8.40
H+V (dBi) peak	-0.36	H+V (dBi) average	-5.86

Main antenna: 5350 MHz

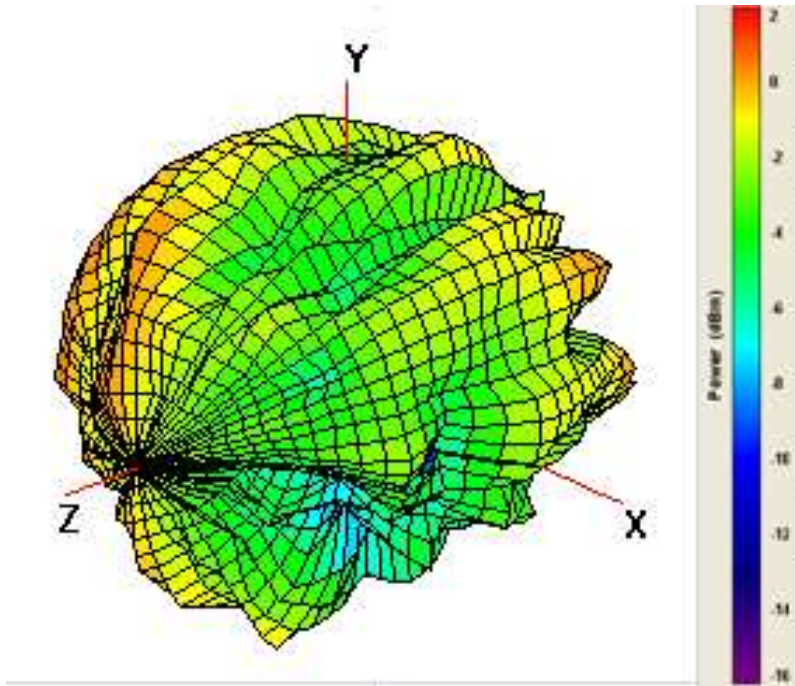


Center Frequency	5350 MHz	Center Frequency	5350 MHz
Horizontal (dBi) peak	-1.65	Horizontal (dBi) average	-8.85
Vertical (dBi) peak	-1.89	Vertical (dBi) average	-8.52
H+V (dBi) peak	-0.53	H+V (dBi) average	-5.67

Main antenna: 5470 MHz

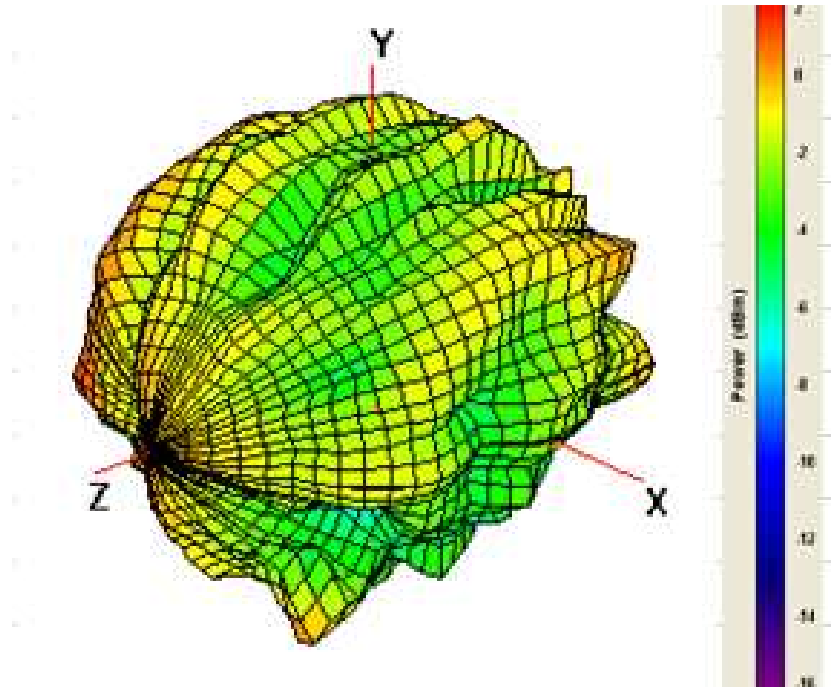


Center Frequency	5470 MHz	Center Frequency	5470 MHz
Horizontal (dBi) peak	-0.93	Horizontal (dBi) average	-8.89
Vertical (dBi) peak	-1.76	Vertical (dBi) average	-9.41
H+V (dBi) peak	-0.30	H+V (dBi) average	-6.13

Main antenna: 5725 MHz

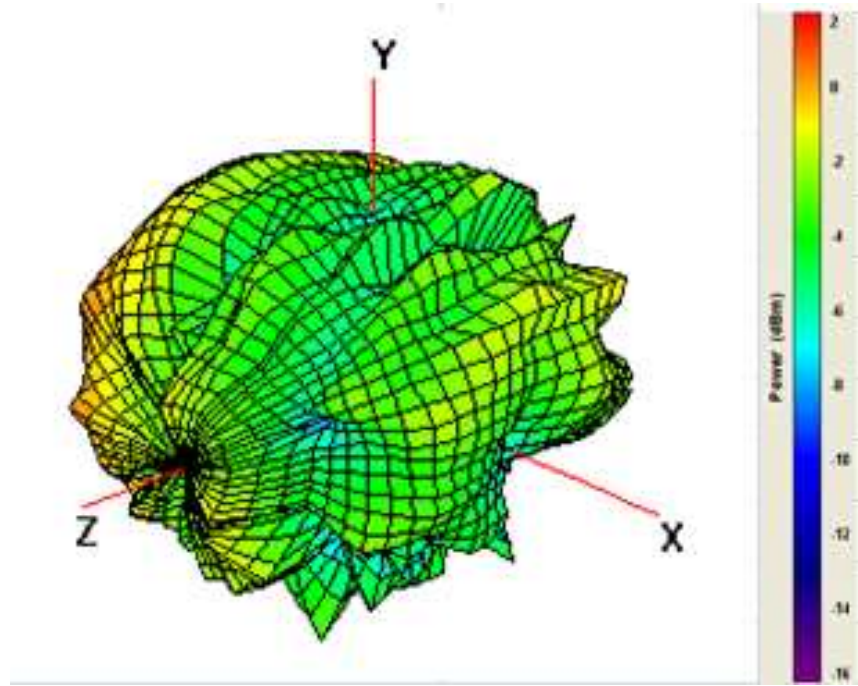


Center Frequency	5725 MHz	Center Frequency	5725 MHz
Horizontal (dBi) peak	-2.12	Horizontal (dBi) average	-10.03
Vertical (dBi) peak	-2.87	Vertical (dBi) average	-10.36
H+V (dBi) peak	-1.54	H+V (dBi) average	-7.18

Main antenna: 5850 MHz

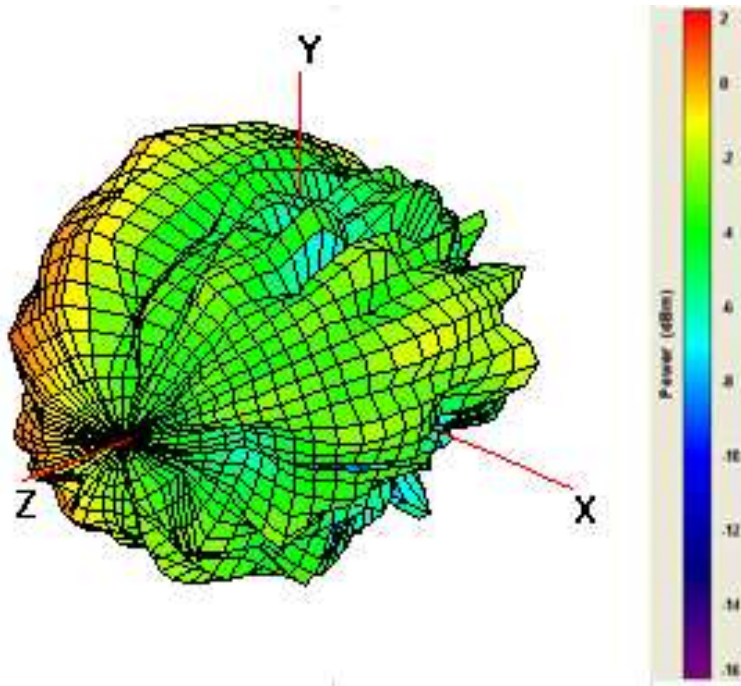


Center Frequency	5850 MHz	Center Frequency	5850 MHz
Horizontal (dBi) peak	-1.78	Horizontal (dBi) average	-9.45
Vertical (dBi) peak	-2.29	Vertical (dBi) average	-10.48
H+V (dBi) peak	-1.07	H+V (dBi) average	-6.92

Aux antenna: 5150 MHz

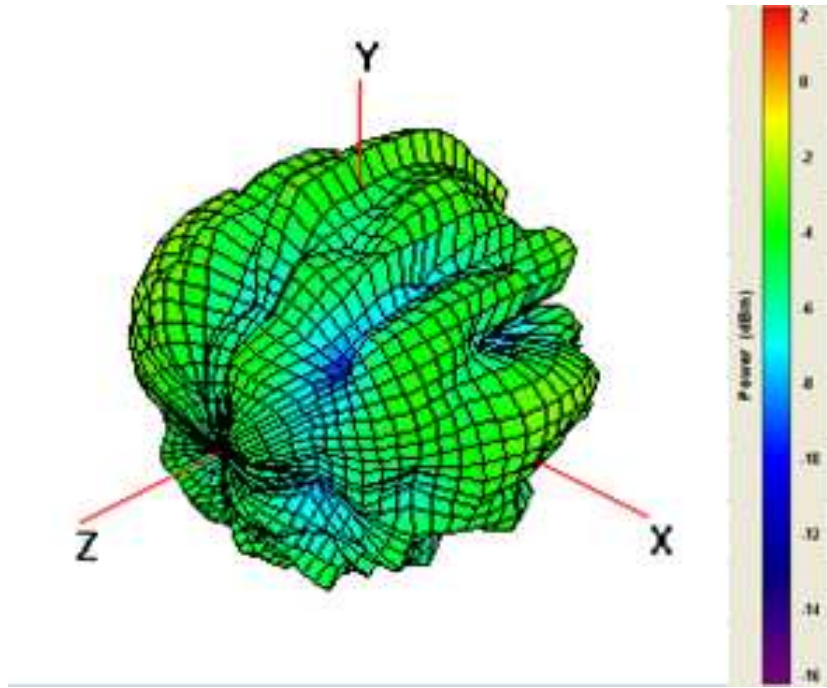


Center Frequency	5150 MHz	Center Frequency	5150 MHz
Horizontal (dBi) peak	0.09	Horizontal (dBi) average	-8.50
Vertical (dBi) peak	0.09	Vertical (dBi) average	-9.43
H+V (dBi) peak	0.13	H+V (dBi) average	-5.92

Aux antenna: 5350 MHz

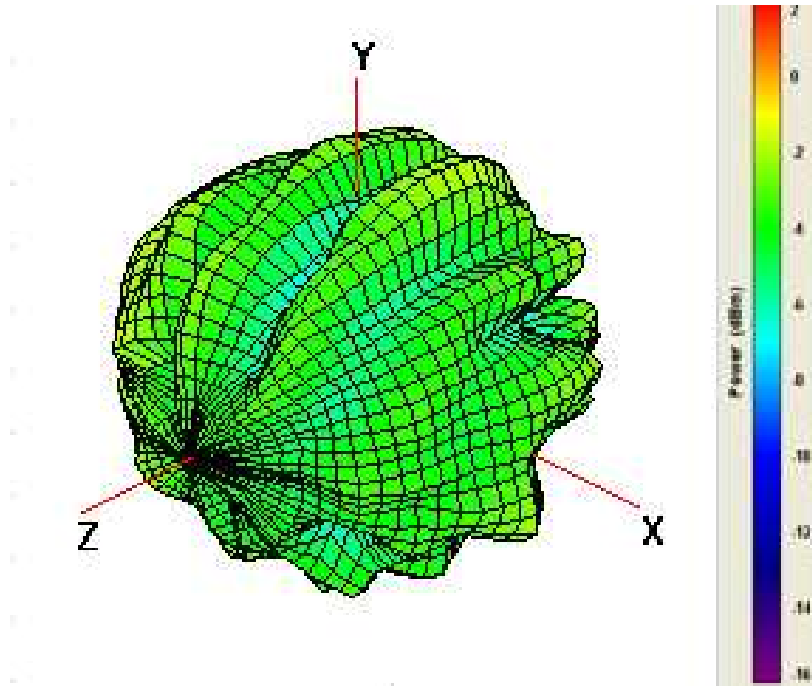


Center Frequency	5350 MHz	Center Frequency	5350 MHz
Horizontal (dBi) peak	0.01	Horizontal (dBi) average	-8.33
Vertical (dBi) peak	-0.76	Vertical (dBi) average	-8.87
H+V (dBi) peak	0.26	H+V (dBi) average	-5.58

Aux antenna: 5470 MHz

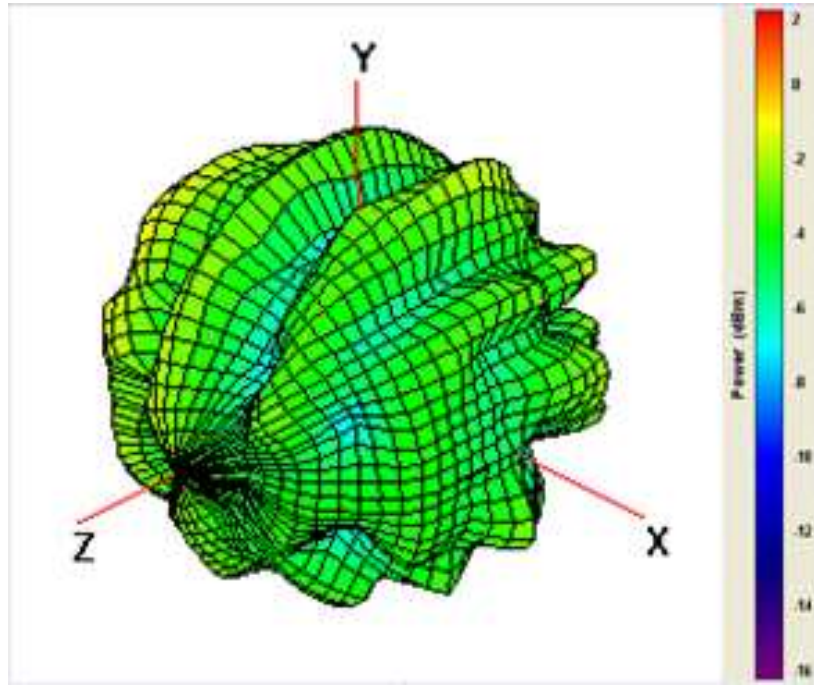


Center Frequency	5470 MHz	Center Frequency	5470 MHz
Horizontal (dBi) peak	-0.02	Horizontal (dBi) average	-8.58
Vertical (dBi) peak	-1.74	Vertical (dBi) average	-8.68
H+V (dBi) peak	0.07	H+V (dBi) average	-5.62

Aux antenna: 5725 MHz

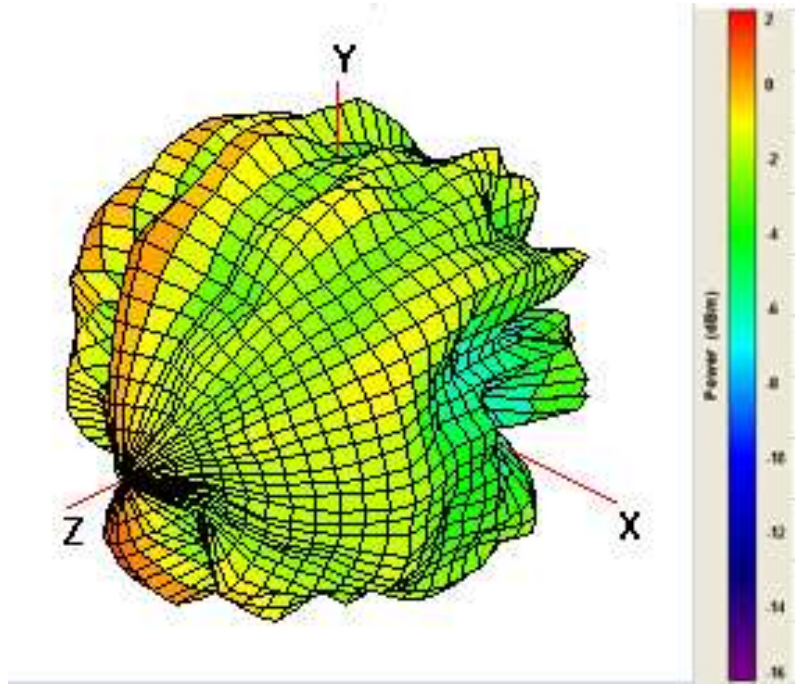


Center Frequency	5725 MHz	Center Frequency	5725 MHz
Horizontal (dBi) peak	-1.90	Horizontal (dBi) average	-8.91
Vertical (dBi) peak	-1.63	Vertical (dBi) average	-9.17
H+V (dBi) peak	-0.89	H+V (dBi) average	-6.03

Aux antenna: 5850 MHz

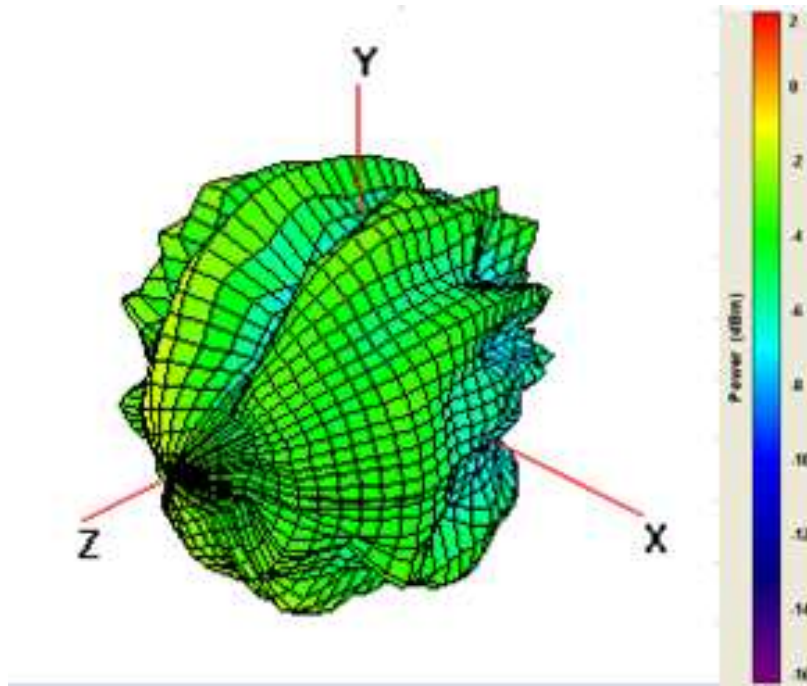


Center Frequency	5850 MHz	Center Frequency	5850 MHz
Horizontal (dBi) peak	0.25	Horizontal (dBi) average	-8.30
Vertical (dBi) peak	-0.15	Vertical (dBi) average	-8.78
H+V (dBi) peak	0.61	H+V (dBi) average	-5.52

MIMO antenna: 5150 MHz

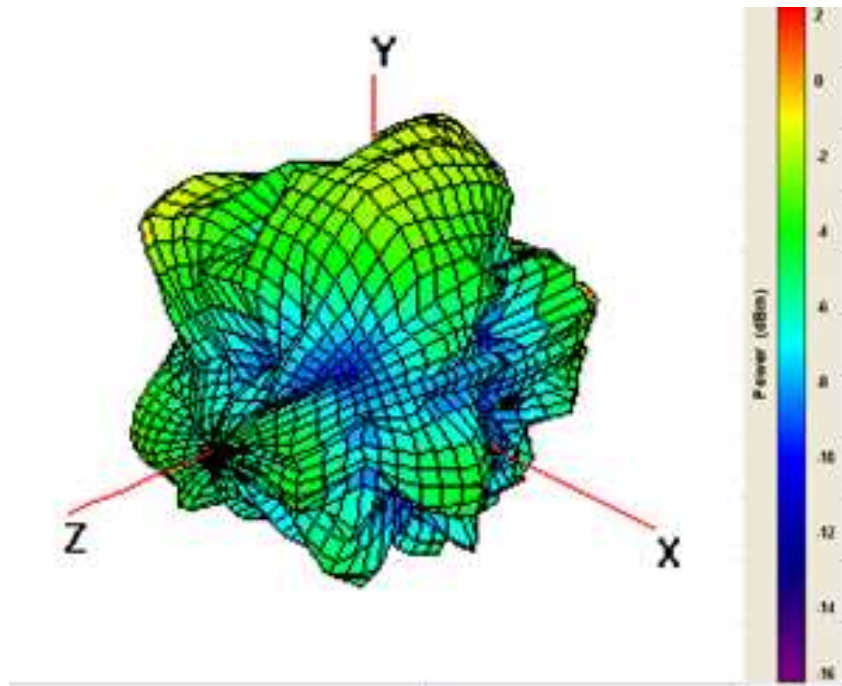


Center Frequency	5150 MHz	Center Frequency	5150 MHz
Horizontal (dBi) peak	1.94	Horizontal (dBi) average	-8.49
Vertical (dBi) peak	1.94	Vertical (dBi) average	-8.87
H+V (dBi) peak	1.98	H+V (dBi) average	-5.66

MIMO antenna: 5350 MHz

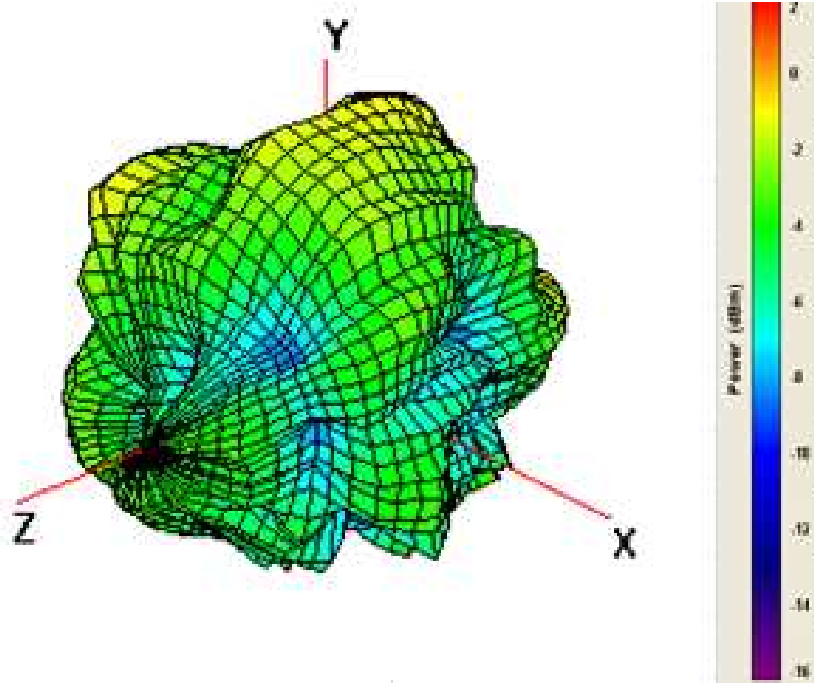


Center Frequency	5350 MHz	Center Frequency	5350 MHz
Horizontal (dBi) peak	0.56	Horizontal (dBi) average	-8.31
Vertical (dBi) peak	0.77	Vertical (dBi) average	-9.03
H+V (dBi) peak	1.55	H+V (dBi) average	-5.64

MIMO antenna: 5470 MHz

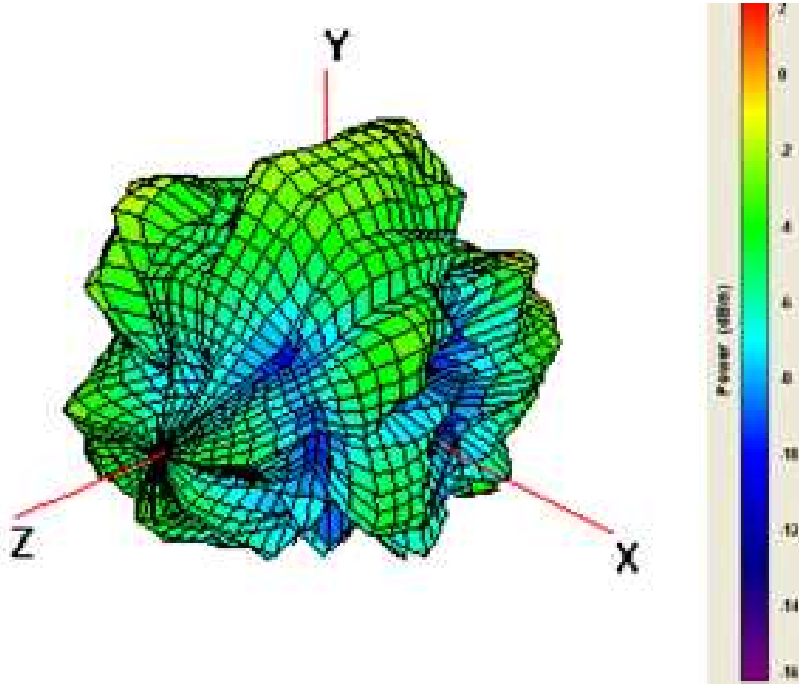


Center Frequency	5470 MHz	Center Frequency	5470 MHz
Horizontal (dBi) peak	1.19	Horizontal (dBi) average	-8.63
Vertical (dBi) peak	-0.09	Vertical (dBi) average	-9.60
H+V (dBi) peak	1.37	H+V (dBi) average	-6.08

MIMO antenna: 5725 MHz

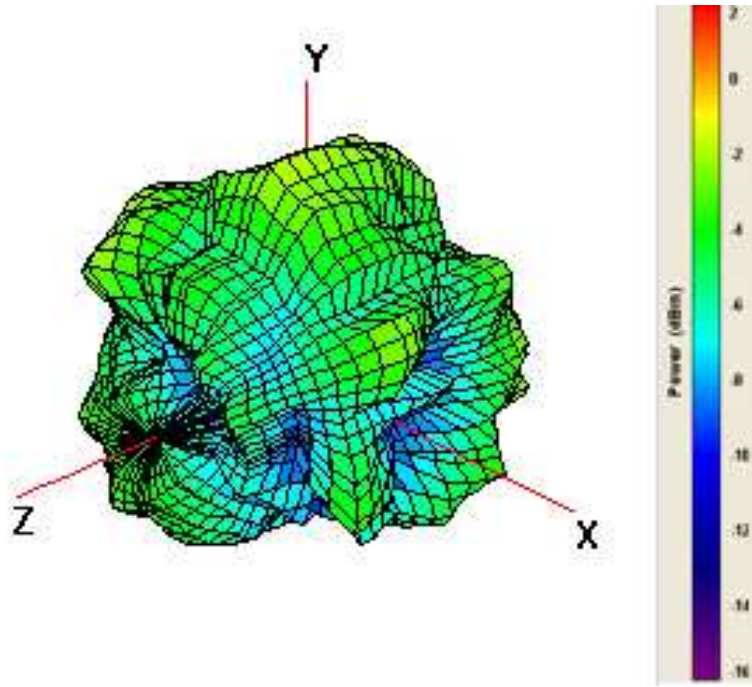

Center Frequency	5725 MHz	Center Frequency	5725 MHz
Horizontal (dBi) peak	1.55	Horizontal (dBi) average	-9.58
Vertical (dBi) peak	-2.17	Vertical (dBi) average	-11.05
H+V (dBi) peak	1.85	H+V (dBi) average	-7.24


MIMO antenna: 5850 MHz

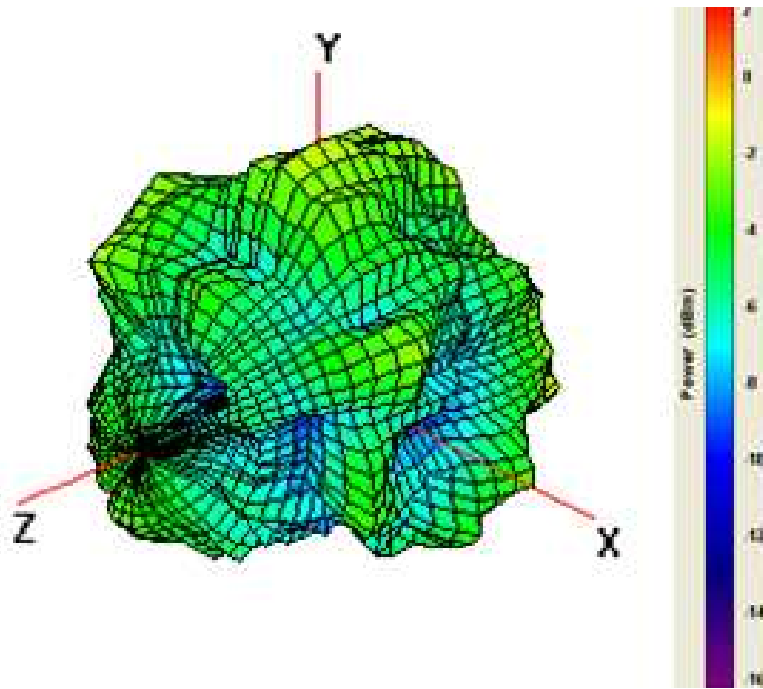

Center Frequency	5850 MHz	Center Frequency	5850 MHz
Horizontal (dBi) peak	1.85	Horizontal (dBi) average	-9.03
Vertical (dBi) peak	1.06	Vertical (dBi) average	-11.06
H+V (dBi) peak	1.95	H+V (dBi) average	-6.92


Section 4. Host Platform Information

OEM / ODM Host platform: (DQ611000000 & DQ608000000) platform correlated to antenna data

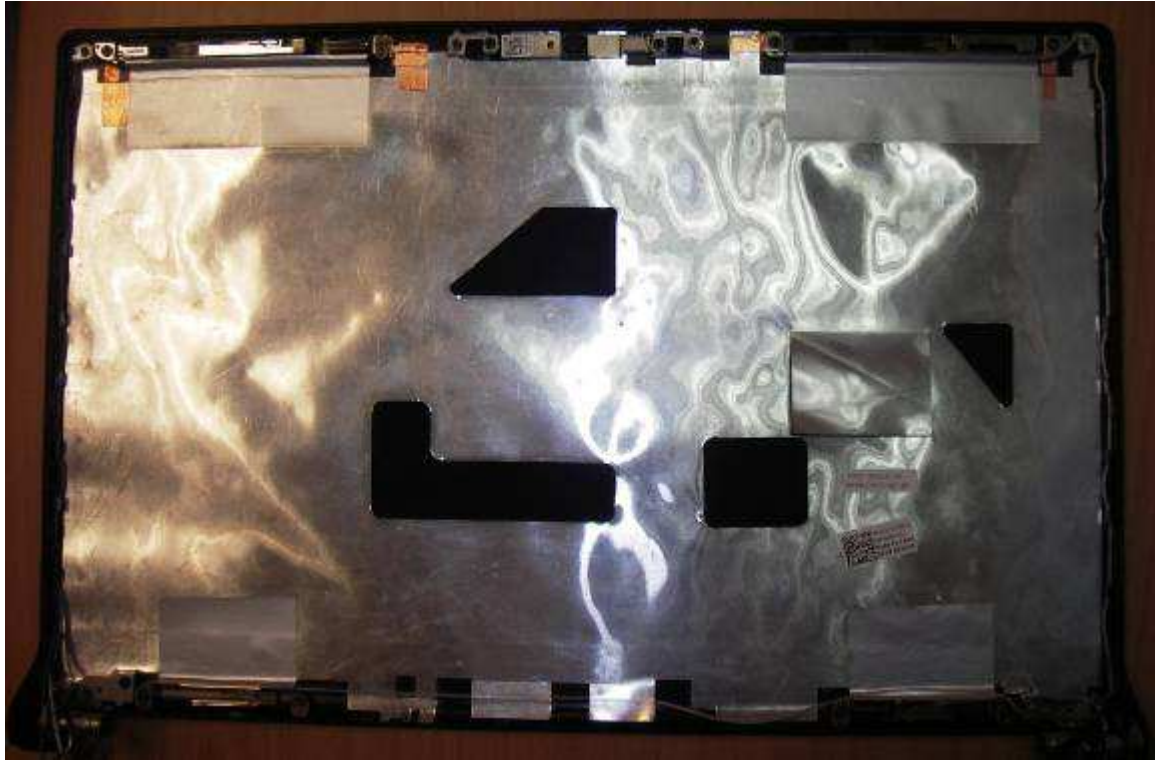



Section 5. Antenna Host Platform Location Information

Include a **dimensioned photo or dimensioned drawing** of main and auxiliary antenna placements.

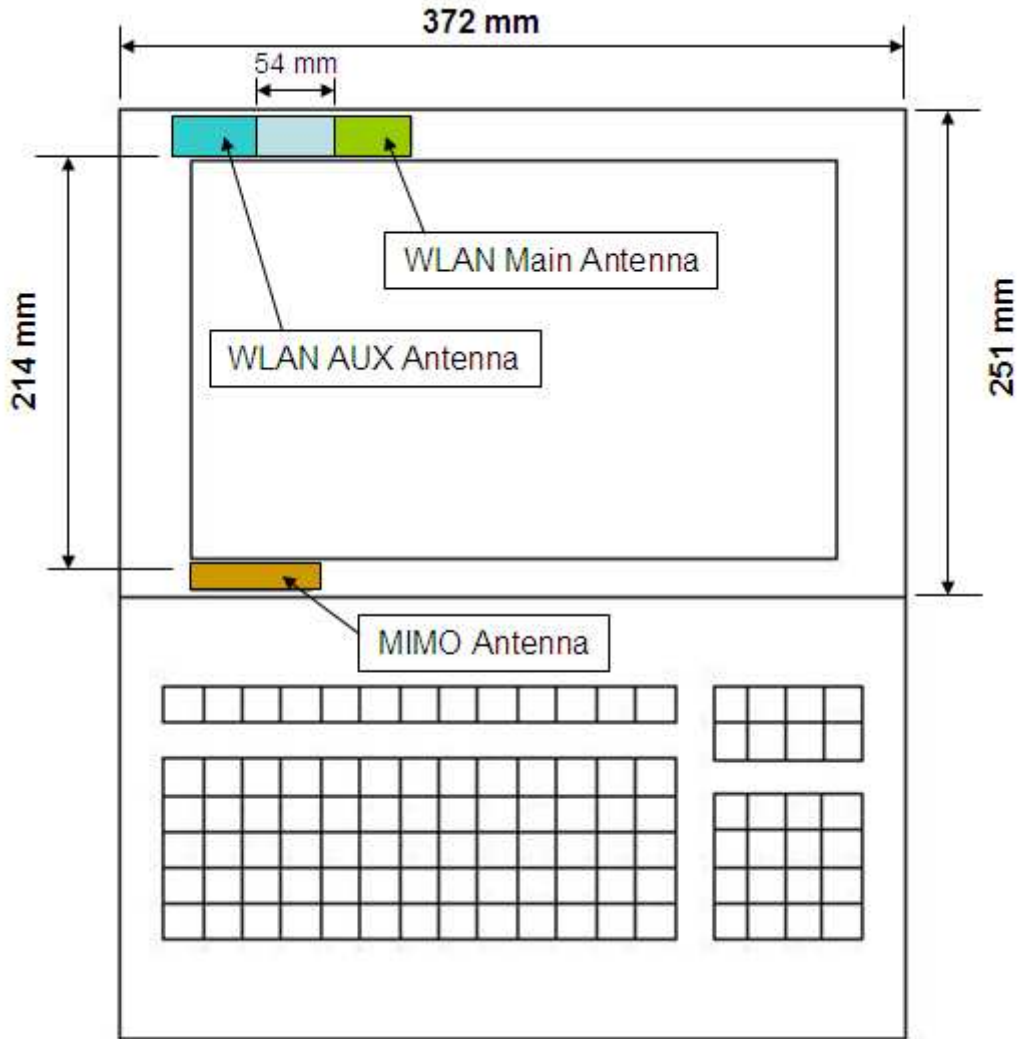

Section 6. Antenna dimensional information for SAR evaluation


Include a **dimensioned photo or dimensioned drawing** showing the distance (mm) between the transmit antennas and the user (excluding hands, wrist, feet, lap/ thigh, and ankle)

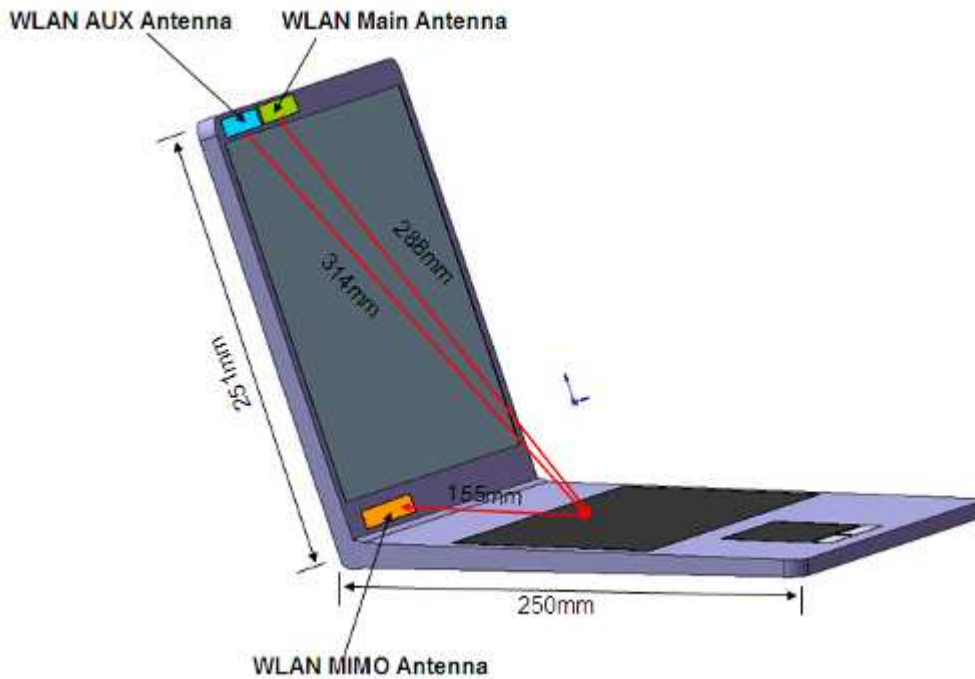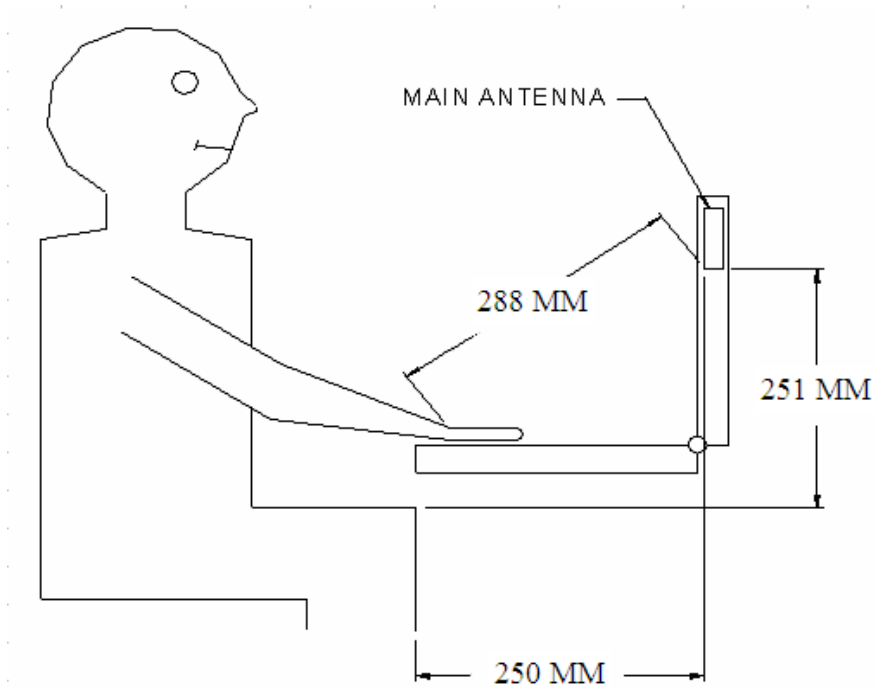

Section 7. Diagram Example of Co-Location Antenna Separation

Include a **dimensioned photo or dimensioned drawing** showing the distance (mm) between all WLAN transmit antennas and other co-located radiator transmit antenna such as Bluetooth, WWAN,...

(Note: Due to the evolving rules regarding co-location, each platform will need to be reviewed on a case by case basis)

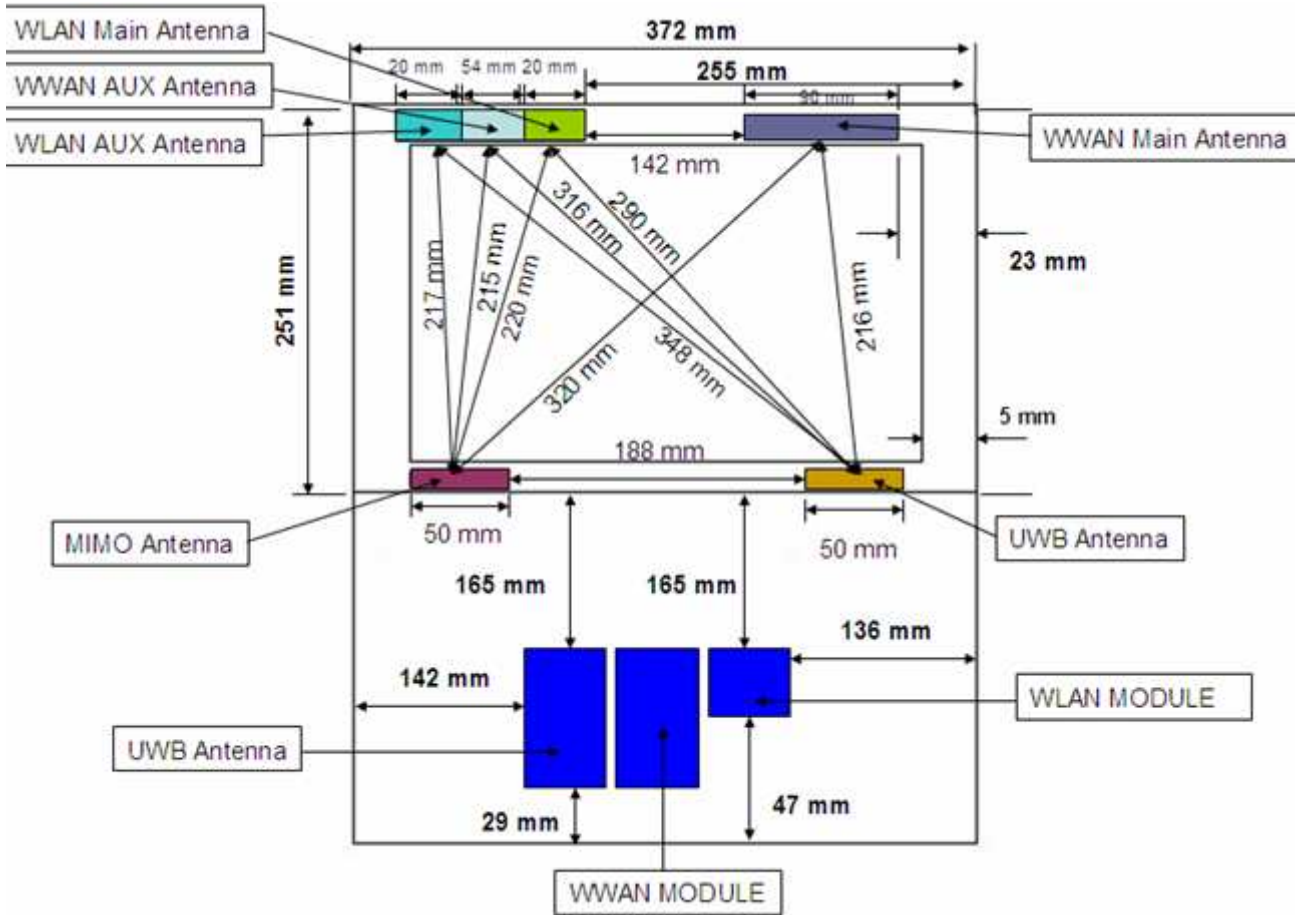

Section 8. Local representative contact information

Local representative contact information is required for regulatory support for target countries below.

	Local company name	Contact name	Phone number	FAX Number	e-Mail Address	Notes
Argentina						
Brazil						
Indonesia						
Israel						
Malaysia						
Mexico						
Singapore						Telecommunication Equipment Dealer License Required
South Africa						
USA, Canada						