

Report No.: EH\2010\70032 Issue Date: Oct. 22, 2010 Page: 1 of 97

# ELECTROMAGNETIC EMISSIONS COMPLIANCE REPORT

# INTENTIONAL RADIATOR CERTIFICATION TO FCC PART 15 SUBPART C REQUIREMENT

OF

Product Name:	Smart Phone
Brand Name:	DELL
Model Name:	V03B002
Model Different:	N/A
FCC ID:	E2KV03B002
Report No.:	EH/2010/70032
Issue Date:	Oct. 22, 2010
FCC Rule Part:	§15.247, Cat: DTS
Prepared for:	DELL Inc
	One Dell Way, Round Rock, Tx 78682 Austin, Tx 7875
Prepared by:	SGS Taiwan Ltd.
	Electronics & Communication Laboratory
	No. 134, Wu Kung Rd., Wuku Industrial
	Zone, Taipei County, Taiwan



*Note:* This report shall not be reproduced except in full, without the written approval of SGS Taiwan Ltd. This document may be altered or revised by SGS Taiwan Ltd. personnel only, and shall be noted in the revision section of the document.



FCC ID: E2KV03B002

Report No.: EH\2010\70032 Issue Date: Oct. 22, 2010 Page: 2 of 97

# **VERIFICATION OF COMPLIANCE**

Applicant:	DELL Inc. One Dell Way, Round Rock, Tx 78682Austin, Tx 7875
<b>Equipment Under Test:</b>	Smart Phone
Brand Name:	DELL
Model No.:	V03B002
Model Difference:	N/A
FCC ID:	E2KV03B002
File Number:	EH/2010/70032
Date of test:	Oct. 04, 2010 ~ Oct. 18, 2010
Date of EUT Received:	Oct. 04, 2010

## We hereby certify that:

The above equipment was tested by SGS Taiwan Ltd. Electronics & Communication Laboratory The test data, data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in ANSI C63.4 (2003) and the energy emitted by the sample EUT tested as described in this report is in compliance with conducted and radiated emission limits of FCC Rules Part 15.247.

The test results of this report relate only to the tested sample identified in this report.

Test By:	Jazz Huang	Date	Oct. 22, 2010
	Jazz Huang / Engineer		
Prepared By:	Alex Hsieh	Date	Oct. 22, 2010
Approved By:	Alex Hsieh / Sr. Engineer ALWO HSieh	Date	Oct. 22, 2010

Arno Hsieh /Asst. Supervisor



FCC ID: E2KV03B002

Report No.: EH\2010\70032 Issue Date: Oct. 22, 2010 Page: 3 of 97

# Version

Version No.	Date	Description	
00	Oct. 22, 2010	Initial creation of document	



Report No.: EH\2010\70032 Issue Date: Oct. 22, 2010 Page: 4 of 97

## **Table of Contents**

1	GEN	ERAL INFORMATION	6
	1.1	Related Submittal(s) / Grant (s)	9
	1.2	Test Methodology	9
	1.3	Test Facility	9
	1.4	Special Accessories	9
	1.5	Equipment Modifications	9
2	SYS	TEM TEST CONFIGURATION	10
	2.1	EUT Configuration	10
	2.2	EUT Exercise	10
	2.3	Test Procedure	10
	2.4	Configuration of Tested System	11
3	SUM	IMARY OF TEST RESULTS	
4	DES	CRIPTION OF TEST MODES	
5	CON	DUCTED EMISSION TEST	
	5.1	Standard Applicable:	13
	5.2	Measurement Equipment Used:	13
	5.3	EUT Setup:	13
	5.4	Measurement Procedure:	14
	5.5	Measurement Result:	14
6	PEA	K OUTPUT POWER MEASUREMENT	17
	6.1	Standard Applicable:	17
	6.2	Measurement Equipment Used:	
	6.3	Test Set-up:	
	6.4	Measurement Procedure:	
	6.5	Measurement Result:	19
7	6dB	Bandwidth	27
	7.1	Standard Applicable:	
	7.2	Measurement Equipment Used:	
	7.3	Test Set-up:	31
	7.4	Measurement Procedure:	31
	7.5	Measurement Result:	
8	100K	<b>XHz BANDWIDTH OF BAND EDGES MEASUREMENT</b>	
	8.1	Standard Applicable:	
	8.2	Measurement Equipment Used:	



## FCC ID: E2KV03B002

Report No.: EH\2010\70032 Issue Date: Oct. 22, 2010 Page: 5 of 97

	8.3	Test SET-UP:	40
	8.4	Measurement Procedure:	41
	8.5	Field Strength Calculation:	41
	8.6	Measurement Result:	41
9	SPUF	RIOUS RADIATED EMISSION TEST	48
	9.1	Standard Applicable	
	9.2	Measurement Equipment Used:	51
	9.3	Test SET-UP:	51
	9.4	Measurement Procedure:	51
	9.5	Field Strength Calculation	
	9.6	Measurement Result:	
10	Peak	Power Spectral Density	
	10.1	Standard Applicable:	
	10.2	Measurement Equipment Used:	
	10.3	Test Set-up:	
	10.4	Measurement Procedure:	
	10.5	Measurement Result:	
11			
11	AN 11	ENNA REQUIREMENT	
	11.1	Antenna Connected Construction:	
	11.2		



## **1 GENERAL INFORMATION**

General:

Product Name	Smart Phone	Smart Phone			
Brand Name	DELL	DELL			
Model Name	V03B002				
Model Difference	N/A				
Data Cable (USB)	Model No.: 5K.16R01.001 / CU04C04U05-K66-EF, Supplier: HELM				
Simple Hands-free (SHF)	Model No.: 525283/TY.2C190.003, Supplier: Foster				
Simple Hands-free (SHF)	Model No.: C055T/TY.2C190.001, Supplier: PCH				
	3.7 Vdc re-chargeable battery or 5Vdc by AC/DC power adapter				
Power Supply	Battery:	Model: 214L0/2C.214L0.001, Supplier: CHENG UEI PRECISION INDUSTRY CO.,LTD.			
	Adapter:	Model No.: 32HD9/ 0005ADUUS, Supplier: PCH			

#### GSM and WCDMA:

	Operating Frequency	Rated Power		
	GSM/GPRS 850 Class 12	SM/GPRS 850 Class 12 824 MHz– 849MHz		
Cellular Phone Standards Frequency Range and	GSM/GPRS 1900 Class 12 1850MHz – 1910MHz		30 dBm	
Power:	EDGE 850, Class 12	824 MHz- 849MHz	27 dBm	
	EDGE 1900, Class 12	1850MHz – 1910MHz	26 dBm	
	WCDMA/HSUPA/HSDPA Band IV	1712.4MHz –1752.6MHz	23 dBm	
Hardware Version:	N/A			
Software Version:	N/A			
Type of Emission	GSM 850: 246KGXW, GSM 1900 :244KGXW EDGE 850: 250KG7W, EDGE 1900:247KG7W WCDMA Band IV: 4M17F9W,HSDPA Band IV: 4M18F9W			
IMEI:	01212000005980			



Report No.: EH\2010\70032 Issue Date: Oct. 22, 2010 Page: 7 of 97

WLAN:

Wi-Fi	Frequency Range	Channels	Rated Power	Modulation Technology	Type of Emission
11b/g	2412-2462	11	b : 14.57dBm g : 18.70dBm	DSSS, OFDM	b : 8M15G1D g : 15M23G1D
11n	HT20 2412-2462	11	n : 16.23Bm	OFDM	15M23G1D
Antenna Designation:		PIFA Antenna with 1.25dBi peak gain			
Modulation type:		CCK, DQPSK, DBPSK for DSSS 64QAM. 16QAM, QPSK, BPSK for OFDM			
Transition Rate:		802.11 b: 1/2/5.5/11 Mbps; 802.11 g: 6/9/12/18/24/36/48/54 Mbps 802.11 n 20MHz: 6.5 – 72.2Mbps			

The EUT is compliance with IEEE 802.11 b/g/n Standard.

#### Bluetooth:

h	
Bluetooth Version:	□ V1.1 (GFSK)  □ V1.2 (GFSK)  □ V2.0 (GFSK)  □ V2.0 + EDR (GFSK + π/4DQPSK + 8DPSK)  ∨ 2.1 + EDR (GFSK + π/4DQPSK + 8
Channel number:	79 channels
Modulation type:	$GFSK + \pi/4DQPSK + 8DPSK$
Output Power:	8.21 dBm (Max. EDR mode)
Frequency Range:	2.402GHz - 2.480GHz
Dwell Time:	<= 0.4s
Operating Mode:	Point-to-Point
Antenna Designation:	PIFA Antenna with 1.25dBi peak gain
Type of Emission:	1M29F1D

The EUT is compliance with Bluetooth 2.1 + EDR Standard.



Report No.: EH\2010\70032 Issue Date: Oct. 22, 2010 Page: 8 of 97

Test Mode	DC voltage (V)	DC current (mA)
GSM 850	3.7Vdc	470
DCS 1900	3.7Vdc	440
EDGE 850	3.7Vdc	360
EDGE 1900	3.7Vdc	270
WCDMA B2	3.7Vdc	820
HSUPA B2	3.7Vdc	590
WCDMA B5	3.7Vdc	610
HSUPA B5	3.7Vdc	480

Final Amplifier Voltage and Current Information:

This report applies for WLAN, and complies with FCC rule part 15C.



#### 1.1 Related Submittal(s) / Grant (s)

This submittal(s) (test report) is intended for **FCC ID: <u>E2KV03B002</u>** filing to comply with Section 15.247 of the FCC Part 15, Subpart C Rules. The composite system (digital device) is compliance with Subpart B is authorized under a DoC procedure.

#### 1.2 Test Methodology

Both conducted and radiated testing was performed according to the procedures in ANSI C63.4 (2003). Radiated testing was performed at an antenna to EUT distance 3 meters.

Tested in accordance with Oct 2002 KDB558074 for compliance to FCC 47CFR 15.247

requirements.

#### **1.3 Test Facility**

The measurement facilities used to collect the 3m Radiated Emission and AC power line conducted data are located on the address of SGS Taiwan Ltd. Electronics & Communication Laboratory No. 134, Wu Kung Rd., Wuku Industrial Zone, Taipei Country, Taiwan which are constructed and calibrated to meet the FCC requirements in documents ANSI C63.4: 2003. FCC Registration Number are: 990257 and 236194, Canada Registration Number: 4620A-4.

The 10 m Open Area Test Sites located on the address of SGS Taiwan Ltd. Electronics & Communication Laboratory No. 29, Pau-Tou-Tsuo Valley Chia-Pau Tsuen, Linkou Hsiang, Taipei county, which is constructed and calibrated to meet the CISPR 22/EN 55022 requirements. SGS Site No. 1(3 &10 meters) and FCC Registration Number: 94644.

#### **1.4 Special Accessories**

Not available for this EUT intended for grant.

#### **1.5 Equipment Modifications**

Not available for this EUT intended for grant.



Report No.: EH\2010\70032 Issue Date: Oct. 22, 2010 Page: 10 of 97

## **2** SYSTEM TEST CONFIGURATION

#### 2.1 EUT Configuration

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner which intends to maximize its emission characteristics in a continuous normal application.

#### 2.2 EUT Exercise

The EUT (Transmitter) was operated in the engineering mode to fix the Tx frequency that was for the purpose of the measurements.

#### 2.3 Test Procedure

#### **2.3.1 Conducted Emissions**

The EUT is a placed on as turn table which is 0.8 m above ground plane. According to the requirements in Section 7 and 13 of ANSI C63.4-2003.Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30MHz using CISPR Quasi-Peak and Average detector mode.

#### 2.3.2 Radiated Emissions


The EUT is a placed on as turn table which is 0.8 m above ground plane. The turn table shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3m away from the receiving antenna which varied from 1m to 4m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the max. emission, the relative positions of this hand-held transmitter(EUT) was rotated through three orthogonal axes and measurement procedures for electric field radiated emissions above 1 GHz the EUT measurement is to be made "while keeping the antenna in the 'cone of radiation' from that area and pointed at the area both in azimuth and elevation, with polarization oriented for maximum response." is still within the 3dB illumination BW of the measurement antenna. according to the requirements in Section 8 and 13 of ANSI C63.4-2003.



Report No.: EH\2010\70032 Issue Date: Oct. 22, 2010 Page: 11 of 97

#### 2.4 Configuration of Tested System

Fig. 2-1 AC Power line and Radiated Emission Configuration

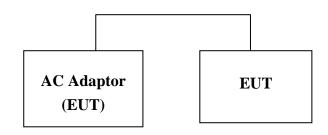

#### **Table 2-1 Equipment Used in Tested System**

Item	Equipment	Mfr/Brand	Model/ Type No.	Series No.	Data Cable	Power Cord
1	Test software	EM wifi	N/A	N/A	N/A	N/A



## **3 SUMMARY OF TEST RESULTS**

FCC Rules	Description Of Test	Result	
§15.207(a)	AC Power Line Conducted Emission	Compliant	
§15.247(b) (3),(4)(c)	Peak Output Power	Compliant	
§15.247(a)(2)	6dB Bandwidth	Compliant	
	100 KHz Bandwidth Of		
§15.247(d)	Frequency Band Edges	Compliant	
§15.247(d)	Spurious Emission	Compliant	
§15.247(e)	Peak Power Density	Compliant	
§15.203	Antenna Requirement	Compliant	

# **4 DESCRIPTION OF TEST MODES**

The EUT has been tested under operating condition.

Test program used to control the EUT for staying in continuous transmitting and receiving mode is programmed.

802.11 b mode: Channel low (2412MHz) mid (2437MHz) and high (2462MHz) with 1Mbps lowest data rate are chosen for full testing.

802.11 g mode: Channel low (2412MHz) · mid (2437MHz) and high (2462MHz) with 6Mbps lowest data rate are chosen for full testing.

802.11 n mode: Channel low (2412MHz)  $\cdot$  mid (2437MHz) and high (2462MHz) with 6.5Mbps lowest data rate are chosen for full testing.

The field strength of radiation emission was measured as EUT stand-up position (H mode) and lie down position (E1, E2 mode) for 802.11b/g/n WLAN Transmitter for channel Low, Mid and High, the worst case H position was reported.



## **5** CONDUCTED EMISSION TEST

#### 5.1 Standard Applicable:

According to §15.207, frequency range within 150KHz to 30MHz shall not exceed the Limit table as below.

Frequency range		mits (uV)						
MHz	Quasi-peak	Average						
0.15 to 0.50	66 to 56	56 to 46						
0.50 to 5	56	46						
5 to 30	60	50						
Note								
1 The lower limit shall apply at the transition frequencies								

1. The lower limit shall apply at the transition frequencies

2. The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz.

#### 5.2 Measurement Equipment Used:

Conducted Emission Test Site										
EQUIPMENT	MFR	MODEL	SERIAL	LAST	CAL DUE.					
ТҮРЕ		NUMBER	NUMBER	CAL.						
EMI Test Receiver	R&S	ESCS30	828985/004	09/16/2010	09/15/2011					
LISN	Rolf-Heine	NNB-2/16Z	99012	02/02/2010	02/01/2011					
LISN	FCC	FCC-LISN-50/250-25-2-01	04034	02/02/2010	02/01/2011					
Coaxial Cables	N/A	WK CE Cable	N/A	10/30/2009	10/29/2010					

#### 5.3 EUT Setup:

- 1. The conducted emission tests were performed in the test site, using the setup in accordance with the ANSI C63.4-2003.
- 2. The AC/DC Power adaptor of EUT was plug-in LISN. The EUT was placed flushed with the rear of the table.
- 3. The LISN was connected with 120Vac/60Hz power source.



Report No.: EH\2010\70032 Issue Date: Oct. 22, 2010 Page: 14 of 97

#### 5.4 Measurement Procedure:

- 1. The EUT was placed on a table which is 0.8m above ground plane.
- 2. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
- 3. Repeat above procedures until all frequency measured were complete.

#### 5.5 Measurement Result:


The initial step in collecting conducted data is a spectrum analyzer peak scan of the measurement range. Significant peaks are then marked as shown on the following data page, and these signals are then quasi-peaked.


Note: Refer to next page for measurement data and plots.



Report No.: EH\2010\70032 Issue Date: Oct. 22, 2010 Page: 15 of 97

# AC POWER LINE CONDUCTED EMISSION TEST DATA



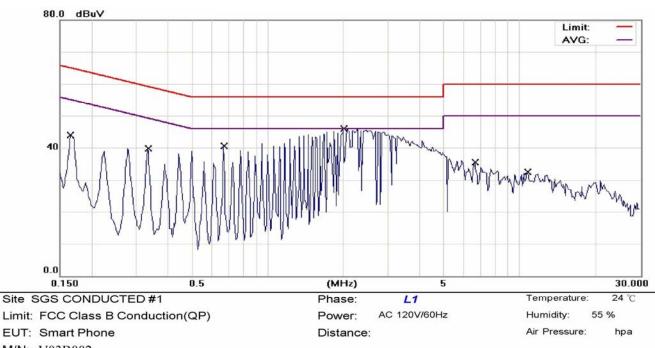


Limit:	FCC Class B Conduction(Q
EUT:	Smart Phone
M/N:	V03B002
Note:	WIFI +BT MODE link

No.	Mk.	Freq.	Reading Level	Factor	Measure- ment	Limit	Over		
		MHz	dBuV	dB	dBuV	dBuV	dB	Detector	Comment
1		0.1650	41.90	0.13	42.03	65.21	-23.18	QP	
2		0.1650	30.90	0.13	31.03	55.21	-24.18	AVG	
3		0.3350	38.10	0.12	38.22	59.33	-21.11	QP	
4		0.3350	28.00	0.12	28.12	49.33	-21.21	AVG	
5		0.6700	39.00	0.12	39.12	56.00	-16.88	QP	
6		0.6700	29.00	0.12	29.12	46.00	-16.88	AVG	
7	*	2.0100	43.40	0.16	43.56	56.00	-12.44	QP	
8		2.0100	32.40	0.16	32.56	46.00	-13.44	AVG	
9		6.6400	27.90	0.31	28.21	60.00	-31.79	QP	
10		6.6400	15.60	0.31	15.91	50.00	-34.09	AVG	
11		10.7400	26.80	0.53	27.33	60.00	-32.67	QP	
12		10.7400	15.40	0.53	15.93	50.00	-34.07	AVG	



Report No.: EH\2010\70032 Issue Date: Oct. 22, 2010 Page: 16 of 97

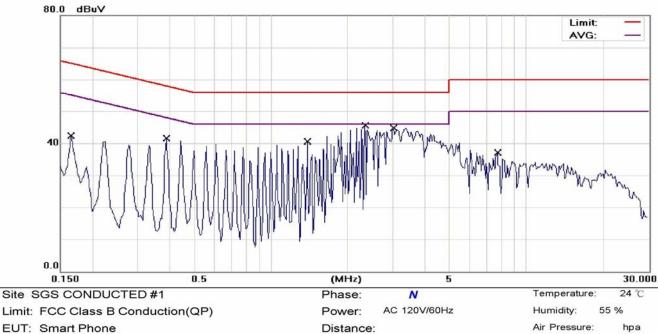

Limit: FCC Class B Conduction(QP) EUT: Smart Phone M/N: V03B002 Note: WIFI +BT MODE link

No.	Mk.	Freq.	Reading Level	Factor	Measure- ment	Limit	Over		
		MHz	dBuV	dB	dBuV	dBuV	dB	Detector	Comment
1		0.1650	40.20	0.14	40.34	65.21	-24.87	QP	
2		0.1650	28.30	0.14	28.44	55.21	-26.77	AVG	
3		0.3900	40.40	0.12	40.52	58.06	-17.54	QP	
4		0.3900	34.10	0.12	34.22	48.06	-13.84	AVG	
5		1.3900	39.00	0.14	39.14	56.00	-16.86	QP	
6		1.3900	29.70	0.14	29.84	46.00	-16.16	AVG	
7	*	2.3400	43.70	0.17	43.87	56.00	-12.13	QP	
8		2.3400	31.50	0.17	31.67	46.00	-14.33	AVG	
9		3.0100	43.20	0.18	43.38	56.00	-12.62	QP	
10		3.0100	30.40	0.18	30.58	46.00	-15.42	AVG	
11		7.7400	31.50	0.35	31.85	60.00	-28.15	QP	
12		7.7400	21.70	0.35	22.05	50.00	-27.95	AVG	



FCC ID: E2KV03B002

Report No.: EH\2010\70032 Issue Date: Oct. 22, 2010 Page: 17 of 97

## 6 PEAK OUTPUT POWER MEASUREMENT

#### 6.1 Standard Applicable:

According to §15.247(a)(2), (b)

(3) For systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and

5725-5850 MHz bands: 1 Watt. As an alternative to a peak power measurement, compliance with the one Watt limit can be based on a measurement of the maximum conducted output power. Maximum Conducted Output Power is defined as the total transmit power delivered to all antennas and antenna elements averaged across all symbols in the signaling alphabet when the transmitter is operating at its maximum power control level. Power must be summed across all antennas and antenna elements. The average must not include any time intervals during which the transmitter is off or is transmitting at a reduced power level. If multiple modes of operation are possible (e.g., alternative modulation methods), the maximum conducted output power is the highest total transmit power occurring in any mode. (4) The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

(c) Operation with directional antenna gains greater than 6 dBi.

(1) Fixed point-to-point operation:

(i) Systems operating in the 2400-2483.5 MHz band that are used exclusively for

fixed, point-to-point operations may employ transmitting antennas with directional gain greater than 6 dBi provided the maximum conducted output power of the intentional radiator is reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6 dBi.

(ii) Systems operating in the 5725-5850 MHz band that are used exclusively forfixed, point-to-point operations may employ transmitting antennas with directional gain greater than 6dBi without any corresponding reduction in transmitter conducted output power.

www.tw.sgs.com




Report No.: EH\2010\70032 Issue Date: Oct. 22, 2010 Page: 18 of 97

<b>6.2</b> Measurement Equipment Used	6.2	Measurement Equipment Used:
---------------------------------------	-----	-----------------------------

	Conducted Emission Test Site											
EQUIPMENT	MFR	MODEL	SERIAL	LAST	CAL DUE.							
ТҮРЕ		NUMBER	NUMBER	CAL.								
Power Sensor	Anritsu	MA2411B	917032	01/21/2010	01/20/2012							
Power Meter	Anritsu	ML2495A	1005007	02/17/2010	02/16/2012							
Spectrum Analyzer	Analyzer Agilent		MY43360126	04/19/2010	04/18/2012							
Spectrum Analyzer	Agilent	E4440A	MY45304525	01/25/2010	01/24/2011							
DC Block	Agilent	BLK-18	155452	07/05/2010	07/04/2011							
Low Loss Cable	HUBER+SUHNER	SUCOFLEX 104PEA	N/A	01/05/2010	01/04/2011							
Attenuator	Mini-Circuit	BW-S6W5	001	07/05/2010	07/04/2011							
Attenuator	Mini-Circuit	BW-S10W5	001	07/05/2010	07/04/2011							
Attenuator	Mini-Circuit	BW-S20W5	001	07/05/2010	07/04/2011							
Splitter	Agilent	11636B	N/A	07/05/2010	07/04/2011							

#### 6.3 Test Set-up:



#### 6.4 Measurement Procedure:

- 1. Place the EUT on the table and set it in transmitting mode.
- 2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the power meter or spectrum. (Channel power function, RBW, VBW = 1MHz,Bandwidth=26dB occupied Bandwidth)
- 3. Record the max. reading.
- 4. Repeat above procedures until all frequency measured were complete.



#### 6.5 Measurement Result:

#### 802.11b

	Cable loss $= 0$	Peak Power Output						
СН	Frequency (MHz)		Required Limit					
		1	2	5.5	11	Kequireu Enint		
1	2412	14.28	14.18	13.28	13.19	1 Watt = 30 dBm		
6	2437	14.57	14.51	13.78	13.70	1 Watt = 30 dBm		
11	2462	14.09	14.00	13.12	13.10	1 Watt = 30 dBm		

	Cable loss $= 0$	Avg. Power Output						
СН	Frequency (MHz)		Dequired Limit					
		1 2 5.5 11				Required Limit		
1	2412	11.65	11.60	11.03	11.00	1 Watt = 30 dBm		
6	2437	11.71	11.69	11.15	11.12	1 Watt = 30 dBm		
11	2462	11.52	11.48	11.05	11.02	1 Watt = 30 dBm		



Report No.: EH\2010\70032 Issue Date: Oct. 22, 2010 Page: 20 of 97

802.11g

Cat	ble loss = $0$	Peak Power Output								
СН	Frequency (MHz)		Data Rate							
	(191112)	6	9	12	18	24	36	48	54	Required Limit
1	2412	18.70	18.65	18.10	18.05	17.50	17.45	16.89	16.80	1 Watt = 30 dBm
6	2437	18.34	18.32	17.89	17.85	17.43	17.41	16.70	16.65	1 Watt = 30 dBm
11	2462	18.11	18.09	17.54	17.50	17.05	16.99	16.32	16.22	1 Watt = 30 dBm

Cał	ble loss = $0$	Avg. Power Output									
СН	Frequency (MHz)		Data Rate								
	(141112)	6	9	12	18	24	36	48	54	Required Limit	
1	2412	15.27	15.17	14.63	14.53	14.11	14.05	13.55	13.45	1 Watt = 30 dBm	
6	2437	14.93	14.83	14.23	14.17	13.76	13.66	13.25	13.10	1 Watt = 30 dBm	
11	2462	14.81	14.76	14.16	14.10	13.69	13.59	13.02	12.89	1 Watt = 30 dBm	



Report No.: EH\2010\70032 Issue Date: Oct. 22, 2010 Page: 21 of 97

#### 802.11n\_20M

Cable loss $= 0$					Pe	ak Pow	ver Out	put			
СН	Frequency (MHz)		Data Rate							Required	
	(101112)	6.5	13	19.5	26	39	52	58.5	65	72.2	Limit
1	2412	16.22	16.12	15.56	15.52	15.02	15.00	14.52	14.48	13.95	1 Watt = 30 dBm
6	2437	16.23	16.13	15.53	15.50	15.05	14.95	14.58	14.50	14.01	1 Watt = 30 dBm
11	2462	16.13	16.05	15.45	15.40	14.85	14.78	14.12	14.05	13.45	1 Watt = 30 dBm

Cable loss = 0					A	vg. Pow	er Out	put			
СН	Frequency (MHz)									Required	
	(11112)	6.5	13	19.5	26	39	52	58.5	65	72.2	Limit
1	2412	12.82	12.80	12.35	12.30	11.85	11.84	11.25	11.20	10.52	1 Watt = 30 dBm
6	2437	12.82	12.79	12.28	12.26	11.84	11.80	11.20	11.18	10.45	1 Watt = 30 dBm
11	2462	12.80	12.76	12.26	12.20	11.76	11.71	11.15	11.10	10.25	1 Watt = 30 dBm

\*Note: Offset 0.5dB


Note: Refer to next page for plots.




Report No.: EH\2010\70032 Issue Date: Oct. 22, 2010 Page: 22 of 97

## 802.11b, 1Mbps

#### **Peak Power Output Plot (CH Low)**

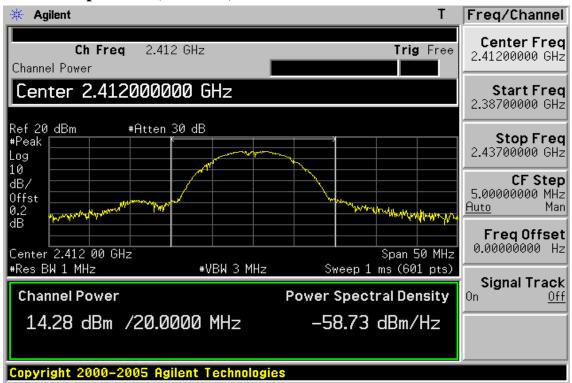


## Peak Power Output Plot (CH Mid)

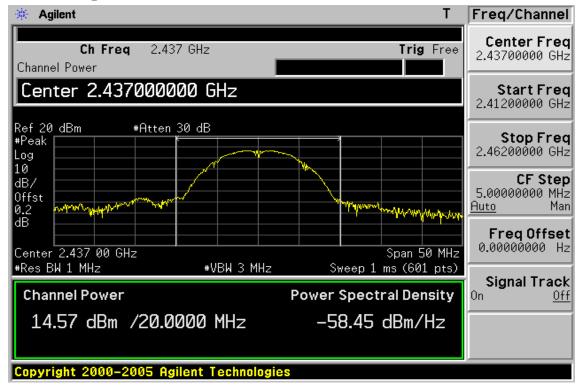




Report No.: EH\2010\70032 Issue Date: Oct. 22, 2010 Page: 23 of 97

## Peak Power Output Plot (CH High)

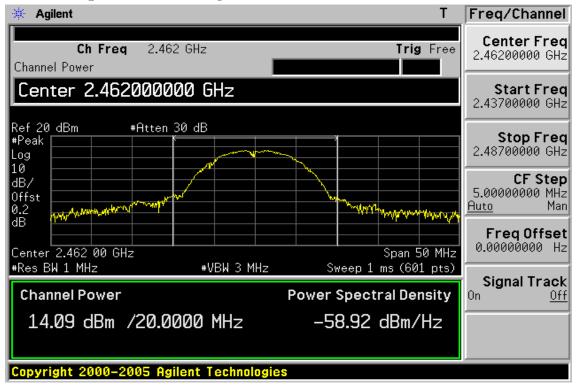

## Avg. Power Output Plot (CH Low)

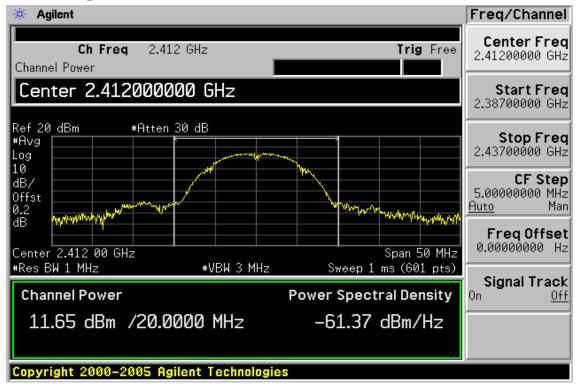

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. This test report cannot be reproduced, except in full, without prior written permission of the Company. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service (<u>www.sgs.com/terms\_and\_conditions.htm</u>) and Terms and Conditions for Electronic Documents is to be treated as an original within the meaning of UCP 600 article 20b. The authenticity of this document may be verified at <u>www.sgs.ossite.com/authentication</u>. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. SGS Taiwan Ltd. No.134, Wu Kung Road, Wuku Industrial Zone, Taipei County, Taiwan /台北縣五股工業區五工路 134 號


台灣檢驗科技股份有限公司	t (886-2) 2299-3279	f (886-2) 2298-0488	www.tw.sgs.com

Member of SGS Group




Report No.: EH\2010\70032 Issue Date: Oct. 22, 2010 Page: 24 of 97

## Avg. Power Output Plot (CH Mid)

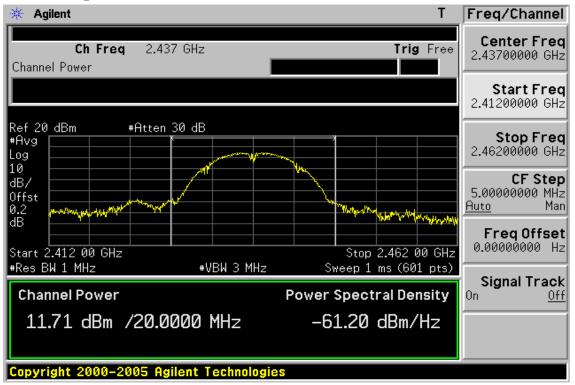

## Avg. Power Output Plot (CH High)

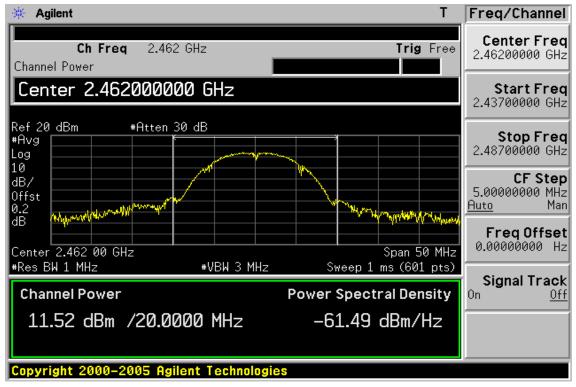





Report No.: EH\2010\70032 Issue Date: Oct. 22, 2010 Page: 25 of 97

# 802.11g, 6Mbps

# Peak Power Output Plot (CH Low)

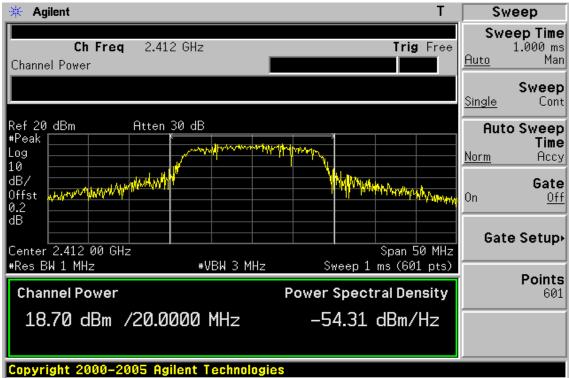


## Peak Power Output Plot (CH Mid)

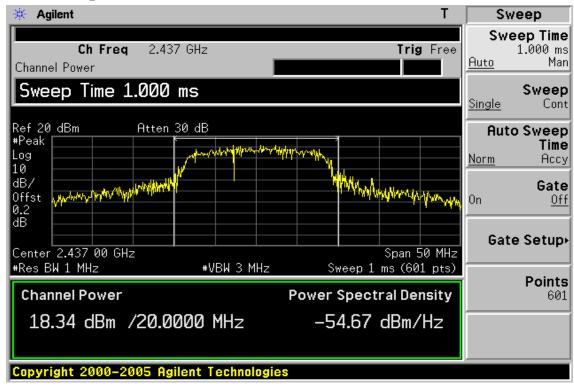




Report No.: EH\2010\70032 Issue Date: Oct. 22, 2010 Page: 26 of 97

## Peak Power Output Plot (CH High)

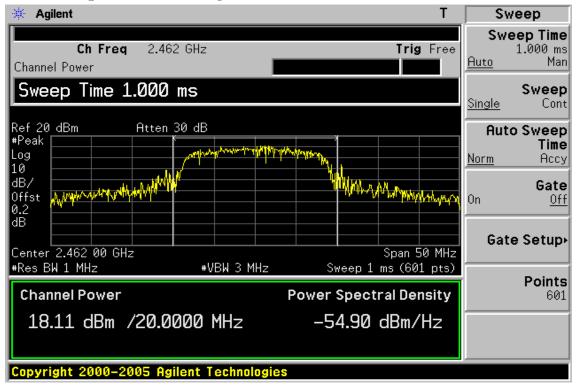


## Avg. Power Output Plot (CH Low)

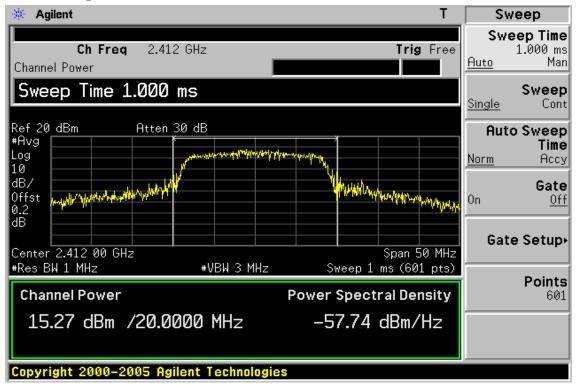




Report No.: EH\2010\70032 Issue Date: Oct. 22, 2010 Page: 27 of 97

# Avg. Power Output Plot (CH Mid)

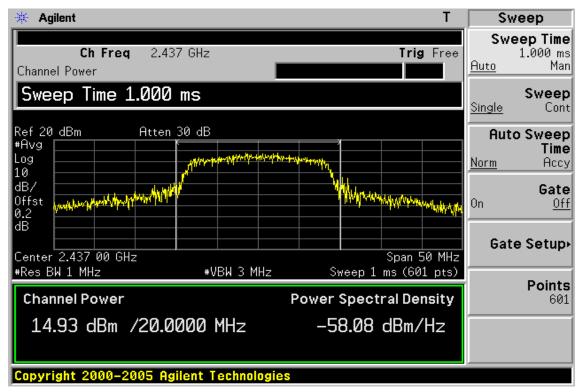


## Avg. Power Output Plot (CH High)

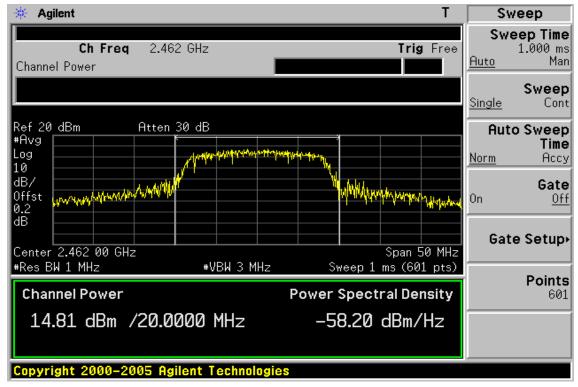




Report No.: EH\2010\70032 Issue Date: Oct. 22, 2010 Page: 28 of 97

## 802.11n\_20M, 6.5Mbps Peak Power Output Plot (CH Low)

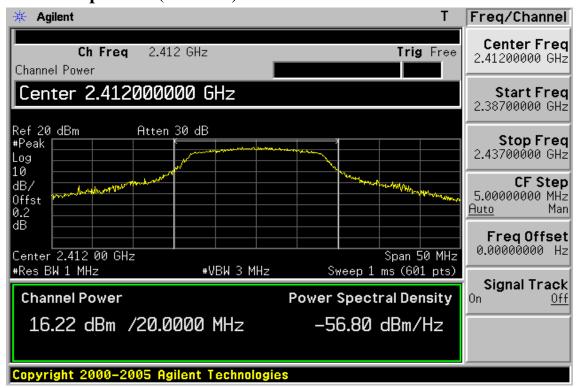


## Peak Power Output Plot (CH Mid)

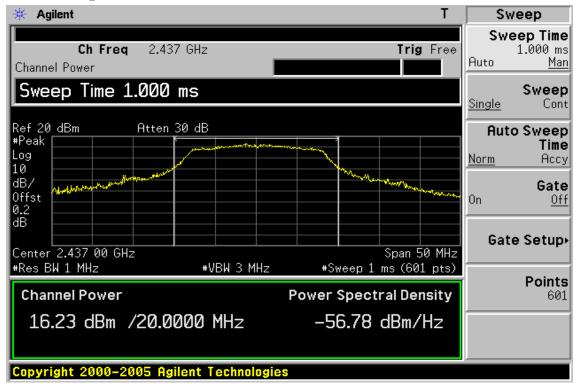




Report No.: EH\2010\70032 Issue Date: Oct. 22, 2010 Page: 29 of 97

## Peak Power Output Plot (CH High)

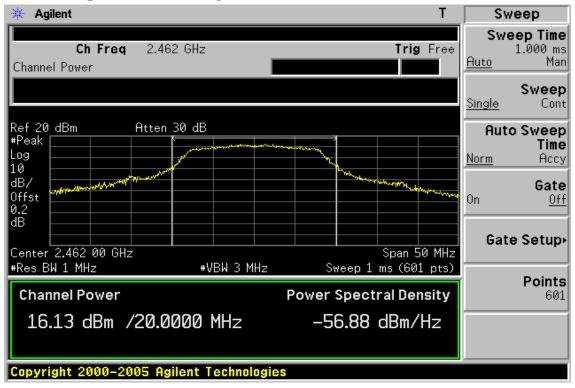

Avg. Power Output Plot (CH Low)

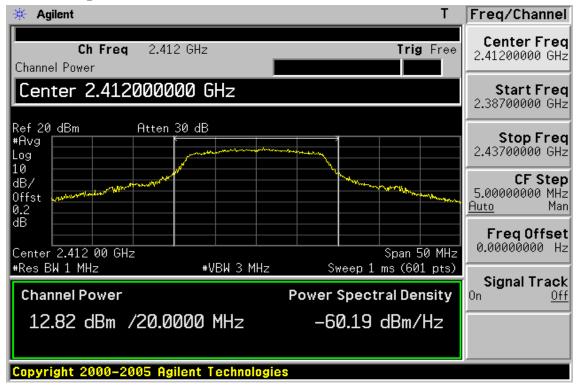


台灣檢驗科技股份有限公司	t (886-2) 2299-3279	f (886-2) 2298-0488	www.tw.sgs.com




Report No.: EH\2010\70032 Issue Date: Oct. 22, 2010 Page: 30 of 97

## Avg. Power Output Plot (CH Mid)

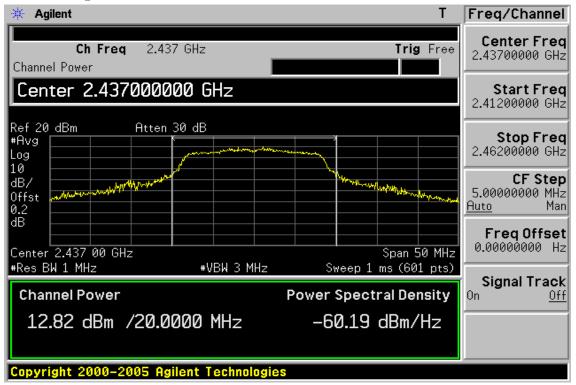

## Avg. Power Output Plot (CH High)

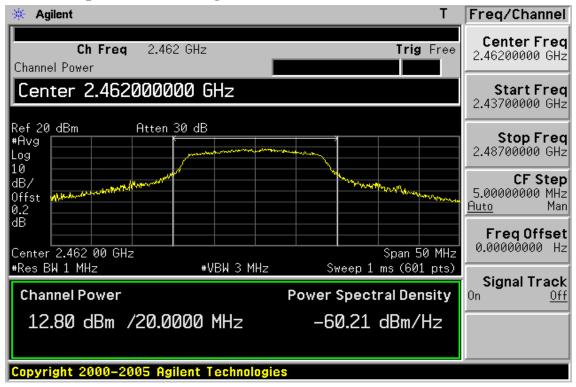



Report No.: EH\2010\70032 Issue Date: Oct. 22, 2010 Page: 31 of 97

## 7 6dB Bandwidth

## 7.1 Standard Applicable:

According to §15.247(a)(2), Systems using digital modulation techniques may operate in the 902 - 928 MHz,2400 - 2483.5 MHz, and 5725 - 5850 MHz bands. The minimum 6 dB bandwidth shall be at least 500kHz.

## 7.2 Measurement Equipment Used:

Refer to section 6.2 for details.

## 7.3 Test Set-up:

Refer to section 6.3 for details.

## 7.4 Measurement Procedure:

1.Place the EUT on the table and set it in transmitting mode.

- 2.Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
- 3.Set the spectrum analyzer as RBW=100KHz, VBW = 3\*RBW, Span= 30M/50MHz, Sweep=auto
- 4. Mark the peak frequency and -6dB (upper and lower) frequency.
- 5. Repeat above procedures until all frequency measured were complete.



Report No.: EH\2010\70032 Issue Date: Oct. 22, 2010 Page: 32 of 97

#### 7.5 Measurement Result:

#### 802.11b

802.110			
Frequency (MHz)	Bandwidth (MHz)	Bandwidth (KHz)	Result
2412	8.147	> 500	PASS
2437	8.121	> 500	PASS
2462	8.136	> 500	PASS

\*Offset 0.2 dB

#### 802.11g

Frequency (MHz)	Bandwidth (MHz)	Bandwidth (KHz)	Result
2412	15.234	> 500	PASS
2437	13.889	> 500	PASS
2462	12.529	> 500	PASS

\*Offset 0.2dB

#### 802.11n\_20M

Frequency (MHz)	Bandwidth (MHz)	Bandwidth (KHz)	Result
2412	15.218	> 500	PASS
2437	15.233	> 500	PASS
2462	15.218	> 500	PASS

\*Offset 0.2dB


Note: Refer to next page for plots.




Report No.: EH\2010\70032 Issue Date: Oct. 22, 2010 Page: 33 of 97

# 802.11b

## 6dB Band Width Test Data CH-Low

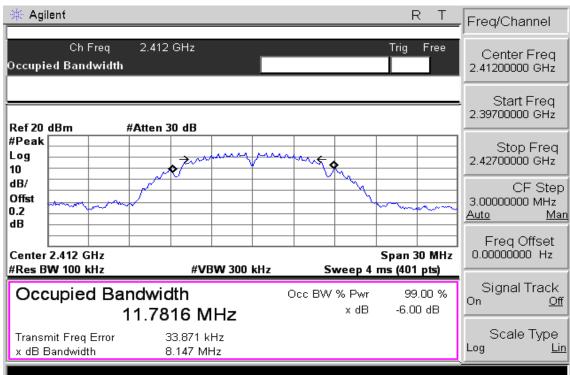


## 6dB Band Width Test Data CH-Mid

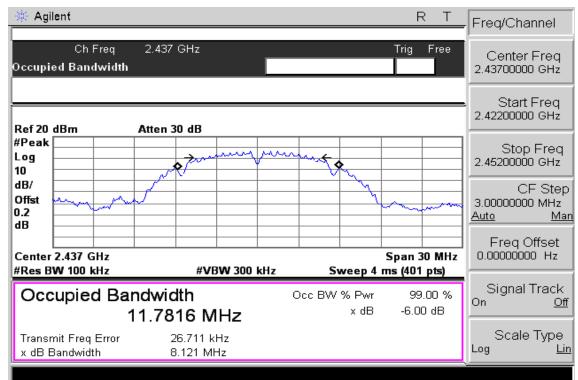



Report No.: EH\2010\70032 Issue Date: Oct. 22, 2010 Page: 34 of 97

# 6dB Band Width Test Data CH-High

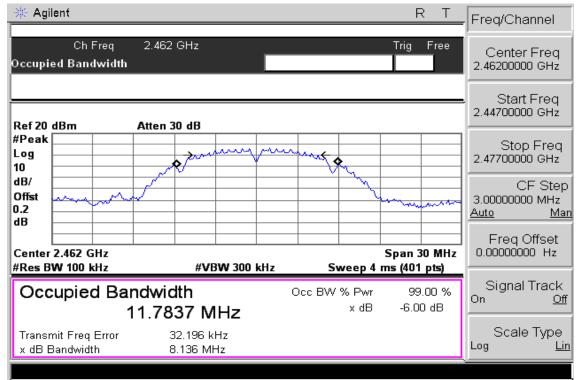





Report No.: EH\2010\70032 Issue Date: Oct. 22, 2010 Page: 35 of 97

# 802.11g

## 6dB Band Width Test Data CH-Low

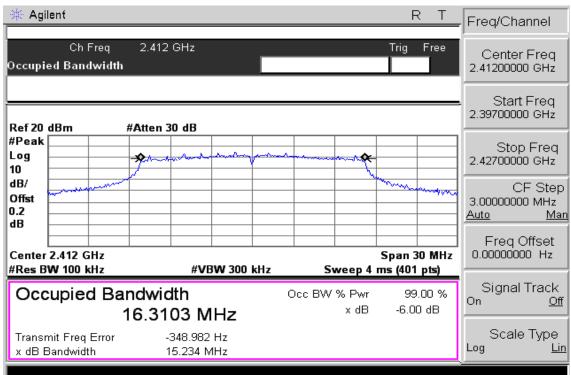


# 6dB Band Width Test Data CH-Mid

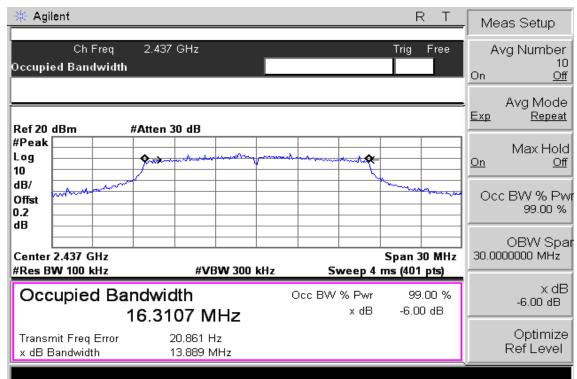



Report No.: EH\2010\70032 Issue Date: Oct. 22, 2010 Page: 36 of 97

# 6dB Band Width Test Data CH-High

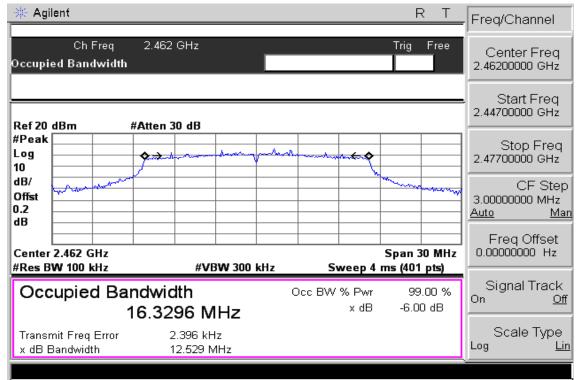





Report No.: EH\2010\70032 Issue Date: Oct. 22, 2010 Page: 37 of 97

# 802.11n\_20M

# 6dB Band Width Test Data CH-Low

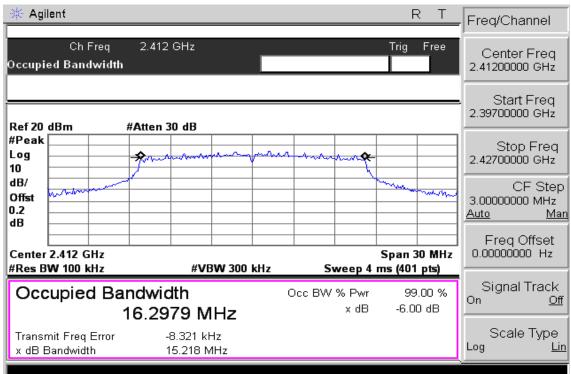

# 6dB Band Width Test Data CH-Mid

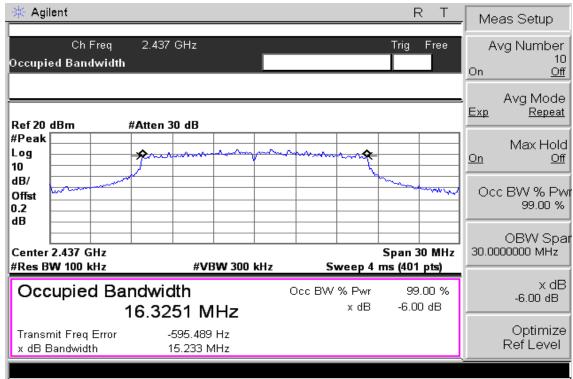


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. This test report cannot be reproduced, except in full, without prior written permission of the Company. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service (<u>www.sgs.com/terms\_and\_conditions.htm</u>) and Terms and Conditions for Electronic Documents is to be treated as an original within the meaning of UCP 600 article 20b. The authenticity of this document may be verified at <u>www.sgs.ossite.com/authentication</u>. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. SGS Taiwan Ltd. No.134, Wu Kung Road, Wuku Industrial Zone, Taipei County, Taiwan /台北縣五股工業區五工路 134 號



Report No.: EH\2010\70032 Issue Date: Oct. 22, 2010 Page: 38 of 97

# 6dB Band Width Test Data CH-High

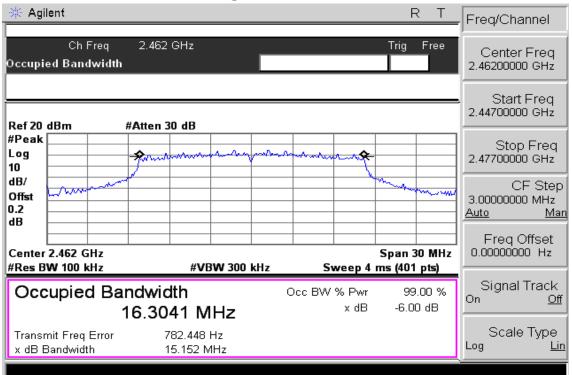

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. This test report cannot be reproduced, except in full, without prior written permission of the Company. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service (<u>www.sgs.com/terms\_and\_conditions.htm</u>) and Terms and Conditions for Electronic Documents is to be treated as an original within the meaning of UCP 600 article 20b. The authenticity of this document may be verified at <u>www.sgs.som/terms\_sind\_object</u>. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. No.134, Wu Kung Road, Wuku Industrial Zone, Taipei County, Taiwan /台北縣五股工業區五工路 134 號



Report No.: EH\2010\70032 Issue Date: Oct. 22, 2010 Page: 39 of 97

# 8 100KHz BANDWIDTH OF BAND EDGES MEASUREMENT

# 8.1 Standard Applicable:

According to §15.247(c), in any 100 KHz bandwidth outside the frequency bands in which the spread spectrum intentional radiator in operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100KHz bandwidth within the band that contains the highest level of the desired power, In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in15.209(a).

## 8.2 Measurement Equipment Used:

### 8.2.1 Conducted Emission at antenna port:

Refer to section 6.2 for details.

### 8.2.2 Radiated emission:

	9	66 Chamber			
EQUIPMENT	MFR	MODEL	SERIAL	LAST	CAL DUE.
ТҮРЕ		NUMBER	NUMBER	CAL.	
Spectrum Analyzer	R&S	FSP 40	100034	02/12/2010	02/11/2011
Loop antenna	MESSTEC	FLA30	03/10086	07/08/2009	07/07/2011
Bilog Antenna	SCHWAZBECK	VULB9160	9160-3136	11/19/2009	11/18/2010
Horn antenna	SCHWAZBECK	BBHA 9120D	9120D-673	05/09/2008	05/08/2010
Pre-Amplifier	Agilent	8447D	1937A02834	11/28/2009	11/27/2010
Pre-Amplifier	Agilent	8449B	3008A01973	01/05/2010	01/04/2011
Turn Table	HD	DT420	N/A	N.C.R	N.C.R
Antenna Tower	HD	MA240-N	240/657	N.C.R	N.C.R
Controller	HD	HD100	N/A	N.C.R	N.C.R
Low Loss Cable	HUBER+SUHNER	SUCOFLEX 104PEA-10M	10m	01/05/2010	01/04/2011
Low Loss Cable	HUBER+SUHNER	SUCOFLEX 104PEA-3M	3m	01/05/2010	01/04/2011
3m Site	SGS	966 chamber	N/A	11/08/2009	11/09/2010

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. This test report cannot be reproduced, except in full, without prior written permission of the Company. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service (<u>www.sgs.com/terms and conditions.htm</u>) and Terms and Conditions for Electronic Documents (<u>www.sgs.com/terms and conditions</u>) to the limitations of liability, indemnification and jurisdictional issues established therein. Even if printed this electronic document is to be treated as an original within the meaning of UCP 600 article 20b. The authenticity of this document may be verified at <u>www.sgs.com/authentication</u>. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. <u>SGS Taiwan Ltd.</u> No.134, Wu Kung Road, Wuku Industrial Zone, Taipei County, Taiwan /台 北縣 五殿 工業 區 五工路 134 號



Report No.: EH\2010\70032 Issue Date: Oct. 22, 2010 Page: 40 of 97


# 8.3 Test SET-UP:

### 8.3.1 Conducted Emission at antenna port:


Refer to section 6.3 for details.

### 8.3.2 Radiated emission:

(A) Radiated Emission Test Set-Up, Frequency Below 1000MHz

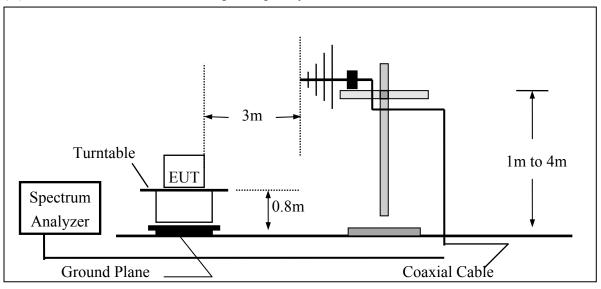

# (B) Radiated Emission Test Set-UP Frequency Over 1 GHz

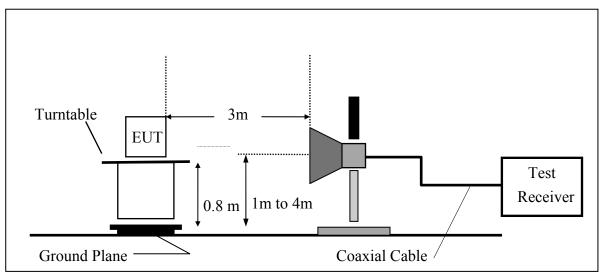

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. This test report cannot be reproduced, except in full, without prior written permission of the Company. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service (<u>www.sgs.com/terms\_and\_conditions.htm</u>) and Terms and Conditions for Electronic Documents (<u>www.sgs.com/terms\_e-documenthm</u>). Attention is drawn to the limitations of liability, indemnification and jurisdictional issues established therein. Even if printed this electronic document is to be treated as an original within the meaning of UCP 600 article 20b. The authenticity of this document may be verified at <u>www.sgs.com/authentication</u>. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exercise parties to a transaction from exercising all their rights and obligations under the transaction documents. <u>SGS Taiwan Ltd.</u> No.134, Wu Kung Road, Wuku Industrial Zone, Taipel County, Taiwan / 台北縣五股工業區五工路 134 號



# 8.4 Measurement Procedure:

- 1. Place the EUT on the table and set it in transmitting mode.
- 2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
- 3. Set center frequency of spectrum analyzer = operating frequency.
- 4. Set the spectrum analyzer as RBW, VBW=100KHz, Span=25MHz, Sweep = auto
- 5. Mark Peak, 2.390GHz and 2.4835GHz and record the max. level.
- 6. Repeat above procedures until all frequency measured were complete.

# 8.5 Field Strength Calculation:

The field strength is calculated by adding the Antenna Factor and Cable Factor and subtracting the Amplifier Gain and Duty Cycle Correction Factor(if any) from the measured reading. The basic equation with a sample calculation is as follows:

## $\mathbf{FS} = \mathbf{RA} + \mathbf{AF} + \mathbf{CL} - \mathbf{AG}$

Where	FS = Field Strength	CL = Cable Attenuation Factor (Cable Loss)
	RA = Reading Amplitude	AG = Amplifier Gain
	AF = Antenna Factor	

## 8.6 Measurement Result:

Note: Refer to next page spectrum analyzer data chart and tabular data sheets.


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. This test report cannot be reproduced, except in full, without prior written permission of the Company. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service (<u>www.sgs.com/terms and conditions.htm</u>) and Terms and Conditions for Electronic Documents (<u>www.sgs.com/terms and conditions</u>) to the limitations of liability, indemnification and jurisdictional issues established therein. Even if printed this electronic document is to be treated as an original within the meaning of UCP 600 article 20b. The authenticity of this document may be verified at <u>www.sgsonsite.com/authentication</u>. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. SGS Taiwan Ltd. No.134, Wu Kung Road, Wuku Industrial Zone, Taipei County, Taiwan /台北縣五股工業區五工路 134 號




Report No.: EH\2010\70032 Issue Date: Oct. 22, 2010 Page: 42 of 97

# 802.11b

# **Band Edges Test Data CH-Low**

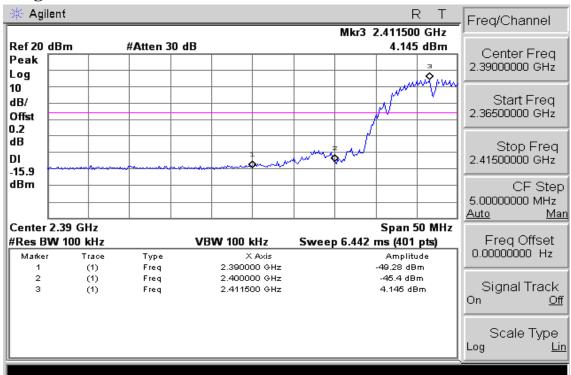

# **Band Edges Test Data CH-High**

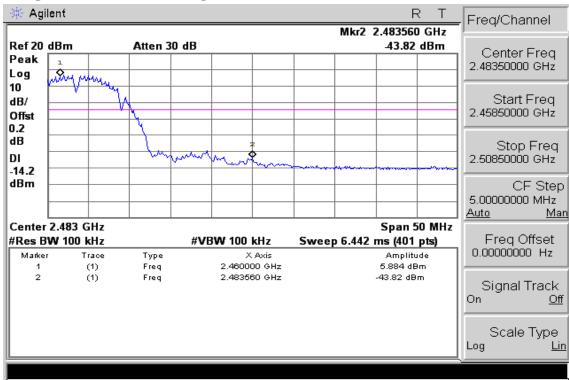

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. This test report cannot be reproduced, except in full, without prior written permission of the Company. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service (<u>www.sgs.com/terms\_and\_conditions.htm</u>) and Terms and Conditions for Electronic Documents is to be treated as an original within the meaning of UCP 600 article 20b. The authenticity of this document may be verified at <u>www.sgs.som/authentication</u>. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. SGS Taiwan Ltd. No.134, Wu Kung Road, Wuku Industrial Zone, Taipei County, Taiwan /台北縣五股工業區五工路 134 號

Member of SGS Group



Report No.: EH\2010\70032 Issue Date: Oct. 22, 2010 Page: 43 of 97

### Radiated Emission: 802.11 b mode

Operation Mode	TX CH Low	Test Date	Oct. 16, 2010
Fundamental Frequency	2412 MHz	Test By	Jazz
Temperature	25 °C	Pol	Ver.
Humidity	65 %		

	Peak	AV		Actu	al FS	Peak	AV		
Freq.		Reading			AV	Limit	Limit	0	Remark
(MHz)	(dBuV)	(abuv)	CF(dB)	$(\mathbf{d}\mathbf{B}\mathbf{u}\mathbf{V}/\mathbf{m})$	(dBuV/m)	(dBuV/m)	aBuv/n	n) ( <b>dB</b> )	
2390.00	45.60		-1.40	44.20		74.00	54.00	-9.80	Peak
Operation Fundamen Temperatu Humidity	tal Frequer					Test Test Pol	By	Oct. 16, 20 Jazz Hor.	)10
	Peak	AV		Actu	al FS	Peak	AV		
Freq. (MHz)	Reading (dBuV)	Reading			AV (dBuV/m)	Limit	Limit	0	Remark

(1	<b>(1112</b> )	(uDu V)	(uDu V)	CI (uD)		(uDu V/III)		(uDu V/III	( <b>uD</b> )	
23	90.00	39.90		-1.40	38.50		74.00	54.00	-15.50	Peak

#### Remark:

- (1) Data of measurement within this frequency range shown "-" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (2) Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
- (3) Spectrum Peak Setting: 1GHz- 40GHz, RBW= 1MHz, VBW= 3MHz, Sweep time= 200 ms.
- (4) Spectrum AV Setting: 1GHz- 40GHz, RBW= 1MHz, VBW= 10Hz, Sweep time= 200 ms.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. This test report cannot be reproduced, except in full, without prior written permission of the Company. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service (<u>www.sgs.com/terms\_and\_conditions.htm</u>) and Terms and Conditions for Electronic Document is to be treated as an original within the meaning of UCP 600 article 20b. The authenticity of this document may be verified at <u>www.sgsonsite.com/authentication</u>. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. SGS Taiwan Ltd. No.134, Wu Kung Road, Wuku Industrial Zone, Taipei County, Taiwan /台北縣五股工業區五工路 134 號



Report No.: EH\2010\70032 Issue Date: Oct. 22, 2010 Page: 44 of 97

### Radiated Emission: 802.11 b mode

Operation Mode	TX CH High	Test Date	Oct. 16, 2010
Fundamental Frequency	2462 MHz	Test By	Jazz
Temperature	25 °C	Pol	Ver.
Humidity	65 %		

	Peak	AV		Actu	al FS	Peak	AV		
Freq.	Reading	Reading			AV	Limit	Limit	0	Remark
(MHz)	(dBuV)	(dBuV)	CF(dB)	(dBuV/m)	) (dBuV/m)	(dBuV/m)	(dBuV/n	n) ( <b>dB</b> )	
2483.56	46.50		-1.00	45.50		74.00	54.00	-8.50	Peak
	N		TT TT' 1			т (		0 + 1	10
Operation			H High					Oct. 16, 20	010
Fundamen	tal Frequei	ncy 2462	MHz			Test	By	Jazz	
Temperatu	ire	25 °C				Pol		Hor.	
Humidity		65 %							
	Deele	A <b>T</b> 7		A _ 4		Deel	A <b>X</b> 7		
	Peak	AV		Actu	al FS	Peak	AV		
Frea.	Reading	Reading	Ant./CL	Peak	AV	Limit	Limit	Margin	Remark

Freq.	Reading	Reading	Ant./CL	Peak	AV	Limit	Limit	Margin	Remark
(MHz)	(dBuV)	(dBuV)	CF(dB)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dBuV/m)	( <b>dB</b> )	
2483.50	50.01	37.60	-1.00	49.01	36.60	74.00	54.00	-17.40	Av

Remark:

- (1) Data of measurement within this frequency range shown "-" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (2) Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
- (3) Spectrum Peak Setting: 1GHz- 40GHz, RBW= 1MHz, VBW= 3MHz, Sweep time= 200 ms.
- (4) Spectrum AV Setting: 1GHz- 40GHz, RBW= 1MHz, VBW= 10Hz, Sweep time= 200 ms.


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. This test report cannot be reproduced, except in full, without prior written permission of the Company. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service (<u>www.sgs.com/terms\_and\_conditions, htm</u>) and Terms and Conditions for Electronic Document is to be treated as an original within the meaning of UCP 600 article 20b. The authenticity of this document may be verified at <u>www.sgs.osm/terms\_and\_conditions</u>, if any. The Company's findings at the time of its intervention only and within the limits of client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. SGS Taiwan Ltd. No.134, Wu Kung Road, Wuku Industrial Zone, Taipei County, Taiwan /台北縣五股工業區五工路 134 號




Report No.: EH\2010\70032 Issue Date: Oct. 22, 2010 Page: 45 of 97

# 802.11g

# **Band Edges Test Data CH-Low**

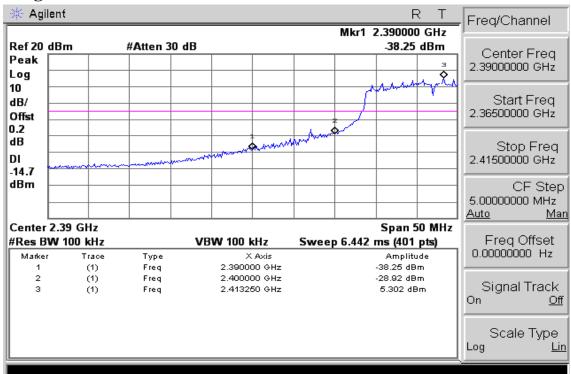

# **Band Edges Test Data CH-High**

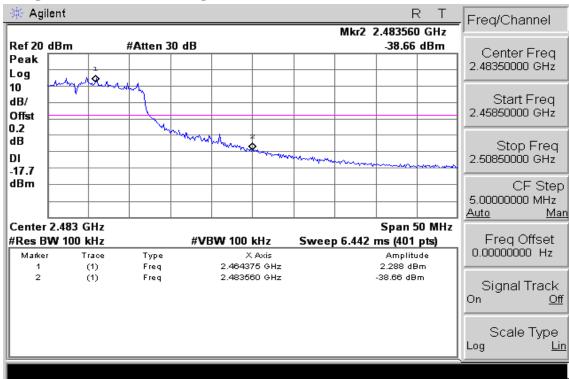

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. This test report cannot be reproduced, except in full, without prior written permission of the Company. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service (<u>www.sgs.com/terms\_and\_conditions.htm</u>) and Terms and Conditions for Electronic Document is to be treated as an original within the meaning of UCP 600 article 20b. The authenticity of this document may be verified at <u>www.sgs.som/attrms\_document</u> is followed that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. **SGS Taiwan Ltd.** No.134, Wu Kung Road, Wuku Industrial Zone, Taipei County, Taiwan /台北縣五股工業區五工路 134 號



Report No.: EH\2010\70032 Issue Date: Oct. 22, 2010 Page: 46 of 97

### Radiated Emission: 802.11 g mode

Operation Mode	TX CH Low	Test Date	Oct. 16, 2010
Fundamental Frequency	2412 MHz	Test By	Jazz
Temperature	25 °C	Pol	Ver.
Humidity	65 %		

	Peak	AV		Actu	al FS	Peak	AV		
Freq.	0	Reading			AV	Limit	Limit	0	Remark
(MHz)	(dBuV)	(dBuV)	CF(dB)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dBuV/n	n) (dB)	
2390.00	64.20	42.40	-1.40	62.80	41.00	74.00	54.00	-13.00	Av
Operation	Mode	ТХ С	H Low			Test	Date	Oct. 16, 20	)10
Fundamen	tal Frequer	ncy 2412	MHz			Test	By	Jazz	
Temperatu	ire	25 °C	2			Pol	-	Hor.	
Humidity		65 %							
	Peak	AV		Actu	al FS	Peak	AV		
<b>E</b> ma a				Deals		I Cak		Manain	D and a sul-

Freq.	Reading	Reading	Ant./CL	Peak	AV	Limit	Limit	Margin	Remark
(MHz)	(dBuV)	(dBuV)	CF(dB)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dBuV/m	( <b>dB</b> )	
2390.00	70.10	46.90	-1.40	68.70	45.50	74.00	54.00	-8.50	Av

### Remark:

- (1) Data of measurement within this frequency range shown "-" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (2) Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
- (3) Spectrum Peak Setting: 1GHz- 40GHz, RBW= 1MHz, VBW= 3MHz, Sweep time= 200 ms.
- (4) Spectrum AV Setting: 1GHz- 40GHz, RBW= 1MHz, VBW= 10Hz, Sweep time= 200 ms.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. This test report cannot be reproduced, except in full, without prior written permission of the Company. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service (<u>www.sgs.com/terms\_and\_conditions.htm</u>) and Terms and Conditions for Electronic Document is to be treated as an original within the meaning of UCP 600 article 20b. The authenticity of this document may be verified at <u>www.sgsonsite.com/authentication</u>. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. SGS Taiwan Ltd. No.134, Wu Kung Road, Wuku Industrial Zone, Taipei County, Taiwan /台北縣五股工業區五工路 134 號



Report No.: EH\2010\70032 Issue Date: Oct. 22, 2010 Page: 47 of 97

### Radiated Emission: 802.11 g mode

Operation Mode	TX CH High	Test Date	Oct. 16, 2010
Fundamental Frequency	2462 MHz	Test By	Jazz
Temperature	25 °C	Pol	Ver.
Humidity	65 %		

	Peak	AV		Actu	al FS	Peak	AV		
Freq.	Reading	Reading			AV	Limit	Limit	0	Remark
(MHz)	(dBuV)	(dBuV)	CF(dB)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dBuV/n	n) ( <b>dB</b> )	
2483.50	57.10	43.80	-1.00	56.10	42.80	74.00	54.00	-11.20	Av
Operation Fundamen Temperatu Humidity	tal Frequer					Test Test Pol		Oct. 16, 20 Jazz Hor.	010
	Peak	AV		Actu	al FS	Peak	AV		
Freq.	Reading	Reading			AV	Limit	Limit	0	Remark
(MHz)	(dBuV)	(dBuV)	CF(dB)	(dBuV/m)	(dBuV/m)	(dBuV/m)	dBuV/n	n) (dB)	

2483.50	61.70	46.50	-1.00	60.70	45.50	74.00	54.00	-8.50	Av

### Remark:

- (1) Data of measurement within this frequency range shown "-" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (2) Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
- (3) Spectrum Peak Setting: 1GHz- 40GHz, RBW= 1MHz, VBW= 3MHz, Sweep time= 200 ms.
- (4) Spectrum AV Setting: 1GHz- 40GHz, RBW= 1MHz, VBW= 10Hz, Sweep time= 200 ms.


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. This test report cannot be reproduced, except in full, without prior written permission of the Company. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service (<u>www.sgs.com/terms\_and\_conditions.htm</u>) and Terms and Conditions for Electronic Document is to be treated as an original within the meaning of UCP 600 article 20b. The authenticity of this document may be verified at <u>www.sgs.som/attrms\_document</u> is followed that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. **SGS Taiwan Ltd.** No.134, Wu Kung Road, Wuku Industrial Zone, Taipei County, Taiwan /台北縣五股工業區五工路 134 號




Report No.: EH\2010\70032 Issue Date: Oct. 22, 2010 Page: 48 of 97

## 802.11n\_20M

## **Band Edges Test Data CH-Low**

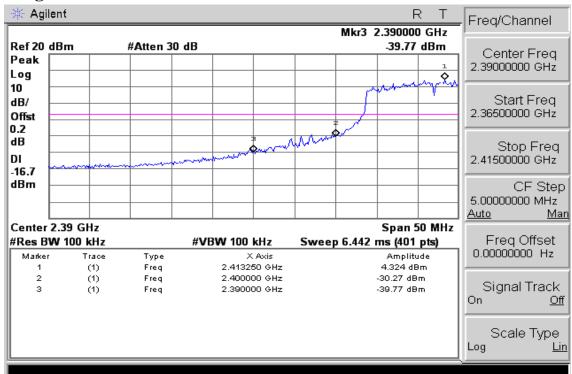

**Band Edges Test Data CH-High** 

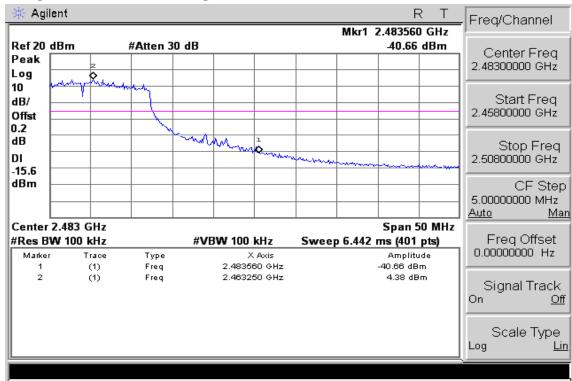

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. This test report cannot be reproduced, except in full, without prior written permission of the Company. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service (<u>www.sgs.com/terms\_and\_conditions.htm</u>) and Terms and Conditions for Electronic Documents is to be treated as an original within the meaning of UCP 600 article 20b. The authenticity of this document may be verified at <u>www.sgs.som/authentication</u>. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. SGS Taiwan Ltd. No.134, Wu Kung Road, Wuku Industrial Zone, Taipei County, Taiwan /台北縣五股工業區五工路 134 號



Report No.: EH\2010\70032 Issue Date: Oct. 22, 2010 Page: 49 of 97

### Radiated Emission: 802.11 n\_20M mode

Operation Mode	TX CH Low	Test Date	Oct. 16, 2010
Fundamental Frequency	2412 MHz	Test By	Jazz
Temperature	25 °C	Pol	Ver.
Humidity	65 %		

	Peak	AV		Actu	al FS	Peak	AV		
Freq.		Reading			AV	Limit	Limit	0	Remark
(MHz)	(dBuV)	(dBuV)	CF(dB)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dBuV/r	n) (dB)	
2390.00	63.50	43.10	-1.40	62.10	41.70	74.00	54.00	-12.30	Av
Operation	Mada	TVC	H Low			Test	Date	Oct. 16, 20	10
1								,	/10
Fundamen	tal Frequei	ncy 2412	MHz			Test	By	Jazz	
Temperatu	re	25 °C	2			Pol		Hor.	
Humidity		65 %							
	<b>.</b>	A <b>T</b> 7				<b>.</b>			
	Peak	AV		Actu	al FS	Peak	AV		
Frea.	Reading	Reading	Ant./CL	Peak	AV	Limit	Limit	Margin	Remark

Freq.	Reading	Reading	Ant./CL	Peak	AV	Limit	Limit	Margin	Remark
(MHz)	(dBuV)	(dBuV)	CF(dB)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dBuV/m)	( <b>dB</b> )	
2390.00	66.60	45.00	-1.40	65.20	43.60	74.00	54.00	-10.40	Av

Remark:

- (1) Data of measurement within this frequency range shown "-" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (2) Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
- (3) Spectrum Peak Setting: 1GHz- 40GHz, RBW= 1MHz, VBW= 3MHz, Sweep time= 200 ms.
- (4) Spectrum AV Setting: 1GHz- 40GHz, RBW= 1MHz, VBW= 10Hz, Sweep time= 200 ms.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. This test report cannot be reproduced, except in full, without prior written permission of the Company. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service (<u>www.sgs.com/terms\_and\_conditions.htm</u>) and Terms and Conditions for Electronic Document is to be treated as an original within the meaning of UCP 600 article 20b. The authenticity of this document may be verified at <u>www.sgsonsite.com/authentication</u>. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. SGS Taiwan Ltd. No.134, Wu Kung Road, Wuku Industrial Zone, Taipei County, Taiwan /台北縣五股工業區五工路 134 號



Report No.: EH\2010\70032 Issue Date: Oct. 22, 2010 Page: 50 of 97

### Radiated Emission: 802.11 n\_20M mode

Operation Mode	TX CH High	Test Date	Oct. 16, 2010
Fundamental Frequency	2462 MHz	Test By	Jazz
Temperature	25 °C	Pol	Ver.
Humidity	65 %		

	Peak	AV		Actu	ial FS	Peak	AV		
Freq.	0	Reading		Peak	AV	Limit	Limit	0	Remark
(MHz)	(dBuV)	(dBuV)	CF(dB)	(dBuV/m	) (dBuV/m)	(dBuV/m)	(dBuV/r	n) (dB)	
2483.50	55.50	39.90	-1.00	54.50	38.90	74.00	54.00	-15.10	Av
Operation Fundamen Temperatu Humidity	tal Frequer					Test Test Pol	Date By	Oct. 16, 20 Jazz Hor.	010
Freq.	Peak Reading	AV Reading	Ant./CL		ual FS AV	Peak Limit	AV Limit	Margin	Remark
(MHz)	(dBuV)	0			) (dBuV/m)			8	

2483.50	61.50	43.60	-1.00	60.50	42.60	74.00	54.00	-11.40	Av	

### Remark:

- (1) Data of measurement within this frequency range shown "-" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (2) Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
- (3) Spectrum Peak Setting: 1GHz- 40GHz, RBW= 1MHz, VBW= 3MHz, Sweep time= 200 ms.
- (4) Spectrum AV Setting: 1GHz- 40GHz, RBW= 1MHz, VBW= 10Hz, Sweep time= 200 ms.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. This test report cannot be reproduced, except in full, without prior written permission of the Company. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service (<u>www.sgs.com/terms\_and\_conditions.htm</u>) and Terms and Conditions for Electronic Document is to be treated as an original within the meaning of UCP 600 article 20b. The authenticity of this document may be verified at <u>www.sgsonsite.com/authentication</u>. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. SGS Taiwan Ltd. No.134, Wu Kung Road, Wuku Industrial Zone, Taipei County, Taiwan /台北縣五股工業區五工路 134 號



Report No.: EH\2010\70032 Issue Date: Oct. 22, 2010 Page: 51 of 97

# 9 SPURIOUS RADIATED EMISSION TEST

## 9.1 Standard Applicable

According to §15.247(c), all other emissions outside these bands shall not exceed the general radiated emission limits specified in §15.209(a). And according to §15.33(a)(1), for an intentional radiator operates below 10GHz, the frequency range of measurements: to the tenth harmonic of the highest fundamental frequency or to 40GHz, whichever is lower.

### 9.2 Measurement Equipment Used:

### 9.2.1 Conducted Emission at antenna port:

Refer to section 6.2 for details.

### 9.2.2 Radiated emission:

Refer to section 7.2 for details.

### 9.3 Test SET-UP:

# 9.3.1 Conducted Emission at antenna port:

Refer to section 6.3 for details.

## 9.3.2 Radiated emission:

Refer to section 7.3 for details.

## 9.4 Measurement Procedure:

- 1. The EUT was placed on a turn table which is 0.8m above ground plane.
- 2. The turn table shall rotate 360 degrees to determine the position of maximum emission level.
- 3. EUT is set 3m away from the receiving antenna which varied from 1m to 4m to find out the highest emissions.
- 4. When measurement procedures for electric field radiated emissions above 1 GHz the EUT measurement is to be made "while keeping the antenna in the 'cone of radiation' from that area and pointed at the area both in azimuth and elevation, with polarization oriented for maximum response." is still within the 3dB illumination BW of the measurement antenna.
- 5. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
- 6. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
- 7. Repeat above procedures until all frequency measured were complete.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. This test report cannot be reproduced, except in full, without prior written permission of the Company. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service (<u>www.sgs.com/terms\_and\_conditions\_htm</u>) and Terms and Conditions for Electronic Documents (<u>www.sgs.com/terms\_edocument.htm</u>). Attention is drawn to the limitations of liability, indemnification and jurisdictional issues established therein. Even if printed this electronic document is to be treated as an original within the meaning of UCP 600 article 20b. The authenticity of this document may be verified at <u>www.sgs.com/authentication</u>. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. No.134, Wu Kung Road, Wuku Industrial Zone, Taipei County, Taiwan /台 北縣五殿工業區五工路 134 號



# 9.5 Field Strength Calculation

The field strength is calculated by adding the Antenna Factor and Cable Factor and subtracting the Amplifier Gain and Duty Cycle Correction Factor(if any) from the measured reading. The basic equation with a sample calculation is as follows:

## $\mathbf{FS} = \mathbf{RA} + \mathbf{AF} + \mathbf{CL} - \mathbf{AG}$

Where	FS = Field Strength	CL = Cable Attenuation Factor (Cable Loss)
	RA = Reading Amplitude	AG = Amplifier Gain
	AF = Antenna Factor	

### 9.6 Measurement Result:


Note: Refer to next page spectrum analyzer data chart and tabular data sheets.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. This test report cannot be reproduced, except in full, without prior written permission of the Company. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service (<u>www.sgs.com/terms and conditions.htm</u>) and Terms and Conditions for Electronic Documents (<u>www.sgs.com/terms and conditions.htm</u>) and Terms and Conditions for Electronic document is to be treated as an original within the meaning of UCP 600 article 20b. The authenticity of this document may be verified at <u>www.sgsonsite.com/authentication</u>. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. SGS Taiwan Ltd. No.134, Wu Kung Road, Wuku Industrial Zone, Taipei County, Taiwan /台北縣五股工業區五工路 134 號




Report No.: EH\2010\70032 Issue Date: Oct. 22, 2010 Page: 53 of 97

# Conducted Spurious Emission Measurement Result (802.11b) Ch Low 30MHz – 3GHz

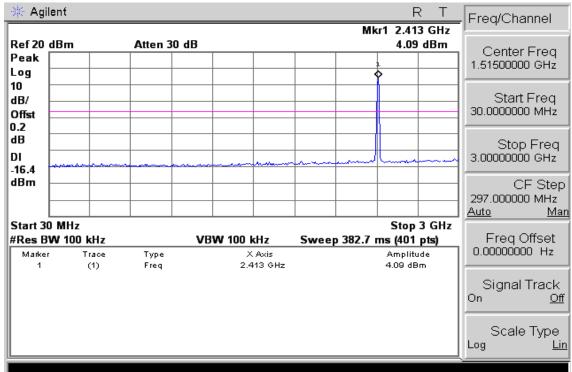

# Ch Low 3GHz – 26.5GHz

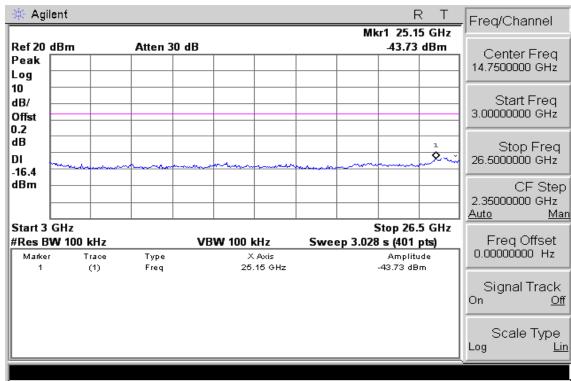


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. This test report cannot be reproduced, except in full, without prior written permission of the Company. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service (<u>www.sgs.com/terms and conditions.htm</u>) and Terms and Conditions for Electronic Documents (<u>www.sgs.com/terms and conditions</u>) to the limitations of liability, indemnification and jurisdictional issues established therein. Even if printed this electronic document is to be treated as an original within the meaning of UCP 600 article 20b. The authenticity of this document may be verified at <u>www.sgs.com/authentication</u>. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. <u>SGS Taiwan Ltd.</u> No.134, Wu Kung Road, Wuku Industrial Zone, Taipei County, Taiwan /台 北縣 五殿 工業 區 五工路 134 號




Report No.: EH\2010\70032 Issue Date: Oct. 22, 2010 Page: 54 of 97

# Ch Mid 30MHz – 3GHz

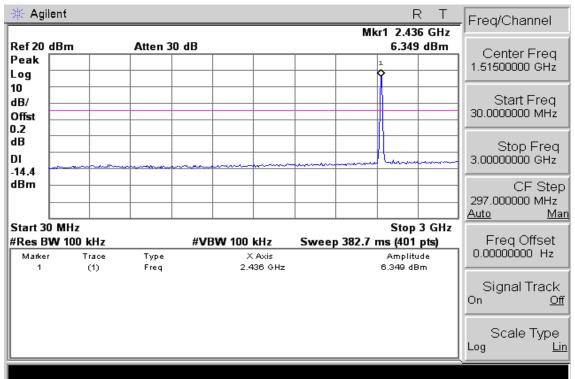

# Ch Mid 3GHz – 26.5GHz

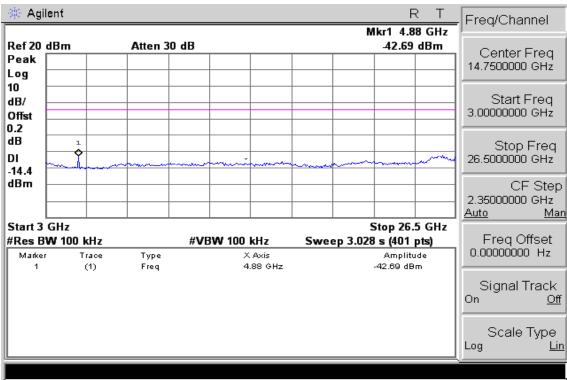


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. This test report cannot be reproduced, except in full, without prior written permission of the Company. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service (<u>www.sgs.com/terms and conditions.htm</u>) and Terms and Conditions for Electronic Documents (<u>www.sgs.com/terms and conditions</u>) to the limitations of liability, indemnification and jurisdictional issues established therein. Even if printed this electronic document is to be treated as an original within the meaning of UCP 600 article 20b. The authenticity of this document may be verified at <u>www.sgsonsite.com/authentication</u>. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. SGS Taiwan Ltd. No.134, Wu Kung Road, Wuku Industrial Zone, Taipei County, Taiwan /台北縣五股工業區五工路 134 號

Member of SGS Group




Report No.: EH\2010\70032 Issue Date: Oct. 22, 2010 Page: 55 of 97

# Ch High 30MHz – 3GHz

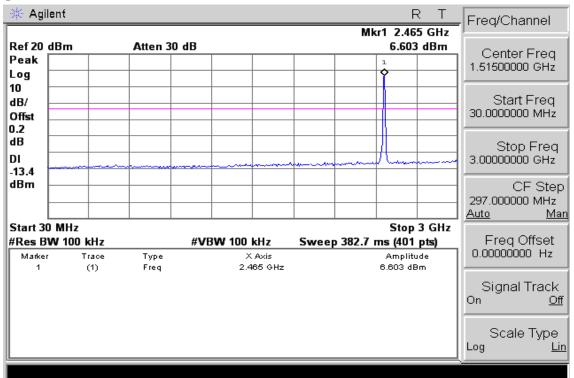

# Ch High 3GHz – 26.5GHz

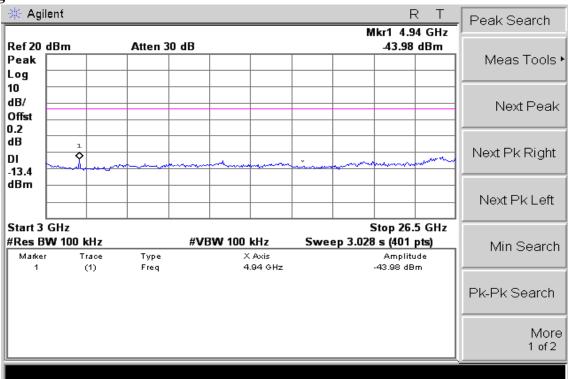


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. This test report cannot be reproduced, except in full, without prior written permission of the Company. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service (<u>www.sgs.com/terms and conditions.htm</u>) and Terms and Conditions for Electronic Documents (<u>www.sgs.com/terms and conditions</u>) to the limitations of liability, indemnification and jurisdictional issues established therein. Even if printed this electronic document is to be treated as an original within the meaning of UCP 600 article 20b. The authenticity of this document may be verified at <u>www.sgsonsite.com/authentication</u>. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. SGS Taiwan Ltd. No.134, Wu Kung Road, Wuku Industrial Zone, Taipei County, Taiwan /台北縣五股工業區五工路 134 號




Report No.: EH\2010\70032 Issue Date: Oct. 22, 2010 Page: 56 of 97

# Conducted Spurious Emission Measurement Result (802.11g) Ch Low 30MHz – 3GHz

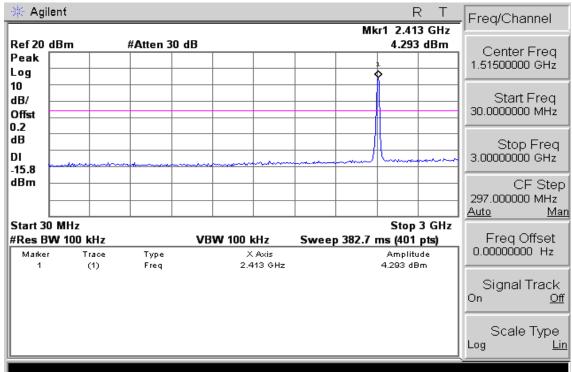

# Ch Low 3GHz – 26.5GHz

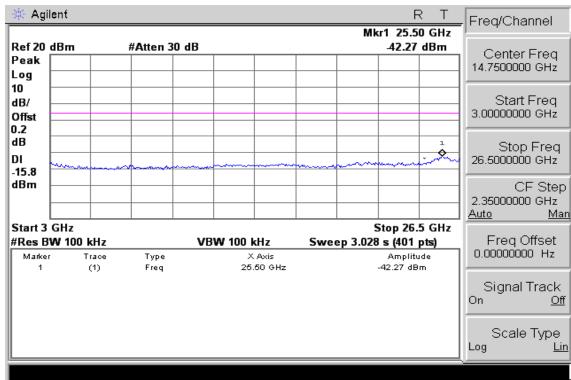


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. This test report cannot be reproduced, except in full, without prior written permission of the Company. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service (<u>www.sgs.com/terms and conditions.htm</u>) and Terms and Conditions for Electronic Documents (<u>www.sgs.com/terms and conditions</u>) to the limitations of liability, indemnification and jurisdictional issues established therein. Even if printed this electronic document is to be treated as an original within the meaning of UCP 600 article 20b. The authenticity of this document may be verified at <u>www.sgs.com/authentication</u>. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. <u>SGS Taiwan Ltd.</u> No.134, Wu Kung Road, Wuku Industrial Zone, Taipei County, Taiwan /台 北縣 五殿 工業 區 五工路 134 號




Report No.: EH\2010\70032 Issue Date: Oct. 22, 2010 Page: 57 of 97

# Ch Mid 30MHz – 3GHz

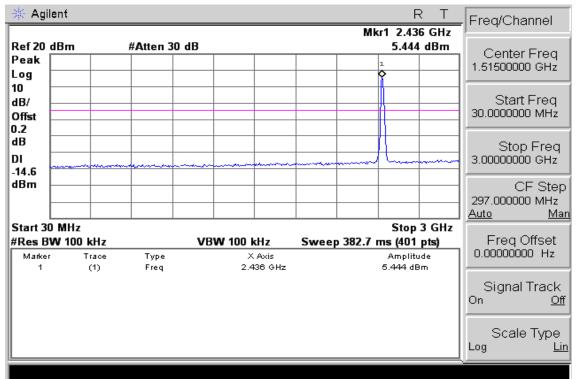

# Ch Mid 3GHz – 26.5GHz

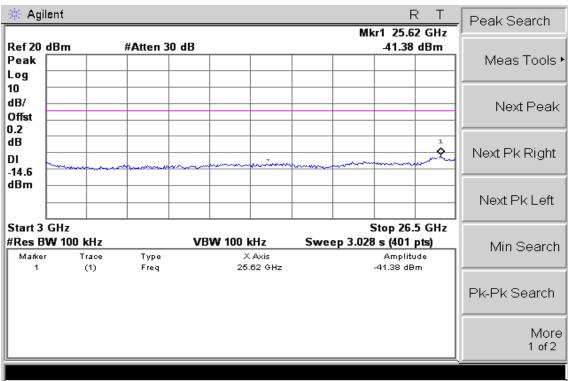


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. This test report cannot be reproduced, except in full, without prior written permission of the Company. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service (<u>www.sgs.com/terms\_and\_conditions.htm</u>) and Terms and Conditions for Electronic Documents is to be treated as an original within the meaning of UCP 600 article 20b. The authenticity of this document may be verified at <u>www.sgs.ossite.com/authentication</u>. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. SGS Taiwan Ltd. No.134, Wu Kung Road, Wuku Industrial Zone, Taipei County, Taiwan /台北縣五股工業區五工路 134 號

Member of SGS Group




Report No.: EH\2010\70032 Issue Date: Oct. 22, 2010 Page: 58 of 97

# Ch High 30MHz – 3GHz

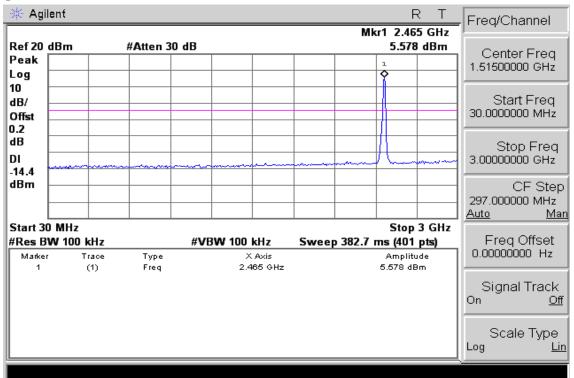

# Ch High 3GHz – 26.5GHz

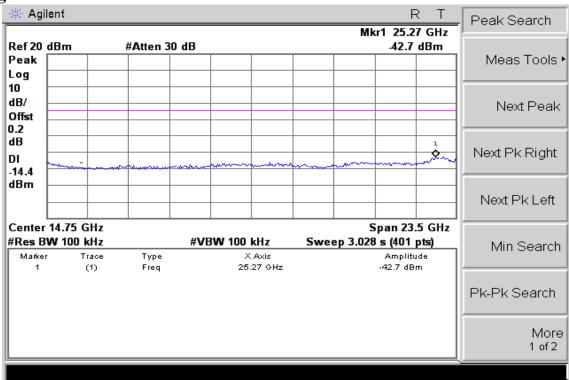


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. This test report cannot be reproduced, except in full, without prior written permission of the Company. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service (<u>www.sgs.com/terms and conditions.htm</u>) and Terms and Conditions for Electronic Documents (<u>www.sgs.com/terms and conditions</u>) to the limitations of liability, indemnification and jurisdictional issues established therein. Even if printed this electronic document is to be treated as an original within the meaning of UCP 600 article 20b. The authenticity of this document may be verified at <u>www.sgsonsite.com/authentication</u>. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. SGS Taiwan Ltd. No.134, Wu Kung Road, Wuku Industrial Zone, Taipei County, Taiwan /台北縣五股工業區五工路 134 號




Report No.: EH\2010\70032 Issue Date: Oct. 22, 2010 Page: 59 of 97

# Conducted Spurious Emission Measurement Result (802.11n\_20M) Ch Low 30MHz – 3GHz

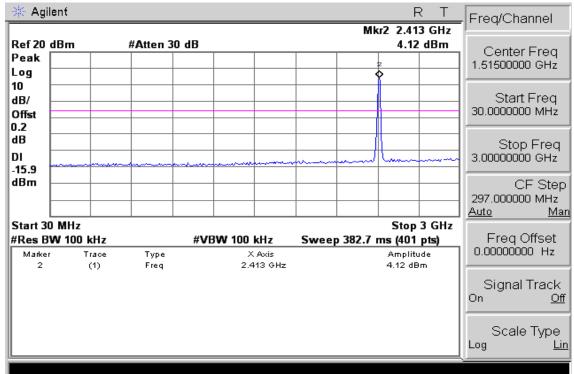

# Ch Low 3GHz – 26.5GHz

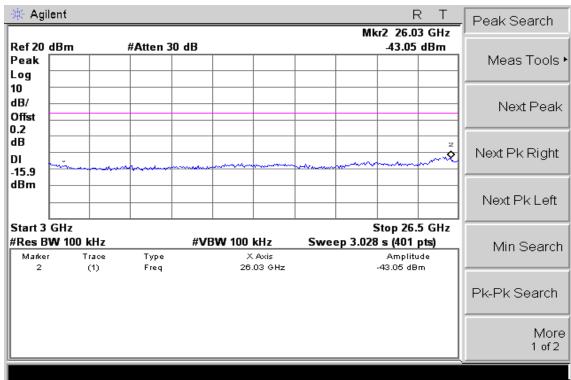


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. This test report cannot be reproduced, except in full, without prior written permission of the Company. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service (<u>www.sgs.com/terms\_and\_conditions.htm</u>) and Terms and Conditions for Electronic Documents is to be treated as an original within the meaning of UCP 600 article 20b. The authenticity of this document may be verified at <u>www.sgs.ossite.com/authentication</u>. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. SGS Taiwan Ltd. No.134, Wu Kung Road, Wuku Industrial Zone, Taipei County, Taiwan /台北縣五股工業區五工路 134 號




Report No.: EH\2010\70032 Issue Date: Oct. 22, 2010 Page: 60 of 97

# Ch Mid 30MHz – 3GHz

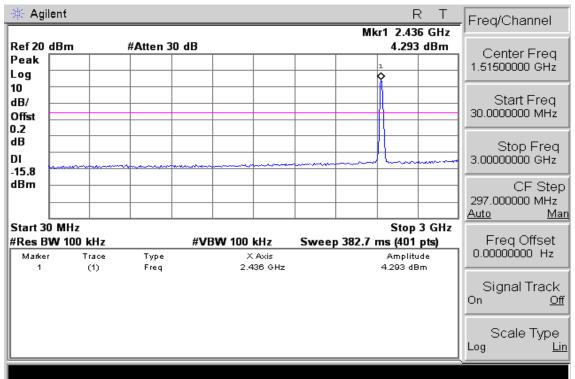

# Ch Mid 3GHz – 26.5GHz

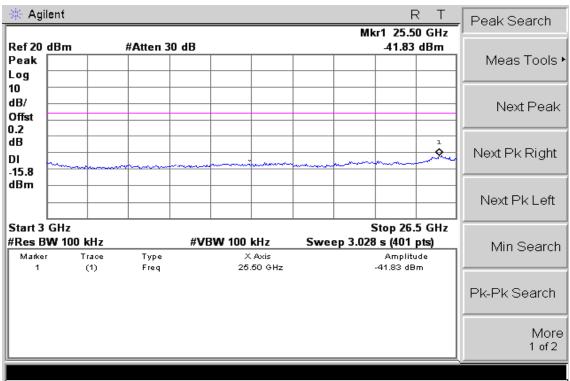


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. This test report cannot be reproduced, except in full, without prior written permission of the Company. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service (<u>www.sgs.com/terms\_and\_conditions.htm</u>) and Terms and Conditions for Electronic Documents is to be treated as an original within the meaning of UCP 600 article 20b. The authenticity of this document may be verified at <u>www.sgs.ossite.com/authentication</u>. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. SGS Taiwan Ltd. No.134, Wu Kung Road, Wuku Industrial Zone, Taipei County, Taiwan /台北縣五股工業區五工路 134 號




Report No.: EH\2010\70032 Issue Date: Oct. 22, 2010 Page: 61 of 97

# Ch High 30MHz – 3GHz

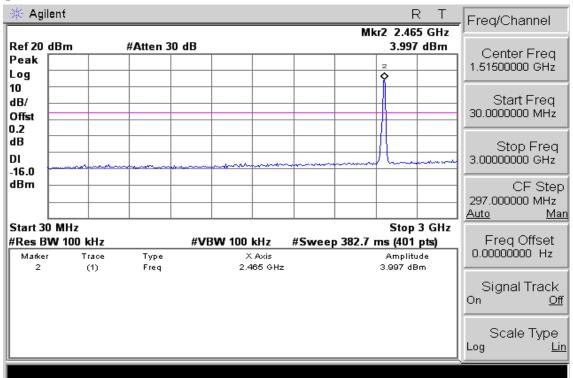

# Ch High 3GHz – 26.5GHz

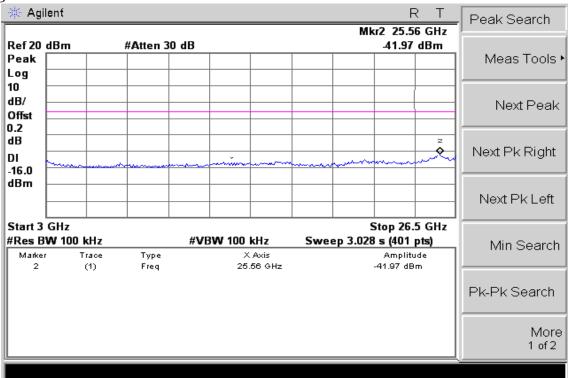

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. This test report cannot be reproduced, except in full, without prior written permission of the Company. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service (<u>www.sgs.com/terms and conditions.htm</u>) and Terms and Conditions for Electronic Documents (<u>www.sgs.com/terms and conditions</u>) to the limitations of liability, indemnification and jurisdictional issues established therein. Even if printed this electronic document is to be treated as an original within the meaning of UCP 600 article 20b. The authenticity of this document may be verified at <u>www.sgsonsite.com/authentication</u>. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. SGS Taiwan Ltd. No.134, Wu Kung Road, Wuku Industrial Zone, Taipei County, Taiwan /台北縣五股工業區五工路 134 號



Report No.: EH\2010\70032 Issue Date: Oct. 22, 2010 Page: 62 of 97

### Radiated Spurious Emission Measurement Result (below 1GHz) (802.11b)

Operation Mode	802.11b TX CH Low	Test Date	Oct. 16, 2010
Fundamental Frequency	2412MHz	Test By	Jazz
Temperature	25 °C	Pol	Ver./Hor
Humidity	65 %		

Freq.	Ant.Pol.	Detector Mode	Reading	Factor	Actual FS	Limit3m	Safe Margin
(MHz)	H/V	(PK/QP)	(dBuV)	( <b>dB</b> )	(dBuV/m)	(dBuV/m)	( <b>dB</b> )
36.79	V	Peak	49.66	-14.36	35.30	40.00	-4.70
101.78	V	Peak	49.64	-16.87	32.77	43.50	-10.73
158.04	V	Peak	33.14	-13.28	19.86	43.50	-23.64
337.49	V	Peak	32.62	-12.05	20.57	46.00	-25.43
662.44	V	Peak	33.42	-5.01	28.41	46.00	-17.59
780.78	V	Peak	33.18	-3.47	29.71	46.00	-16.29
38.73	Н	Peak	45.37	-13.84	31.53	40.00	-8.47
92.08	Н	Peak	45.64	-17.38	28.26	43.50	-15.24
148.34	Н	Peak	33.4	-12.9	20.50	43.50	-23.00
424.79	Н	Peak	32.63	-9.27	23.36	46.00	-22.64
633.34	Н	Peak	33.26	-5.32	27.94	46.00	-18.06
749.74	Н	Peak	32.94	-4.3	28.64	46.00	-17.36

Remark :

- 1 Measuring frequencies from 30 MHz to the 1GHz  $\circ$
- 2 Radiated emissions measured in frequency range from 30 MHz to 1000MHz were made with an instrument using Peak/QP detector mode.
- 3 Data of measurement within this frequency range shown "-" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- 4 The IF bandwidth of SPA between 30MHz to 1GHz was 100KHz.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. This test report cannot be reproduced, except in full, without prior written permission of the Company. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品催保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service (<u>www.sqs.com/terms\_and\_conditions.htm</u>) and Terms and Conditions for Electronic Documents (<u>www.sqs.com/terms\_e-document.htm</u>). Attention is drawn to the limitations of liability, indemnification and jurisdictional issues established therein. Even if printed this electronic document is to be treated as an original within the meaning of UCP 600 article 200b. The authenticity of this document may be verified at <u>www.sqs.onsite.com/authentication</u>. Any holder of this document is to be treated hereon reflects the Company's findings at the time of its intervention only and within the limits of client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. SGS Taiwan Ltd. No.134, Wu Kung Road, Wuku Industrial Zone, Taipei County, Taiwan /台北縣五股工業區五工路 134 號



Report No.: EH\2010\70032 Issue Date: Oct. 22, 2010 Page: 63 of 97

## Radiated Spurious Emission Measurement Result (below 1GHz) (802.11b)

Operation Mode	802.11b TX CH Mid	Test Date	Oct. 16, 2010
Fundamental Frequency	2437MHz	Test By	Jazz
Temperature	25 °C	Pol	Ver./Hor
Humidity	65 %		

Freq.	Ant.Pol.	Detector Mode	Reading	Factor	Actual FS	Limit3m	Safe Margin
(MHz)	H/V	(PK/QP)	(dBuV)	( <b>dB</b> )	(dBuV/m)	(dBuV/m)	( <b>dB</b> )
36.79	V	Peak	49.47	-14.36	35.11	40.00	-4.89
101.78	V	Peak	49.5	-16.87	32.63	43.50	-10.87
143.49	V	Peak	35.64	-13.42	22.22	43.50	-21.28
318.09	V	Peak	33.84	-12.59	21.25	46.00	-24.75
435.46	V	Peak	32.41	-8.9	23.51	46.00	-22.49
649.83	V	Peak	33.17	-4.95	28.22	46.00	-17.78
36.79	Н	Peak	46.1	-14.36	31.74	40.00	-8.26
92.08	Н	Peak	46.64	-17.38	29.26	43.50	-14.24
143.49	Н	Peak	44.28	-13.42	30.86	43.50	-12.64
378.23	Н	Peak	32.76	-10.79	21.97	46.00	-24.03
514.03	Н	Peak	32.93	-8.3	24.63	46.00	-21.37
730.34	Н	Peak	33.15	-4.54	28.61	46.00	-17.39

### Remark :

- 1 Measuring frequencies from 30 MHz to the 1GHz  $\circ$
- 2 Radiated emissions measured in frequency range from 30 MHz to 1000MHz were made with an instrument using Peak/QP detector mode.
- 3 Data of measurement within this frequency range shown "-" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- 4 The IF bandwidth of SPA between 30MHz to 1GHz was 100KHz.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. This test report cannot be reproduced, except in full, without prior written permission of the Company. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品催保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service (<u>www.sgs.com/terms\_and\_conditions.htm</u>) and Terms and Conditions for Electronic Documents (<u>www.sgs.com/terms\_e-document.htm</u>). Attention is drawn to the limitations of liability, indemnification and jurisdictional issues established therein. Even if printed this electronic document is to be treated as an original within the meaning of UCP 600 article 20b. The authenticity of this document may be verified at <u>www.sgs.com/terms\_eta/uthentication</u>. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. SGS Taiwan Ltd. No.134, Wu Kung Road, Wuku Industrial Zone, Taipei County, Taiwan /台北縣五股工業區五工路 134 號



Report No.: EH\2010\70032 Issue Date: Oct. 22, 2010 Page: 64 of 97

## Radiated Spurious Emission Measurement Result (below 1GHz) (802.11b)

Operation Mode	802.11b TX CH High	Test Date	Oct. 16, 2010
Fundamental Frequency	2462MHz	Test By	Jazz
Temperature	25 °C	Pol	Ver./Hor
Humidity	65 %		

Freq.	Ant.Pol.	Detector Mode	Reading	Factor	Actual FS	Limit3m	Safe Margin
(MHz)	H/V	(PK/QP)	(dBuV)	( <b>dB</b> )	(dBuV/m)	(dBuV/m)	( <b>dB</b> )
36.79	V	Peak	49.17	-14.36	34.81	40.00	-5.19
92.08	V	Peak	51.13	-17.38	33.75	43.50	-9.75
143.49	V	Peak	33.74	-13.42	20.32	43.50	-23.18
400.54	V	Peak	32.21	-9.99	22.22	46.00	-23.78
657.59	V	Peak	32.83	-4.98	27.85	46.00	-18.15
832.19	V	Peak	33.32	-2.37	30.95	46.00	-15.05
38.73	Н	Peak	46.64	-13.84	32.80	40.00	-7.20
92.08	Н	Peak	46.2	-17.38	28.82	43.50	-14.68
284.14	Н	Peak	33.22	-13.28	19.94	46.00	-26.06
473.29	Н	Peak	32.64	-8.56	24.08	46.00	-21.92
649.83	Н	Peak	32.9	-4.95	27.95	46.00	-18.05
788.54	Н	Peak	33.2	-3.3	29.90	46.00	-16.10

### Remark :

- 1 Measuring frequencies from 30 MHz to the 1GHz  $\circ$
- 2 Radiated emissions measured in frequency range from 30 MHz to 1000MHz were made with an instrument using Peak/QP detector mode.
- 3 Data of measurement within this frequency range shown "-" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- 4 The IF bandwidth of SPA between 30MHz to 1GHz was 100KHz.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. This test report cannot be reproduced, except in full, without prior written permission of the Company. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品催保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service (<u>www.sqs.com/terms\_and\_conditions.htm</u>) and Terms and Conditions for Electronic Documents (<u>www.sqs.com/terms\_e-document.htm</u>). Attention is drawn to the limitations of liability, indemnification and jurisdictional issues established therein. Even if printed this electronic document is to be treated as an original within the meaning of UCP 600 article 200b. The authenticity of this document may be verified at <u>www.sqs.onsite.com/authentication</u>. Any holder of this document is to be treated hereon reflects the Company's findings at the time of its intervention only and within the limits of client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. SGS Taiwan Ltd. No.134, Wu Kung Road, Wuku Industrial Zone, Taipei County, Taiwan /台北縣五股工業區五工路 134 號



Report No.: EH\2010\70032 Issue Date: Oct. 22, 2010 Page: 65 of 97

## Radiated Spurious Emission Measurement Result (below 1GHz) (802.11g)

Operation Mode	802.11g TX CH Low	Test Date	Oct. 16, 2010
Fundamental Frequency	2412MHz	Test By	Jazz
Temperature	25 °C	Pol	Ver./Hor
Humidity	65 %		

	Freq.	Ant.Pol.	Detector Mode	Reading	Factor	Actual FS	Limit3m	Safe Margin
_	(MHz)	H/V	(PK/QP)	(dBuV)	( <b>dB</b> )	(dBuV/m)	(dBuV/m)	( <b>dB</b> )
	38.73	V	Peak	47.9	-13.84	34.06	40.00	-5.94
	92.08	V	Peak	50.1	-17.38	32.72	43.50	-10.78
	148.34	V	Peak	32.82	-12.9	19.92	43.50	-23.58
	460.68	V	Peak	32.56	-8.61	23.95	46.00	-22.05
	633.34	V	Peak	32.3	-5.32	26.98	46.00	-19.02
	812.79	V	Peak	32.79	-2.74	30.05	46.00	-15.95
	39.7	Н	Peak	44.5	-13.73	30.77	40.00	-9.23
	92.08	Н	Peak	46.53	-17.38	29.15	43.50	-14.35
	148.34	Н	Peak	33.45	-12.9	20.55	43.50	-22.95
	269.59	Н	Peak	33.48	-13.55	19.93	46.00	-26.07
	424.79	Н	Peak	32.82	-9.27	23.55	46.00	-22.45
	644.98	Н	Peak	33.45	-5.1	28.35	46.00	-17.65

### Remark :

- 1 Measuring frequencies from 30 MHz to the 1GHz  $\circ$
- 2 Radiated emissions measured in frequency range from 30 MHz to 1000MHz were made with an instrument using Peak/QP detector mode.
- 3 Data of measurement within this frequency range shown "-" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- 4 The IF bandwidth of SPA between 30MHz to 1GHz was 100KHz.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. This test report cannot be reproduced, except in full, without prior written permission of the Company. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品催保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service (<u>www.sqs.com/terms\_and\_conditions.htm</u>) and Terms and Conditions for Electronic Documents (<u>www.sqs.com/terms\_e-document.htm</u>). Attention is drawn to the limitations of liability, indemnification and jurisdictional issues established therein. Even if printed this electronic document is to be treated as an original within the meaning of UCP 600 article 200b. The authenticity of this document may be verified at <u>www.sqs.onsite.com/authentication</u>. Any holder of this document is to be treated hereon reflects the Company's findings at the time of its intervention only and within the limits of client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. SGS Taiwan Ltd. No.134, Wu Kung Road, Wuku Industrial Zone, Taipei County, Taiwan /台北縣五股工業區五工路 134 號



Report No.: EH\2010\70032 Issue Date: Oct. 22, 2010 Page: 66 of 97

## Radiated Spurious Emission Measurement Result (below 1GHz) (802.11g)

Operation Mode	802.11g TX CH Mid	Test Date	Oct. 16, 2010
Fundamental Frequency	2437MHz	Test By	Jazz
Temperature	25 °C	Pol	Ver./Hor
Humidity	65 %		

Freq.	Ant.Pol.	Detector Mode	Reading	Factor	Actual FS	Limit3m	Safe Margin
(MHz)	H/V	(PK/QP)	(dBuV)	( <b>dB</b> )	(dBuV/m)	(dBuV/m)	( <b>dB</b> )
36.79	V	Peak	49.76	-14.36	35.40	40.00	-4.60
92.08	V	Peak	50.19	-17.38	32.81	43.50	-10.69
153.19	V	Peak	33.22	-13	20.22	43.50	-23.28
339.43	V	Peak	32.44	-12.03	20.41	46.00	-25.59
575.14	V	Peak	32.68	-6.83	25.85	46.00	-20.15
795.33	V	Peak	33.23	-3.15	30.08	46.00	-15.92
38.73	Н	Peak	45.4	-13.84	31.56	40.00	-8.44
92.08	Н	Peak	46.97	-17.38	29.59	43.50	-13.91
148.34	Н	Peak	33.02	-12.9	20.12	43.50	-23.38
426.73	Н	Peak	32.52	-9.21	23.31	46.00	-22.69
618.79	Н	Peak	33.21	-5.64	27.57	46.00	-18.43
833.16	Н	Peak	32.26	-2.29	29.97	46.00	-16.03

### Remark :

- 1 Measuring frequencies from 30 MHz to the 1GHz  $\circ$
- 2 Radiated emissions measured in frequency range from 30 MHz to 1000MHz were made with an instrument using Peak/QP detector mode.
- 3 Data of measurement within this frequency range shown "-" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- 4 The IF bandwidth of SPA between 30MHz to 1GHz was 100KHz.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. This test report cannot be reproduced, except in full, without prior written permission of the Company. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品催保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service (<u>www.sgs.com/terms\_and\_conditions.htm</u>) and Terms and Conditions for Electronic Documents (<u>www.sgs.com/terms\_e-document.htm</u>). Attention is drawn to the limitations of liability, indemnification and jurisdictional issues established therein. Even if printed this electronic document is to be treated as an original within the meaning of UCP 600 article 20b. The authenticity of this document may be verified at <u>www.sgs.com/terms\_eta/uthentication</u>. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. SGS Taiwan Ltd. No.134, Wu Kung Road, Wuku Industrial Zone, Taipei County, Taiwan /台北縣五股工業區五工路 134 號



Report No.: EH\2010\70032 Issue Date: Oct. 22, 2010 Page: 67 of 97

## Radiated Spurious Emission Measurement Result (below 1GHz) (802.11g)

Operation Mode	802.11g TX CH High	Test Date	Oct. 16, 2010
Fundamental Frequency	2462MHz	Test By	Jazz
Temperature	25 °C	Pol	Ver./Hor
Humidity	65 %		

Freq.	Ant.Pol.	Detector Mode	Reading	Factor	Actual FS	Limit3m	Safe Margin
(MHz)	H/V	(PK/QP)	(dBuV)	( <b>dB</b> )	(dBuV/m)	(dBuV/m)	( <b>dB</b> )
37.76	V	Peak	48.65	-14.24	34.41	40.00	-5.59
92.08	V	Peak	51.16	-17.38	33.78	43.50	-9.72
153.19	V	Peak	32.85	-13	19.85	43.50	-23.65
475.23	V	Peak	32.72	-8.56	24.16	46.00	-21.84
652.74	V	Peak	33.46	-4.96	28.50	46.00	-17.50
853.53	V	Peak	33.27	-1.93	31.34	46.00	-14.66
38.73	Н	Peak	45.25	-13.84	31.41	40.00	-8.59
92.08	Н	Peak	46.26	-17.38	28.88	43.50	-14.62
150.28	Н	Peak	33.36	-12.83	20.53	43.50	-22.97
352.04	Н	Peak	32.5	-11.73	20.77	46.00	-25.23
439.34	Н	Peak	32.62	-8.8	23.82	46.00	-22.18
611.03	Н	Peak	33.47	-5.79	27.68	46.00	-18.32

### Remark :

- 1 Measuring frequencies from 30 MHz to the 1GHz  $\circ$
- 2 Radiated emissions measured in frequency range from 30 MHz to 1000MHz were made with an instrument using Peak/QP detector mode.
- 3 Data of measurement within this frequency range shown "-" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- 4 The IF bandwidth of SPA between 30MHz to 1GHz was 100KHz.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. This test report cannot be reproduced, except in full, without prior written permission of the Company. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品催保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service (<u>www.sgs.com/terms\_and\_conditions.htm</u>) and Terms and Conditions for Electronic Documents (<u>www.sgs.com/terms\_e-document.htm</u>). Attention is drawn to the limitations of liability, indemnification and jurisdictional issues established therein. Even if printed this electronic document is to be treated as an original within the meaning of UCP 600 article 20b. The authenticity of this document may be verified at <u>www.sgs.com/terms\_eta/uthentication</u>. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. SGS Taiwan Ltd. No.134, Wu Kung Road, Wuku Industrial Zone, Taipei County, Taiwan /台北縣五股工業區五工路 134 號



Report No.: EH\2010\70032 Issue Date: Oct. 22, 2010 Page: 68 of 97

### Radiated Spurious Emission Measurement Result (below 1GHz) (802.11n\_20M)

Operation Mode	802.11g TX CH Low	Test Date	Oct. 16, 2010
Fundamental Frequency	2412MHz	Test By	Jazz
Temperature	25 °C	Pol	Ver./Hor
Humidity	65 %		

Freq.	Ant.Pol.	Detector Mode	Reading	Factor	Actual FS	Limit3m	Safe Margin
(MHz)	H/V	(PK/QP)	(dBuV)	( <b>dB</b> )	(dBuV/m)	(dBuV/m)	( <b>dB</b> )
36.79	V	Peak	49.3	-14.36	34.94	40.00	-5.06
92.08	V	Peak	50.86	-17.38	33.48	43.50	-10.02
148.34	V	Peak	33.68	-12.9	20.78	43.50	-22.72
332.64	V	Peak	32.59	-12.16	20.43	46.00	-25.57
482.99	V	Peak	33.34	-8.57	24.77	46.00	-21.23
611.03	V	Peak	33.24	-5.79	27.45	46.00	-18.55
38.73	Н	Peak	44.85	-13.84	31.01	40.00	-8.99
92.08	Н	Peak	46.15	-17.38	28.77	43.50	-14.73
148.34	Н	Peak	33.06	-12.9	20.16	43.50	-23.34
376.29	Н	Peak	33.12	-10.86	22.26	46.00	-23.74
625.58	Н	Peak	32.38	-5.47	26.91	46.00	-19.09
974.78	Н	Peak	32.82	-0.81	32.01	54.00	-21.99

### Remark :

- 1 Measuring frequencies from 30 MHz to the 1GHz  $\circ$
- 2 Radiated emissions measured in frequency range from 30 MHz to 1000MHz were made with an instrument using Peak/QP detector mode.
- 3 Data of measurement within this frequency range shown "-" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- 4 The IF bandwidth of SPA between 30MHz to 1GHz was 100KHz.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. This test report cannot be reproduced, except in full, without prior written permission of the Company. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品催保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service (<u>www.sqs.com/terms\_and\_conditions.htm</u>) and Terms and Conditions for Electronic Documents (<u>www.sqs.com/terms\_e-document.htm</u>). Attention is drawn to the limitations of liability, indemnification and jurisdictional issues established therein. Even if printed this electronic document is to be treated as an original within the meaning of UCP 600 article 200b. The authenticity of this document may be verified at <u>www.sqs.onsite.com/authentication</u>. Any holder of this document is to be treated hereon reflects the Company's findings at the time of its intervention only and within the limits of client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. SGS Taiwan Ltd. No.134, Wu Kung Road, Wuku Industrial Zone, Taipei County, Taiwan /台北縣五股工業區五工路 134 號



Report No.: EH\2010\70032 Issue Date: Oct. 22, 2010 Page: 69 of 97

### Radiated Spurious Emission Measurement Result (below 1GHz) (802.11n\_20M)

Operation Mode	802.11g TX CH Mid	Test Date	Oct. 16, 2010
Fundamental Frequency	2437MHz	Test By	Jazz
Temperature	25 °C	Pol	Ver./Hor
Humidity	65 %		

Freq.	Ant.Pol.	Detector Mode	Reading	Factor	Actual FS	Limit3m	Safe Margin
 (MHz)	H/V	(PK/QP)	(dBuV)	( <b>dB</b> )	(dBuV/m)	(dBuV/m)	( <b>dB</b> )
36.79	V	Peak	49.5	-14.36	35.14	40.00	-4.86
101.78	V	Peak	50.05	-16.87	33.18	43.50	-10.32
155.13	V	Peak	32.94	-13.12	19.82	43.50	-23.68
378.23	V	Peak	33.2	-10.79	22.41	46.00	-23.59
567.38	V	Peak	33.68	-7.09	26.59	46.00	-19.41
819.58	V	Peak	32.12	-2.61	29.51	46.00	-16.49
38.73	Н	Peak	45.06	-13.84	31.22	40.00	-8.78
92.08	Н	Peak	47.08	-17.38	29.70	43.50	-13.80
148.34	Н	Peak	33.42	-12.9	20.52	43.50	-22.98
385.99	Н	Peak	33.28	-10.47	22.81	46.00	-23.19
638.19	Н	Peak	33.2	-5.23	27.97	46.00	-18.03
813.76	Н	Peak	31.99	-2.72	29.27	46.00	-16.73

### Remark :

- 1 Measuring frequencies from 30 MHz to the 1GHz  $\circ$
- 2 Radiated emissions measured in frequency range from 30 MHz to 1000MHz were made with an instrument using Peak/QP detector mode.
- 3 Data of measurement within this frequency range shown "-" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- 4 The IF bandwidth of SPA between 30MHz to 1GHz was 100KHz.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. This test report cannot be reproduced, except in full, without prior written permission of the Company. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品催保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service (<u>www.sgs.com/terms\_and\_conditions.htm</u>) and Terms and Conditions for Electronic Documents (<u>www.sgs.com/terms\_e-document.htm</u>). Attention is drawn to the limitations of liability, indemnification and jurisdictional issues established therein. Even if printed this electronic document is to be treated as an original within the meaning of UCP 600 article 20b. The authenticity of this document may be verified at <u>www.sgs.com/terms\_eta/uthentication</u>. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. SGS Taiwan Ltd. No.134, Wu Kung Road, Wuku Industrial Zone, Taipei County, Taiwan /台北縣五股工業區五工路 134 號



Report No.: EH\2010\70032 Issue Date: Oct. 22, 2010 Page: 70 of 97

### Radiated Spurious Emission Measurement Result (below 1GHz) (802.11n\_20M)

Operation Mode	802.11g TX CH High	Test Date	Oct. 16, 2010
Fundamental Frequency	2462MHz	Test By	Jazz
Temperature	25 °C	Pol	Ver./Hor
Humidity	65 %		

Freq.	Ant.Pol.	Detector Mode	Reading	Factor	Actual FS	Limit3m	Safe Margin
(MHz)	H/V	(PK/QP)	(dBuV)	( <b>dB</b> )	(dBuV/m)	(dBuV/m)	( <b>dB</b> )
36.79	V	Peak	49.06	-14.36	34.70	40.00	-5.30
101.78	V	Peak	49.72	-16.87	32.85	43.50	-10.65
158.04	V	Peak	33.67	-13.28	20.39	43.50	-23.11
390.84	V	Peak	32.89	-10.31	22.58	46.00	-23.42
478.14	V	Peak	32.86	-8.56	24.30	46.00	-21.70
643.04	V	Peak	33.36	-5.14	28.22	46.00	-17.78
38.73	Н	Peak	45.59	-13.84	31.75	40.00	-8.25
101.78	Н	Peak	44.88	-16.87	28.01	43.50	-15.49
158.04	Н	Peak	33.4	-13.28	20.12	43.50	-23.38
453.89	Н	Peak	32.24	-8.6	23.64	46.00	-22.36
657.59	Н	Peak	33.14	-4.98	28.16	46.00	-17.84
884.57	Н	Peak	31.94	-1.39	30.55	46.00	-15.45

### Remark :

- 1 Measuring frequencies from 30 MHz to the 1GHz  $\circ$
- 2 Radiated emissions measured in frequency range from 30 MHz to 1000MHz were made with an instrument using Peak/QP detector mode.
- 3 Data of measurement within this frequency range shown "-" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- 4 The IF bandwidth of SPA between 30MHz to 1GHz was 100KHz.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. This test report cannot be reproduced, except in full, without prior written permission of the Company. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品催保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service (<u>www.sqs.com/terms\_and\_conditions.htm</u>) and Terms and Conditions for Electronic Documents (<u>www.sqs.com/terms\_e-document.htm</u>). Attention is drawn to the limitations of liability, indemnification and jurisdictional issues established therein. Even if printed this electronic document is to be treated as an original within the meaning of UCP 600 article 200b. The authenticity of this document may be verified at <u>www.sqs.onsite.com/authentication</u>. Any holder of this document is to be treated hereon reflects the Company's findings at the time of its intervention only and within the limits of client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. SGS Taiwan Ltd. No.134, Wu Kung Road, Wuku Industrial Zone, Taipei County, Taiwan /台北縣五股工業區五工路 134 號



Report No.: EH\2010\70032 Issue Date: Oct. 22, 2010 Page: 71 of 97

### Radiated Spurious Emission Measurement Result (above 1GHz) (802.11b)

Operation Mode	802.11b TX CH Low	Test Date	Oct. 16, 2010
Fundamental Frequency	2412MHz	Test By	Jazz
Temperature	25 °C	Pol	Ver.
Humidity	65 %		

	Peak	AV		Actu	al FS	Peak	AV		
Freq.	Reading	Reading	Ant./CL	Peak	AV	Limit	Limit	Margin	Remark
(MHz)	(dBuV)	(dBuV)	CF(dB)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dBuV/m)	( <b>dB</b> )	
4824.0	41.3		6.02	47.32		75.00	54.00	-6.68	Peak
7236.0						74.00	54.00		
9648.0						74.00	54.00		
12060.0						74.00	54.00		
14472.0						74.00	54.00		
16884.0						74.00	54.00		
19296.0						74.00	54.00		
21708.0						74.00	54.00		
24120.0						74.00	54.00		

### Remark:

- 1 Measuring frequencies from 1GHz to the 10th harmonic of highest fundamental frequency.
- 2 Data of measurement within this frequency range shown "-" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- 3 Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
- 4 Spectrum Peak Setting : 1GHz- 26GHz, RBW= 1MHz, VBW= 3MHz, Sweep time= 200 ms.
- 5 Spectrum AV Setting : 1GHz- 26GHz, RBW= 1MHz, VBW= 10Hz, Sweep time= 200 ms.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. This test report cannot be reproduced, except in full, without prior written permission of the Company. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service (<u>www.sgs.com/terms\_and\_conditions.htm</u>) and Terms and Conditions for Electronic Document is to be treated as an original within the meaning of UCP 600 article 20b. The authenticity of this document may be verified at <u>www.sgsonsite.com/authentication</u>. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. SGS Taiwan Ltd. No.134, Wu Kung Road, Wuku Industrial Zone, Taipei County, Taiwan /台北縣五股工業區五工路 134 號



Report No.: EH\2010\70032 Issue Date: Oct. 22, 2010 Page: 72 of 97

## Radiated Spurious Emission Measurement Result (above 1GHz) (802.11b)

Operation Mode	802.11b TX CH Low	Test Date	Oct. 16, 2010
Fundamental Frequency	2412MHz	Test By	Jazz
Temperature	25 °C	Pol	Hor
Humidity	65 %		

	Peak	AV		Actu	al FS	Peak	AV		
Freq.	Reading	Reading	Ant./CL	Peak	AV	Limit	Limit	Margin	Remark
(MHz)	(dBuV)	(dBuV)	CF(dB)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dBuV/m)	( <b>dB</b> )	
4824.0	41.06		6.02	47.08		75.00	54.00	-6.92	Peak
7236.0						74.00	54.00		
9648.0						74.00	54.00		
12060.0						74.00	54.00		
14472.0						74.00	54.00		
16884.0						74.00	54.00		
19296.0						74.00	54.00		
21708.0						74.00	54.00		
24120.0						74.00	54.00		

### Remark:

- 1 Measuring frequencies from 1GHz to the 10th harmonic of highest fundamental frequency.
- 2 Data of measurement within this frequency range shown "-" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- 3 Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
- 4 Spectrum Peak Setting : 1GHz- 26GHz, RBW= 1MHz, VBW= 3MHz, Sweep time= 200 ms.
- 5 Spectrum AV Setting : 1GHz- 26GHz, RBW= 1MHz, VBW= 10Hz, Sweep time= 200 ms.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. This test report cannot be reproduced, except in full, without prior written permission of the Company. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service (<u>www.sgs.com/terms\_and\_conditions.htm</u>) and Terms and Conditions for Electronic Document is to be treated as an original within the meaning of UCP 600 article 20b. The authenticity of this document may be verified at <u>www.sgsonsite.com/authentication</u>. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. SGS Taiwan Ltd. No.134, Wu Kung Road, Wuku Industrial Zone, Taipei County, Taiwan /台北縣五股工業區五工路 134 號



Report No.: EH\2010\70032 Issue Date: Oct. 22, 2010 Page: 73 of 97

## Radiated Spurious Emission Measurement Result (above 1GHz) (802.11b)

Operation Mode	802.11b TX CH Mid	Test Date	Oct. 16, 2010
Fundamental Frequency	2437MHz	Test By	Jazz
Temperature	25 °C	Pol	Ver
Humidity	65 %		

	Peak	AV		Actu	al FS	Peak	AV		
Freq.	Reading	Reading	Ant./CL	Peak	AV	Limit	Limit	Margin	Remark
(MHz)	(dBuV)	(dBuV)	CF(dB)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dBuV/m)	( <b>dB</b> )	
4874.0	41.81		6.15	47.96		75.00	54.00	-6.04	Peak
7311.0						74.00	54.00		
9748.0						74.00	54.00		
12185.0						74.00	54.00		
14622.0						74.00	54.00		
17059.0						74.00	54.00		
19496.0						74.00	54.00		
21933.0						74.00	54.00		
24370.0						74.00	54.00		

#### Remark:

- 1 Measuring frequencies from 1GHz to the 10th harmonic of highest fundamental frequency.
- 2 Data of measurement within this frequency range shown "-" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- 3 Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
- 4 Spectrum Peak Setting : 1GHz- 26GHz, RBW= 1MHz, VBW= 3MHz, Sweep time= 200 ms.
- 5 Spectrum AV Setting : 1GHz- 26GHz, RBW= 1MHz, VBW= 10Hz, Sweep time= 200 ms.



Report No.: EH\2010\70032 Issue Date: Oct. 22, 2010 Page: 74 of 97

## Radiated Spurious Emission Measurement Result (above 1GHz) (802.11b)

Operation Mode	802.11b TX CH Mid	Test Date	Oct. 16, 2010
Fundamental Frequency	2437MHz	Test By	Jazz
Temperature	25 °C	Pol	Hor
Humidity	65 %		

	Peak	AV		Actu	al FS	Peak	AV		
Freq.	Reading	Reading	Ant./CL	Peak	AV	Limit	Limit	Margin	Remark
(MHz)	(dBuV)	(dBuV)	CF(dB)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dB)	
4874.0	41.2		6.15	47.35		75.00	54.00	-6.65	Peak
7311.0						74.00	54.00		
9748.0						74.00	54.00		
12185.0						74.00	54.00		
14622.0						74.00	54.00		
17059.0						74.00	54.00		
19496.0						74.00	54.00		
21933.0						74.00	54.00		
24370.0						74.00	54.00		

#### Remark:

- 1 Measuring frequencies from 1GHz to the 10th harmonic of highest fundamental frequency.
- 2 Data of measurement within this frequency range shown "-" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- 3 Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
- 4 Spectrum Peak Setting : 1GHz- 26GHz, RBW= 1MHz, VBW= 3MHz, Sweep time= 200 ms.
- 5 Spectrum AV Setting : 1GHz- 26GHz, RBW= 1MHz, VBW= 10Hz, Sweep time= 200 ms.



Report No.: EH\2010\70032 Issue Date: Oct. 22, 2010 Page: 75 of 97

### Radiated Spurious Emission Measurement Result (above 1GHz) (802.11b)

Operation Mode	802.11b TX CH High	Test Date	Oct. 16, 2010
Fundamental Frequency	2462MHz	Test By	Jazz
Temperature	25 °C	Pol	Ver
Humidity	65 %		

	Peak	AV		Actu	al FS	Peak	AV		
Freq.	Reading	Reading	Ant./CL	Peak	AV	Limit	Limit	Margin	Remark
(MHz)	(dBuV)	(dBuV)	CF(dB)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dBuV/m)	( <b>dB</b> )	
4924.0	40.63		6.28	46.91		75.00	54.00	-7.09	Peak
7386.0						74.00	54.00		
9848.0						74.00	54.00		
12310.0						74.00	54.00		
14772.0						74.00	54.00		
17234.0						74.00	54.00		
19696.0						74.00	54.00		
22158.0						74.00	54.00		
24620.0						74.00	54.00		

#### Remark:

- 1 Measuring frequencies from 1GHz to the 10th harmonic of highest fundamental frequency.
- 2 Data of measurement within this frequency range shown "-" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- 3 Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
- 4 Spectrum Peak Setting : 1GHz- 26GHz, RBW= 1MHz, VBW= 3MHz, Sweep time= 200 ms.
- 5 Spectrum AV Setting : 1GHz- 26GHz, RBW= 1MHz, VBW= 10Hz, Sweep time= 200 ms.



Report No.: EH\2010\70032 Issue Date: Oct. 22, 2010 Page: 76 of 97

## Radiated Spurious Emission Measurement Result (above 1GHz) (802.11b)

Operation Mode	802.11b TX CH High	Test Date	Oct. 16, 2010
Fundamental Frequency	2462MHz	Test By	Jazz
Temperature	25 °C	Pol	Hor
Humidity	65 %		

	Peak	AV		Actu	al FS	Peak	AV		
Freq.	Reading	Reading	Ant./CL	Peak	AV	Limit	Limit	Margin	Remark
(MHz)	(dBuV)	(dBuV)	CF(dB)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dBuV/m)	( <b>dB</b> )	
4924.0	40.97		6.28	47.25		75.00	54.00	-6.75	Peak
7386.0						74.00	54.00		
9848.0						74.00	54.00		
12310.0						74.00	54.00		
14772.0						74.00	54.00		
17234.0						74.00	54.00		
19696.0						74.00	54.00		
22158.0						74.00	54.00		
24620.0						74.00	54.00		

#### Remark:

- 1 Measuring frequencies from 1GHz to the 10th harmonic of highest fundamental frequency.
- 2 Data of measurement within this frequency range shown "-" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- 3 Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
- 4 Spectrum Peak Setting : 1GHz- 26GHz, RBW= 1MHz, VBW= 3MHz, Sweep time= 200 ms.
- 5 Spectrum AV Setting : 1GHz- 26GHz, RBW= 1MHz, VBW= 10Hz, Sweep time= 200 ms.



Report No.: EH\2010\70032 Issue Date: Oct. 22, 2010 Page: 77 of 97

## Radiated Spurious Emission Measurement Result (above 1GHz) (802.11g)

Operation Mode	802.11g TX CH Low	Test Date	Oct. 16, 2010
Fundamental Frequency	2412MHz	Test By	Jazz
Temperature	25 °C	Pol	Ver.
Humidity	65 %		

	Peak	AV		Actu	al FS	Peak	AV		
Freq.	Reading	Reading	Ant./CL	Peak	AV	Limit	Limit	Margin	Remark
(MHz)	(dBuV)	(dBuV)	CF(dB)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dBuV/m)	( <b>dB</b> )	
4824.0	35.97		6.05	42.02		75.00	54.00	-11.98	Peak
7236.0						74.00	54.00		
9648.0						74.00	54.00		
12060.0						74.00	54.00		
14472.0						74.00	54.00		
16884.0						74.00	54.00		
19296.0						74.00	54.00		
21708.0						74.00	54.00		
24120.0						74.00	54.00		

#### Remark:

- 1 Measuring frequencies from 1GHz to the 10th harmonic of highest fundamental frequency.
- 2 Data of measurement within this frequency range shown "-" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- 3 Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
- 4 Spectrum Peak Setting : 1GHz- 26GHz, RBW= 1MHz, VBW= 3MHz, Sweep time= 200 ms.
- 5 Spectrum AV Setting : 1GHz- 26GHz, RBW= 1MHz, VBW= 10Hz, Sweep time= 200 ms.



Report No.: EH\2010\70032 Issue Date: Oct. 22, 2010 Page: 78 of 97

## Radiated Spurious Emission Measurement Result (above 1GHz) (802.11g)

Operation Mode	802.11g TX CH Low	Test Date	Oct. 16, 2010
Fundamental Frequency	2412MHz	Test By	Jazz
Temperature	25 °C	Pol	Hor
Humidity	65 %		

	Peak	AV		Actu	al FS	Peak	AV		
Freq.	Reading	Reading	Ant./CL	Peak	AV	Limit	Limit	Margin	Remark
(MHz)	(dBuV)	(dBuV)	CF(dB)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dB)	
4824.0	36.01		6.02	42.03		75.00	54.00	-11.97	Peak
7236.0						74.00	54.00		
9648.0						74.00	54.00		
12060.0						74.00	54.00		
14472.0						74.00	54.00		
16884.0						74.00	54.00		
19296.0						74.00	54.00		
21708.0						74.00	54.00		
24120.0						74.00	54.00		

#### Remark:

- 1 Measuring frequencies from 1GHz to the 10th harmonic of highest fundamental frequency.
- 2 Data of measurement within this frequency range shown "-" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- 3 Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
- 4 Spectrum Peak Setting : 1GHz- 26GHz, RBW= 1MHz, VBW= 3MHz, Sweep time= 200 ms.
- 5 Spectrum AV Setting : 1GHz- 26GHz, RBW= 1MHz, VBW= 10Hz, Sweep time= 200 ms.



Report No.: EH\2010\70032 Issue Date: Oct. 22, 2010 Page: 79 of 97

## Radiated Spurious Emission Measurement Result (above 1GHz) (802.11g)

Operation Mode	802.11g TX CH Mid	Test Date	Oct. 16, 2010
Fundamental Frequency	2437MHz	Test By	Jazz
Temperature	25 °C	Pol	Ver
Humidity	65 %		

	Peak	AV		Actu	al FS	Peak	AV		
Freq.	Reading	Reading	Ant./CL	Peak	AV	Limit	Limit	Margin	Remark
(MHz)	(dBuV)	(dBuV)	CF(dB)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dBuV/m)	( <b>dB</b> )	
4874.0	36.91		6.15	43.06		75.00	54.00	-10.94	Peak
7311.0						74.00	54.00		
9748.0						74.00	54.00		
12185.0						74.00	54.00		
14622.0						74.00	54.00		
17059.0						74.00	54.00		
19496.0						74.00	54.00		
21933.0						74.00	54.00		
24370.0						74.00	54.00		

#### Remark:

- 1 Measuring frequencies from 1GHz to the 10th harmonic of highest fundamental frequency.
- 2 Data of measurement within this frequency range shown "-" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- 3 Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
- 4 Spectrum Peak Setting : 1GHz- 26GHz, RBW= 1MHz, VBW= 3MHz, Sweep time= 200 ms.
- 5 Spectrum AV Setting : 1GHz- 26GHz, RBW= 1MHz, VBW= 10Hz, Sweep time= 200 ms.



Report No.: EH\2010\70032 Issue Date: Oct. 22, 2010 Page: 80 of 97

### Radiated Spurious Emission Measurement Result (above 1GHz) (802.11g)

Operation Mode	802.11g TX CH Mid	Test Date	Oct. 16, 2010
Fundamental Frequency	2437MHz	Test By	Jazz
Temperature	25 °C	Pol	Hor
Humidity	65 %		

	Peak	AV		Actu	al FS	Peak	AV		
Freq.	Reading	Reading	Ant./CL	Peak	AV	Limit	Limit	Margin	Remark
(MHz)	(dBuV)	(dBuV)	CF(dB)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dBuV/m)	( <b>dB</b> )	
4874.0	35.99		6.15	42.14		75.00	54.00	-11.86	Peak
7311.0						74.00	54.00		
9748.0						74.00	54.00		
12185.0						74.00	54.00		
14622.0						74.00	54.00		
17059.0						74.00	54.00		
19496.0						74.00	54.00		
21933.0						74.00	54.00		
24370.0						74.00	54.00		

#### Remark:

- 1 Measuring frequencies from 1GHz to the 10th harmonic of highest fundamental frequency.
- 2 Data of measurement within this frequency range shown "-" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- 3 Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
- 4 Spectrum Peak Setting : 1GHz- 26GHz, RBW= 1MHz, VBW= 3MHz, Sweep time= 200 ms.
- 5 Spectrum AV Setting : 1GHz- 26GHz, RBW= 1MHz, VBW= 10Hz, Sweep time= 200 ms.



Report No.: EH\2010\70032 Issue Date: Oct. 22, 2010 Page: 81 of 97

## Radiated Spurious Emission Measurement Result (above 1GHz) (802.11g)

Operation Mode	802.11g TX CH High	Test Date	Oct. 16, 2010
Fundamental Frequency	2462MHz	Test By	Jazz
Temperature	25 °C	Pol	Ver
Humidity	65 %		

	Peak	AV		Actu	al FS	Peak	AV		
Freq.	Reading	Reading	Ant./CL	Peak	AV	Limit	Limit	Margin	Remark
(MHz)	(dBuV)	(dBuV)	CF(dB)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dBuV/m)	( <b>dB</b> )	
4924.0	36.36		6.28	42.64		75.00	54.00	-11.36	Peak
7386.0						74.00	54.00		
9848.0						74.00	54.00		
12310.0						74.00	54.00		
14772.0						74.00	54.00		
17234.0						74.00	54.00		
19696.0						74.00	54.00		
22158.0						74.00	54.00		
24620.0						74.00	54.00		

#### Remark:

- 1 Measuring frequencies from 1GHz to the 10th harmonic of highest fundamental frequency.
- 2 Data of measurement within this frequency range shown "-" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- 3 Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
- 4 Spectrum Peak Setting : 1GHz- 26GHz, RBW= 1MHz, VBW= 3MHz, Sweep time= 200 ms.
- 5 Spectrum AV Setting : 1GHz- 26GHz, RBW= 1MHz, VBW= 10Hz, Sweep time= 200 ms.



Report No.: EH\2010\70032 Issue Date: Oct. 22, 2010 Page: 82 of 97

## Radiated Spurious Emission Measurement Result (above 1GHz) (802.11g)

Operation Mode	802.11g TX CH High	Test Date	Oct. 16, 2010
Fundamental Frequency	2462MHz	Test By	Jazz
Temperature	25 °C	Pol	Hor
Humidity	65 %		

	Peak	AV		Actu	al FS	Peak	AV		
Freq.	Reading	Reading	Ant./CL	Peak	AV	Limit	Limit	Margin	Remark
(MHz)	(dBuV)	(dBuV)	CF(dB)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dBuV/m)	( <b>dB</b> )	
4924.0	36.06		6.28	42.34		75.00	54.00	-11.66	Peak
7386.0						74.00	54.00		
9848.0						74.00	54.00		
12310.0						74.00	54.00		
14772.0						74.00	54.00		
17234.0						74.00	54.00		
19696.0						74.00	54.00		
22158.0						74.00	54.00		
24620.0						74.00	54.00		

#### Remark:

- 1 Measuring frequencies from 1GHz to the 10th harmonic of highest fundamental frequency.
- 2 Data of measurement within this frequency range shown "-" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- 3 Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
- 4 Spectrum Peak Setting : 1GHz- 26GHz, RBW= 1MHz, VBW= 3MHz, Sweep time= 200 ms.
- 5 Spectrum AV Setting : 1GHz- 26GHz, RBW= 1MHz, VBW= 10Hz, Sweep time= 200 ms.



Report No.: EH\2010\70032 Issue Date: Oct. 22, 2010 Page: 83 of 97

### Radiated Spurious Emission Measurement Result (above 1GHz) (802.11n\_20M)

Operation Mode	802.11n_20M TX CH Low	Test Date	Oct. 16, 2010
Fundamental Frequency	2412MHz	Test By	Jazz
Temperature	25 °C	Pol	Ver.
Humidity	65 %		

	Peak	AV		Actu	al FS	Peak	AV		
Freq.	Reading	Reading	Ant./CL	Peak	AV	Limit	Limit	Margin	Remark
(MHz)	(dBuV)	(dBuV)	CF(dB)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dBuV/m)	( <b>dB</b> )	
4824.0	37.39		6.05	6.02		75.00	54.00	-47.98	Peak
7236.0						74.00	54.00		
9648.0						74.00	54.00		
12060.0						74.00	54.00		
14472.0						74.00	54.00		
16884.0						74.00	54.00		
19296.0						74.00	54.00		
21708.0						74.00	54.00		
24120.0						74.00	54.00		

#### Remark:

- 1 Measuring frequencies from 1GHz to the 10th harmonic of highest fundamental frequency.
- 2 Data of measurement within this frequency range shown "-" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- 3 Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
- 4 Spectrum Peak Setting : 1GHz- 26GHz, RBW= 1MHz, VBW= 3MHz, Sweep time= 200 ms.
- 5 Spectrum AV Setting : 1GHz- 26GHz, RBW= 1MHz, VBW= 10Hz, Sweep time= 200 ms.



Report No.: EH\2010\70032 Issue Date: Oct. 22, 2010 Page: 84 of 97

### Radiated Spurious Emission Measurement Result (above 1GHz) (802.11n\_20M)

Operation Mode	802.11n_20M TX CH Low	Test Date	Oct. 16, 2010
Fundamental Frequency	2412MHz	Test By	Jazz
Temperature	25 °C	Pol	Hor
Humidity	65 %		

	Peak	AV		Actu	al FS	Peak	AV		
Freq.	Reading	Reading	Ant./CL	Peak	AV	Limit	Limit	Margin	Remark
(MHz)	(dBuV)	(dBuV)	CF(dB)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dBuV/m)	( <b>dB</b> )	
4824.0	38.4		6.02	44.42		75.00	54.00	-9.58	Peak
7236.0						74.00	54.00		
9648.0						74.00	54.00		
12060.0						74.00	54.00		
14472.0						74.00	54.00		
16884.0						74.00	54.00		
19296.0						74.00	54.00		
21708.0						74.00	54.00		
24120.0						74.00	54.00		

#### Remark:

- 1 Measuring frequencies from 1GHz to the 10th harmonic of highest fundamental frequency.
- 2 Data of measurement within this frequency range shown "-" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- 3 Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
- 4 Spectrum Peak Setting : 1GHz- 26GHz, RBW= 1MHz, VBW= 3MHz, Sweep time= 200 ms.
- 5 Spectrum AV Setting : 1GHz- 26GHz, RBW= 1MHz, VBW= 10Hz, Sweep time= 200 ms.



Report No.: EH\2010\70032 Issue Date: Oct. 22, 2010 Page: 85 of 97

## Radiated Spurious Emission Measurement Result (above 1GHz) (802.11n\_20M)

Operation Mode	802.11n_20M TX CH Mid	Test Date	Oct. 16, 2010
Fundamental Frequency	2437MHz	Test By	Jazz
Temperature	25 °C	Pol	Ver
Humidity	65 %		

	Peak	AV		Actu	al FS	Peak	AV		
Freq.	Reading	Reading	Ant./CL	Peak	AV	Limit	Limit	Margin	Remark
(MHz)	(dBuV)	(dBuV)	CF(dB)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dB)	
4874.0	38.2		6.17	44.37		75.00	54.00	-9.63	Peak
7311.0						74.00	54.00		
9748.0						74.00	54.00		
12185.0						74.00	54.00		
14622.0						74.00	54.00		
17059.0						74.00	54.00		
19496.0						74.00	54.00		
21933.0						74.00	54.00		
24370.0						74.00	54.00		

#### Remark:

- 1 Measuring frequencies from 1GHz to the 10th harmonic of highest fundamental frequency.
- 2 Data of measurement within this frequency range shown "-" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- 3 Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
- 4 Spectrum Peak Setting : 1GHz- 26GHz, RBW= 1MHz, VBW= 3MHz, Sweep time= 200 ms.
- 5 Spectrum AV Setting : 1GHz- 26GHz, RBW= 1MHz, VBW= 10Hz, Sweep time= 200 ms.



Report No.: EH\2010\70032 Issue Date: Oct. 22, 2010 Page: 86 of 97

## Radiated Spurious Emission Measurement Result (above 1GHz) (802.11n\_20M)

Operation Mode	802.11n_20M TX CH Mid	Test Date	Oct. 16, 2010
Fundamental Frequency	2437MHz	Test By	Jazz
Temperature	25 °C	Pol	Hor
Humidity	65 %		

	Peak	AV		Actu	al FS	Peak	AV		
Freq.	Reading	Reading	Ant./CL	Peak	AV	Limit	Limit	Margin	Remark
(MHz)	(dBuV)	(dBuV)	CF(dB)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dB)	
4874.0	38.95		6.15	45.10		75.00	54.00	-8.90	Peak
7311.0						74.00	54.00		
9748.0						74.00	54.00		
12185.0						74.00	54.00		
14622.0						74.00	54.00		
17059.0						74.00	54.00		
19496.0						74.00	54.00		
21933.0						74.00	54.00		
24370.0						74.00	54.00		

#### Remark:

- 1 Measuring frequencies from 1GHz to the 10th harmonic of highest fundamental frequency.
- 2 Data of measurement within this frequency range shown "-" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- 3 Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
- 4 Spectrum Peak Setting : 1GHz- 26GHz, RBW= 1MHz, VBW= 3MHz, Sweep time= 200 ms.
- 5 Spectrum AV Setting : 1GHz- 26GHz, RBW= 1MHz, VBW= 10Hz, Sweep time= 200 ms.



Report No.: EH\2010\70032 Issue Date: Oct. 22, 2010 Page: 87 of 97

## Radiated Spurious Emission Measurement Result (above 1GHz) (802.11n\_20M)

Operation Mode	802.11n_20M TX CH High	Test Date	Oct. 16, 2010
Fundamental Frequency	2462MHz	Test By	Jazz
Temperature	25 °C	Pol	Ver
Humidity	65 %		

	Peak	AV		Actu	al FS	Peak	AV		
Freq.	Reading	Reading	Ant./CL	Peak	AV	Limit	Limit	Margin	Remark
(MHz)	(dBuV)	(dBuV)	CF(dB)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dBuV/m)	( <b>dB</b> )	
4924.0	37.1		6.26	43.36		75.00	54.00	-10.64	Peak
7386.0						74.00	54.00		
9848.0						74.00	54.00		
12310.0						74.00	54.00		
14772.0						74.00	54.00		
17234.0						74.00	54.00		
19696.0						74.00	54.00		
22158.0						74.00	54.00		
24620.0						74.00	54.00		

#### Remark:

- 1 Measuring frequencies from 1GHz to the 10th harmonic of highest fundamental frequency.
- 2 Data of measurement within this frequency range shown "-" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- 3 Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
- 4 Spectrum Peak Setting : 1GHz- 26GHz, RBW= 1MHz, VBW= 3MHz, Sweep time= 200 ms.
- 5 Spectrum AV Setting : 1GHz- 26GHz, RBW= 1MHz, VBW= 10Hz, Sweep time= 200 ms.



Report No.: EH\2010\70032 Issue Date: Oct. 22, 2010 Page: 88 of 97

## Radiated Spurious Emission Measurement Result (above 1GHz) (802.11n\_20M)

Operation Mode	802.11n_20M TX CH High	Test Date	Oct. 16, 2010
Fundamental Frequency	2462MHz	Test By	Jazz
Temperature	25 °C	Pol	Hor
Humidity	65 %		

	Peak	AV		Actu	al FS	Peak	AV		
Freq.	Reading	Reading	Ant./CL	Peak	AV	Limit	Limit	Margin	Remark
(MHz)	(dBuV)	(dBuV)	CF(dB)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dBuV/m)	( <b>dB</b> )	
4924.0	37.4		6.26	43.66		75.00	54.00	-10.34	Peak
7386.0						74.00	54.00		
9848.0						74.00	54.00		
12310.0						74.00	54.00		
14772.0						74.00	54.00		
17234.0						74.00	54.00		
19696.0						74.00	54.00		
22158.0						74.00	54.00		
24620.0						74.00	54.00		

#### Remark:

- 1 Measuring frequencies from 1GHz to the 10th harmonic of highest fundamental frequency.
- 2 Data of measurement within this frequency range shown "-" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- 3 Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
- 4 Spectrum Peak Setting : 1GHz- 26GHz, RBW= 1MHz, VBW= 3MHz, Sweep time= 200 ms.
- 5 Spectrum AV Setting : 1GHz- 26GHz, RBW= 1MHz, VBW= 10Hz, Sweep time= 200 ms.



Report No.: EH\2010\70032 Issue Date: Oct. 22, 2010 Page: 89 of 97

# **10 Peak Power Spectral Density**

#### **10.1 Standard Applicable:**

According to §15.247(e) For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission. This power spectral density shall be determined in accordance with the provisions of paragraph (b) of this section. The same method of determining the conducted output power shall be used to determine the power spectral density.

## 10.2 Measurement Equipment Used:

Refer to section 6.2 for details.

### 10.3 Test Set-up:

Refer to section 6.3 for details.

## **10.4 Measurement Procedure:**

- 1. Place the EUT on the table and set it in transmitting mode.
- 2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
- 3. Set the spectrum analyzer as RBW = 3KHz, VBW = 10KHz, Span = 300kHz, Sweep=100s
- 4. Record the max. reading.
- 5. Repeat above procedures until all frequency measured were complete.



## **10.5 Measurement Result:**

802.11b

	<b>RF</b> Power Density	Cable loss	<b>RF Power Density</b>	Maximum Limit
MHz	Reading (dBm)	( <b>dB</b> )	Level (dBm)	(dBm)
2412	-9.29	0.00	-9.29	8
2437	-6.04	0.00	-6.04	8
2462	-5.35	0.00	-5.35	8

\*Offset 0.2 dB

#### 802.11g

Frequency MHz	RF Power Density Reading (dBm)	Cable loss (dB)	RF Power Density Level (dBm)	Maximum Limit (dBm)
2412	-8.41	0.00	-8.41	8
2437	-7.76	0.00	-7.76	8
2462	-8.59	0.00	-8.59	8

\*Offset 0.2 dB

#### 802.11n\_20M

Frequency MHz	RF Power Density Reading (dBm)	Cable loss (dB)	RF Power Density Level (dBm)	Maximum Limit (dBm)
2412	-10.47	0.00	-10.47	8
2437	-9.42	0.00	-9.42	8
2462	-10.38	0.00	-10.38	8

\*Offset 0.2 dB


Note: Refer to next page for plots.




Report No.: EH\2010\70032 Issue Date: Oct. 22, 2010 Page: 91 of 97

## 802.11b

# **Power Spectral Density Test Plot (CH-Low)**

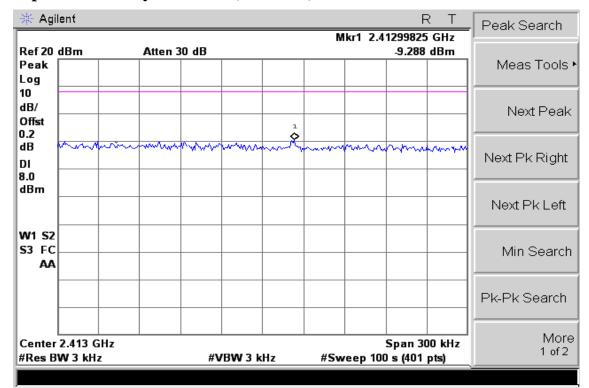

## **Power Spectral Density Test Plot (CH-Mid)**

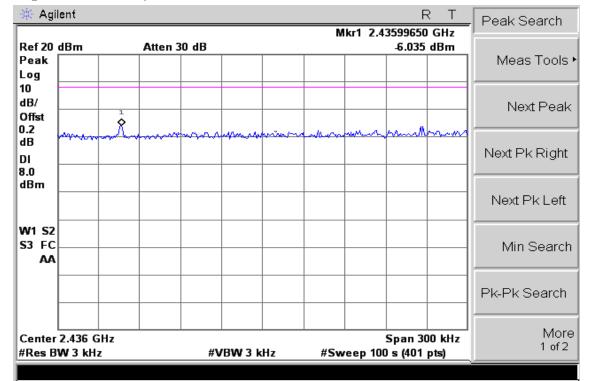



Report No.: EH\2010\70032 Issue Date: Oct. 22, 2010 Page: 92 of 97

e Agilent				RT	Peak Search
ef 20 dBm eak	Atten 3	0 dB	Mkr1	2.46299650 GHz -5.354 dBm	/ Meas Tools
og ) B/					
ist	mann	m		manna	Next Peak
					Next Pk Right
m					Next Pk Left
S2 FC AA					Min Search
					Pk-Pk Search
nter 2.463 GF es BW 3 kHz	lz	#VBW 10 kHz	#Sweep	Span 300 kHz 100 s (401 pts)	More 1 of 2


## **Power Spectral Density Test Plot (CH-High)**




Report No.: EH\2010\70032 Issue Date: Oct. 22, 2010 Page: 93 of 97

# 802.11g

# **Power Spectral Density Test Plot (CH-Low)**

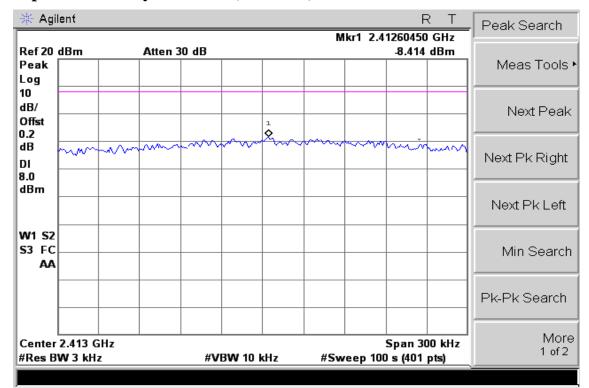


## **Power Spectral Density Test Plot (CH-Mid)**

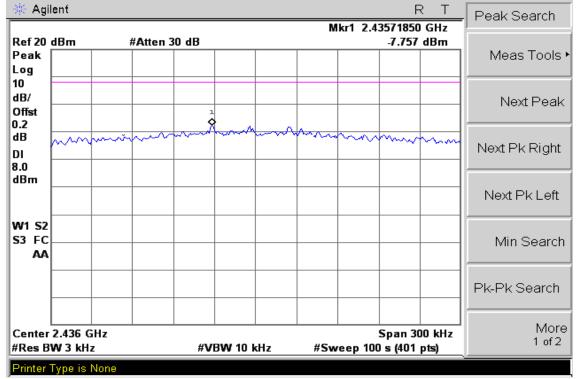



Report No.: EH\2010\70032 Issue Date: Oct. 22, 2010 Page: 94 of 97

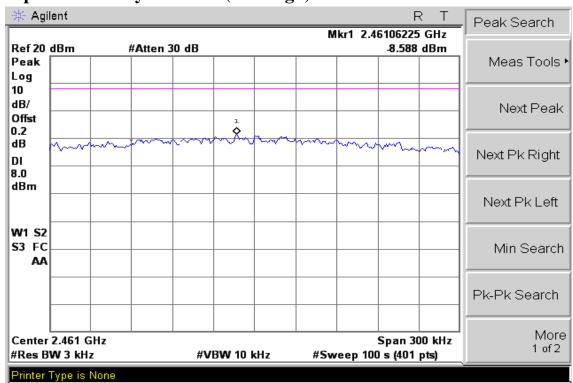


## **Power Spectral Density Test Plot (CH-High)**




Report No.: EH\2010\70032 Issue Date: Oct. 22, 2010 Page: 95 of 97

## 802.11n\_20M

## **Power Spectral Density Test Plot (CH-Low)**

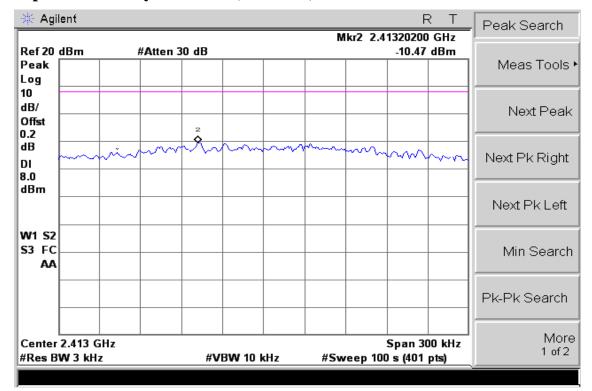


## **Power Spectral Density Test Plot (CH-Mid)**

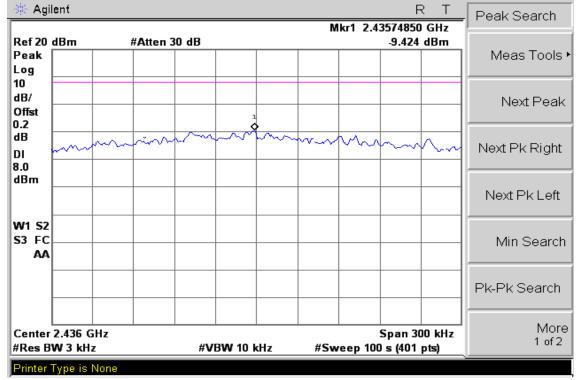



Report No.: EH\2010\70032 Issue Date: Oct. 22, 2010 Page: 96 of 97

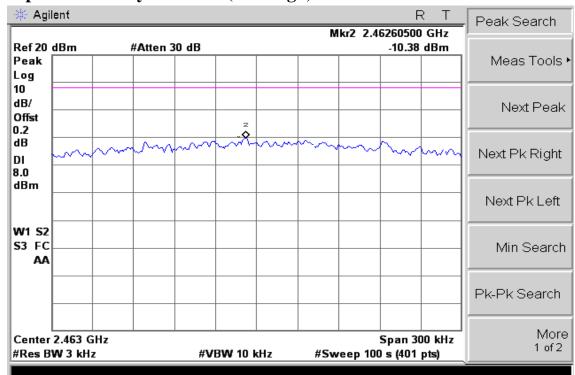

## **Power Spectral Density Test Plot (CH-High)**



FCC ID: E2KV03B002

Report No.: EH\2010\70032 Issue Date: Oct. 22, 2010 Page: 97 of 97

# **11 ANTENNA REQUIREMENT**

## **11.1 Standard Applicable:**

According to §15.203, Antenna requirement.

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of Sections 15.211, 15.213, 15.217, 15.219, or 15.221. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with Section 15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this Part are not exceeded.

## 11.2 Antenna Connected Construction:

The directional gins of antenna used for transmitting is 1.25 dBi, and the antenna connector is designed with unique type RF connector and no consideration of replacement. Please see EUT photo and antenna spec. for details.