

**EXHIBIT 4**  
**RFI/EMI TEST REPORT**



# EMC

## TEST REPORT

REPORT NO. : F88060102  
MODEL NO. : 9001AU  
DATE OF TEST : June 4, 1999

PREPARED FOR: BEHAVIOR TECH COMPUTER CORP.

ADDRESS : 2F, NO.51, TUNG HSING. RD.,  
TAIPEI, TAIWAN, R.O.C.

PREPARED BY: ADVANCE DATA TECHNOLOGY CORPORATION



Accredited Laboratory

11F, NO.1, SEC.4, NAN-KING EAST RD.,  
TAIPEI, TAIWAN, R.O.C.

This test report consists of 15 pages in total. It may be duplicated completely for legal use with the allowance of the applicant. It shall not be reproduced except in full, without the written approval of our laboratory. It should not be used by the client to claim product endorsement by NVLAP or any agency of the U.S. government. The test result in the report only applies to the tested sample.



## **TABLE OF CONTENTS**

1. CERTIFICATION .....	3
2. GENERAL INFORMATION .....	4
2.1 GENERAL DESCRIPTION OF EUT .....	4
2.2 DESCRIPTION OF SUPPORT UNITS .....	5
2.3 TEST METHODOLOGY AND CONFIGURATION .....	5
3. TEST INSTRUMENTS .....	6
3.1 TEST INSTRUMENTS (EMISSION) .....	6
3.2 LIMITS OF CONDUCTED AND RADIATED EMISSION.....	7
4. TEST RESULTS (EMISSION) .....	8
4.1 RADIO DISTURBANCE .....	8
4.2 EUT OPERATION CONDITION .....	8
4.3 TEST DATA OF CONDUCTED EMISSION .....	9
4.4 TEST DATA OF RADIATED EMISSION .....	11
5. PHOTOGRAPHS OF THE TEST CONFIGURATION WITH MINIMUM MARGIN ....	13
6. APPENDIX - INFORMATION OF THE TESTING LABORATORY .....	15

**1. CERTIFICATION**

Issue Date: June 8, 1999

Product : USB KEYBOARD  
Trade Name : BTC  
Model No. : 9001AU  
Applicant : BEHAVIOR TECH COMPUTER CORP.  
Standard : FCC Part 15, Subpart B, Class B  
ANSI C63.4-1992  
CISPR 22:1993+A1: 1995+A2: 1996

We hereby certify that one sample of the designation has been tested in our facility on June 4, 1999. The test record, data evaluation and Equipment Under Test (EUT) configurations represent herein are true and accurate representation of the measurements of the sample's EMC characteristics under the conditions herein specified.

The test results show that the EUT as described in this report is in compliance with the Class B limits of conducted and radiated emission of applicable standards

TESTED BY : Kent Chen , DATE: 6/8/99'  
( Kent Chen )

CHECKED BY : Yemmy Soong , DATE: 6/8/99  
( Yemmy Soong )

APPROVED BY : Mike Su , DATE: 6/8/99.  
( Mike Su )

**ADVANCE DATA TECHNOLOGY CORPORATION****NVLAP®**

Accredited Laboratory



## **2. GENERAL INFORMATION**

### **2.1 GENERAL DESCRIPTION OF EUT**

Product	:	USB KEYBOARD
Model No.	:	9001AU
Power Supply	:	DC 5V (from PC)
Data Cable	:	Shielded (1.8 m)

Note: The EUT is a multi media keyboard with USB function, speaker volume control and PS/2 interface for mouse.

For more detailed features description, please refer to manufacturer's specification or User's Manual.



## 2.2 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories are used to form representative test configuration during the tests.

No	Product	Brand	Model No.	FCC ID	I/O Cable
1	PERSONAL COMPUTER	NTI	PII-333T	FCC DoC Approved	Nonshielded Power (1.8m)
2	MONITOR	ADI	937G	BR8937G	Shielded Signal (1.5m) Nonshielded Power (1.8m)
3	PRINTER	HP	2225C+	DSI6XU2225	Shielded Signal (2.5m) Nonshielded Power (1.2m)
4	MODEM	ACEEX	1414	IFAXDM1414	Shielded Signal (1.2m) Nonshielded Power (1.2m)
5	MOUSE	DEXIN	A2P800A	NIYA2P800A	Shielded Signal (1.5m)
6	SPEAKER	J-S	J-008	NA	Shielded Signal (1.2m)
7	VGA CARD	CARDEX	CD-GX2A44T	ICUVGA-GW710	NA
8	SOUND CARD	YA HSIN	AUDIO 1869	FCC DoC Approved	NA

## 2.3 TEST METHODOLOGY AND CONFIGURATION

Both conducted and radiated testing were performed according to the procedures in ANSI C63.4: 1992. Radiated testing was performed at an antenna to EUT distance of 10 m on an open area test site.

Please refer to the photos of test configuration in Item 5.



### 3. TEST INSTRUMENTS

#### 3.1 TEST INSTRUMENTS (EMISSION)

##### CONDUCTED EMISSION MEASUREMENT

Description & Manufacturer	Model No.	Serial No.	Calibrated Until
ROHDE & SCHWARZ Test Receiver	ESHS30	828109/007	July 22, 1999
ROHDE & SCHWARZ Artificial Mains Network	ESH2-Z5	892107/003	July 20, 1999
EMCO L.I.S.N.	3825/2	9504-2359	July 20, 1999
Shielded Room	Site 3	ADT-C03	NA

Note: 1. The measurement uncertainty is less than  $\pm 2.6\text{dB}$ , which is calculated as per NAMAS document NIS81.

2. The calibration interval of the above test instruments is 12 months.  
And the calibrations are traceable to NML/ROC and NIST/USA.

##### RADIATED EMISSION MEASUREMENT

Description & Manufacturer	Model No.	Serial No.	Calibrated Until
HP Spectrum Analyzer	8590L	3544A01042	April 15, 2000
HP Preamplifier	8447D	2944A08313	Sept. 24, 1999
HP Preamplifier	8347A	3307A01088	Sept. 9, 1999
ROHDE & SCHWARZ TEST RECEIVER	ESVS 30	841977/008	Oct. 1, 1999
SCHWARZBECK Tunable Dipole Antenna	VHA 9103 UHA 9105	E101051 E101055	Nov. 25, 1999
EMCO Double Ridged Guide Antenna	3115	9312-4192	April 5, 2000
CHASE BILOG Antenna	CBL6111A	1647	July 3, 1999
EMCO Turn Table	1016	1722	NA
EMCO Tower	1051	1825	NA
Open Field Test Site	Site 4	ADT-R04	June 19, 1999

Note: 1. The measurement uncertainty is less than  $\pm 3\text{dB}$ , which is calculated as per NAMAS document NIS81.

2. The calibration interval of the above test instruments is 12 months.  
And the calibrations are traceable to NML/ROC and NIST/USA.



### 3.2 LIMITS OF CONDUCTED AND RADIATED EMISSION

#### LIMIT OF RADIATED EMISSION OF CISPR 22

FREQUENCY (MHz)	Class A (at 10m) *	Class B (at 10m) *
	dBuV/m	dBuV/m
30 - 230	40	30
230 - 1000	47	37

\* Detector Function: Quasi-Peak

#### LIMIT OF RADIATED EMISSION OF FCC PART 15, SUBPART B FOR FREQUENCY ABOVE 1000 MHz

FREQUENCY (MHz)	Class A (dBuV/m) (at 3m)		Class B (dBuV/m) (at 3m)	
	Peak	Average	Peak	Average
Above 1000	80.0	60.0	74.0	54.0

- Note: (1) The lower limit shall apply at the transition frequencies.  
 (2) Emission level (dBuV/m) = 20 log Emission level (uV/m).  
 (3) All emanation from a class A/B digital device or system, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strengths specified above.

#### LIMIT OF CONDUCTED EMISSION OF CISPR 22

FREQUENCY (MHz)	Class A (dBuV)		Class B (dBuV)	
	Quasi-peak	Average	Quasi-peak	Average
0.15 - 0.5	79	66	66 - 56	56 - 46
0.50 - 5.0	73	60	56	46
5.0 - 30.0	73	60	60	50

- Note: (1) The lower limit shall apply at the transition frequencies.  
 (2) The limit decreases linearly with the logarithm of the frequency in the range 0.15 to 0.50 MHz  
 (3) All emanation from a class A/B digital device or system, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strengths specified above.





#### 4. TEST RESULTS (EMISSION)

##### 4.1 RADIO DISTURBANCE

Frequency Range : 0.15 - 30 MHz (Conducted Emission)  
30 - 1000 MHz (Radiated Emission)  
Input Voltage : 120 Vac, 60 Hz  
Temperature : 26 °C  
Humidity : 65 %  
Atmospheric Pressure : 990 mbar

TEST RESULT	Remarks
<b>PASS</b>	Minimum passing margin of conducted emission: -14.8 dB at 11.221 MHz Minimum passing margin of radiated emission: - 2.3 dB at 216.04 MHz

##### 4.2 EUT OPERATION CONDITION

1. Turn on the power of all equipment.
2. PC runs a test program to enable all functions.
3. PC reads and writes messages from FDD and HDD.
4. EUT sends "H" character to PC.
5. PC sends "H" messages to monitor and monitor displays "H" patterns on screen.
6. PC sends "H" messages to modem.
7. PC sends "H" messages to printer, and the printer prints them on paper.
8. PC sends audio messages to speaker.
9. Repeat steps 3-9.



### 4.3 TEST DATA OF CONDUCTED EMISSION

EUT: USB KEYBOARDMODEL: 9001AU6 dB Bandwidth: 10 kHzPHASE: LINE (L)

Freq.	Corr.	Reading Value		Emission Level		Limit		Margin	
[MHz]	Factor	[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
	(dB)	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
0.150	0.1	48.1	-	48.2	-	66.0	56.0	-17.8	-
0.214	0.2	41.3	-	41.5	-	63.0	53.0	-21.5	-
0.771	0.2	38.6	-	38.8	-	56.0	46.0	-17.2	-
3.614	0.2	34.9	-	35.1	-	56.0	46.0	-20.9	-
11.221	0.8	44.4	-	45.2	-	60.0	50.0	-14.8	-
20.991	1.2	33.5	-	34.7	-	60.0	50.0	-25.3	-

- Remarks:
1. "\*\*\*": Undetectable
  2. Q.P. and AV. are abbreviations of quasi-peak and average individually.
  3. "-": The Quasi-peak emission level also meets average limit and measurement with the average detector is unnecessary.
  4. The emission levels of other frequencies were very low against the limit.
  5. Margin value = Emission level - Limit value
  6. Emission Level = Correction Factor + Reading Value.

ADT CO. Shielded Room 3  
CISPR 22 CLASS B

04. Jun 99 11:45

EUT: 9001AU  
Test Spec: LISN : L  
Comment: 120V AC/60Hz

Report No. F88060102


Page 9-1

Tester: Kent Chen

Fast Scan Settings (3 Ranges)

Frequencies			Receiver Settings				
Start	Stop	Step	IF BW	Detector	M-Time	Atten	Preamp OpRge
150k	450k	3k	10k	PK	1ms	10dBLN	OFF 60dB
450k	5M	3k	10k	PK	1ms	10dBLN	OFF 60dB
5M	30M	3k	10k	PK	1ms	10dBLN	OFF 60dB

dBuV ◇ Mkr : 10.85900MHz 47.4 dBuV

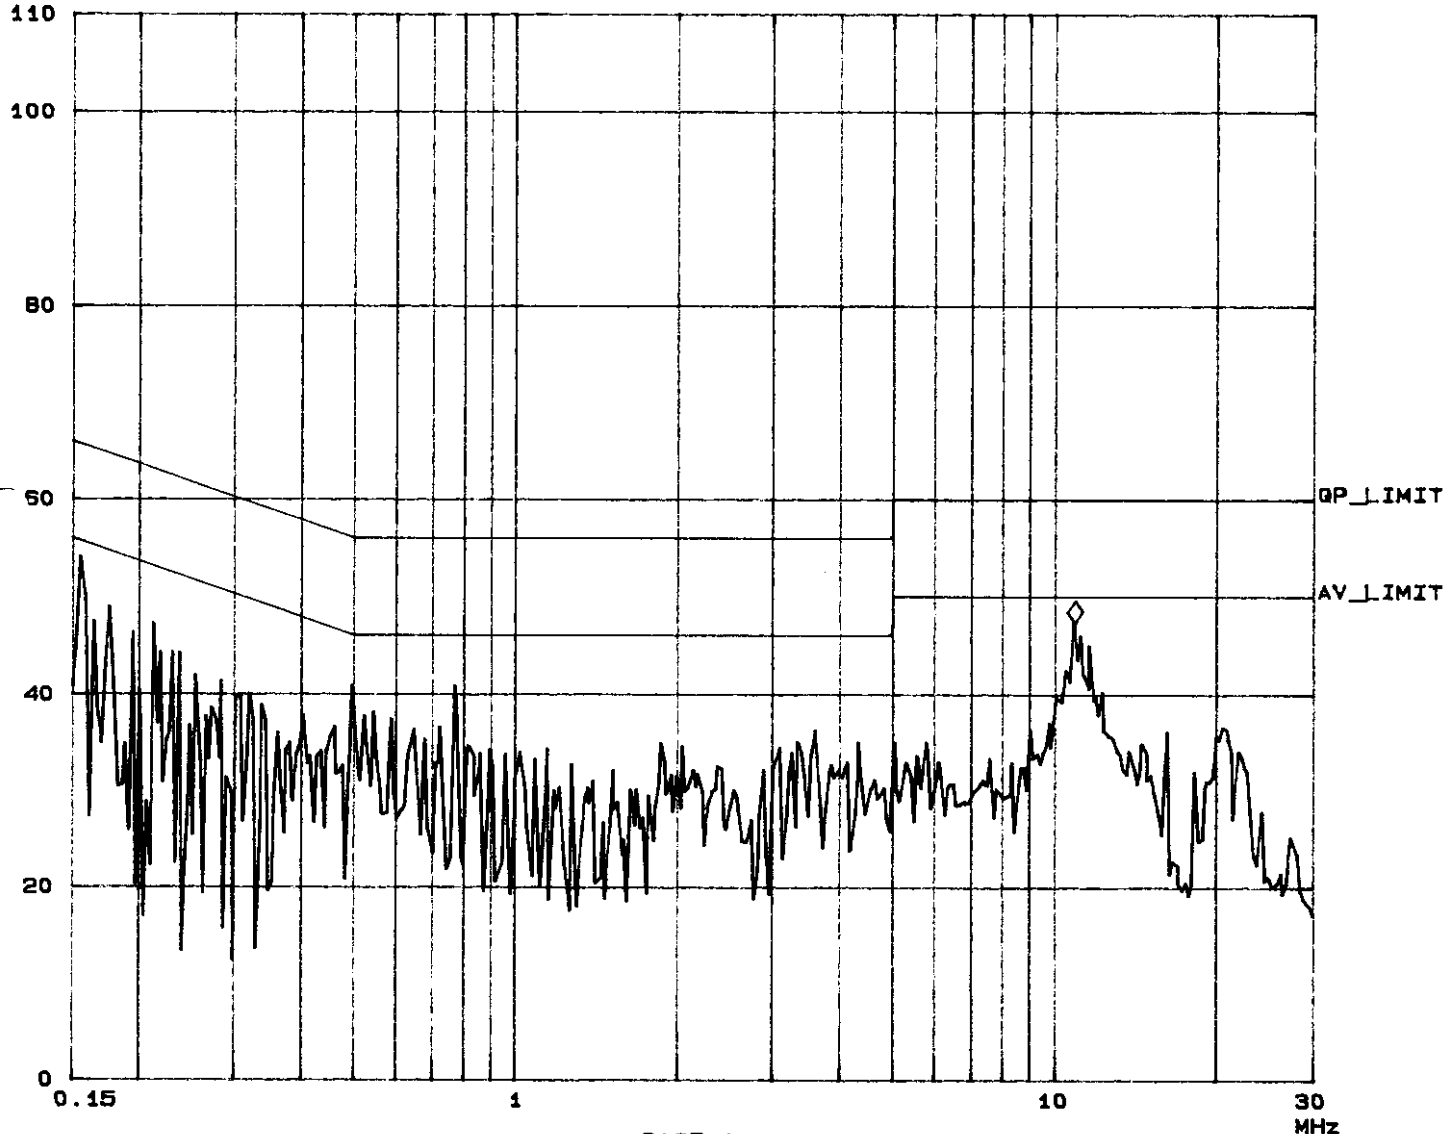



## TEST DATA OF CONDUCTED EMISSION

EUT: USB KEYBOARDMODEL: 9001AU6 dB Bandwidth: 10 kHzPHASE: NEUTRAL (N)

Freq.	Corr.	Reading Value		Emission Level		Limit		Margin	
[MHz]	Factor	[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
	(dB)	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
0.150	0.1	47.8	-	47.9	-	66.0	56.0	-18.1	-
0.214	0.2	40.7	-	40.9	-	63.0	53.0	-22.1	-
0.771	0.2	40.1	-	40.3	-	56.0	46.0	-15.7	-
3.614	0.2	34.0	-	34.2	-	56.0	46.0	-21.8	-
11.221	0.6	44.2	-	44.8	-	60.0	50.0	-15.2	-
20.991	0.8	31.5	-	32.3	-	60.0	50.0	-27.7	-

- Remarks:
1. "\*\*\*": Undetectable
  2. Q.P. and AV. are abbreviations of quasi-peak and average individually.
  3. "-": The Quasi-peak emission level also meets average limit and measurement with the average detector is unnecessary.
  4. The emission levels of other frequencies were very low against the limit.
  5. Margin value = Emission level - Limit value
  6. Emission Level = Correction Factor + Reading Value.

ADT CO. Shielded Room 3  
CISPR 22 CLASS B

04. Jun 99 11:35

EUT: 9001AU  
Test Spec: LISN: N  
Comment: 120V AC/50Hz

Report No F88060102


Page 10-1

Tested by Kent Chen

Fast Scan Settings (3 Ranges)

Frequencies			Receiver Settings				
Start	Stop	Step	IF BW	Detector	M-Time	Atten	Preamp OpRge
150k	450k	3k	10k	PK	1ms	10dB	BLN OFF 60dB
450k	5M	3k	10k	PK	1ms	10dB	BLN OFF 60dB
5M	30M	3k	10k	PK	1ms	10dB	BLN OFF 60dB

dBuV ◇ Mkr : 11.19800MHz 48.9 dBuV

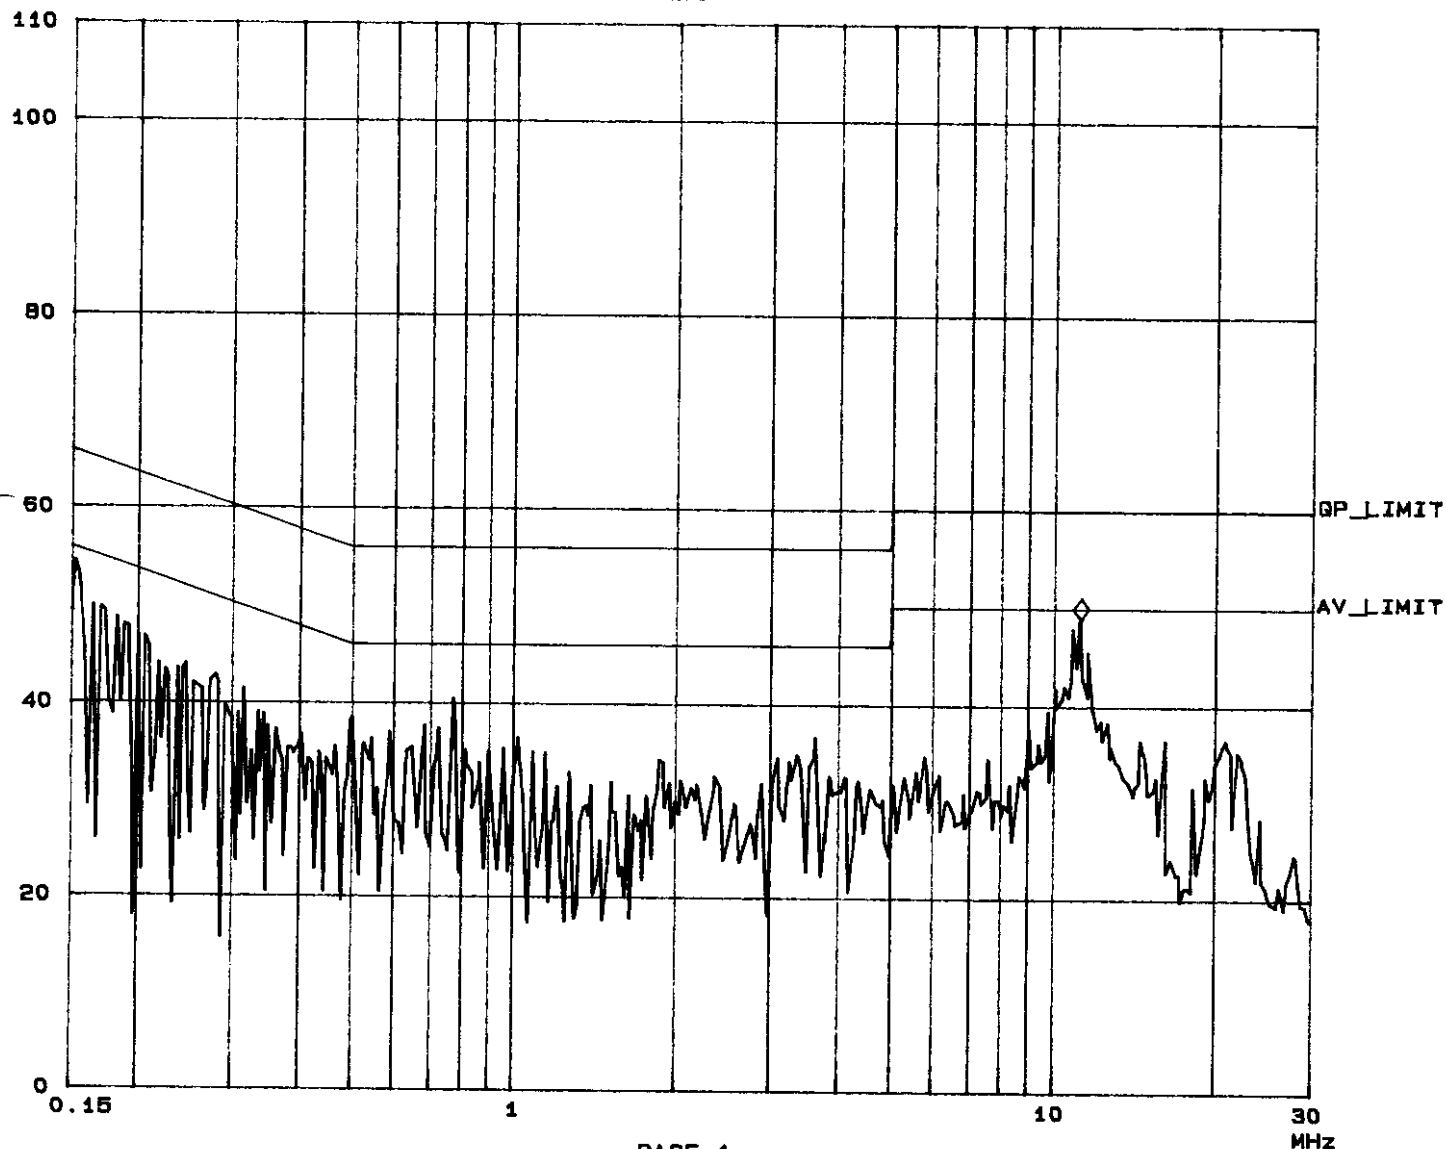



#### 4.4 TEST DATA OF RADIATED EMISSION

EUT: USB KEYBOARDMODEL: 9001AUANT. POLARITY: HorizontalDETECTOR FUNCTION: Quasi-peak6 dB BANDWIDTH: 120 kHzFREQUENCY RANGE: 30-1000 MHzMEASURED DISTANCE: 10 M

Frequency (MHz)	Correction Factor (dB)	Reading Value (dBuV)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (cm)	Table Angle (Degree)
36.35	18.1	7.9	26.0	30.0	-4.0	400	87
109.09	12.8	9.1	21.9	30.0	-8.1	400	310
121.23	14.2	6.1	20.3	30.0	-9.7	400	285
133.36	14.3	6.3	20.6	30.0	-9.4	400	254
157.58	12.3	10.1	22.4	30.0	-7.6	400	143
192.04	11.6	8.3	19.9	30.0	-10.1	400	120
203.74	11.8	14.8	26.6	30.0	-3.4	400	312
216.04	12.6	12.2	24.8	30.0	-5.2	400	105
240.05	14.2	16.8	31.0	37.0	-6.0	400	231
288.06	16.0	12.5	28.5	37.0	-8.5	400	44
312.07	16.9	9.4	26.3	37.0	-10.7	400	330

- REMARKS:
1. Emission level (dBuV/m) = Correction Factor (dB)  
+ Reading value (dBuV).
  2. Correction Factor (dB) = Ant. Factor (dB)+Cable loss (dB)
  3. The other emission levels were very low against the limit.
  4. Margin value = Emission level - Limit value



## TEST DATA OF RADIATED EMISSION

EUT: USB KEYBOARDMODEL: 9001AUANT. POLARITY: VerticalDETECTOR FUNCTION: Quasi-peak6 dB BANDWIDTH: 120 kHzFREQUENCY RANGE: 30-1000 MHzMEASURED DISTANCE: 10 M

Frequency (MHz)	Correction Factor (dB)	Reading Value (dBuV)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (cm)	Table Angle (Degree)
36.36	16.9	9.7	26.6	30.0	-3.4	218	184
109.09	11.5	10.0	21.5	30.0	-8.5	100	200
120.04	13.3	8.7	22.0	30.0	-8.0	100	246
133.35	14.8	11.2	26.0	30.0	-4.0	100	293
192.04	11.8	11.5	23.3	30.0	-6.7	100	1
216.04	12.7	15.0	27.7	30.0	-2.3	100	2
240.04	13.7	14.3	28.0	37.0	-9.0	100	253
288.07	15.2	9.1	24.3	37.0	-12.7	235	95

- REMARKS:
1. Emission level (dBuV/m) = Correction Factor (dB)  
+ Reading value (dBuV).
  2. Correction Factor (dB) = Ant. Factor (dB)+Cable loss (dB)
  3. The other emission levels were very low against the limit.
  4. Margin value = Emission level - Limit value



## 6. APPENDIX - INFORMATION OF THE TESTING LABORATORY

### Information of the testing laboratory

We, ADT Corp., are founded in 1988, to provide our best service in EMC and Safety consultation. Our laboratory is accredited by the following approval agencies according to ISO/IEC Guide 25 or EN 45001:

- |               |                                      |
|---------------|--------------------------------------|
| ● USA         | FCC, UL, NVLAP                       |
| ● Germany     | TUV Rheinland<br>TUV Product Service |
| ● Japan       | VCCI                                 |
| ● New Zealand | RFS                                  |
| ● Norway      | NEMKO, DNV                           |
| ● U.K.        | INCHCAPE, SGS                        |
| ● R.O.C.      | BSMI                                 |

Enclosed please find some certificates of our laboratory obtained from approval agencies. If you have any comments, please feel free to contact us with the following:

**Lin Kou EMC Lab.:**  
Tel: 886-2-26032180  
Fax: 886-2-26022943

**Hsin Chu EMC Lab:**  
Tel: 886-35-935343  
Fax: 886-35-935342

**Lin Kou Safety Lab.:**  
Tel: 886-2-26093195  
Fax: 886-2-26093184

**Design Center:**  
Tel: 886-2-26093195  
Fax: 886-2-26093184

E-mail: [service@mail.adt.com.tw](mailto:service@mail.adt.com.tw)  
<http://www.adt.com.tw>