

**FCC PART 15 SUBPART C
TEST REPORT**

for

**4 BUTTON KEY FOB
Model: SW-ATT-FOB2 (Fixed Mode)**

Prepared for

LINEAR, LLC.
1950 CAMINO VIDA ROBLE, SUITE 150
CARLSBAD, CA 92008

Prepared by: _____

MATT HARRISON

Approved by: _____

JEFF KLINGER

COMPATIBLE ELECTRONICS INC.
20621 PASCAL WAY
LAKE FOREST, CALIFORNIA 92630
(949) 587-0400

DATE: APRIL 7, 2014

	REPORT BODY	APPENDICES					TOTAL
		A	B	C	D	E	
PAGES	18	2	2	2	12	14	50

This report shall not be reproduced except in full, without the written approval of Compatible Electronics.



Brea Division
114 Olinda Drive
Brea, CA 92823
(714) 579-0500

Agoura Division
2337 Troutdale Drive
Agoura, CA 91301
(818) 597-0600

Silverado Division
19121 El Toro Road
Silverado, CA 92676
(949) 589-0700

Lake Forest Division
20621 Pascal Way
Lake Forest, CA 92630
(949) 587-0400

TABLE OF CONTENTS

Section / Title	PAGE
GENERAL REPORT SUMMARY	4
SUMMARY OF TEST RESULTS	5
1. PURPOSE	6
2. ADMINISTRATIVE DATA	7
2.1 Location of Testing	7
2.2 Traceability Statement	7
2.3 Cognizant Personnel	7
2.4 Date Test Sample was Received	7
2.5 Disposition of the Test Sample	7
2.6 Abbreviations and Acronyms	7
3. APPLICABLE DOCUMENTS	8
4. DESCRIPTION OF TEST CONFIGURATION	9
4.1 Description of Test Configuration	9
4.1.1 Photograph Test Configuration	9
4.1.2 Cable Construction and Termination	10
5. LISTS OF EUT, ACCESSORIES AND TEST EQUIPMENT	11
5.1 EUT and Accessory List	11
5.2 EMI Test Equipment	12
6. TEST SITE DESCRIPTION	13
6.1 Test Facility Description	13
6.2 EUT Mounting, Bonding and Grounding	13
6.3 Facility Environmental Characteristics	13
7. CHARACTERISTICS OF THE TRANSMITTER	14
7.1 Channel Number and Frequencies	14
7.2 Antenna	14
8. TEST PROCEDURES	15
8.1 RF Emissions	15
8.1.1 Conducted Emissions Test	15
8.1.2 Radiated Emissions (Spurious and Harmonics) Test	16
8.1.3 Fundamental Field Strength	17
8.1.4 Emissions Radiated Outside of the Fundamental Frequency Band	17
9. TEST PROCEDURE DEVIATIONS	18
10. CONCLUSIONS	18



LIST OF APPENDICES

APPENDIX	TITLE
A	Laboratory Accreditations and Recognitions
B	Modifications to the EUT
C	Additional Models Covered Under This Report
D	Diagrams, Charts, and Photos <ul style="list-style-type: none">• Test Setup Diagrams• Antenna and Amplifier Factors• Radiated Emissions Photos
E	Radiated Emissions Data Sheets

**LIST OF FIGURES**

FIGURE	TITLE
1	Plot Map And Layout of Test Site Below 1GHz
2	Plot Map And Layout of Test Site Above 1GHz



GENERAL REPORT SUMMARY

This electromagnetic emission test report is generated by Compatible Electronics Inc., which is an independent testing and consulting firm. The test report is based on testing performed by Compatible Electronics personnel according to the measurement procedures described in the test specifications given below and in the "Test Procedures" section of this report.

The measurement data and conclusions appearing herein relate only to the sample tested and this report may not be reproduced in any form unless done so in full with the written permission of Compatible Electronics.

This report must not be used to claim product endorsement by NVLAP, NIST, or any other agency of the U.S. Government or other governments.

Device Tested: 4 Button Key Fob
Model: SW-ATT-FOB2 (Fixed Mode)
S/N: N/A

Product Description: The EUT is a proprietary 4 Button Key Fob that reports to the Digital Life Control Panel.

Modifications: The EUT was not modified during testing.

Manufacturer: Linear, LLC.
1950 Camino Vida Roble, Suite 150
Carlsbad, CA 92008

Test Date: April, 2-4, & 7, May 9, June 9, 2014

Test Specifications: EMI requirements
CFR Title 47, Part 15 Subpart C Sections 15.205, 15.209 and 15.249

Test Procedure: ANSI C63.10



SUMMARY OF TEST RESULTS

TEST	DESCRIPTION	RESULTS
1	Conducted RF Emissions, 150 kHz - 30 MHz.	The EUT is battery powered; therefore this test was not performed.
2	Radiated RF Emissions & Harmonics, 9 kHz – 10,000 MHz.	Complies with the limits of CFR Title 47 Part 15 Subpart C Section 15.205, 15.209, & 15.249

SIX HIGHEST RADIATED EMISSIONS READINGS

	Reading Type (PK / QP / AV)	Polarization (Vert / Horz)	Frequency (MHz)	Level (dB μ V/m)	Limit (dB μ V/m)	Delta (dB)	Test Distance
1	Av	V	2735.34	46.42	53.98	-7.56	3-Meter
2	Av	V	2759.34	45.94	53.98	-8.04	3-Meter
3	Av	V	1839.56	44.15	53.98	-9.83	3-Meter
4	Av	H	1839.56	44.01	53.98	-9.97	3-Meter
5	Av	V	2756.34	43.46	53.98	-10.52	3-Meter
6	Av	V	1823.56	43.37	53.98	-10.61	3-Meter



1. PURPOSE

This document is a qualification test report based on the Electromagnetic Interference (EMI) tests performed on the 4 Button Key Fob Model: SW-ATT-FOB2 (Fixed Mode). The EMI measurements were performed according to the measurement procedure described in ANSI C63.10. The tests were performed in order to determine whether the electromagnetic emissions from the equipment under test, referred to as EUT (equipment under test) hereafter, are within the specification limits defined by the Code of Federal Regulations Title 47, Part 15 Subpart C sections 15.205, 15.209 and 15.249.



2. ADMINISTRATIVE DATA

2.1 Location of Testing

The tests described herein were performed at the test facility of Compatible Electronics, 20621 Pascal Way Lake Forest, California 92630.

2.2 Traceability Statement

The calibration certificates of all test equipment used during the test are on file at the location of the test. The calibration is traceable to the National Institute of Standards and Technology (NIST).

2.3 Cognizant Personnel

Linear, LLC.

Josh Hansen Regulatory Engineer

Compatible Electronics, Inc.

Matt Harrison Test Technician

Jeff Klinger Director of Engineering

2.4 Date Test Sample was Received

The test sample was received on April 2nd, 2014.

2.5 Disposition of the Test Sample

The test sample remains at Compatible Electronics, Inc. as of the date of this test report.

2.6 Abbreviations and Acronyms

The following abbreviations and acronyms may be used in this document.

RF	Radio Frequency
EMI	Electromagnetic Interference
EUT	Equipment Under Test
P/N	Part Number
S/N	Serial Number
HP	Hewlett Packard
ITE	Information Technology Equipment
CML	Corrected Meter Limit
LISN	Line Impedance Stabilization Network
NVLAP	National Voluntary Laboratory Accreditation Program
CFR	Code of Federal Regulations
PCB	Printed Circuit Board
TX	Transmit
RX	Receive



3. APPLICABLE DOCUMENTS

The following documents are referenced or used in the preparation of this Test Report.

SPEC	TITLE
CFR Title 47, Part 15	FCC Rules – Radio frequency devices (including digital devices)
ANSI C63.10: 2009	American National Standard for Testing Unlicensed Wireless Devices



4. DESCRIPTION OF TEST CONFIGURATION

4.1 Description of Test Configuration

The 4 Button Key Fob Model: SW-ATT-FOB2 (Fixed Mode) (EUT) was setup in a tabletop configuration. The EUT was powered by 2-CR 2025 batteries. The EUT was checked in all 3-Axes and the worst case was found to be the X-Axis. The EUT was continuously transmitting a data stream during transmitter tests and continuously receiving during receiver tests.

The 2-CR 2025 batteries were replaced with 2 new CR 2025 batteries; the transmitting signal amplitude and frequency did not vary.

It was determined that the emissions were at their highest level when the EUT was transmitting in the configuration described above for Radiated Emissions. The final radiated data was taken in the above configuration. Please see Appendix E for the test data.

4.1.1 Photograph Test Configuration



4.1.2 Cable Construction and Termination

Cable 1

There were no interconnecting cables.



5. LISTS OF EUT, ACCESSORIES AND TEST EQUIPMENT**5.1 EUT and Accessory List**

#	EQUIPMENT TYPE	MANU-FACTURER	MODEL	SERIAL NUMBER	FCC ID
1	4 BUTTON KEY FOB (EUT)	LINEAR, LLC.	SW-ATT-FOB2 (Fixed Mode)	N/A	EF400120
2	BATTERY	PANASONIC	CR 2025	N/A	N/A



5.2 EMI Test Equipment

EQUIPMENT TYPE	MANUFACTURER	MODEL NUMBER	SERIAL NUMBER	CAL. DATE	CAL. DUE DATE
Computer	Compatible Electronics	NONE	NONE	N/A	N/A
EMI Receiver	Rohde & Schwarz	ESIB40	100219	9/19/2013	9/19/2014
Antenna, Loop	Com Power	AL-130	121049	12/6/2013	12/6/2015
Antenna, CombiLog	Com Power	AC-220	25857	4/16/2013	4/16/2015
Antenna, Horn 1-18GHz	Com Power	AH-118	071250	07/03/2012	07/03/2014
Pre-Amp, 1-18GHz	Com Power	PAM-118	443013	4/8/2013	4/8/2014
Pre-Amp, 1-18GHz	Com Power	PAM-118	443011	4/8/2013	4/8/2014
Notch Filter	Microwave Circuits	N0309153	3709-01 DC0415	5/9/2013	5/9/2014
Mast, Antenna Positioner	Sunol Science Corporation	TWR 95-4	081309-3	N/A	N/A
Antenna Mast	Sunol Science Corporation	TWR 95-4	081309-3	N/A	N/A
Turntable	Sunol Science Corporation	FM2011VS	N/A	N/A	N/A
Mast and Turntable Controller	Sunol Science Corporation	SC104V	020808-1	N/A	N/A



6. TEST SITE DESCRIPTION

6.1 Test Facility Description

Please refer to section 2.1 and the figures in Appendix D of this report for test location.

6.2 EUT Mounting, Bonding and Grounding

The EUT was mounted on a 1.0 by 1.5 by 0.8 meter high non-conductive table, which was placed on the ground plane.

The EUT was not grounded.

6.3 Facility Environmental Characteristics

When applicable refer to the data sheets in Appendix E for the relative humidity, air temperature, and barometric pressure.



7. CHARACTERISTICS OF THE TRANSMITTER

7.1 Channel Number and Frequencies

There 4 operating channels and the EUT has GFSK modulation

1 == 911.78 MHz

2 == 913.28 MHz

3 == 918.78 MHz

4 == 919.78 MHz

7.2 Antenna

The antenna is made up of an integrated PCB antenna which is located on the PCB.



8. TEST PROCEDURES

The following sections describe the test methods and the specifications for the tests. Test results are also included in this section.

8.1 RF Emissions

8.1.1 Conducted Emissions Test

(This test was not performed)

The EMI receiver was used as a measuring meter. A quasi-peak and/or average reading was taken only where indicated in the data sheets. The LISN output was measured using the EMI receiver. The output of the second LISN was terminated by a 50-ohm termination. The effective measurement bandwidth used for this test was 9 kHz.

Please see section 6.2 of this report for mounting, bonding, and grounding of the EUT. The EUT received its power through the LISN, which was bonded to the ground plane. The EUT was set up with the minimum distances from any conductive surfaces as specified in ANSI 63.4. The excess power cord was wrapped in a figure eight pattern to form a bundle not exceeding 0.4 meters in length.

The conducted emissions from the EUT were maximized for operating mode as well as cable placement. The final data was collected under program control by the computer software. The final qualification data is located in Appendix E.

Test Results:

The EUT is battery powered; therefore this test was not performed.



8.1.2 Radiated Emissions (Spurious and Harmonics) Test

The EMI receiver was used as a measuring meter. The receiver was used in the peak detect mode with the "Max Hold" feature activated. In this mode, the receiver records the highest measured reading over all the sweeps. Amplifiers were used to increase the sensitivity of the instrument. There was one Microwave Preamplifier used for frequencies above 1 GHz.

For spurious emissions the quasi-peak detector was used for frequencies below 1GHz and the average detector was used for frequencies above 1 GHz.

For the Harmonic emissions a linear average detector was used.

The measurement bandwidths and transducers used for the radiated emissions test were:

FREQUENCY RANGE (MHz)	TRANSDUCER	EFFECTIVE MEASUREMENT BANDWIDTH
.009 to .150	Active Loop Antenna	200 Hz
.150 to 30	Active Loop Antenna	9 kHz
30 to 1000	Combilog Antenna	120 kHz
1000 to 10000	Horn Antenna	1 MHz

The TDK FAC-3 shielded test chamber of Compatible Electronics, Inc. was used for radiated emissions testing. This test site is in full compliance with ANSI C63.10, EN 50147-2, and CISPR 22. Please see section 6.2 of this report for mounting, bonding and grounding of the EUT. The turntable supporting the EUT is remote controlled using a motor. The turntable permits EUT rotation of 360 degrees in order to maximize emissions. Also, the antenna mast allows height variation of the antenna from 1 meter to 4 meters. Data was collected in the worst case (highest emission) configuration of the EUT. At each reading, the EUT was rotated 360 degrees and the antenna height was varied from 1 to 4 meters in both vertical and horizontal polarizations (for E field radiated field strength).

Test Results:

The EUT complies with the limits of CFR Title 47 Part 15 Subpart C sections 15.205, 15.209 and 15.249.



8.1.3 Fundamental Field Strength

The Peak Transmit Radiated Field Strength was measured at a 3-meter test distance using the EMI Receiver to obtain the final test data. The final qualification data sheets are located in Appendix E.

Test Results:

The EUT complies with Part 15 Subpart C, Section 15.249.

8.1.4 Emissions Radiated Outside of the Fundamental Frequency Band

The Band Edge measurement was measured using the EMI Receiver at a 3-meter test distance to obtain the final test data. The lower and upper channels were tuned during the low and high band edge tests. The final qualification data sheets are located in Appendix E.

Test Results:

The EUT complies with Part 15 Subpart C, Section 15.249.



9. TEST PROCEDURE DEVIATIONS

The test procedures were not deviated from throughout all tests.

10. CONCLUSIONS

The 4 Button Key Fob Model: SW-ATT-FOB2 (Fixed Mode) meets all of the relevant specification requirements defined in the Code of Federal Regulations Title 47, Part 15 Subpart C sections 15.205, 15.209 and 15.249.



APPENDIX A

***LABORATORY ACCREDITATIONS AND
RECOGNITIONS***



Brea Division
114 Olinda Drive
Brea, CA 92823
(714) 579-0500

Agoura Division
2337 Troutdale Drive
Agoura, CA 91301
(818) 597-0600

Silverado Division
19121 El Toro Road
Silverado, CA 92676
(949) 589-0700

Lake Forest Division
20621 Pascal Way
Lake Forest, CA 92630
(949) 587-0400

LABORATORY ACCREDITATIONS AND RECOGNITIONS



NVLAP LAB CODES 200063-0,
200528-0, 200527-0

For US, Canada, Australia/New Zealand, Taiwan and the European Union, Compatible Electronics is currently accredited by NVLAP to ISO/IEC 17025 an ISO 9002 equivalent. Please follow the link to the NIST site for each of our facilities NVLAP certificate and scope of accreditation.

NVLAP listing links

Agoura Division - <http://ts.nist.gov/Standards/scopes/2000630.htm>

Brea Division - <http://ts.nist.gov/Standards/scopes/2005280.htm>

Silverado/Lake Forest Division - <http://ts.nist.gov/Standards/scopes/2005270.htm>



ANSI listing

[CETCB](#)

<https://www.ansica.org/wwwversion2/outside/ALLdirectoryDetails.asp?menuID=1&prgID=3&orgID=123&status=4>



Compatible Electronics has been nominated as a Conformity Assessment Body (CAB) for EMC under the US/EU Mutual Recognition Agreement (MRA).



Compatible Electronics has been nominated as a Conformity Assessment Body (CAB) for Taiwan/BSMI under the US/APEC (Asia-Pacific Economic Cooperation) Mutual Recognition Agreement (MRA).

We are also certified/listed for IT products by the following country/agency:



VCCI Listing, from VCCI site

[Enter "Compatible" in search form](#) http://www.vcci.or.jp/vcci_e/activity/registration/setsubi.html



FCC Listing, from FCC OET site

[FCC test lab search](#) <https://fjallfoss.fcc.gov/oetcf/eas/reports/TestFirmSearch.cfm>



Compatible Electronics IC listing can be found at:

<http://www.ic.gc.ca/eic/site/ic1.nsf/eng/home>



Brea Division
114 Olinda Drive
Brea, CA 92823
(714) 579-0500

Agoura Division
2337 Troutdale Drive
Agoura, CA 91301
(818) 597-0600

Silverado Division
19121 El Toro Road
Silverado, CA 92676
(949) 589-0700

Lake Forest Division
20621 Pascal Way
Lake Forest, CA 92630
(949) 587-0400

APPENDIX B

MODIFICATIONS TO THE EUT



Brea Division
114 Olinda Drive
Brea, CA 92823
(714) 579-0500

Agoura Division
2337 Troutdale Drive
Agoura, CA 91301
(818) 597-0600

Silverado Division
19121 El Toro Road
Silverado, CA 92676
(949) 589-0700

Lake Forest Division
20621 Pascal Way
Lake Forest, CA 92630
(949) 587-0400

MODIFICATIONS TO THE EUT

There were no modifications made to the EUT during testing.



APPENDIX C

***ADDITIONAL MODELS COVERED
UNDER THIS REPORT***



Brea Division
114 Olinda Drive
Brea, CA 92823
(714) 579-0500

Agoura Division
2337 Troutdale Drive
Agoura, CA 91301
(818) 597-0600

Silverado Division
19121 El Toro Road
Silverado, CA 92676
(949) 589-0700

Lake Forest Division
20621 Pascal Way
Lake Forest, CA 92630
(949) 587-0400

ADDITIONAL MODELS COVERED UNDER THIS REPORT

USED FOR THE PRIMARY TEST

4 BUTTON KEY FOB
Model: SW-ATT-FOB2 (Fixed Mode)
S/N: None

No additional models were tested.




APPENDIX D


DIAGRAMS, CHARTS, AND PHOTOS



**FIGURE 1: PLOT MAP AND LAYOUT OF TEST SITE
BELOW 1GHZ**

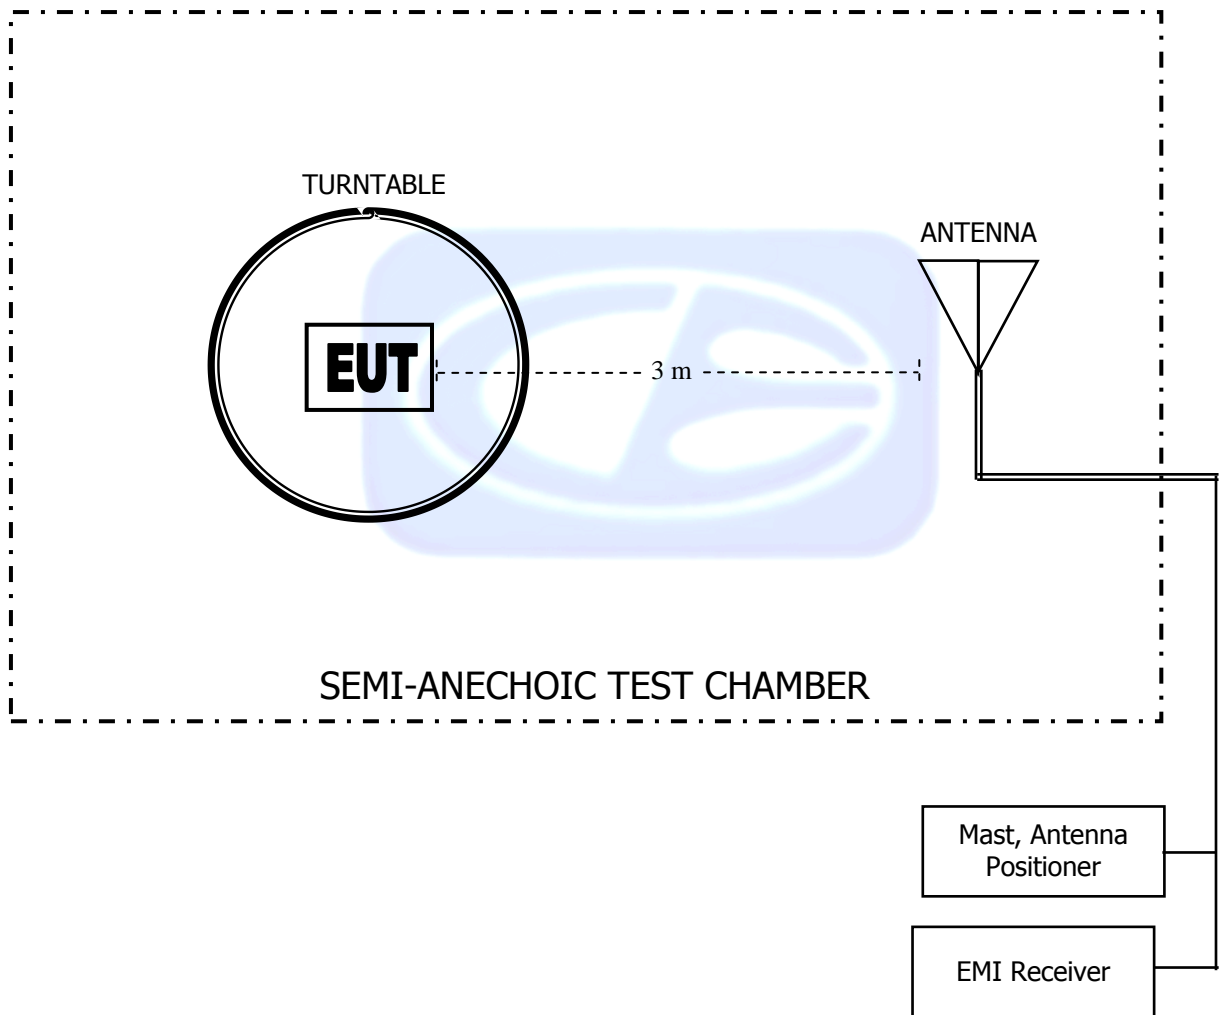

**FIGURE 2: PLOT MAP AND LAYOUT OF TEST SITE
ABOVE 1GHZ**

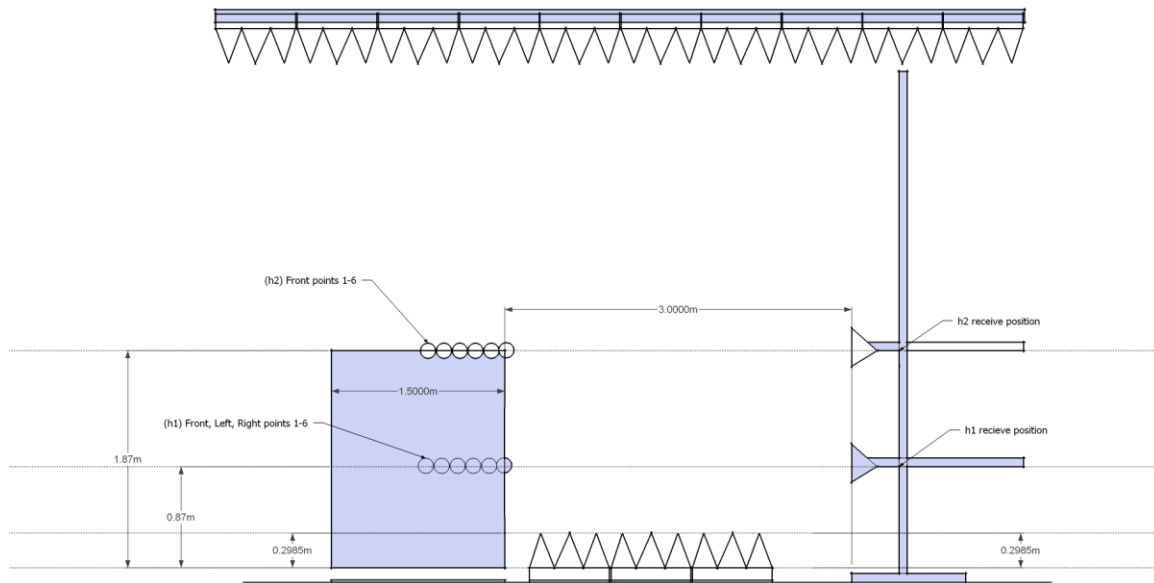

COM-POWER AL-130**LOOP ANTENNA**

S/N: 121049

CALIBRATION DUE: DECEMBER 6, 2015

FREQUENCY (MHz)	MAGNETIC (dB/m)	ELECTRIC (dB/m)	FREQUENCY (MHz)	MAGNETIC (dB/m)	ELECTRIC (dB/m)
0.009	-34.64	16.86	0.8	-36.32	15.18
0.01	-34.78	16.72	0.9	-36.22	15.28
0.02	-35.91	15.59	1.0	-36.22	15.28
0.03	-35.48	16.02	2.0	-35.91	15.59
0.04	-35.82	15.68	3.0	-35.91	15.59
0.05	-36.49	15.01	4.0	-36.01	15.49
0.06	-36.30	15.20	5.0	-35.80	15.70
0.07	-36.43	15.07	6.0	-36.00	15.50
0.08	-36.30	15.20	7.0	-35.90	15.60
0.09	-36.39	15.11	8.0	-35.70	15.80
0.1	-36.41	15.09	9.0	-35.70	15.80
0.2	-36.61	14.89	10.0	-35.60	15.90
0.3	-36.63	14.87	15.0	-36.52	14.98
0.4	-36.52	14.99	20.0	-35.75	15.75
0.5	-36.63	14.87	25.0	-37.78	13.72
0.6	-36.62	14.88	30.0	-38.62	12.88
0.7	-36.53	14.97			



COM-POWER AC-220**LAB R - COMBILOG ANTENNA**

S/N: 25857

CALIBRATION DUE: APRIL 16, 2015

FREQUENCY (MHz)	FACTOR (dB)	FREQUENCY (MHz)	FACTOR (dB)
30	17.8	160	8.3
35	18.4	180	9.4
40	19.2	200	9.0
45	17.2	250	12.0
50	17.2	300	13.4
60	13.5	400	15.0
70	8.9	500	17.3
80	6.0	600	17.8
90	7.1	700	20.0
100	8.0	800	20.5
120	9.2	900	20.8
140	7.5	1000	22.4



COM-POWER AH-118**HORN ANTENNA**

S/N: 071250

CALIBRATION DUE: JULY 3, 2014

FREQUENCY (MHz)	FACTOR (dB)	FREQUENCY (MHz)	FACTOR (dB)
1000	26.5	9500	40.4
1500	27.2	10000	40.3
2000	31.5	10500	41.7
2500	31.9	11000	42.1
3000	32.7	11500	42.3
3500	34.0	12000	42.6
4000	33.5	12500	41.4
4500	34.9	13000	42.7
5000	36.2	13500	43.6
5500	36.6	14000	42.4
6000	36.8	14500	42.7
6500	37.4	15000	45.4
7000	39.4	15500	45.1
7500	39.6	16000	42.9
8000	42.4	16500	44.0
8500	40.3	17000	46.8
9000	39.6	17500	47.5
		18000	46.6



COM-POWER PAM-118**1-18GHz - PREAMPLIFIER**

S/N: 443013

CALIBRATION DUE: APRIL 8, 2014

FREQUENCY (MHz)	FACTOR (dB)	FREQUENCY (MHz)	FACTOR (dB)
500	26.32	5500	25.55
1000	24.72	6000	25.54
1100	25.89	6500	24.57
1200	25.41	7000	23.51
1300	26.28	7500	23.59
1400	25.94	8000	23.32
1500	25.59	8500	22.76
1600	26.95	9000	23.15
1700	25.52	9500	24.41
1800	25.75	10000	25.71
1900	26.00	11000	26.07
2000	25.38	12000	26.17
2500	26.06	13000	24.72
3000	26.24	14000	23.19
3500	25.82	15000	25.42
4000	26.04	16000	25.07
4500	25.96	17000	24.24
5000	26.02	18000	24.92



COM-POWER PAM-118**1-18GHz - PREAMPLIFIER**

S/N: 443011

CALIBRATION DUE: April 8, 2014

FREQUENCY (GHz)	FACTOR (dB)	FREQUENCY (GHz)	FACTOR (dB)
0.500	27.01	7.000	23.96
1.000	25.68	7.500	24.28
1.500	26.55	8.000	24.33
2.000	26.16	8.500	24.42
2.500	27.21	9.500	25.89
3.000	26.46	10.000	27.73
3.500	26.52	11.000	28.36
4.000	27.67	12.000	27.21
4.500	26.32	13.000	27.69
5.000	26.90	14.000	25.94
5.500	26.72	15.000	24.27
6.000	26.48	16.000	27.22
6.500	27.12	17.000	26.12
		18.000	25.96





FRONT VIEW

LINEAR, LLC.
4 BUTTON KEY FOB
Model: SW-ATT-FOB2 (Fixed Mode)
FCC SUBPART C - RADIATED EMISSIONS < 1GHz

**PHOTOGRAPH SHOWING THE EUT CONFIGURATION
FOR MAXIMUM EMISSIONS**





REAR VIEW

LINEAR, LLC.


4 BUTTON KEY FOB

Model: SW-ATT-FOB2 (Fixed Mode)

FCC SUBPART C - RADIATED EMISSIONS < 1GHz

**PHOTOGRAPH SHOWING THE EUT CONFIGURATION
FOR MAXIMUM EMISSIONS**



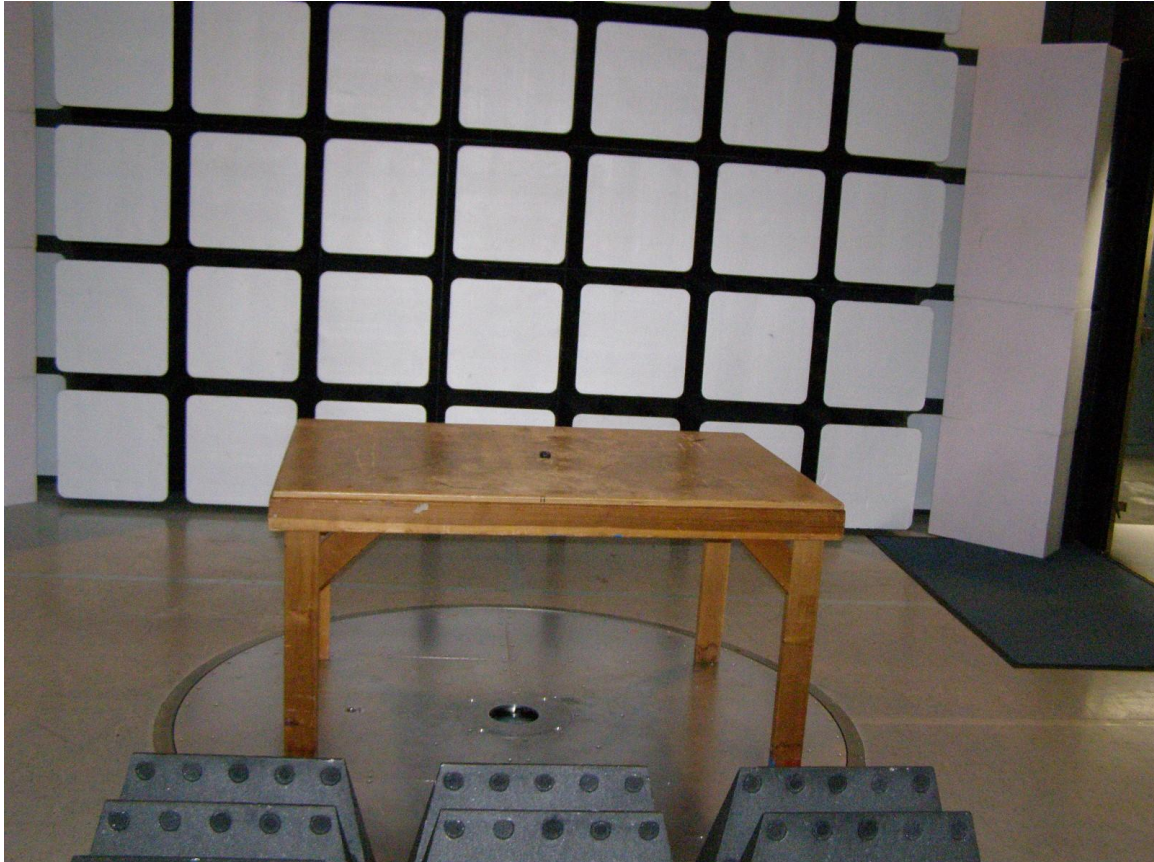

FRONT VIEW

LINEAR, LLC.

4 BUTTON KEY FOB

Model: SW-ATT-FOB2 (Fixed Mode)

FCC SUBPART C - RADIATED EMISSIONS > 1GHz

**PHOTOGRAPH SHOWING THE EUT CONFIGURATION
FOR MAXIMUM EMISSIONS**





REAR VIEW

LINEAR, LLC.

4 BUTTON KEY FOB

Model: SW-ATT-FOB2 (Fixed Mode)

FCC SUBPART C - RADIATED EMISSIONS > 1GHz

**PHOTOGRAPH SHOWING THE EUT CONFIGURATION
FOR MAXIMUM EMISSIONS**



APPENDIX E

RADIATED EMISSIONS DATA SHEETS



Brea Division
114 Olinda Drive
Brea, CA 92823
(714) 579-0500

Agoura Division
2337 Troutdale Drive
Agoura, CA 91301
(818) 597-0600


Silverado Division
19121 El Toro Road
Silverado, CA 92676
(949) 589-0700

Lake Forest Division
20621 Pascal Way
Lake Forest, CA 92630
(949) 587-0400

Title: FCC 15.209
File: Radiated Pre-Scan 30-1000Mhz_High.set
Operator: Matt Harrison
EUT Type: 4 Button Key Fob: SW-ATT-FOB.
EUT Condition: Transmitting 919.78MHz (Worst Case).
Comments:
Temp: 70f
Hum: 39%
Battery Powered

4/3/2014 8:30:49 AM
Sequence: Preliminary Scan

Compatible Electronics, Inc. FAC-3 (Lab R)

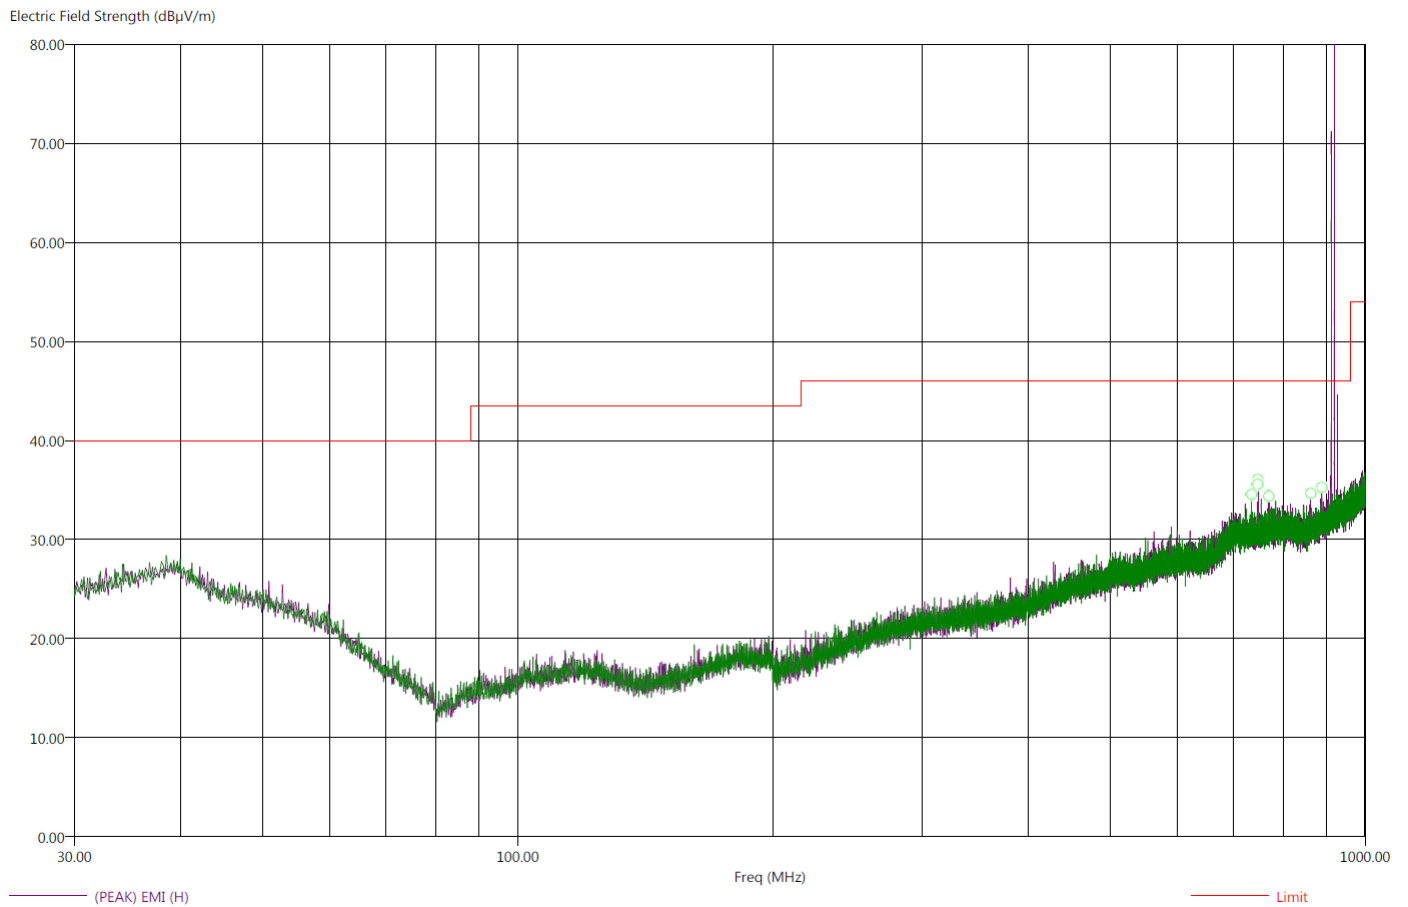

There were no radiated emissions other than harmonics found below 30 MHz or above 1000MHz
There were no radiated emissions found in Receive Mode.



Brea Division
114 Olinda Drive
Brea, CA 92823
(714) 579-0500

Agoura Division
2337 Troutdale Drive
Agoura, CA 91301
(818) 597-0600

Silverado Division
19121 El Toro Road
Silverado, CA 92676
(949) 589-0700

Lake Forest Division
20621 Pascal Way
Lake Forest, CA 92630
(949) 587-0400


Title: FCC 15.209
 File: Radiated Final 30-1000Mhz_High.set
 Operator: Matt Harrison
 EUT Type: 4 Button Key Fob: SW-ATT-FOB.
 EUT Condition: Transmitting 919.78MHz (Worst Case).
 Comments:
 Temp: 70f
 Hum: 39%
 Battery Powered

4/3/2014 8:52:28 AM
 Sequence: Final Measurements

Compatible Electronics, Inc. FAC-3 (Lab P)

Freq (MHz)	(QP) Margin (dB)	(QP) EMI (dB μ V/m)	(PEAK) EMI (dB μ V/m)	Limit (dB μ V/m)	Pol	Ttbl Agl (deg)	Twr Ht (cm)	Transducer (dB)	Cable(dB)
734.50	-18.45	27.55	33.12	46.00	V	253.50	363.28	20.18	3.18
746.80	-18.26	27.74	33.15	46.00	H	79.50	290.92	20.24	3.04
747.80	-18.43	27.57	32.87	46.00	H	360.00	291.58	20.25	3.02
770.60	-18.11	27.89	34.18	46.00	H	140.75	258.26	20.36	3.13
862.70	-18.03	27.97	33.44	46.00	H	97.75	141.85	20.69	2.71
889.00	-17.16	28.84	34.08	46.00	H	204.50	318.50	20.77	3.13

*There were no radiated emissions other than harmonics found below 30 MHz or above 1000MHz
 There were no radiated emissions found in Receive Mode.*

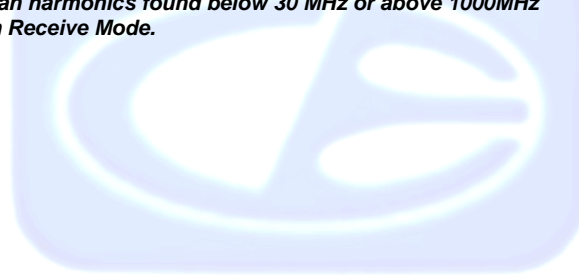

Brea Division
 114 Olinda Drive
 Brea, CA 92823
 (714) 579-0500

Agoura Division
 2337 Troutdale Drive
 Agoura, CA 91301
 (818) 597-0600

Silverado Division
 19121 El Toro Road
 Silverado, CA 92676
 (949) 589-0700

Lake Forest Division
 20621 Pascal Way
 Lake Forest, CA 92630
 (949) 587-0400

***FUNDAMENTAL & HARMONICS
DATA SHEETS***



Brea Division
114 Olinda Drive
Brea, CA 92823
(714) 579-0500

Agoura Division
2337 Troutdale Drive
Agoura, CA 91301
(818) 597-0600

Silverado Division
19121 El Toro Road
Silverado, CA 92676
(949) 589-0700

Lake Forest Division
20621 Pascal Way
Lake Forest, CA 92630
(949) 587-0400

FCC 15.249Linear, LLC.
4 Button Key Fob
SW-ATT-FOB2
Model: (Fixed Mode)Date: 4/2/2014
Lab: R
Tested By: Matt Harrison**Fundamental Field Strength**

Freq. (MHz)	Peak Level (dB μ V)	Pol (v/h)	Limit (dB μ V)	Margin (dB)	Peak / QP / Avg	Table Angle (deg)	Tower Height (m)	Comments
911.78	79.84	H	93.97	-14.13	Peak	338.00	1.00	X-Axis
911.78	68.10	V	93.97	-25.87	Peak	85.00	1.60	X-Axis
918.78	82.19	H	93.97	-11.78	Peak	298.00	1.00	X-Axis
918.78	69.98	V	93.97	-23.99	Peak	275.00	1.60	X-Axis
919.78	82.67	H	93.97	-11.30	Peak	300.00	1.00	X-Axis
919.78	69.25	V	93.97	-24.72	Peak	275.00	1.60	X-Axis

Test distance
3 meter

HARMONIC EMISSIONS LOW CHANNEL HORIZONTAL

FCC 15.249

Linear, LLC.

4 Button Key Fob

SW-ATT-FOB2

Model: (Fixed Mode)

Date: 4/4/2014

Lab: R

Tested By: Matt Harrison

Harmonic Emissions

Freq. (MHz)	Level (dBµV)	Pol (v/h)	Limit (dBµV)	Margin (dB)	Peak / QP / Avg	Ant. Height (m)	Table Angle (deg)	Comments
1823.56	44.67	H	73.98	-29.31	Peak	1.02	100	
1823.56	39.51	H	53.98	-14.47	Avg	1.02	100	
2735.34	46.99	H	73.98	-26.99	Peak	1.30	164	
2735.34	42.06	H	53.98	-11.92	Avg	1.30	164	
3647.12		H	73.98		Peak			No Emissions Found
3647.12		H	53.98		Avg			No Emissions Found
4558.9		H	73.98		Peak			No Emissions Found
4558.9		H	53.98		Avg			No Emissions Found
5470.68		H	73.98		Peak			No Emissions Found
5470.68		H	53.98		Avg			No Emissions Found
6382.46		H	73.98		Peak			No Emissions Found
6382.46		H	53.98		Avg			No Emissions Found
7294.24		H	73.98		Peak			No Emissions Found
7294.24		H	53.98		Avg			No Emissions Found
8206.02		H	73.98		Peak			No Emissions Found
8206.02		H	53.98		Avg			No Emissions Found
9117.8		H	73.98		Peak			No Emissions Found
9117.8		H	53.98		Avg			No Emissions Found

Test distance

3 meter



HARMONIC EMISSIONS LOW CHANNEL VERTICAL

FCC 15.249

Linear, LLC.

4 Button Key Fob

SW-ATT-FOB2

Model: (Fixed Mode)

Date: 4/4/2014

Lab: R

Tested By: Matt Harrison

Harmonic Emissions

Freq. (MHz)	Level (dB μ V)	Pol (v/h)	Limit (dB μ V)	Margin (dB)	Peak / QP / Avg	Ant. Height (m)	Table Angle (deg)	Comments
1823.56	46.42	V	73.98	-27.56	Peak	1.31	79	
1823.56	43.37	V	53.98	-10.61	Avg	1.31	79	
2735.34	49.79	V	73.98	-24.19	Peak	1.06	86	
2735.34	46.42	V	53.98	-7.56	Avg	1.06	86	
3647.12		V	73.98		Peak			No Emissions Found
3647.12		V	53.98		Avg			No Emissions Found
4558.9		V	73.98		Peak			No Emissions Found
4558.9		V	53.98		Avg			No Emissions Found
5470.68		V	73.98		Peak			No Emissions Found
5470.68		V	53.98		Avg			No Emissions Found
6382.46		V	73.98		Peak			No Emissions Found
6382.46		V	53.98		Avg			No Emissions Found
7294.24		V	73.98		Peak			No Emissions Found
7294.24		V	53.98		Avg			No Emissions Found
8206.02		V	73.98		Peak			No Emissions Found
8206.02		V	53.98		Avg			No Emissions Found
9117.8		V	73.98		Peak			No Emissions Found
9117.8		V	53.98		Avg			No Emissions Found

Test distance

3 meter



HARMONIC EMISSIONS MID CHANNEL HORIZONTAL

FCC 15.249

Linear, LLC.

4 Button Key Fob

SW-ATT-FOB2

Model: (Fixed Mode)

Date: 4/4/2014

Lab: R

Tested By: Matt Harrison

Harmonic Emissions

Freq. (MHz)	Level (dBµV)	Pol (v/h)	Limit (dBµV)	Margin (dB)	Peak / QP / Avg	Ant. Height (m)	Table Angle (deg)	Comments
1837.56	42.64	H	73.98	-31.34	Peak	1.13	103	
1837.56	35.24	H	53.98	-18.74	Avg	1.13	103	
2756.34	44.50	H	73.98	-29.48	Peak	1.27	163	
2756.34	37.64	H	53.98	-16.34	Avg	1.27	163	
3675.12		H	73.98		Peak			No Emissions Found
3675.12		H	53.98		Avg			No Emissions Found
4593.9		H	73.98		Peak			No Emissions Found
4593.9		H	53.98		Avg			No Emissions Found
5512.68		H	73.98		Peak			No Emissions Found
5512.68		H	53.98		Avg			No Emissions Found
6431.46		H	73.98		Peak			No Emissions Found
6431.46		H	53.98		Avg			No Emissions Found
7350.24		H	73.98		Peak			No Emissions Found
7350.24		H	53.98		Avg			No Emissions Found
8269.02		H	73.98		Peak			No Emissions Found
8269.02		H	53.98		Avg			No Emissions Found
9187.8		H	73.98		Peak			No Emissions Found
9187.8		H	53.98		Avg			No Emissions Found

Test distance

3 meter



HARMONIC EMISSIONS MID CHANNEL VERTICAL

FCC 15.249

Linear, LLC.

4 Button Key Fob

SW-ATT-FOB2

Model: (Fixed Mode)

Date: 4/4/2014

Lab: R

Tested By: Matt Harrison

Harmonic Emissions

Freq. (MHz)	Level (dBµV)	Pol (v/h)	Limit (dBµV)	Margin (dB)	Peak / QP / Avg	Ant. Height (m)	Table Angle (deg)	Comments
1837.56	42.64	V	73.98	-31.34	Peak	1.2	43	
1837.56	35.24	V	53.98	-18.74	Avg	1.2	43	
2756.34	47.96	V	73.98	-26.02	Peak	1	88	
2756.34	43.46	V	53.98	-10.52	Avg	1	88	
3675.12		V	73.98		Peak			No Emissions Found
3675.12		V	53.98		Avg			No Emissions Found
4593.9		V	73.98		Peak			No Emissions Found
4593.9		V	53.98		Avg			No Emissions Found
5512.68		V	73.98		Peak			No Emissions Found
5512.68		V	53.98		Avg			No Emissions Found
6431.46		V	73.98		Peak			No Emissions Found
6431.46		V	53.98		Avg			No Emissions Found
7350.24		V	73.98		Peak			No Emissions Found
7350.24		V	53.98		Avg			No Emissions Found
8269.02		V	73.98		Peak			No Emissions Found
8269.02		V	53.98		Avg			No Emissions Found
9187.8		V	73.98		Peak			No Emissions Found
9187.8		V	53.98		Avg			No Emissions Found

Test distance

3 meter



HARMONIC EMISSIONS HIGH CHANNEL HORIZONTAL

FCC 15.249

Linear, LLC.

4 Button Key Fob

SW-ATT-FOB2

Model: (Fixed Mode)

Date: 4/4/2014

Lab: R

Tested By: Matt Harrison

Harmonic Emissions

Freq. (MHz)	Level (dBµV)	Pol (v/h)	Limit (dBµV)	Margin (dB)	Peak / QP / Avg	Ant. Height (m)	Table Angle (deg)	Comments
1839.56	47.66	H	73.98	-26.32	Peak	1.10	84	
1839.56	44.01	H	53.98	-9.97	Avg	1.10	84	
2759.34	46.92	H	73.98	-27.06	Peak	1.26	163	
2759.34	42.12	H	53.98	-11.86	Avg	1.26	163	
3679.12		H	73.98		Peak			No Emissions Found
3679.12		H	53.98		Avg			No Emissions Found
4598.9		H	73.98		Peak			No Emissions Found
4598.9		H	53.98		Avg			No Emissions Found
5518.68		H	73.98		Peak			No Emissions Found
5518.68		H	53.98		Avg			No Emissions Found
6438.46		H	73.98		Peak			No Emissions Found
6438.46		H	53.98		Avg			No Emissions Found
7358.24		H	73.98		Peak			No Emissions Found
7358.24		H	53.98		Avg			No Emissions Found
8278.02		H	73.98		Peak			No Emissions Found
8278.02		H	53.98		Avg			No Emissions Found
9197.8		H	73.98		Peak			No Emissions Found
9197.8		H	53.98		Avg			No Emissions Found

Test distance

3 meter



HARMONIC EMISSIONS HIGH CHANNEL VERTICAL

FCC 15.249

Linear, LLC.

4 Button Key Fob

SW-ATT-FOB2

Model: (Fixed Mode)

Date: 4/4/2014

Lab: R

Tested By: Matt Harrison

Harmonic Emissions

Freq. (MHz)	Level (dBµV)	Pol (v/h)	Limit (dBµV)	Margin (dB)	Peak / QP / Avg	Ant. Height (m)	Table Angle (deg)	Comments
1839.56	47.91	V	73.98	-26.07	Peak	1.22	43	
1839.56	44.15	V	53.98	-9.83	Avg	1.22	43	
2759.34	49.46	V	73.98	-24.52	Peak	1.06	95	
2759.34	45.94	V	53.98	-8.04	Avg	1.06	95	
3679.12		V	73.98		Peak			No Emissions Found
3679.12		V	53.98		Avg			No Emissions Found
4598.9		V	73.98		Peak			No Emissions Found
4598.9		V	53.98		Avg			No Emissions Found
5518.68		V	73.98		Peak			No Emissions Found
5518.68		V	53.98		Avg			No Emissions Found
6438.46		V	73.98		Peak			No Emissions Found
6438.46		V	53.98		Avg			No Emissions Found
7358.24		V	73.98		Peak			No Emissions Found
7358.24		V	53.98		Avg			No Emissions Found
8278.02		V	73.98		Peak			No Emissions Found
8278.02		V	53.98		Avg			No Emissions Found
9197.8		V	73.98		Peak			No Emissions Found
9197.8		V	53.98		Avg			No Emissions Found

Test distance

3 meter



***EMISSIONS RADIATED OUTSIDE OF THE FUNDAMENTAL
FREQUENCY BAND***

DATA SHEETS



Brea Division
114 Olinda Drive
Brea, CA 92823
(714) 579-0500

Agoura Division
2337 Troutdale Drive
Agoura, CA 91301
(818) 597-0600

Silverado Division
19121 El Toro Road
Silverado, CA 92676
(949) 589-0700

Lake Forest Division
20621 Pascal Way
Lake Forest, CA 92630
(949) 587-0400

BAND EDGES HORIZONTAL


FCC 15.249
 Linear, LLC.
 4 Button Key Fob
 Model: SW-ATT-FOB2 (Fixed Mode)

Date: 5/9/2014
 Lab: R
 Tested By: Matt Harrison


Band Edge

Freq. (MHz)	Level (dBuV/m)	Pol (v/h)	Limit (dBuV)	Margin (dB)	Peak / QP / Avg	Ant. Height (m)	Table Angle (deg)	Comments
901.60	34.02	H	46.00	-11.98	Peak	1	338	No Marker Delta
901.60		H			QP	1	338	Method Used
928.92	34.48	H	46.00	-11.52	Peak	1	300	No Marker Delta
928.92		H			QP	1	300	Method Used

Test Distance
 3 meters

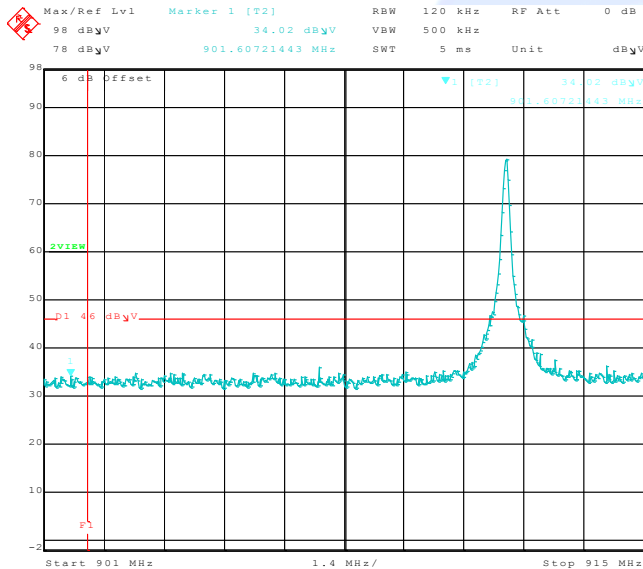

Title: SW-ATT-FOB.
 Comment A: LBE, Horizontal.
 Date: 9.MAY.2014 08:15:14

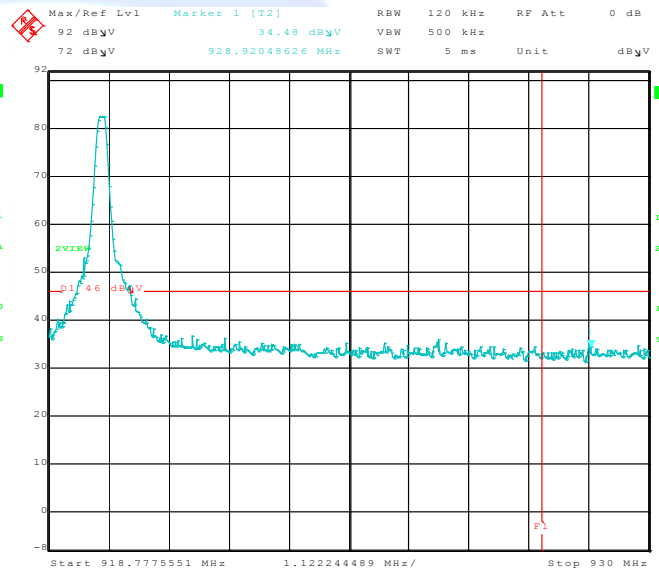

Title: SW-ATT-FOB.
 Comment A: LBE, Horizontal.
 Date: 9.JUN.2014 09:09:58



BAND EDGES VERTICAL

FCC 15.249

Linear, LLC.

4 Button Key Fob

Model: SW-ATT-FOB2 (Fixed Mode)

Date: 5/9/2014

Lab: R

Tested By: Matt Harrison


Band Edge

Freq. (MHz)	Level (dBuV/m)	Pol (v/h)	Limit (dBuV)	Margin (dB)	Peak / QP / Avg	Ant. Height (m)	Table Angle (deg)	Comments
901.56	35.14	V	46.00	-10.83	Peak	1.6	85	No Marker Delta
901.56		V			QP			Method Used
929.52	35.03	V	46.00	-10.97	Peak	1.6	275	No Marker Delta
929.52		V			QP			Method Used


Test Distance

3 meters

 Max/Ref Lvl 98 dBuV 78 dBuV	Marker 1 [T3] 35.17 dBuV 901.56112224 MHz	RBW 120 kHz VBW 500 kHz RF Att 0 dB Unit dBuV	 Max/Ref Lvl 92 dBuV 72 dBuV	Marker 1 [T3] 35.03 dBuV 929.52771274 MHz	RBW 120 kHz VBW 500 kHz RF Att 0 dB Unit dBuV
--	---	--	--	---	--

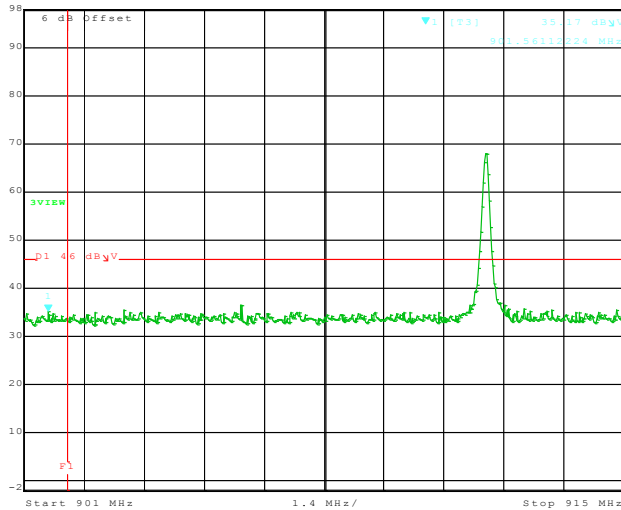

Title: SW-ATT-FOB.
 Comment A: LBE, Vertical.
 Date: 9.MAY.2014 08:17:32

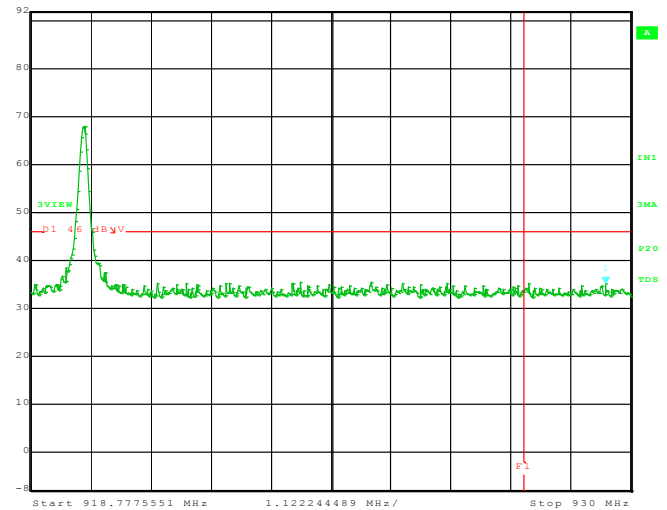

Title: SW-ATT-FOB.
 Comment A: UBE, Vertical.
 Date: 9.JUN.2014 09:15:05

