

Intermec Technologies Corporation

Simultaneous Transmission - FCC Part 22H & Part 24E

Testing for Class II Permissive Change of FCC ID: EHASMC46 to authorize
co-location with FCC ID: EHA2610CF and FCC ID: EHABTS080

700C configured with three internal radio modules:

GSM (FCC ID: EHASMC46)
802.11b/g (FCC ID: EHA2610CF)
Bluetooth (FCC ID: EHABTS080)

March 30, 2005

Report No. ITRM0073.4

Report Prepared By



www.nwemc.com
1-888-EMI-CERT

© 2004 Northwest EMC, Inc

EMC Test Report



22975 NW Evergreen Parkway
Suite 400
Hillsboro, Oregon 97124

Certificate of Test
Issue Date: March 30, 2005
Intermec Technologies Corporation

700C configured with three internal radio modules:

**GSM (FCC ID: EHASMC46)
802.11b/g (FCC ID: EHA2610CF)
Bluetooth (FCC ID: EHABTS080)**

Specification	Emissions		
	Test Method	Pass	Fail
FCC 22.917(a) and FCC 24.238(a) Spurious Radiated Emissions:2004 (Simultaneous Transmit)	TIA/EIA 603-B:2001	<input checked="" type="checkbox"/>	<input type="checkbox"/>

Modifications made to the product
See the Modifications section of this report


Test Facility

- The measurement facility used to collect the data is located at:

Northwest EMC, Inc
22975 NW Evergreen Parkway, Suite 400
Hillsboro, OR 97124

Phone: (503) 844-4066 Fax: 844-3826

This site has been fully described in a report filed with and accepted by the FCC (Federal Communications Commission) and Industry Canada.

Approved By:

Don Facteau, IS Manager

This report must not be used to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the federal government of the United States of America.

Product compliance is the responsibility of the client, therefore the tests and equipment modes of operation represented in this report were agreed upon by the client, prior to testing. This Report may only be duplicated in its entirety. The results of this test pertain only to the sample(s) tested, the specific description is noted in each of the individual sections of the test report supporting this certificate of test.

Revision Number	Description	Date	Page Number
00	None		

FCC: Accredited by NVLAP for performance of FCC radio, digital, and ISM device testing. Our Open Area Test Sites, certification chambers, and conducted measurement facilities, have been fully described in reports filed with the FCC and accepted by the FCC in letters maintained in our files. Northwest EMC has been accredited by ANSI to ISO / IEC Guide 65 as a product certifier. We have been designated by the FCC as a Telecommunications Certification Body (TCB). This allows Northwest EMC to certify transmitters to FCC specifications in accordance with 47 CFR 2.960 and 2.962.



NVLAP: Northwest EMC, Inc. is recognized under the United States Department of Commerce, National Institute of Standards and Technology, National Voluntary Laboratory Accreditation Program for satisfactory compliance with the requirements of ISO/IEC 17025 for Testing Laboratories. The NVLAP accreditation encompasses Electromagnetic Compatibility Testing in accordance with the European Union EMC Directive 89/336/EEC, ANSI C63.4, MIL-STD 461E, DO-160D and SAE J1113. Additionally, Northwest EMC is accredited by NVLAP to perform radio testing in accordance with the European Union R&TTE Directive 1999/5/EEC, the requirements of FCC, and the RSS radio standards for Industry Canada. Accreditation has been granted to Northwest EMC, Inc. under Certificate Numbers: 200629-0, 200630-0, and 200676-0.



Industry Canada: Accredited by NVLAP for performance of Industry Canada RSS and ICES testing. Our Open Area Test Sites and certification chambers comply with RSS 212, Issue 1 (Provisional) and have been filed with Industry Canada and accepted. Northwest EMC has been accredited by ANSI to ISO / IEC Guide 65 as a product certifier. We have been designated by NIST and recognized by Industry Canada as a Certification Body (CB) per the APEC Mutual Recognition Arrangement (MRA). This allows Northwest EMC to certify transmitters to Industry Canada technical requirements.



CAB: Designated by NIST and validated by the European Commission as a Conformity Assessment Body (CAB) to conduct tests and approve products to the EMC directive and transmitters to the R&TTE directive, as described in the U.S. - EU Mutual Recognition Agreement



TÜV Product Service: Included in TÜV Product Service Group's Listing of Recognized Laboratories. It qualifies in connection with the TÜV Certification after Recognition of Agent's Testing Program for the product categories and/or standards shown in TÜV's current Listing of CARAT Laboratories available from TÜV. A certificate was issued to represent that this laboratory continues to meet TÜV's CARAT Program requirements. Certificate No. USA0401C



TÜV Rheinland: Authorized to carryout EMC tests by order and under supervision of TÜV Rheinland. This authorization is based on "Conditions for EMC-Subcontractors" of November 1992.



NEMKO: Assessed and accredited by NEMKO (Norwegian testing and certification body) for European emissions and immunity testing. As a result of NEMKO's laboratory assessment, they will accept test results from Northwest EMC, Inc. for product certification (Authorization No. ELA 119).



Technology International: Assessed in accordance with ISO Guide 25 defining the general international requirements for the competence of calibration and testing laboratories and with ITI assessment criteria LACO196. Based upon that assessment Interference Technology International, Ltd., has granted approval for specifications implementing the EU Directive on EMC (89/336/EEC and amendments). The scope of the approval was provided on a Schedule of Assessment supplied with the certificate and is available upon request.



Australia/New Zealand: The National Association of Testing Authorities (NATA), Australia has been appointed by the ACA as an accreditation body to accredit test laboratories and competent bodies for EMC standards. Accredited test reports or assessments by competent bodies must carry the NATA logo. Test reports made by an overseas laboratory that has been accredited for the relevant standards by an overseas accreditation body that has a Mutual Recognition Agreement (MRA) with NATA are also accepted as technical grounds for product conformity. The report should be endorsed with the respective logo of the accreditation body. (NVLAP)



VCCI: Accepted as an Associate Member to the VCCI, Acceptance No. 564. Conducted and radiated measurement facilities have been registered in accordance with Regulations for Voluntary Control Measures, Article 8. (*Registration Nos. - Hillsboro: C-1071 and R-1025, Irvine: C-2094 and R-1943, Newberg: C-1877 and R-1760, Sultan: R-871, C-1784 and R-1761*)



BSMI: Northwest EMC has been designated by NIST and validated by C-Taipei (BSMI) as a CAB to conduct tests as described in the APEC Mutual Recognition Agreement. License No.SL2-IN-E-1017.



GOST: Northwest EMC, Inc. has been assessed and accredited by the Russian Certification bodies Certinform VNIINMASH, CERTINFO, SAMTES, and Federal CHEC, to perform EMC and Hygienic testing for Information Technology Products. As a result of their laboratory assessment, they will accept test results from Northwest EMC, Inc. for product certification



SCOPE

For details on the Scopes of our Accreditations, please visit:

<http://www.nwemc.com/scope.asp>

What is measurement uncertainty?


When a measurement is made, the result will be different from the true or theoretically correct value. The difference is the result of tolerances in the measurement system that cannot be completely eliminated. To the extent that technology allows us, it has been our aim to minimize this error. The following statement of measurement uncertainty is used to reflect the accuracy of the measured result as compared with its "true" value. In the case of transient tests (ESD, EFT, Surge, Voltage Dips and Interruptions), the test equipment has been demonstrated by calibration to provide at least a 95% confidence that it complies with the test specification requirements.

The following documents were the basis for determining the uncertainty levels of our measurements:

- "ISO Guide to the Expression of Uncertainty in Measurements", October 1993
- "NIS81: The Treatment of Uncertainty in EMC Measurements", May 1994
- "IEC CISPR 16-3 A1 f1 Ed.1: Radio-interference measurements and statistical techniques", December 2000

How might measurement uncertainty be applied to test results?

If the diamond marks the measured value for the test and the vertical bars bracket the range of + and - measurement uncertainty, then test results can be interpreted from the diagram below.

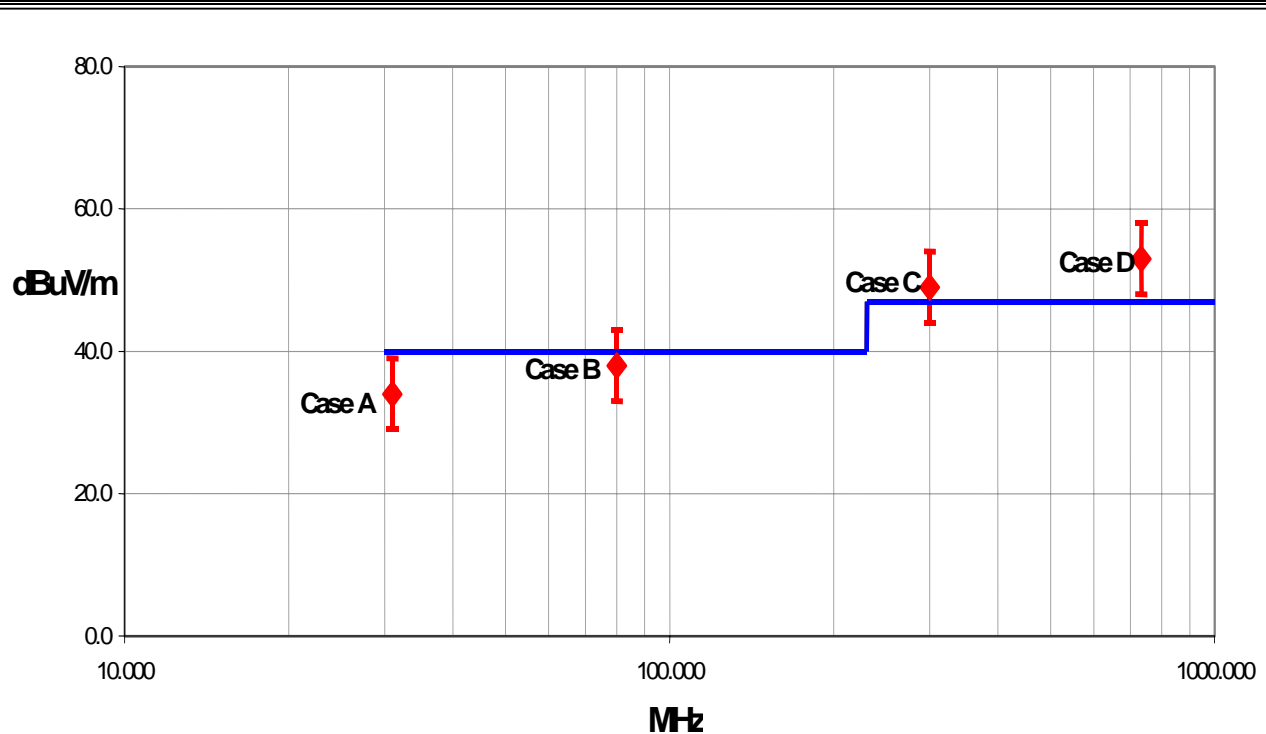

Test Result Scenarios:

Case A: Product complies.

Case B: Product conditionally complies. It is not possible to say with 95% confidence that the product complies.

Case C: Product conditionally does not comply. It is not possible to say with 95% confidence that the product does not comply.

Case D: Product does not comply.

Radiated Emissions ≤ 1 GHz

Value (dB)

Test Distance	Probability Distribution	Biconical Antenna		Log Periodic Antenna		Dipole Antenna	
		3m	10m	3m	10m	3m	10m
Combined standard uncertainty $u_c(y)$	normal	+ 1.86	+ 1.82	+ 2.23	+ 1.29	+ 1.31	+ 1.25
		- 1.88	- 1.87	- 1.41	- 1.26	- 1.27	- 1.25
Expanded uncertainty U (level of confidence ≈ 95%)	normal (k=2)	+ 3.72	+ 3.64	+ 4.46	+ 2.59	+ 2.61	+ 2.49
		- 3.77	- 3.73	- 2.81	- 2.52	- 2.55	- 2.49

Radiated Emissions > 1 GHz

Value (dB)

Test Distance	Probability Distribution	Without High Pass Filter		With High Pass Filter	
		3m	10m	3m	10m
Combined standard uncertainty $u_c(y)$	normal	+ 1.29	+ 1.38	- 1.25	- 1.35
		- 1.25	- 1.35	+ 2.57	+ 2.76
Expanded uncertainty U (level of confidence ≈ 95%)	normal (k=2)	+ 2.57	+ 2.76	- 2.51	- 2.70
		- 2.51	- 2.70		

Conducted Emissions

	Probability Distribution	Value (+/- dB)
Combined standard uncertainty $u_c(y)$	normal	1.48
Expanded uncertainty U (level of confidence ≈ 95 %)	normal (k = 2)	2.97

Radiated Immunity

	Probability Distribution	Value (+/- dB)
Combined standard uncertainty $u_c(y)$	normal	1.05
Expanded uncertainty U (level of confidence ≈ 95 %)	normal (k = 2)	2.11

Conducted Immunity

	Probability Distribution	Value (+/- dB)
Combined standard uncertainty $u_c(y)$	normal	1.05
Expanded uncertainty U (level of confidence ≈ 95 %)	normal (k = 2)	2.10

Legend

$u_c(y)$ = square root of the sum of squares of the individual standard uncertainties

U = combined standard uncertainty multiplied by the coverage factor: k . This defines an interval about the measured result that will encompass the true value with a confidence level of approximately 95%. If a higher level of confidence is required, then $k=3$ (CL of 99.7%) can be used. Please note that with a coverage factor of one, $u_c(y)$ yields a confidence level of only 68%.



California

Orange County Facility

41 Tesla Ave.
Irvine, CA 92618
(888) 364-2378
FAX (503) 844-3826



Oregon

Evergreen Facility

22975 NW Evergreen Pkwy.,
Suite 400
Hillsboro, OR 97124
(503) 844-4066
FAX (503) 844-3826



Oregon

Trails End Facility

30475 NE Trails End Lane
Newberg, OR 97132
(503) 844-4066
FAX (503) 537-0735



Washington

Sultan Facility

14128 339th Ave. SE
Sultan, WA 98294
(888) 364-2378
FAX (360) 793-2536

Party Requesting the Test

Company Name:	Intermec Technologies Corporation
Address:	550 Second St. SE
City, State, Zip:	Cedar Rapids, IA 52401-2023
Test Requested By:	Scott Holub
Model:	700C configured with three internal radio modules: GSM (FCC ID: EHASMC46) 802.11b/g (FCC ID: EHA2610CF) Bluetooth (FCC ID: EHABTS080)
First Date of Test:	2-7-2005
Last Date of Test:	3-16-2005
Receipt Date of Samples:	2-2-2005
Equipment Design Stage:	Production
Equipment Condition:	No visual damage.

Information Provided by the Party Requesting the Test

Clocks/Oscillators:	Not provided at the time of test.
I/O Ports:	Serial

Functional Description of the EUT (Equipment Under Test):

Intermec's Handheld Computer, Model 700C was configured with three co-located radios. The 700C contained a GSM radio (FCC ID: EHASMC46), an 802.11(b)/(g) radio (FCC ID: EHA2610CF), and a Bluetooth radio (FCC ID: EHABTS080).

Client Justification for EUT Selection:

Not Provided

Client Justification for Test Selection:

This test demonstrated compliance with FCC Part 22H and Part 24E emissions limits while the co-located radios were transmitting simultaneously. Each radio transmits through its own antenna. This report will be used as part of a Class II Permissive Change to authorize the co-location of an 802.11b/g radio and Bluetooth radio with the GSM radio.

EUT Photo

Equipment modifications

Item	Test	Date	Modification	Note	Disposition of EUT
1	Spurious Radiated Emissions	02/07/2005 thru 03/16/2005	No EMI suppression devices were added or modified during this test.	Same configuration as received from client.	EUT remained at Northwest EMC.

Justification

Intermec's Handheld Computer, Model 700C was configured with three co-located radios. The 700C contained a GSM radio (FCC ID: EHASMC46), an 802.11(b)/(g) radio (FCC ID: EHA2610CF), and a Bluetooth radio (FCC ID: EHABTS080). This test demonstrated compliance with FCC Part 22H and Part 24E emissions limits while the co-located radios were transmitting simultaneously. Each radio transmits through its own antenna.

All possible combinations of harmonic emissions from the GSM, 802.11(b)/(g), and Bluetooth radios were compared numerically. It was determined that there were no possible coincidental harmonics below 1 GHz. All the radios were configured for simultaneous transmission at the channels specified below.

Channels in Specified Band Investigated:

802.11(b):	1,11
GSM (Cellular):	140, 141, 191, 202
GSM (PCS):	516, 606
Bluetooth:	2, 11, 67, 80

Operating Modes Investigated:**Bluetooth Radio in PW40 with 700C in cradle:**

Simultaneous transmission of Bluetooth Channel 11, 802.11(b) Channel 1, & GSM PCS Channel 516
Simultaneous transmission of Bluetooth Channel 67, 802.11(b) Channel 11, & GSM PCS Channel 516
Simultaneous transmission of Bluetooth Channel 2, 802.11(b) Channel 1, & GSM PCS Channel 606
Simultaneous transmission of Bluetooth Channel 80, 802.11(b) Channel 11, & GSM PCS Channel 606
Simultaneous transmission of Bluetooth Channel 11, 802.11(b) Channel 1, & GSM cellular Channel 202
Simultaneous transmission of Bluetooth Channel 5, 802.11(b) Channel 1, & GSM cellular Channel 191
Simultaneous transmission of Bluetooth Channel 79, 802.11(b) Channel 11, & GSM cellular Channel 141
Simultaneous transmission of Bluetooth Channel 79, 802.11(b) Channel 11, & GSM cellular Channel 140

Antennas Investigated:

802.11(b):	Folded Monopole internal to 700C, P/N 805-608-104
GSM:	Tri-band Antenna external to 700C, P/N 805-624-001
Bluetooth:	Chip antenna integral to Bluetooth module inside 700C

Data Rates Investigated:

Maximum

Power Input Settings Investigated:

120 VAC, 60 Hz.

Frequency Range Investigated

Start Frequency	1 GHz	Stop Frequency	25 GHz
------------------------	-------	-----------------------	--------

Software\Firmware Applied During Test

Exercise software	Phone Blue Test Test Utility	Version	Unknown Unknown 0.4
Description			
This system was tested using special test software to exercise the functions of the device during the testing such as channels, power, and modulation during simultaneous transmission.			

EUT and Peripherals

Description	Manufacturer	Model/Part Number	Serial Number
Handheld Computer	Intermec Technologies Corporation	700C	18190400041
AC Adapter	Elpac Power Systems	FW1812	014868
GSM Radio in 700C	Intermec Technologies Corporation	SMC46	Unknown
Bluetooth Radio in 700C	Intermec Technologies Corporation	BTS080	Unknown
802.11(b)/(g) radio in 700C	Intermec Technologies Corporation	2601CF	Unknown

Remote Equipment Outside of Test Setup Boundary

Description	Manufacturer	Model/Part Number	Serial Number
GSM/DCS/PCS MS Test Set	Hewlett Packard	8922M	3829U02903
GSM/DCS/PCS RF Interface	Hewlett Packard	83220E	3842U05679
Wireless Communications Test Set	Agilent	8960 Series 10 E5515C	QB44051960
Equipment isolated from the EUT so as not to contribute to the measurement result is considered to be outside the test setup boundary			

Cables

Cable Type	Shield	Length (m)	Ferrite	Connection 1	Connection 2
DC Leads	PA	1.3	PA	Handheld Computer	AC Adapter
AC Power	No	2.0	No	AC Adapter	AC Mains

Measurement Equipment					
Description	Manufacturer	Model	Identifier	Last Cal	Interval
Antenna, Horn	EMCO	3160-09	AHG	NCR	NA
Pre-Amplifier	Miteq	JSD4-18002600-26-8P	APU	10/08/2003	24 mo
Antenna, Biconilog	EMCO	3141	AXE	12/03/2003	24 mo
Pre-Amplifier	Amplifier Research	LN1000A	APS	02/05/2004	13 mo
Antenna, Horn	EMCO	3115	AHC	09/07/2004	12 mo
Pre-Amplifier	Miteq	AMF-4D-005180-24-10P	APJ	01/05/2004	13 mo
High Pass Filter	Micro-Tronics	HPM50111	HFO	04/13/2004	13 mo
Attenuator		2082-6148-20	ATE	02/03/2004	13 mo
Quasi-Peak Adapter	Hewlett-Packard	85650A	AQF	12/02/2004	13 mo
Spectrum Analyzer	Hewlett-Packard	8566B	AAL	12/02/2004	13 mo
Spectrum Analyzer Display	Hewlett Packard	85662A	AALD	12/02/2004	13 mo
Spectrum Analyzer	Tektronix	2784	AAO	01/02/2005	12 mo
Antenna, Horn	EMCO	3160-08	AHK	NCR	NA
Pre-Amplifier	Miteq	AMF-4D-005180-24-10P	APC	10/08/2003	15 mo
Antenna, Horn	EMCO	3115	AHF	03/18/2004	24 mo
Signal Generator	Hewlett Packard	8341B	TGN	01/23/2004	13 mo
Antenna, Dipole (ADAA included)	Roberts	Roberts	ADA	1/06/2005	24 mo

Test Description

Requirement: Per 2.1053, the field strength of spurious radiation was measured in the far-field at an FCC Listed semi-anechoic chamber up to 25 GHz. The applicable limits are 22.917(a) for the cellular band, and 24.238(a) for the PCS band.

Per 22.917(a), The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB (-13 dBm).

Per 24.238(a), The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB (-13 dBm).

Configuration: Intermec's Handheld Computer, Model 700C was configured with three co-located radios. The 700C contained a GSM radio (FCC ID: EHASMC46), an 802.11(b)/(g) radio (FCC ID: EHA2610CF), and a Bluetooth radio (FCC ID: EHABTS080). This test demonstrated compliance with FCC Part 22H and Part 24E emissions limits while the co-located radios were transmitting simultaneously. Each radio transmits through its own antenna.

Simultaneous Transmission:

The following is an excerpt from the FCC / TCB Training Q & A, October 2002, Day 2, Question 7:

Assuming that the radios do not share an antenna, only radiated tests for simultaneous transmission is required. If the radios share an antenna, antenna conducted measurements would also be required. Only one set of worst case simultaneous transmission data is going to be requested to be submitted at this time. The test engineer

should indicate the worst case condition and provide justification as to why the worst case condition was chosen. The grantee should be reminded that even if the FCC requests one set of data, they are responsible for compliance for all modes of simultaneous transmission.


All possible combinations of harmonic emissions from the GSM, 802.11(b), and Bluetooth radios were compared numerically. It was determined that there were no possible coincidental harmonics below 1 GHz. The frequency range from 1 GHz to 25 GHz was investigated for channel combinations that would produce coincidental harmonics.

Test Methodology: For licensed transmitters, the FCC references TIA/EIA 603-B as the measurement procedure standard. TIA/EIA 603-B Section 2.2.12 describes a method for measuring radiated emissions that utilizes an antenna substitution method:


At an approved test site, the transmitter is placed on a remotely controlled turntable, and the measurement antenna is placed 3 meters from the transmitter. The turntable azimuth is varied to maximize the level of emissions. The height of the measurement antenna is also varied from 1 to 4 meters. The amplitude and frequency of the highest emissions are noted. The transmitter is then replaced with a $\frac{1}{2}$ wave dipole that is successively tuned to each of the highest emissions. A signal generator is connected to the dipole (horn antenna for frequencies above 1 GHz), and its output is adjusted to match the level previously noted for each frequency. The output of the signal generator is recorded, and by factoring in the cable loss to the dipole antenna and its gain; the power (ERP or e.i.r.p) is determined for each radiated emission.

Test Setup Diagram


Test Setup for Field Strength Measurements

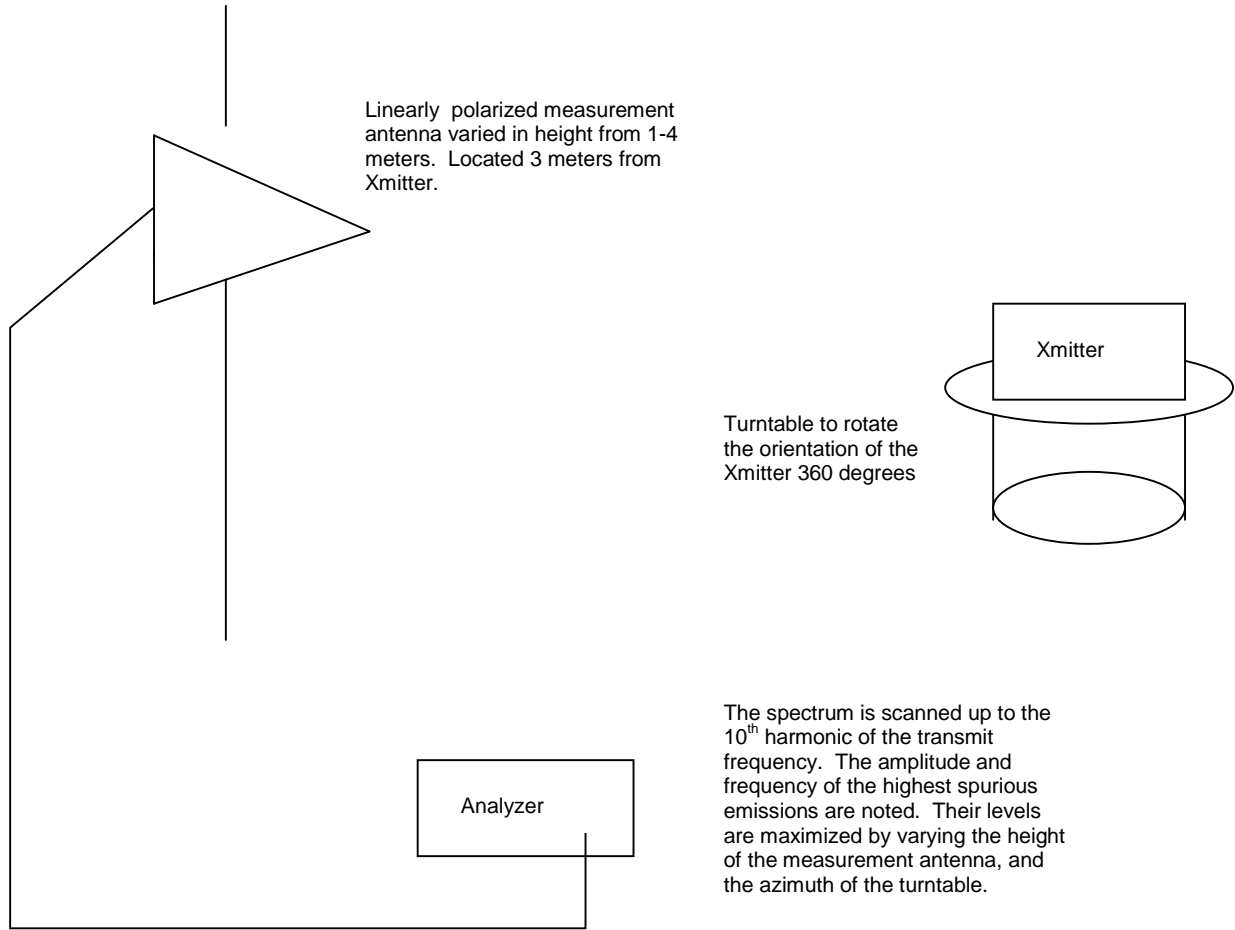

Test Setup for Power Measurements Utilizing the Antenna Substitution Method

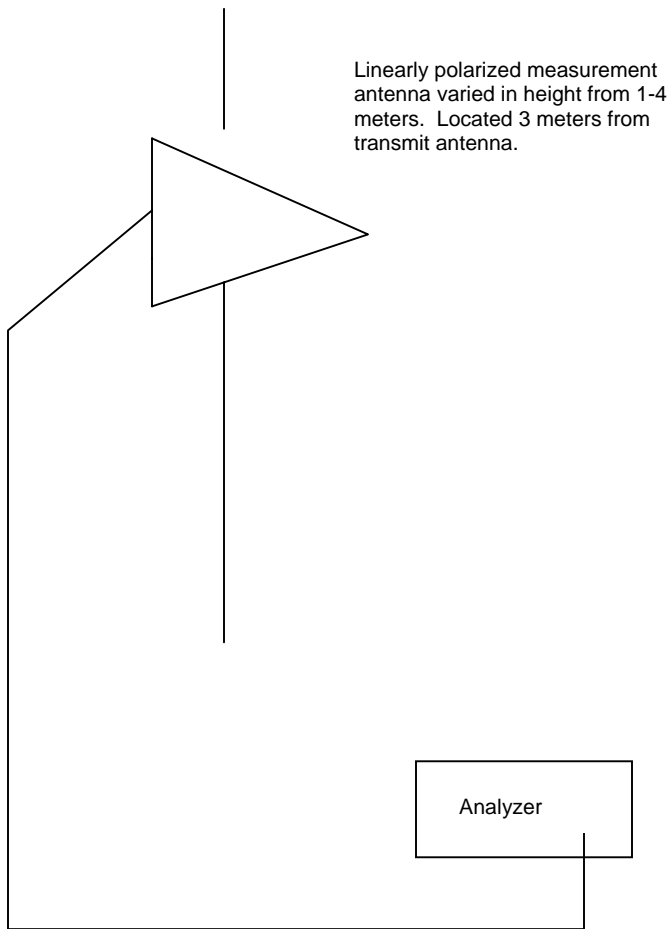

During field strength measurements, the amplitude and frequency of the highest emissions are noted. The transmitter is then replaced with a $\frac{1}{2}$ wave dipole (at the same height) that is successively tuned to each of the highest spurious emissions. A signal generator is connected to the dipole (horn antenna for frequencies above 1 GHz), and its output is adjusted to match the level previously noted for each frequency.

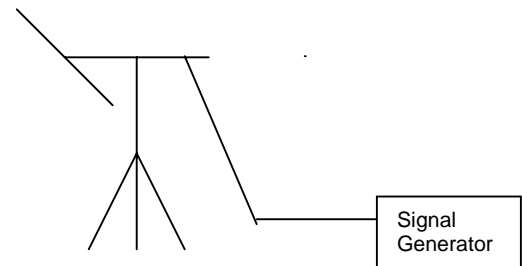

The spectrum analyzer is monitored to verify that the output of the signal generator produces a signal equal in amplitude to a previously measured spurious emission.

Completed by:

Holly Antling

EUT:	2601CF	Work Order:	ITRM0054
Serial Number:	Unknown	Date:	02/07/05
Customer:	Intermec Technologies Corporation	Temperature:	20
Attendees:	None	Humidity:	34%
Cust. Ref. No.:		Barometric Pressure:	30.24
Tested by:	Holly Ashkannejhad	Power:	120VAC/60Hz
		Job Site:	EV01

TEST SPECIFICATIONS	
Specification:	FCC 24.238(a):2004
Method:	TIA/EIA 603-B:2001

SAMPLE CALCULATIONS
 Radiated Emissions: Field Strength = Measured Level + Antenna Factor + Cable Factor - Amplifier Gain + Distance Adjustment Factor + External Attenuation
 Conducted Emissions: Adjusted Level = Measured Level + Transducer Factor + Cable Attenuation Factor + External Attenuator

COMMENTS


EUT OPERATING MODES
 Bluetooth 11, 802.11b 1, GSM 516 (PCS) on 700C

DEVIATIONS FROM TEST STANDARD
 No deviations.

RESULTS	Run #
Pass	75

Other


 Tested By:

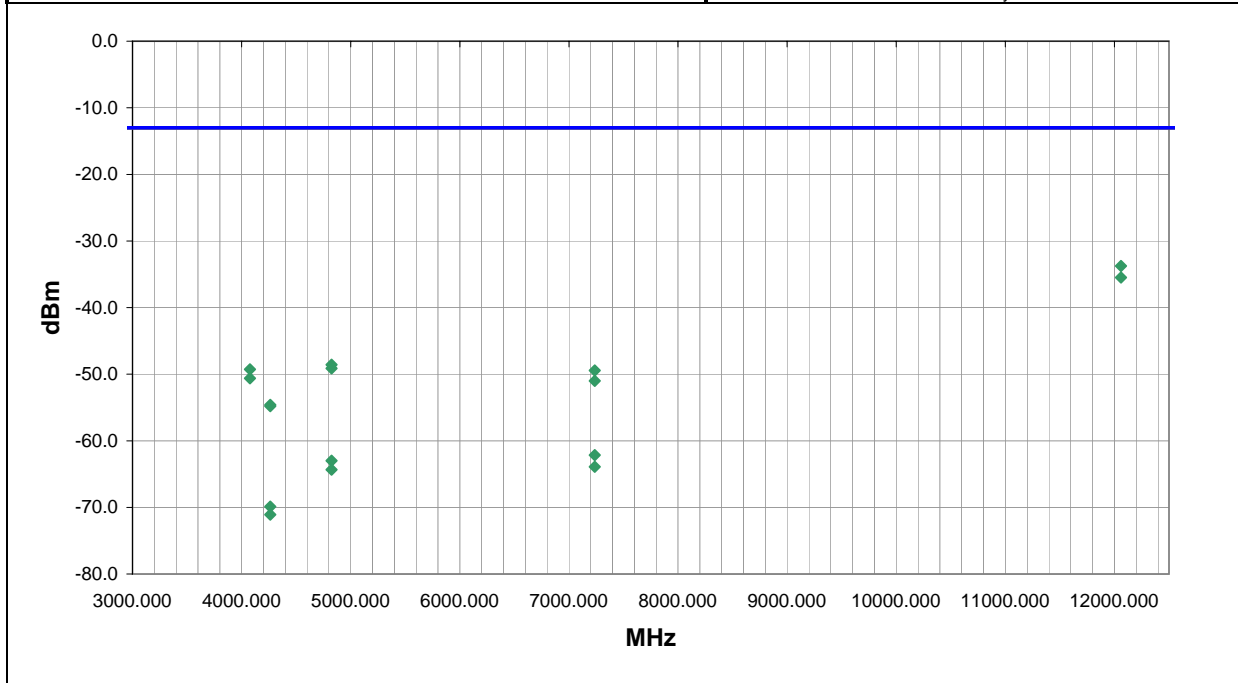

Freq (MHz)	Azimuth (degrees)	Height (meters)	Polarity	Detector	EIRP (Watts)	EIRP (dBm)	Spec. Limit (dBm)	Compared to Spec. (dB)
12060.000	239.0	1.3	H-Horn	PK	0.0000	-33.8	-13.0	-20.8
12060.000	186.0	1.2	V-Horn	PK	0.0000	-35.5	-13.0	-22.5
4824.000	344.0	1.2	H-Horn	PK	0.0000	-48.6	-13.0	-35.6
4824.000	116.0	1.5	V-Horn	PK	0.0000	-49.1	-13.0	-36.1
4075.975	50.0	1.3	H-Horn	PK	0.0000	-49.3	-13.0	-36.3
7236.000	306.0	1.3	H-Horn	PK	0.0000	-49.4	-13.0	-36.4
4075.975	47.0	1.3	V-Horn	PK	0.0000	-50.6	-13.0	-37.6
7236.000	127.0	1.2	V-Horn	PK	0.0000	-51.0	-13.0	-38.0
4263.005	358.0	1.2	H-Horn	PK	0.0000	-54.6	-13.0	-41.6
4263.005	288.0	1.2	V-Horn	PK	0.0000	-54.8	-13.0	-41.8
7236.000	306.0	1.3	H-Horn	AV	0.0000	-62.1	-13.0	-49.1
4824.000	344.0	1.2	H-Horn	AV	0.0000	-63.0	-13.0	-50.0
7236.000	127.0	1.2	V-Horn	AV	0.0000	-63.9	-13.0	-50.9
4824.000	116.0	1.5	V-Horn	AV	0.0000	-64.3	-13.0	-51.3
4263.005	288.0	1.2	V-Horn	AV	0.0000	-69.9	-13.0	-56.9
4263.005	358.0	1.2	H-Horn	AV	0.0000	-71.1	-13.0	-58.1

Apparent Power Data Sheet

EUT:	2601CF	Work Order:	ITRM0054
Serial Number:	Unknown	Date:	02/07/05
Customer:	Intermec Technologies Corporation	Temperature:	20
Attendees:	None	Humidity:	35%
Cust. Ref. No.:		Barometric Pressure:	30.24
Tested by:	Holly Ashkannejhad	Power:	120VAC/60Hz
		Job Site:	EV01

TEST SPECIFICATIONS	
Specification:	FCC 24.238(a):2004
Method:	TIA/EIA 603-B:2001

SAMPLE CALCULATIONS
 Radiated Emissions: Field Strength = Measured Level + Antenna Factor + Cable Factor - Amplifier Gain + Distance Adjustment Factor + External Attenuation
 Conducted Emissions: Adjusted Level = Measured Level + Transducer Factor + Cable Attenuation Factor + External Attenuator

COMMENTS

EUT OPERATING MODES
 Bluetooth 67, 802.11b 11, GSM 516 (PCS) on 700C


DEVIATIONS FROM TEST STANDARD
 No deviations.

RESULTS	Run #
Pass	76

Other



Tested By: _____

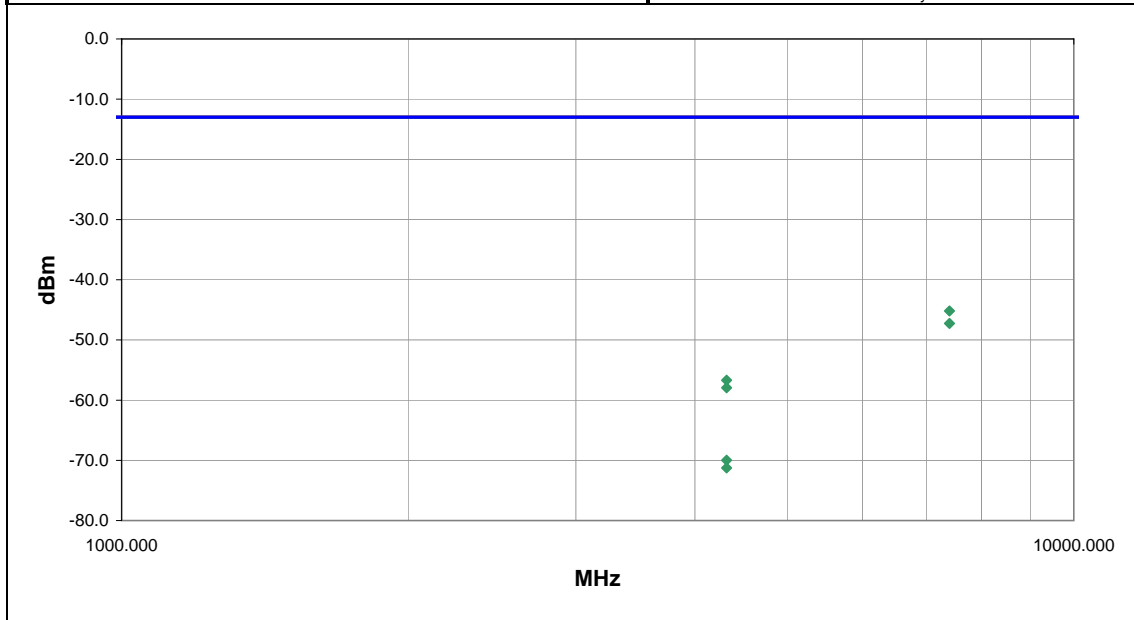

Freq (MHz)	Azimuth (degrees)	Height (meters)	Polarity	Detector	EIRP (Watts)	EIRP (dBm)	Spec. Limit (dBm)	Compared to Spec. (dB)	Comments
7404.000	280.0	1.4	H-Horn	PK	0.0000	-45.2	-13.0	-32.2	EUT vertical.
7404.000	54.0	1.2	V-Horn	PK	0.0000	-47.3	-13.0	-34.3	EUT on side
4319.007	123.0	1.5	V-Horn	PK	0.0000	-56.7	-13.0	-43.7	EUT vertical.
4319.007	194.0	1.3	H-Horn	PK	0.0000	-57.9	-13.0	-44.9	EUT vertical.
4319.007	123.0	1.5	V-Horn	AV	0.0000	-70.0	-13.0	-57.0	EUT vertical.
4319.007	194.0	1.3	H-Horn	AV	0.0000	-71.2	-13.0	-58.2	EUT vertical.

Apparent Power Data Sheet

EUT: 2601CF	Work Order: ITRM0054
Serial Number: Unknown	Date: 02/09/05
Customer: Intermec Technologies Corporation	Temperature: 20
Attendees: None	Humidity: 36%
Cust. Ref. No.:	Barometric Pressure: 30.14
Tested by: Holly Ashkannejhad	Power: 120VAC/60Hz
	Job Site: EV01

TEST SPECIFICATIONS	
Specification: FCC 24.238(a):2004	Method: TIA/EIA 603-B:2001

SAMPLE CALCULATIONS
 Radiated Emissions: Field Strength = Measured Level + Antenna Factor + Cable Factor - Amplifier Gain + Distance Adjustment Factor + External Attenuation
 Conducted Emissions: Adjusted Level = Measured Level + Transducer Factor + Cable Attenuation Factor + External Attenuator

COMMENTS


EUT OPERATING MODES
 Bluetooth 11, 802.11b 1, GSM 516 (PCS) on 700C

DEVIATIONS FROM TEST STANDARD
 No deviations.

RESULTS	Run #
Pass	77

Other

Holly Ashkannejhad
Tested By:

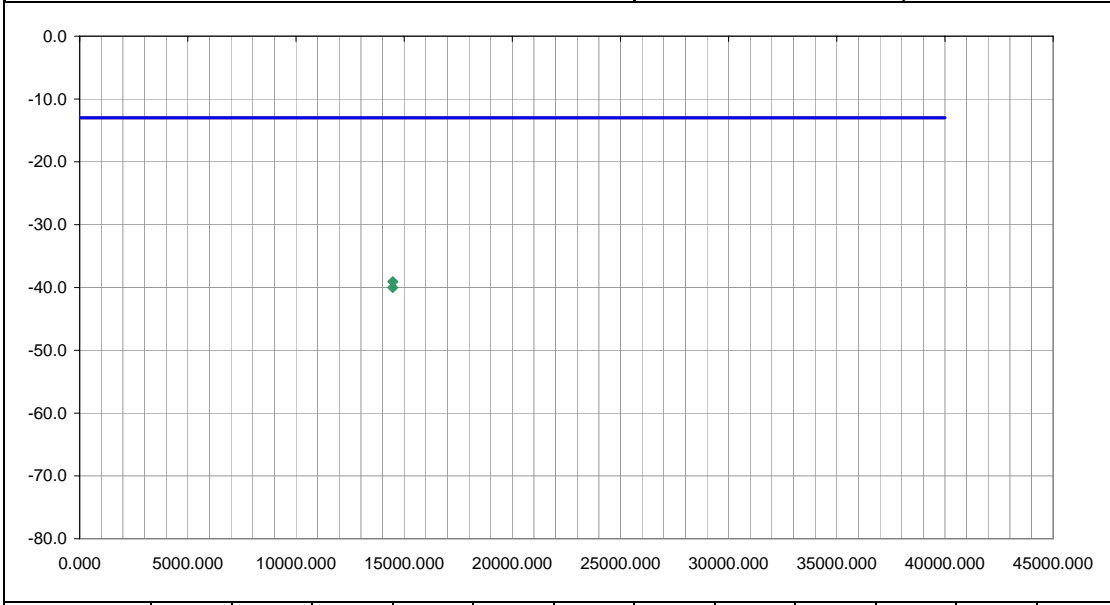

Freq (MHz)	Azimuth (degrees)	Height (meters)	Polarity	Detector	EIRP (Watts)	EIRP (dBm)	Spec. Limit (dBm)	Compared to Spec. (dB)	Comments
14472.000	230.0	1.3	H-Horn	PK	0.0000	-39.1	-13.0	-26.1	EUT horizontal
14472.000	219.0	1.2	V-Horn	PK	0.0000	-40.0	-13.0	-27.0	EUT horizontal

Apparent Power Data Sheet

EUT:	2601CF	Work Order:	ITRM0054
Serial Number:	Unknown	Date:	02/09/05
Customer:	Intermec Technologies Corporation	Temperature:	20
Attendees:	None	Humidity:	36%
Cust. Ref. No.:		Barometric Pressure:	30.14
Tested by:	Holly Ashkannejhad	Power:	120VAC/60Hz
		Job Site:	EV01

TEST SPECIFICATIONS	
Specification:	FCC 24.238(a):2004
Method:	TIA/EIA 603-B:2001

SAMPLE CALCULATIONS
 Radiated Emissions: Field Strength = Measured Level + Antenna Factor + Cable Factor - Amplifier Gain + Distance Adjustment Factor + External Attenuation
 Conducted Emissions: Adjusted Level = Measured Level + Transducer Factor + Cable Attenuation Factor + External Attenuator


COMMENTS


EUT OPERATING MODES
 Bluetooth 67, 802.11b 11, GSM 516 (PCS) on 700C

DEVIATIONS FROM TEST STANDARD
 No deviations.

RESULTS	Run #
Pass	79

Other


 Tested By: _____

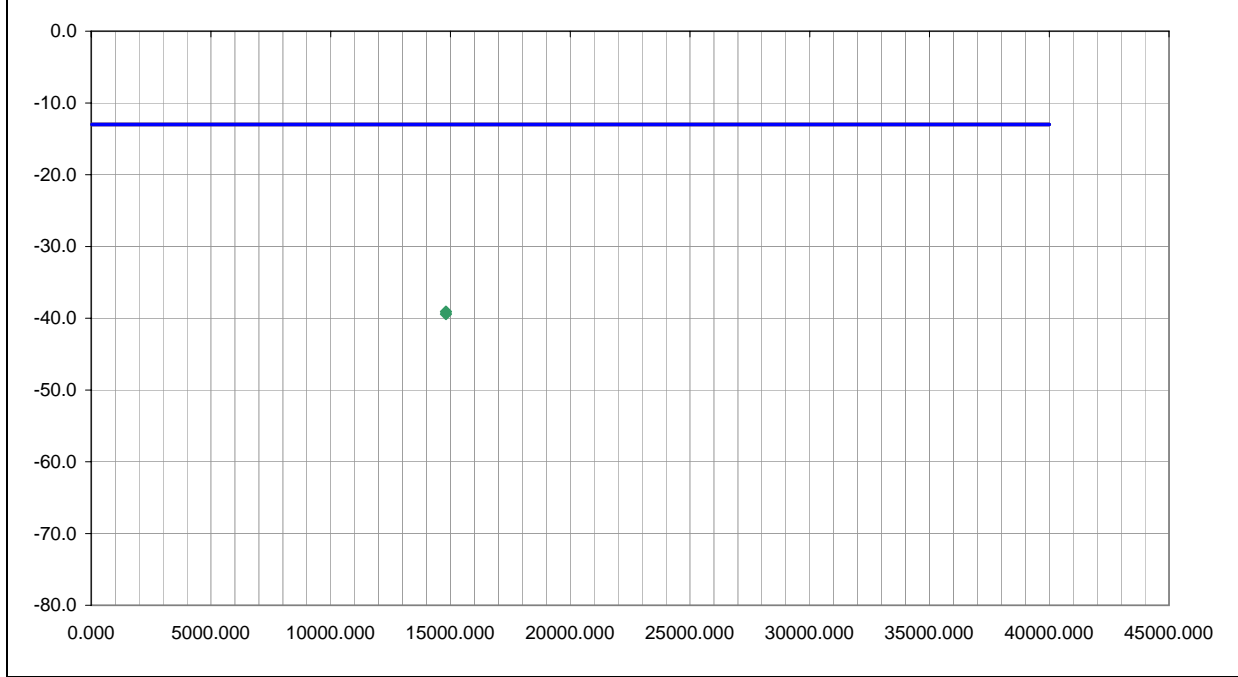

Freq (MHz)	Azimuth (degrees)	Height (meters)	Polarity	Detector	EIRP (Watts)	EIRP (dBm)	Spec. Limit (dBm)	Compared to Spec. (dB)
14808.000	105.0	4.0	H-Horn	PK	0.0000	-39.1	-13.0	-26.1
14808.000	31.0	1.2	V-Horn	PK	0.0000	-39.4	-13.0	-26.4

Apparent Power Data Sheet

EUT:	2601CF	Work Order:	ITRM0054
Serial Number:	Unknown	Date:	02/09/05
Customer:	Intermec Technologies Corporation	Temperature:	20
Attendees:	None	Humidity:	33%
Cust. Ref. No.:		Barometric Pressure:	30.14
Tested by:	Holly Ashkannejhad	Power:	120VAC/60Hz
		Job Site:	EV01

TEST SPECIFICATIONS	
Specification:	FCC 24.238(a):2004
Method:	TIA/EIA 603-B:2001

SAMPLE CALCULATIONS
 Radiated Emissions: Field Strength = Measured Level + Antenna Factor + Cable Factor - Amplifier Gain + Distance Adjustment Factor + External Attenuation
 Conducted Emissions: Adjusted Level = Measured Level + Transducer Factor + Cable Attenuation Factor + External Attenuator


COMMENTS


EUT OPERATING MODES
 Bluetooth 2, 802.11b 1, GSM 606 (PCS) on 700C

DEVIATIONS FROM TEST STANDARD
 No deviations.

RESULTS	Run #
Pass	80

Other


 Tested By: _____

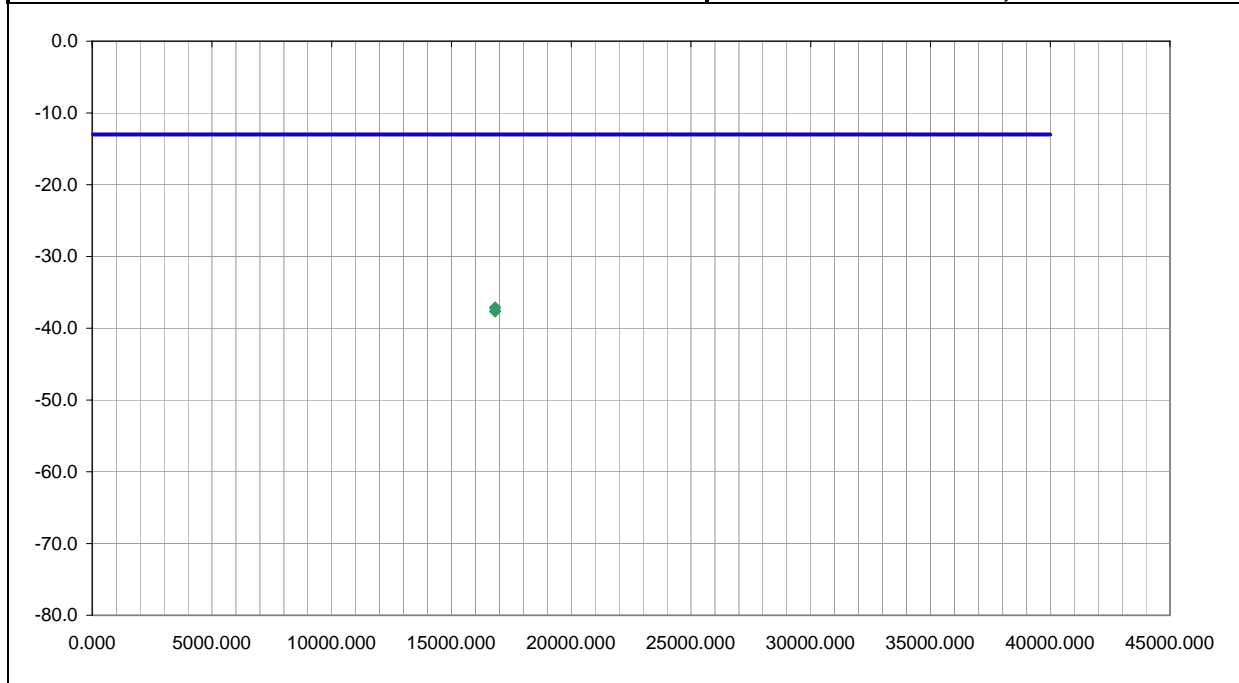

Freq (MHz)	Azimuth (degrees)	Height (meters)	Polarity	Detector	EIRP (Watts)	EIRP (dBm)	Spec. Limit (dBm)	Compared to Spec. (dB)
16821.000	160.0	1.2	V-Horn	PK	0.0000	-37.1	-13.0	-24.1
16821.000	279.0	1.3	H-Horn	PK	0.0000	-37.6	-13.0	-24.6

Apparent Power Data Sheet

EUT:	2601CF	Work Order:	ITRM0054
Serial Number:	Unknown	Date:	02/09/05
Customer:	Intermec Technologies Corporation	Temperature:	20
Attendees:	None	Humidity:	34%
Cust. Ref. No.:		Barometric Pressure:	30.24
Tested by:	Holly Ashkannejhad	Power:	120VAC/60Hz
		Job Site:	EV01

TEST SPECIFICATIONS	
Specification:	FCC 24.238(a):2004
Method:	TIA/EIA 603-B:2001

SAMPLE CALCULATIONS
 Radiated Emissions: Field Strength = Measured Level + Antenna Factor + Cable Factor - Amplifier Gain + Distance Adjustment Factor + External Attenuation
 Conducted Emissions: Adjusted Level = Measured Level + Transducer Factor + Cable Attenuation Factor + External Attenuator

COMMENTS
 700C Standalone


EUT OPERATING MODES
 Bluetooth 11, 802.11b 1, GSM 516 (PCS) on 700C

DEVIATIONS FROM TEST STANDARD
 No deviations.

RESULTS	Run #
Pass	81

Other


 Tested By:

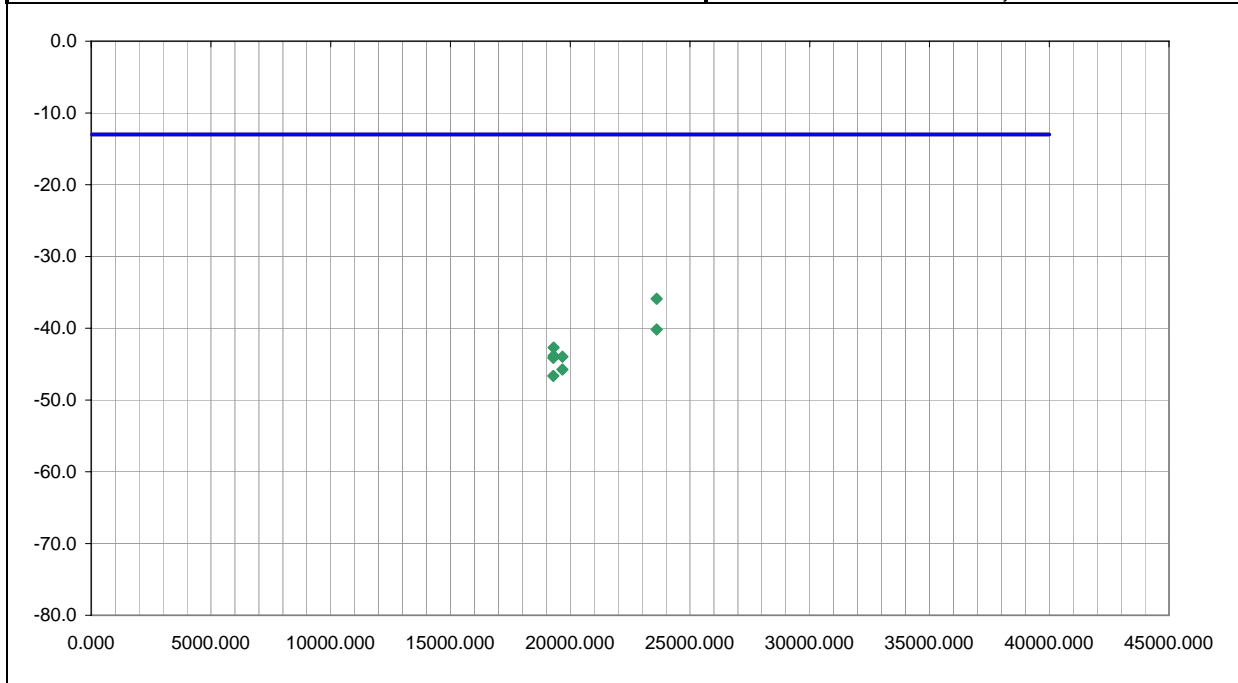

Freq (MHz)	Azimuth (degrees)	Height (meters)	Polarity	Detector	EIRP (Watts)	EIRP (dBm)	Spec. Limit (dBm)	Compared to Spec. (dB)
23612.000	239.0	1.1	V-High Horr	PK	0.0000	-35.9	-13.0	-22.9
23612.000	281.0	1.1	H-High Horr	PK	0.0000	-40.2	-13.0	-27.2
19310.000	306.0	1.1	V-High Horr	PK	0.0000	-42.7	-13.0	-29.7
19310.000	84.0	1.1	H-High Horr	PK	0.0000	-43.8	-13.0	-30.8
19674.000	245.0	1.1	V-High Horr	PK	0.0000	-44.0	-13.0	-31.0
19296.000	360.0	1.0	V-High Horr	PK	0.0000	-44.1	-13.0	-31.1
19674.000	299.0	1.1	H-High Horr	PK	0.0000	-45.8	-13.0	-32.8
19296.000	-1.0	1.0	H-High Horr	PK	0.0000	-46.6	-13.0	-33.6

Apparent Power Data Sheet

EUT:	2601CF	Work Order:	ITRM0054
Serial Number:	Unknown	Date:	03/12/05
Customer:	Intermec Technologies Corporation	Temperature:	18
Attendees:	None	Humidity:	36%
Cust. Ref. No.:		Barometric Pressure:	30.01
Tested by:	Holly Ashkannejhad	Power:	120VAC/60Hz
		Job Site:	EV01

TEST SPECIFICATIONS	
Specification:	FCC 22.917(a):2004
Method:	TIA/EIA 603-B:2001

SAMPLE CALCULATIONS
 Radiated Emissions: Field Strength = Measured Level + Antenna Factor + Cable Factor - Amplifier Gain + Distance Adjustment Factor + External Attenuation
 Conducted Emissions: Adjusted Level = Measured Level + Transducer Factor + Cable Attenuation Factor + External Attenuator

COMMENTS


EUT OPERATING MODES
 Bluetooth 11, 802.11b 1, GSM 202 (cellular) on 700C

DEVIATIONS FROM TEST STANDARD
 No deviations.

RESULTS	Run #
Pass	92

Other


 Tested By:

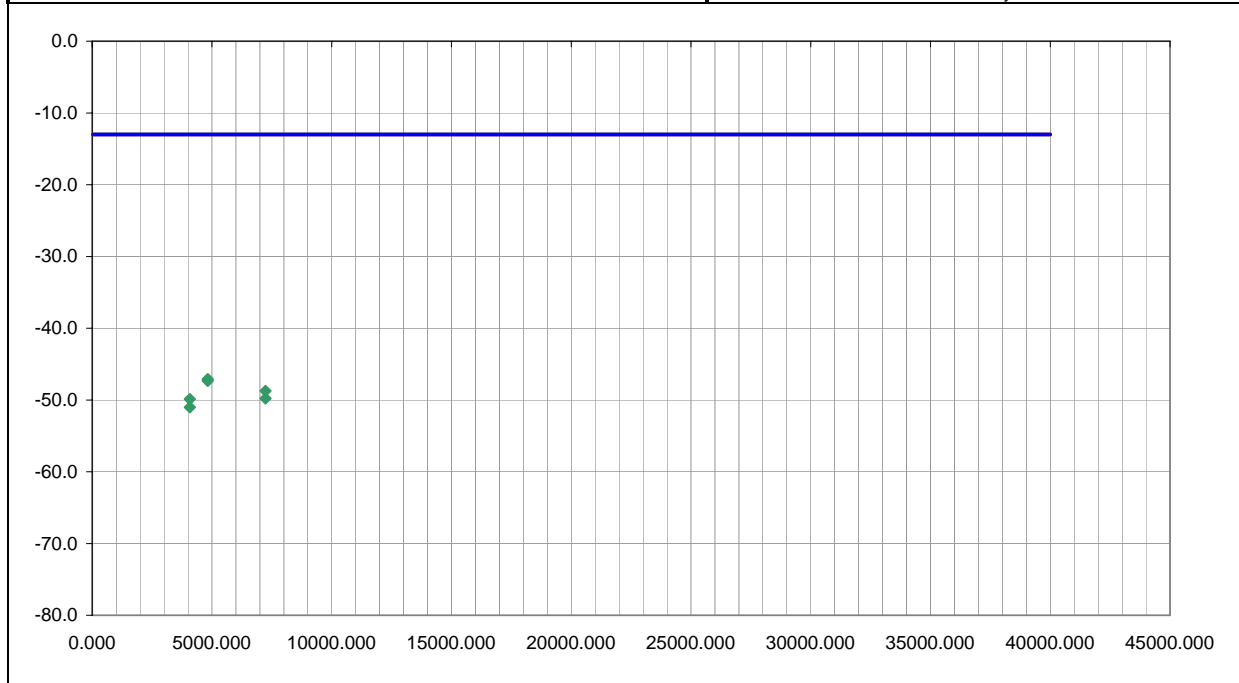

Freq (MHz)	Azimuth (degrees)	Height (meters)	Polarity	Detector	EIRP (Watts)	EIRP (dBm)	Spec. Limit (dBm)	Compared to Spec. (dB)
4823.954	258.0	1.1	H-Horn	PK	0.0000	-47.1	-13.0	-34.1
4823.954	288.0	1.6	V-Horn	PK	0.0000	-47.3	-13.0	-34.3
7236.000	230.0	1.3	H-Horn	PK	0.0000	-48.7	-13.0	-35.7
7236.000	232.0	1.6	V-Horn	PK	0.0000	-49.8	-13.0	-36.8
4075.975	237.0	1.1	H-Horn	PK	0.0000	-49.9	-13.0	-36.9
4075.975	268.0	1.3	V-Horn	PK	0.0000	-51.0	-13.0	-38.0

Apparent Power Data Sheet

EUT:	2601CF	Work Order:	ITRM0054
Serial Number:	Unknown	Date:	03/12/05
Customer:	Intermec Technologies Corporation	Temperature:	18
Attendees:	None	Humidity:	36%
Cust. Ref. No.:		Barometric Pressure:	30.01
Tested by:	Holly Ashkannejhad	Power:	120VAC/60Hz
		Job Site:	EV01

TEST SPECIFICATIONS	
Specification:	FCC 22.917(a):2004
Method:	TIA/EIA 603-B:2001

SAMPLE CALCULATIONS
 Radiated Emissions: Field Strength = Measured Level + Antenna Factor + Cable Factor - Amplifier Gain + Distance Adjustment Factor + External Attenuation
 Conducted Emissions: Adjusted Level = Measured Level + Transducer Factor + Cable Attenuation Factor + External Attenuator

COMMENTS


EUT OPERATING MODES
 Bluetooth 79, 802.11b 11, GSM 141 (cellular) on 700C

DEVIATIONS FROM TEST STANDARD
 No deviations.

RESULTS	Run #
Pass	93

Other


 Tested By:

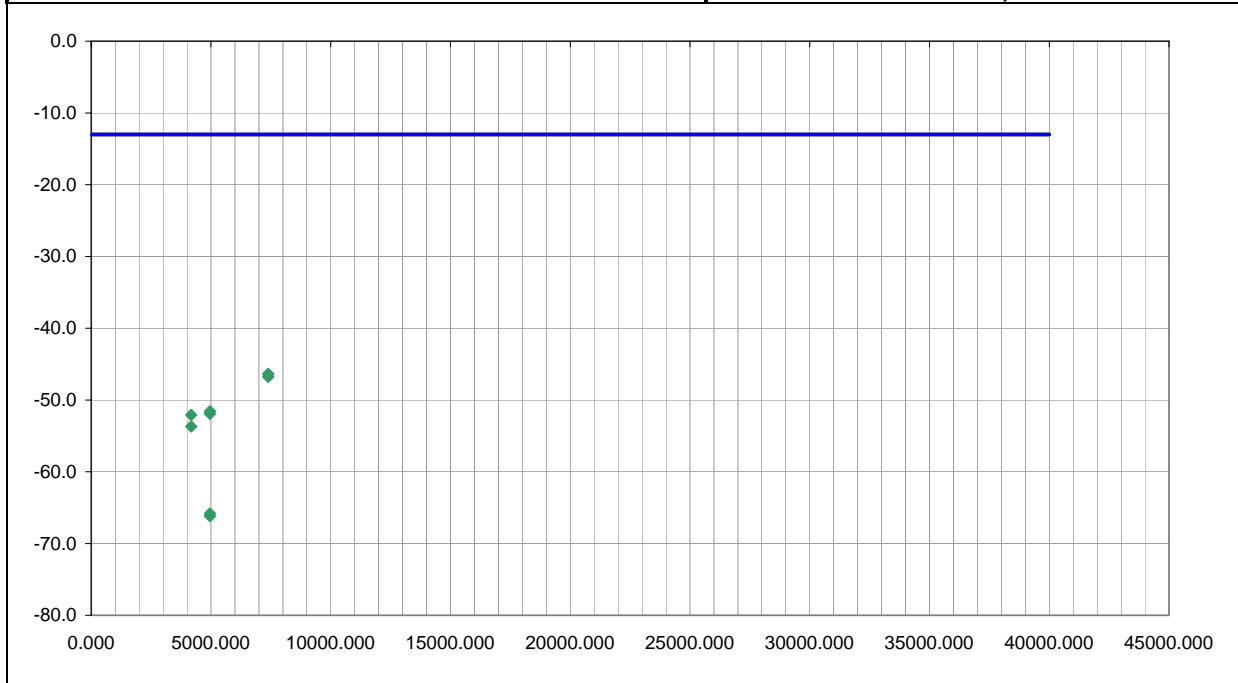

Freq (MHz)	Azimuth (degrees)	Height (meters)	Polarity	Detector	EIRP (Watts)	EIRP (dBm)	Spec. Limit (dBm)	Compared to Spec. (dB)
7386.210	276.0	1.2	V-Horn	PK	0.0000	-46.3	-13.0	-33.3
7386.210	319.0	1.6	H-Horn	PK	0.0000	-46.8	-13.0	-33.8
4959.963	86.0	1.3	H-Horn	PK	0.0000	-51.6	-13.0	-38.6
4959.963	13.0	1.3	V-Horn	PK	0.0000	-51.9	-13.0	-38.9
4175.967	233.0	1.1	H-Horn	PK	0.0000	-52.1	-13.0	-39.1
4175.967	276.0	1.2	V-Horn	PK	0.0000	-53.7	-13.0	-40.7
4959.963	13.0	1.3	V-Horn	AV	0.0000	-65.8	-13.0	-52.8
4959.963	86.0	1.3	H-Horn	AV	0.0000	-66.2	-13.0	-53.2

EUT:	2601CF	Work Order:	ITRM0054
Serial Number:	Unknown	Date:	03/13/05
Customer:	Intermec Technologies Corporation	Temperature:	18
Attendees:	None	Humidity:	36%
Cust. Ref. No.:		Barometric Pressure:	30.01
Tested by:	Holly Ashkannejhad	Power:	120VAC/60Hz
		Job Site:	EV01

TEST SPECIFICATIONS	
Specification:	FCC 22.917(a):2004
Method:	TIA/EIA 603-B:2001

SAMPLE CALCULATIONS
 Radiated Emissions: Field Strength = Measured Level + Antenna Factor + Cable Factor - Amplifier Gain + Distance Adjustment Factor + External Attenuation
 Conducted Emissions: Adjusted Level = Measured Level + Transducer Factor + Cable Attenuation Factor + External Attenuator

COMMENTS


EUT OPERATING MODES
 Bluetooth 5, 802.11b 1, GSM 191 (cellular) on 700C

DEVIATIONS FROM TEST STANDARD
 No deviations.

RESULTS	Run #
Pass	98

Other


 Tested By:

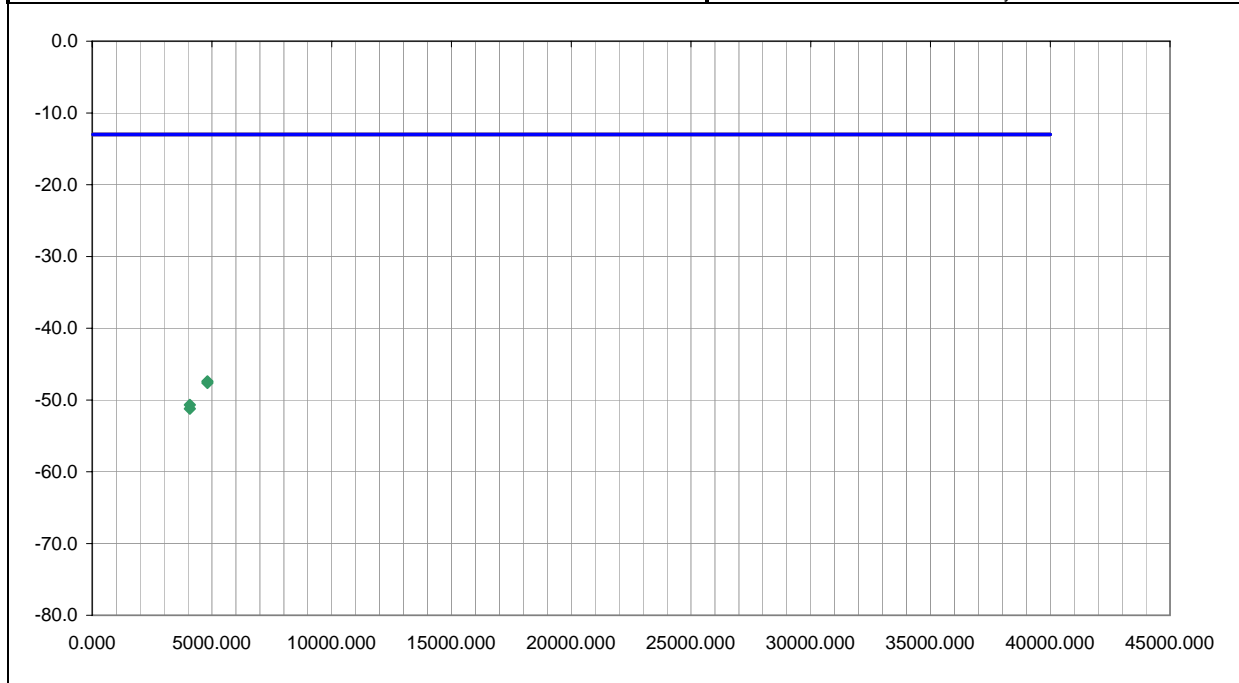

Freq (MHz)	Azimuth (degrees)	Height (meters)	Polarity	Detector	EIRP (Watts)	EIRP (dBm)	Spec. Limit (dBm)	Compared to Spec. (dB)
4811.954	274.0	1.1	H-Horn	PK	0.0000	-47.4	-13.0	-34.4
4811.954	113.0	1.1	V-Horn	PK	0.0000	-47.6	-13.0	-34.6
4075.922	246.0	1.8	H-Horn	PK	0.0000	-50.7	-13.0	-37.7
4075.922	279.0	1.2	V-Horn	PK	0.0000	-51.2	-13.0	-38.2

Apparent Power Data Sheet

EUT:	2601CF	Work Order:	ITRM0054
Serial Number:	Unknown	Date:	03/13/05
Customer:	Intermec Technologies Corporation	Temperature:	18
Attendees:	None	Humidity:	36%
Cust. Ref. No.:		Barometric Pressure:	30.01
Tested by:	Holly Ashkannejhad	Power:	120VAC/60Hz
		Job Site:	EV01

TEST SPECIFICATIONS	
Specification:	FCC 22.917(a):2004
Method:	TIA/EIA 603-B:2001

SAMPLE CALCULATIONS
 Radiated Emissions: Field Strength = Measured Level + Antenna Factor + Cable Factor - Amplifier Gain + Distance Adjustment Factor + External Attenuation
 Conducted Emissions: Adjusted Level = Measured Level + Transducer Factor + Cable Attenuation Factor + External Attenuator

COMMENTS


EUT OPERATING MODES
 Bluetooth 11, 802.11b 1, GSM 202 (cellular) on 700C

DEVIATIONS FROM TEST STANDARD
 No deviations.

RESULTS	Run #
Pass	99

Other


 Tested By: _____

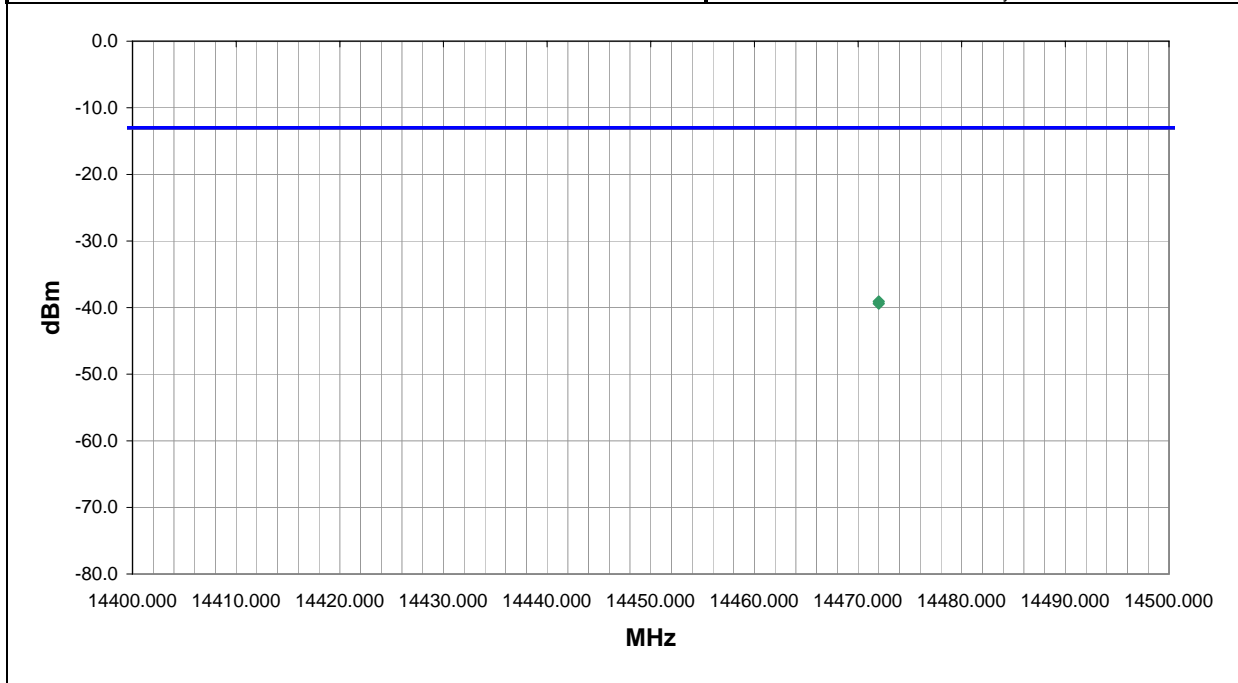

Freq (MHz)	Azimuth (degrees)	Height (meters)	Polarity	Detector	EIRP (Watts)	EIRP (dBm)	Spec. Limit (dBm)	Compared to Spec. (dB)
14472.000	318.0	1.3	H-Horn	PK	0.0000	-39.1	-13.0	-26.1
14472.000	109.0	1.2	V-Horn	PK	0.0000	-39.4	-13.0	-26.4

EUT:	2601CF	Work Order:	ITRM0054
Serial Number:	Unknown	Date:	03/16/05
Customer:	Intermec Technologies Corporation	Temperature:	21
Attendees:	None	Humidity:	32%
Cust. Ref. No.:		Barometric Pressure:	30.12
Tested by:	Greg Kiemel	Power:	120VAC/60Hz
		Job Site:	EV01

TEST SPECIFICATIONS	
Specification:	FCC 22.917(a):2004
Method:	TIA/EIA 603-B:2001

SAMPLE CALCULATIONS
 Radiated Emissions: Field Strength = Measured Level + Antenna Factor + Cable Factor - Amplifier Gain + Distance Adjustment Factor + External Attenuation
 Conducted Emissions: Adjusted Level = Measured Level + Transducer Factor + Cable Attenuation Factor + External Attenuator


COMMENTS
 Config 4: Bluetooth ch. 79, 802.11b Ch. 11, GSM Ch. 140

EUT OPERATING MODES
 Simultaneous Transmission of 700C(GSM cellular/802.11b/Bluetooth)


DEVIATIONS FROM TEST STANDARD
 No deviations.

RESULTS	Run #
Pass	111

Other



Tested By: _____

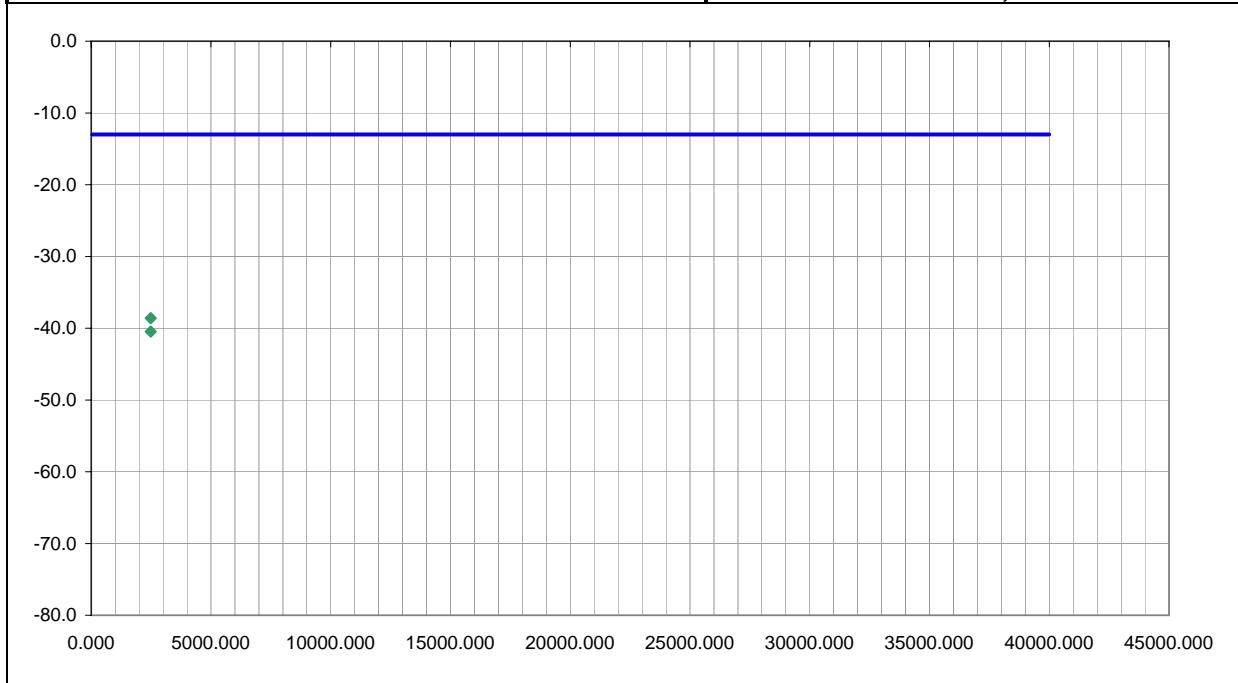

Freq (MHz)	Azimuth (degrees)	Height (meters)	Polarity	Detector	EIRP (Watts)	EIRP (dBm)	Spec. Limit (dBm)	Compared to Spec. (dB)
2483.500	168.0	1.7	H-Horn	PK	0.0000	-38.6	-13.0	-25.6
2483.500	130.0	1.6	V-Horn	PK	0.0000	-40.5	-13.0	-27.5

EUT: 2601CF	Work Order: ITRM0054
Serial Number: Unknown	Date: 03/16/05
Customer: Intermec Technologies Corporation	Temperature: 21
Attendees: None	Humidity: 32%
Cust. Ref. No.:	Barometric Pressure: 30.12
Tested by: Greg Kiemel	Power: 120VAC/60Hz
	Job Site: EV01

TEST SPECIFICATIONS	
Specification: FCC 22.917(a):2004	Method: TIA/EIA 603-B:2001

SAMPLE CALCULATIONS
 Radiated Emissions: Field Strength = Measured Level + Antenna Factor + Cable Factor - Amplifier Gain + Distance Adjustment Factor + External Attenuation
 Conducted Emissions: Adjusted Level = Measured Level + Transducer Factor + Cable Attenuation Factor + External Attenuator

COMMENTS


EUT OPERATING MODES
 Simultaneous Transmission of 700C(GSM cellular/802.11b/Bluetooth)

DEVIATIONS FROM TEST STANDARD
 No deviations.

RESULTS	Run #
Pass	112

Other

AKP
 Tested By: _____

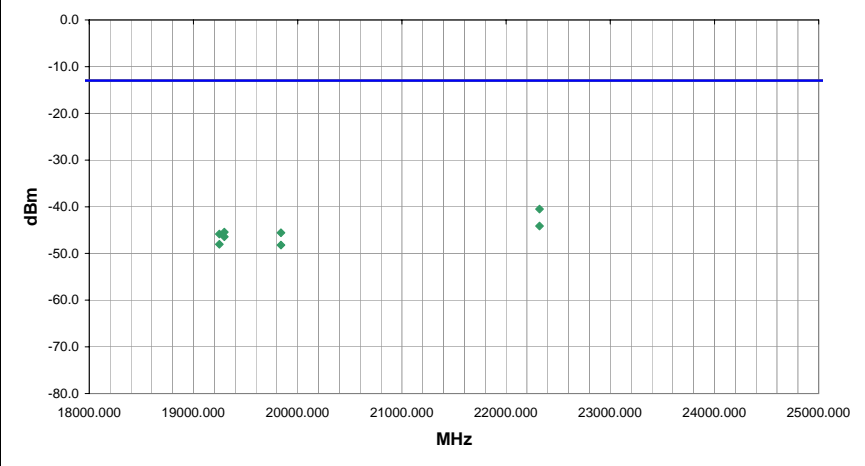

Freq (MHz)	Azimuth (degrees)	Height (meters)	Polarity	Detector	EIRP (Watts)	EIRP (dBm)	Spec. Limit (dBm)	Compared to Spec. (dB)	Comments
22320.000	0.0	1.0	V-High Horr	PK	0.0000	-40.5	-13.0	-27.5	Config. 3: Bluetooth Ch. 79, 802.11b Ch. 11, GSM Ch. 141.
22320.000	0.0	1.0	H-High Horr	PK	0.0000	-44.1	-13.0	-31.1	Config. 3: Bluetooth Ch. 79, 802.11b Ch. 11, GSM Ch. 141.
19296.000	0.0	1.0	V-High Horr	PK	0.0000	-45.4	-13.0	-32.4	Config. 1: Bluetooth Ch. 11, 802.11b Ch. 1, GSM Ch. 202.
19840.000	0.0	1.0	V-High Horr	PK	0.0000	-45.6	-13.0	-32.6	Config. 3: Bluetooth Ch. 79, 802.11b Ch. 11, GSM Ch. 141.
19248.000	0.0	1.0	V-High Horr	PK	0.0000	-45.8	-13.0	-32.8	Config. 2: Bluetooth Ch. 5, 802.11b Ch. 1, GSM Ch. 191.
19296.000	0.0	1.0	H-High Horr	PK	0.0000	-46.4	-13.0	-33.4	Config. 1: Bluetooth Ch. 11, 802.11b Ch. 1, GSM Ch. 202.
19248.000	0.0	1.0	H-High Horr	PK	0.0000	-48.0	-13.0	-35.0	Config. 2: Bluetooth Ch. 5, 802.11b Ch. 1, GSM Ch. 191.
19840.000	0.0	1.0	H-High Horr	PK	0.0000	-48.2	-13.0	-35.2	Config. 3: Bluetooth Ch. 79, 802.11b Ch. 11, GSM Ch. 141.



