

TEST REPORT

For

Mobile Phone

In conformity with

**FCC Part24, 15
IC RSS-133 Issue3**

Model:

Test Item: Mobile Phone

Report No: RY0708P03R1

Issue Date: Aug. 29, 2007

Prepared for

Fujitsu Limited.
1-1, Kamikodanaka 4-chome, Nakahara-ku, Kawasaki 211-8588,
Japan

Prepared by

RF Technologies Ltd.
472, Nippa-cho, Kohoku-ku, Yokohama, 223-0057, Japan
Telephone: +81+(0)45- 534-0645
FAX: +81+(0)45- 534-0646

**This report shall not be reproduced, except in full, without the written permission of RF Technologies Ltd. The test results relate only to the item(s) tested.
RF Technologies Ltd. is managed to ISO17025 and has the necessary knowledge and test facilities for testing according to the referenced standards.**

Table of Contents

1	General information	3
1.1	Product description	3
1.2	Test(s) performed/ Summary of test result	3
1.3	Test facility	4
1.4	Measurement uncertainty	4
1.5	Description of essential requirements and test results.....	5
1.5.1	Transmitter requirements	5
1.5.2	Receiver requirements.....	5
1.5.3	AC Power Line Parameters.....	5
1.5.4	Normal test conditions	5
1.5.5	Extreme test conditions.....	5
1.6	Setup of equipment under test (EUT)	6
1.6.1	Test configuration of EUT	6
1.6.2	Operating condition:	6
1.6.3	Setup diagram of tested system:.....	7
1.7	Equipment modifications	7
1.8	Deviation from the standard.....	7
2	Test procedure and result.....	8
2.1	Transmitter requirements	8
2.1.1	Carrier Output Power (Conducted).....	8
2.1.2	Carrier Output Power (Radiated).....	10
2.1.3	Frequency Stability (Temperature)	13
2.1.4	Frequency Stability (Voltage).....	15
2.1.5	Occupied Bandwidth.....	17
2.1.6	Transmitter Out of Band Spurious Emissions (Conducted).....	26
2.1.7	Transmitter Out of Band Spurious Emissions (Radiated).....	36
2.1.8	Band Edge Emissions.....	42
2.1.9	Transmitter AC Line Conducted Emission requirement.....	46
2.2	Receiver requirement	48
2.2.1	Receiver Spurious Emissions (Radiated).....	48
2.2.2	Receiver AC Line Conducted Emission requirement	51
3	Test setup photographs.....	53
4	List of utilized test equipment/ calibration.....	55

1 General information

1.1 Product description

Test item : Mobile phone
Manufacturer : Fujitsu Limited
Address : 1-1, Kamikodanaka 4-chome, Nakahara-ku, Kawasaki
211-8588, Japan
Model : F905i
FCC ID : EJE-FOMA-905I
IC Certification No. : 337J-F905I
Operating frequency range : TX 1850.2-1909.8 MHz (PCS1900)
: RX 1930.2-1989.8 MHz (PCS1900)
Type of Modulation : GMSK
Receipt date of EUT : 09 July 2007
Nominal power voltages : 3.7VDC (Lithium-ion battery)
Power Class : 1 (Maximum power 30dBm nominal)
Antenna Type : integral antenna
Serial numbers : 355280010006848

1.2 Test(s) performed/ Summary of test result

Applicable Standard(s) : FCC Part24, 15
RSS-133 Issue3
Test(s) started : July 9, 2007
Test(s) completed : July 15, 2007
Purpose of test(s) : Grant for Certification of FCC / IC
Summary of test result : Complied

Note: The above judgment is only based on the measurement data and it does not include the measurement uncertainty. Accordingly, the statement below is applied to the test result. The EUT complies with the limit required in the standard in case that the margin is not less than the measurement uncertainty in the Laboratory. Compliance of the EUT is more probable than non-compliance is case that the margin is less than the measurement uncertainty in the Laboratory.

Test engineer : 
T. Kato

Reviewer : 
T. Ikegami

1.3 Test facility

The Federal Communications Commission has reviewed the technical characteristics of the test facilities at RF Technologies Ltd., located in 472, Nippa-cho, Kohoku-ku, Yokohama, 223-0057, Japan, and has found these test facilities to be in compliance with the requirements of 47 CFR Part 15, section 2.948, per October 23, 2000.

The description of the test facilities has been filed under registration number 879401 at the Office of the Federal Communications Commission. The facility has been added to the list of laboratories performing these test services for the public on a fee basis.

The list of all public test facilities is available on the Internet at <http://www.fcc.gov>.

Registered by Voluntary Control Council for Interference by Information Technology Equipment (VCCI).

Each registered facility number is as follows;

Test site (Semi-anechoic chamber 3m) R-2393

Test site (Shielded room) C-2617

Registered by Industry Canada (IC). The registered facility number is as follows;

Test site No. 1(Semi-anechoic chamber 3m) : 6974A

1.4 Measurement uncertainty

The treatment of uncertainty is based on the general matters on the definition of uncertainty in “Guide to the expression of uncertainty in measurement (GUM)” published by ISO. The Lab’s uncertainty is determined by referring UKAS Publication LAB34: 2002 “The Expression of Uncertainty in EMC Testing” and CISPR16-4-2: 2003 “Uncertainty in EMC Measurements”.

The uncertainty of the measurement result in the level of confidence of approximately 95% ($k=2$) is as follows;

RF frequency: $\pm 1 \times 10^{-7}$

RF power conducted: ± 1.0 dB

Conducted emission of receivers: ± 1.0 dB

Radiated emission (9kHz - 30MHz): ± 3.2 dB

Radiated emission (30MHz - 1000MHz): ± 4.6 dB

Radiated emission (1GHz - GHz): ± 4.6 dB

Temperature: ± 1 degree

Humidity: ± 5 %

1.5 Description of essential requirements and test results

An overview of radio requirements, as laid out in FCC Part24/15, RSS-133 is given below.

1.5.1 Transmitter requirements

Test Description	Section in this report	Applicable	Result
Carrier Output Power (Conducted)	2.1.1	Yes	Passed
Carrier Output Power (Radiated)	2.1.2	Yes	Passed
Frequency Stability (Temperature Variation)	2.1.3	Yes	Passed
Frequency Stability (Voltage Variation)	2.1.4	Yes	Passed
Occupied Bandwidth	2.1.5	Yes	Passed
Out of Band Emissions (Conducted)	2.1.6	Yes	Passed
Out of Band Emissions (Radiated)	2.1.7	Yes	Passed
Band Edge Emissions	2.1.8	Yes	Passed

1.5.2 Receiver requirements

Test Description	Section in this report	Applicable	Result
Spurious Radiated Emissions	2.2.1	Yes	Passed

1.5.3 AC Power Line Parameters

Test Description	Section in this report	Applicable	Result
Conducted Spurious Emissions (Idle mode)	2.3.1	Yes	Passed
Conducted Spurious Emissions (Traffic mode)	2.3.2	Yes	Passed

1.5.4 Normal test conditions

Temperature(*) : +15°C to +35°C
Relative humidity(*) : 20 % to 75 %
Supply voltage : 3.7 VDC (Nominal)
Measurement Frequency : 1850.2MHz(512ch),1880.0MHz(661ch),1909.8MHz(810ch)

* When it is impracticable to carry out tests under these conditions, a note to this effect, stating the ambient temperature and relative humidity during the tests, must be stated separately.

1.5.5 Extreme test conditions

Temperature : -30°C (min) to +50°C (max)
Supply voltage : 3.4 VDC (min) to 4.2 VDC (max)

The equipment has a function that it is automatically turned off when min battery voltage (3.4V) is detected.

1.6 Setup of equipment under test (EUT)

1.6.1 Test configuration of EUT

Equipment(s) under test:

	Item	Manufacturer	Model No.	Serial No.	FCC ID/ IC Certification No.
A	Mobile phone	Fujitsu Limited	F905i	355280010006848	EJE-FOMA-905I / 337J-F905I
B	Battery pack	Fujitsu Limited	CA54310-0006	None	N/A
C	AC Adaptor	NEC Corp.	MAS-BH0008-A001	None	N/A
D	Ear Phone	NTT DoCoMo	P02	None	N/A


Connected cable(s):

No.	Item	Identification (Manu.e.t.c)	Shielded YES / NO	Ferrite Core YES / NO	Connector Type Shielded YES / NO	Length (m)
1	DC power cable	-	No	No	No	1.5
2	AC power cable	HEWTECH	No	No	No	0.6
3	Ear phone cable	-	No	No	No	1.4

1.6.2 Operating condition:

Traffic mode : EUT is connected with RF tester in Max power level (PL0).
Idle mode : EUT is under idle mode, no output power is transmitted.

1.6.3 Setup diagram of tested system:

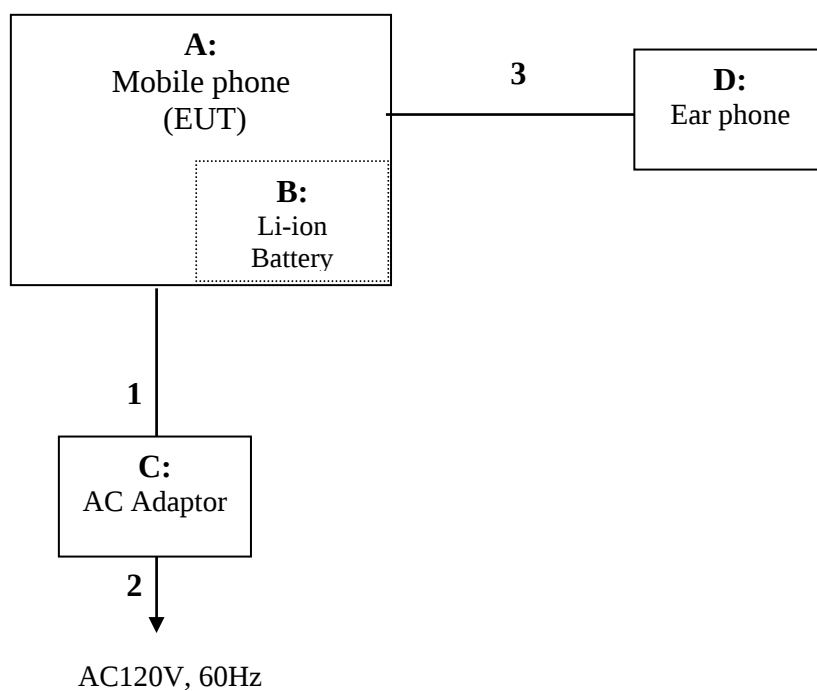

1.7 Equipment modifications

No modifications have been made to the equipment in order to achieve compliance with the applicable standards described in clause 1.2.

1.8 Deviation from the standard

No deviations from the standards described in clause 1.2.

2 Test procedure and result

2.1 Transmitter requirements

2.1.1 Carrier Output Power (Conducted)

Reference Standard

FCC : Part24.232, 2.0146

IC : RSS133 Issue3 Sec6.4, SRSP-510 Issue3 Sec5.1.2

Test Conditions

Date: 2007/07/12

Ambient Temperature: 25degC


Relative humidity: 52%

Test Voltage: 3.7V

Test Method

- EUT is connected to RF tester with pseudo random data modulation and set to maximum output power level.
- The output power is measured with RF tester (CMU200 etc.).

Test Setup

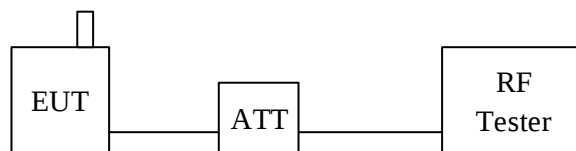

Test Results (Voice Call)

Channel	Frequency (MHz)	Ouput Power (dBm)	Limit (dBm)	Result
Bottom (512ch)	1850.2	30.0	33.0	Pass
Middle (661ch)	1880.0	30.2	33.0	Pass
Top (810ch)	1909.8	30.1	33.0	Pass

Test Results (GPRS)

Channel	Frequency (MHz)	Ouput Power (dBm)	Limit (dBm)	Result
Bottom (512ch)	1850.2	30.0	33.0	Pass
Middle (661ch)	1880.0	30.2	33.0	Pass
Top (810ch)	1909.8	30.1	33.0	Pass

Test Equipment Used

Equipment name	RFT ID No.
RF tester	RC02

Final Result

The EUT met the requirements of the standard for this test.

2.1.2 Carrier Output Power (Radiated)

Reference Standard

FCC : Part24.232, 2.0146

IC : RSS133 Issue3 Sec6.4, SRSP-510 Issue3 Sec5.1.2

Test Conditions

Date: 2007/07/15

Ambient Temperature: 25degC

Relative humidity: 68%

Test Voltage: 3.7V

Test Method

Substitution method is used for this test.

a) EUT is set on non-conducting turntable and the output power is set to the maximum level.

The height of turntable is 100cm.

b) As a receive antenna, Horn antenna is used for high frequency range (above 1GHz), and Bilogical antenna is used for low frequency range (30MHz to 1GHz).

c) Maximum power is measured by a spectrum analyzer(SA) in below conditions.

Turntable is rotated 360 degrees.

The height of receive antenna is changed from 1m to 4m.

Receive antenna polarization is set to vertical and horizontal.

This maximum power is recorded.

d) Reference antenna is replaced with EUT, and connected with signal generator(SG).


SG output power is adjusted to get same level as the recorded maximum radiated EUT power by SA.

e) Radiated output power (Pout) is calculated with adjusted SG output (Psg) [dBm], reference antenna gain (Gref) [dBi] and cable loss between SG and reference antenna (Lcab) [dB].


$$P_{out} [\text{dBm e.i.r.p}] = P_{sg} - G_{ref} + L_{cab}$$

Test Setup

[Measurement]

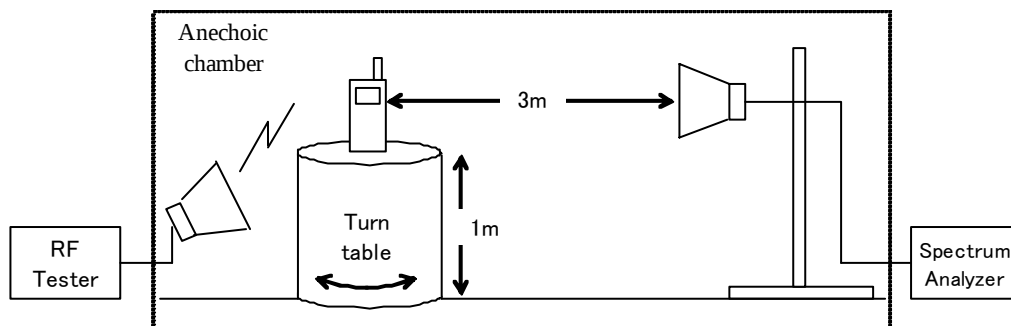

[Substitution]

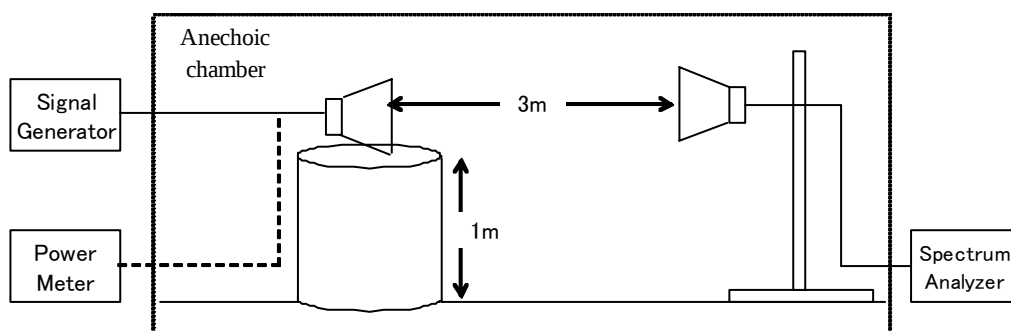

Test Results (Voice Call)

Channel	Frequency (MHz)	Ouput Power (dBm e.i.r.p)	Limit (dBm e.i.r.p)	Result
Bottom (512ch)	1850.2	29.61	33.0	Pass
Middle (661ch)	1880.0	29.85	33.0	Pass
Top (810ch)	1909.8	29.98	33.0	Pass

Test Results (GPRS)

Channel	Frequency (MHz)	Ouput Power (dBm e.i.r.p)	Limit (dBm e.i.r.p)	Result
Bottom (512ch)	1850.2	29.45	33.0	Pass
Middle (661ch)	1880.0	29.76	33.0	Pass
Top (810ch)	1909.8	30.01	33.0	Pass

Test Equipment Used

Equipment name	RFT ID No.
Spectrum Analyzer	SA06
Receive Antenna	DH01
Reference Antenna	DH02
Signal Generator	SG05
Power Meter	PM01
RF tester	RC02

Final Result

The EUT met the requirements of the standard for this test.

2.1.3

Frequency Stability (Temperature)

Reference Standard

FCC : Part24.235, 2.1055

IC : RSS133 Issue3 Sec6.3

Test Conditions

Date: 2007/07/10

Ambient Temperature: 24degC

Relative humidity: 67%

Test Voltage: 3.7V

Test Method

To measure the carrier frequency, "Frequency error measurement" function of RF tester is used.

a) EUT is hold about 30 minutes under measurement temperature condition.

b) EUT is powered on with nominal voltage.


c) EUT is connected to RF tester with Max transmit power level.

d) Frequency error is measured by RF tester.

Process b) to d) must be finished within 2 minutes to prevent EUT warming.

e) Process a) to d) is repeated at 10deg increments from -30 to +50degC.

Test Setup

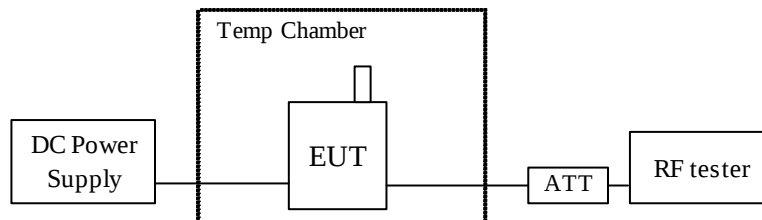

Test Results

Bottom Channel (512ch, Nominal Freq.:1850.2MHz)

Temperature (deg C)	Frequency Error (Hz)	Frequency Error (ppm)	Limit (ppm)	Result
-30	42	0.02	± 2.5	Passed
-20	37	0.02	± 2.5	Passed
-10	50	0.03	± 2.5	Passed
0	39	0.02	± 2.5	Passed
10	44	0.02	± 2.5	Passed
20	43	0.02	± 2.5	Passed
30	40	0.02	± 2.5	Passed
40	45	0.02	± 2.5	Passed
50	47	0.03	± 2.5	Passed

Test Equipment Used

Equipment name	RFT ID No.
RF tester	RC02

Final Result

The EUT met the requirements of the standard for this test

2.1.4

Frequency Stability (Voltage)

Reference Standard

FCC : Part24.235, 2.1055

IC : RSS133 Issue3 Sec6.3

Test Conditions

Date: 2007/07/10

Ambient Temperature: 24degC

Relative humidity: 67%


Test Voltage: 3.3 to 4.1V

Test Method

To measure the carrier frequency, "Frequency error measurement" function of RF tester is used.

- EUT is powered on with nominal voltage. Temperature is 20degC.
- EUT is connected to RF tester with Max transmitter power level.
- Frequency error is measured by RF tester.
- Process a) to c) is repeated at minimum and maximum voltage condition.

Test Setup

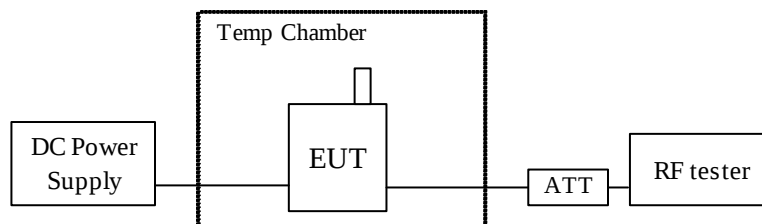

Test Results**Bottom Channel (512ch, Nominal Freq.:1850.2MHz)**

Voltage (V)	Frequency Error (Hz)	Frequency Error (ppm)	Limit (ppm)	Result
3.3	43	0.02	± 2.5	Passed
3.7	43	0.02	± 2.5	Passed
4.1	46	0.02	± 2.5	Passed

Test Equipment Used

Equipment name	RFT ID No.
RF tester	RC02

Final Result

The EUT met the requirements of the standard for this test

2.1.5 Occupied Bandwidth

Reference Standard

FCC : Part24.238

IC : RSS-Gen Issue1 Sec4.4.1

Test Conditions

Date: 2007/07/10

Ambient Temperature: 24degC


Relative humidity: 67%

Test Voltage: 3.7V

Test Method

- EUT is connected to RF tester with Max transmitter power level.
- 26dB bandwidth is measured by Spectrum Analyzer.
- 99% occupied bandwidth of transmitter spectrum is measured by Spectrum Analyzer.


Test Setup

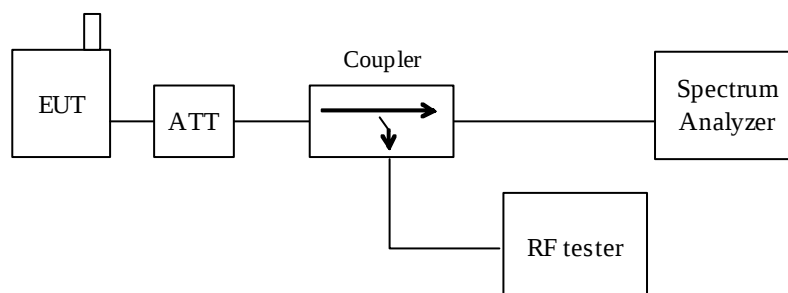

Test Results (Voice Call)


Channel	Frequency (MHz)	Resolution Bandwidth (kHz)	Video Bandwidth (kHz)	Occupied Bandwidth (kHz)	26dB Bandwidth (kHz)
Bottom (512ch)	1850.2	3kHz	10kHz	234	306
Middle (661ch)	1880.0	3kHz	10kHz	236	306
Top (810ch)	1909.8	3kHz	10kHz	234	306

Graphical Data (Voice Call)

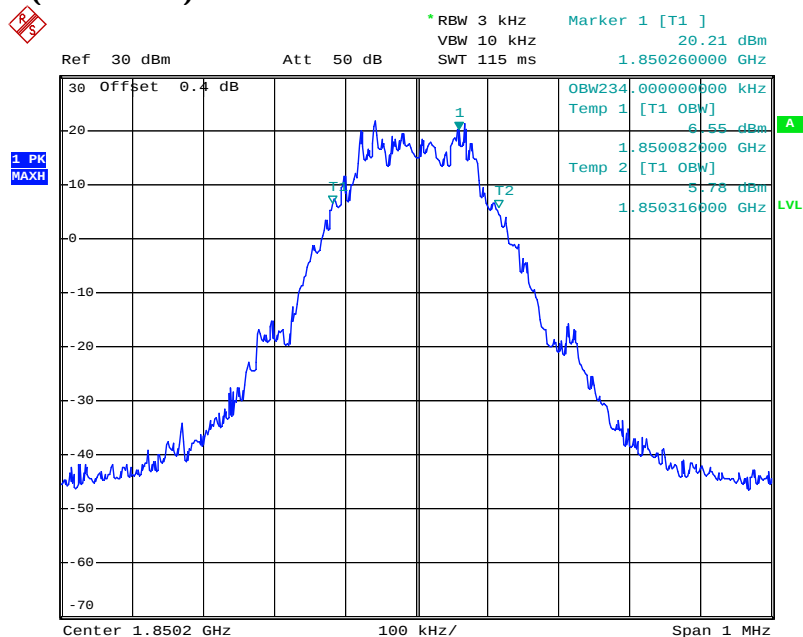


Date: 10.JUL.2007 09:32:09

512ch Occupied Bandwidth

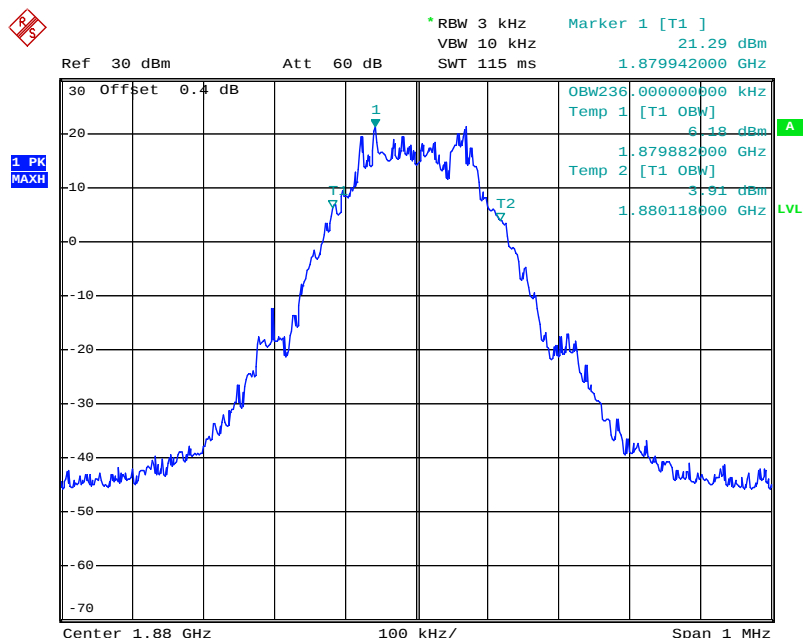


Date: 10.JUL.2007 09:29:57

661ch Occupied Bandwidth

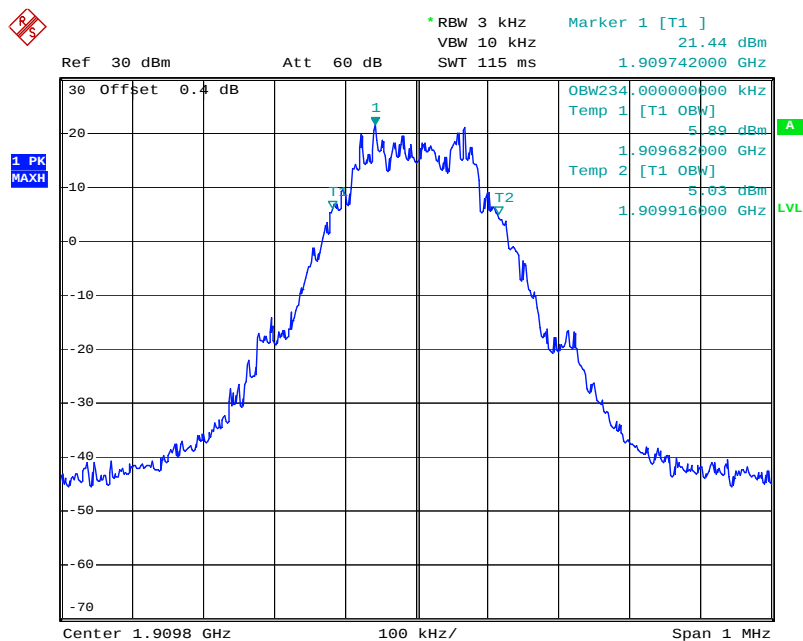


Date: 10.JUL.2007 09:27:59

810ch Occupied Bandwidth

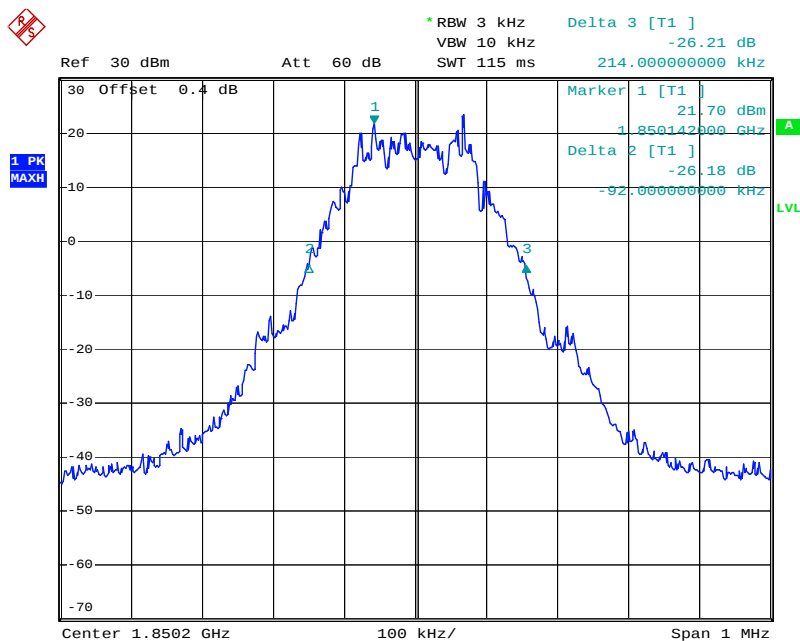


Date: 10.JUL.2007 09:21:30

512ch 26dB Bandwidth

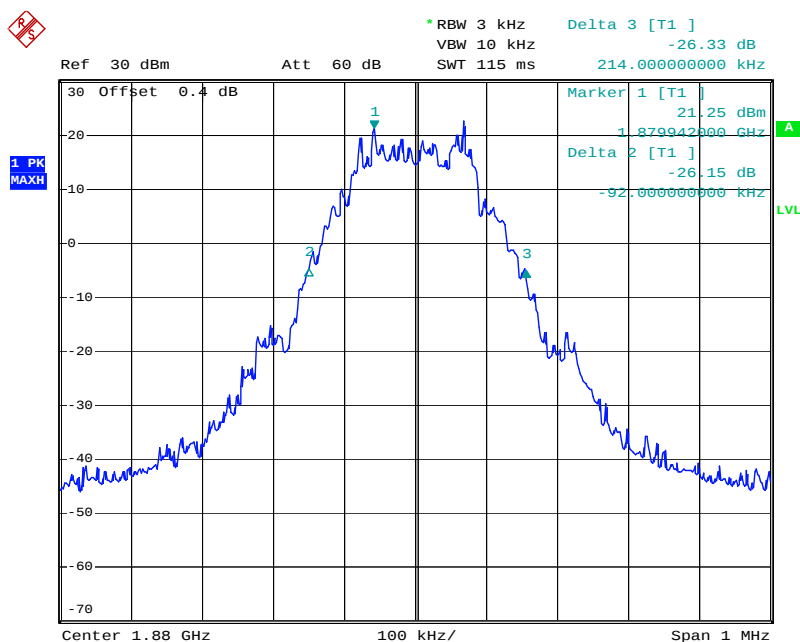

Date: 10.JUL.2007 09:24:05

661ch 26dB Bandwidth

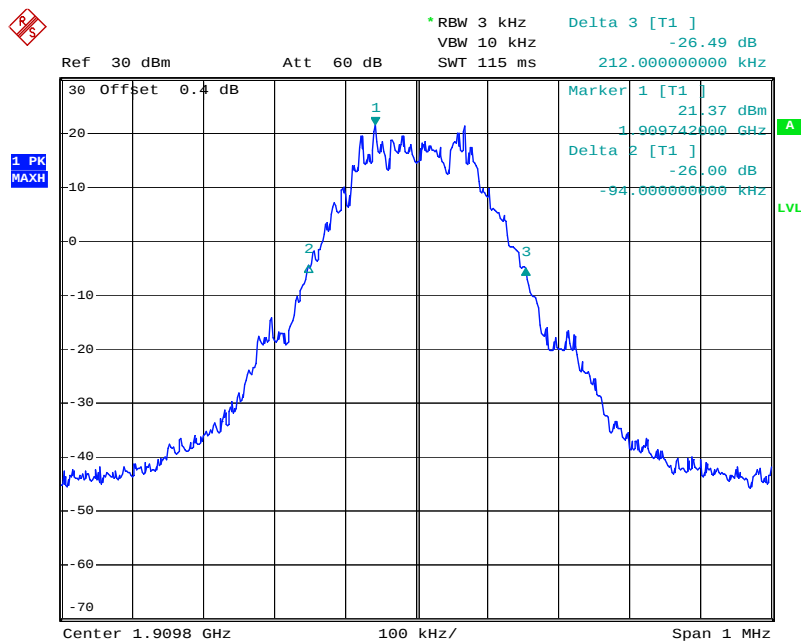


Date: 10.JUL.2007 09:26:08

810ch 26dB Bandwidth


Test Results (GPRS)

Channel	Frequency (MHz)	Resolution Bandwidth (kHz)	Video Bandwidth (kHz)	Occupied Bandwidth (kHz)	26dB Bandwidth (kHz)
Bottom (512ch)	1850.2	3kHz	10kHz	240	312
Middle (661ch)	1880.0	3kHz	10kHz	242	316
Top (810ch)	1909.8	3kHz	10kHz	240	302

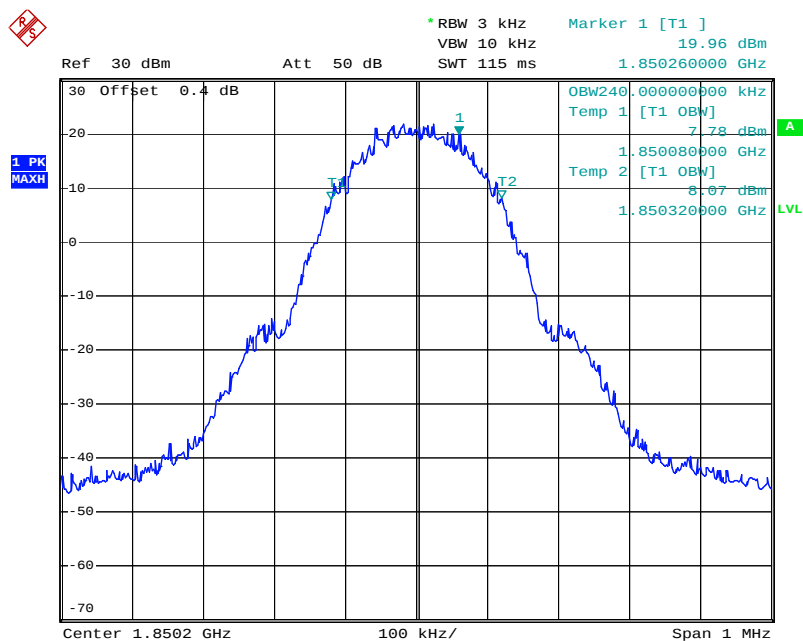


Date: 10.JUL.2007 09:36:19

GPRS 512ch Occupied Bandwidth

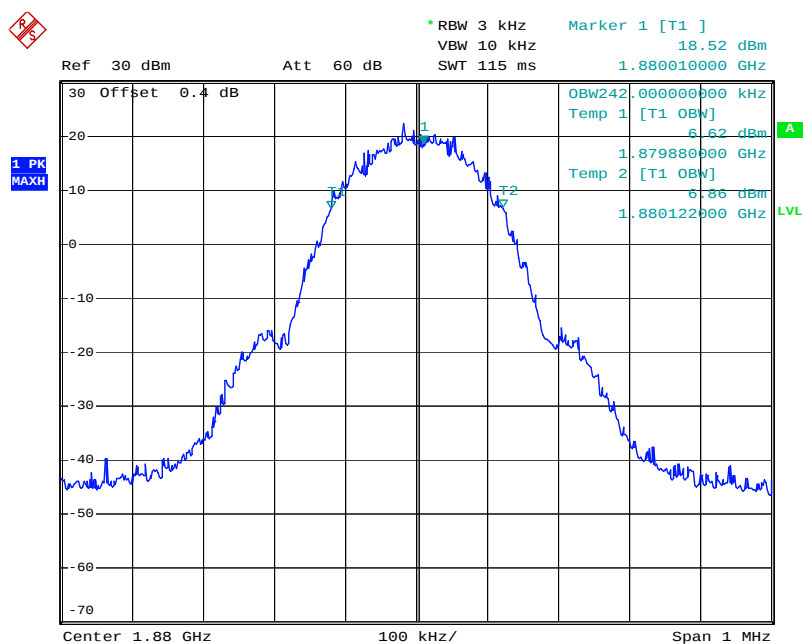


Date: 10.JUL.2007 09:41:50

GPRS 661ch Occupied Bandwidth

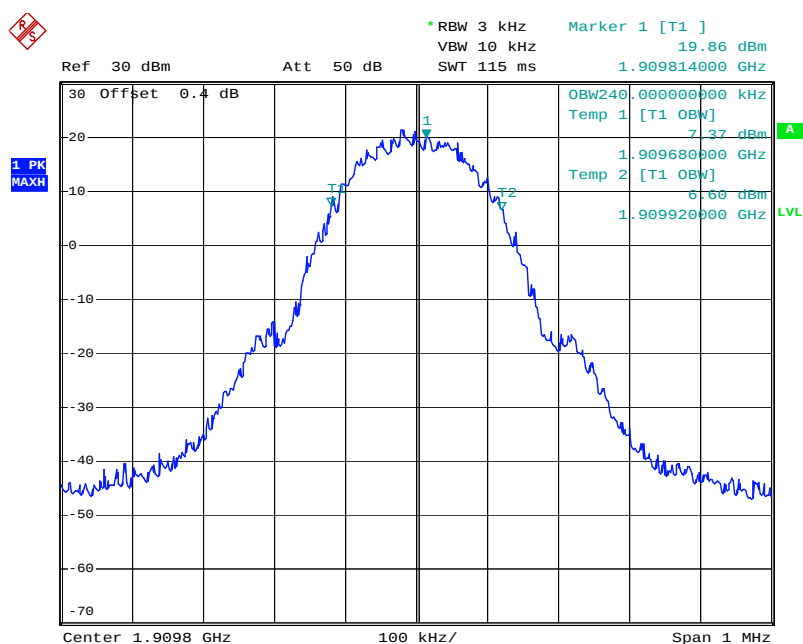


Date: 10.JUL.2007 09:43:17

GPRS 810ch Occupied Bandwidth

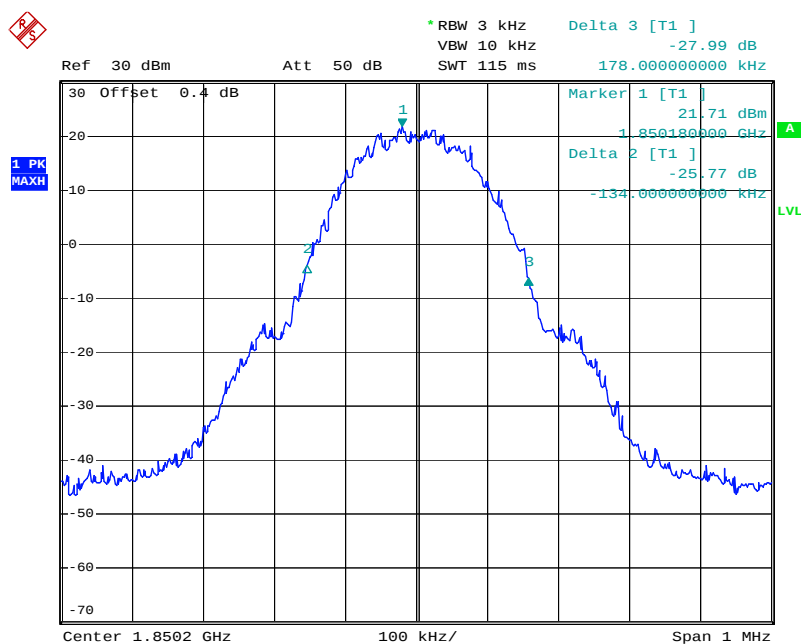


Date: 10.JUL.2007 09:38:13

GPRS 512ch 26dB Bandwidth

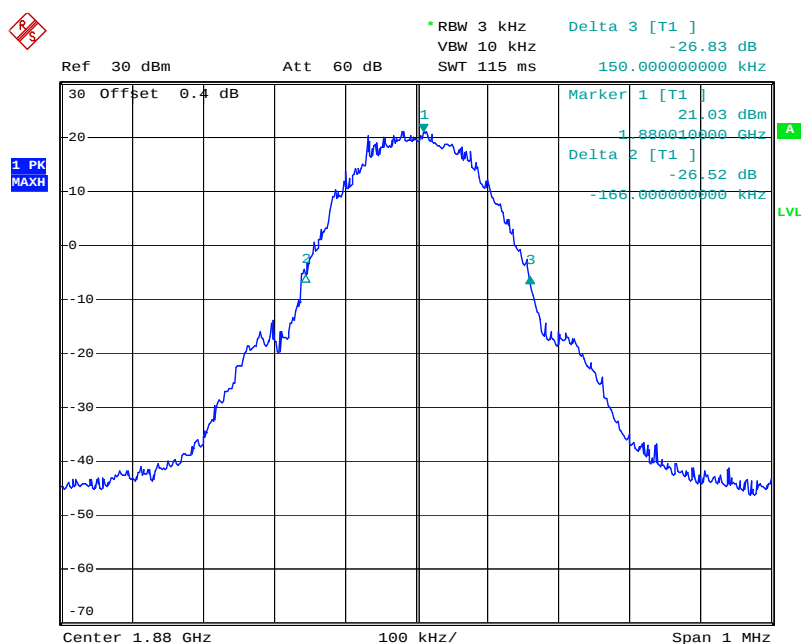

Date: 10.JUL.2007 09:40:30

GPRS 661ch 26dB Bandwidth

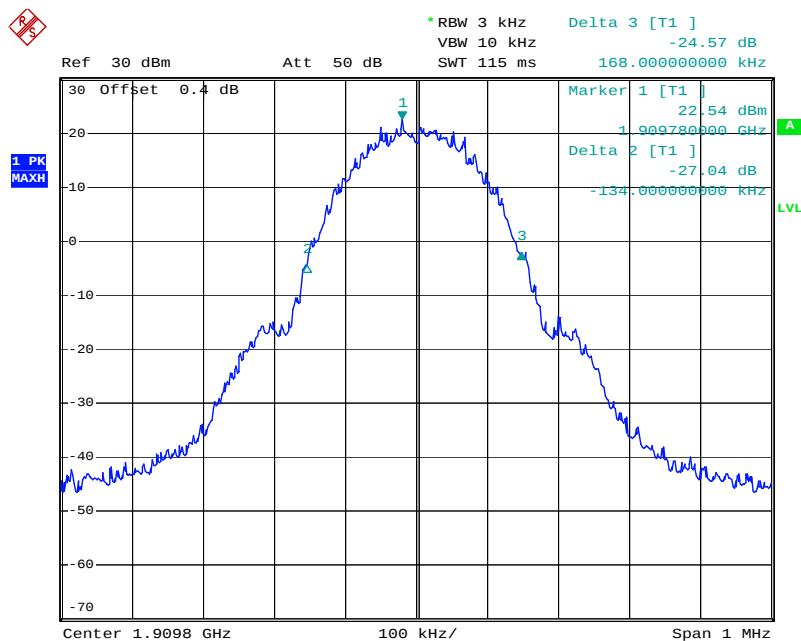

Date: 10.JUL.2007 09:45:28

GPRS 810ch 26dB Bandwidth

Test Equipment Used

Equipment name	RFT ID No.
Spectrum Analyzer	SA06
RF tester	RC02

2.1.6 Transmitter Out of Band Spurious Emissions (Conducted)

Reference Standard

FCC : Part24.238

IC : RSS133 Issue3 Sec6.5

Test Conditions

Date: 2007/07/10

Ambient Temperature: 24degC

Relative humidity: 67%


Test Voltage: 3.7V

Test Method


- EUT is connected to RF tester with Max transmitter power level.
- Out of band Spurious is measured by Spectrum Analyzer.
- Resolution band width of spectrum analyzer is set to 1MHz (above 1GHz) or 100kHz (below 1GHz).

Test Setup

30MHz to 3500MHz

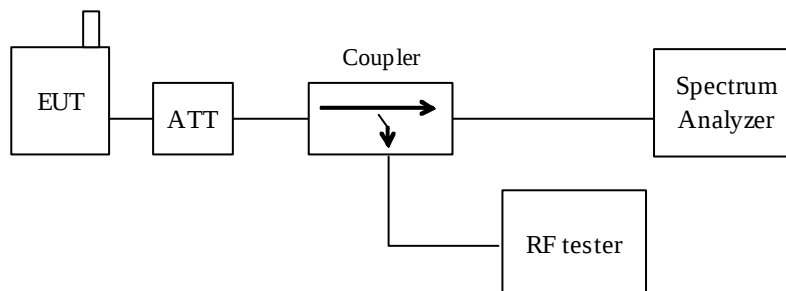

above 3500MHz

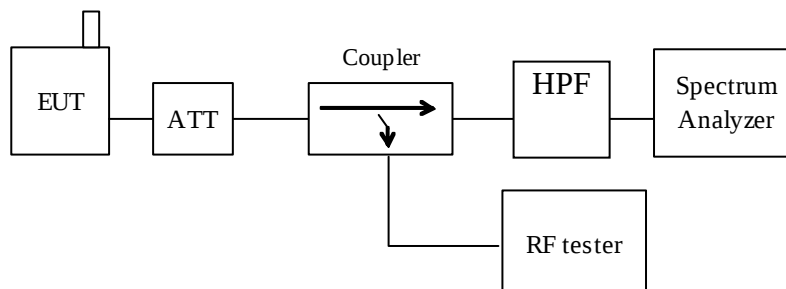

Test Results (Voice Call)**Bottom Channel (512ch, Nominal Freq.:1850.2MHz)**

Measurement Frequency (MHz)	Measurement Bandwidth (MHz)	Emission Level (dBm)	Limit (dBm)	Result Pass/Fail
3700.4	1	-48.1	-13.0	Pass
5550.6	1	-46.6	-13.0	Pass
7400.8	1	-61.7	-13.0	Pass
9251.0	1	-59.9	-13.0	Pass
11101.2	1	-61.4	-13.0	Pass
12951.4	1	-	-13.0	Pass
14801.6	1	-	-13.0	Pass
16651.8	1	-	-13.0	Pass
18502.0	1	-	-13.0	Pass
others		-	-13.0	Pass


Middle Channel (661ch, Nominal Freq.:1880.0MHz)

Measurement Frequency (MHz)	Measurement Bandwidth (MHz)	Emission Level (dBm)	Limit (dBm)	Result Pass/Fail
3760.0	1	-47.6	-13.0	Pass
5640.0	1	-49.6	-13.0	Pass
7520.0	1	-59.1	-13.0	Pass
9400.0	1	-59.8	-13.0	Pass
11280.0	1	-	-13.0	Pass
13160.0	1	-	-13.0	Pass
15040.0	1	-	-13.0	Pass
16920.0	1	-	-13.0	Pass
18800.0	1	-	-13.0	Pass
others		-	-13.0	Pass


Top Channel (810ch, Nominal Freq.:1909.8MHz)

Measurement Frequency (MHz)	Measurement Bandwidth (MHz)	Emission Level (dBm)	Limit (dBm)	Result Pass/Fail
3819.6	1	-47.3	-13.0	Pass
5729.4	1	-49.0	-13.0	Pass
7639.2	1	-57.1	-13.0	Pass
9549.0	1	-56.5	-13.0	Pass
11458.8	1	-	-13.0	Pass
13368.6	1	-	-13.0	Pass
15278.4	1	-	-13.0	Pass
17188.2	1	-	-13.0	Pass
19098.0	1	-	-13.0	Pass
others		-	-13.0	Pass


Graphical Data (Voice Call : 661ch)

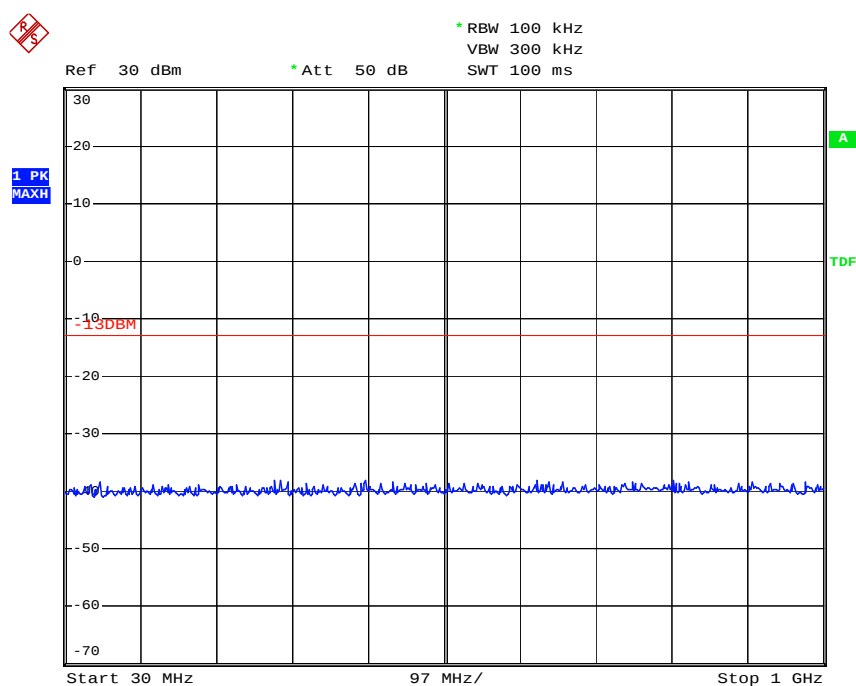


Date: 10.JUL.2007 12:30:52

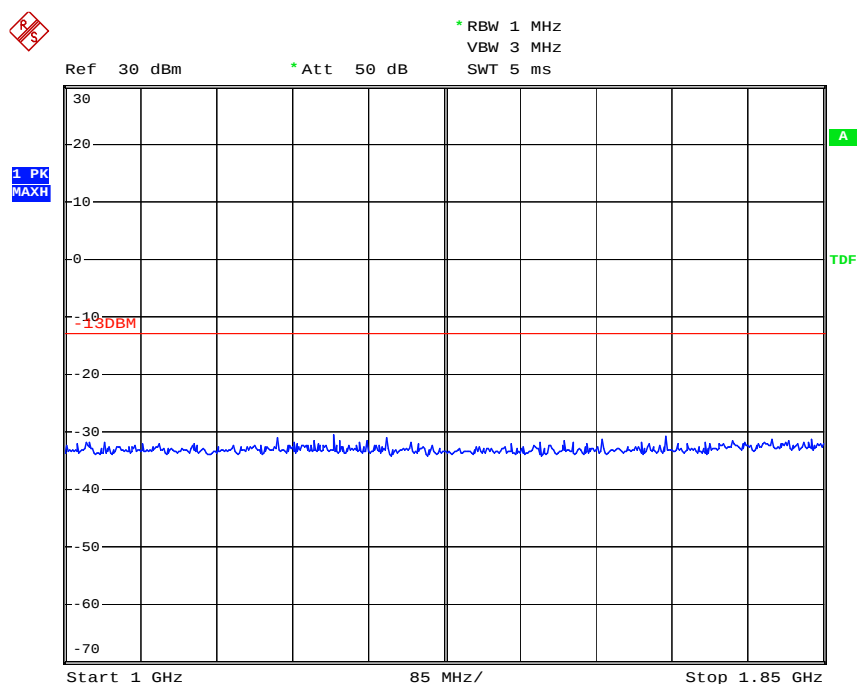


Date: 10.JUL.2007 12:30:20

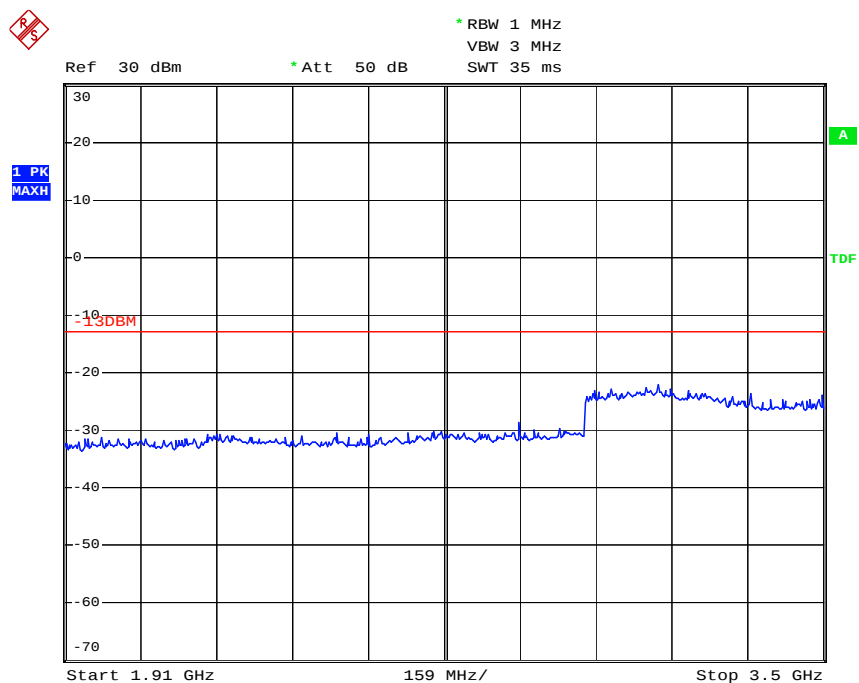

Date: 10.JUL.2007 12:29:55

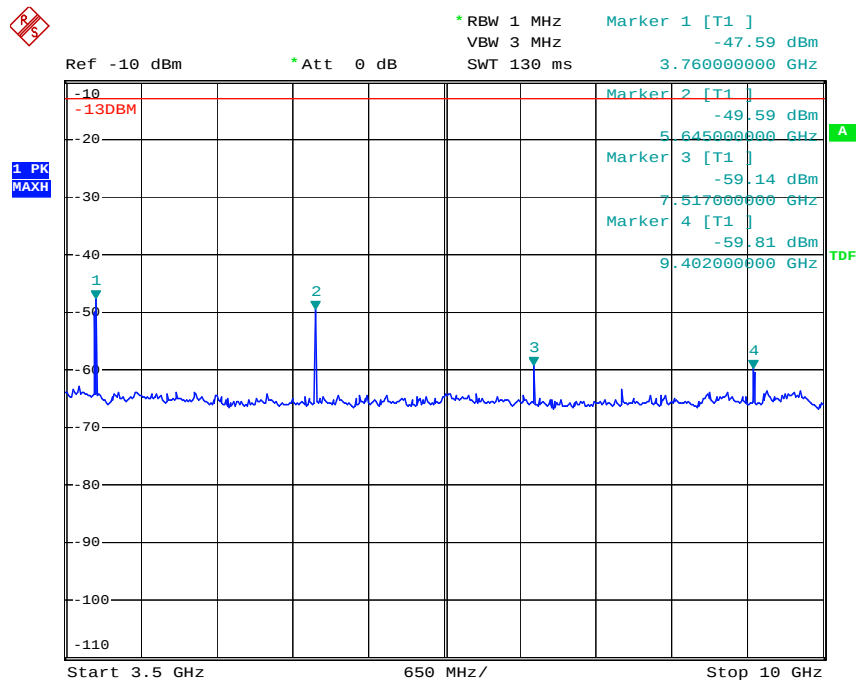

Date: 10.JUL.2007 10:56:42

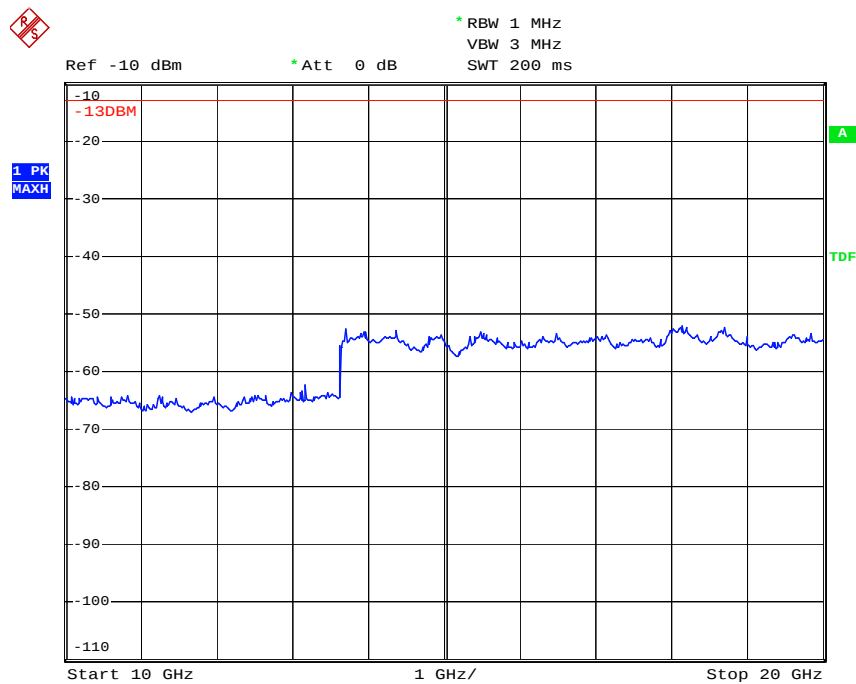

Date: 10.JUL.2007 10:57:39

Test Results (GPRS)**Bottom Channel (GPRS 512ch, Nominal Freq.:1850.2MHz)**

Measurement Frequency (MHz)	Measurement Bandwidth (MHz)	Emission Level (dBm)	Limit (dBm)	Result Pass/Fail
3700.4	1	-48.2	-13.0	Pass
5550.6	1	-46.2	-13.0	Pass
7400.8	1	-61.5	-13.0	Pass
9251.0	1	-59.2	-13.0	Pass
11101.2	1	-60.6	-13.0	Pass
12951.4	1	-	-13.0	Pass
14801.6	1	-	-13.0	Pass
16651.8	1	-	-13.0	Pass
18502.0	1	-	-13.0	Pass
others		-	-13.0	Pass


Middle Channel (GPRS 661ch, Nominal Freq.:1880.0MHz)

Measurement Frequency (MHz)	Measurement Bandwidth (MHz)	Emission Level (dBm)	Limit (dBm)	Result Pass/Fail
3760.0	1	-47.2	-13.0	Pass
5640.0	1	-49.3	-13.0	Pass
7520.0	1	-59.2	-13.0	Pass
9400.0	1	-60.2	-13.0	Pass
11280.0	1	-63.9	-13.0	Pass
13160.0	1	-62.3	-13.0	Pass
15040.0	1	-	-13.0	Pass
16920.0	1	-	-13.0	Pass
18800.0	1	-	-13.0	Pass
others		-	-13.0	Pass


Top Channel (GPRS 810ch, Nominal Freq.:1909.8MHz)

Measurement Frequency (MHz)	Measurement Bandwidth (MHz)	Emission Level (dBm)	Limit (dBm)	Result Pass/Fail
3819.6	1	-47.1	-13.0	Pass
5729.4	1	-49.3	-13.0	Pass
7639.2	1	-56.3	-13.0	Pass
9549.0	1	-56.9	-13.0	Pass
11458.8	1	-	-13.0	Pass
13368.6	1	-	-13.0	Pass
15278.4	1	-	-13.0	Pass
17188.2	1	-	-13.0	Pass
19098.0	1	-	-13.0	Pass
others		-	-13.0	Pass


Graphical Data (GPRS : 661ch)

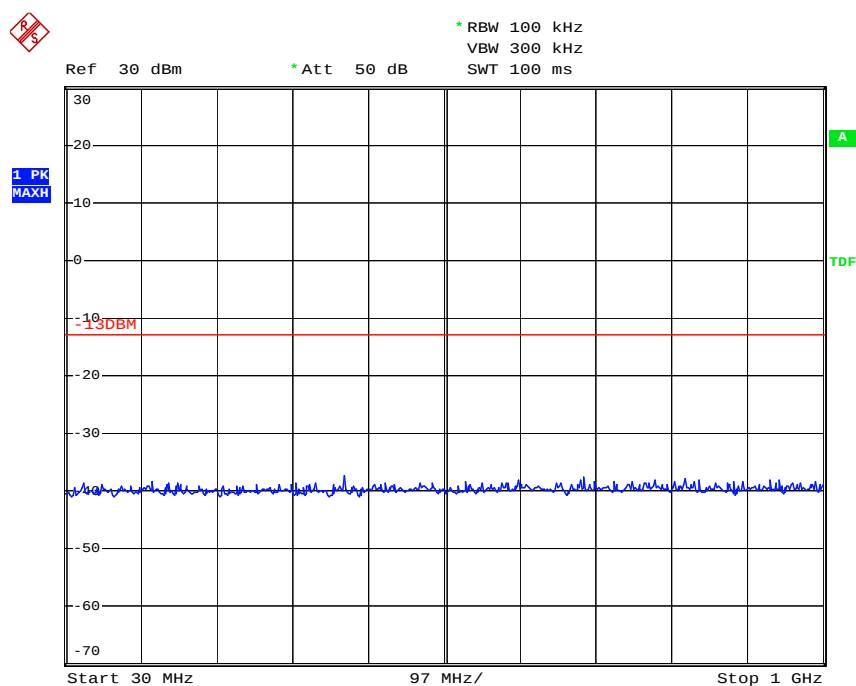


Date: 10.JUL.2007 12:35:19

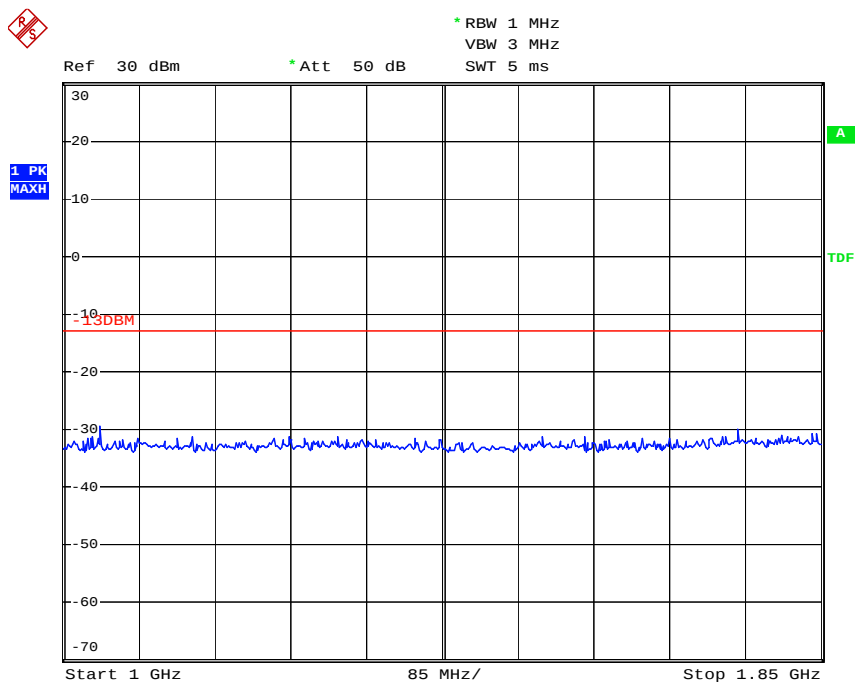


Date: 10.JUL.2007 12:35:56

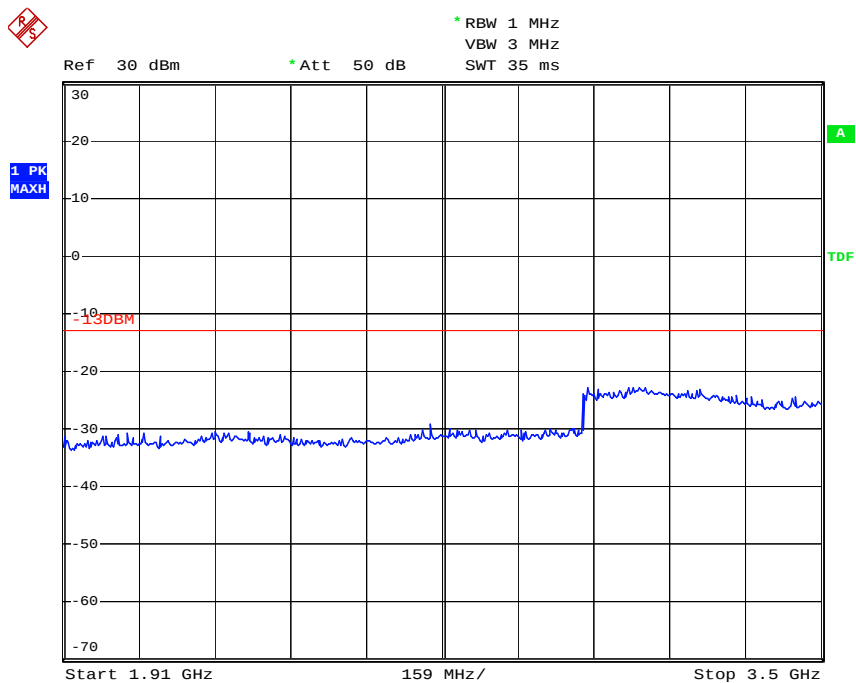

Date: 10.JUL.2007 12:36:23

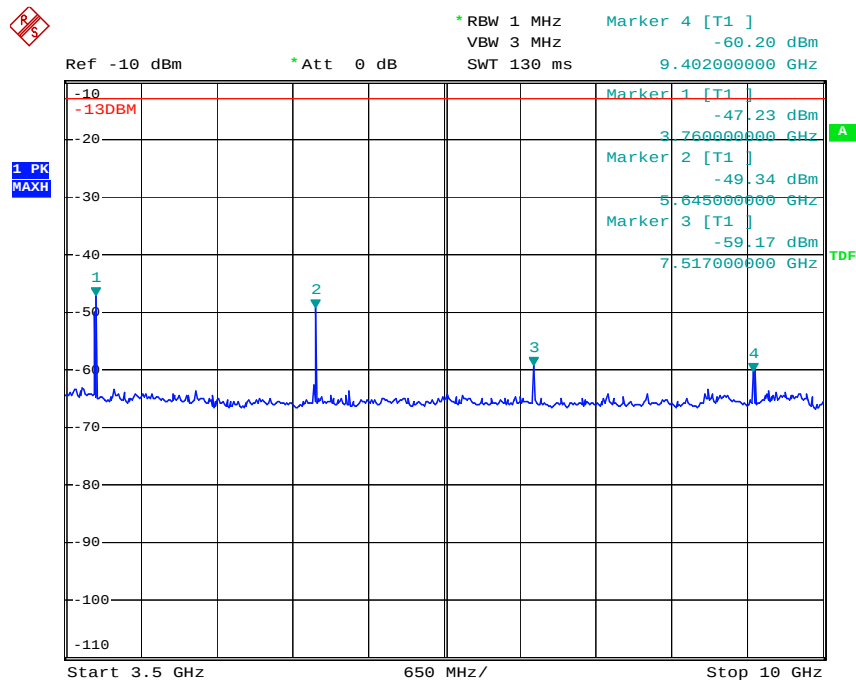

Date: 10.JUL.2007 10:47:14

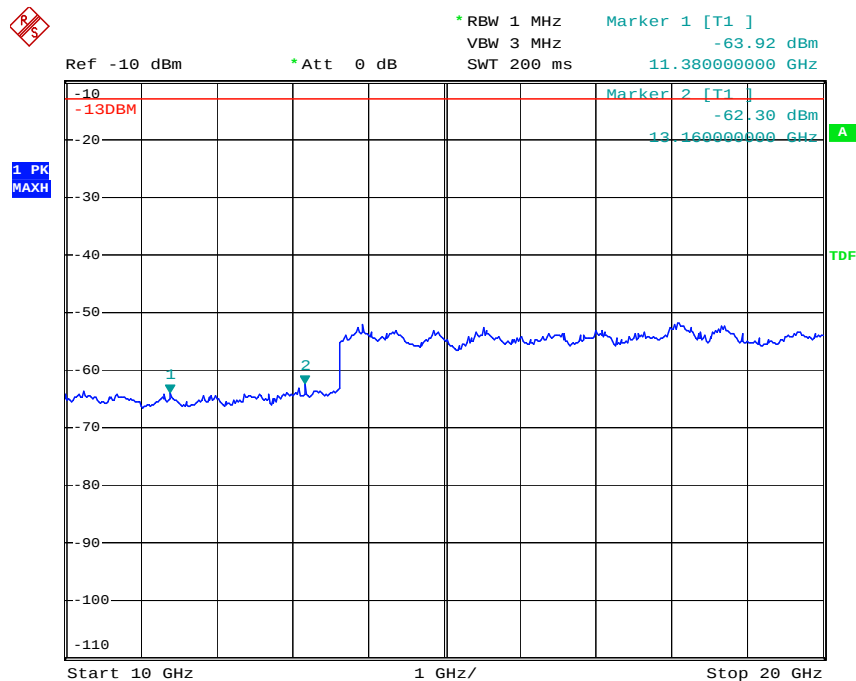

Date: 10.JUL.2007 10:46:13

Test Equipment Used

Equipment name	RFT ID No.
Spectrum Analyzer	SA06
RF tester	RC02

Final Result

The EUT met the requirements of the standard for this test.

2.1.7 Transmitter Out of Band Spurious Emissions (Radiated)

Reference Standard

FCC : Part24.238

IC : RSS133 Issue3 Sec6.5

Test Conditions

Date: 2007/07/15

Ambient Temperature: 25degC

Relative humidity: 68%

Test Voltage: 3.7V

Test Method

Substitution method is used for this test.

a) EUT is set on non-conducting turntable and the output power is set to the maximum level.

The height of turntable is 100cm.

b) As a receive antenna, Horn antenna is used for high frequency range (above 1GHz), and Bilogical antenna is used for low frequency range (30MHz to 1GHz).

c) The maximum level of each spurious emission is measured by a spectrum analyzer(SA) in below conditions.

Turntable is rotated 360 degrees.

The height of receive antenna is changed from 1m to 4m.

Receive antenna polarization is set to vertical and horizontal.

EUT was placed at three different orientations (X, Y and Z axis) in order to find the worst orientation.

This emission level is recorded.

d) Reference antenna is replaced with EUT, and connected with signal generator(SG).


SG output power is adjusted to get same level as the recorded maximum radiated EUT power by SA.

e) Radiated output power (Pout) is calculated with adjusted SG output (Psg) [dBm], reference antenna gain (Gref) [dBi] and cable loss between SG and reference antenna (Lcab) [dB].


$$P_{out} [dBm \text{ e.r.p}] = P_{sg} - (G_{ref} - 2.15) + L_{cab}$$

Test Setup

[Measurement]

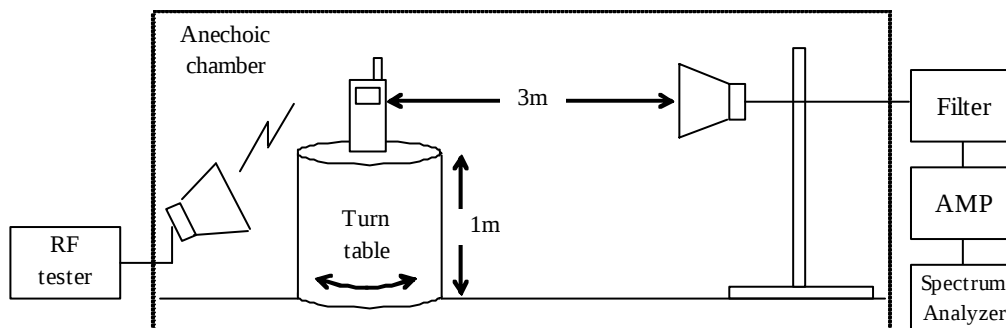

[Substitution]

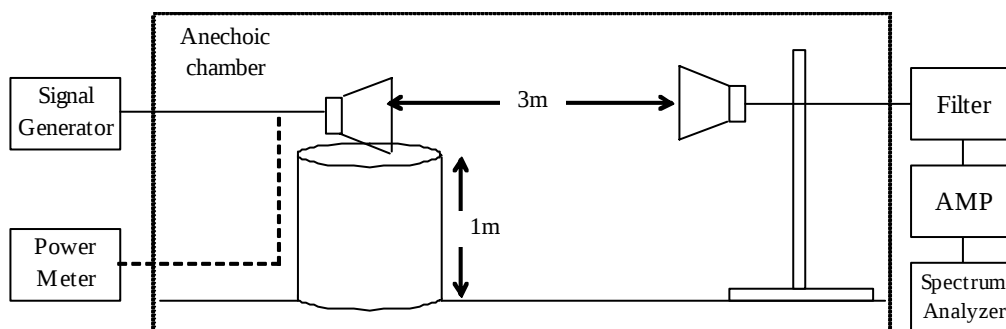

Test Results**Voice Call****Bottom Channel (512ch, Nominal Freq.:1850.2MHz)**

Measurement Frequency (MHz)	Measurement Bandwidth (MHz)	Emission Level(dBm)		Limit (dBm)	Result Pass/Fail
		Horizontal	Vertical		
3700.4	1	-26.7	-26.2	-13.0	Pass
5550.6	1	-19.4	-23.4	-13.0	Pass
7400.8	1	-32.9	-32.6	-13.0	Pass
9251.0	1	-31.7	-32.5	-13.0	Pass
11101.2	1	-37.0	-37.8	-13.0	Pass
12951.4	1	-32.6	-32.7	-13.0	Pass
14801.6	1	< -35.2	< -35.2	-13.0	Pass
16651.8	1	< -34.7	< -34.7	-13.0	Pass
18502.0	1	< -31.2	< -31.2	-13.0	Pass
others		-	-	-13.0	Pass

Middle Channel (661ch, Nominal Freq.:1880.0MHz)

Measurement Frequency (MHz)	Measurement Bandwidth (MHz)	Emission Level(dBm)		Limit (dBm)	Result Pass/Fail
		Horizontal	Vertical		
3760.0	1	-27.5	-24.6	-13.0	Pass
5640.0	1	-27.1	-29.4	-13.0	Pass
7520.0	1	-31.4	-31.1	-13.0	Pass
9400.0	1	-29.8	-30.5	-13.0	Pass
11280.0	1	-33.5	-36.3	-13.0	Pass
13160.0	1	< -35.4	< -35.4	-13.0	Pass
15040.0	1	< -34.6	< -34.6	-13.0	Pass
16920.0	1	< -31.8	< -31.8	-13.0	Pass
18800.0	1	< -26.7	< -26.7	-13.0	Pass
others		-	-	-13.0	Pass

Top Channel (810ch, Nominal Freq.:1909.8MHz)

Measurement Frequency (MHz)	Measurement Bandwidth (MHz)	Emission Level(dBm)		Limit (dBm)	Result Pass/Fail
		Horizontal	Vertical		
3819.6	1	-28.4	-27.8	-13.0	Pass
5729.4	1	-30.2	-30.5	-13.0	Pass
7639.2	1	-31.7	-31.2	-13.0	Pass
9549.0	1	-27.7	-29.5	-13.0	Pass
11458.8	1	-34.2	-33.5	-13.0	Pass
13368.6	1	< -35.4	< -34.2	-13.0	Pass
15278.4	1	< -34.6	< -34.5	-13.0	Pass
17188.2	1	< -31.8	< -31.4	-13.0	Pass
19098.0	1	< -26.7	< -26.2	-13.0	Pass
others		-	-	-13.0	Pass

GPRS

Bottom Channel (512ch, Nominal Freq.:1850.2MHz)

Measurement Frequency (MHz)	Measurement Bandwidth (MHz)	Emission Level(dBm)		Limit (dBm)	Result Pass/Fail
		Horizontal	Vertical		
3700.4	1	-27.2	-26.7	-13.0	Pass
5550.6	1	-20.3	-24.0	-13.0	Pass
7400.8	1	-33.1	-32.5	-13.0	Pass
9251.0	1	-31.5	-32.2	-13.0	Pass
11101.2	1	-36.5	-37.4	-13.0	Pass
12951.4	1	-31.6	-32.9	-13.0	Pass
14801.6	1	< -35.2	< -35.2	-13.0	Pass
16651.8	1	< -34.7	< -34.7	-13.0	Pass
18502.0	1	< -31.2	< -31.2	-13.0	Pass
others		-	-	-13.0	Pass

Middle Channel (661ch, Nominal Freq.:1880.0MHz)

Measurement Frequency (MHz)	Measurement Bandwidth (MHz)	Emission Level(dBm)		Limit (dBm)	Result Pass/Fail
		Horizontal	Vertical		
3760.0	1	-27.0	-25.6	-13.0	Pass
5640.0	1	-28.1	-29.5	-13.0	Pass
7520.0	1	-31.2	-31.6	-13.0	Pass
9400.0	1	-29.2	-30.0	-13.0	Pass
11280.0	1	-32.5	-35.3	-13.0	Pass
13160.0	1	< -35.4	< -35.4	-13.0	Pass
15040.0	1	< -34.6	< -34.6	-13.0	Pass
16920.0	1	< -31.8	< -31.8	-13.0	Pass
18800.0	1	< -26.7	< -26.7	-13.0	Pass
others		-	-	-13.0	Pass

Top Channel (810ch, Nominal Freq.:1909.8MHz)

Measurement Frequency (MHz)	Measurement Bandwidth (MHz)	Emission Level(dBm)		Limit (dBm)	Result Pass/Fail
		Horizontal	Vertical		
3819.6	1	-28.1	-28.4	-13.0	Pass
5729.4	1	-30.0	-30.7	-13.0	Pass
7639.2	1	-30.7	-31.4	-13.0	Pass
9549.0	1	-28.7	-28.5	-13.0	Pass
11458.8	1	-33.0	-32.5	-13.0	Pass
13368.6	1	< -35.4	< -34.2	-13.0	Pass
15278.4	1	< -34.6	< -34.5	-13.0	Pass
17188.2	1	< -31.8	< -31.4	-13.0	Pass
19098.0	1	< -26.7	< -26.2	-13.0	Pass
others		-	-	-13.0	Pass

Test Equipment Used

Equipment name	RFT ID No.
Spectrum Analyzer	SA06
Receive Antenna	DH01
Reference Antenna	DH02
Signal Generator	SG05
Power Meter	PM01
RF tester	RC02

Final Result

The EUT met the requirements of the standard for this test.

2.1.8 Band Edge Emissions

Reference Standard

FCC : Part24.238

IC : RSS133 Issue3 Sec6.5

Test Conditions

Date: 2007/07/10

Ambient Temperature: 24degC


Relative humidity: 67%

Test Voltage: 3.7V

Test Method

- EUT is connected to RF tester with Max transmitter power level.
- Lower band edge level is measured in bottom channel transmission.
- Higher band edge level is measured in top channel transmission.
- 1% of band width is used for resolution band width for spectrum analyzer.

Test Setup

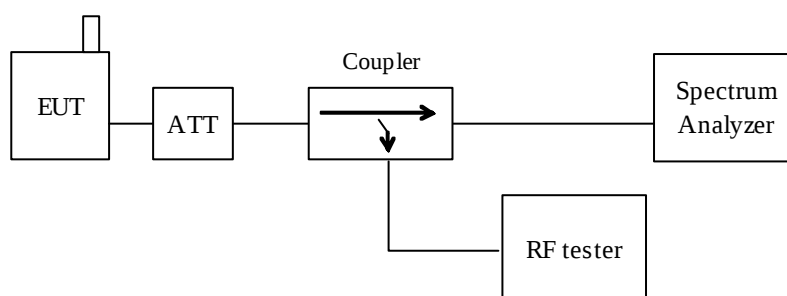

Test Results (Voice Call)


Bottom Band Edge

Measured Frequency (MHz)	Peak Level (dBm)	Limit (dBm)	Result
1850.0	-16.4	-13	Passed

Top Band Edge


Measured Frequency (MHz)	Peak Level	Limit	Result
1910.0	-16.7	-13	Passed

Graphical Data (Voice Call)

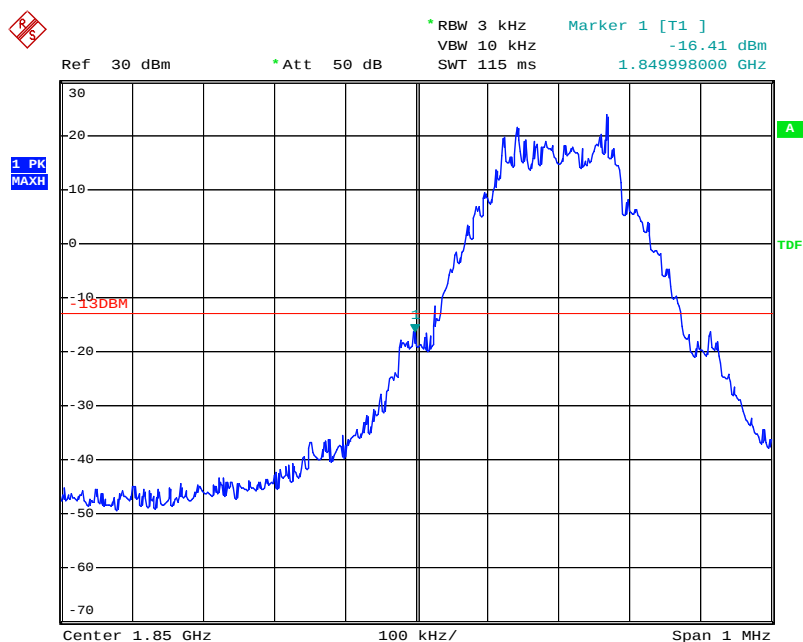

Date: 10.JUL.2007 12:42:48

Bottom band edge

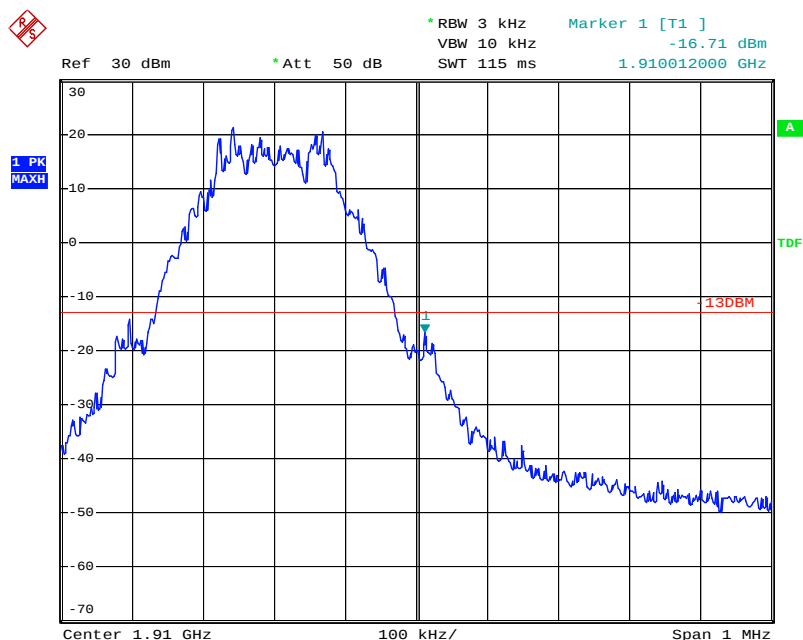

Date: 10.JUL.2007 12:44:01

Top band edge

Test Results (GPRS)


Bottom Band Edge

Measured Frequency (MHz)	Peak Level (dBm)	Limit (dBm)	Result
1850.0	-16.2	-13	Passed

Top Band Edge


Measured Frequency (MHz)	Peak Level	Limit	Result
1910.0	-16.5	-13	Passed

Graphical Data (GPRS)

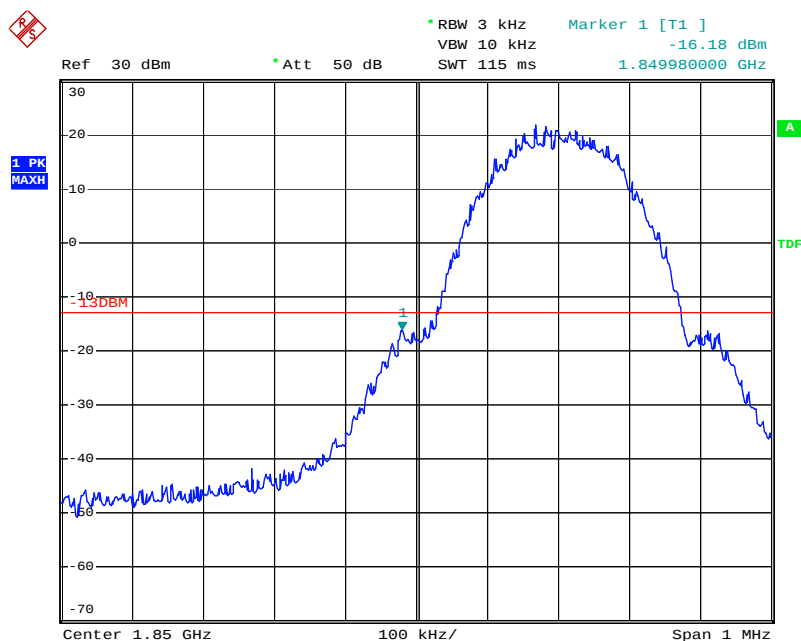

Date: 10.JUL.2007 12:41:29

Bottom band edge

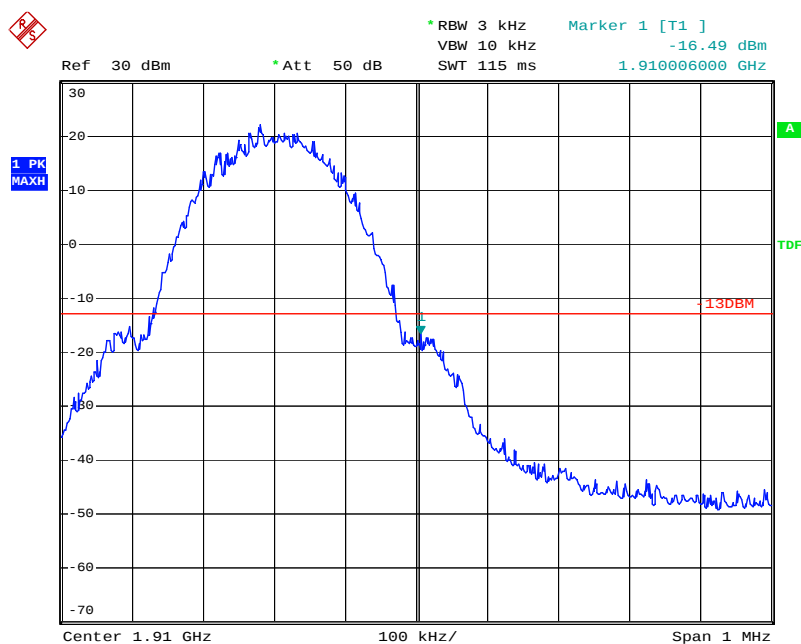

Date: 10.JUL.2007 12:40:23

Top band edge

Test Equipment Used

Equipment name	RFT ID No.
Spectrum Analyzer	SA06
RF tester	RC02

Final Result

The EUT met the requirements of the standard for this test.

2.1.9 Transmitter AC Line Conducted Emission requirement

Reference Standard

FCC : Part15.207

IC : RSS-Gen Issue1 Sec7.2

Test Conditions

Date: 2007/07/14

Ambient Temperature: 26degC


Relative humidity: 70%

Test Voltage: 3.7V

Test Method

- EUT is connected to RF tester with Max transmitter power level.
- AC power is supplied to AC charger through LISN.
- AC charger is connected to EUT.
- AC Line conducted emission is measured by EMI receiver.
Both Live/Neutral is measured emission level.

Test Setup

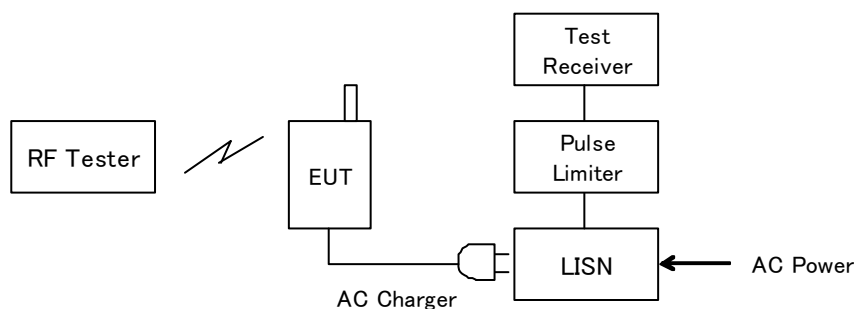


Limit

Frequency (MHz)	Limit QP (dBuV)	Limit AV (dBuV)
0.15 - 0.5	66 - 56	56 - 46
0.5 - 5	56	46
5 - 30	60	50

Test Results

Frequency (MHz)	Line (Live/Neutral)	QP Level (dBuV)	AV Level (dBuV)	QP Limit (dBuV)	AV Limit (dBuV)	Result
0.932	Neutral	42.6	25.7	56	46	Passed
1.144	Neutral	41.9	24.5	56	46	Passed
1.271	Neutral	46.3	28.0	56	46	Passed
1.383	Live	44.0	25.0	56	46	Passed
1.596	Live	44.0	28.0	56	46	Passed
1.696	Neutral	48.6	30.5	56	46	Passed
1.859	Live	48.4	30.2	56	46	Passed
1.870	Neutral	46.9	32.2	56	46	Passed
2.199	Live	40.5	23.8	56	46	Passed
3.260	Live	39.1	20.3	56	46	Passed
3.488	Neutral	34.1	18.4	56	46	Passed
3.585	Live	41.6	21.8	56	46	Passed

Graphical Data

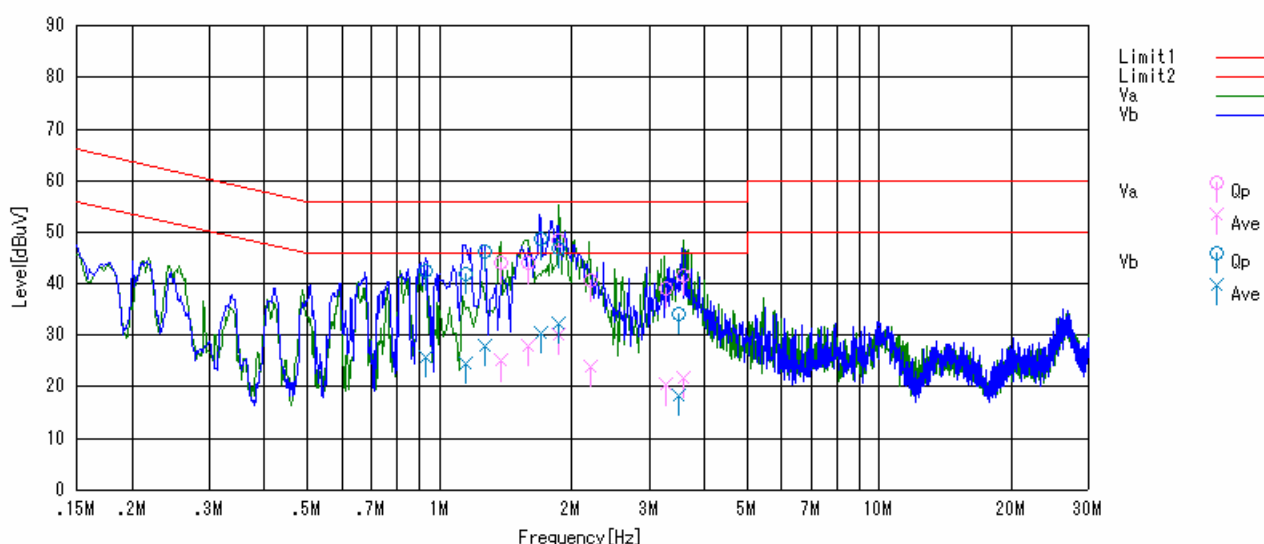

Test Equipment Used

Equipment name	RFT ID No.
EMI Receiver	TR04
LISN	LN05
RF tester	RC02

Final Result

The EUT met the requirements of the standard for this test

2.2 Receiver requirement

2.2.1 Receiver Spurious Emissions (Radiated)

Reference Standard

FCC : Part15.109

IC : RSS133 Issue3 Sec6.7

Test Conditions

Date: 2007/07/15

Ambient Temperature: 25degC


Relative humidity: 68%

Test Voltage: 3.7V

Test Method

- EUT is connected to RF tester with idle mode.
- Radiated receiver spurious emission is received by receive antenna.
- Turn table is rotated 360deg.
- Maximum level of each spurious is measured by spectrum analyzer.
- RBW of spectrum analyzer is set to 100kHz for 30 - 1000MHz, 1MHz for above 1GHz.
- Level is measured with QP detect for 30 - 1000MHz, Average detect for above 1GHz.
- EUT was placed at three different orientations (X, Y and Z axis) in order to find the worst orientation.

Test Setup

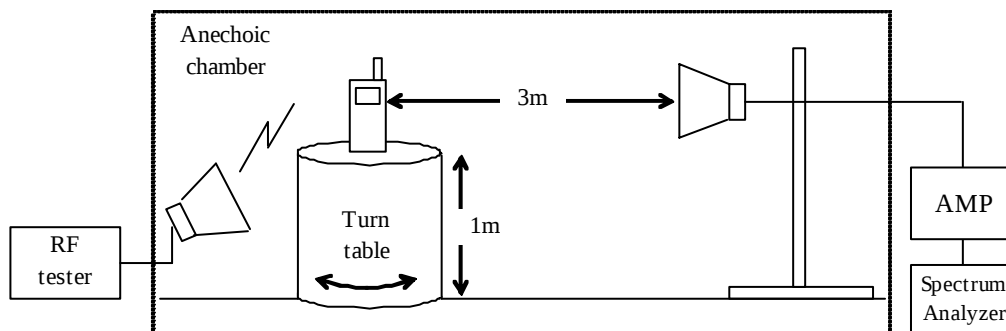

Limit


Frequency (MHz)	Distance (m)	Field strength (uV/m)	Field strength (dBuV/m)
30 - 88	3	100	40
88 - 216	3	150	43.5
216 - 960	3	200	46
above 960	3	500	54

Test Results


Frequency (MHz)	Field strength (dBuV/m)	Limit (dBuV/m)	Result
No peak emission was found.			Passed

The EUT could not achieved receiving mode only therefore the measurement was carried out under receiving ready condition of the EUT. The EUT is registered to the RF tester.

Graphical Data

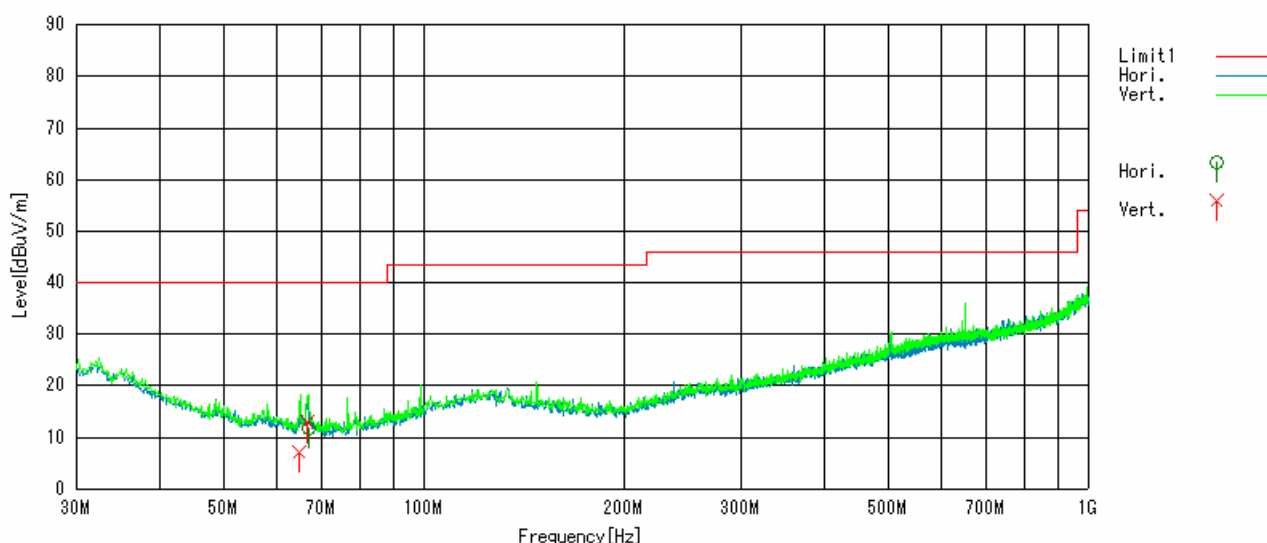

Note: Spurious around 650MHz is radio wave of TV broadcast. This is not emission from EUT.

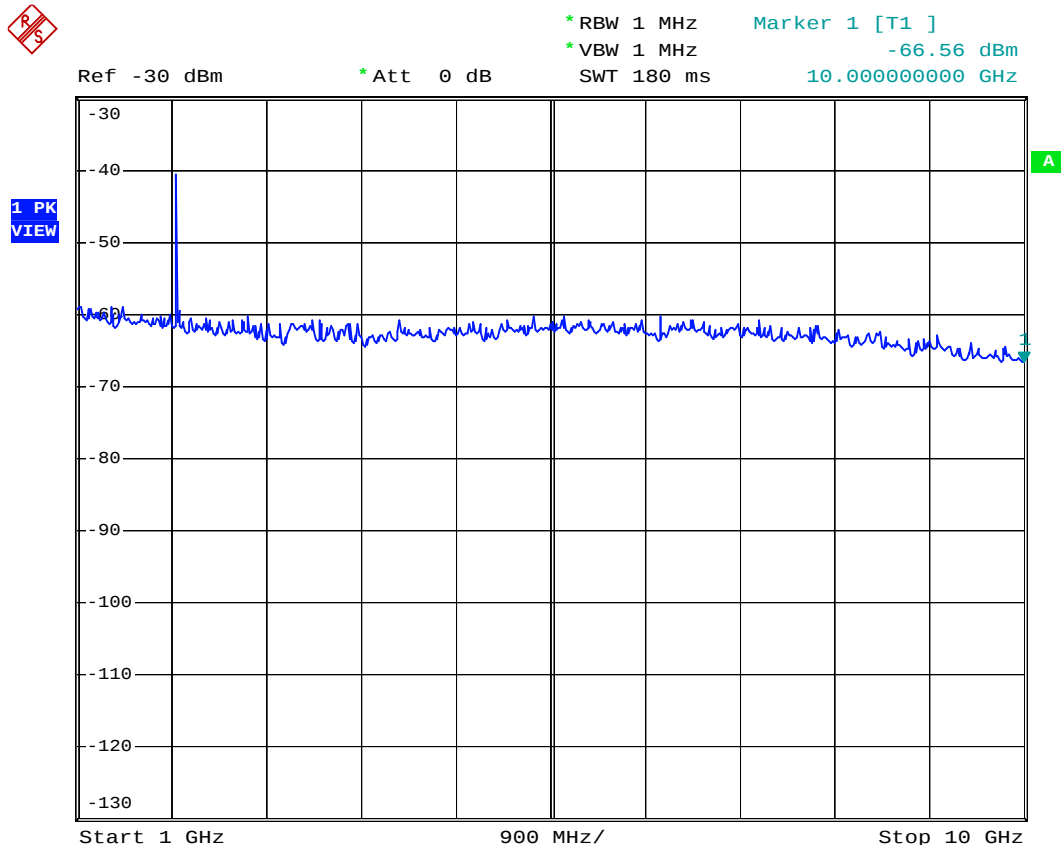

Date: 15.JUL.2007 11:55:44

Note: Spurious around 2GHz is Downlink power from GSM tester to set EUT to receiver mode.
This is not emission from EUT.

Test Equipment Used

Equipment name	RFT ID No.
Spectrum Analyzer	SA06
Receive Antenna	DH01
Pre-AMP	PR03
RF tester	RC02

Final Result

The EUT met the requirements of the standard for this test.

2.2.2 Receiver AC Line Conducted Emission requirement

Reference Standard

FCC : Part15.107

IC : RSS-Gen Issue1 Sec7.2

Test Conditions

Date: 2007/07/14

Ambient Temperature: 26degC


Relative humidity: 70%

Test Voltage: 3.7V

Test Method

- EUT is connected to RF tester with idle mode.
- AC power is supplied to AC charger through LISN.
- AC charger is connected to EUT.
- AC Line conducted emission is measured by EMI receiver.
Both Live/Neutral is measured emission level.

Test Setup

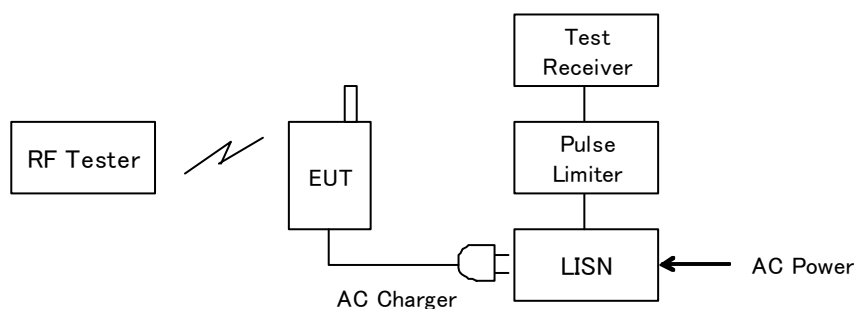

Limit


Frequency (MHz)	Limit QP (dBuV)	Limit AV (dBuV)
0.15 - 0.5	66 - 56	56 - 46
0.5 - 5	56	46
5 - 30	60	50

Test Results

The EUT could not achieved receiving mode only therefore the measurement was carried out under receiving ready condition of the EUT. The EUT is registered to the RF tester.

Frequency (MHz)	Line (Live/Neutral)	QP Level (dBuV)	AV Level (dBuV)	QP Limit (dBuV)	AV Limit (dBuV)	Result
0.813	Live	34.1	17.8	56	46	Passed
0.934	Neutral	39.8	24.5	56	46	Passed
1.354	Neutral	40.4	27.2	56	46	Passed
1.555	Neutral	41.5	29.3	56	46	Passed
1.700	Live	45.3	30.5	56	46	Passed
1.792	Live	47.4	31.5	56	46	Passed
1.803	Neutral	45.5	33.7	56	46	Passed
2.023	Neutral	40.4	29.6	56	46	Passed
2.036	Live	43.7	28.1	56	46	Passed
3.516	Neutral	33.6	23.5	56	46	Passed
3.586	Live	37.1	23.8	56	46	Passed
3.973	Live	30.2	18.1	56	46	Passed

Graphical Data

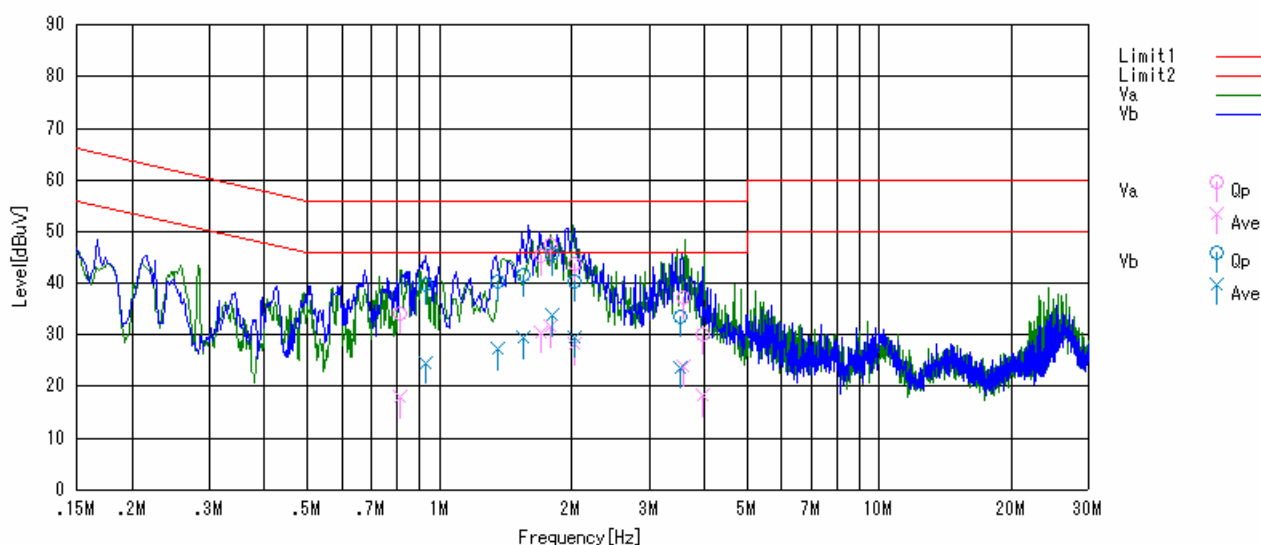

Test Equipment Used

Equipment name	RFT ID No.
EMI Receiver	TR04
LISN	LN05
RF tester	RC02

Final Result

The EUT met the requirements of the standard for this test

4 List of utilized test equipment/ calibration

RFT ID No.	Kind of Equipment and Precision	Manufacturer	Model No.	Serial Number	Calibration Date	Calibrated until
AC01	Anechoic Chamber	Japan Shiled Closure	203397C		2007/5/8	2008/5/6
BA03	Biological Antenna	CAHSE	CBL6111	1309	2007/5/14	2008/5/12
BI01	Biconical Antenna	SCHWARZBECK	VHA9103	2359	2007/5/21	2008/5/19
BRF1	Band Reject Filter (WCDMA2000)		BRF2000-06	VT0001	2007/4/24	2008/4/22
BRF2	Band Reject Filter (Bluetooth)	MICRO TRONICS	BRM50701	024	2007/4/26	2008/4/24
CL11	Antenna Cable	RFT	-	-	2007/6/12	2008/6/10
CL21	RF Cable 0.5m	SUCOFLEX	SF104PE	48772/4PE	2007/5/25	2008/5/23
CL22	RF Cable 2.0m	SUCOFLEX	SF104	274755/4	2007/5/25	2008/5/23
CL23	RF Cable 0.5m	SUCOFLEX	SF104PE	48773/4PE	2007/6/8	2008/6/6
CL24	RF Cable 5.0m	SUCOFLEX	SF104PE	48775/4PE	2007/6/8	2008/6/6
DC01	Directional Coupler	KRYTAR	1850	77202	2007/4/24	2008/4/22
HC01	Harmonic Current Analysis system	NF	ES4153	9075640	2007/3/1	2008/2/28
HPF1	High Pass Filter (3500MHz)	TOKIMEC	TF323DCA	603	2007/6/8	2008/6/6
HPF2	High Pass Filter (900MHz)	M-City	HPF0900-01	RF0003-01	2007/6/1	2008/5/30
LA01	Logperiodic Antenna	SCHWARZBECK	USLP 9143	338	2007/5/21	2008/5/19
LN02	LISN (3ph 32A)	SCHWARZBECK	NSLK8128	8128-212	2007/2/2	2008/2/1
LN05	LISN	Kyoritsu	KNW-407	8-1773-2	2007/5/14	2008/5/12
LN06	LISN	Kyoritsu	KNW-407	8-1773-3	2007/5/14	2008/5/12
LN08	LISN (5uF)	SCHWARZBECK	NNBM8125	8126A-9262	2006/9/4	2007/9/3
LP01	Loop Antenna	EMCO	6502	3436	2007/6/8	2008/6/6
MA01	Active Monopole Antenna	SCHWARZBECK	VAMP9243	9438	2007/2/8	2008/2/7
PL01	Pulse Limiter	PMM	PL-01	0000J10109	2007/1/30	2008/1/29
PR03	Pre. Amplifier	Anritsu	HM648A	M41984	2007/5/14	2008/5/12
PR04	Pre. Amplifier (1-26G)	RFT	LNP126	060208-01	2007/6/8	2008/6/6
PR08	Pre. Amplifier	Sonoma Instrument	315	263504	2007/2/23	2008/2/22
SA06	Spectrum Analyzer (F/W: 3.60 SP1)	Rohde & Schwarz	FSP40	100071	2006/11/13	2007/11/12
SH01	Standard Horn Antenna (18-26G)	A.H. Systems	SAS-572	208	2006/5/3	2008/5/1
SH02	Standard Horn Antenna (18-26G)	A.H. Systems	SAS-572	209	2006/5/3	2008/5/1
SH03	Standard Horn Antenna (26-40G)	A.H. Systems	SAS-573	150	2006/5/3	2008/5/1
SH04	Standard Horn Antenna (26-40G)	A.H. Systems	SAS-573	151	2006/5/3	2008/5/1
TL01	Transient Limiter	Agilent Technologies	11947A	3107A04000	2006/11/6	2007/11/5
TR04	Test Receiver (F/W : 3.82 SP1)	Rohde & Schwarz	ESCI	100447	2006/9/27	2007/9/26

RFT ID No.	Kind of Equipment and Precision	Manufacturer	Model No.	Serial Number	Calibration Date	Calibrated until
AT05	Attenuator 3dB 50W	Weinschel	45-3-33	LC530	2007/2/5	2008/2/4
AT12	Attenuator 6dB 30W	FUJISOKU	FAT-530A	63454	2007/2/5	2008/2/4
AT14	Attenuator	JFW	50HF-003N	—	2007/4/25	2008/4/23
AT15	Attenuator	JFW	50HF-006N	—	2007/4/25	2008/4/23
AT20	Attenuator	JFW	50HF-010N	—	2007/3/16	2008/3/14
AT21	Attenuator 6dB 5W 18GHz	Weinschel	WA2-6-34	A1020	2007/3/9	2008/3/7
AT22	Attenuator 6dB 5W 18GHz	Weinschel	WA2-6-34	A1021	2007/3/9	2008/3/7
AT23	Attenuator 6dB 5W 18GHz	Weinschel	WA2-6-34	A1022	2007/3/9	2008/3/7
AT24	Attenuator 6dB 5W 18GHz	Weinschel	WA2-6-34	A1023	2007/3/9	2008/3/7
AT25	Attenuator 6dB 5W 18GHz	Weinschel	WA2-6-34	A1024	2007/3/9	2008/3/7
AT26	Attenuator 6dB 5W 18GHz	Weinschel	WA2-6-34	A1025	2007/3/9	2008/3/7
AT27	Attenuator 10dB 5W 18GHz	Weinschel	WA2-10-34	A1026	2007/3/9	2008/3/7
AT29	Attenuator 10dB 5W 18GHz	Weinschel	WA2-10-34	A1028	2007/3/9	2008/3/7
AT30	Attenuator 20dB 5W 18GHz	Weinschel	WA2-20-34	A1029	2007/3/9	2008/3/7
AT31	Attenuator 20dB 5W 18GHz	Weinschel	WA2-20-34	A1030	2007/3/9	2008/3/7
AT32	Attenuator 20dB 5W 18GHz	Weinschel	WA2-20-34	A1031	2007/3/9	2008/3/7
AT33	Attenuator 10dB 26GHz	INMET	26A-10	FT2075	2007/6/1	2008/5/30
DH01	DRG Horn Antenna	A.H. Systems	SAS-571	785	2006/2/6	2008/2/5
DH02	DRG Horn Antenna	A.H. Systems	SAS-200/571	239	2007/4/20	2008/4/18
PM01	Power Meter	Rohde & Schwarz	NRVS	100055	2007/1/29	2008/1/28
PU01	Power Meter Insertion Unit	Rohde & Schwarz	URV5-Z4	100055	2007/1/29	2008/1/28
RC02	Radio communication tester (F/W : V4.10)	Rohde & Schwarz	CMU200	105097	2006/9/14	2007/9/13
RC03	Radio communication tester (F/W : 10.20 #005)	Anritsu	MT8820B	6200636657	2007/5/24	2008/5/22
SG01	Signal Generator	Rohde & Schwarz	SML03	100325	2007/2/2	2008/2/1
SG05	Signal Generator	Rohde & Schwarz	SMR20	100905	2007/6/12	2008/6/10
SG07	Signal Generator	Agilent Technologies	N5181A	MY47070251	2007/5/11	2008/5/9
TA02	Dummy Load	Mini-Circuits	DL-30N	-	2007/2/23	2008/2/22
TA03	Dummy Load	Mini-Circuits	DL-30N	-	2007/2/23	2008/2/22
TA04	Dummy Load (4GHz, 50W)	Weinschel	WA1423-4	A462	2007/3/9	2008/3/7
TA05	Dummy Load (4GHz, 50W)	Weinschel	WA1423-4	A463	2007/3/9	2008/3/7
PM02	Power Meter	Anritsu	ML2487A	6K00004724	2007/7/11	2008/7/10
PU02	Dummy Load (4GHz, 50W)	Weinschel	WA1423-4	A463	2007/7/11	2008/7/10
TC01	Temperature Chamber	ESPEC	SH-641	92000964	2007/4/23	2008/4/21

RFT ID No.	Kind of Equipment and Precision	Manufacturer	Model No.	Serial Number	Calibration Date	Calibrated until
AC51	AC power supply	TAKASAGO	AA2000D	506960030014	not applicable	not applicable
AC52	AC power supply	KIKUSUI	PCR6000W		not applicable	not applicable
AF51	Active Filter	NF corp.	DV-04	434339	not applicable	not applicable
BC51	Burst Clamp	SCHAFFNER	CDN8015	21369	not applicable	not applicable
CG51	Comb Generator	tsj	TG-C2	TGC2-0009	not applicable	not applicable
CG52	Comb Generator	tsj	TG-R2	TGR2-0009	not applicable	not applicable
CJ51	CDN Calibration JIG 1	RFT	-	-	not applicable	not applicable
CJ52	CDN Calibration JIG 2	RFT	-	-	not applicable	not applicable
CJ53	EM clamp Calibration JIG 1	RFT	-	-	not applicable	not applicable
CJ54	EM clamp Calibration JIG 2	RFT	-	-	not applicable	not applicable
DC51	DC power supply	KIKUSUI	PMC18-3A	DF002941	not applicable	not applicable
DC52	DC power supply	KIKUSUI			not applicable	not applicable
LP51	Test Loop Antenna	Panasonic	VQ-085C	0O2861A122	not applicable	not applicable
MP51	Microphone	G.R.A.S	26AK + 12AK	50941 + 58712	not applicable	not applicable
MS51	Mouth Simulator	G.R.A.S	44AA	52222	not applicable	not applicable
TS51	TEMSEL	KYORITSU	KTC-5055	8S-688-6	not applicable	not applicable

The measuring equipment, which was utilized in performing the tests documented herein, has been calibrated in accordance with the manufacturer's recommendations for utilizing calibration equipment, which is traceable to recognized national standards.