

CFR 47 FCC Part 15.231

TEST REPORT

Product : **Transmitter**

Trade Name : N/A

Model Number : CA-RF69

FCC ID : ELVMTIB

Prepared for

Nutek Corporation

NO.167, Lane 235, Bauchiau Rd., Shindian City, Taipei County
23145, Taiwan

TEL. : +886 2 2918 9478

FAX. : +886 2 2917 9069

Prepared by

Interocean EMC Technology Corp.

244 No.5-2, Lin 1, Tin-Fu Tsun, Lin-Kou Hsiang,
Taipei County, Taiwan, R.O.C.

TEL.: +886 2 2600 6861

FAX.: +886 2 2600 6859

Remark:

The test report consists of **26** pages in total. It shall not be reproduced except in full, without the written approval of IETC. This document may be altered or revised by IETC only, and shall be noted in the revision section of the document.

The test results in the report only to the tested sample.

Statement of Compliance

Applicant: Nutek Corporation

Manufacturer: Nutek Corporation

Product: Transmitter

Model No.: CA-RF69

Tested Power Supply: 3Vdc Battery

Date of Final Test: May 06, 2009

Configuration of Measurements and Standards Used :

FCC Rules and Regulations Part 15 Subpart C

1. The result of the testing report relate only to the item tested.
2. The testing report shall not be reproduced expect in full, without the written approval of IETC.

Report Issued: 2009/05/11

Project Engineer: Anya Lee
Anya Lee

Approved: Jerry Liu
Jerry Liu

Table of Contents

| | | |
|----------|--|-----------|
| 1 | Summary of Measurement | 4 |
| 2 | General Information | 5 |
| 2.1 | Description of Equipment Under Test | 5 |
| 2.2 | Details of tested peripheral equipment | 6 |
| 2.3 | Test Facility | 7 |
| 3 | Test specifications | 8 |
| 3.1 | Test standard | 8 |
| 3.2 | Operation mode | 8 |
| 3.3 | Test Equipment | 9 |
| 4 | Radiated emission test | 10 |
| 4.1 | Limits | 10 |
| 4.2 | Calculation of Average Factor | 11 |
| 4.3 | Configuration of Measurement | 17 |
| 4.4 | Test Procedure | 17 |
| 4.5 | Test Result | 17 |
| 5 | Emission bandwidth | 20 |
| 5.1 | Limits | 20 |
| 5.2 | Test Result | 20 |
| 6 | Photographs of Test | 22 |
| 6.1 | Radiated Emission Measurement | 22 |
| 7 | Photographs of EUT | 23 |

1 Summary of Measurement

| Report Clause | Test Parameter | Reference Document CFR47 Part15 | Results |
|----------------------|-----------------------|--|----------------|
| 4 | Radiated Emission | §15.231(b), 15.209 | Pass |
| 5 | Emission bandwidth | §15.231(c) | Pass |

2 General Information

2.1 Description of Equipment Under Test

Product : Transmitter

Model Number : CA-RF69

Applicant : **Nutek Corporation**
NO.167, Lane 235, Bauchiau Rd., Shindian City, Taipei County
23145, Taiwan

Manufacturer : **Nutek Corporation**
NO. 167, Lane 235, Bauchiau Rd., Shindian City, Taipei County
23145, Taiwan

Power Supply : 3Vdc Battery

Operating Frequency : 433.92MHz

Channel Number : 1 channel

Type of Modulation : ASK

Antenna description : This device uses PCB Print antenna.
The antenna is integral to the device, thereby meeting the
requirement of FCC 15.203.

Sample Receive date : Apr. 30, 2009

Date of Test : May 04~06, 2009

Additional Description : 1) The EUT is **Transmitter**.
2) The Model Number "**CA-RF69**" is representative selected in the
test and included in this report.
3) For more detail specification about EUT, please refer to the user's
manual.

2.2 Details of tested peripheral equipment

N/A

2.3 Test Facility

- Site Description** : OATS 2
- Name of Firm** : Interocean EMC Technology Corp.
- Company web** : <http://www.ietc.com.tw>
- Site 1, 2 Location** : No.5-2, Lin 1, Tin-Fu Tsun, Lin-Kou Hsiang,
Taipei County, Taiwan, R.O.C.
- Site 3, 4 Location** : No. 12, Ruei-Shu Valley, Ruei-Ping Tsun, Lin-Kou Hsiang,
Taipei County, Taiwan, R.O.C.
- Site Filing** :
- Federal Communication Commissions – USA
Registration No.: 96399 (OATS 1 & 2)
Registration No.: 518958 (OATS 3 & 4)
Designation No.: TW1020
 - Voluntary Control Council for Interference by Information
Technology Equipment (VCCI) – Japan
Member No.: 1349
Registration No. (Conducted Room): C-1094
Registration No. (Conducted Room): T-1562
Registration No. (OATS 1): R-1040
Registration No. (OATS 2): R-1041
 - Industry Canada (IC)
OUR FILE: 46405-4437 Submission: 130946
Registration No. (OATS 1): 4437A-1
Registration No. (OATS 2): 4437A-2
Registration No. (OATS 3): 4437A-3
Registration No. (OATS 4): 4437A-4
 - Japan Electrical Safety & Environment Technology
Laboratories (JET)
Registration No.: 04S03-01
- Site Accreditation** :
- Bureau of Standards and Metrology and Inspection (BSMI) –
Taiwan, R.O.C.
Accreditation No.:
SL2-IN-E-0026 for CNS13438 / CISPR22
SL2-R1-E-0026 for CNS13439 / CISPR13
SL2-R2-E-0026 for CNS13439 / CISPR13
SL2-A1-E-0026 for CNS13783-1 / CISPR14-1
 - Taiwan Accreditation Foundation (TAF)
Accreditation No.: 1113
 - TÜV NORD
Certificate No: TNTW0801R-01

3 Test specifications

3.1 Test standard

The EUT was performed according to FCC Part 15 Subpart C Section 15.231 procedure and setup followed by ANSI C63.4, 2003 requirements.

3.2 Operation mode

By preliminary testing and verifying three axis (X, Y and Z) position of EUT transmitted status, it was found that "X axis" position was the worst, then the final test was executed the worst condition and test data were recorded in this report

The EUT was operated in continuous transmission mode during all of the tests.



X axis mode



Y axis mode



Z axis mode

3.3 Test Equipment

| Instrument | Manufacturer | Model | Serial No. | Next Cal. Date |
|-------------------------|--------------|-----------------|-------------|----------------|
| Spectrum Analyzer | R&S | FSP30 | 100002 | 2009/12/10 |
| Preamplifier | Agilent | 8449B | 3008A01434 | 2010/04/01 |
| Preamplifier | Agilent | 83050A | 3950A00225 | 2009/08/10 |
| Preamplifier | SCHAFFNER | CA30100 | 2 | 2009/10/20 |
| Horn Antenna | COM-POWER | AH-118 | 10081 | 2010/05/12 |
| Horn Antenna | Schwarzbeck | BBHA 9120 | 9120D-583 | 2011/02/09 |
| Horn Antenna | Schwarzbeck | BBHA 9170 | 213 | 2010/06/08 |
| Wide Bandwidth Sensor | Anritsu | MA2491A | 728133 | 2009/10/16 |
| Power Meter | Anritsu | ML2495A | 736010 | 2009/10/16 |
| Temp & Humidity chamber | GIAN FORCE | GTH-150-40-2P-U | MAA0305-012 | 2009/05/14 |
| Signal Generator | Agilent | E8254A | US41140164 | 2009/05/21 |

Note: The above equipments are within the valid calibration period.

4 Radiated emission test

4.1 Limits

According to FCC 15.231(b) requirement:

In addition to the provisions of §15.205, the field strength of emissions from intentional radiator operated under this section shall not exceed the following:

Fundamental and harmonics emission limits

| Frequency (MHz) | Field Strength of Fundamental | | Field Strength of Harmonics | |
|--------------------|-------------------------------|-------------------|-----------------------------|-------------------|
| | (μ V/m@3m) | (dB μ V/m@3m) | (μ V/m@3m) | (dB μ V/m@3m) |
| 433.92 | 10996 | 80.8 | 1099.6 | 60.8 |

General Radiated emission Limit

Spurious Emission tested through until 10th harmonic. Radiated emissions, which fall in the restricted bands, as defined in §15.205 (a), comply with the radiated emission limits specified in §15.209 (a).

| Frequency (MHz) | 15.209 Limits | |
|--------------------|-----------------|-------------------|
| | (μ V/m@3m) | (dB μ V/m@3m) |
| 30-88 | 100 | 40 |
| 88-216 | 150 | 43.5 |
| 216-960 | 200 | 46 |
| Above 960 | 500 | 54 |

Remark :

1. The table above tighter limit applies at the band edges.
2. The measurement distance in meters, which that between form closest point of EUT to instrument antenna.

4.2 Calculation of Average Factor

The output field strengths of specification in accordance with the FCC rules specify measurements with an average detector. During the test, a spectrum analyzer incorporating a peak detector was used. Therefore, a reduction factor can be applied to the resultant peak signal level and compared to the limit for measurement instrumentation incorporating an average detector.

The duty cycle is measured in 100 ms or the repetition cycle period, whichever is a shorter time frame. The duty cycle is measured by placing the spectrum analyzer to set zero span at 100kHz resolution bandwidth.

Averaging factor in dB = $20 \log (\text{duty cycle})$

The duty cycle is simply the on-time divided by 100ms

The duration of one cycle = 94ms

Duty Cycle = $(2.4\text{ms} \times 1 + 0.24\text{ms} \times 27 + 0.96\text{ms} \times 13) = 14.88\text{ms} / 94\text{ms}$

Therefore, the averaging factor is found by $20 \log 0.158298 = -16.01\text{dB}$

Please see the diagrams below.

Duty Cycle




RBW 100 kHz Delta 1 [T1]
*VBW 300 kHz -0.73 dB
SWT 250 ms 94.000000 ms

Ref 97 dB μ V

*Att 0 dB

1 PK*
VIEW

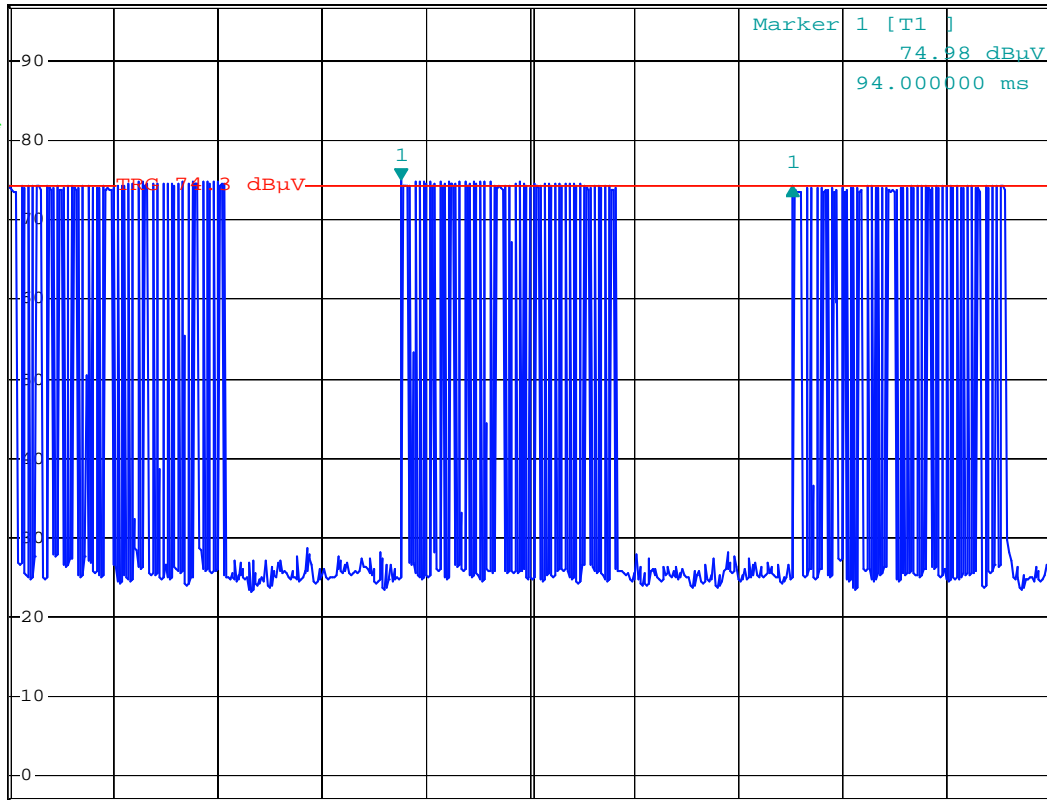

Center 433.92 MHz

25 ms/


Comment: Duty Cycle

Date: 4.MAY.2009 16:05:27

Time Slot



RBW 100 kHz Delta 1 [T1]
*VBW 300 kHz -0.68 dB
Ref 97 dBμV *Att 0 dB SWT 60 ms 2.400000 ms

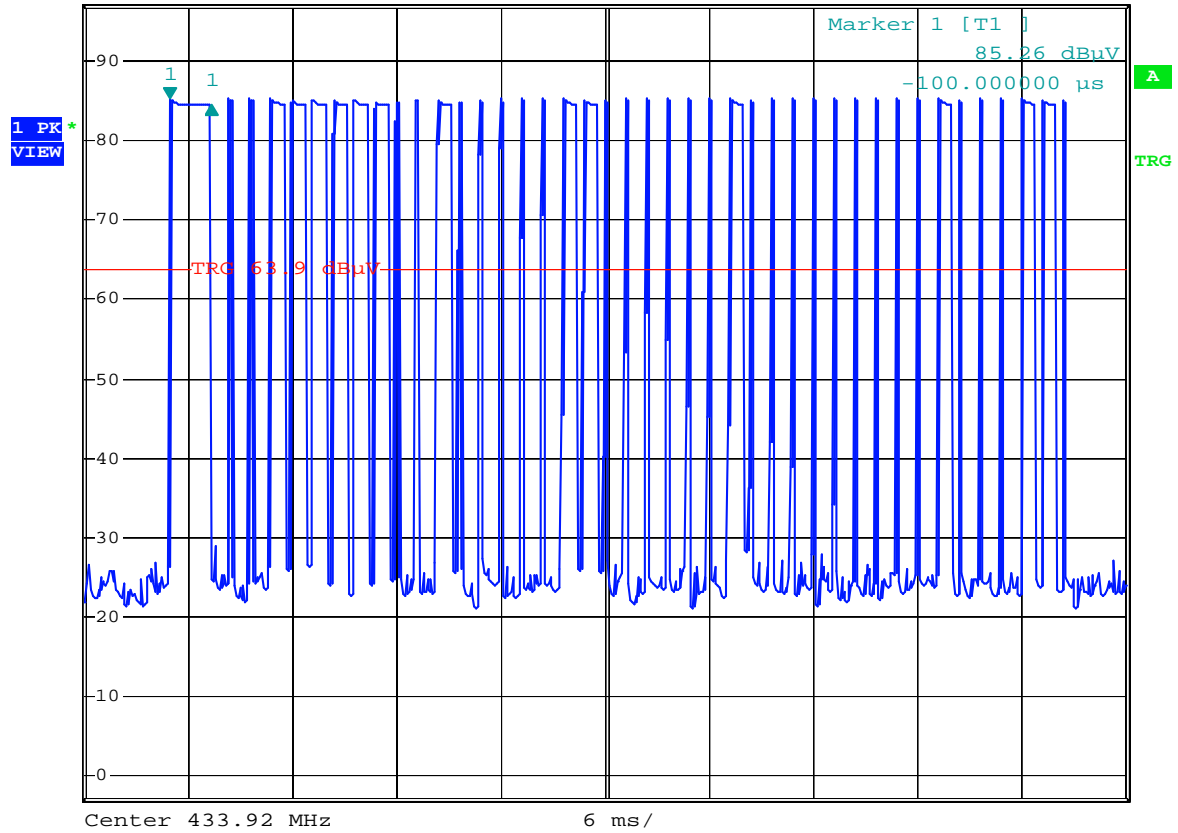


Comment: Ton 1
Date: 4.MAY.2009 16:10:30

Time Slot 1




RBW 100 kHz Delta 1 [T1]
*VBW 300 kHz -0.29 dB
Ref 97 dBμV *Att 0 dB SWT 60 ms 240.000000 μs

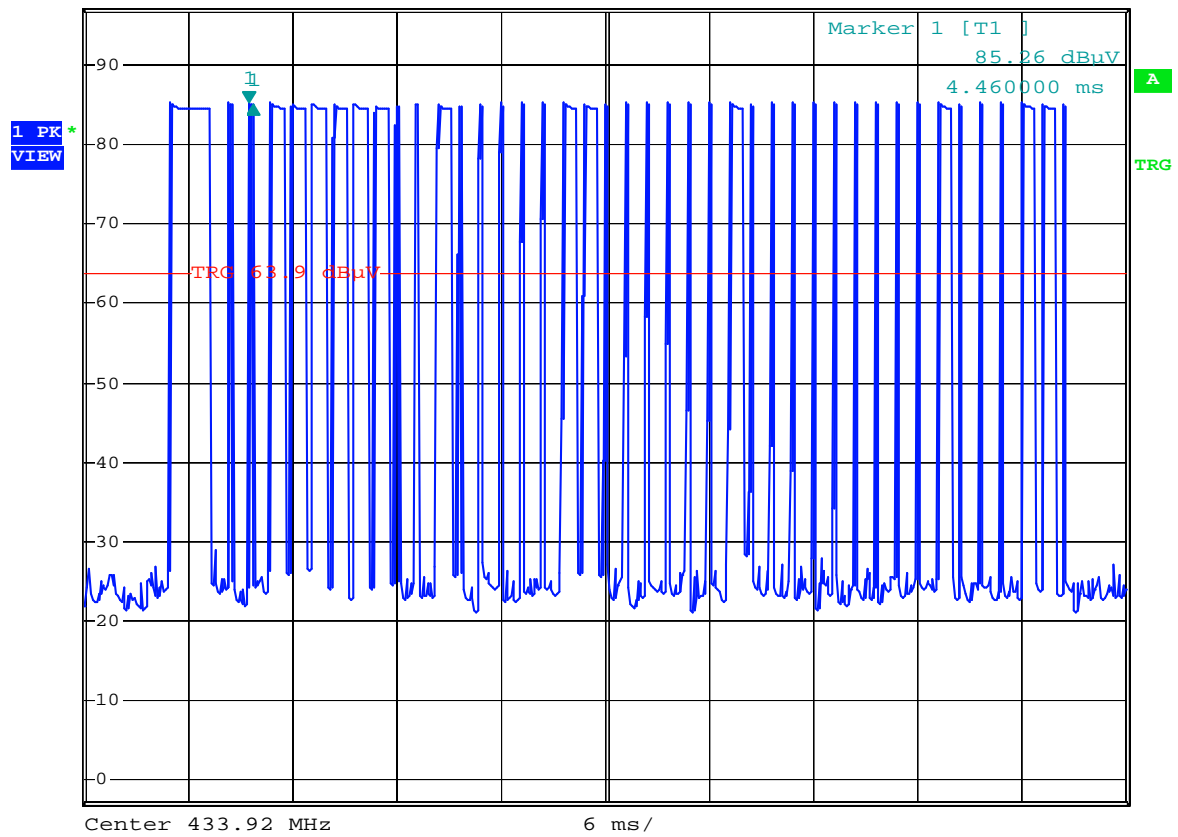

Comment: Ton 2
Date: 4.MAY.2009 16:11:03
Time Slot 2




RBW 100 kHz Delta 1 [T1]
*VBW 300 kHz -0.37 dB
Ref 97 dBμV *Att 0 dB SWT 60 ms 960.000000 μs

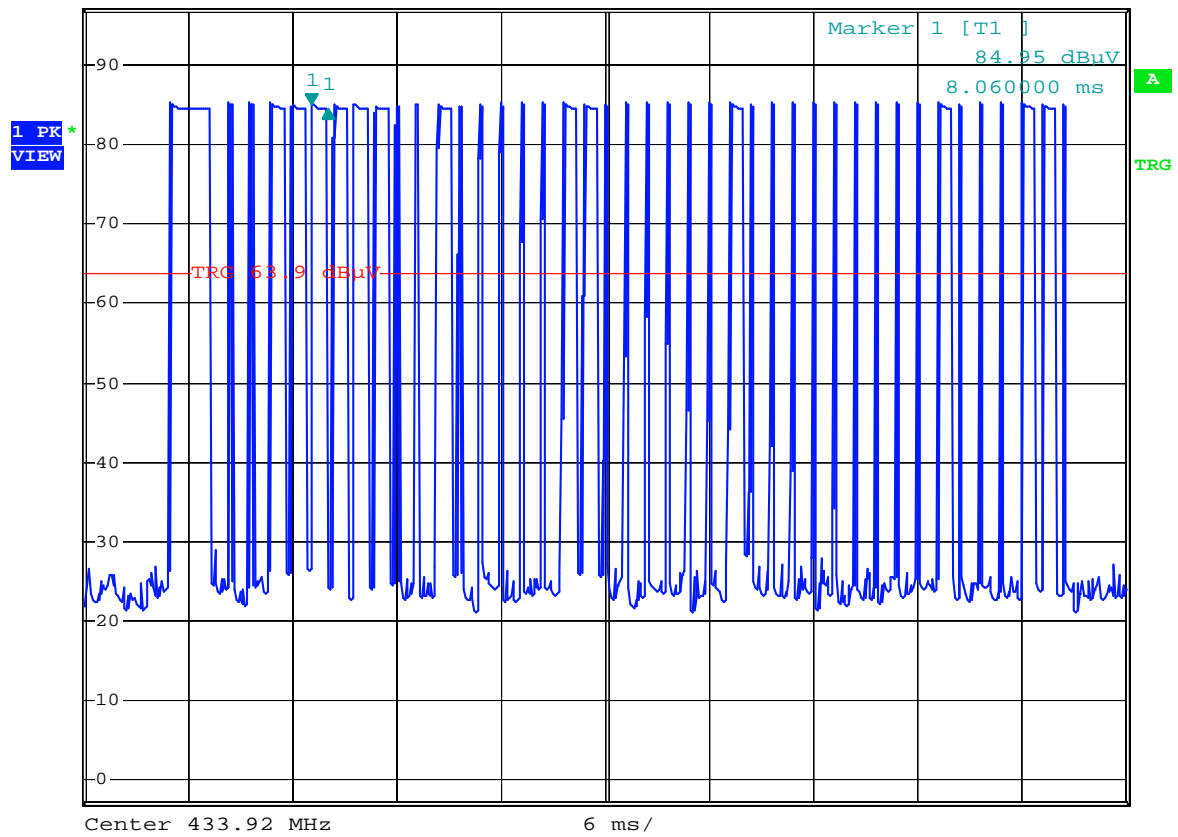

Comment: Ton 3
Date: 4.MAY.2009 16:11:33
Time Slot 3


The EUT was complied with the requirement of FCC 15.231 (a)(1), which employed a switch that will automatically deactivate the transmitter within less than 5 seconds of being released.

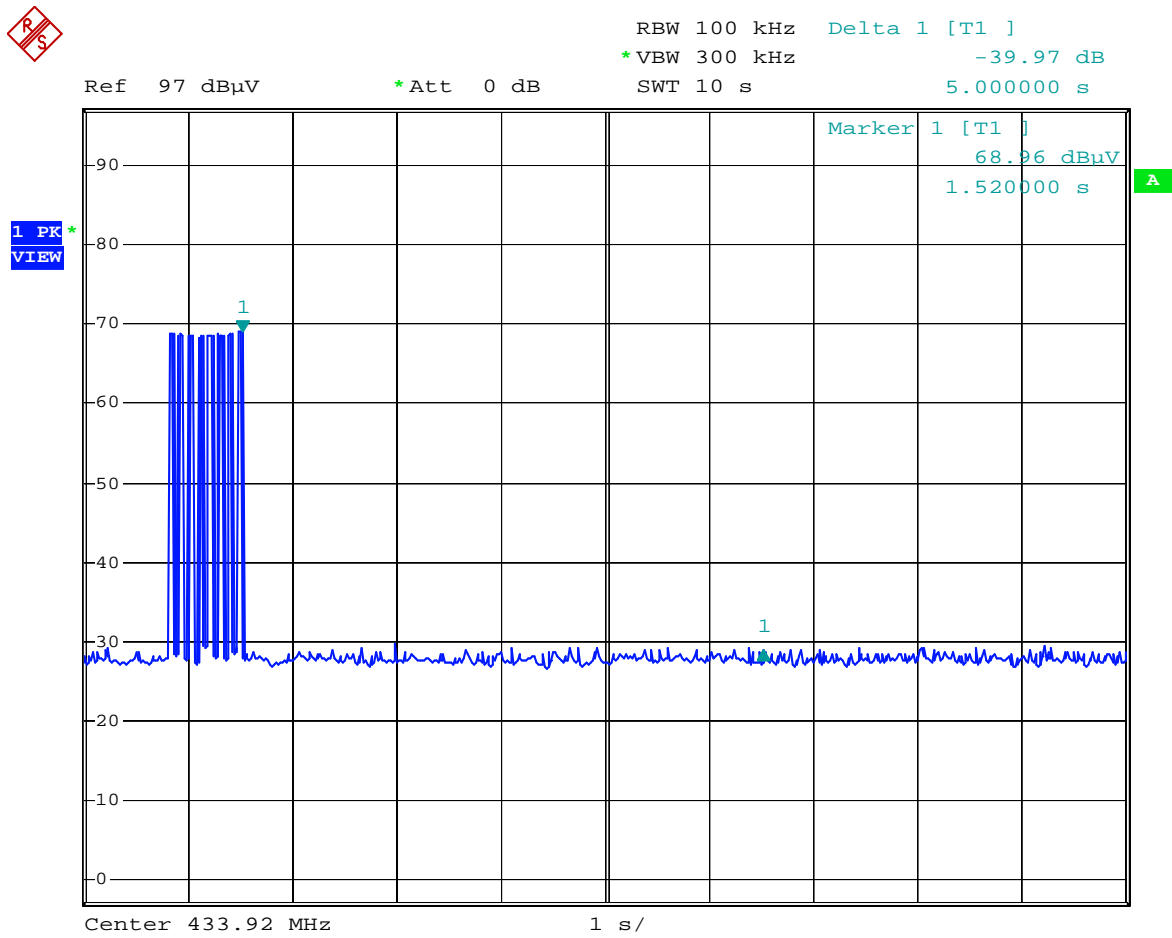


Comment: Deactivation
Date: 4.MAY.2009 15:58:40

4.3 Configuration of Measurement

Measurement Frequency under 1GHz

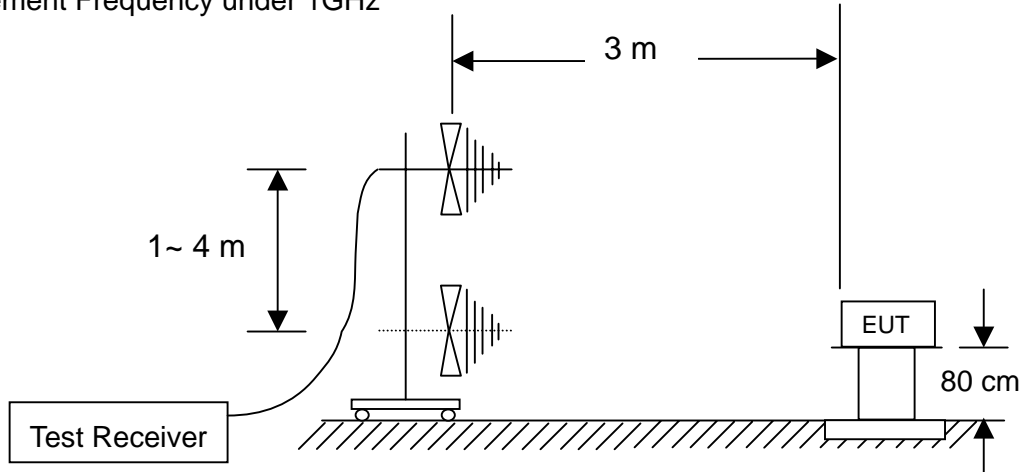

Measurement Frequency above 1GHz

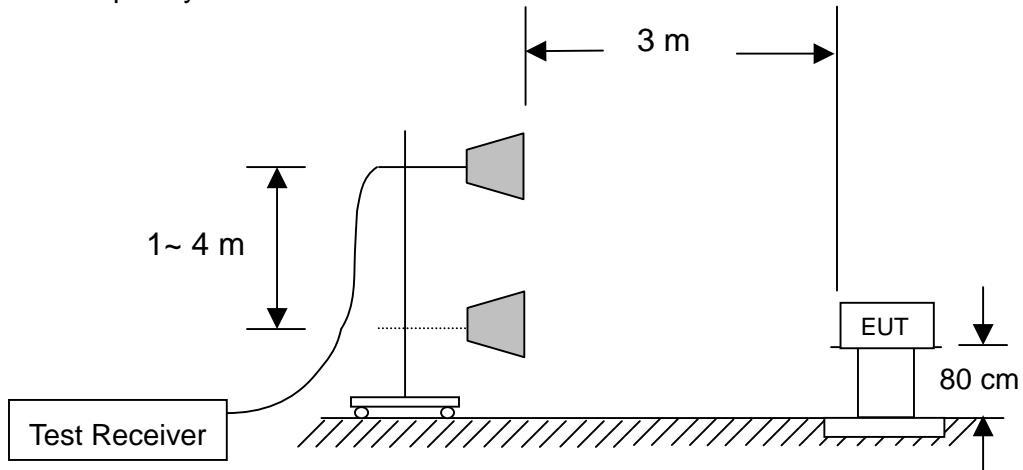

4.4 Test Procedure

Radiated emission measurements frequency range were performed from 30MHz to 5GHz. Spectrum Analyzer Resolution Bandwidth set to 100kHz or greater for frequencies from 30MHz to 1GHz, and set 1MHz Resolution Bandwidth for frequencies above 1GHz.

The EUT is place on non-conductive turntable for the test. If peripheral devices apply to the EUT, the peripheral devices will be connected to EUT and whole system. During the emission test, the signal is maximized through rotation and all cables were present worst-case emissions. The height of antenna and polarization is constantly changed for exploring maximum signal reading. The height of antenna can be up form reference ground to 4 meter and down to 1 meter.

4.5 Test Result

PASS.

The final test emission data is shown on as following tables.

Radiated Emission below 1GHz

| Frequency (MHz) | Antenna Polarization | Reading (dB μ V) | Preamp (dB) | Correction Factor (dB/m) | Corrected Level (dB μ V/m) | Limits (dB μ V/m) | Margin (dB) | Det. Mode |
|-----------------|----------------------|----------------------|-------------|--------------------------|--------------------------------|-----------------------|-------------|-----------|
| 129.880 | H | 43.12 | 28.60 | 14.89 | 29.41 | 43.50 | -14.09 | QP |
| 156.340 | H | 37.47 | 29.10 | 16.50 | 24.87 | 43.50 | -18.63 | QP |
| 185.500 | H | 44.69 | 29.59 | 17.54 | 32.64 | 43.50 | -10.86 | QP |
| 332.410 | H | 46.47 | 30.20 | 15.57 | 31.84 | 46.00 | -14.16 | QP |
| 441.410 | H | 43.14 | 30.00 | 18.31 | 31.45 | 46.00 | -14.55 | QP |
| 631.800 | H | 39.47 | 30.10 | 21.39 | 30.76 | 46.00 | -15.24 | QP |
| 152.580 | V | 44.48 | 29.10 | 16.26 | 31.64 | 43.50 | -11.86 | QP |
| 234.100 | V | 44.87 | 29.98 | 18.37 | 33.26 | 46.00 | -12.74 | QP |
| 304.700 | V | 46.36 | 30.20 | 15.25 | 31.41 | 46.00 | -14.59 | QP |
| 416.200 | V | 39.74 | 30.02 | 17.87 | 27.59 | 46.00 | -18.41 | QP |
| 507.200 | V | 44.17 | 29.44 | 19.37 | 34.10 | 46.00 | -11.90 | QP |
| 676.600 | V | 36.17 | 29.80 | 22.02 | 28.39 | 46.00 | -17.61 | QP |

Remark : Corrected Level = Reading – Preamp + Correction Factor
 Correction Factor = Antenna Factor + Cable Loss

Fundamental and harmonics emissions

| Freq. (MHz) | Antenna Polarization | Reading (dB μ V) | Preamplifier (dB) | Correction Factor (dB/m) | Average Factor (dB) | Corrected Level (dB μ V/m) | Limits (dB μ V/m) | Margin (dB) | Det. Mode |
|-------------|----------------------|----------------------|-------------------|--------------------------|---------------------|--------------------------------|-----------------------|-------------|-----------|
| 433.92 | H | 96.72 | 30.02 | 18.18 | -- | 84.88 | 100.8 | -15.92 | PK |
| 433.92 | H | 96.72 | 30.02 | 18.18 | -16.01 | 68.87 | 80.8 | -11.93 | AV |
| 867.84 | H | 55.15 | 28.24 | 24.16 | -- | 51.07 | 60.8 | -9.73 | PK |
| 1301.76 | H | 62.10 | 36.30 | 27.84 | -- | 53.64 | 74.0 | -20.36 | PK |
| 1301.76 | H | 62.10 | 36.30 | 27.84 | -16.01 | 37.63 | 54.0 | -16.37 | AV |
| 1735.68 | H | 78.05 | 36.01 | 28.58 | -- | 70.62 | 80.8 | -10.18 | PK |
| 1735.68 | H | 78.05 | 36.01 | 28.58 | -16.01 | 54.61 | 60.8 | -6.19 | AV |
| 2169.60 | H | 74.27 | 35.97 | 30.46 | -- | 68.76 | 80.8 | -12.04 | PK |
| 2169.60 | H | 74.27 | 35.97 | 30.46 | -16.01 | 52.75 | 60.8 | -8.05 | AV |
| 2603.52 | H | 63.16 | 36.16 | 31.90 | -- | 58.90 | 80.8 | -21.90 | PK |
| 2603.52 | H | 63.16 | 36.16 | 31.90 | -16.01 | 42.89 | 60.8 | -17.91 | AV |
| 3037.44 | H | 64.38 | 36.41 | 32.71 | -- | 60.68 | 80.8 | -20.12 | PK |
| 3037.44 | H | 64.38 | 36.41 | 32.71 | -16.01 | 44.67 | 60.8 | -16.13 | AV |
| 3471.00 | H | 63.01 | 36.49 | 33.31 | -- | 59.83 | 80.8 | -20.97 | PK |
| 3471.00 | H | 63.01 | 36.49 | 33.31 | -16.01 | 43.82 | 60.8 | -16.98 | AV |
| 3905.28 | H | 51.60 | 36.26 | 34.71 | -- | 50.05 | 54.0 | -3.95 | PK |
| 4339.20 | H | 48.90 | 36.27 | 36.34 | -- | 48.97 | 54.0 | -5.03 | PK |
| 433.92 | V | 83.10 | 30.02 | 18.18 | -- | 71.26 | 100.8 | -29.54 | PK |
| 433.92 | V | 83.10 | 30.02 | 18.18 | -16.01 | 55.25 | 80.8 | -25.55 | AV |
| 867.84 | V | 46.39 | 28.24 | 24.16 | -- | 42.31 | 60.8 | -18.49 | PK |
| 1301.76 | V | 55.15 | 36.30 | 27.84 | -- | 46.69 | 54.0 | -7.31 | PK |
| 1735.68 | V | 63.16 | 36.01 | 28.58 | -- | 55.73 | 60.8 | -5.07 | PK |
| 2169.96 | V | 68.22 | 35.97 | 30.46 | -- | 62.71 | 80.8 | -18.09 | PK |
| 2169.96 | V | 68.22 | 35.97 | 30.46 | -16.01 | 46.70 | 60.8 | -14.10 | AV |
| 2603.52 | V | 60.55 | 36.16 | 31.90 | -- | 56.29 | 60.8 | -4.51 | PK |
| 3037.44 | V | 67.00 | 36.41 | 32.71 | -- | 63.30 | 80.8 | -17.50 | PK |
| 3037.44 | V | 67.00 | 36.41 | 32.71 | -16.01 | 47.29 | 60.8 | -13.51 | AV |
| 3471.36 | V | 69.63 | 36.49 | 33.31 | -- | 66.45 | 80.8 | -14.35 | PK |
| 3471.36 | V | 69.63 | 36.49 | 33.31 | -16.01 | 50.44 | 60.8 | -10.36 | AV |
| 3905.28 | V | 53.00 | 36.26 | 34.71 | -- | 51.45 | 54.0 | -2.55 | PK |
| 4339.20 | V | 52.34 | 36.27 | 36.34 | -- | 52.41 | 54.0 | -1.59 | PK |

Remark :

1. Corrected Level = Reading – Preamp + Correction Factor
2. Correction Factor = Antenna Factor + Cable Loss
3. “ * ” Mark indicated Background Noise Level

5 Emission bandwidth

5.1 Limits

According to FCC 15.231(c) requirement:

The bandwidth of the emission shall be no wider than 0.25% of the center frequency for devices operating between 70 MHz to 900 MHz. Those devices operating above 900 MHz, the emission spurious shall be no wider than 0.5% of the center frequency. Bandwidth is determined at the points 20 dB down from the modulated carrier.

B.W (20dBc) Limit = 0.25% * f(MHz) = 0.25% * 433.92MHz = 1084.8kHz

5.2 Test Result

PASS.


The final test data is shown on as following.

| Channel Frequency (MHz) | Measured 20dB Bandwidth (kHz) | Limit (kHz) |
|-------------------------|-------------------------------|-------------|
| 433.92 | 48 | 1084.8 |



Ref 97 dB μ V *Att 0 dB *RBW 10 kHz Marker 1 [T1] 91.03 dB μ V
 SWT 2.5 ms 433.969200000 MHz

1 PK
VIEW

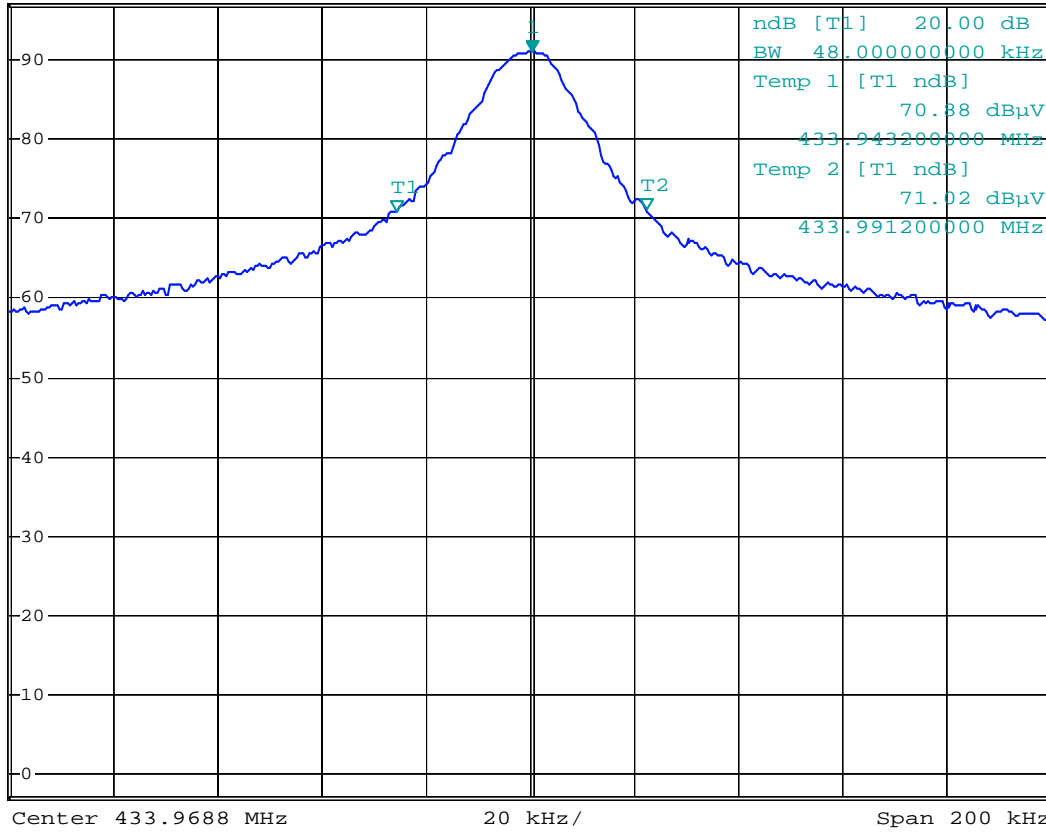

Comment: 20dB Bandwidth
 Date: 4.MAY.2009 15:55:27