

# 47 CFR Part 15 Subpart C

## Section 15.249

### Test Report

Product : Transmitter

Trade Name : N/A

Model Number : CARF-LR4; SLRF-LR4

FCC ID : ELVMTUF

Prepared for

#### **Nutek Corporation**

No.167, Lane 235, Bauchiau Rd., Xindian District,  
New Taipei City 23145, Taiwan

TEL. : +886 2 2918 9478

FAX. : +886 2 2917 9069

Prepared by

#### **Interocean EMC Technology Corp.**

**Interocean EMC Technology Tin-Fu Laboratory**  
No. 5-2, Lin 1, Tin-Fu, Lin-Kou Dist., New Taipei City,  
Taiwan 244, R.O.C.

TEL.: +886 2 2600 6861

FAX.: +886 2 2600 6859



#### **Remark:**

The test report consists of **24** pages in total. It shall not be reproduced except in full, without the written approval of IETC. This document may be altered or revised by IETC only, and shall be noted in the revision section of the document.

The test result in this report is only subjected to the test sample.

# Table of Contents

<b>1</b>	<b>General Information</b>	<b>4</b>
1.1	Description of Equipment Under Test	4
1.2	Test Facility	5
1.3	Test Equipment	6
1.4	Measurement Uncertainty	6
1.5	Summary of Measurement	7
<b>2</b>	<b>Test Specifications</b>	<b>8</b>
2.1	Test Standard	8
2.2	Operation Mode	8
2.3	Test Step of EUT	8
<b>3</b>	<b>20dB Bandwidth test</b>	<b>9</b>
3.1	Limit	9
3.2	Test Procedure	9
3.3	Test Result	9
<b>4</b>	<b>RF Radiated spurious emission test</b>	<b>10</b>
4.1	Limit	10
4.2	Configuration of Measurement	10
4.3	Test Procedure	11
4.4	The description of operation mode	11
4.5	Test Result	11
<b>5</b>	<b>Emission on the Band Edge test</b>	<b>16</b>
5.1	Limit	16
5.2	Configuration of Measurement	16
5.3	Test Procedure	16
5.4	Test Result	16
<b>6</b>	<b>Photographs of Test</b>	<b>19</b>
6.1	Radiated Emission Measurement (Below 1 GHz)	19
6.2	Radiated Emission Measurement (Above 1 GHz)	19
<b>7</b>	<b>Photographs of EUT</b>	<b>20</b>
7.1	Model No.: CARF-LR4	20

# Statement of Compliance

**Applicant:** Nutek Corporation  
**Manufacturer:** Nutek Corporation  
**Product:** Transmitter  
**Model No.:** CARF-LR4; SLRF-LR4  
**Tested Power Voltage:** DC 3V  
**Date of Final Test:** Apr. 28, 2021  
**Revision of Report:** Rev. 02

**Configuration of Measurements and Standards Used :**

FCC Rules and Regulations Part 15 Subpart C

I HEREBY CERTIFY THAT: The data shown in this report were made in accordance with the procedures given in ANSI C63.10, and the energy emitted by the device was founded to be within the limits applicable. I assume full responsibility for accuracy and completeness of these data.

- Note:**
1. The result of the testing report relate only to the item tested.
  2. This report shall not be partial reproduced without written approval by Interocean EMC Technology Corporation.
  3. Judgment of conformity is based on test result, regardless of measurement uncertainty.

Report Issued: 2021/05/17

Prepared by: Ivan Wang  
Ivan Wang

Approved: Jerry Chang  
Jerry Chang

# 1 General Information

## 1.1 Description of Equipment Under Test

<b>Product</b>	: Transmitter
<b>Model Number</b>	: CARF-LR4; SLRF-LR4
<b>Applicant</b>	: <b>Nutek Corporation</b> No.167, Lane 235, Bauchiau Rd., Xindian District, New Taipei City 23145, Taiwan
<b>Manufacturer</b>	: <b>Nutek Corporation</b> No.167, Lane 235, Bauchiau Rd., Xindian District, New Taipei City 23145, Taiwan
<b>Power Supply</b>	: DC 3V
<b>Operating Frequency</b>	: 909.6 MHz
<b>Output Power</b>	: 85.10 dB $\mu$ V/m
<b>Channel Number</b>	: 1 channel
<b>Type of Modulation</b>	: LoRa
<b>Antenna Description</b>	: PCB Antenna. maximum Peak gain: 0dBi.
<b>Measurement Software</b>	: e3; Ver: 8.120803a7-2
<b>Receipt Date of EUT</b>	: Apr. 09, 2021
<b>Date of Test</b>	: Apr. 19 ~ 28, 2021
<b>Additional Description</b>	: 1) The test model is " <b>CARF-LR4</b> ", designated by the applicant and included in this report. 2) The differences of all models included in this report are provided by the applicant, and the lab disclaims any liability related to reporting, if incorrect, from such provision. The difference of all models is only for different market. 3) For more detailed specification about EUT, please refer to the user's manual.

## 1.2 Test Facility

- Site Description** : ☒ Chamber 3
- Name of Firm** : Interocean EMC Technology Corp.
- Company web** : <http://www.ietc.com.tw>
- Location** : No. 5-2, Lin 1, Tin-Fu, Lin-Kou Dist., New Taipei City, Taiwan 244, R.O.C.
- Site Filing** : ● Federal Communication Commissions – USA  
Designation No.: TW1020 (Test Firm Registration #: 651092)  
Designation No.: TW1113 (Test Firm Registration #: 959554)
- Innovation, Science and Economic Development Canada (ISED)  
CAB identifier: TW1113 (Ref. No 14962756)
- Voluntary Control Council for Interference by Information Technology Equipment (VCCI) – Japan  
Member No.: 1349  
Registration No. (Conducted Room): C-11094  
Registration No. (Conducted Room): T-11562  
Registration No. (OATS 1): R-11040  
Registration No. (Chamber 3): G-20080
- Site Accreditation** : ● Bureau of Standards and Metrology and Inspection (BSMI) – Taiwan, R.O.C.  
Accreditation No.:  
SL2-IN-E-0026 for CNS 13438 / CISPR 22  
SL2-R1-E-0026 for CNS 13439 / CISPR 13  
SL2-R2-E-0026 for CNS 13439 / CISPR 13  
SL2-L1-E-0026 for CNS 14115 / CISPR 15
- Taiwan Accreditation Foundation (TAF)  
Accreditation No.: 1113
- American Association for Laboratory Accreditation (A2LA)  
Certificate Number: 4891.01
- Vehicle Safety Certification Center (VSCC)  
Approval No.: TW16-11

### 1.3 Test Equipment

Instrument	Manufacturer	Model	Serial No.	Next Cal. Date
EMI Test Receiver	R&S	ESI7	830154/002	2021/05/05
Spectrum Analyzer	R&S	FSP30	100002	2021/05/12
Loop Antenna	Electro-Metrics	EM-6879	261	2021/09/16
Bilog Antenna	ETC	MCTD 2786B	BLB17S04020	2021/05/04
Horn Antenna	Schwarzbeck	BBHA9120	9120D-1051	2021/08/03
Pre-Amplifier	EMCI	EMC001150	980130	2021/08/02
Pre-Amplifier	EMCI	EMC051845	980110	2021/07/02
RF Cable	HARBOUR	27478LL142	CBL65	2021/07/28
RF Cable	Marvelous Microwave	MCBL-LL266.50	CBL70	2021/07/28
Measurement Software	AUDIX-e3			

Note: The above equipments are within the valid calibration period.

### 1.4 Measurement Uncertainty

Item	Value
Chamber 3:	
Radiated Emission Test (9 kHz to 30 MHz)	3.2 dB
Radiated Emission Test (30 MHz to 200 MHz)	4.6 dB
Radiated Emission Test (200 MHz to 1 GHz) (Antenna: without tilting)	5.9 dB
Radiated Emission Test (1 GHz to 18 GHz)	5.0 dB
Radiated Emission Test (18 GHz to 40 GHz)	5.4 dB
The reported expanded uncertainty is based on a standard uncertainty multiplied by a coverage factor of k=2, providing a level of confidence of approximately 95%	

## 1.5 Summary of Measurement

<b>Test Parameter</b>	<b>Reference Document CFR47 Part15</b>	<b>Results</b>
RF Radiated spurious emission test	§15.205, §15.209 §15.249	Pass
Emission on the Band Edge	§15.249(d)	Pass
AC Power Line Conducted Emission test	§15.207(a)	N/A
20 dB Bandwidth	§15.215(c)	Pass
Note: N/A is an abbreviation for Not Applicable.		

## **2 Test Specifications**

### **2.1 Test Standard**

The EUT was performed according to FCC Part 15 Subpart C Section 15.249 procedure and setup followed by ANSI C63.10-2013 requirements.

### **2.2 Operation Mode**

By preliminary testing and verifying three axis (X, Y and Z) position of EUT transmitted status, it was found that "Y axis" position was the worst, then the final test was executed the worst condition and test data were recorded in this report.

### **2.3 Test Step of EUT**

- 2.3.1 Set the fixture to EUT for power supplying.
- 2.3.2 Turn on the power of all equipments.
- 2.3.3 Let the EUT continuous transmission.
- 2.3.4 Execute the test.



### 3 20dB Bandwidth test

#### 3.1 Limit

Intentional radiators operating under the alternative provisions to the general emission limits, as contained in §§ 15.217 through 15.257 and in Subpart E of this part, must be designed to ensure that the 20 dB bandwidth of the emission, or whatever bandwidth may otherwise be specified in the specific rule section under which the equipment operates, is contained within the frequency band designated in the rule section under which the equipment is operated.

#### 3.2 Test Procedure

The 20dB bandwidth per FCC §15.215 was measured using spectrum analyzer with the resolutions bandwidth set at 100 kHz, the video bandwidth  $\geq$  RBW, and the SPAN may equal to approximately 2 to 3 time the 20 dB bandwidth.


#### 3.3 Test Result

**PASS.**

The final test data is shown as following pages.

Test CH		20dB Bandwidth (MHz)
Modulation	Frq. (MHz)	
LoRa	909.6	0.770

**Plot:**

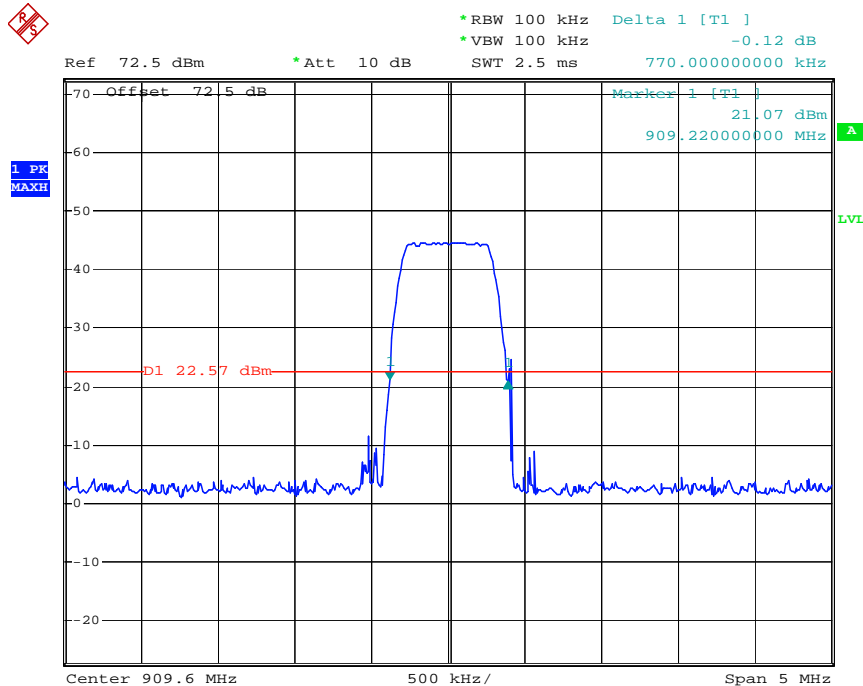

Date: 28.APR.2021 17:19:43

## 4 RF Radiated spurious emission test

### 4.1 Limit

According to §15.249 (a), the field strength of emissions from intentional radiators operated within these frequency bands shall comply with the following:


Fundamental frequency	Field strength of fundamental (millivolts/meter)	Field strength of harmonics (microvolts/meter)
902 - 928 MHz	50	500
2400 - 2483.5 MHz	50	500
5725 - 5875 MHz	50	500
24.0 - 24.25 GHz	250	2500

For intentional radiator, the radiated emission shall comply with §15.209(a).


Frequency (MHz)	Field strength dB( $\mu$ V/m)	Measurement distance (meters)
1.705 - 30.0	29.5	30
30 - 88	40	3
88 - 216	43.5	3
216 - 960	46	3
Above 960	54	3

### 4.2 Configuration of Measurement

Measurement Frequency under 1 GHz

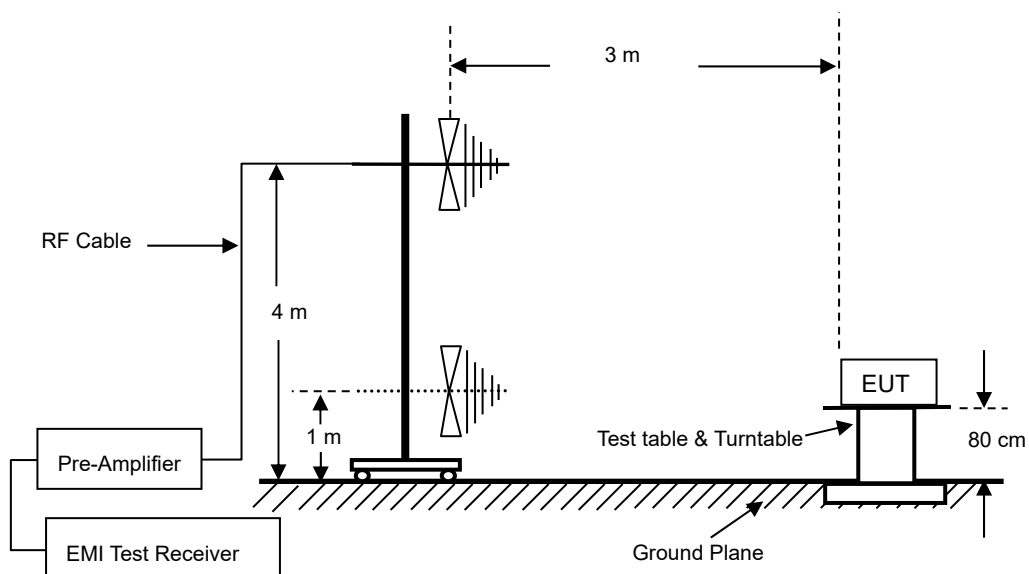

## Measurement Frequency above 1 GHz

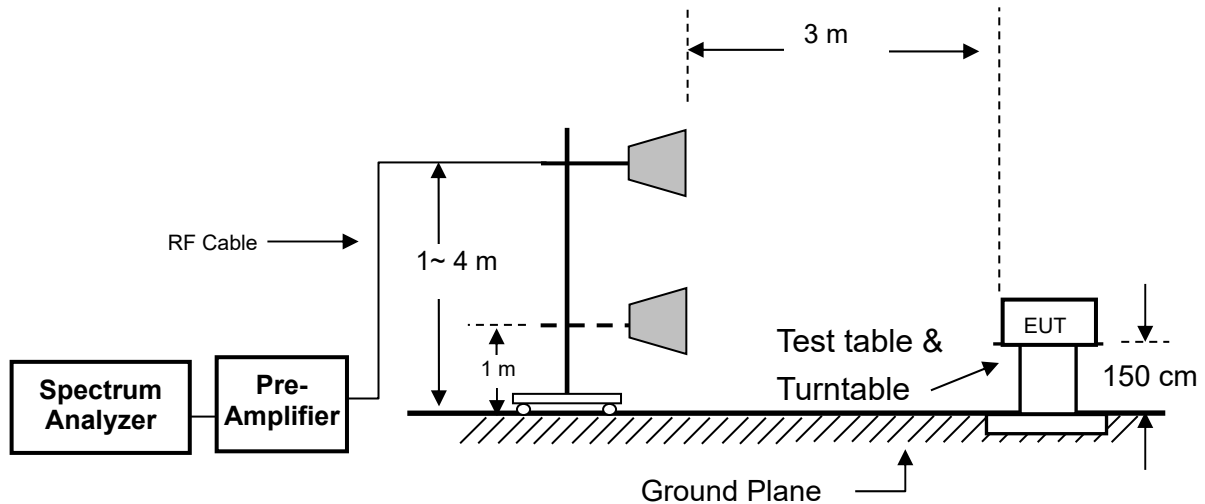

### 4.3 Test Procedure

The EUT was setup to ANSI C63.10-2013.

Radiated emission measurements were performed from 30 MHz to 25 GHz. Spectrum Analyzer set as below: For frequency range from 30 MHz to 1 GHz: RBW=100 kHz or greater. For frequencies above 1 GHz: set RBW=VBW=1 MHz for peak detector and RBW=1 MHz, VBW=10 Hz for average detector.

The EUT for testing is arranged on a wooden turntable. If some peripherals apply to the EUT, the peripherals will be connected to EUT and the whole system. During the test, all cables were arranged to produce worst-case emissions. The signal is maximized through rotation. The height of antenna and polarization is changing constantly for exploring for maximum signal level. The height of antenna can be up to 4 meter and down to 1 meter.

### 4.4 The description of operation mode

Setup EUT to continuously transmit signal with 100% duty cycle during the test period.

### 4.5 Test Result

#### **PASS.**

The frequency range from 9 kHz to 30 MHz was pre-scanned and the results were 20 dB lower than the limit line which according to FCC 15.31(o) needs not be recorded.

The final test emission data is shown as following tables.

## Radiated Emission Below 1 GHz

CLIENT: Nutek Corporation

OPERATOR : Scott

EUT: Transmitter

TEST SITE : Chamber 3

MODEL: CARF-LR4

TEST DISTANCE : 3 m

RATING: DC 3V


POLARIZATION : HORIZONTAL

COMMENT: 909.6 MHz

TEMP/HUM : 24.4°C/45%

Data:123

2021-04-22

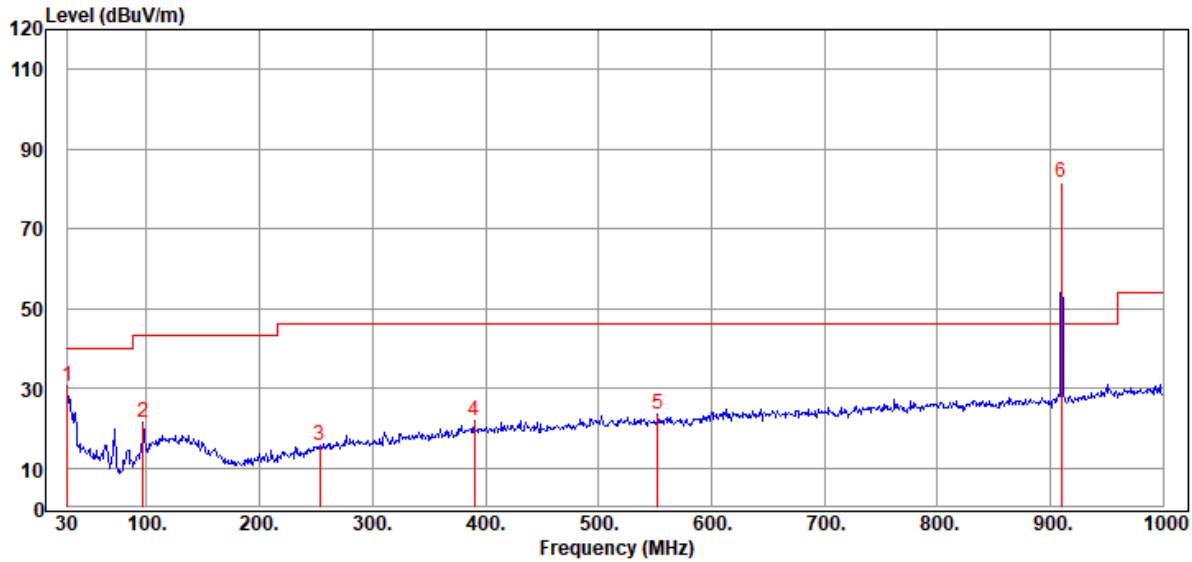

Item Mark	Freq. MHz	Reading dBuV	Factor dB/m	Level dBuV/m	Limit dBuV/m	Margin dB	Remark
1	30.000	61.49	-30.97	30.52	40.00	-9.48	Peak
2	96.930	55.04	-33.52	21.52	43.50	-21.98	Peak
3	253.100	47.44	-31.66	15.78	46.02	-30.24	Peak
4	389.870	49.65	-27.76	21.89	46.02	-24.13	Peak
5	552.830	49.68	-26.10	23.58	46.02	-22.44	Peak
* 6	909.790	101.96	-20.45	81.51	94.00	-12.49	Peak

Remark : Corrected Level = Reading + Correction Factor – Preamp

Correction Factor = Antenna Factor + Cable Loss


Margin = Corrected Level – Limits

“ \* ” Mark indicated Background Noise Level

CLIENT: Nutek Corporation  
 EUT: Transmitter  
 MODEL: CARF-LR4  
 RATING: DC 3V  
 COMMENT: 909.6 MHz  
 Data:122

OPERATOR : Scott  
 TEST SITE : Chamber 3  
 TEST DISTANCE : 3 m  
 POLARIZATION : VERTICAL  
 TEMP/HUM : 24.4°C/45%

2021-04-22

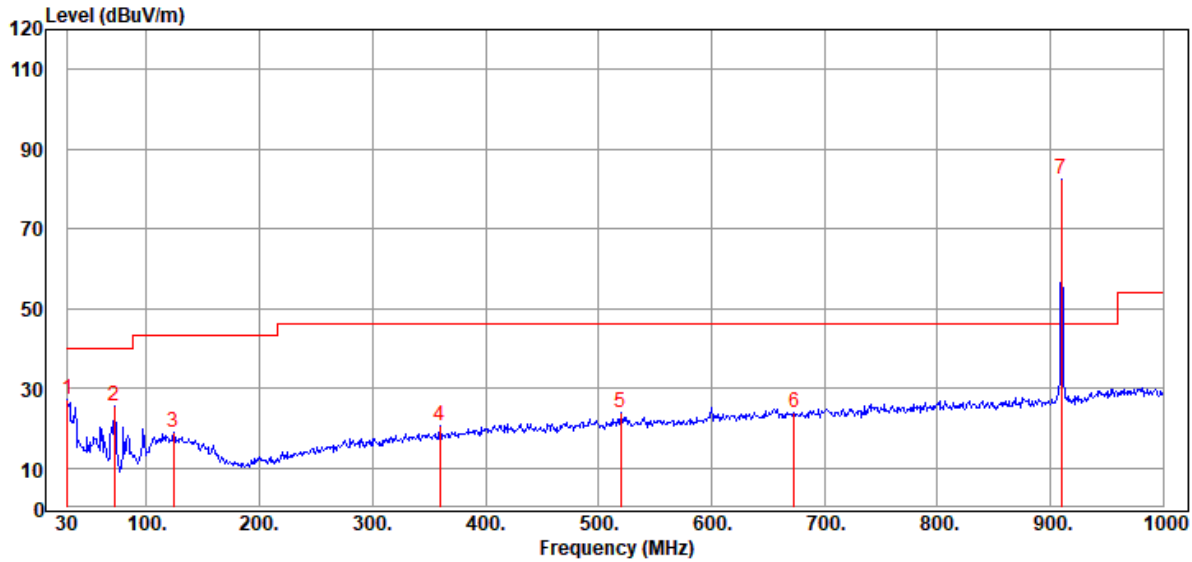

Item Mark	Freq. MHz	Reading dBuV	Factor dB/m	Level dBuV/m	Limit dBuV/m	Margin dB	Remark
1	30.000	58.10	-30.97	27.13	40.00	-12.87	Peak
2	71.710	64.44	-38.71	25.73	40.00	-14.27	Peak
3	124.090	48.59	-29.43	19.16	43.50	-24.34	Peak
4	359.800	49.36	-28.71	20.65	46.02	-25.37	Peak
5	519.850	50.11	-26.23	23.88	46.02	-22.14	Peak
6	673.110	48.58	-24.59	23.99	46.02	-22.03	Peak
* 7	909.790	102.81	-20.45	82.36	94.00	-11.64	Peak

Remark : Corrected Level = Reading + Correction Factor – Preamp  
 Correction Factor = Antenna Factor + Cable Loss  
 Margin = Corrected Level – Limits  
 “ \* ” Mark indicated Background Noise Level

## Radiated Emission Above 1 GHz

CLIENT: Nutek Corporation

OPERATOR : Scott

EUT: Transmitter

TEST SITE : Chamber 3

MODEL: CARF-LR4

TEST DISTANCE : 3 m

RATING: DC 3V


POLARIZATION : HORIZONTAL

COMMENT: 909.6 MHz

TEMP/HUM : 24.5°C/50%

Data:45

2021-04-19

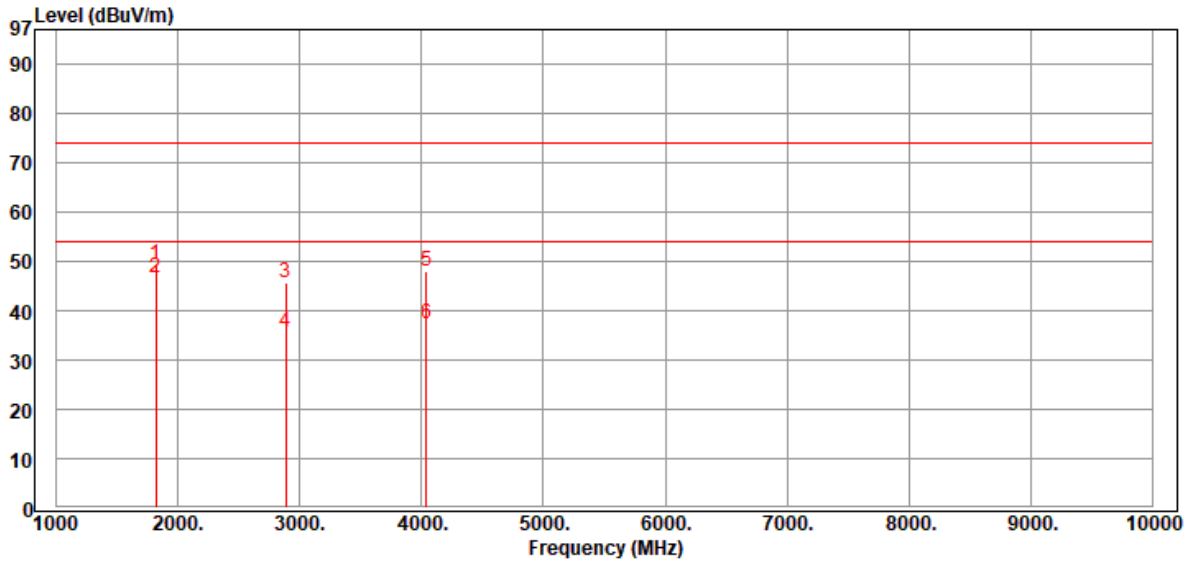

Item	Freq.	Reading	Factor	Level	Limit	Margin	Remark
Mark	MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	
1	1816.000	68.98	-19.50	49.48	74.00	-24.52	Peak
2	1816.000	66.20	-19.50	46.70	54.00	-7.30	Average
3	2884.000	60.24	-14.48	45.76	74.00	-28.24	Peak
4	2884.000	50.20	-14.48	35.72	54.00	-18.28	Average
5	4040.000	59.56	-11.41	48.15	74.00	-25.85	Peak
6	4040.000	48.60	-11.41	37.19	54.00	-16.81	Average

Remark: Corrected Level = Reading + Correction Factor - Preamp

Correction Factor = Antenna Factor + Cable Loss

Margin = Corrected Level – Limits

“ \* ” Mark indicated Background Noise Level

Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Measurements above show only up to 6 maximum emissions noted, or would be lesser if no


specific emissions from the EUT are recorded (ie: margin > 20dB from the applicable limit)

and considered that’s already beyond the background noise floor.

CLIENT: Nutek Corporation  
 EUT: Transmitter  
 MODEL: CARF-LR4  
 RATING: DC 3V  
 COMMENT: 909.6 MHz  
 Data:46

OPERATOR : Scott  
 TEST SITE : Chamber 3  
 TEST DISTANCE : 3 m  
 POLARIZATION : VERTICAL  
 TEMP/HUM : 24.5°C/50%

2021-04-19

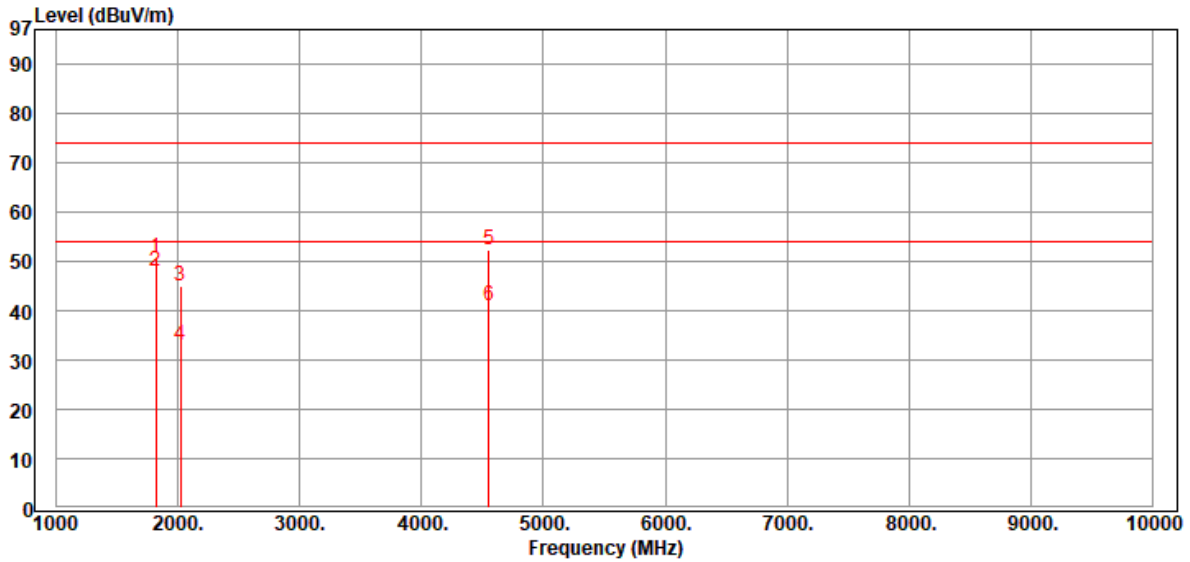

Item Mark	Freq. MHz	Reading dBuV	Factor dB/m	Level dBuV/m	Limit dBuV/m	Margin dB	Remark
1	1816.000	70.03	-19.50	50.53	74.00	-23.47	Peak
2	1816.000	67.61	-19.50	48.11	54.00	-5.89	Average
3	2020.000	63.20	-18.19	45.01	74.00	-28.99	Peak
4	2020.000	51.30	-18.19	33.11	54.00	-20.89	Average
5	4552.000	61.98	-9.57	52.41	74.00	-21.59	Peak
6	4552.000	50.69	-9.57	41.12	54.00	-12.88	Average

Remark: Corrected Level = Reading + Correction Factor - Preamp

Correction Factor = Antenna Factor + Cable Loss

Margin = Corrected Level – Limits

“ \* ” Mark indicated Background Noise Level

Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20dB from the applicable limit) and considered that’s already beyond the background noise floor.


## 5 Emission on the Band Edge test

### 5.1 Limit

Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50 dB below the level of the fundamental or to the general radiated emission limits in §15.209, whichever is the lesser attenuation.

### 5.2 Configuration of Measurement

Measurement Frequency above 1 GHz

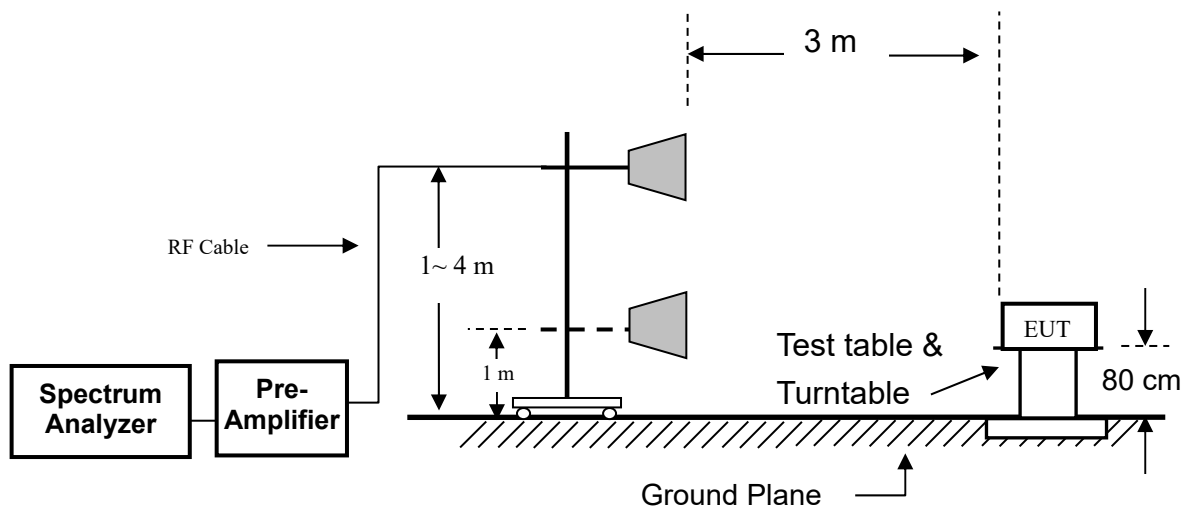

### 5.3 Test Procedure

The EUT was setup to ANSI C63.10-2013.

The EUT for testing is arranged on a wooden turntable. If some peripherals apply to the EUT, the peripherals will be connected to EUT and the whole system. During the test, all cables were arranged to produce worst-case emissions. The signal is maximized through rotation. The height of antenna and polarization is changing constantly for exploring for maximum signal level. The height of antenna can be up to 4 meter and down to 1 meter.

### 5.4 Test Result

**PASS.**

The final test data is shown on as following pages.




## Band edge

CLIENT: Nutek Corporation  
 EUT: Transmitter  
 MODEL: CARF-LR4  
 RATING: DC 3V  
 COMMENT: 909.6 MHz

OPERATOR : Scott  
 TEST SITE : Chamber 3  
 TEST DISTANCE : 3 m  
 POLARIZATION : HORIZONTAL  
 TEMP/HUM : 24.4°C/45%

Data:116

2021-04-22

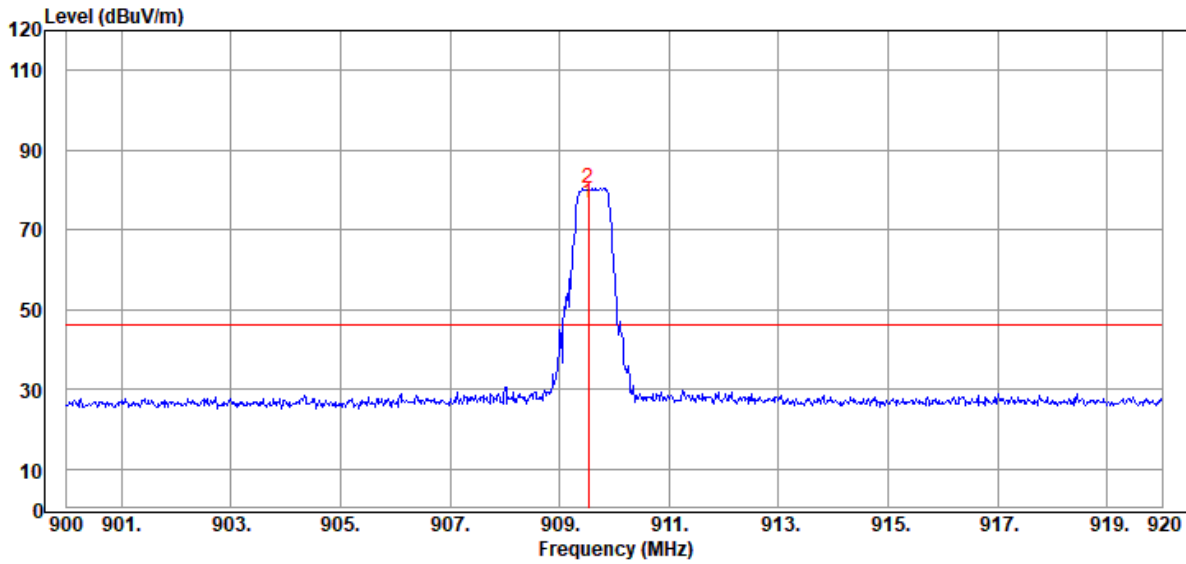


Item Mark	Freq. MHz	Reading dBuV	Factor dB/m	Level dBuV/m	Limit dBuV/m	Margin dB	Remark
1	909.520	97.20	-20.46	76.74	94.00	-17.26	QP
* 2	909.520	100.70	-20.46	80.24	114.00	-33.76	Peak

CLIENT: Nutek Corporation  
 EUT: Transmitter  
 MODEL: CARF-LR4  
 RATING: DC 3V  
 COMMENT: 909.6 MHz

OPERATOR : Scott  
 TEST SITE : Chamber 3  
 TEST DISTANCE : 3 m  
 POLARIZATION : VERTICAL  
 TEMP/HUM : 24.4°C/45%

Data:117

2021-04-22

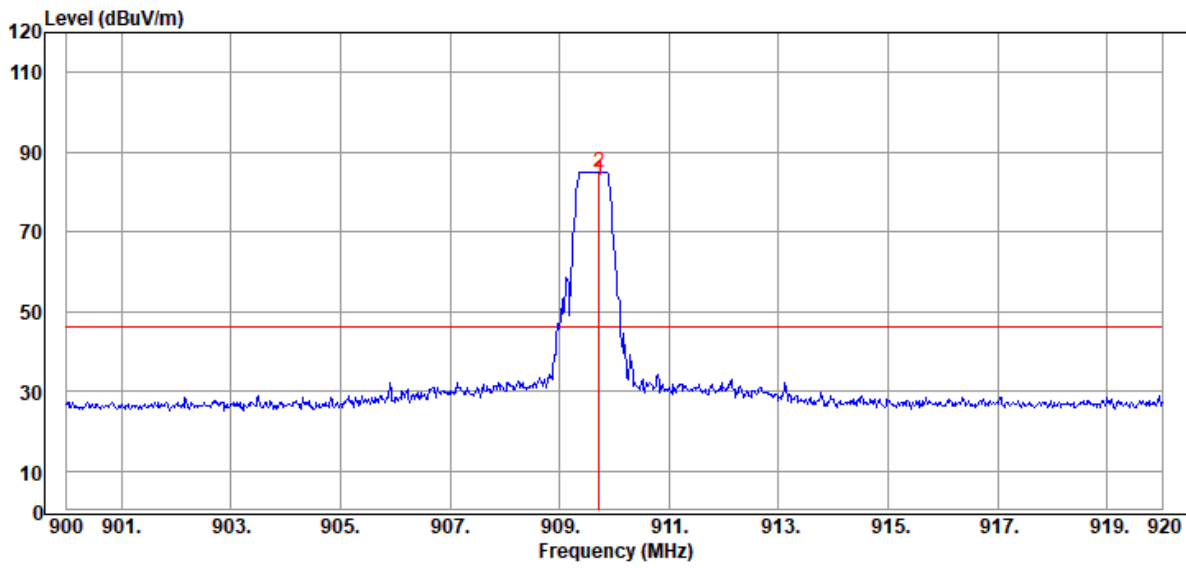

Item Mark	Freq. MHz	Reading dBuV	Factor dB/m	Level dBuV/m	Limit dBuV/m	Margin dB	Remark
1	909.720	103.35	-20.45	82.90	94.00	-11.1	QP
2	909.720	105.55	-20.45	85.10	114.00	-28.9	Peak