

# FCC TEST REPORT

**REPORT NO.:** RF941208A05

**MODEL NO.:** AMB-02

**RECEIVED:** Dec. 8, 2005

**TESTED:** Dec. 9 ~ 15, 2005

**ISSUED:** Dec. 22, 2005

**APPLICANT:** PRIMAX ELECTRONICS LTD.

**ADDRESS:** No. 669, Ruey Kuang Road, Neihu, Taipei, Taiwan.  
R.O.C.

**ISSUED BY:** Advance Data Technology Corporation

**LAB LOCATION:** No. 47, 14th Ling, Chia Pau Tsuen, Lin Kou Hsiang  
244, Taipei Hsien, Taiwan, R.O.C.

This test report consists of 65 pages in total. It may be duplicated completely for legal use with the approval of the applicant. It should not be reproduced except in full, without the written approval of our laboratory. The client should not use it to claim product endorsement by CNLA, A2LA or any government agencies. The test results in the report only apply to the tested sample.



NO. 2177-01



0528  
ILAC MRA



## TABLE OF CONTENTS

1.	CERTIFICATION .....	4
2.	SUMMARY OF TEST RESULTS .....	5
2.1	MEASUREMENT UNCERTAINTY .....	6
3.	GENERAL INFORMATION.....	7
3.1	GENERAL DESCRIPTION OF EUT.....	7
3.2	DESCRIPTION OF TEST MODES.....	8
3.2.1	CONFIGURATION OF SYSTEM UNDER TEST .....	9
3.2.2	TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL .....	10
3.3.3	GENERAL DESCRIPTION OF APPLIED STANDARDS .....	12
3.3.4	DESCRIPTION OF SUPPORT UNITS.....	12
4.	TEST TYPES AND RESULTS.....	13
4.1	CONDUCTED EMISSION MEASUREMENT .....	13
4.1.1	LIMITS OF CONDUCTED EMISSION MEASUREMENT.....	13
4.1.2	TEST INSTRUMENTS .....	13
4.1.3	TEST PROCEDURES.....	14
4.1.4	DEVIATION FROM TEST STANDARD .....	14
4.1.5	TEST SETUP .....	15
4.1.6	EUT OPERATING CONDITIONS.....	15
4.1.7	TEST RESULTS.....	16
4.2	RADIATED EMISSION MEASUREMENT .....	28
4.2.1	LIMITS OF RADIATED EMISSION MEASUREMENT.....	28
4.2.2	TEST INSTRUMENTS .....	29
4.2.3	TEST PROCEDURES.....	30
4.2.4	DEVIATION FROM TEST STANDARD .....	30
4.2.5	TEST SETUP .....	31
4.2.6	EUT OPERATING CONDITIONS.....	31
4.2.7	TEST RESULTS.....	32
4.3	NUMBER OF HOPPING FREQUENCY USED .....	37
4.3.1	LIMIT OF HOPPING FREQUENCY USED .....	37
4.3.2	TEST INSTRUMENTS .....	37
4.3.3	TEST PROCEDURES.....	37
4.3.4	DEVIATION FROM TEST STANDARD .....	38
4.3.5	TEST SETUP .....	38
4.3.6	TEST RESULTS.....	38
4.4	DWELL TIME ON EACH CHANNEL .....	40
4.4.1	LIMIT OF DWELL TIME USED .....	40
4.4.2	TEST INSTRUMENTS .....	40
4.4.3	TEST PROCEDURES.....	40
4.4.4	DEVIATION FROM TEST STANDARD .....	40
4.4.5	TEST SETUP .....	41
4.4.6	TEST RESULTS.....	41
4.5	CHANNEL BANDWIDTH.....	45
4.5.1	LIMITS OF CHANNEL BANDWIDTH.....	45
4.5.2	TEST INSTRUMENTS .....	45



- 4.5.3 TEST PROCEDURE ..... 45
- 4.5.4 DEVIATION FROM TEST STANDARD ..... 46
- 4.5.5 TEST SETUP ..... 46
- 4.5.6 EUT OPERATING CONDITION ..... 46
- 4.5.7 TEST RESULTS ..... 46
- 4.6 HOPPING CHANNEL SEPARATION ..... 49
- 4.6.1 LIMIT OF HOPPING CHANNEL SEPARATION ..... 49
- 4.6.2 TEST INSTRUMENTS ..... 49
- 4.6.3 TEST PROCEDURES ..... 49
- 4.6.4 DEVIATION FROM TEST STANDARD ..... 50
- 4.6.5 TEST SETUP ..... 50
- 4.6.6 TEST RESULTS ..... 50
- 4.7 MAXIMUM PEAK OUTPUT POWER ..... 53
- 4.7.1 LIMITS OF MAXIMUM PEAK OUTPUT POWER MEASUREMENT ..... 53
- 4.7.2 TEST INSTRUMENTS ..... 53
- 4.7.3 TEST PROCEDURES ..... 53
- 4.7.4 DEVIATION FROM TEST STANDARD ..... 53
- 4.7.5 TEST SETUP ..... 54
- 4.7.6 EUT OPERATING CONDITION ..... 54
- 4.7.7 TEST RESULTS ..... 54
- 4.8 BAND EDGES MEASUREMENT ..... 55
- 4.8.1 LIMITS OF BAND EDGES MEASUREMENT ..... 55
- 4.8.2 TEST INSTRUMENTS ..... 55
- 4.8.3 TEST PROCEDURE ..... 55
- 4.8.4 DEVIATION FROM TEST STANDARD ..... 55
- 4.8.5 EUT OPERATING CONDITION ..... 55
- 4.8.6 TEST RESULTS ..... 56
- 4.9 ANTENNA REQUIREMENT ..... 59
- 4.9.1 STANDARD APPLICABLE ..... 59
- 4.9.2 ANTENNA CONNECTED CONSTRUCTION ..... 59
- 5. PHOTOGRAPHS OF THE TEST CONFIGURATION ..... 60
- 6. INFORMATION ON THE TESTING LABORATORIES ..... 64
- APPENDIX-A ..... A-1



## 1. CERTIFICATION

**PRODUCT :** Bluetooth Mouse  
**BRAND NAME :** Targus  
**MODEL NO. :** AMB-02  
**APPLICANT :** PRIMAX ELECTRONICS LTD.  
**TESTED :** Dec. 9 ~ 15, 2005  
**TEST SAMPLE :** ENGINEERING SAMPLE  
**STANDARDS :** FCC Part 15, Subpart C (Section 15.247)  
ANSI C63.4: 2003

The above equipment has been tested by **Advance Data Technology Corporation**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's EMC characteristics under the conditions specified in this report.

**PREPARED BY :** Annie Chang , **DATE:** Dec. 22, 2005  
( Annie Chang )

**TECHNICAL**  
**ACCEPTANCE :** Ken Liu , **DATE:** Dec. 22, 2005  
Responsible for RF  
( Ken Liu )

**APPROVED BY :** Cody Chang , **DATE:** Dec. 22, 2005  
( Cody Chang / Deputy Manager )

## 2. SUMMARY OF TEST RESULTS

The EUT has been tested according to the following specifications:

<b>APPLIED STANDARD: FCC Part 15, Subpart C</b>			
<b>STANDARD SECTION</b>	<b>TEST TYPE AND LIMIT</b>	<b>RESULT</b>	<b>REMARK</b>
15.207	AC Power Conducted Emission	PASS	Meet the requirement of limit Minimum passing margin is -13.31 dB at 0.175 MHz
15.247(a)(1) (iii)	Number of Hopping Frequency Used Spec.: At least 15 channels	PASS	Meet the requirement of limit.
15.247(a)(1) (iii)	Dwell Time on Each Channel Spec. : Max. 0.4 second within 31.6 second	PASS	Meet the requirement of limit.
15.247(a)(1)	1. Hopping Channel Separation Spec. : Min. 25 kHz or 20 dB bandwidth, whichever is greater (see Note 1) 2. Spectrum Bandwidth of a Frequency Hopping Sequence Spread Spectrum System	PASS	Meet the requirement of limit.
15.247(b)	Maximum Peak Output Power Spec.: max. 30dBm (see Note 1)	PASS	Meet the requirement of limit.
15.247(d)	Transmitter Radiated Emissions Spec.: Table 15.209	PASS	Meet the requirement of limit Minimum passing margin is -1.12 dB at 146.40 MHz
15.247(d)	Band Edge Measurement	PASS	Meet the requirement of limit.

**NOTE:** If The Frequency Hopping System operating in 2400-2483.5MHz band and the output power less than 125mW. The hopping channel carrier frequencies separated by a minimum of 25kHz or two-thirds of the 20dB bandwidth of hopping channel whichever is greater.

## 2.1 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4:

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of  $k=2$ .

Measurement	Frequency	Uncertainty
Conducted emissions	9kHz~30MHz	2.44 dB
Radiated emissions	30MHz ~ 200MHz (Horizontal)	3.47 dB
	30MHz ~ 200MHz (Vertical)	3.62 dB
	200MHz ~1000MHz (Horizontal)	3.64 dB
	200MHz ~1000MHz (Vertical)	3.62 dB



### 3. GENERAL INFORMATION

#### 3.1 GENERAL DESCRIPTION OF EUT

<b>PRODUCT</b>	Bluetooth Mouse
<b>MODEL NO.</b>	AMB-02
<b>POWER SUPPLY</b>	3Vdc from AAA battery x2 (for Transmission mode) 5Vdc from host equipment (for Charging mode)
<b>MODULATION TYPE</b>	GFSK
<b>MODULATION TECHNOLOGY</b>	FHSS
<b>TRANSFER RATE</b>	723Kbps
<b>FREQUENCY RANGE</b>	2402 MHz ~ 2480 MHz
<b>NUMBER OF CHANNEL</b>	79
<b>OUTPUT POWER</b>	1.374mW
<b>ANTENNA TYPE</b>	Micro String Antenna with -0.9dBi gain
<b>DATA CABLE</b>	1.3m USB cable (for Charging mode)
<b>I/O PORTS</b>	N/A

**NOTE:**

1. The EUT is a wireless Mouse, with Bluetooth technology.
2. The above EUT information was declared by the manufacturer and for more detailed features description, please refer to the manufacturer's specifications or User's Manual.

### 3.2 DESCRIPTION OF TEST MODES


79 channels are provided to this EUT:

CHANNEL	FREQ. (MHz)	CHANNEL	FREQ. (MHz)	CHANNEL	FREQ. (MHz)	CHANNEL	FREQ. (MHz)
0	2402	20	2422	40	2442	60	2462
1	2403	21	2423	41	2443	61	2463
2	2404	22	2424	42	2444	62	2464
3	2405	23	2425	43	2445	63	2465
4	2406	24	2426	44	2446	64	2466
5	2407	25	2427	45	2447	65	2467
6	2408	26	2428	46	2448	66	2468
7	2409	27	2429	47	2449	67	2469
8	2410	28	2430	48	2450	68	2470
9	2411	29	2431	49	2451	69	2471
10	2412	30	2431	50	2452	70	2472
11	2413	31	2433	51	2453	71	2473
12	2414	32	2434	52	2454	72	2474
13	2415	33	2435	53	2455	73	2475
14	2416	34	2436	54	2456	74	2476
15	2417	35	2437	55	2457	75	2477
16	2418	36	2438	56	2458	76	2478
17	2419	37	2439	57	2459	77	2479
18	2420	38	2440	58	2460	78	2480
19	2421	39	2441	59	2461		



### 3.2.1 CONFIGURATION OF SYSTEM UNDER TEST


#### For Mode A:

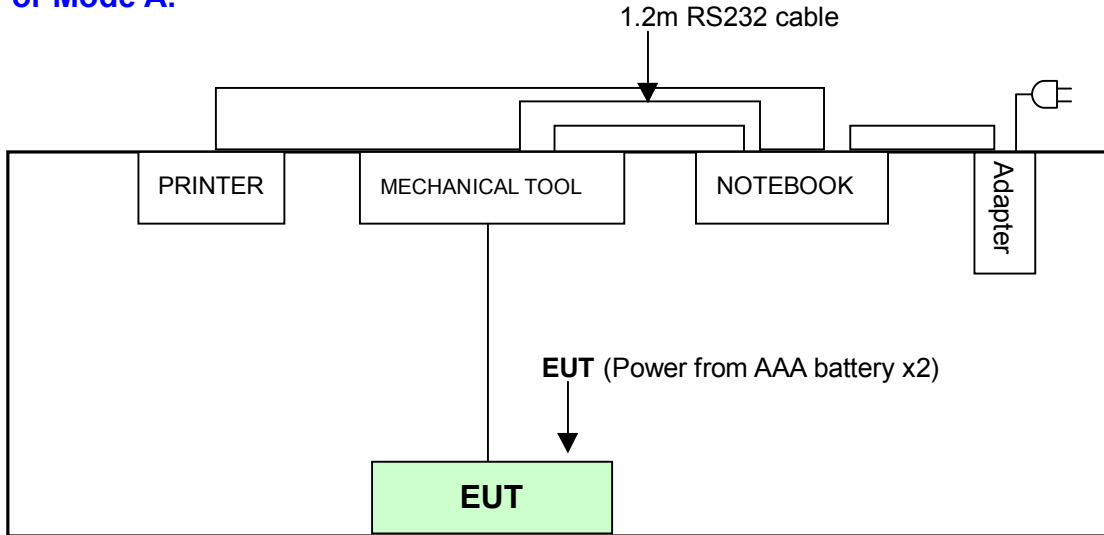

**Note:**

EUT has no build-in test mode available, a EUT control module was supplied by the manufacture during the test to control the EUT output channel and transmission mode.

#### For Mode B:

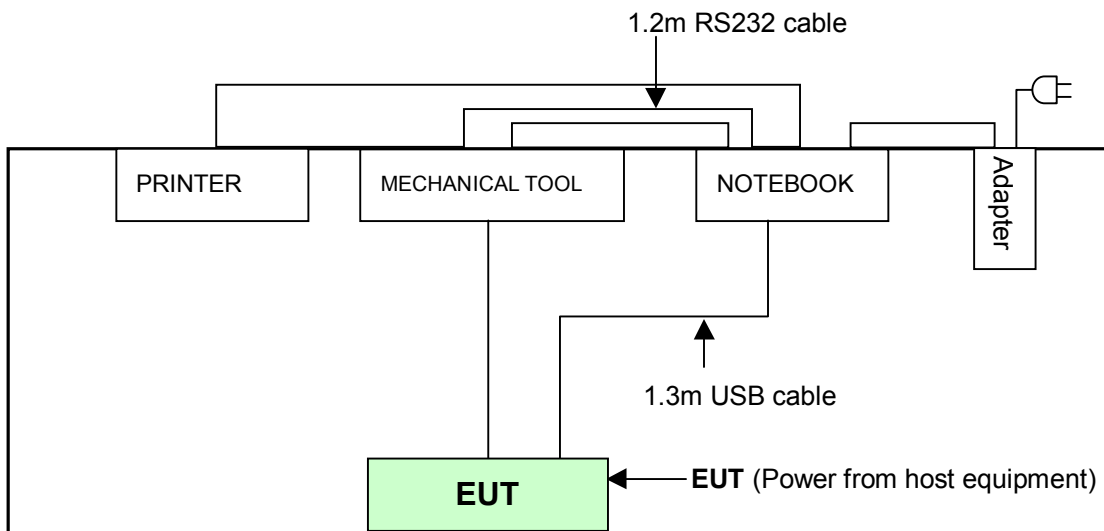



### 3.2.2 TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL

EUT CONFIGURE MODE	Applicable to				Description
	PLC	RE<1G	RE≥1G	APCM	
A	√	√	√	√	Transmission mode (Powered from batteries)
B	√	√	-	-	Charging mode (Powered from host equipment)

Where **PLC**: Power Line Conducted Emission                      **RE<1G**: Radiated Emission below 1GHz  
**RE≥1G**: Radiated Emission above 1GHz                      **APCM**: Antenna Port Conducted Measurement

**POWER LINE CONDUCTED EMISSION TEST:**

Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	PACKET TYPE
A	0 to 78	0, 39, 78	FHSS	GFSK	DH5
B	0 to 78	0, 39, 78	FHSS	GFSK	DH5

**RADIATED EMISSION TEST (BELOW 1 GHz):**

Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations and packet types.

Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	PACKET TYPE
A	0 to 78	78	FHSS	GFSK	DH5
B	0 to 78	78	FHSS	GFSK	DH5

**RADIATED EMISSION TEST (ABOVE 1 GHz):**

Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations and packet types.

Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	PACKET TYPE
A	0 to 78	0, 39, 78	FHSS	GFSK	DH5



**BANDEDGE MEASUREMENT:**

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations and packet types.
- Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	PACKET TYPE
A	0 to 78	0, 78	FHSS	GFSK	DH5

**ANTENNA PORT CONDUCTED MEASUREMENT:**

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations and packet types.
- Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	PACKET TYPE
A	0 to 78	0, 39, 78	FHSS	GFSK	DH5



### 3.3.3 GENERAL DESCRIPTION OF APPLIED STANDARDS

The EUT is a Bluetooth Mouse. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

#### FCC Part 15, Subpart C. (15.247)

#### ANSI C63.4- 2003

All test items have been performed and recorded as per the above standards.

**NOTE:** The EUT is also considered as a kind of computer peripheral, because the connection to computer is necessary for typical use. It has been verified to comply with the requirements of FCC Part 15, Subpart B, Class B (DoC). The test report has been issued separately.

### 3.3.4 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

NO.	PRODUCT	BRAND	MODEL NO.	SERIAL NO.	FCC ID
1	NOTEBOOK COMPUTER	DELL	PP05L	20375526736	FCC DoC Approved
2	PRINTER	EPSON	LQ-300+	DCGY017054	FCC DoC Approved
3	MECHANICAL TOOL	ADT	N/A	N/A	N/A

NO.	SIGNAL CABLE DESCRIPTION OF THE ABOVE SUPPORT UNITS
1	N/A
2	1.8m braid shielded wire, terminated with DB25 and Centronics connector via metallic frame, w/o core
3	1.2m RS232 cable, 0.5m USB cable

**NOTE:** All power cords of the above support units are non-shielded (1.8m).

## 4. TEST TYPES AND RESULTS

### 4.1 CONDUCTED EMISSION MEASUREMENT

#### 4.1.1 LIMITS OF CONDUCTED EMISSION MEASUREMENT

FREQUENCY OF EMISSION (MHz)	CONDUCTED LIMIT (dB $\mu$ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56	56 to 46
0.5-5	56	46
5-30	60	50

**NOTE:**

1. The lower limit shall apply at the transition frequencies.
2. All emanations from a class A/B digital device or system, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strengths specified above.

#### 4.1.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED UNTIL
ROHDE & SCHWARZ Test Receiver	ESCS 30	838251/021	Nov. 23, 2006
ROHDE & SCHWARZ Artificial Mains Network (for EUT)	ESH3-Z5	100218	Nov. 22, 2006
LISN With Adapter (for EUT)	AD10	C10Ada-001	Nov. 22, 2006
ROHDE & SCHWARZ Artificial Mains Network (for peripherals)	ESH3-Z5	100219	Nov. 22, 2006
ROHDE & SCHWARZ Artificial Mains Network (for peripherals)	ESH3-Z5	100220	Nov. 22, 2006
Software	ADT_Cond_V7.3.2	NA	NA
Software	ADT_ISN_V7.3.2	NA	NA
RF cable (JYEBAO)	5D-FB	Cable-C10.01	Apr. 05, 2006
SUHNER Terminator (For ROHDE & SCHWARZ LISN)	65BNC-5001	E1-010773	Mar. 04, 2006

- NOTE: 1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.  
 2. The test was performed in ADT Shielded Room No. 10.  
 3. The VCCI Site Registration No. C-1852.




### **4.1.3 TEST PROCEDURES**

- a. The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- c. The frequency range from 150kHz to 30MHz was searched. Emission levels under Limit - 20dB was not recorded.

### **4.1.4 DEVIATION FROM TEST STANDARD**

No deviation.

### 4.1.5 TEST SETUP

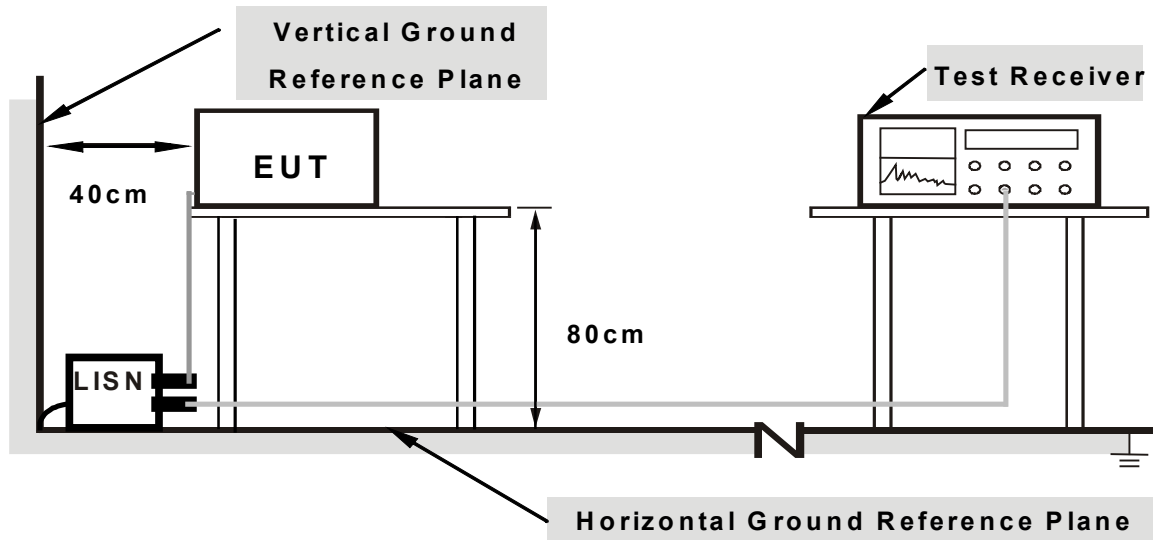

**Note: 1. Support units were connected to second LISN.**

**2. Both of LISNs (AMN) are 80 cm from EUT and at least 80 from other units and other metal planes**

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.

### 4.1.6 EUT OPERATING CONDITIONS

#### For Mode A:

- Connected the EUT to the notebook system via the controlled band and placed on a testing table.
- The notebook system ran a test program (provided by manufacturer) to enable EUT under transmission/receiving condition continuously at specific channel frequency.
- The notebook system sent "H" messages to its screen.
- The notebook system sent "H" messages to printer and the printer prints them out.

#### For Mode B:

Set the EUT under charging mode.




### 4.1.7 TEST RESULTS

#### Conducted Worst-Case Data (Mode A: Transmission Mode)

EUT	Bluetooth Mouse	MEASUREMENT DETAIL	
CHANNEL	Channel 0	MODEL NO.	AMB-02
INPUT POWER (SYSTEM)	120Vac, 60 Hz	MODULATION TYPE	GFSK
ENVIRONMENTAL CONDITIONS	17deg. C, 65%RH, 1010hPa	6dB BANDWIDTH	9 kHz
TEST MODE	Mode A	PHASE	Line 1
TESTED BY	Jamison Chan		

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
			1	0.173	0.20	50.64	-	50.84	-	64.79
2	0.233	0.20	43.55	-	43.75	-	62.33	52.33	-18.58	-
3	1.977	0.30	36.03	-	36.33	-	56.00	46.00	-19.67	-
4	3.723	0.47	36.68	-	37.15	-	56.00	46.00	-18.85	-
5	10.660	0.83	34.84	-	35.67	-	60.00	50.00	-24.33	-
6	18.496	1.21	28.84	-	30.05	-	60.00	50.00	-29.95	-

- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
  2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
  3. The emission levels of other frequencies were very low against the limit.
  4. Margin value = Emission level - Limit value
  5. Correction factor = Insertion loss + Cable loss
  6. Emission Level = Correction Factor + Reading Value.

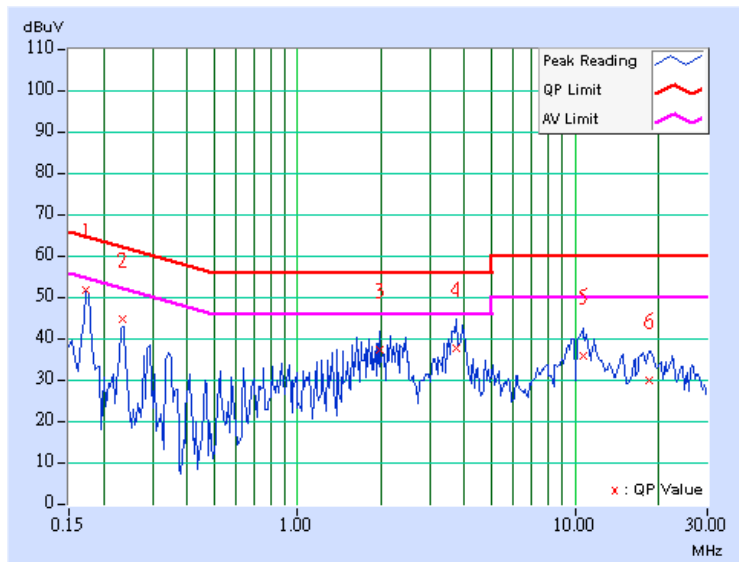






<b>EUT</b>	Bluetooth Mouse	<b>MEASUREMENT DETAIL</b>	
<b>CHANNEL</b>	Channel 0	<b>MODEL NO.</b>	AMB-02
<b>INPUT POWER (SYSTEM)</b>	120Vac, 60 Hz	<b>MODULATION TYPE</b>	GFSK
<b>ENVIRONMENTAL CONDITIONS</b>	17deg. C, 65%RH, 1010hPa	<b>6dB BANDWIDTH</b>	9 kHz
<b>TEST MODE</b>	Mode A	<b>PHASE</b>	Line 2
<b>TESTED BY</b>	Jamison Chan		

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
			1	0.175	0.20	51.22	-	51.42	-	64.73
2	0.232	0.20	43.91	-	44.11	-	62.38	52.38	-18.27	-
3	2.098	0.11	35.55	-	35.66	-	56.00	46.00	-20.34	-
4	3.898	0.29	36.24	-	36.53	-	56.00	46.00	-19.47	-
5	11.242	0.57	31.89	-	32.46	-	60.00	50.00	-27.54	-
6	17.406	0.90	26.24	-	27.14	-	60.00	50.00	-32.86	-

- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
  2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
  3. The emission levels of other frequencies were very low against the limit.
  4. Margin value = Emission level - Limit value
  5. Correction factor = Insertion loss + Cable loss
  6. Emission Level = Correction Factor + Reading Value.

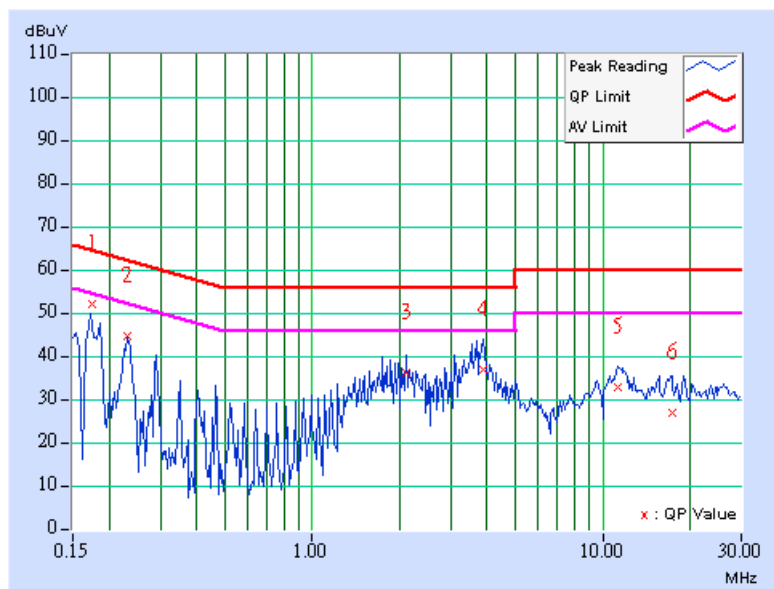




<b>EUT</b>	Bluetooth Mouse	<b>MEASUREMENT DETAIL</b>	
<b>CHANNEL</b>	Channel 39	<b>MODEL NO.</b>	AMB-02
<b>INPUT POWER (SYSTEM)</b>	120Vac, 60 Hz	<b>MODULATION TYPE</b>	GFSK
<b>ENVIRONMENTAL CONDITIONS</b>	17deg. C, 65%RH, 1010hPa	<b>6dB BANDWIDTH</b>	9 kHz
<b>TEST MODE</b>	Mode A	<b>PHASE</b>	Line 1
<b>TESTED BY</b>	Jamison Chan		

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
			1	0.173	0.20	50.77	-	50.97	-	64.79
2	0.233	0.20	44.10	-	44.30	-	62.33	52.33	-18.03	-
3	1.979	0.30	37.50	-	37.80	-	56.00	46.00	-18.20	-
4	3.728	0.47	40.90	-	41.37	-	56.00	46.00	-14.63	-
5	10.660	0.83	35.06	-	35.89	-	60.00	50.00	-24.11	-
6	18.496	1.21	27.75	-	28.96	-	60.00	50.00	-31.04	-

- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
  2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
  3. The emission levels of other frequencies were very low against the limit.
  4. Margin value = Emission level - Limit value
  5. Correction factor = Insertion loss + Cable loss
  6. Emission Level = Correction Factor + Reading Value.

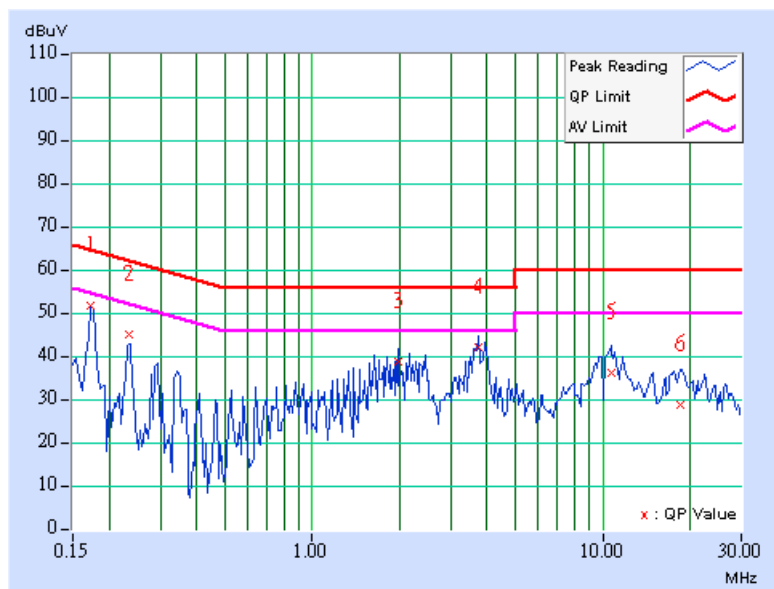




<b>EUT</b>	Bluetooth Mouse	<b>MEASUREMENT DETAIL</b>	
<b>CHANNEL</b>	Channel 39	<b>MODEL NO.</b>	AMB-02
<b>INPUT POWER (SYSTEM)</b>	120Vac, 60 Hz	<b>MODULATION TYPE</b>	GFSK
<b>ENVIRONMENTAL CONDITIONS</b>	17deg. C, 65%RH, 1010hPa	<b>6dB BANDWIDTH</b>	9 kHz
<b>TEST MODE</b>	Mode A	<b>PHASE</b>	Line 2
<b>TESTED BY</b>	Jamison Chan		

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
			1	0.173	0.20	50.44	-	50.64	-	64.79
2	0.232	0.20	43.93	-	44.13	-	62.38	52.38	-18.25	-
3	1.922	0.10	36.55	-	36.65	-	56.00	46.00	-19.35	-
4	3.727	0.27	36.31	-	36.58	-	56.00	46.00	-19.42	-
5	11.242	0.57	30.54	-	31.11	-	60.00	50.00	-28.89	-
6	18.480	0.94	27.65	-	28.59	-	60.00	50.00	-31.41	-

- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
  2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
  3. The emission levels of other frequencies were very low against the limit.
  4. Margin value = Emission level - Limit value
  5. Correction factor = Insertion loss + Cable loss
  6. Emission Level = Correction Factor + Reading Value.

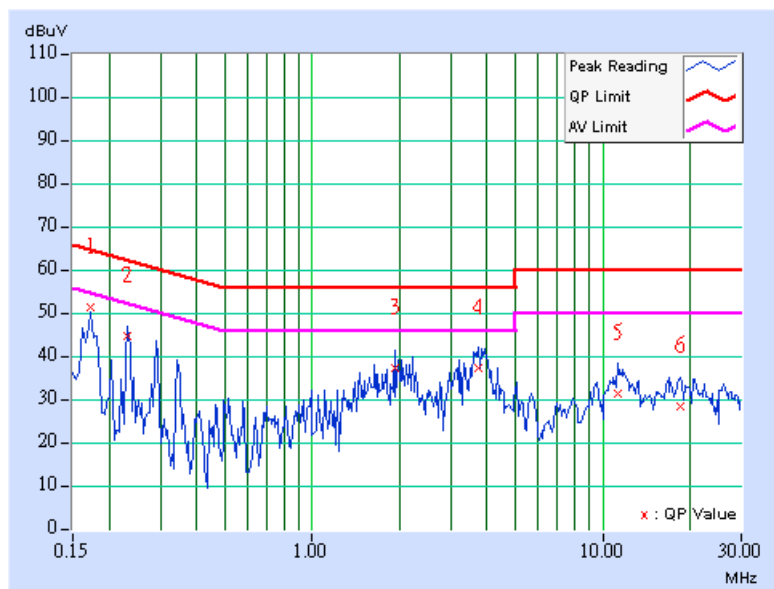




<b>EUT</b>	Bluetooth Mouse	<b>MEASUREMENT DETAIL</b>	
<b>CHANNEL</b>	Channel 78	<b>MODEL NO.</b>	AMB-02
<b>INPUT POWER (SYSTEM)</b>	120Vac, 60 Hz	<b>MODULATION TYPE</b>	GFSK
<b>ENVIRONMENTAL CONDITIONS</b>	17deg. C, 65%RH, 1010hPa	<b>6dB BANDWIDTH</b>	9 kHz
<b>TEST MODE</b>	Mode A	<b>PHASE</b>	Line 1
<b>TESTED BY</b>	Jamison Chan		

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
			1	0.173	0.20	50.66	-	50.86	-	64.80
2	0.228	0.20	40.38	-	40.58	-	62.52	52.52	-21.94	-
3	3.324	0.43	35.75	-	36.18	-	56.00	46.00	-19.82	-
4	3.813	0.48	33.43	-	33.91	-	56.00	46.00	-22.09	-
5	10.609	0.82	34.75	-	35.57	-	60.00	50.00	-24.43	-
6	18.715	1.22	28.90	-	30.12	-	60.00	50.00	-29.88	-

- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
  2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
  3. The emission levels of other frequencies were very low against the limit.
  4. Margin value = Emission level - Limit value
  5. Correction factor = Insertion loss + Cable loss
  6. Emission Level = Correction Factor + Reading Value.

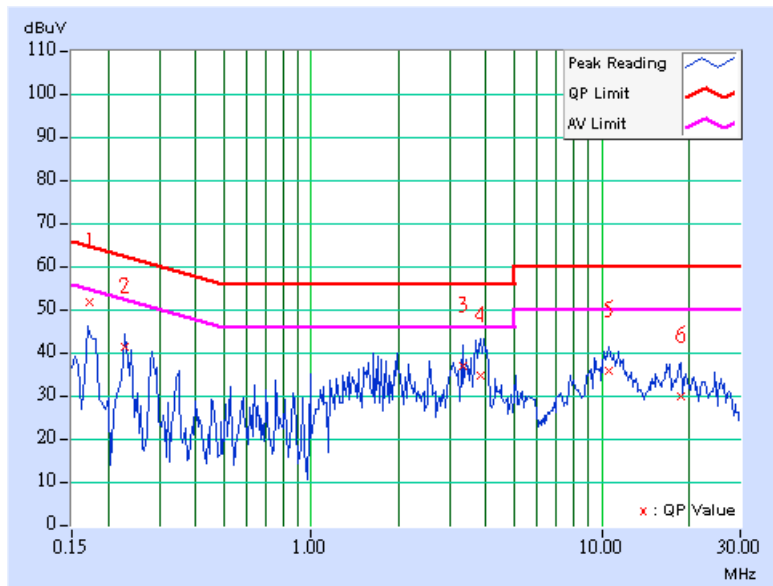




<b>EUT</b>	Bluetooth Mouse	<b>MEASUREMENT DETAIL</b>	
<b>CHANNEL</b>	Channel 78	<b>MODEL NO.</b>	AMB-02
<b>INPUT POWER (SYSTEM)</b>	120Vac, 60 Hz	<b>MODULATION TYPE</b>	GFSK
<b>ENVIRONMENTAL CONDITIONS</b>	17deg. C, 65%RH, 1010hPa	<b>6dB BANDWIDTH</b>	9 kHz
<b>TEST MODE</b>	Mode A	<b>PHASE</b>	Line 2
<b>TESTED BY</b>	Jamison Chan		

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
			1	0.175	0.20	51.22	-	51.42	-	64.73
2	0.232	0.20	44.01	-	44.21	-	62.38	52.38	-18.17	-
3	1.922	0.10	37.08	-	37.18	-	56.00	46.00	-18.82	-
4	3.732	0.27	37.80	-	38.07	-	56.00	46.00	-17.93	-
5	11.242	0.57	29.31	-	29.88	-	60.00	50.00	-30.12	-
6	18.480	0.94	27.53	-	28.47	-	60.00	50.00	-31.53	-

- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
  2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
  3. The emission levels of other frequencies were very low against the limit.
  4. Margin value = Emission level - Limit value
  5. Correction factor = Insertion loss + Cable loss
  6. Emission Level = Correction Factor + Reading Value.

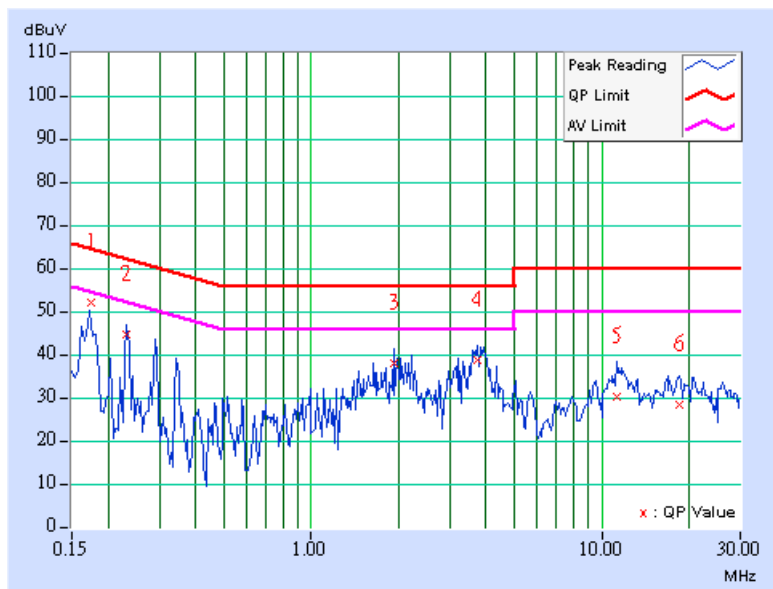




**Conducted Worst-Case Data (Mode B: Charging Mode)**

<b>EUT</b>	Bluetooth Mouse	<b>MEASUREMENT DETAIL</b>	
<b>CHANNEL</b>	Channel 0	<b>MODEL NO.</b>	AMB-02
<b>INPUT POWER (SYSTEM)</b>	120Vac, 60 Hz	<b>MODULATION TYPE</b>	GFSK
<b>ENVIRONMENTAL CONDITIONS</b>	17deg. C, 65%RH, 1010hPa	<b>6dB BANDWIDTH</b>	9 kHz
<b>TEST MODE</b>	Mode B	<b>PHASE</b>	Line 1
<b>TESTED BY</b>	Jamison Chan		

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
			1	0.173	0.20	51.04	-	51.24	-	64.79
2	0.232	0.20	43.47	-	43.67	-	62.38	52.38	-18.71	-
3	2.160	0.32	36.90	-	37.22	-	56.00	46.00	-18.78	-
4	3.500	0.45	37.59	-	38.04	-	56.00	46.00	-17.96	-
5	10.324	0.81	34.26	-	35.07	-	60.00	50.00	-24.93	-
6	19.145	1.25	28.01	-	29.26	-	60.00	50.00	-30.74	-

- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
  2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
  3. The emission levels of other frequencies were very low against the limit.
  4. Margin value = Emission level - Limit value
  5. Correction factor = Insertion loss + Cable loss
  6. Emission Level = Correction Factor + Reading Value.

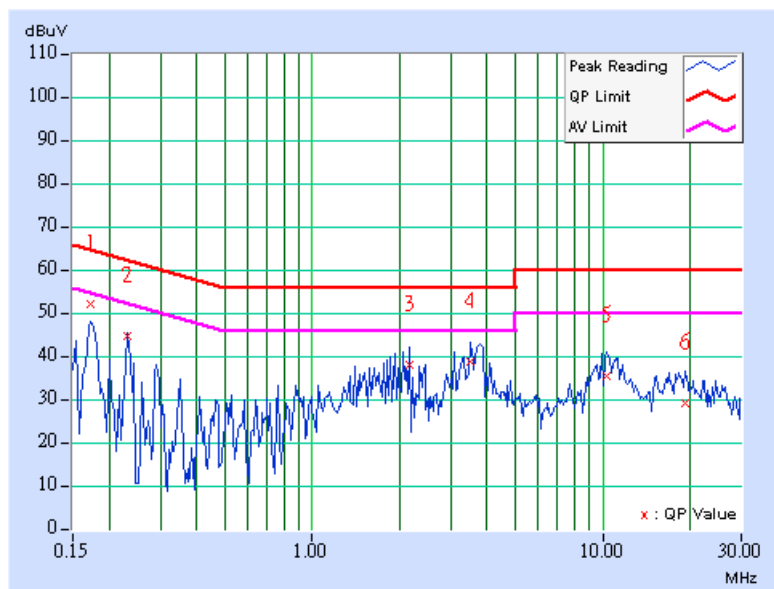




<b>EUT</b>	Bluetooth Mouse	<b>MEASUREMENT DETAIL</b>	
<b>CHANNEL</b>	Channel 0	<b>MODEL NO.</b>	AMB-02
<b>INPUT POWER (SYSTEM)</b>	120Vac, 60 Hz	<b>MODULATION TYPE</b>	GFSK
<b>ENVIRONMENTAL CONDITIONS</b>	17deg. C, 65%RH, 1010hPa	<b>6dB BANDWIDTH</b>	9 kHz
<b>TEST MODE</b>	Mode B	<b>PHASE</b>	Line 2
<b>TESTED BY</b>	Jamison Chan		

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
	1	0.173	0.20	50.48	-	50.68	-	64.79	54.79	-14.11
2	0.233	0.20	43.93	-	44.13	-	62.34	52.34	-18.21	-
3	3.445	0.24	35.60	-	35.84	-	56.00	46.00	-20.16	-
4	3.676	0.27	37.63	-	37.90	-	56.00	46.00	-18.10	-
5	11.141	0.57	31.28	-	31.85	-	60.00	50.00	-28.15	-
6	18.668	0.95	27.85	-	28.80	-	60.00	50.00	-31.20	-

- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
  2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
  3. The emission levels of other frequencies were very low against the limit.
  4. Margin value = Emission level - Limit value
  5. Correction factor = Insertion loss + Cable loss
  6. Emission Level = Correction Factor + Reading Value.

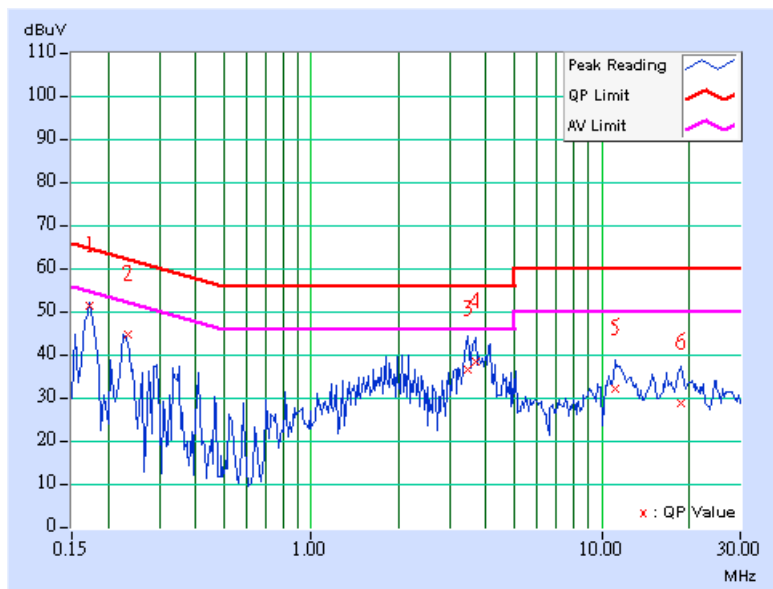




<b>EUT</b>	Bluetooth Mouse	<b>MEASUREMENT DETAIL</b>	
<b>CHANNEL</b>	Channel 39	<b>MODEL NO.</b>	AMB-02
<b>INPUT POWER (SYSTEM)</b>	120Vac, 60 Hz	<b>MODULATION TYPE</b>	GFSK
<b>ENVIRONMENTAL CONDITIONS</b>	17deg. C, 65%RH, 1010hPa	<b>6dB BANDWIDTH</b>	9 kHz
<b>TEST MODE</b>	Mode B	<b>PHASE</b>	Line 1
<b>TESTED BY</b>	Jamison Chan		

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
			1	0.176	0.20	51.14	-	51.34	-	64.67
2	0.236	0.20	42.51	-	42.71	-	62.24	52.24	-19.53	-
3	1.750	0.28	36.90	-	37.18	-	56.00	46.00	-18.82	-
4	3.965	0.50	37.85	-	38.35	-	56.00	46.00	-17.65	-
5	9.914	0.80	34.11	-	34.91	-	60.00	50.00	-25.09	-
6	11.383	0.86	35.40	-	36.26	-	60.00	50.00	-23.74	-

- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
  2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
  3. The emission levels of other frequencies were very low against the limit.
  4. Margin value = Emission level - Limit value
  5. Correction factor = Insertion loss + Cable loss
  6. Emission Level = Correction Factor + Reading Value.

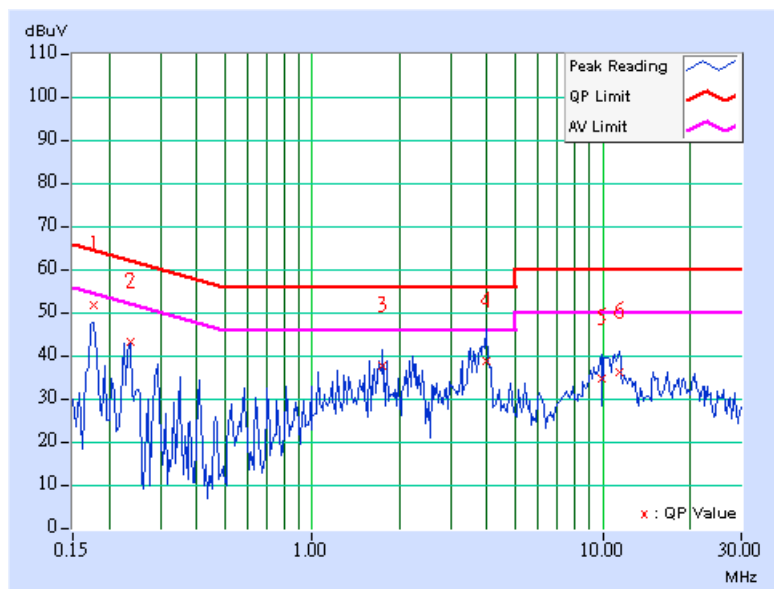






<b>EUT</b>	Bluetooth Mouse	<b>MEASUREMENT DETAIL</b>	
<b>CHANNEL</b>	Channel 39	<b>MODEL NO.</b>	AMB-02
<b>INPUT POWER (SYSTEM)</b>	120Vac, 60 Hz	<b>MODULATION TYPE</b>	GFSK
<b>ENVIRONMENTAL CONDITIONS</b>	17deg. C, 65%RH, 1010hPa	<b>6dB BANDWIDTH</b>	9 kHz
<b>TEST MODE</b>	Mode B	<b>PHASE</b>	Line 2
<b>TESTED BY</b>	Jamison Chan		

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
			1	0.173	0.20	49.90	-	50.10	-	64.79
2	0.231	0.20	43.70	-	43.90	-	62.43	52.43	-18.53	-
3	1.980	0.10	35.99	-	36.09	-	56.00	46.00	-19.91	-
4	3.910	0.29	37.98	-	38.27	-	56.00	46.00	-17.73	-
5	11.382	0.58	32.47	-	33.05	-	60.00	50.00	-26.95	-
6	18.642	0.95	27.04	-	27.99	-	60.00	50.00	-32.01	-

- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
  2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
  3. The emission levels of other frequencies were very low against the limit.
  4. Margin value = Emission level - Limit value
  5. Correction factor = Insertion loss + Cable loss
  6. Emission Level = Correction Factor + Reading Value.

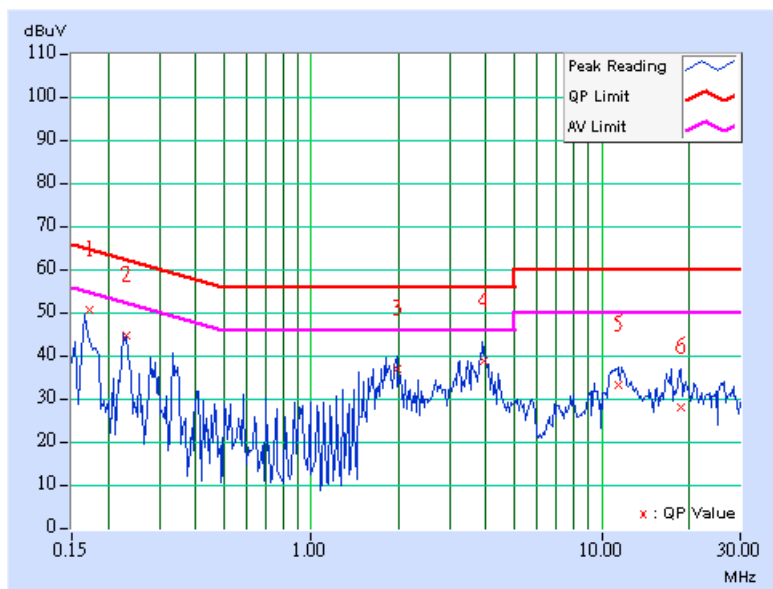




<b>EUT</b>	Bluetooth Mouse	<b>MEASUREMENT DETAIL</b>	
<b>CHANNEL</b>	Channel 78	<b>MODEL NO.</b>	AMB-02
<b>INPUT POWER (SYSTEM)</b>	120Vac, 60 Hz	<b>MODULATION TYPE</b>	GFSK
<b>ENVIRONMENTAL CONDITIONS</b>	17deg. C, 65%RH, 1010hPa	<b>6dB BANDWIDTH</b>	9 kHz
<b>TEST MODE</b>	Mode B	<b>PHASE</b>	Line 1
<b>TESTED BY</b>	Jamison Chan		

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
			1	0.170	0.20	44.86	-	45.06	-	64.98
2	0.231	0.20	43.21	-	43.41	-	62.43	52.43	-19.02	-
3	3.324	0.43	36.21	-	36.64	-	56.00	46.00	-19.36	-
4	3.962	0.50	37.78	-	38.28	-	56.00	46.00	-17.72	-
5	10.611	0.82	34.49	-	35.31	-	60.00	50.00	-24.69	-
6	18.715	1.22	29.51	-	30.73	-	60.00	50.00	-29.27	-

- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
  2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
  3. The emission levels of other frequencies were very low against the limit.
  4. Margin value = Emission level - Limit value
  5. Correction factor = Insertion loss + Cable loss
  6. Emission Level = Correction Factor + Reading Value.

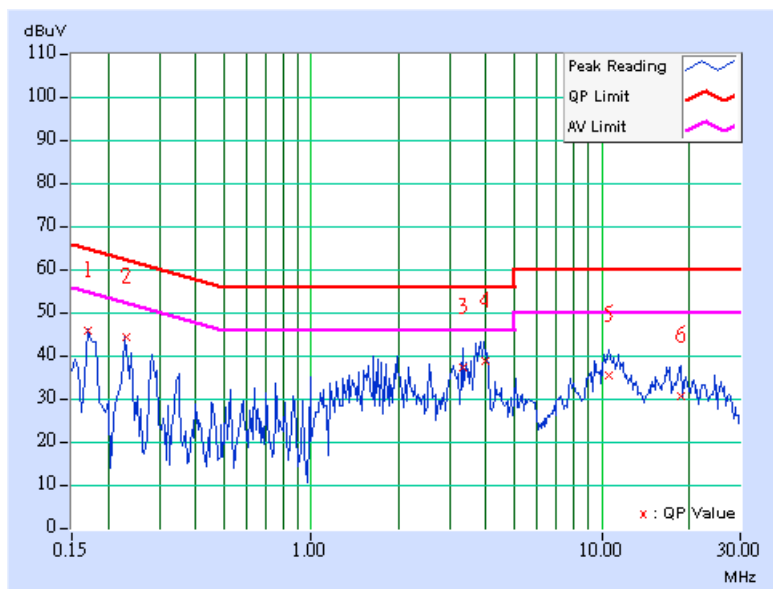




<b>EUT</b>	Bluetooth Mouse	<b>MEASUREMENT DETAIL</b>	
<b>CHANNEL</b>	Channel 78	<b>MODEL NO.</b>	AMB-02
<b>INPUT POWER (SYSTEM)</b>	120Vac, 60 Hz	<b>MODULATION TYPE</b>	GFSK
<b>ENVIRONMENTAL CONDITIONS</b>	17deg. C, 65%RH, 1010hPa	<b>6dB BANDWIDTH</b>	9 kHz
<b>TEST MODE</b>	Mode B	<b>PHASE</b>	Line 2
<b>TESTED BY</b>	Jamison Chan		

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
			1	0.175	0.20	50.33	-	50.53	-	64.74
2	0.229	0.20	42.40	-	42.60	-	62.48	52.48	-19.88	-
3	1.982	0.10	36.56	-	36.66	-	56.00	46.00	-19.34	-
4	3.902	0.29	33.36	-	33.65	-	56.00	46.00	-22.35	-
5	11.383	0.58	32.31	-	32.89	-	60.00	50.00	-27.11	-
6	17.324	0.89	25.34	-	26.23	-	60.00	50.00	-33.77	-

- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
  2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
  3. The emission levels of other frequencies were very low against the limit.
  4. Margin value = Emission level - Limit value
  5. Correction factor = Insertion loss + Cable loss
  6. Emission Level = Correction Factor + Reading Value.

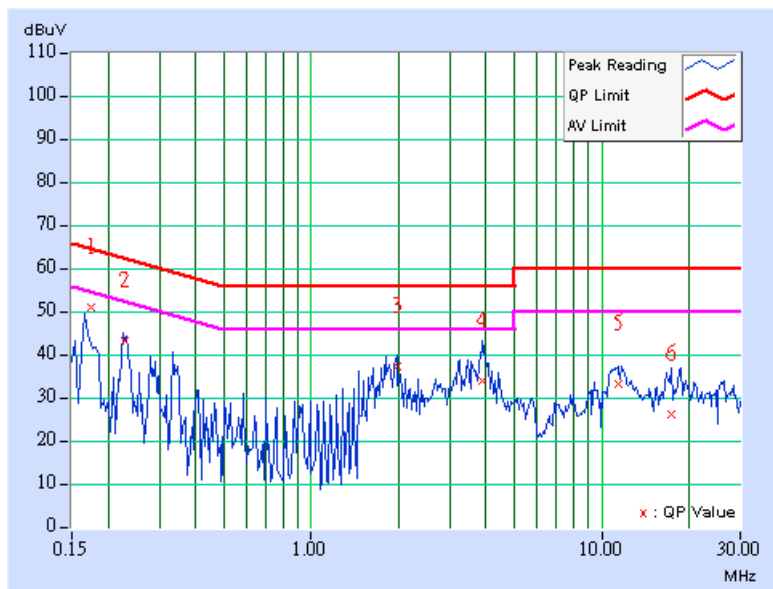



## 4.2 RADIATED EMISSION MEASUREMENT

### 4.2.1 LIMITS OF RADIATED EMISSION MEASUREMENT

Emissions radiated outside of the specified bands, shall be according to the general radiated limits in 15.209 as following:

FREQUENCIES (MHz)	FIELD STRENGTH (microvolts/meter)	MEASUREMENT DISTANCE (meters)
0.009 ~ 0.490	2400/F(kHz)	300
0.490 ~ 1.705	24000/F(kHz)	30
1.705 ~ 30.0	30	30
30 ~ 88	100	3
88 ~ 216	150	3
216 ~ 960	200	3
Above 960	500	3

**NOTE:**

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = 20 log Emission level (uV/m).
3. As shown in 15.35(b), for frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.



## 4.2.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED UNTIL
Test Receiver ROHDE & SCHWARZ	ESMI	839013/007 839379/002	Feb. 03, 2006
Spectrum Analyzer ROHDE & SCHWARZ	FSEK30	100049	Aug. 14, 2006
BILOG Antenna SCHWARZBECK	VULB9163	121	Jun. 01, 2006
HORN Antenna SCHWARZBECK	BBHA 9120D	9120D-407	Jan. 06, 2006
HORN Antenna SCHWARZBECK	BBHA 9170	BBHA 9170242	Jan. 23, 2006
Preamplifier Agilent	8449B	3008A01911	Sep. 22, 2006
RF signal cable HUBER+SUHNNER	SUCOFLEX 104	218188/218189 /231134	Apr. 19, 2006
RF signal cable Worken	8D-FB	Cable-HYCH5-02	Apr. 21, 2006
Software ADT.	ADT_Radiated_ V7.6.01	NA	NA
Antenna Tower EMCO	2070/2080	512.835.4684	NA
Antenna Tower Controller EMCO	2090	NA	NA
Turn Table EMCO	2087-2.03	NA	NA
Turn Table Controller EMCO	2090	NA	NA

- NOTE:**
1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
  2. The test was performed in HwaYa Chamber 4.
  3. The horn antenna and HP preamplifier (model: 8449B) are used only for the measurement of emission frequency above 1GHz if tested.
  4. The IC Site Registration No. is IC4924-4.



### 4.2.3 TEST PROCEDURES

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna is a broadband antenna, and its height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.


**NOTE:**

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Quasi-peak detection at frequency below 1GHz.
2. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 1 MHz for Peak detection (PK) at frequency above 1GHz.

### 4.2.4 DEVIATION FROM TEST STANDARD

No deviation

### 4.2.5 TEST SETUP

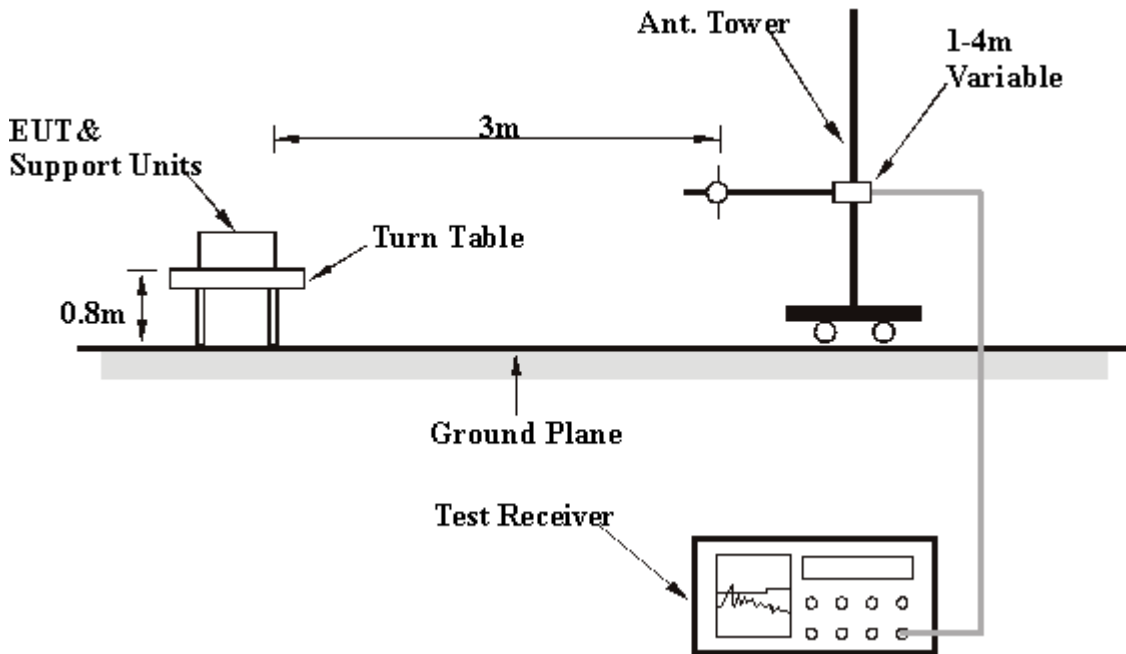

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.

### 4.2.6 EUT OPERATING CONDITIONS

Same as item 4.1.6.

## 4.2.7 TEST RESULTS

### Below 1GHz Worst-Case Data (Mode A: Transmission Mode)

EUT	Bluetooth Mouse	MEASUREMENT DETAIL	
MODEL NO.	AMB-02	FREQUENCY RANGE	Below 1 GHz
CHANNEL	78	MODULATION TYPE	GFSK
INPUT POWER	3Vdc	DETECTOR FUNCTION	Quasi-Peak
TEST MODE	Mode A	ENVIRONMENTAL CONDITIONS	15deg. C, 70% RH, 1010hPa
TESTED BY	Jamison Chan		

### ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	146.40	38.29 QP	43.50	-5.21	1.50 H	304	29.94	8.34
2	400.76	37.48 QP	46.00	-8.52	1.00 H	94	20.69	16.79
3	547.33	40.03 QP	46.00	-5.97	1.50 H	208	20.94	19.09
4	732.71	38.85 QP	46.00	-7.15	2.00 H	262	16.20	22.65
5	868.51	41.45 QP	46.00	-4.55	1.50 H	280	16.80	24.64
6	935.33	43.77 QP	46.00	-2.23	1.50 H	10	18.46	25.31

### ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	41.86	33.66 QP	40.00	-6.34	1.00 V	112	19.84	13.82
2	75.27	34.53 QP	40.00	-5.47	1.25 V	184	25.96	8.57
<b>3</b>	<b>146.40</b>	<b>42.38 QP</b>	<b>43.50</b>	<b>-1.12</b>	<b>1.00 V</b>	<b>352</b>	<b>34.03</b>	<b>8.34</b>
4	545.18	38.60 QP	46.00	-7.40	1.25 V	148	19.54	19.06
5	867.43	38.32 QP	46.00	-7.68	1.75 V	304	13.68	24.64
6	929.94	40.82 QP	46.00	-5.18	1.75 V	220	15.62	25.20

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
  2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
  3. The other emission levels were very low against the limit.
  4. Margin value = Emission level – Limit value.





**Below 1GHz Worst-Case Data (Mode B: Charging Mode)**

<b>EUT</b>	Bluetooth Mouse	<b>MEASUREMENT DETAIL</b>	
<b>MODEL NO.</b>	AMB-02	<b>FREQUENCY RANGE</b>	Below 1 GHz
<b>CHANNEL</b>	78	<b>MODULATION TYPE</b>	GFSK
<b>INPUT POWER</b>	5Vdc	<b>DETECTOR FUNCTION</b>	Quasi-Peak
<b>TEST MODE</b>	Mode B	<b>ENVIRONMENTAL CONDITIONS</b>	15deg. C, 70% RH, 1010hPa
<b>TESTED BY</b>	Jamison Chan		

**ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M**

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	133.47	38.81 QP	43.50	-4.69	1.50 H	118	30.29	8.53
2	400.76	36.72 QP	46.00	-9.28	2.00 H	112	19.93	16.79
3	664.81	37.62 QP	46.00	-8.38	1.00 H	53	16.23	21.39
4	733.79	38.67 QP	46.00	-7.33	1.00 H	112	15.98	22.69
5	867.43	40.43 QP	46.00	-5.57	1.75 H	256	15.79	24.64
6	932.10	44.40 QP	46.00	-1.60	1.00 H	334	19.16	25.24

**ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M**

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	133.47	34.80 QP	43.50	-8.70	2.00 V	178	26.28	8.53
2	399.68	35.85 QP	46.00	-10.15	1.00 V	130	19.07	16.78
3	666.97	43.96 QP	46.00	-2.04	1.50 V	70	22.57	21.39
4	733.79	40.77 QP	46.00	-5.23	1.50 V	34	18.09	22.69
5	863.12	38.39 QP	46.00	-7.61	1.25 V	70	13.74	24.65
6	933.18	42.45 QP	46.00	-3.55	1.00 V	118	17.18	25.27

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
  2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
  3. The other emission levels were very low against the limit.
  4. Margin value = Emission level – Limit value.



**1 ~ 25GHz Worst-Case Data (Mode A: Transmission Mode)**

<b>EUT</b>	Bluetooth Mouse	<b>MEASUREMENT DETAIL</b>	
<b>MODEL NO.</b>	AMB-02	<b>FREQUENCY RANGE</b>	1 ~ 25 GHz
<b>CHANNEL</b>	0	<b>MODULATION TYPE</b>	GFSK
<b>INPUT POWER</b>	3Vdc	<b>DETECTOR FUNCTION</b>	Peak(PK) Average (AV)
<b>TEST MODE</b>	Mode A	<b>ENVIRONMENTAL CONDITIONS</b>	20deg. C, 70% RH, 1006hPa
<b>TESTED BY</b>	Jamison Chan		

<b>ANTENNA POLARITY &amp; TEST DISTANCE: HORIZONTAL AT 3 M</b>								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2377.00	42.69 PK	74.00	-31.31	1.12 H	336	12.13	30.56
1	2377.00	35.73 AV	54.00	-18.27	1.12 H	336	5.17	30.56
2	*2402.00	97.01 PK			1.12 H	336	66.36	30.65
2	*2402.00	67.01 AV			1.12 H	336	36.36	30.65
3	4804.00	55.99 PK	74.00	-18.01	1.12 H	29	20.15	35.84
3	4804.00	25.99 AV	54.00	-28.01	1.12 H	29	-9.85	35.84
4	9408.00	55.92 PK	74.00	-18.08	1.68 H	12	11.57	44.35
4	9408.00	25.92 AV	54.00	-28.08	1.68 H	12	-18.43	44.35

<b>ANTENNA POLARITY &amp; TEST DISTANCE: VERTICAL AT 3 M</b>								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2377.00	38.10 PK	74.00	-35.90	1.00 V	303	7.54	30.56
1	2377.00	31.10 AV	54.00	-22.90	1.00 V	303	0.54	30.56
2	*2402.00	92.42 PK			1.00 V	303	61.77	30.65
2	*2402.00	62.42 AV			1.00 V	303	31.77	30.65
3	4804.00	59.44 PK	74.00	-14.56	1.00 V	333	23.60	35.84
3	4804.00	29.44 AV	54.00	-24.56	1.00 V	333	-6.40	35.84
4	9608.00	55.54 PK	74.00	-18.46	1.00 V	188	10.87	44.67
4	9608.00	25.54 AV	54.00	-28.46	1.00 V	188	-19.13	44.67

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
  2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
  3. The other emission levels were very low against the limit.
  4. Margin value = Emission level – Limit value.
  5. The DH5 packet was the worse case duty cycle for a transmit dwell time on a channel, based upon bluetooth theory the transmitter is on 0.625\*5 per 247 ms per channel. Therefore, the duty cycle be equal to:  $20\log(3.125/100) = -30$  dB
  6. Average value = peak reading +  $20\log(\text{duty cycle})$



<b>EUT</b>	Bluetooth Mouse	<b>MEASUREMENT DETAIL</b>	
<b>MODEL NO.</b>	AMB-02	<b>FREQUENCY RANGE</b>	1 ~ 25 GHz
<b>CHANNEL</b>	39	<b>MODULATION TYPE</b>	GFSK
<b>INPUT POWER</b>	3Vdc	<b>DETECTOR FUNCTION</b>	Peak(PK) Average (AV)
<b>TEST MODE</b>	Mode A	<b>ENVIRONMENTAL CONDITIONS</b>	20deg. C, 70% RH, 1006hPa
<b>TESTED BY</b>	Jamison Chan		

<b>ANTENNA POLARITY &amp; TEST DISTANCE: HORIZONTAL AT 3 M</b>								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2441.00	97.91 PK			1.06 H	0	67.13	30.78
1	*2441.00	67.91 AV			1.06 H	0	37.13	30.78
2	4882.00	56.44 PK	74.00	-17.56	1.08 H	350	20.39	36.05
2	4882.00	26.44 AV	54.00	-27.56	1.08 H	350	-9.61	36.05
3	9764.00	55.56 PK	74.00	-18.44	1.07 H	2	10.54	45.01
3	9764.00	25.56 AV	54.00	-28.44	1.07 H	2	-19.46	45.01

<b>ANTENNA POLARITY &amp; TEST DISTANCE: VERTICAL AT 3 M</b>								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2441.00	90.39 PK			1.27 V	38	59.61	30.78
1	*2441.00	60.39 AV			1.27 V	38	29.61	30.78
2	4882.00	48.54 PK	74.00	-25.46	1.32 V	87	12.49	36.05
2	4882.00	18.54 AV	54.00	-35.46	1.32 V	87	-17.51	36.05
3	9764.00	58.13 PK	74.00	-15.87	1.33 V	37	13.11	45.01
3	9764.00	28.13 AV	54.00	-25.87	1.33 V	37	-16.89	45.01

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
  2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
  3. The other emission levels were very low against the limit.
  4. Margin value = Emission level – Limit value.
  5. The DH5 packet was the worse case duty cycle for a transmit dwell time on a channel, based upon bluetooth theory the transmitter is on 0.625\*5 per 247 ms per channel. Therefore, the duty cycle be equal to:  $20\log(3.125/100) = -30$  dB
  6. Average value = peak reading +  $20\log(\text{duty cycle})$



<b>EUT</b>	Bluetooth Mouse	<b>MEASUREMENT DETAIL</b>	
<b>MODEL NO.</b>	AMB-02	<b>FREQUENCY RANGE</b>	1 ~ 25 GHz
<b>CHANNEL</b>	78	<b>MODULATION TYPE</b>	GFSK
<b>INPUT POWER</b>	3Vdc	<b>DETECTOR FUNCTION</b>	Peak(PK) Average (AV)
<b>TEST MODE</b>	Mode A	<b>ENVIRONMENTAL CONDITIONS</b>	20deg. C, 70% RH, 1006hPa
<b>TESTED BY</b>	Jamison Chan		

<b>ANTENNA POLARITY &amp; TEST DISTANCE: HORIZONTAL AT 3 M</b>								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2480.00	97.82 PK			1.36 H	355	66.91	30.91
1	*2480.00	67.82 AV			1.36 H	355	36.91	30.91
2	2484.50	48.83 PK	74.00	-25.17	1.36 H	355	17.90	30.93
2	2484.50	42.76 AV	54.00	-11.24	1.36 H	355	11.83	30.93
3	4960.00	54.79 PK	74.00	-19.21	1.03 H	4	18.51	36.28
3	4960.00	24.79 AV	54.00	-29.21	1.03 H	4	-11.49	36.28
4	9920.00	56.89 PK	74.00	-17.11	1.67 H	1	11.26	45.63
4	9920.00	26.89 AV	54.00	-27.11	1.67 H	1	-18.74	45.63

<b>ANTENNA POLARITY &amp; TEST DISTANCE: VERTICAL AT 3 M</b>								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2480.00	89.78 PK			1.22 V	40	58.87	30.91
1	*2480.00	59.78 AV			1.22 V	40	28.87	30.91
2	2484.50	40.79 PK	74.00	-33.21	1.22 V	40	9.86	30.93
2	2484.50	34.67 AV	54.00	-19.33	1.22 V	40	3.74	30.93
3	4960.00	52.73 PK	74.00	-21.27	1.33 V	317	16.45	36.28
3	4960.00	22.73 AV	54.00	-31.27	1.33 V	317	-13.55	36.28
4	9920.00	56.76 PK	74.00	-17.24	1.33 V	70	11.13	45.63
4	9920.00	26.76 AV	54.00	-27.24	1.33 V	70	-18.87	45.63

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
  2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
  3. The other emission levels were very low against the limit.
  4. Margin value = Emission level – Limit value.
  5. The DH5 packet was the worse case duty cycle for a transmit dwell time on a channel, based upon bluetooth theory the transmitter is on 0.625\*5 per 247 ms per channel. Therefore, the duty cycle be equal to:  $20\log(3.125/100) = -30$  dB
  6. Average value = peak reading +  $20\log(\text{duty cycle})$



### 4.3 NUMBER OF HOPPING FREQUENCY USED

#### 4.3.1 LIMIT OF HOPPING FREQUENCY USED

At least 15 channels frequencies, and should be equally spaced.

#### 4.3.2 TEST INSTRUMENTS

Description & Manufacturer	Model No.	Serial No.	Calibrated Until
SPECTRUM ANALYZER	FSP 40	100036	Mar 20. 2006

**NOTE:** The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

#### 4.3.3 TEST PROCEDURES

- a. Check the calibration of the measuring instrument (SA) using either an internal calibrator or a known signal from an external generator.
- b. Turn on the EUT and connect its antenna terminal to measurement via a low loss cable. Then set it to any one measured frequency within its operating range and make sure the instrument is operated in its linear range.
- c. Set the SA on MaxHold Mode, and then keep the EUT in hopping mode. Record all the signals from each channel until each one has been recorded.
- d. Set the SA on View mode and then plot the result on SA screen.
- e. Repeat above procedures until all frequencies measured were complete.

#### 4.3.4 DEVIATION FROM TEST STANDARD



No deviation.

#### 4.3.5 TEST SETUP



#### 4.3.6 TEST RESULTS

There are 79 hopping frequencies in the hopping mode. Please refer to next one page for the test result. On the plots, it shows that the hopping frequencies are equally spaced.

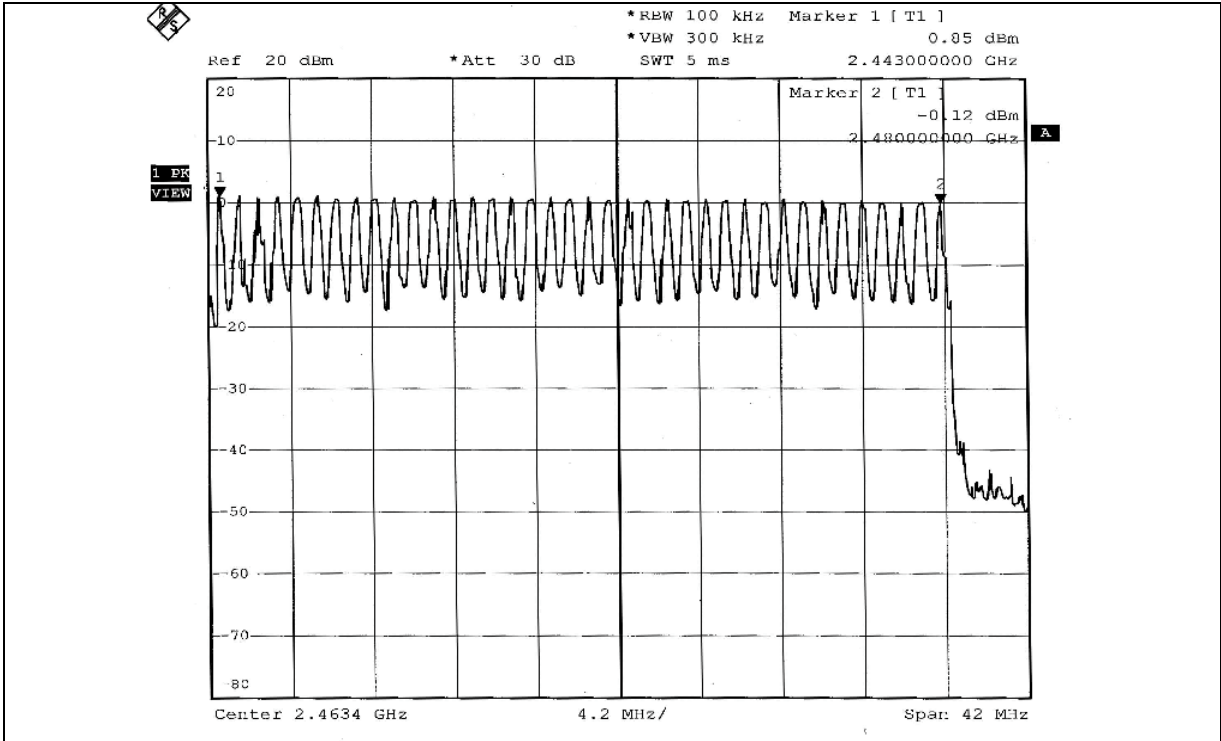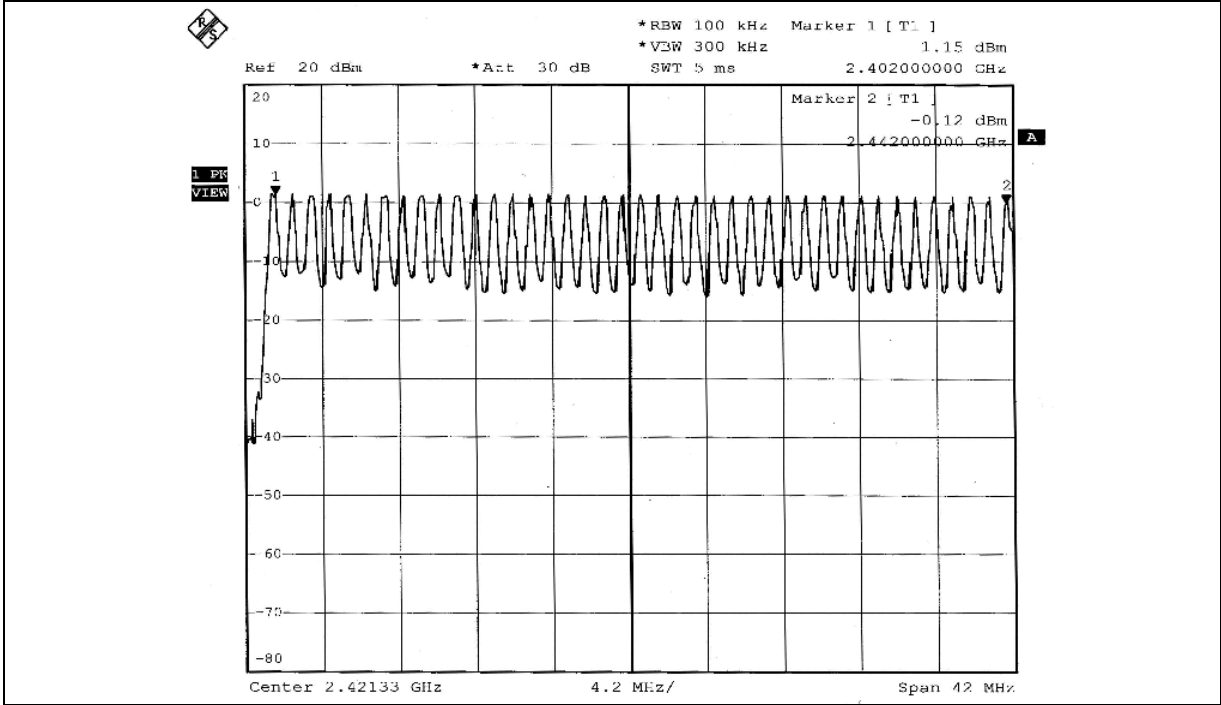



## 4.4 DWELL TIME ON EACH CHANNEL

### 4.4.1 LIMIT OF DWELL TIME USED

The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed.

### 4.4.2 TEST INSTRUMENTS

Description & Manufacturer	Model No.	Serial No.	Calibrated Until
SPECTRUM ANALYZER	FSP 40	100036	Mar 20. 2006

**NOTE:** The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

### 4.4.3 TEST PROCEDURES


- a. Check the calibration of the measuring instrument (SA) using either an internal calibrator or a known signal from an external generator.
- b. Turn on the EUT and connect its antenna terminal to measurement via a low loss cable. Then set it to any one measured frequency within its operating range and make sure the instrument is operated in its linear range.
- c. Adjust the center frequency of SA on any frequency be measured and set SA to zero span mode. And then, set RBW and VBW of spectrum analyzer to proper value.
- d. Measure the time duration of one transmission on the measured frequency. And then plot the result with time difference of this time duration.
- e. Repeat above procedures until all different time-slot modes have been completed.

### 4.4.4 DEVIATION FROM TEST STANDARD

No deviation.



#### 4.4.5 TEST SETUP

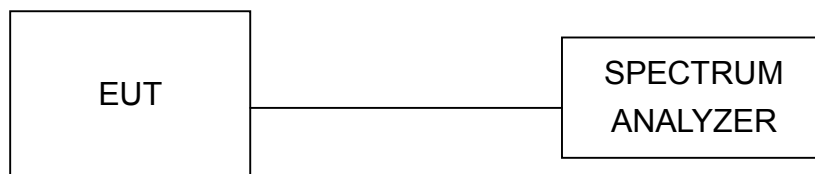



#### 4.4.6 TEST RESULTS

Mode	Number of transmission in a 31.6 (79Hopping*0.4)	Length of transmission time (msec)	Result (msec)	Limit (msec)
DH1	50 (times / 5 sec) *6.32=316.00 times	0.512	161.792	400
DH3	25 (times / 5 sec) *6.32=158.00 times	1.810	285.980	400
DH5	17 (times / 5 sec) *6.32=107.44 times	3.180	341.660	400

**NOTE:** Test plots of the transmitting time slot are shown on next 3 pages.





DH1

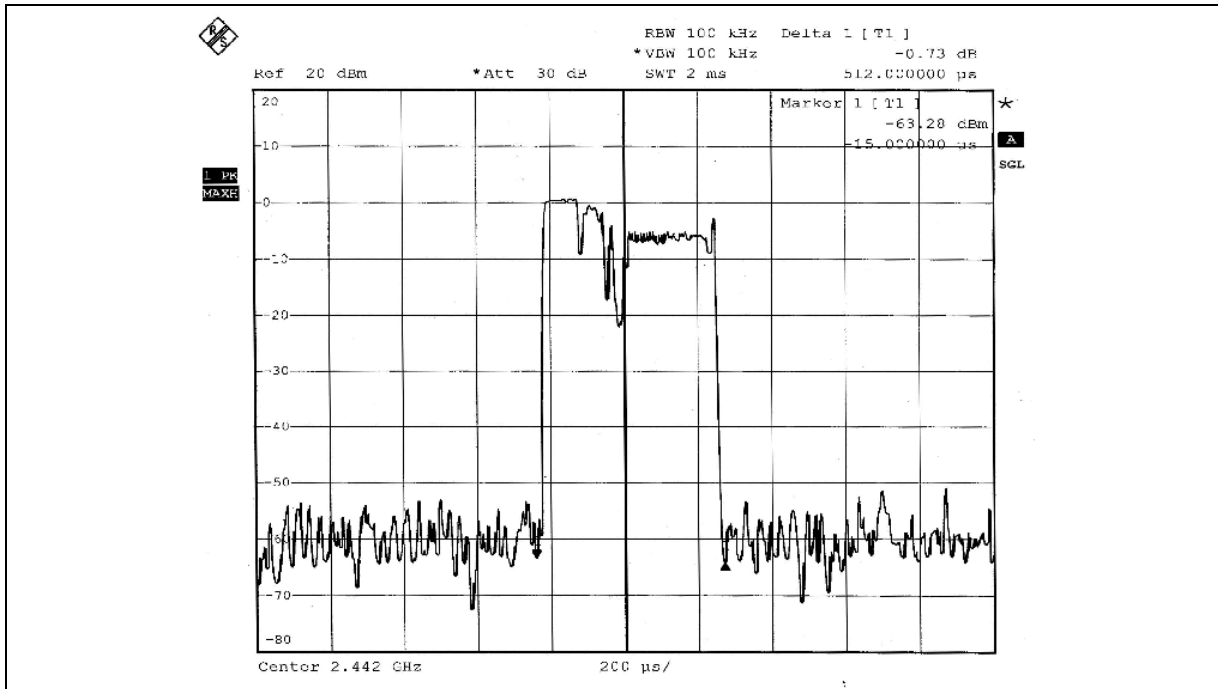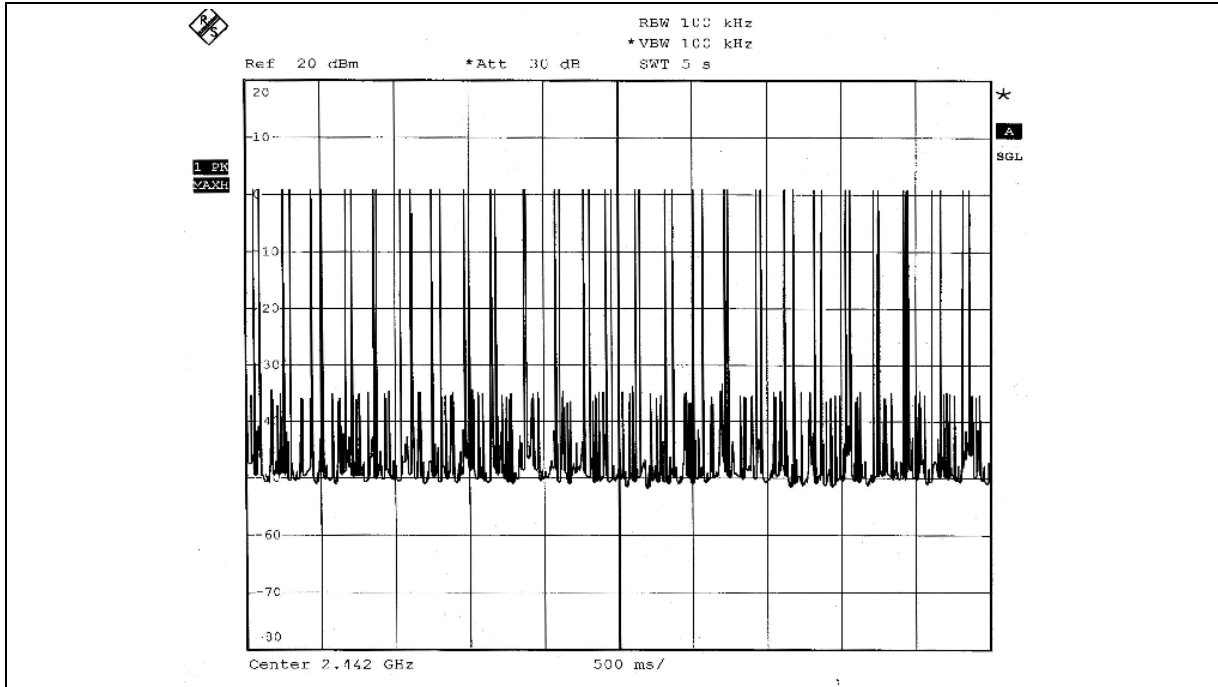





DH3

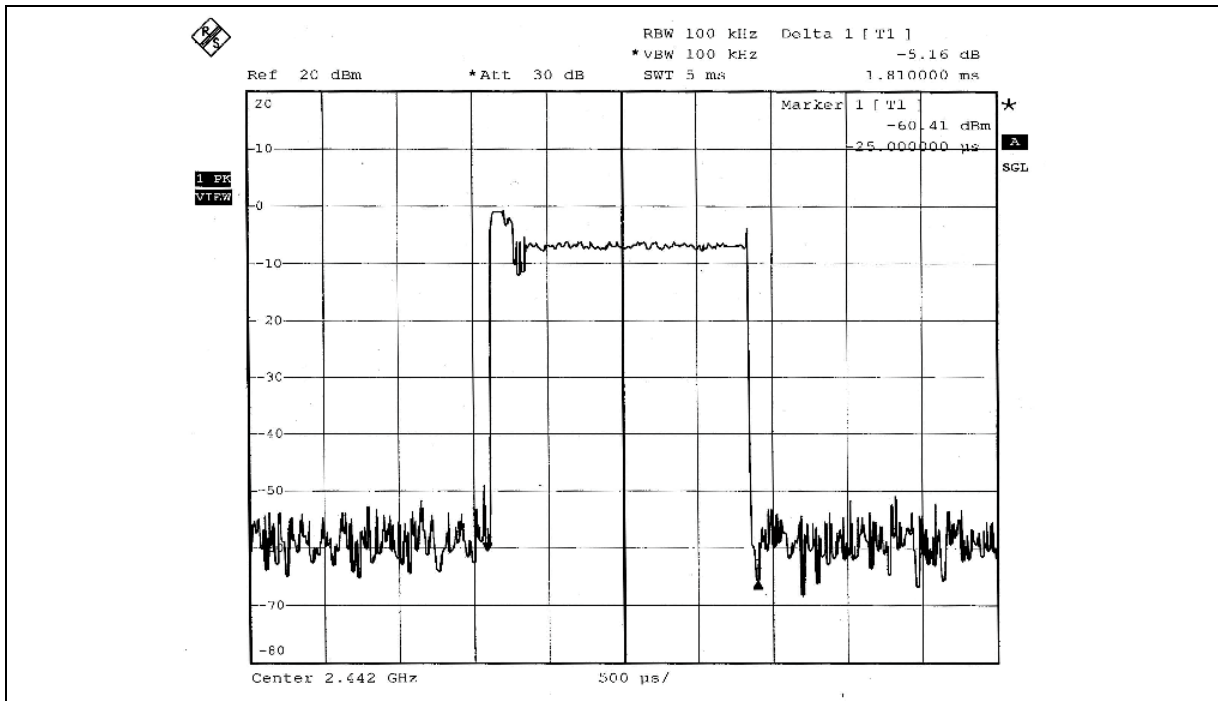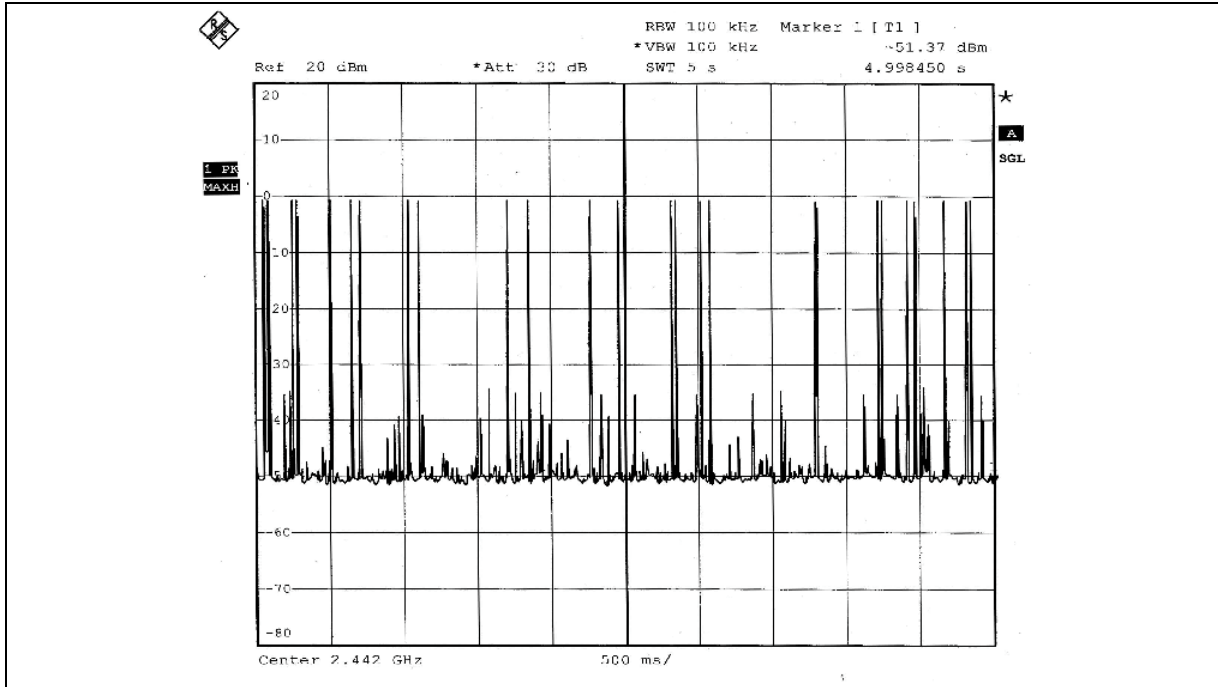



DH5

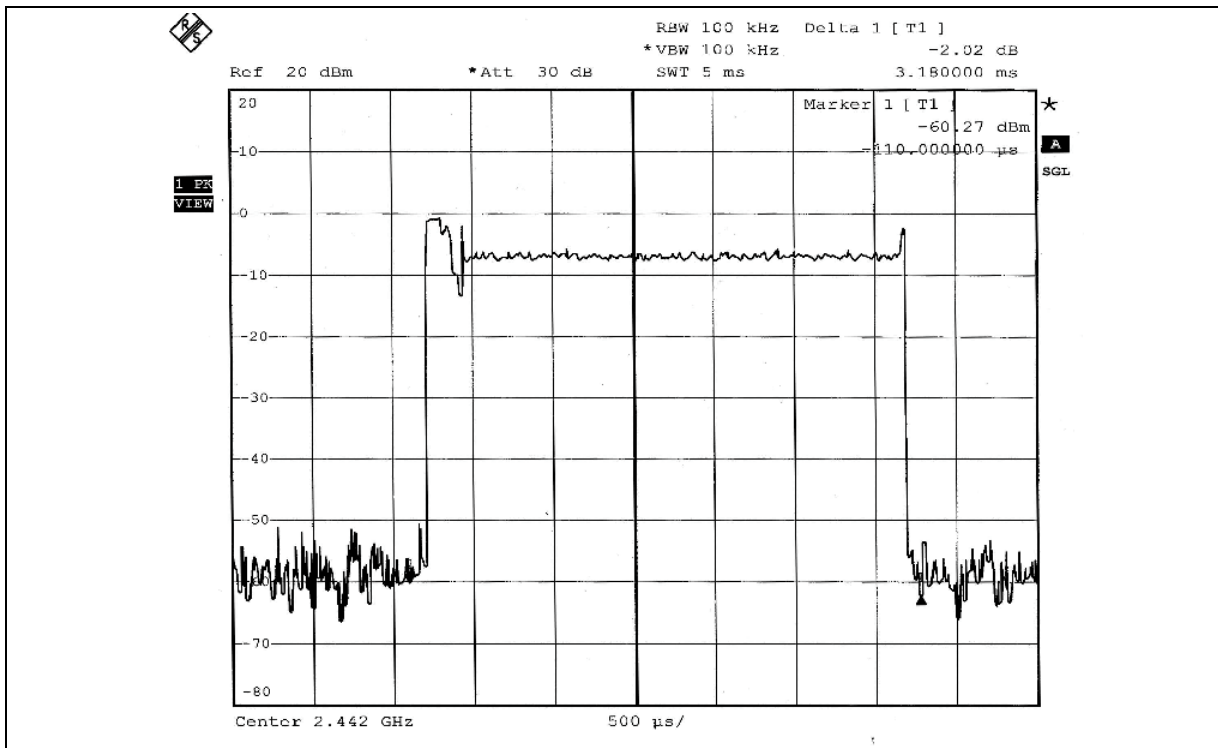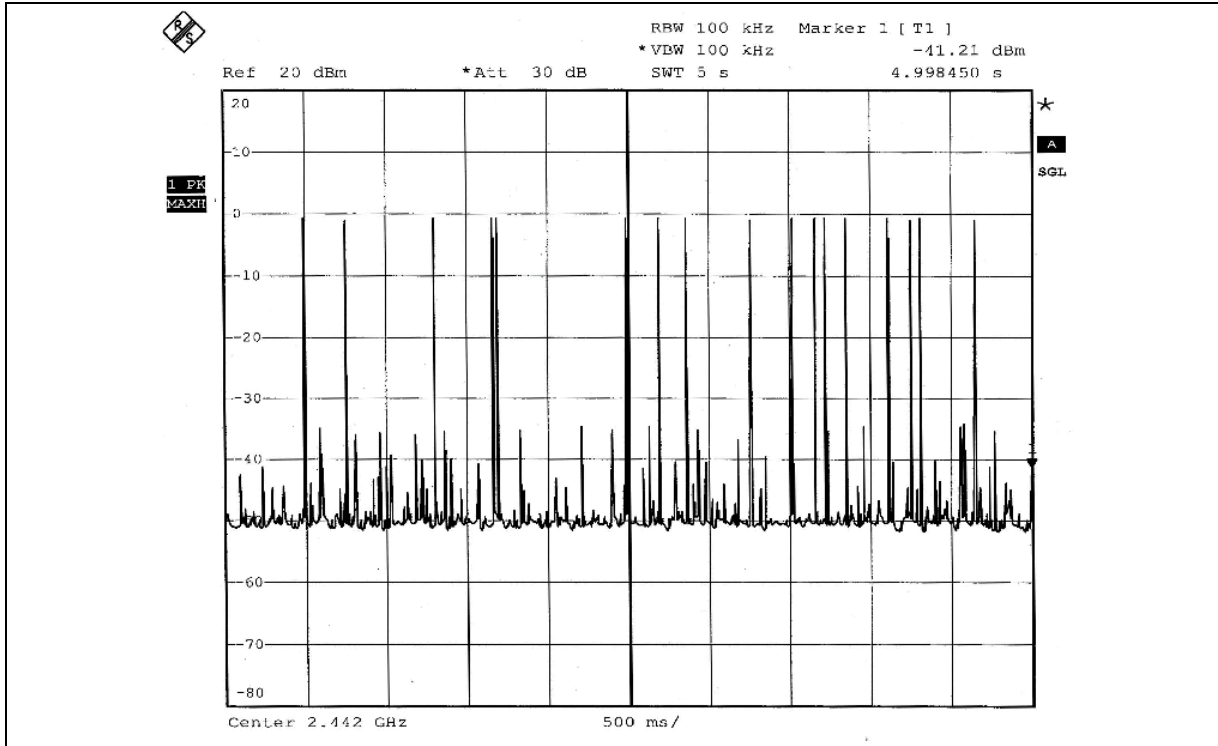



## 4.5 CHANNEL BANDWIDTH

### 4.5.1 LIMITS OF CHANNEL BANDWIDTH

For frequency hopping system operating in the 2400-2483.5MHz, If the 20dB bandwidth of hopping channel is greater than 25kHz, 20dB bandwidth of hopping channel shall be a minimum limit for the hopping channel separation.

### 4.5.2 TEST INSTRUMENTS

Description & Manufacturer	Model No.	Serial No.	Calibrated Until
SPECTRUM ANALYZER	FSP 40	100036	Mar 20. 2006

**NOTE:** The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

### 4.5.3 TEST PROCEDURE

- a. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
- b. Turn on the EUT and connect it to measurement instrument. Then set it to any one convenient frequency within its operating range. Set a reference level on the measuring instrument equal to the highest peak value.
- c. Measure the frequency difference of two frequencies that were attenuated 20dB from the reference level. Record the frequency difference as the emission bandwidth.
- d. Repeat above procedures until all frequencies measured were complete.



#### 4.5.4 DEVIATION FROM TEST STANDARD

No deviation.

#### 4.5.5 TEST SETUP



#### 4.5.6 EUT OPERATING CONDITION

The software provided by client enabled the EUT to transmit and receive data at lowest, middle and highest channel frequencies individually.


#### 4.5.7 TEST RESULTS

<b>EUT</b>	Bluetooth Mouse	<b>MODEL NO.</b>	AMB-02
<b>MODULATION TYPE</b>	GFSK	<b>ENVIRONMENTAL CONDITIONS</b>	20deg. C, 70% RH, 1011hPa
<b>INPUT POWER</b>	3Vdc	<b>TESTED BY</b>	Jamison Chan


<b>CHANNEL</b>	<b>CHANNEL FREQUENCY (MHz)</b>	<b>20dB BANDWIDTH (MHz)</b>
0	2402	0.981
39	2441	0.969
78	2480	0.975



CH 0

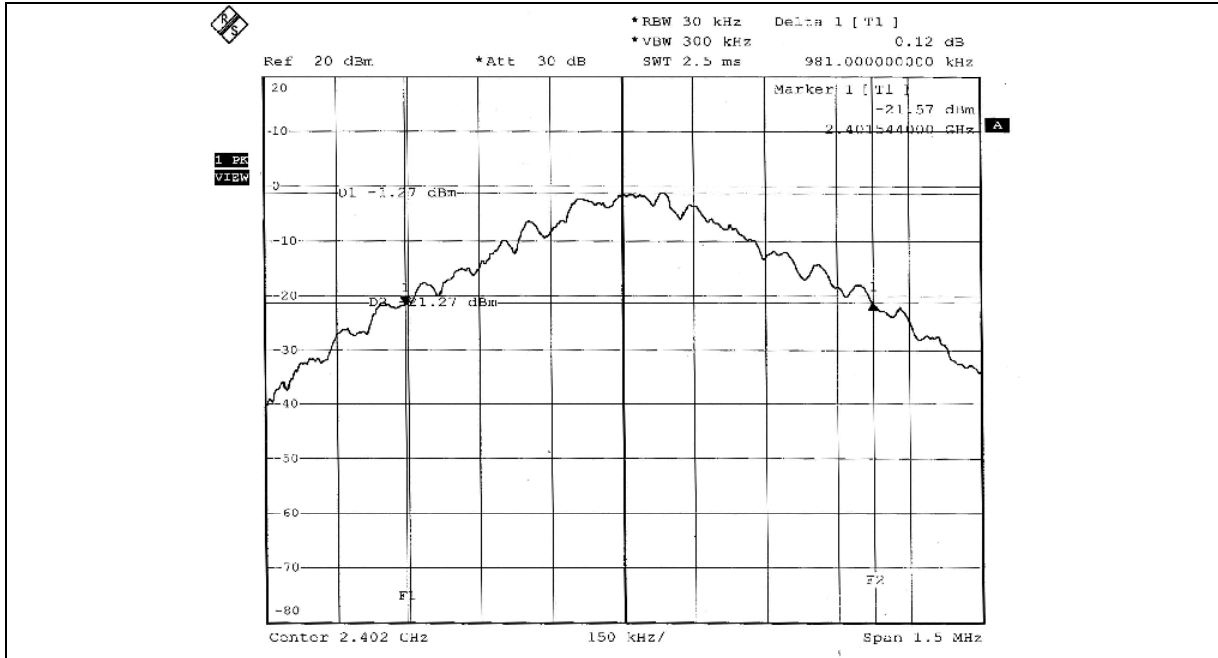


CH 39

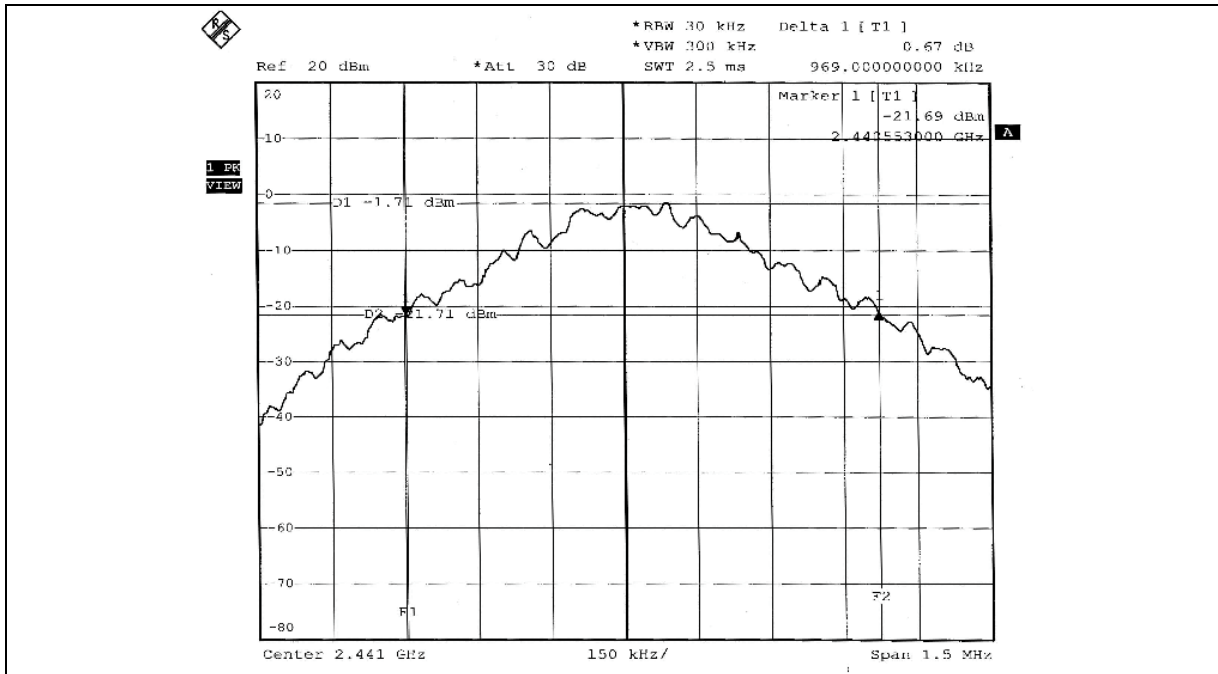



CH 78

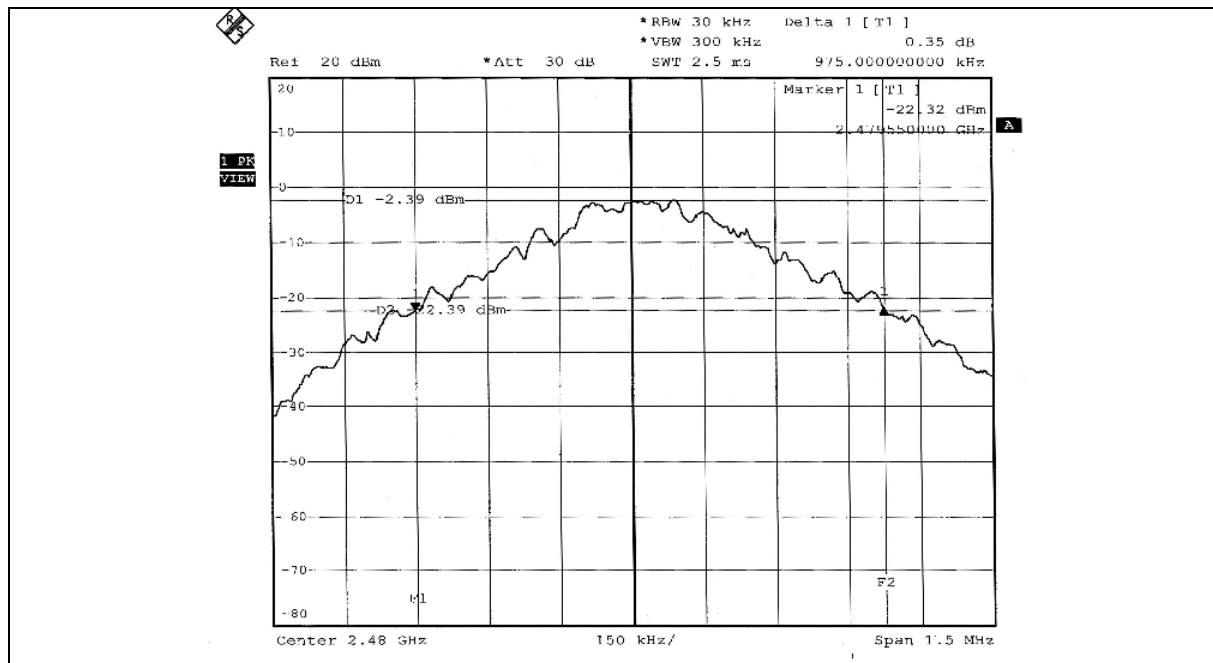





## 4.6 HOPPING CHANNEL SEPARATION

### 4.6.1 LIMIT OF HOPPING CHANNEL SEPARATION

At least 25kHz or 20dB hopping channel bandwidth (whichever is greater).

### 4.6.2 TEST INSTRUMENTS

Description & Manufacturer	Model No.	Serial No.	Calibrated Until
SPECTRUM ANALYZER	FSP 40	100036	Mar 20. 2006

**NOTE:** The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

### 4.6.3 TEST PROCEDURES


1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Turn on the EUT and connect it to measurement instrument. Then set it to any one convenient frequency within its operating range.
3. By using the MaxHold function record the separation of two adjacent channels.
4. Measure the frequency difference of these two adjacent channels by SA MARK function. And then plot the result on SA screen.
5. Repeat above procedures until all frequencies measured were complete.



#### 4.6.4 DEVIATION FROM TEST STANDARD

No deviation.

#### 4.6.5 TEST SETUP

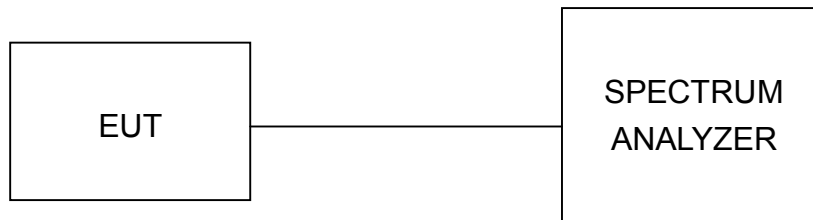

#### 4.6.6 TEST RESULTS


<b>EUT</b>	Bluetooth Mouse	<b>MODEL NO.</b>	AMB-02
<b>MODULATION TYPE</b>	GFSK	<b>ENVIRONMENTAL CONDITIONS</b>	20deg. C, 70% RH, 1011hPa
<b>INPUT POWER</b>	3Vdc	<b>TESTED BY</b>	Jamison Chan

Channel	Frequency (MHz)	Adjacent Channel Separation (MHz)	Minimum Limit (MHz)	Pass / Fail
0	2402	1.005	0.981	PASS
39	2441	1.000	0.969	PASS
78	2480	1.000	0.975	PASS


The minimum limit is 20dB bandwidth. Test results please refer to next two pages.



CH 0

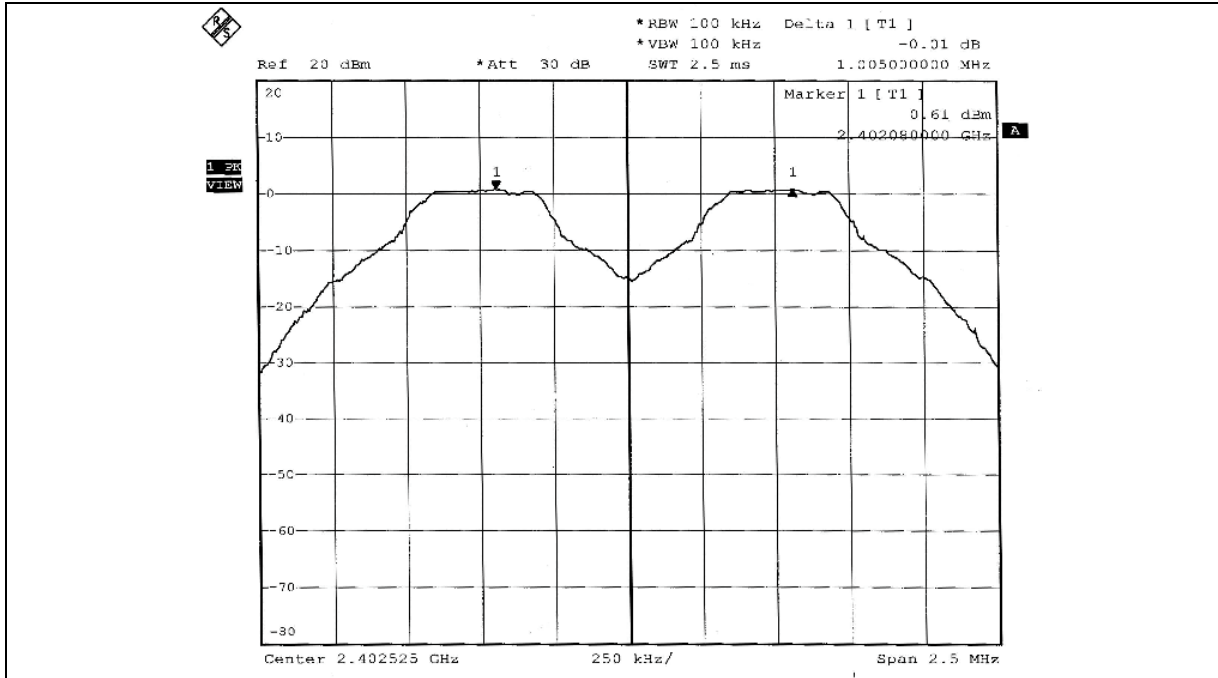


CH 39

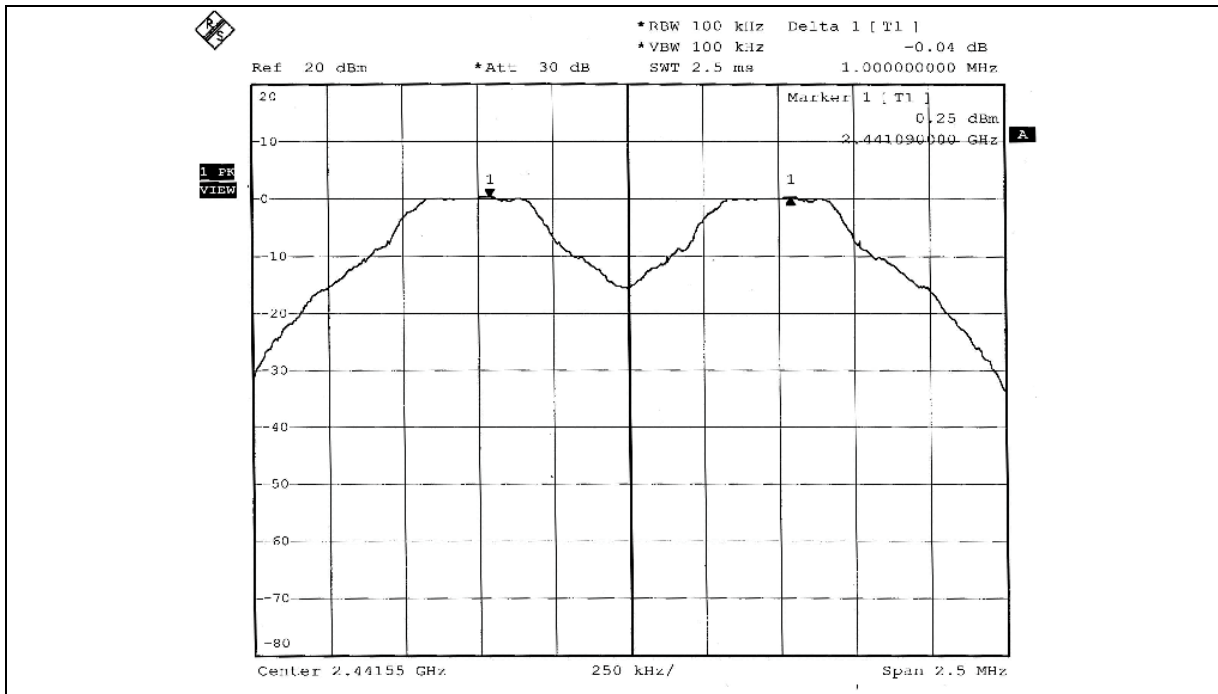



CH 78

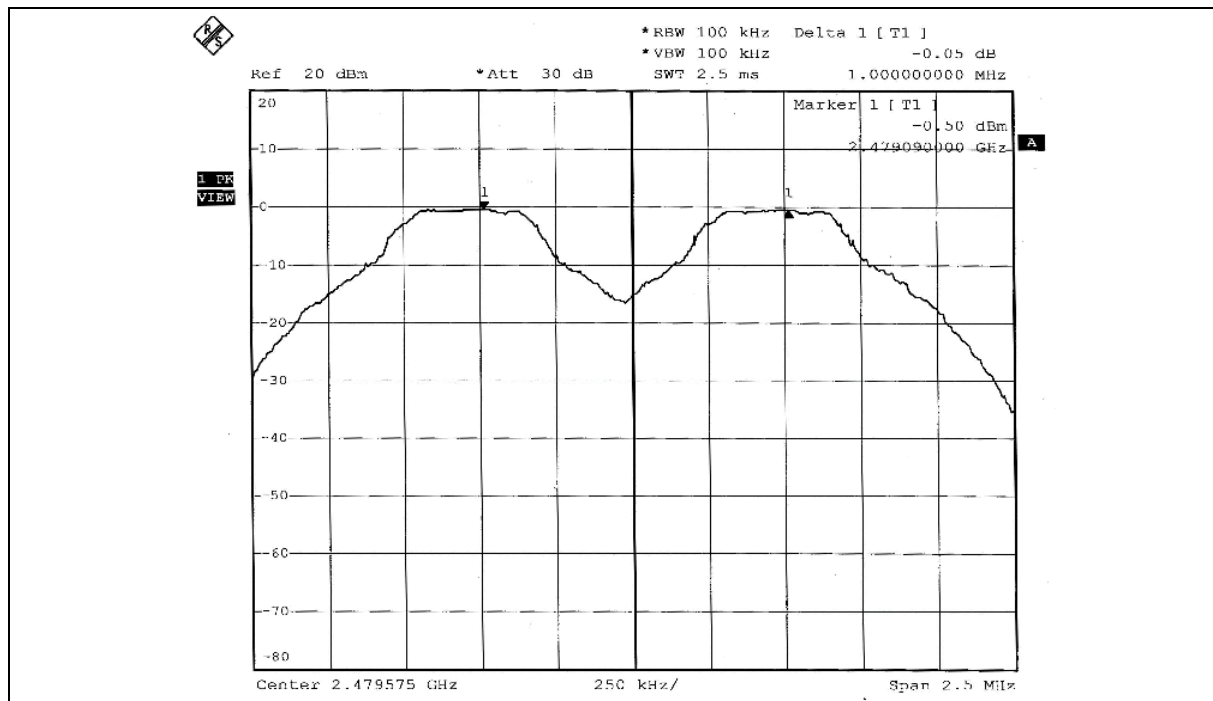



## 4.7 MAXIMUM PEAK OUTPUT POWER

### 4.7.1 LIMITS OF MAXIMUM PEAK OUTPUT POWER MEASUREMENT

The Maximum Peak Output Power Measurement is 30dBm.

### 4.7.2 TEST INSTRUMENTS

Description & Manufacturer	Model No.	Serial No.	Calibrated Until
SPECTRUM ANALYZER	FSP 40	100036	Mar 20. 2006

**NOTE:** The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

### 4.7.3 TEST PROCEDURES

- a. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
- b. Turn on the EUT and connect it to measurement instrument. Then set it to any one convenient frequency within its operating range. Set a reference level on the measuring instrument equal to the highest peak value.
- c. The center frequency of the spectrum analyzer is set to the fundamental frequency and using 1 MHz RBW and 3 MHz VBW.
- d. Measure the captured power within the band and recording the plot.
- e. Repeat above procedures until all frequencies required were complete.

### 4.7.4 DEVIATION FROM TEST STANDARD

No deviation



### 4.7.5 TEST SETUP



For the actual test configuration, please refer to the related Item – Photographs of the Test Configuration.

### 4.7.6 EUT OPERATING CONDITION

The software provided by client enabled the EUT to transmit and receive data at lowest, middle and highest channel frequencies individually.

### 4.7.7 TEST RESULTS

<b>EUT</b>	Bluetooth Mouse	<b>MODEL NO.</b>	AMB-02
<b>MODULATION TYPE</b>	GFSK	<b>ENVIRONMENTAL CONDITIONS</b>	20deg. C, 70% RH, 1011hPa
<b>INPUT POWER</b>	3Vdc	<b>TESTED BY</b>	Jamison Chan

CHANNEL	CHANNEL FREQUENCY (MHz)	PEAK POWER OUTPUT (mW)	PEAK POWER OUTPUT (dBm)	PEAK POWER LIMIT (dBm)	PASS/FAIL
0	2402	1.374	1.38	30	PASS
39	2441	1.236	0.92	30	PASS
78	2480	1.040	0.17	30	PASS



## 4.8 BAND EDGES MEASUREMENT

### 4.8.1 LIMITS OF BAND EDGES MEASUREMENT

Below -20dB of the highest emission level of operating band (in 100KHz RBW).

### 4.8.2 TEST INSTRUMENTS

Description & Manufacturer	Model No.	Serial No.	Calibrated Until
SPECTRUM ANALYZER	FSP 40	100036	Mar 20. 2006

**NOTE:** The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

### 4.8.3 TEST PROCEDURE

The transmitter output was connected to the spectrum analyzer via a low lose cable. Set both RBW and VBW of spectrum analyzer to 100 kHz with suitable frequency span including 100 MHz bandwidth from band edge. The band edges was measured and recorded.

### 4.8.4 DEVIATION FROM TEST STANDARD

No deviation.

### 4.8.5 EUT OPERATING CONDITION

The software provided by client enabled the EUT to transmit and receive data at lowest, middle and highest channel frequencies individually.



## 4.8.6 TEST RESULTS

The spectrum plots are attached on the following 4 images. D1 line indicates the highest level, D2 line indicates the 20dB offset below D1. It shows compliance with the requirement in part 15.247(d).

### NOTE 1:

The band edge emission plot on page 57 shows 48.79dBc between carrier maximum power and local maximum emission in restrict band (2.3782GHz). The emission of carrier strength list in the test result of channel 0 at the item 4.2.7 is 97.01dBuV/m (Peak), so the maximum field strength in restrict band is  $97.01 - 48.79 = 48.22$ dBuV/m, which is under 74 dBuV/m limit.



The band edge emission plot on page 57 shows 48.79dBc between carrier maximum power and local maximum emission in restrict band (2.3786GHz). The emission of carrier strength list in the test result of channel 0 at the item 4.2.7 is 67.01dBuV/m (Average), so the maximum field strength in restrict band is  $67.01 - 48.79 = 18.22$ dBuV/m, which is under 54 dBuV/m limit.



### NOTE 2:

The band edge emission plot on page 58 shows 44.46dBc between carrier maximum power and local maximum emission in restrict band (2.4845GHz). The emission of carrier strength list in the test result of channel 78 at the item 4.2.7 is 97.82dBuV/m (Peak), so the maximum field strength in restrict band is  $97.82 - 44.46 = 53.36$ dBuV/m, which is under 74 dBuV/m limit.

The band edge emission plot on page 58 shows 44.46dBc between carrier maximum power and local maximum emission in restrict band (2.4845GHz). The emission of carrier strength list in the test result of channel 78 at the item 4.2.7 is 67.82dBuV/m (Average), so the maximum field strength in restrict band is  $67.82 - 44.46 = 23.36$ dBuV/m, which is under 54 dBuV/m limit.



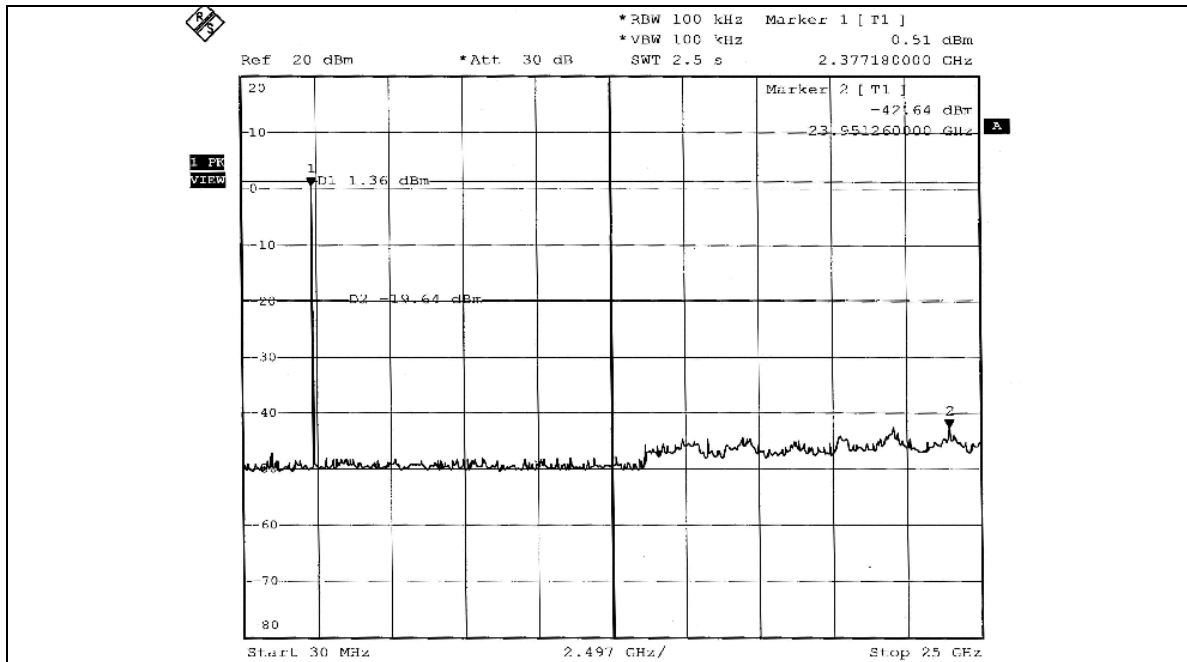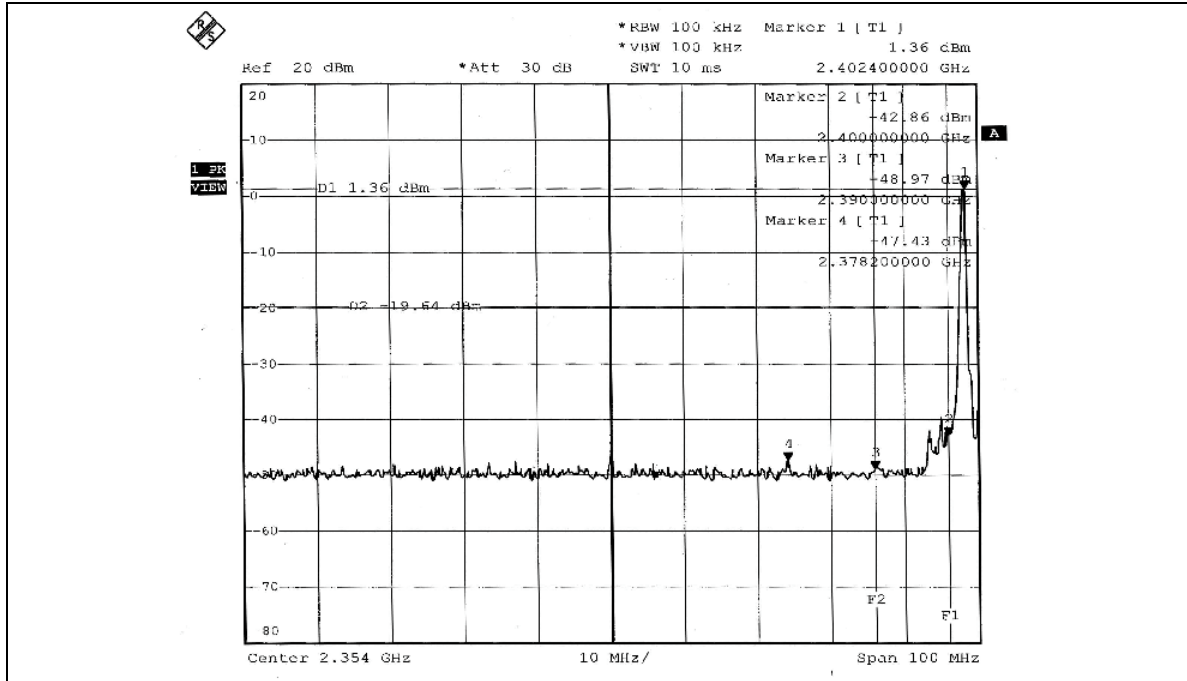

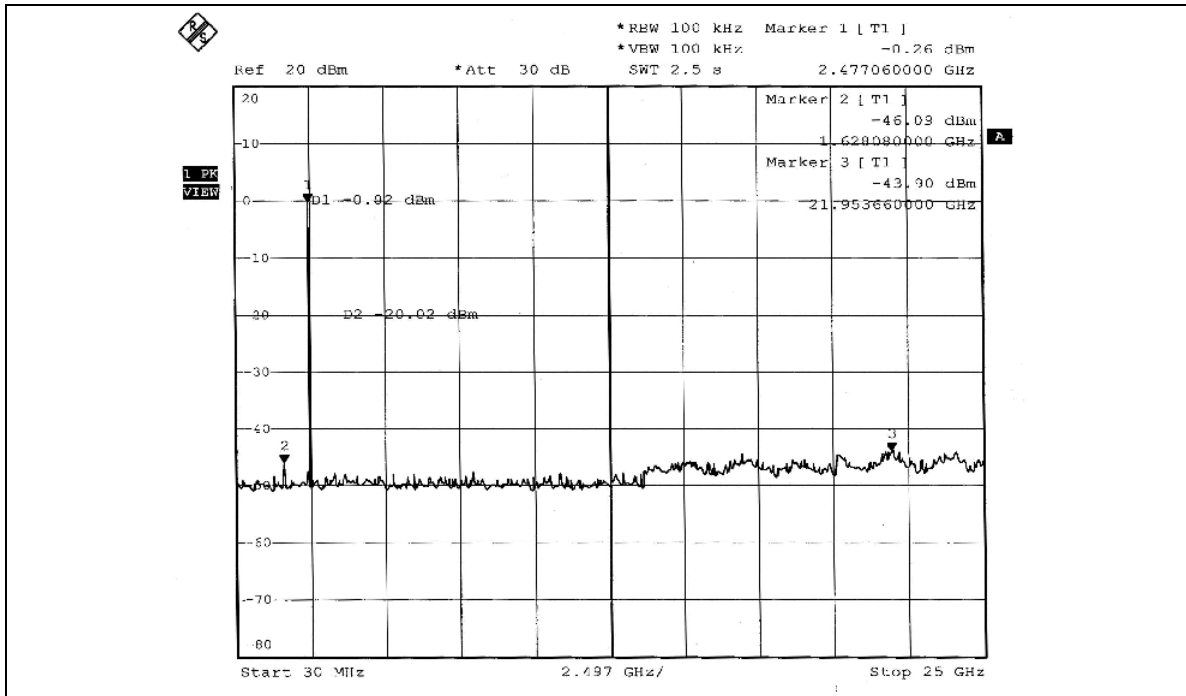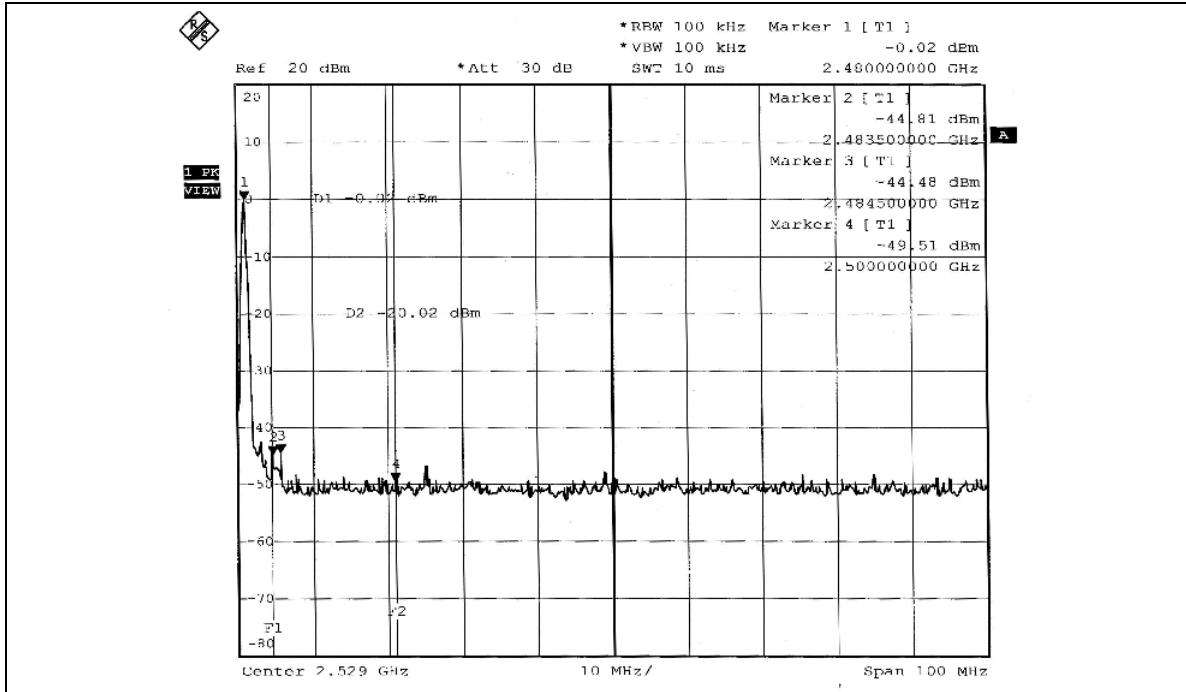



## **4.9 ANTENNA REQUIREMENT**

### **4.9.1 STANDARD APPLICABLE**

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.


And according to FCC 47 CFR Section 15.247 (b), if transmitting antennas of directional gain greater than 6 dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

### **4.9.2 ANTENNA CONNECTED CONSTRUCTION**

The antenna used in this product is Micro String antenna without connector, and the maximum gain of this antenna is -0.9dBi.

## 5. PHOTOGRAPHS OF THE TEST CONFIGURATION

### CONDUCTED EMISSION TEST (For Mode A)

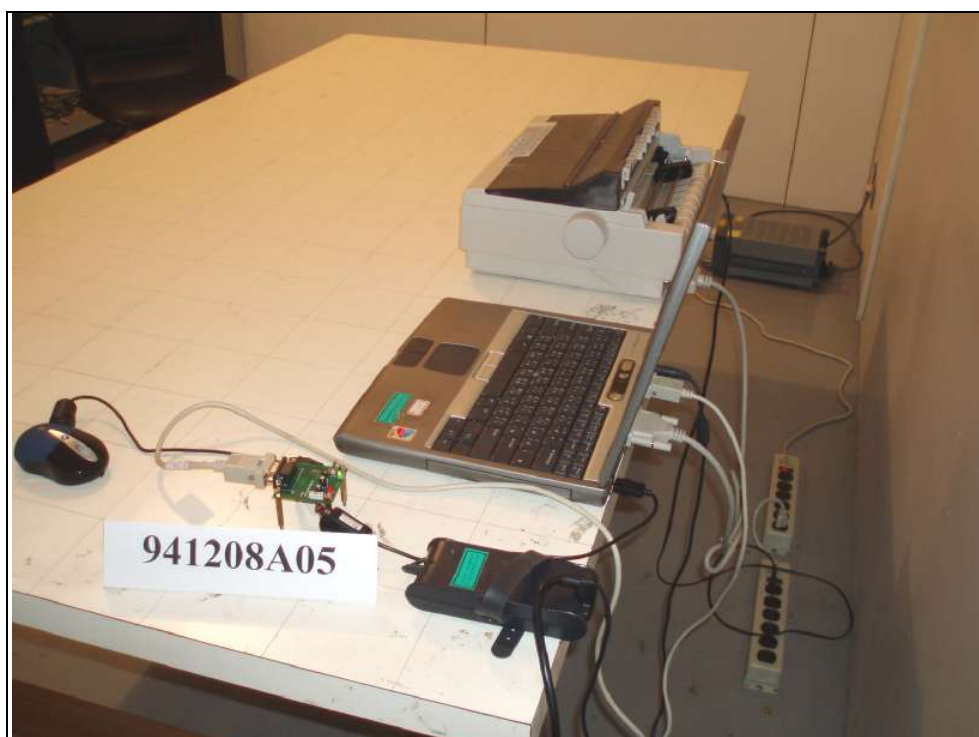

**CONDUCTED EMISSION TEST (For Mode B)**



### RADIATED EMISSION TEST (For Mode A)





### RADIATED EMISSION TEST (For Mode B)





## 6. INFORMATION ON THE TESTING LABORATORIES

We, ADT Corp., were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are accredited and approved by the following approval agencies according to ISO/IEC 17025.

<b>USA</b>	FCC, NVLAP, UL, A2LA
<b>Germany</b>	TUV Rheinland
<b>Japan</b>	VCCI
<b>Norway</b>	NEMKO
<b>Canada</b>	INDUSTRY CANADA , CSA
<b>R.O.C.</b>	CNLA, BSMI, DGT
<b>Netherlands</b>	Telefication
<b>Singapore</b>	PSB , GOST-ASIA(MOU)
<b>Russia</b>	CERTIS(MOU)

Copies of accreditation certificates of our laboratories obtained from approval agencies can be downloaded from our web site:

[www.adt.com.tw/index.5/phtml](http://www.adt.com.tw/index.5/phtml). If you have any comments, please feel free to contact us at the following:

**Linko EMC/RF Lab:**

Tel: 886-2-26052180

Fax: 886-2-26052943

**Hsin Chu EMC/RF Lab:**

Tel: 886-3-5935343

Fax: 886-3-5935342

**Hwa Ya EMC/RF/Safety Telecom Lab:**

Tel: 886-3-3183232

Fax: 886-3-3185050

**Linko RF Lab.**

Tel: 886-3-3270910

Fax: 886-3-3270892

**Web Site:** [www.adt.com.tw](http://www.adt.com.tw)

The address and road map of all our labs can be found in our web site also.





## **APPENDIX-A**

### **MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB**

No any modifications are made to the EUT by the lab during the test.