

## FCC Test Report

**Report No.:** RF200708D02

**FCC ID:** EMJRGPJ500

**Test Model:** GPJ500

**Series Model:** GPJ50L, GPJ50\* (\* identifier English letter A to Z for different brand name in order for different marketing purpose)

**Received Date:** Jul. 8, 2020

**Test Date:** Jul. 8 to Aug. 4, 2020

**Issued Date:** Aug. 4, 2020

**Applicant:** PRIMAX ELECTRONICS LTD.

**Address:** No. 669, Ruey Kuang Road, Neihsu, Taipei, Taiwan, R.O.C.

**Issued By:** Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch  
Lin Kou Laboratories

**Lab Address:** No. 47-2, 14th Ling, Chia Pau Vil., Lin Kou Dist., New Taipei City, Taiwan

**FCC Registration /  
Designation Number:** 198487 / TW2021



This report is for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence, provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents. Unless specifically mentioned, the uncertainty of measurement has been explicitly taken into account to declare the compliance or non-compliance to the specification.

## Table of Contents

<b>Release Control Record .....</b>	<b>3</b>
<b>1 Certificate of Conformity .....</b>	<b>4</b>
<b>2 Summary of Test Results .....</b>	<b>5</b>
2.1 Measurement Uncertainty .....	5
2.2 Modification Record .....	5
<b>3 General Information .....</b>	<b>6</b>
3.1 General Description of EUT .....	6
3.2 Description of Test Modes .....	7
3.2.1 Test Mode Applicability and Tested Channel Detail .....	8
3.3 Description of Support Units .....	9
3.3.1 Configuration of System under Test .....	10
3.4 General Description of Applied Standards .....	11
<b>4 Test Types and Results .....</b>	<b>12</b>
4.1 Radiated Emission and Bandedge Measurement .....	12
4.1.1 Limits of Radiated Emission and Bandedge Measurement .....	12
4.1.2 Test Instruments .....	13
4.1.3 Test Procedures .....	14
4.1.4 Deviation from Test Standard .....	14
4.1.5 Test Setup .....	15
4.1.6 EUT Operating Conditions .....	16
4.1.7 Test Results .....	17
4.2 Conducted Emission Measurement .....	25
4.2.1 Limits of Conducted Emission Measurement .....	25
4.2.2 Test Instruments .....	25
4.2.3 Test Procedures .....	26
4.2.4 Deviation from Test Standard .....	26
4.2.5 Test Setup .....	26
4.2.6 EUT Operating Conditions .....	26
4.2.7 Test Results .....	27
4.3 Channel Bandwidth .....	31
4.3.1 Test Setup .....	31
4.3.2 Test Instruments .....	31
4.3.3 Test Procedure .....	31
4.3.4 Deviation from Test Standard .....	31
4.3.5 EUT Operating Condition .....	31
4.3.6 Test Results .....	32
<b>Annex A- Band Edge Measurement .....</b>	<b>33</b>
<b>5 Pictures of Test Arrangements .....</b>	<b>34</b>
<b>Appendix – Information of the Testing Laboratories .....</b>	<b>35</b>

### Release Control Record

Issue No.	Description	Date Issued
RF200708D02	Original release.	Aug. 4, 2020

## 1 Certificate of Conformity

**Product:** Remote

**Test Model:** GPJ500 (Brand: Google)

**Series Model:** GPJ50L (Brand: Lenovo)

GPJ50\* (\* identifier English letter A to Z for different brand name in order for different marketing purpose)

**Sample Status:** Engineering sample

**Applicant:** PRIMAX ELECTRONICS LTD.

**Test Date:** Jul. 8 to Aug. 4, 2020

**Standards:** 47 CFR FCC Part 15, Subpart C (Section 15.249)  
ANSI C63.10: 2013

The above equipment has been tested by **Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's RF characteristics under the conditions specified in this report.

**Prepared by :**



**Date:** Aug. 4, 2020

Jessica Cheng / Senior Specialist

**Approved by :**



**Date:** Aug. 4, 2020

Rex Lai / Associate Technical Manager

## 2 Summary of Test Results

47 CFR FCC Part 15, Subpart C (SECTION 15.249)			
FCC Clause	Test Item	Result	Remarks
15.207	AC Power Conducted Emission	PASS	Meet the requirement of limit. Minimum passing margin is -10.21dB at 0.52109MHz.
15.215	Channel Bandwidth Measurement	-	
15.209 15.249 15.249 (d)	Radiated Emission Test Band Edge Measurement Limit: 50dB less than the peak value of fundamental frequency or meet radiated emission limit in section 15.209	PASS	Meet the requirement of limit. Minimum passing margin is -10.82dB at 40.82MHz.
15.203	Antenna Requirement	PASS	No antenna connector is used.

Note:

- For 2.4GHz band compliance with rule 15.249(d) of the band-edge items, the test plots were recorded in Annex A.
- Determining compliance based on the results of the compliance measurement, not taking into account measurement instrumentation uncertainty.

### 2.1 Measurement Uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

Measurement	Frequency	Expanded Uncertainty (k=2) ( $\pm$ )
Conducted Emissions at mains ports	150kHz ~ 30MHz	3.00 dB
Conducted Emissions	9kHz ~ 40GHz	2.63 dB
Radiated Emissions up to 1 GHz	9kHz ~ 30MHz	2.61 dB
	30MHz ~ 1000MHz	5.43 dB
Radiated Emissions above 1 GHz	Above 1GHz	5.14 dB

### 2.2 Modification Record

There were no modifications required for compliance.


### 3 General Information

#### 3.1 General Description of EUT

Product	Remote
Test Model	GPJ500 (Brand: Google)
Series Model	GPJ50L (Brand: Lenovo) GPJ50* (* identifier English letter A to Z for different brand name in order for different marketing purpose)
Model Difference	Refer to note as below
Status of EUT	Engineering sample
Power Supply Rating	3.7Vdc from battery or DC from Charging Case.
Modulation Type	GFSK
Operating Frequency	2402MHz ~ 2479MHz
Number of Channel	78
Antenna Type	Printed antenna with -1.59dBi gain
Antenna Connector	N/A
Accessory Device	Refer to note as below
Data Cable Supplied	N/A

Note:

1. All models are listed as below.

Product	Brand	Model	Power Supply	Remark
Remote	Google	GPJ500,	Rechargeable Battery  Brand: Model: FT442631P /3.7Vdc	Charging Case (Brand: Google, Model: GPJ500)
	Lenovo	GPJ50L		Charging Case (Brand: Lenovo, Model: GPJ50L)
	-	GPJ50*		Charging Case (Brand: Lenovo or Google , Model:GPJ50*)
* identifier English letter A to Z for different brand name in order for different marketing purpose				

2. The EUT has following accessories for charging:

Item	Brand	Model	Specification
Charging Case	Google	GPJ500	1.7m Shielded cable attached on Charging Case Rating: 5Vdc 0.5A
Charging Case	Lenovo	GPJ50L	
Charging Case	Lenovo or Google	GPJ50* (* identifier English letter A to Z for different brand name in order for different marketing purpose)	

3. The above EUT information is declared by manufacturer and for more detailed features description, please refer to the manufacturer's specifications or user's manual.

### 3.2 Description of Test Modes

78 channels are provided to this EUT:

7CHANNEL	FREQ. (MHz)	CHANNEL	FREQ. (MHz)	CHANNEL	FREQ. (MHz)	CHANNEL	FREQ. (MHz)
0	2402	20	2422	40	2442	60	2462
1	2403	21	2423	41	2443	61	2463
2	2404	22	2424	42	2444	62	2464
3	2405	23	2425	43	2445	63	2465
4	2406	24	2426	44	2446	64	2466
5	2407	25	2427	45	2447	65	2467
6	2408	26	2428	46	2448	66	2468
7	2409	27	2429	47	2449	67	2469
8	2410	28	2430	48	2450	68	2470
9	2411	29	2431	49	2451	69	2471
10	2412	30	2432	50	2452	70	2472
11	2413	31	2433	51	2453	71	2473
12	2414	32	2434	52	2454	72	2474
13	2415	33	2435	53	2455	73	2475
14	2416	34	2436	54	2456	74	2476
15	2417	35	2437	55	2457	75	2477
16	2418	36	2438	56	2458	76	2478
17	2419	37	2439	57	2459	77	2479
18	2420	38	2440	58	2460		
19	2421	39	2441	59	2461		

### 3.2.1 Test Mode Applicability and Tested Channel Detail

EUT Configure Mode	Applicable To				Description
	RE $\geq$ 1G	RE<1G	PLC	APCM	
A	√	√	-	√	Operating Mode (EUT + Battery)
B	-	√	√	-	Charging Mode (EUT + Charging Case + Adapter)
C	-	-	√	-	Charging Mode (EUT + Charging Case + Notebook)

Where **RE $\geq$ 1G**: Radiated Emission above 1GHz & Bandedge Measurement

**RE<1G**: Radiated Emission below 1GHz

**PLC**: Power Line Conducted Emission

**APCM**: Antenna Port Conducted Measurement

**NOTE**: The EUT had been pre-tested on the positioned of each 3 axis. The worst case was found when positioned on **X-plane**

#### **Radiated Emission Test (Above 1GHz):**

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

EUT Configure Mode	Available Channel	Tested Channel	Modulation Type
A	0 to 77	0, 39, 77	GFSK

#### **Radiated Emission Test (Below 1GHz):**

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

EUT Configure Mode	Available Channel	Tested Channel	Modulation Type
A	0 to 77	0	GFSK
B	-	-	-

#### **Power Line Conducted Emission Test:**

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

EUT Configure Mode	Available Channel	Tested Channel	Modulation Type
B & C	-	-	-



#### Antenna Port Conducted Measurement:

- ☒ This item includes all test value of each mode, but only includes spectrum plot of worst value of each mode.
- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

EUT Configure Mode	Available Channel	Tested Channel	Modulation Type
A	0 to 77	0, 39, 77	GFSK

#### Test Condition:

Applicable To	EUT Configure Mode	Environmental Conditions	Input Power	Tested By
RE $\geq$ 1G	A	25deg. C, 72%RH	3.7Vdc	Ian Chang
RE<1G	A	25deg. C, 72%RH	3.7Vdc	Ian Chang
	B	25deg. C, 72%RH	120Vac/ 60Hz (Adapter)	Ian Chang
PLC	B	25deg. C, 75%RH	120Vac/ 60Hz (Adapter)	Ian Chang
	C	25deg. C, 75%RH	120Vac/ 60Hz (System)	Ian Chang
APCM	A	25deg. C, 76%RH	3.7Vdc	Saxon Lee

### 3.3 Description of Support Units

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

ID	Product	Brand	Model No.	Serial No.	FCC ID	Remarks
A.	AC Adapter	Dongguan Aohai Technology Co., Ltd.	G1001	N/A	N/A	Supplied by client
B.	Notebook PC	ASUS	PU401L	E9NXXBC002007372	N/A	Provided by Lab

Note:


- All power cords of the above support units are non-shielded (1.8m).
- Rating of item A was listed as below:  
AC I/P:100-240Vac 50/60Hz 0.3A  
DC O/P:5Vdc 1A 7.5W

No.	Cable Descriptions	Qty.	Length (m)	Shielding (Yes/ No)	Cores (Qty.)	Remarks
1.	DC cable (attached on Charging Case)	1	1.7	Y	0	Supplied by client


**NOTE:** The core(s) is(are) originally attached to the cable(s).

### 3.3.1 Configuration of System under Test


#### Mode A: Operating Mode



#### Mode B: Charging Mode

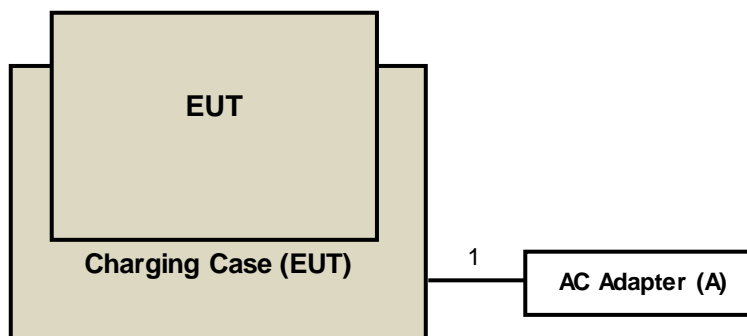

#### Mode C: Charging Mode

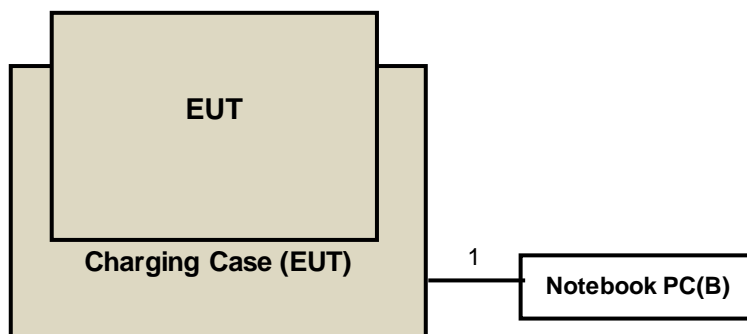

### 3.4 General Description of Applied Standards

The EUT is a RF Product. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

**FCC Part 15, Subpart C (15.249)**

ANSI C63.10-2013

All test items have been performed and recorded as per the above standards.

## 4 Test Types and Results

### 4.1 Radiated Emission and Bandedge Measurement

#### 4.1.1 Limits of Radiated Emission and Bandedge Measurement

The field strength of emissions from intentional radiators operated within these frequency bands shall comply with the following

Fundamental Frequency	Field Strength of Fundamental (millivolts/meter)	Field Strength of Harmonics (microvolts/meter)
902 ~ 928 MHz	50	500
2400 ~ 2483.5 MHz	50	500
5725 ~ 5875 MHz	50	500
24 ~ 24.25 GHz	250	2500

Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50 dB below the level of the fundamental or to the general radiated emission limits as below table, whichever is the lesser attenuation

Frequencies (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 ~ 0.490	$2400/F(\text{kHz})$	300
0.490 ~ 1.705	$24000/F(\text{kHz})$	30
1.705 ~ 30.0	30	30
30 ~ 88	100	3
88 ~ 216	150	3
216 ~ 960	200	3
Above 960	500	3

#### NOTE:

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) =  $20 \log$  Emission level (uV/m).
3. For frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.

#### 4.1.2 Test Instruments

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
HP Preamplifier	8447D	2432A03504	Feb. 19, 2020	Feb. 18, 2021
HP Preamplifier	8449B	3008A01201	Feb. 20, 2020	Feb. 19, 2021
MITEQ Preamplifier	AMF-6F-260400-33-8P	892164	Feb. 19, 2020	Feb. 18, 2021
Agilent TEST RECEIVER	N9038A	MY51210129	Mar. 18, 2020	Mar. 17, 2021
Schwarzbeck Antenna	VULB 9168	139	Nov. 7, 2019	Nov. 6, 2020
Schwarzbeck Antenna	VHBA 9123	480	Jun. 3, 2019	Jun. 2, 2021
Schwarzbeck Horn Antenna	BBHA-9170	212	Nov. 24, 2019	Nov. 23, 2020
Schwarzbeck Horn Antenna	BBHA 9120-D1	D130	Nov. 24, 2019	Nov. 23, 2020
ADT. Turn Table	TT100	0306	NA	NA
ADT. Tower	AT100	0306	NA	NA
Software	Radiated_V7.6.15.9.5	NA	NA	NA
SUHNER RF cable With 4dB PAD	SF102	Cable-CH6-01	Jul. 10, 2019	Jul. 9, 2020
			Jul. 9, 2020	Jul. 8, 2021
SUHNER RF cable With 3/4dB PAD	SF102	Cable-CH8-3.6m	Jul. 10, 2019	Jul. 9, 2020
			Jul. 9, 2020	Jul. 8, 2021
KEYSIGHT MIMO Powermeasurement Test set	U2021XA	U2021XA-001	Jun. 16, 2020	Jun. 15, 2021
KEYSIGHT Spectrum Analyzer	N9030A	MY54490260	Jul. 30, 2019	Jul. 29, 2020
			Jul. 22, 2020	Jul. 21, 2021
Loop Antenna EMCI	LPA600	270	Aug. 23, 2019	Aug. 22, 2021
EMCO Horn Antenna	3115	00028257	Nov. 24, 2019	Nov. 23, 2020
Highpass filter Wainwright Instruments	WHK 3.1/18G-10SS	SN 8	NA	NA
ROHDE & SCHWARZ Spectrum Analyzer	FSV40	101042	Sep. 23, 2019	Sep. 22, 2020

- NOTE:** 1. The calibration interval of the above test instruments is 12/24 months. And the calibrations are traceable to NML/ROC and NIST/USA.
2. The horn antenna and HP preamplifier (model: 8449B) are used only for the measurement of emission frequency above 1GHz if tested.
3. The test was performed in Chamber No. 6.
4. Tested Date: Jul. 8 to 29, 2020

#### 4.1.3 Test Procedures

##### **For Radiated emission below 30MHz**

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter chamber room. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. Parallel, perpendicular, and ground-parallel orientations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Quasi-Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.

##### **NOTE:**

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 9kHz at frequency below 30MHz.

##### **For Radiated emission above 30MHz**

- a. The EUT was placed on the top of a rotating table 0.8 meters (for 30MHz ~ 1GHz) / 1.5 meters (for above 1GHz) above the ground at 3 meter chamber room for test. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to quasi-peak detect function and specified bandwidth with maximum hold mode when the test frequency is below 1 GHz.
- f. The test-receiver system was set to peak and average detect function and specified bandwidth with maximum hold mode when the test frequency is above 1 GHz. If the peak reading value also meets average limit, measurement with the average detector is unnecessary.

##### **Note:**


1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Quasi-peak detection (QP) at frequency below 1GHz.
2. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 3 MHz for Peak detection (PK) at frequency above 1GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is  $\geq 1/T$  (Duty cycle < 98%) or 10Hz (Duty cycle  $\geq 98\%$ ) for Average detection (AV) at frequency above 1GHz.
4. All modes of operation were investigated and the worst-case emissions are reported.

#### 4.1.4 Deviation from Test Standard


No deviation.

#### 4.1.5 Test Setup


##### For Radiated emission below 30MHz

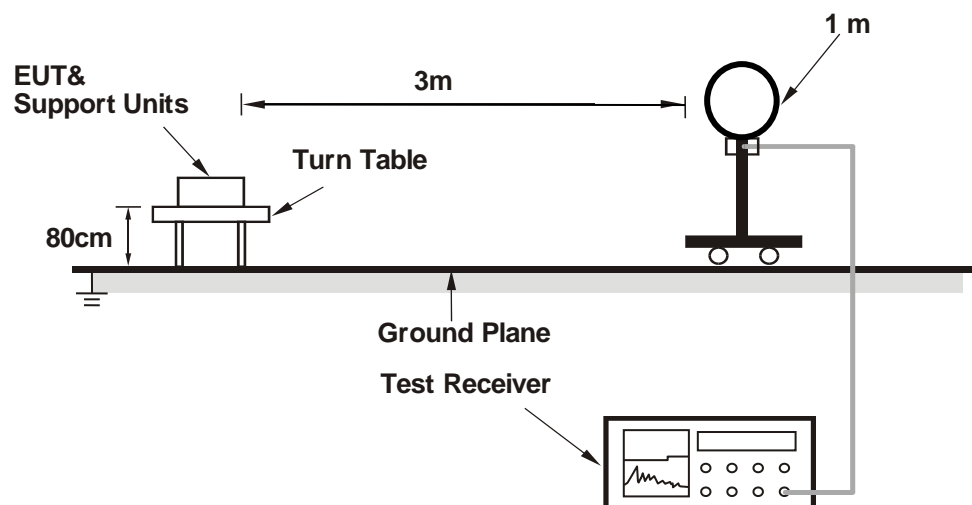

##### For Radiated emission 30MHz to 1GHz

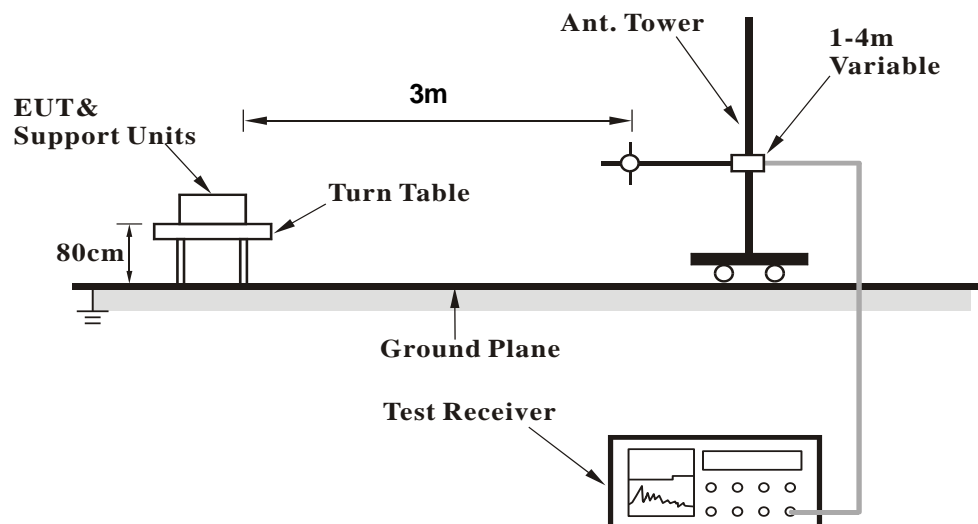

### For Radiated emission above 1GHz

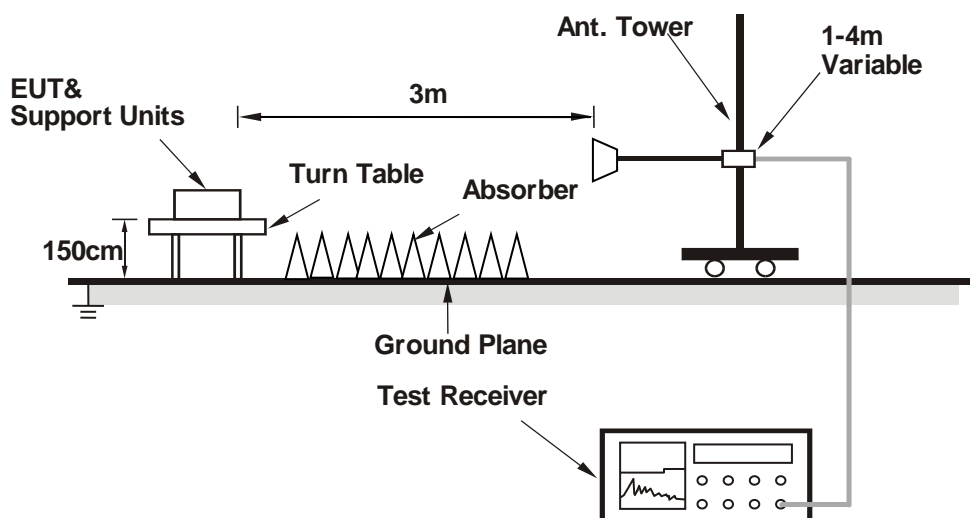

For the actual test configuration, please refer to the attached file (Test Setup Photo).

#### 4.1.6 EUT Operating Conditions

##### Mode A

Set the EUT under transmission condition continuously at specific channel frequency.

##### Mode B

- Put the EUT into Cradle.
- Connected the Cradle to Adapter.
- Set the EUT under charge mode.



#### 4.1.7 Test Results

#### ABOVE 1GHz DATA

#### Mode A

Channel	TX Channel 0	Detector Function	Peak (PK)
Frequency Range	1GHz ~ 25GHz		Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	54.36 PK	74.00	-19.64	1.73 H	138	53.05	1.31
2	2390.00	28.46 AV	54.00	-25.54	1.73 H	138	27.15	1.31
3	2400.00	55.77 PK	74.00	-18.23	1.73 H	138	54.42	1.35
4	2400.00	29.87 AV	54.00	-24.13	1.73 H	138	28.52	1.35
5	*2402.00	96.97 PK	114.00	-17.03	1.73 H	138	95.62	1.35
6	*2402.00	71.07 AV	94.00	-22.93	1.73 H	138	69.72	1.35
7	4804.00	52.84 PK	74.00	-21.16	2.99 H	349	44.08	8.76
8	4804.00	26.94 AV	54.00	-27.06	2.99 H	349	18.18	8.76
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	50.95 PK	74.00	-23.05	3.81 V	162	49.64	1.31
2	2390.00	25.05 AV	54.00	-28.95	3.81 V	162	23.74	1.31
3	2400.00	52.41 PK	74.00	-21.59	3.81 V	162	51.06	1.35
4	2400.00	26.51 AV	54.00	-27.49	3.81 V	162	25.16	1.35
5	*2402.00	93.61 PK	114.00	-20.39	3.81 V	162	92.26	1.35
6	*2402.00	67.71 AV	94.00	-26.29	3.81 V	162	66.36	1.35
7	4804.00	51.35 PK	74.00	-22.65	3.72 V	297	42.59	8.76
8	4804.00	25.45 AV	54.00	-28.55	3.72 V	297	16.69	8.76

#### Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency.
6. The average value of fundamental and harmonic frequency is: Average = Peak value + 20 log(Duty cycle) Where the duty factor is calculated from following formula:  

$$20 \log(\text{Duty cycle}) = 20 \log(0.21 \text{ ms} / 4.14 \text{ ms}) = -25.9 \text{ dB}$$
Please see page 20 for plotted duty.

Channel	TX Channel 39	Detector Function	Peak (PK) Average (AV)
Frequency Range	1GHz ~ 25GHz		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2441.00	96.34 PK	114.00	-17.66	1.71 H	146	94.96	1.38
2	*2441.00	70.44 AV	94.00	-23.56	1.71 H	146	69.06	1.38
3	4882.00	53.89 PK	74.00	-20.11	3.06 H	352	44.84	9.05
4	4882.00	27.99 AV	54.00	-26.01	3.06 H	352	18.94	9.05

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2441.00	93.02 PK	114.00	-20.98	3.83 V	166	91.64	1.38
2	*2441.00	67.12 AV	94.00	-26.88	3.83 V	166	65.74	1.38
3	4882.00	51.18 PK	74.00	-22.82	3.69 V	306	42.13	9.05
4	4882.00	25.28 AV	54.00	-28.72	3.69 V	306	16.23	9.05

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency.
6. The average value of fundamental and harmonic frequency is: Average = Peak value + 20 log(Duty cycle) Where the duty factor is calculated from following formula:  

$$20 \log(\text{Duty cycle}) = 20 \log(0.21 \text{ ms} / 4.14\text{ms}) = -25.9 \text{ dB}$$
 Please see page 20 for plotted duty.


Channel	TX Channel 77	Detector Function	Peak (PK)
Frequency Range	1GHz ~ 25GHz		Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2479.00	95.69 PK	114.00	-18.31	1.49 H	143	94.17	1.52
2	*2479.00	69.79 AV	94.00	-24.21	1.49 H	143	68.27	1.52
3	2483.50	59.95 PK	74.00	-14.05	1.49 H	143	58.40	1.55
4	2483.50	39.45 AV	54.00	-14.55	1.49 H	143	37.90	1.55
5	4958.00	53.15 PK	74.00	-20.85	2.91 H	341	44.09	9.06
6	4958.00	27.25 AV	54.00	-26.75	2.91 H	341	18.19	9.06
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2479.00	93.04 PK	114.00	-20.96	3.77 V	158	91.52	1.52
2	*2479.00	67.14 AV	94.00	-26.86	3.77 V	158	65.62	1.52
3	2483.50	56.68 PK	74.00	-17.32	3.77 V	159	55.13	1.55
4	2483.50	36.78 AV	54.00	-17.22	3.77 V	159	35.23	1.55
5	4958.00	51.21 PK	74.00	-22.79	2.63 V	291	42.15	9.06
6	4958.00	25.31 AV	54.00	-28.69	2.63 V	291	16.25	9.06

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency.
6. The average value of fundamental and harmonic frequency is: Average = Peak value + 20 log(Duty cycle) Where the duty factor is calculated from following formula:  
 $20 \log(\text{Duty cycle}) = 20 \log(0.21 \text{ ms} / 4.14 \text{ ms}) = -25.9 \text{ dB}$   
 Please see page 20 for plotted duty.

## Duty Cycle

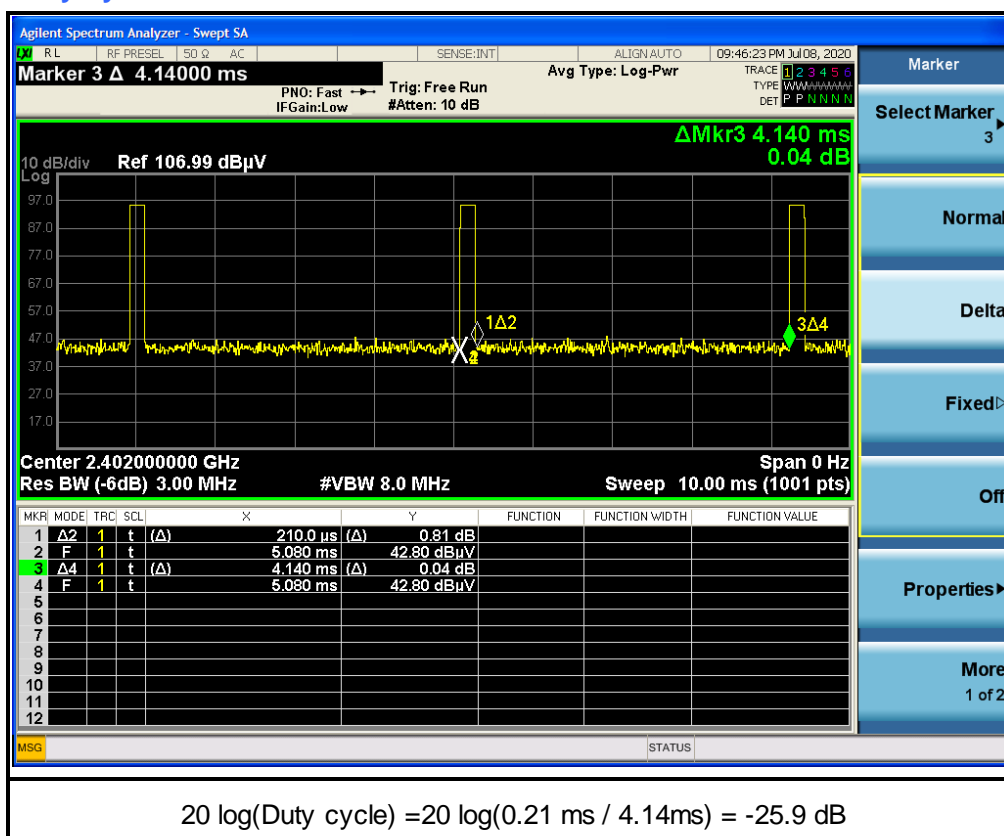

## BELOW 1GHz WORST-CASE DATA


### Mode A

CHANNEL	TX Channel 0	DETECTOR FUNCTION	Quasi-Peak (QP)
FREQUENCY RANGE	9kHz ~ 1GHz		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	38.78	23.94 QP	40.00	-16.06	1.64 H	61	31.90	-7.96
2	157.12	20.31 QP	43.50	-23.19	2.25 H	114	26.78	-6.47
3	297.96	21.90 QP	46.00	-24.10	1.94 H	260	26.73	-4.83
4	462.04	26.74 QP	46.00	-19.26	2.20 H	265	27.73	-0.99
5	524.94	28.70 QP	46.00	-17.30	1.87 H	47	28.69	0.01
6	592.60	28.93 QP	46.00	-17.07	2.51 H	47	26.91	2.02

### Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit of frequency range 30MHz~1000MHz.
5. The emission levels were very low against the limit of frequency range 9kHz~30MHz: the amplitude of spurious emissions attenuated more than 20 dB below the permissible value to be report.

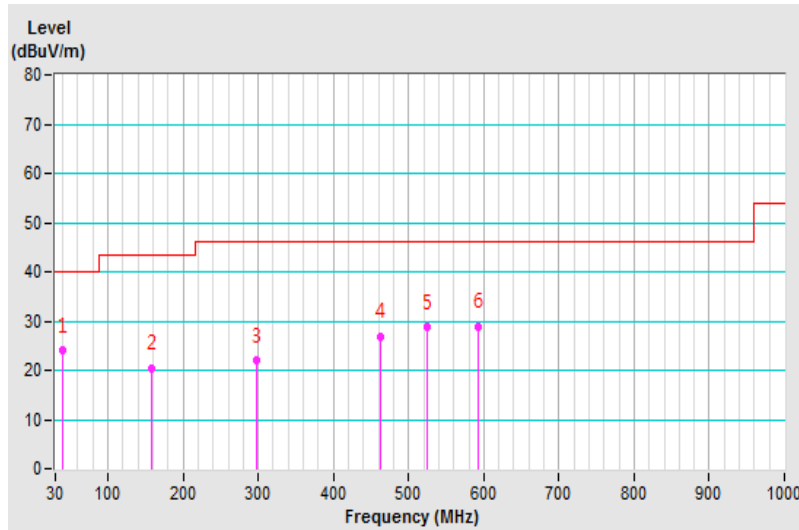


<b>CHANNEL</b>	TX Channel 0	<b>DETECTOR FUNCTION</b>	Quasi-Peak (QP)
<b>FREQUENCY RANGE</b>	9kHz ~ 1GHz		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	39.22	28.37 QP	40.00	-11.63	1.62 V	258	36.32	-7.95
2	71.56	21.51 QP	40.00	-18.49	1.00 V	74	30.86	-9.35
3	163.57	19.76 QP	43.50	-23.74	1.15 V	342	26.35	-6.59
4	326.48	23.13 QP	46.00	-22.87	1.85 V	38	27.15	-4.02
5	461.17	26.05 QP	46.00	-19.95	1.08 V	50	27.04	-0.99
6	603.56	29.59 QP	46.00	-16.41	1.74 V	97	27.45	2.14

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit of frequency range 30MHz~1000MHz.
5. The emission levels were very low against the limit of frequency range 9kHz~30MHz: the amplitude of spurious emissions attenuated more than 20 dB below the permissible value to be report.

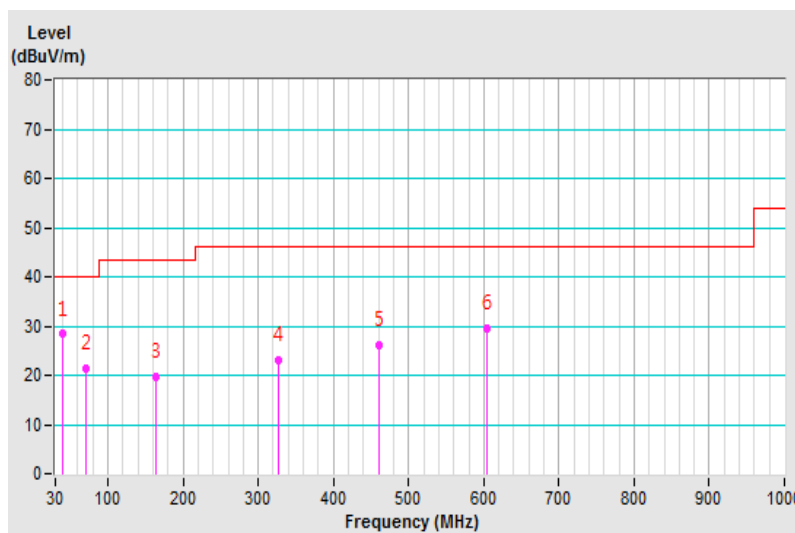


## Mode B

<b>FREQUENCY RANGE</b>	9kHz ~ 1GHz	<b>DETECTOR FUNCTION</b>	Quasi-Peak (QP)
------------------------	-------------	--------------------------	-----------------

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	38.39	23.30 QP	40.00	-16.70	2.30 H	29	31.11	-7.81
2	71.61	20.49 QP	40.00	-19.51	2.15 H	137	29.86	-9.37
3	156.59	20.27 QP	43.50	-23.23	2.24 H	201	26.79	-6.52
4	271.58	22.19 QP	46.00	-23.81	1.85 H	100	27.86	-5.67
5	325.41	25.05 QP	46.00	-20.95	1.70 H	221	29.08	-4.03
6	515.29	28.11 QP	46.00	-17.89	1.28 H	353	28.27	-0.16

### Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit of frequency range 30MHz~1000MHz.
5. The emission levels were very low against the limit of frequency range 9kHz~30MHz: the amplitude of spurious emissions attenuated more than 20 dB below the permissible value to be report.

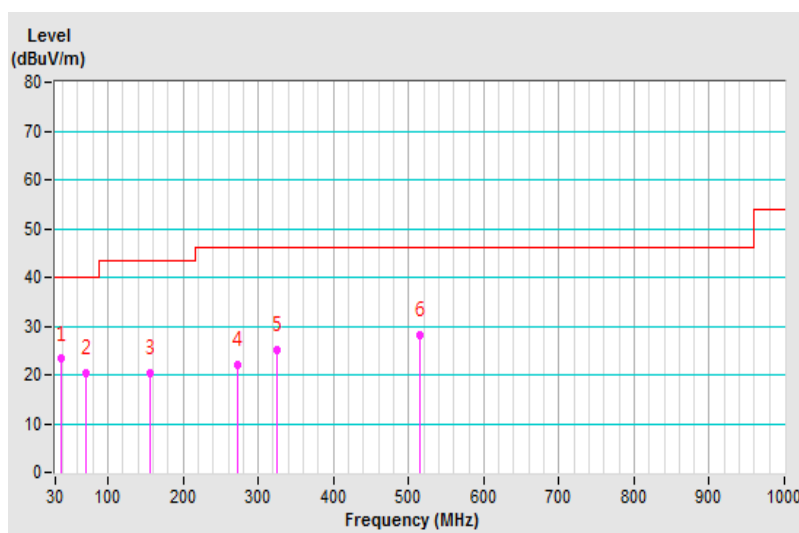


<b>FREQUENCY RANGE</b>	9kHz ~ 1GHz	<b>DETECTOR FUNCTION</b>	Quasi-Peak (QP)
------------------------	-------------	--------------------------	-----------------

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	40.82	29.18 QP	40.00	-10.82	1.12 V	321	36.69	-7.51
2	71.61	23.56 QP	40.00	-16.44	1.34 V	64	32.93	-9.37
3	166.09	19.70 QP	43.50	-23.80	1.52 V	250	26.35	-6.65
4	334.19	24.45 QP	46.00	-21.55	1.00 V	160	28.45	-4.00
5	475.86	27.25 QP	46.00	-18.75	1.62 V	80	28.11	-0.86
6	607.73	30.07 QP	46.00	-15.93	1.07 V	68	27.86	2.21

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit of frequency range 30MHz~1000MHz.
5. The emission levels were very low against the limit of frequency range 9kHz~30MHz: the amplitude of spurious emissions attenuated more than 20 dB below the permissible value to be report.

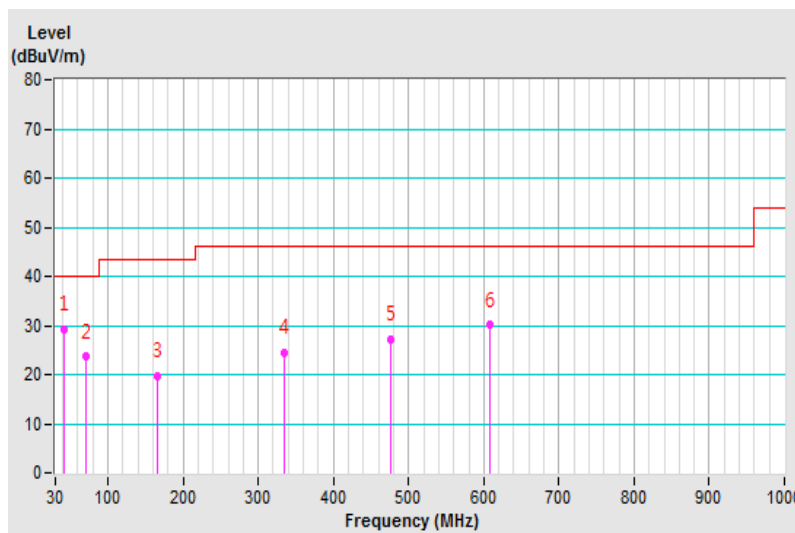



## 4.2 Conducted Emission Measurement

### 4.2.1 Limits of Conducted Emission Measurement

Frequency (MHz)	Conducted Limit (dBuV)	
	Quasi-peak	Average
0.15 - 0.5	66 - 56	56 - 46
0.50 - 5.0	56	46
5.0 - 30.0	60	50

Note: 1. The lower limit shall apply at the transition frequencies.

2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50MHz.

### 4.2.2 Test Instruments

Description & Manufacturer	Model No.	Serial No.	Cal. Date	Cal. Due
ROHDE & SCHWARZ TEST RECEIVER	ESCS 30	838251/021	Oct. 30, 2019	Oct. 29, 2020
ROHDE & SCHWARZ Artificial Mains Network (For EUT)	ENV216	101195	May 15, 2020	May 14, 2021
LISN With Adapter (for EUT)	101195	N/A	May 15, 2020	May 14, 2021
EMCO L.I.S.N. (For peripherals)	3825/2	9504-2359	Jul. 31, 2019	Jul. 30, 2020
SCHWARZBECK Artificial Mains Network (For EUT)	NNLK8129	8129229	May 14, 2020	May 13, 2021
SCHWARZBECK Artificial Mains Network (For EUT)	NNLK 8121	8121-808	Apr. 10, 2020	Apr. 9, 2021
Software	Cond_V7.3.7.4	NA	NA	NA
RF cable (JYEBAO) With 10dB PAD	5D-FB	Cable-C03.01	Sep. 17, 2019	Sep. 16, 2020
LYNICS Terminator (For EMCO LISN)	0900510	E1-01-300	Jan. 20, 2020	Jan. 19, 2021
LYNICS Terminator (For EMCO LISN)	0900510	E1-01-301	Jan. 20, 2020	Jan. 19, 2021
ROHDE & SCHWARZ Artificial Mains Network (For TV EUT)	ENV216	101196	Apr. 20, 2020	Apr. 19, 2021
LISN With Adapter (for TV EUT)	101196	NA	Apr. 20, 2020	Apr. 19, 2021

Note: 1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

2. The test was performed in Shielded Room No. 3. (Conduction 3)

3. Tested Date: Aug. 3 to 4, 2020

#### 4.2.3 Test Procedures


- The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 ohm/ 50uH of coupling impedance for the measuring instrument.
- Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- The frequency range from 150kHz to 30MHz was searched. Emission levels under (Limit - 20dB) was not recorded.

**NOTE:** The resolution bandwidth and video bandwidth of test receiver is 9kHz for quasi-peak detection (QP) and average detection (AV) at frequency 0.15MHz-30MHz.

#### 4.2.4 Deviation from Test Standard

No deviation.

#### 4.2.5 Test Setup

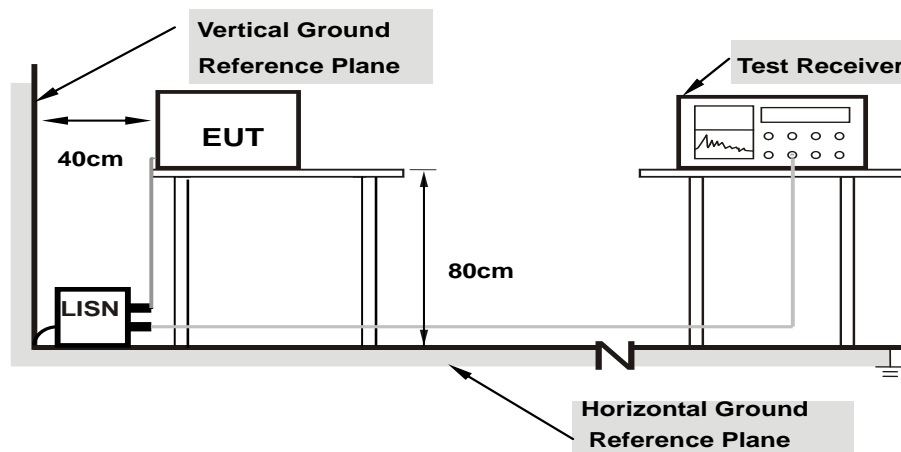

**Note: 1.Support units were connected to second LISN.**

For the actual test configuration, please refer to the attached file (Test Setup Photo).

#### 4.2.6 EUT Operating Conditions

##### Mode B

- Put the EUT into Cradle.
- Connected the Cradle to Adapter.
- Set the EUT under charge mode.

##### Mode C

- Put the EUT into Cradle.
- Connected the Cradle to Notebook PC
- Set the EUT under charge mode.

#### 4.2.7 Test Results


##### Mode B

Phase	Line (L)	Detector Function	Quasi-Peak (QP) / Average (AV)
-------	----------	-------------------	--------------------------------

Phase Of Power : Line (L)										
No	Frequency (MHz)	Correction Factor (dB)	Reading Value (dBuV)		Emission Level (dBuV)		Limit (dBuV)		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.15000	9.72	29.74	7.46	39.46	17.18	66.00	56.00	-26.54	-38.82
2	0.53672	9.72	18.40	8.62	28.12	18.34	56.00	46.00	-27.88	-27.66
3	0.77109	9.73	23.03	14.28	32.76	24.01	56.00	46.00	-23.24	-21.99
4	1.36719	9.76	16.09	7.31	25.85	17.07	56.00	46.00	-30.15	-28.93
5	3.73047	9.84	11.39	1.99	21.23	11.83	56.00	46.00	-34.77	-34.17
6	18.04297	9.95	10.37	0.57	20.32	10.52	60.00	50.00	-39.68	-39.48

##### Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level – Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

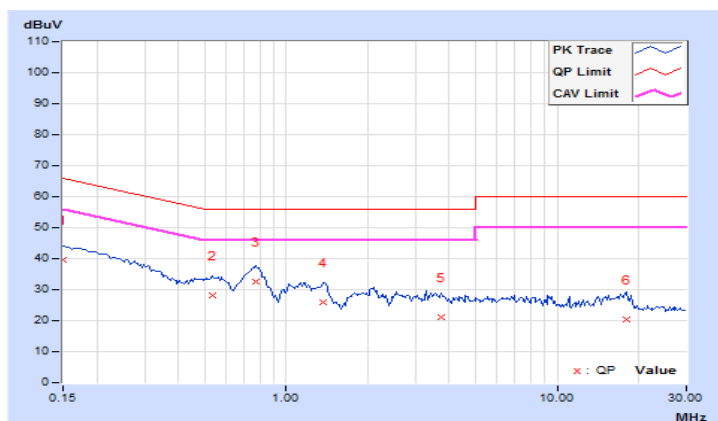


Phase	Neutral (N)	Detector Function	Quasi-Peak (QP) / Average (AV)
-------	-------------	-------------------	-----------------------------------

Phase Of Power : Neutral (N)										
No	Frequency (MHz)	Correction Factor (dB)	Reading Value (dBuV)		Emission Level (dBuV)		Limit (dBuV)		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.15000	9.71	28.96	4.93	38.67	14.64	66.00	56.00	-27.33	-41.36
2	0.54063	9.72	16.07	0.64	25.79	10.36	56.00	46.00	-30.21	-35.64
3	0.74766	9.73	19.13	6.01	28.86	15.74	56.00	46.00	-27.14	-30.26
4	1.32031	9.76	12.37	0.73	22.13	10.49	56.00	46.00	-33.87	-35.51
5	3.68359	9.83	8.79	3.06	18.62	12.89	56.00	46.00	-37.38	-33.11
6	18.64453	9.99	10.05	3.92	20.04	13.91	60.00	50.00	-39.96	-36.09

**Remarks:**

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level – Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

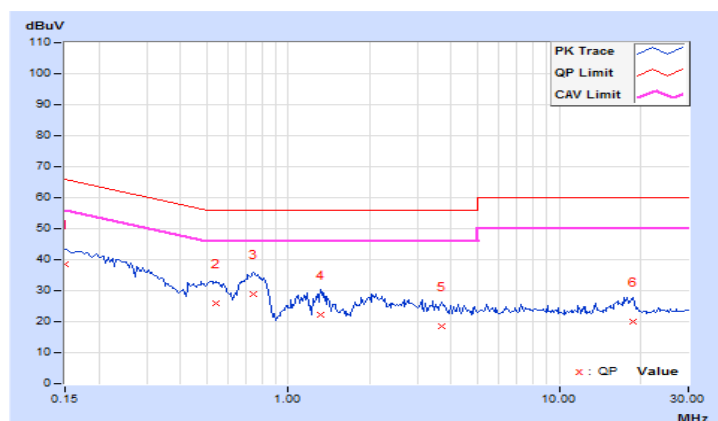


## Mode C

Phase	Line (L)	Detector Function	Quasi-Peak (QP) / Average (AV)
-------	----------	-------------------	--------------------------------

Phase Of Power : Line (L)										
No	Frequency (MHz)	Correction Factor (dB)	Reading Value (dBuV)		Emission Level (dBuV)		Limit (dBuV)		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.15000	9.72	40.25	30.19	49.97	39.91	66.00	56.00	-16.03	-16.09
2	0.28672	9.71	27.66	21.51	37.37	31.22	60.62	50.62	-23.25	-19.40
3	<b>0.52109</b>	<b>9.72</b>	<b>28.92</b>	<b>26.07</b>	<b>38.64</b>	<b>35.79</b>	<b>56.00</b>	<b>46.00</b>	<b>-17.36</b>	<b>-10.21</b>
4	1.66797	9.78	19.54	14.68	29.32	24.46	56.00	46.00	-26.68	-21.54
5	3.35156	9.83	23.00	17.01	32.83	26.84	56.00	46.00	-23.17	-19.16
6	11.04688	9.92	20.29	15.88	30.21	25.80	60.00	50.00	-29.79	-24.20

### Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level – Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

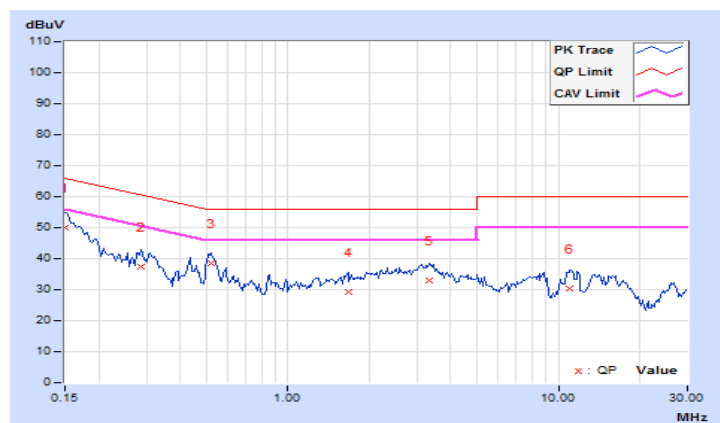


Phase	Neutral (N)	Detector Function	Quasi-Peak (QP) / Average (AV)
-------	-------------	-------------------	-----------------------------------

Phase Of Power : Neutral (N)										
No	Frequency (MHz)	Correction Factor (dB)	Reading Value (dBuV)		Emission Level (dBuV)		Limit (dBuV)		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.15000	9.71	40.08	25.62	49.79	35.33	66.00	56.00	-16.21	-20.67
2	0.26719	9.71	27.92	13.68	37.63	23.39	61.20	51.20	-23.57	-27.81
3	0.54844	9.72	25.97	21.87	35.69	31.59	56.00	46.00	-20.31	-14.41
4	0.77891	9.73	15.75	10.86	25.48	20.59	56.00	46.00	-30.52	-25.41
5	3.29688	9.83	22.21	16.50	32.04	26.33	56.00	46.00	-23.96	-19.67
6	18.82813	9.99	19.12	12.70	29.11	22.69	60.00	50.00	-30.89	-27.31


**Remarks:**

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level – Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

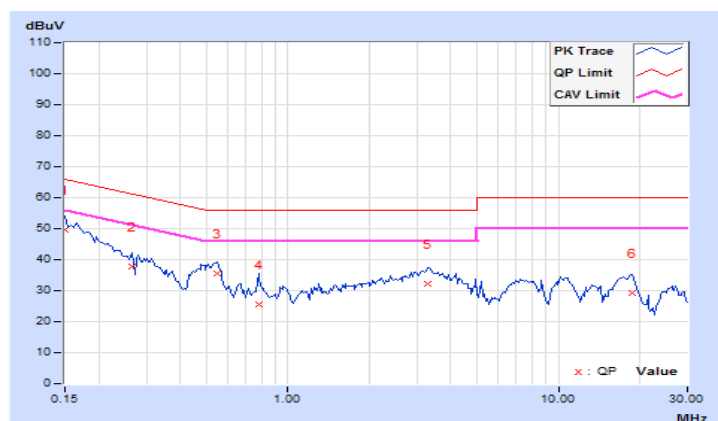

### 4.3 Channel Bandwidth

#### 4.3.1 Test Setup



#### 4.3.2 Test Instruments

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
ROHDE & SCHWARZ Spectrum Analyzer	FSV40	101042	Sep. 23, 2019	Sep. 22, 2020

**NOTE:** The calibration interval of the above test instruments is 12/24 months. And the calibrations are traceable to NML/ROC and NIST/USA.

#### 4.3.3 Test Procedure

- Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
- Turn on the EUT and connect it to measurement instrument. Then set it to any one convenient frequency within its operating range. Set a reference level on the measuring instrument equal to the highest peak value.
- Measure the frequency difference of two frequencies that were attenuated 20dB from the reference level. Record the frequency difference as the emission bandwidth.
- Repeat above procedures until all frequencies measured were complete.

#### 4.3.4 Deviation from Test Standard

No deviation.


#### 4.3.5 EUT Operating Condition

The software provided by client enabled the EUT to transmit and receive data at lowest, middle and highest channel frequencies individually.

#### 4.3.6 Test Results


##### Mode A

CHANNEL	FREQUENCY (MHz)	20dB BANDWIDTH (MHz)
0	2402	1.13
39	2441	1.14
77	2479	1.15

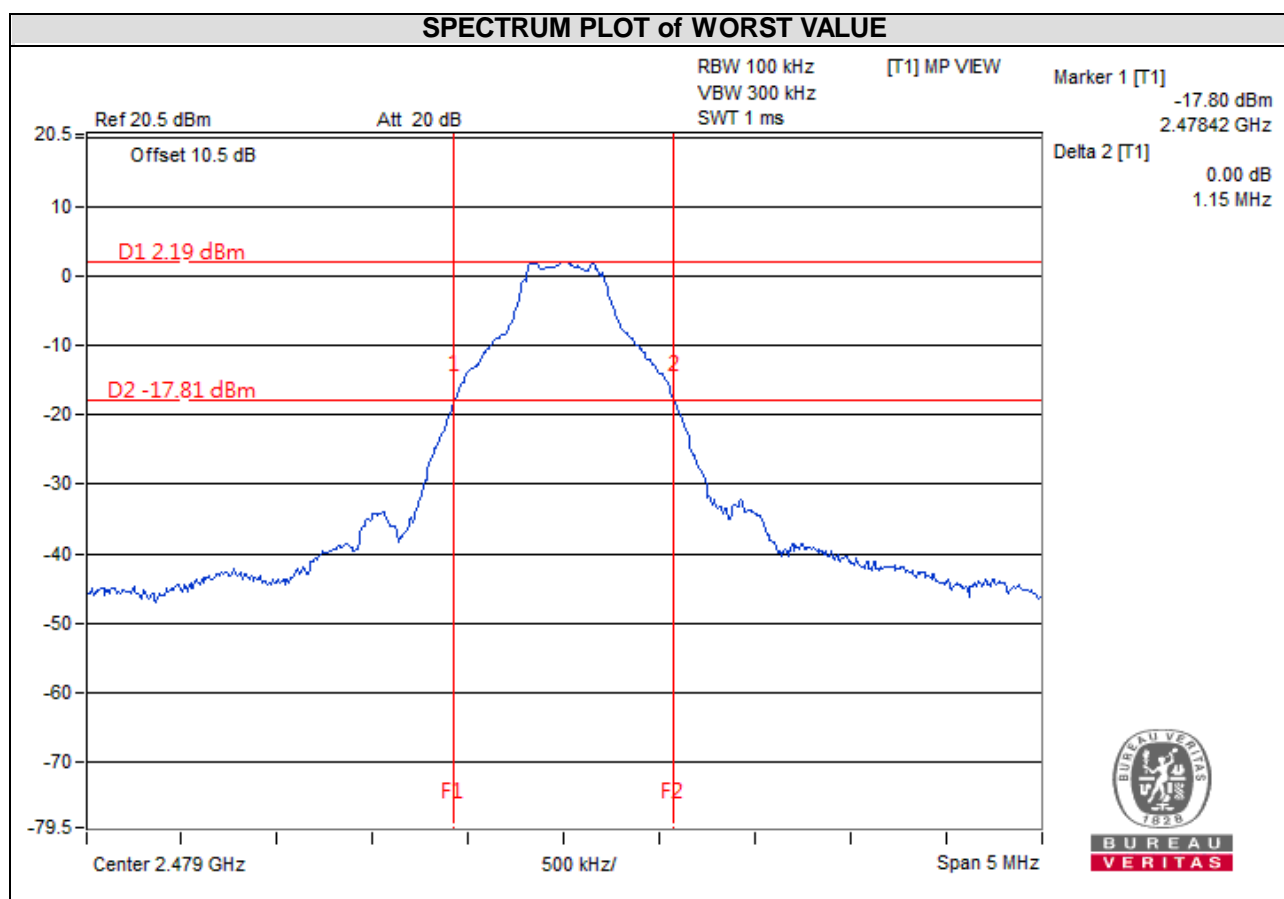



## Annex A- Band Edge Measurement

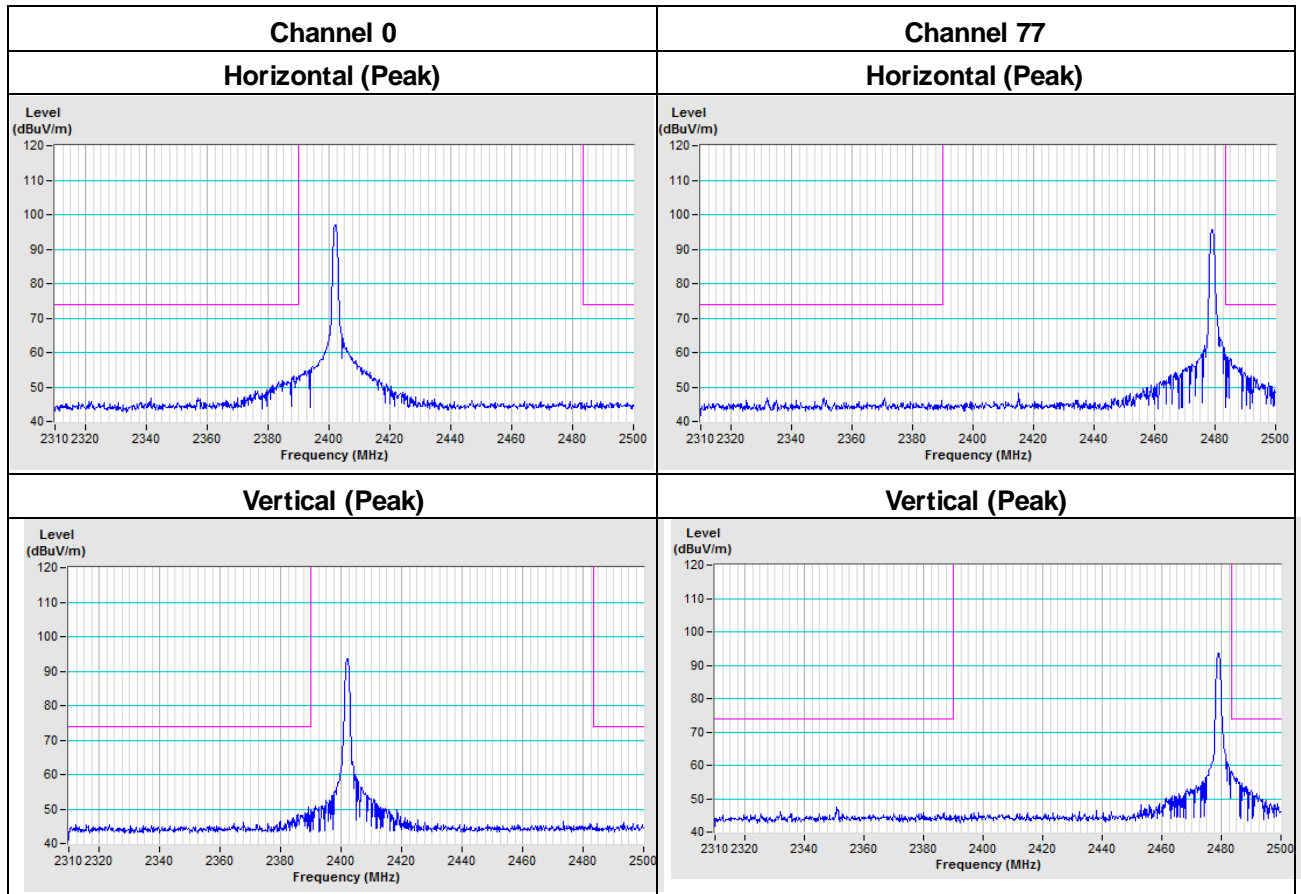

## 5 Pictures of Test Arrangements

Please refer to the attached file (Test Setup Photo).

## Appendix – Information of the Testing Laboratories

We, Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch, were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are FCC recognized accredited test firms and accredited according to ISO/IEC 17025.

If you have any comments, please feel free to contact us at the following:

**Lin Kou EMC/RF Lab**

Tel: 886-2-26052180

Fax: 886-2-26051924

**Hsin Chu EMC/RF/Telecom Lab**

Tel: 886-3-6668565

Fax: 886-3-6668323

**Hwa Ya EMC/RF/Safety Lab**

Tel: 886-3-3183232

Fax: 886-3-3270892

**Email:** [service.adt@tw.bureauveritas.com](mailto:service.adt@tw.bureauveritas.com)

**Web Site:** [www.bureauveritas-adt.com](http://www.bureauveritas-adt.com)

The address and road map of all our labs can be found in our web site also.

--- END ---