

**ELECTROMAGNETIC EMISSIONS COMPLIANCE REPORT
INTENTIONAL RADIATOR CERTIFICATION TO
FCC PART 15 SUBPART C REQUIREMENT**

OF

NFC Bluetooth Stereo Dual Alarm Clock with Dual Wireless USB Charging

Model No.: iBN350, iBN350G, iBN350X (X denote as color of cabinet)

Trademark: iHome

FCC ID: EMOIBN350

Report No.: ED160802028E1

Issue Date: August 17, 2016

Prepared for

**SDI Technologies Inc.
1299, Main Street, Rahway, NJ 07065, U.S.A.**

Prepared by

**EMTEK(Dongguan) Co., Ltd.
No.281, Guantai Road, Nancheng District,
Dongguan, Guangdong, China
TEL: 86-769-22807078
FAX: 86-769-22807079**

**This report shall not be reproduced, except in full, without the written approval of
EMTEK(Dongguan) Co., Ltd.**

VERIFICATION OF COMPLIANCE

Applicant:	SDI Technologies Inc. 1299, Main Street, Rahway, NJ 07065, U.S.A.
Manufacturer:	SDI Technologies Inc. 1299, Main Street, Rahway, NJ 07065, U.S.A.
Factory :	DONGGUAN FINEMOST ELECTRONICS CO.,LTD 46 Shangxing Road, Shangjiao, Chang-An Town, Dongguan City, Guangdong, P.R.China
Product Description:	NFC Bluetooth Stereo Dual Alarm Clock with Dual Wireless USB Charging
Trade Mark:	iHome
Model Number:	iBN350, iBN350G, iBN350X (X denote as color of cabinet) (Note: The samples are the same except difference color of appearance and model number. So iBN350 was selected for full test.)

We hereby certify that:

The above equipment was tested by EMTEK(Dongguan) Co., Ltd. The test data, data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in ANSI C63.10-2013 and the energy emitted by the sample EUT tested as described in this report is in compliance with conducted and radiated emission limits of FCC Rules Part 15.247(2016).

Date of Test : August 01, 2016 to August 14, 2016

Yolanda Liang

Prepared by : Yolanda Liang/Editor

Alan He

Reviewer : Alan He/Supervisor

Sam Lv

Approved & Authorized
Signer : Sam Lv/Manager

Modified Information

Version	Summary	Revision Date	Report No.
Ver.1.0	Original Report	/	ED160802028E1

Table of Contents

1.	GENERAL INFORMATION.....	6
1.1	PRODUCT DESCRIPTION	6
1.2	TEST METHODOLOGY.....	7
1.3	TEST FACILITY	8
2.	SYSTEM TEST CONFIGURATION.....	9
2.1	EUT CONFIGURATION.....	9
2.2	EUT EXERCISE.....	9
2.3	TEST PROCEDURE.....	9
2.4	CONFIGURATION OF TESTED SYSTEM	10
3.	SUMMARY OF TEST RESULTS.....	11
4.	DESCRIPTION OF TEST MODES.....	12
5.	TEST SYSTEM UNCERTAINTY	13
6.	CONDUCTED EMISSIONS TEST	14
6.1	MEASUREMENT PROCEDURE:	14
6.2	TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION).....	14
6.3	MEASUREMENT EQUIPMENT USED:	14
6.4	MEASUREMENT RESULT:.....	14
6.5	CONDUCTED MEASUREMENT PHOTOS:	19
7.	RADIATED EMISSION TEST	20
7.1	MEASUREMENT PROCEDURE.....	20
7.2	TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION).....	22
7.3	MEASUREMENT EQUIPMENT USED:.....	23
7.4	RADIATED EMISSION LIMIT	24
7.5	MEASUREMENT RESULT.....	25
7.5	RADIATED MEASUREMENT PHOTOS:.....	40
8.	CHANNEL SEPARATION TEST	41
8.1	MEASUREMENT PROCEDURE.....	41
8.2	TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION).....	41
8.3	MEASUREMENT EQUIPMENT USED:.....	41
8.4	MEASUREMENT RESULTS:	41
9.	20DB BANDWIDTH TEST	48
9.1	MEASUREMENT PROCEDURE.....	48
9.2	TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION).....	48
9.3	MEASUREMENT EQUIPMENT USED:.....	48
9.4	MEASUREMENT RESULTS:.....	48

10.	QUANTITY OF HOPPING CHANNEL TEST	55
10.1	MEASUREMENT PROCEDURE	55
10.2	TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)	55
10.3	MEASUREMENT EQUIPMENT USED:	55
10.4	MEASUREMENT RESULTS:	55
11.	TIME OF OCCUPANCY (DWELL TIME) TEST	56
11.1	TEST DESCRIPTION	56
11.2	TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)	56
11.3	MEASUREMENT EQUIPMENT USED:	56
11.4	TEST REQUIREMENTS / LIMITS	56
11.5	TEST RESULT	57
12.	MAXIMUM PEAK OUTPUT POWER TEST	59
12.1	MEASUREMENT PROCEDURE	59
12.2	TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)	59
12.3	MEASUREMENT EQUIPMENT USED:	59
12.4	MEASUREMENT RESULTS:	60
13.	BAND EDGE TEST	66
13.1	MEASUREMENT PROCEDURE	66
13.2	TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)	67
13.3	MEASUREMENT EQUIPMENT USED:	67
13.4	MEASUREMENT RESULTS:	68
14.	ANTENNA APPLICATION	70
14.1	ANTENNA REQUIREMENT	70
14.2	RESULT	70

Appendix I (Photos of EUT) (5 pages)

1. GENERAL INFORMATION

1.1 Product Description

Characteristics	Description
Product Name	NFC Bluetooth Stereo Dual Alarm Clock with Dual Wireless USB Charging
Model number	iBN350
Power Supply	Adaptor 1: SW0903000-I04(manufactured by Dongguan Becky Electronics Tech Co., Ltd. Input AC100-240V~50/60Hz, 800mA Max, output DC9V---3A) Adaptor 2: GQ30-090300-AU(manufactured by Dongguan City Gangqi Electronic Co., Ltd. Input AC100-240V~50/60Hz, 1.0A Max, output DC9V---3A)
Kind of Device	Bluetooth Ver.4.1+EDR
Modulation	GFSK, $\pi/4$ -DQPSK, 8DPSK
Operating Frequency Range	2402-2480MHz
Number of Channels	79
Transmit Power Max(PK)	1.71dBm(0.001483W)
Antenna Type	Internal PCB antenna
Antenna Gain	2.3dBi
Product Software Version	1.13
Product Hardware version	V01
Radio Software Version	V01
Radio Hardware version	V01

1.2 Test Methodology

Both conducted and radiated testing was performed according to the procedures in ANSI C63.10-2013. Radiated testing was performed at an antenna to EUT distance 3 meters.

1.3 Test Facility

Site Description

EMC Lab. : Registered on FCC, June 18, 2014
The Certificate Number is 247565.

Registered on Industry Canada, February 19, 2014
The Certificate Number is 9444A

Name of Firm : EMTEK(Dongguan) Co., Ltd.

Site Location : No.281, Guantai Road, Nancheng District,
Dongguan, Guangdong, China

2. System Test Configuration

2.1 EUT Configuration

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner which intends to maximize its emission characteristics in a continuous normal application.

2.2 EUT Exercise

The Transmitter was operated in the normal operating mode. The Tx frequency was fixed which was for the purpose of the measurements.

2.3 Test Procedure

2.3.1 Conducted Emissions

The EUT is placed on a turn table which is 0.8 m above ground plane. According to the requirements in Section 13.1.4.1 of ANSI C63.10-2013. Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30MHz using CISPR Quasi-Peak and average detector mode.

2.3.2 Radiated Emissions

Below 1000MHz, The EUT was placed on a turn table which is 0.8m above ground plane. And above 1000MHz, The EUT was placed on a styrofoam table which is 1.5m above ground plane. The turn table shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3m away from the receiving antenna which varied from 1m to 4m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the max. emission, the relative positions of EUT was fixed in a particular direction according to the requirements in Section 13.1.4.1 of ANSI C63.10-2013.

2.4 Configuration of Tested System

Fig. 2-1 Configuration of Tested System



Table 2-1 Equipment Used in Tested System

Item	Equipment	Trademark	Model No.	FCC ID	Note
1.	NFC Bluetooth Stereo Dual Alarm Clock with Dual Wireless USB Charging	iHome	iBN350	EMOIBN350	EUT
2	Adapter	N/A	Adaptor 1: SW0903000-I04 Input AC100-240V~50/60Hz, 800mA Max, output DC9V---3A) Adaptor 2: GQ30-090300-AU GQ30-090300-AU Input AC100-240V~50/60Hz, 1.0A Max, output DC9V---3A)	N/A	Support Equipment

Note:

- (1) Unless otherwise denoted as EUT in 『Remark』 column , device(s) used in tested system is a support equipment.

3. Summary of Test Results

FCC Rules	Description Of Test	Result
§15.207	AC Power Conducted Emission	Compliant
§15.247(d),§15.209	Radiated Emission	Compliant
§15.247(a)(1)	Channel Separation test	Compliant
§15.247(a)(1)	20dB Bandwidth	Compliant
§15.247(a)(1)(iii)	Quantity of Hopping Channel	Compliant
§15.247(a)(1)(iii)	Time of Occupancy(Dwell Time)	Compliant
§15.247(b)	Max Peak output Power test	Compliant
§15.247(d)	Band edge test	Compliant
§15.203	Antenna Requirement	Compliant

4. Description of test modes

The EUT has been tested under its typical operating condition. Pre-defined engineering program for regulatory testing used to control the EUT for staying in continuous transmitting. Only the worst case data were reported.

The EUT has been associated with peripherals pursuant to ANSI C63.10-2013 and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: radiation (9 KHz to the 10th harmonics of the highest fundamental frequency or to 40 GHz, whichever is lower).

The EUT has been tested under TX operating condition.

This EUT is a FHSS system, were conducted to determine the final configuration from all possible combinations. We use software control the EUT, Let EUT hopping on and transmit with highest power, all the modes GFSK, $\pi/4$ -DQPSK, 8DPSK have been tested. 79 Channels are provided by EUT. The 3 channels of lower, medium and higher were chosen for test.

Channel	Frequency(MHz)
1	2402
40	2441
79	2480

5. TEST SYSTEM UNCERTAINTY

The following measurement uncertainty levels have been estimated for tests performed on the apparatus:

Parameter	Uncertainty
Radio Frequency	$\pm 1 \times 10^{-5}$
Maximum Peak Output Power Test	$\pm 1.0\text{dB}$
Conducted Emissions Test	$\pm 2.0\text{dB}$
Radiated Emission Test	$\pm 2.0\text{dB}$
Power Density	$\pm 2.0\text{dB}$
Occupied Bandwidth Test	$\pm 1.0\text{dB}$
Band Edge Test	$\pm 3\text{dB}$
All emission, radiated	$\pm 3\text{dB}$
Antenna Port Emission	$\pm 3\text{dB}$
Temperature	$\pm 0.5^{\circ}\text{C}$
Humidity	$\pm 3\%$


Remark: The coverage Factor ($k=2$), and measurement Uncertainty for a level of Confidence of 95%

6. Conducted Emissions Test

6.1 Measurement Procedure:

1. The EUT was placed on a table, which is 0.8m above ground plane.
2. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
3. Repeat above procedures until all frequency measured was complete.

6.2 Test SET-UP (Block Diagram of Configuration)

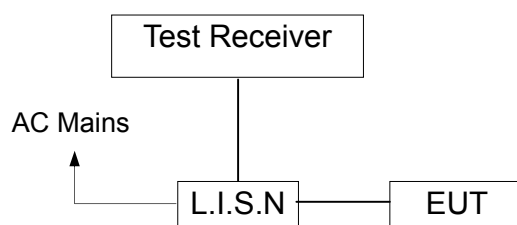

6.3 Measurement Equipment Used:

Conducted Emission Test Site						
EQUIPMENT TYPE	MFR	MODEL NUMBER	SERIAL NUMBER	Characteristics	Last Cal.	Due date
Test Receiver	Rohde & Schwarz	ESCS30	100018	9kHz~3GHz	03/15/2016	03/14/2017
L.I.S.N	Rohde & Schwarz	ENV216	100017	9KHz-300MHz	03/15/2016	03/14/2017
RF Switching Unit	CDS	RSU-M2	38401	9KHz-300MHz	03/15/2016	03/14/2017
Coaxial Cable	CDS	79254	46107086	9kHz~3GHz	03/15/2016	03/14/2017


6.4 Measurement Result:

Pass.

All the modulation modes were tested the data of the worst mode (GFSK TX 2402MHz) are recorded in the following pages and the others modulation methods do not exceed the limits.

Please refer to the following data.

Adapter 1: Becky

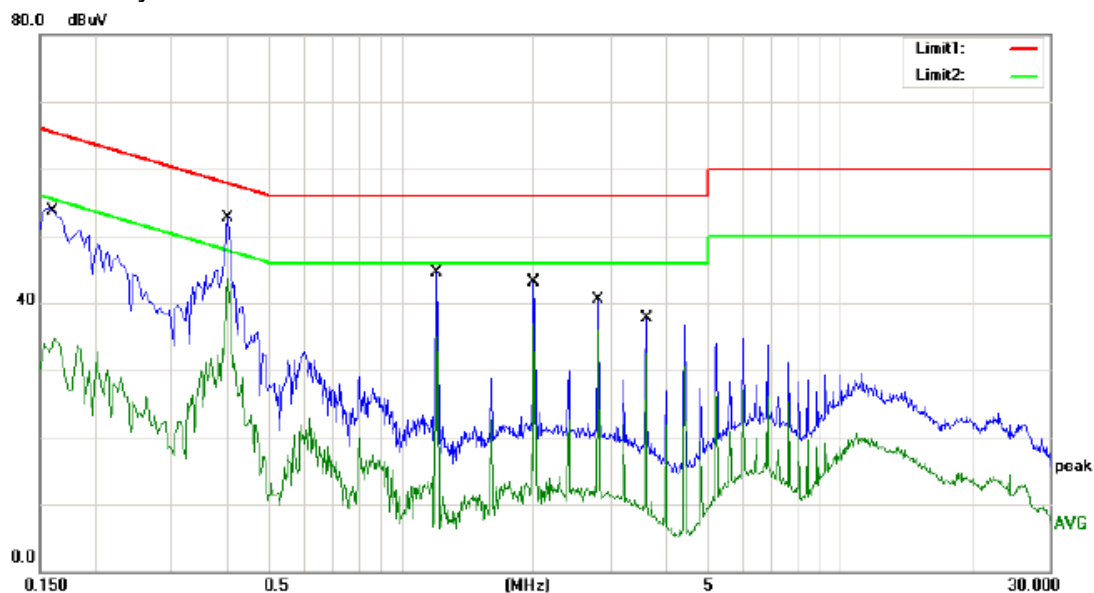

Site site #1

Phase: **L1**

Temperature: 24

Limit: (CE)FCC PART 15 class B_QP

Power: AC 120V/60Hz


Humidity: 55 %

Mode: TX2402

Note: SW0903000-I04

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV	dBuV	dB	Detector	Comment
1		0.1615	41.44	10.01	51.45	65.39	-13.94	QP	
2		0.1615	24.68	10.01	34.69	55.39	-20.70	AVG	
3		0.4018	40.57	10.07	50.64	57.82	-7.18	QP	
4	*	0.4018	33.54	10.07	43.61	47.82	-4.21	AVG	
5		1.1970	32.48	10.10	42.58	56.00	-13.42	QP	
6		1.1970	24.86	10.10	34.96	46.00	-11.04	AVG	
7		2.0011	30.99	10.10	41.09	56.00	-14.91	QP	
8		2.0011	26.72	10.10	36.82	46.00	-9.18	AVG	
9		2.8090	28.46	10.10	38.56	56.00	-17.44	QP	
10		2.8090	25.71	10.10	35.81	46.00	-10.19	AVG	
11		3.6033	25.65	10.10	35.75	56.00	-20.25	QP	
12		3.6033	22.38	10.10	32.48	46.00	-13.52	AVG	

*:Maximum data x:Over limit !:over margin Comment: Factor build in receiver. Operator: YE

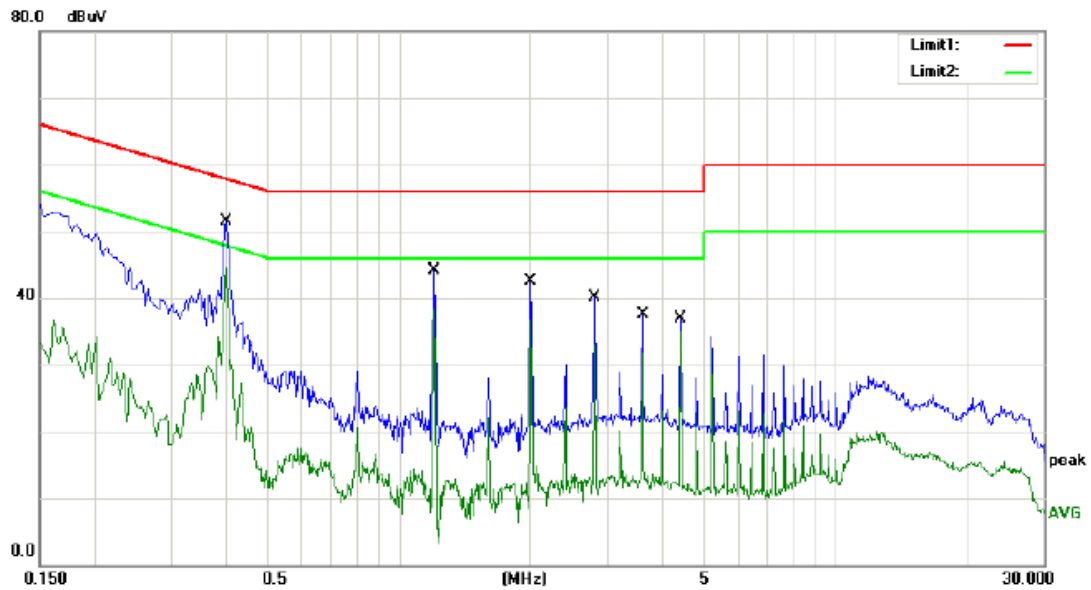


Site site #1
 Limit: (CE)FCC PART 15 class B_QP
 Mode: TX2402
 Note: SW0903000-I04

Phase: **N**
 Power: AC 120V/60Hz
 Temperature: 24
 Humidity: 55 %

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV	dBuV	dB	Detector	Comment
1		0.4018	39.34	10.07	49.41	57.82	-8.41	QP	
2	*	0.4018	34.61	10.07	44.68	47.82	-3.14	AVG	
3		1.2033	32.05	10.10	42.15	56.00	-13.85	QP	
4		1.2033	28.21	10.10	38.31	46.00	-7.69	AVG	
5		2.0011	-5.63	10.10	4.47	56.00	-51.53	QP	
6		2.0011	26.57	10.10	36.67	46.00	-9.33	AVG	
7		2.8090	27.97	10.10	38.07	56.00	-17.93	QP	
8		2.8090	22.82	10.10	32.92	46.00	-13.08	AVG	
9		3.6033	25.35	10.10	35.45	56.00	-20.55	QP	
10		3.6033	21.62	10.10	31.72	46.00	-14.28	AVG	
11		4.4070	24.90	10.10	35.00	56.00	-21.00	QP	
12		4.4070	24.89	10.10	34.99	46.00	-11.01	AVG	

*:Maximum data x:Over limit !:over margin Comment: Factor build in receiver. Operator: YE


Adapter 2:Gangqi

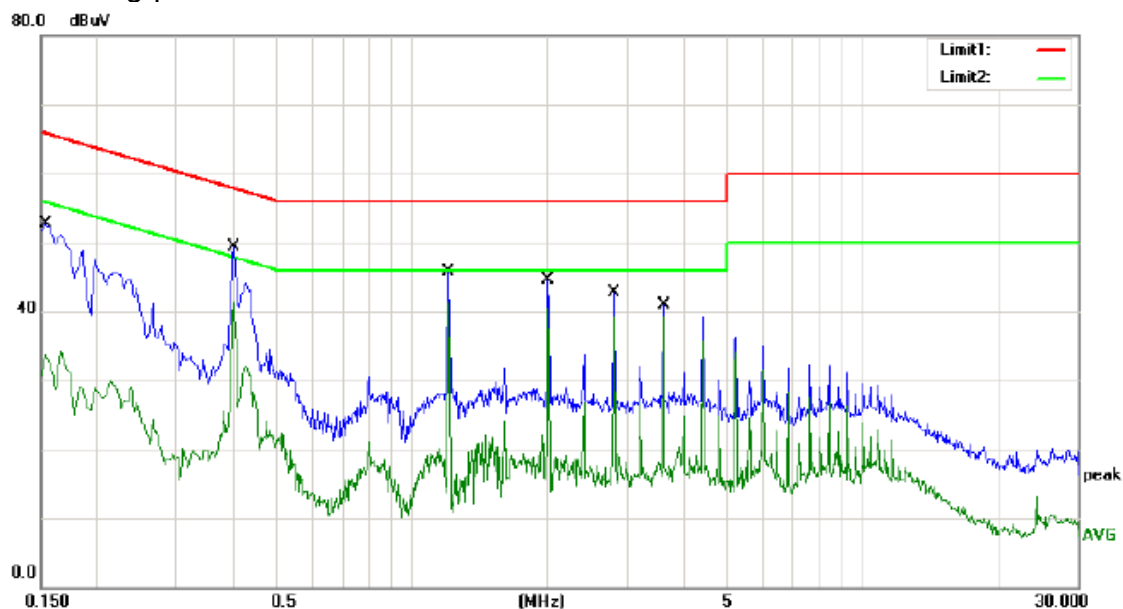

Site site #1 Phase: **L1** Temperature: 24
 Limit: (CE)FCC PART 15 class B_QP Power: AC 120V/60Hz Humidity: 55 %
 Mode: TX2402
 Note: GQ30-090300-AU

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector	Comment
1		0.1532	40.61	10.01	50.62	65.82	-15.20	QP	
2		0.1532	23.75	10.01	33.76	55.82	-22.06	AVG	
3		0.4018	37.21	10.07	47.28	57.82	-10.54	QP	
4		0.4018	31.20	10.07	41.27	47.82	-6.55	AVG	
5		1.1970	33.65	10.10	43.75	56.00	-12.25	QP	
6	*	1.1970	31.14	10.10	41.24	46.00	-4.76	AVG	
7		2.0011	32.40	10.10	42.50	56.00	-13.50	QP	
8		2.0011	30.41	10.10	40.51	46.00	-5.49	AVG	
9		2.8090	30.50	10.10	40.60	56.00	-15.40	QP	
10		2.8090	29.01	10.10	39.11	46.00	-6.89	AVG	
11		3.6033	28.73	10.10	38.83	56.00	-17.17	QP	
12		3.6033	28.91	10.10	39.01	46.00	-6.99	AVG	

*:Maximum data x:Over limit !:over margin Comment: Factor build in receiver. Operator: YE

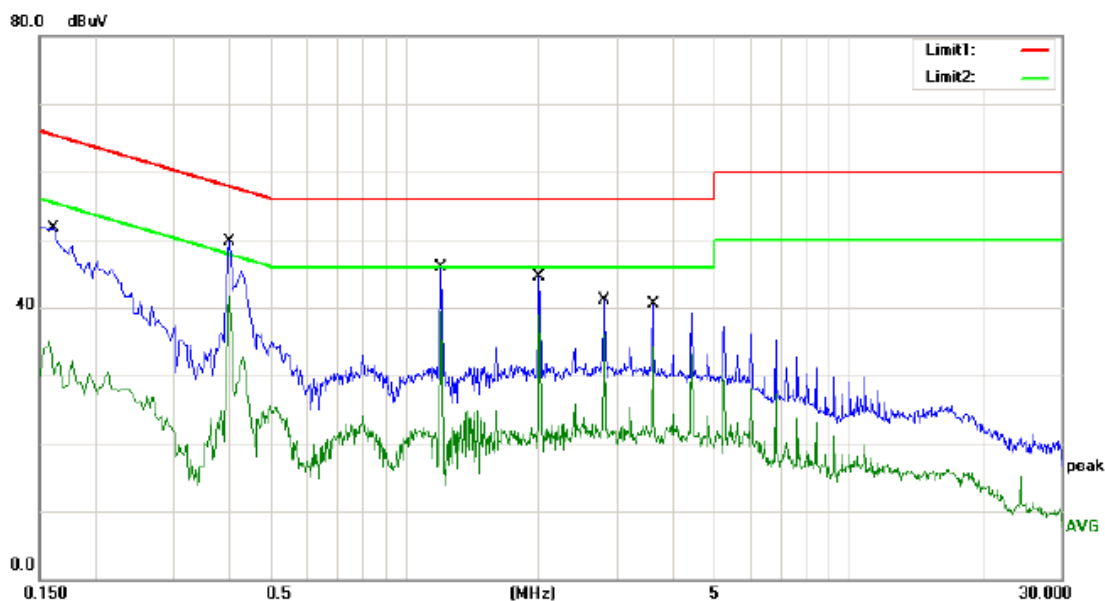

Site: site #1
 Limit: (CE)FCC PART 15 class B_QP
 Mode: TX2402
 Note: GQ30-090300-AU

Phase: N
 Power: AC 120V/60Hz
 Temperature: 24
 Humidity: 55 %

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector	Comment
1		0.1615	39.72	10.01	49.73	65.39	-15.66	QP	
2		0.1615	25.03	10.01	35.04	55.39	-20.35	AVG	
3		0.4018	37.83	10.07	47.90	57.82	-9.92	QP	
4	*	0.4018	31.72	10.07	41.79	47.82	-6.03	AVG	
5		1.2033	33.76	10.10	43.86	56.00	-12.14	QP	
6		1.2033	29.50	10.10	39.60	46.00	-6.40	AVG	
7		2.0011	32.49	10.10	42.59	56.00	-13.41	QP	
8		2.0011	28.81	10.10	38.91	46.00	-7.09	AVG	
9		2.8090	29.01	10.10	39.11	56.00	-16.89	QP	
10		2.8090	26.00	10.10	36.10	46.00	-9.90	AVG	
11		3.6033	28.37	10.10	38.47	56.00	-17.53	QP	
12		3.6033	24.26	10.10	34.36	46.00	-11.64	AVG	

*:Maximum data x:Over limit !:over margin Comment: Factor build in receiver. Operator: YE

6.5 Conducted Measurement Photos:



7. Radiated Emission Test

7.1 Measurement Procedure

1. The testing follows the guidelines in Spurious Radiated Emissions of ANSI C63.10-2013.
2. Below 1000MHz, The EUT was placed on a turn table which is 0.8m above ground plane. And above 1000MHz, The EUT was placed on a styrofoam table which is 1.5m above ground plane.
3. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
4. For each suspected emission, the EUT was arranged to its worst case and then tune the Antenna tower (From 1m to 4m) and turntable (from 0 degree to 360 degree) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level to comply with the guidelines.
5. Set to the maximum power setting and enable the EUT transmit continuously.
6. Final measurement (Above 1GHz): The frequency range will be divided into different sub ranges depending of the frequency range of the used horn antenna. The EMI Receiver set to peak and average mode and a resolution bandwidth of 1MHz. The measurement will be performed in horizontal and vertical polarization of the measuring antenna and while rotating the EUT in its vertical axis in the range of 0 degree to 360 degree in order to have the antenna inside the cone of radiation.
7. Test Procedure of measurement (For Above 1GHz):
 - 1) Monitor the frequency range at horizontal polarization and move the antenna over all sides of the EUT(if necessary move the EUT to another orthogonal axis).
 - 2) Change the antenna polarization and repeat 1) with vertical polarization.
 - 3) Make a hardcopy of the spectrum.
 - 4) Measure the frequency of the detected emissions with a lower span and resolution bandwidth to increase the accuracy and note the frequency value.
 - 5) Change the analyser mode to Clear/ Write and found the cone of emission.
 - 6) Rotate and move the EUT, so that the measuring distance can be enlarged to 3m and the antenna will be still inside the cone of emission.
 - 7) Measure the level of the detected frequency with the correct resolution bandwidth, with the antenna polarization and azimuth and the peak and average detector, which causes the maximum emission.
 - 8) Repeat steps 1) to 7) for the next antenna spot if the EUT is larger than the antenna beamwidth.

Use the following spectrum analyzer settings:

When spectrum scanned from 30MHz to 1GHz setting resolution bandwidth 120KHz and video bandwidth 300KHz:

EMI Test Receiver	Setting
Attenuation	Auto
RB	120KHz
VB	300KHz
Detector	QP
Trace	Max hold

When spectrum scanned above 1GHz setting resolution bandwidth 1MHz, video bandwidth 3MHz:


EMI Test Receiver	Setting
Attenuation	Auto
RB	1MHz
VB	3MHz
Detector	Peak
Trace	Max hold

When spectrum scanned above 1GHz setting resolution bandwidth 1MHz, video bandwidth 10Hz:


EMI Test Receiver	Setting
Attenuation	Auto
RB	1MHz
VB	10Hz
Detector	Peak
Trace	Max hold

7.2 Test SET-UP (Block Diagram of Configuration)


(A) Radiated Emission Test Set-Up, Frequency Below 30MHz

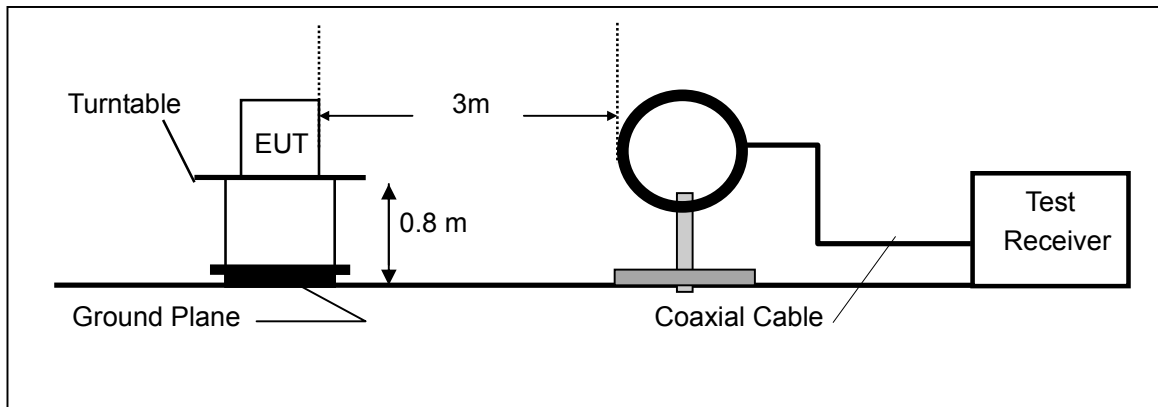

(B) Radiated Emission Test Set-Up, Frequency Below 1000MHz

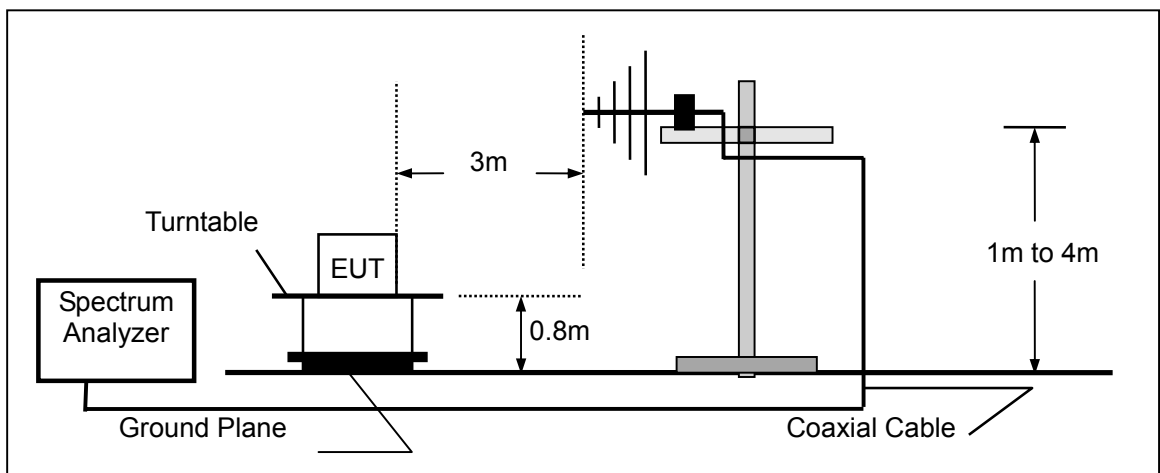

(C) Radiated Emission Test Set-Up, Frequency above 1000MHz

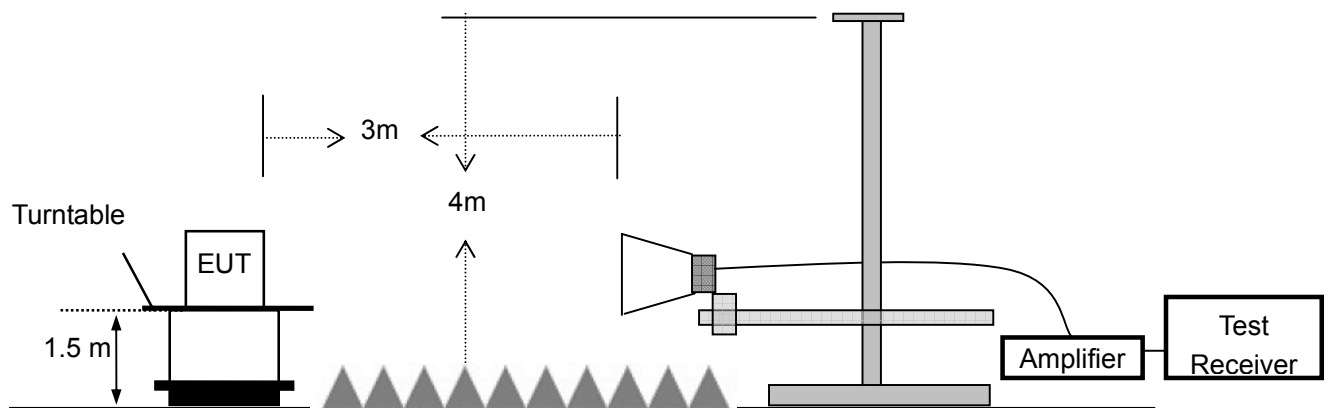

7.3 Measurement Equipment Used:

Item	Equipment	Manufacturer	Model No.	Serial No.	Characteristics	Last Cal.	Cal. Interval
1.	Test Receiver	Rohde & Schwarz	ESCI	1166.5950.03	9KHz-3GHz	3/15/2016	1 Year
2.	Loop Antenna	Schwarzbeck	FMZB 1519	012	9 KHz -30MHz	3/15/2016	1 Year
3.	Bilog Antenna	Schwarzbeck	VULB9163	000141	25MHz-2GHz	3/15/2016	1 Year
4.	Power Amplifier	CDS	RSU-M352	818	1MHz-1GHz	3/15/2016	1 Year
5.	Power Amplifier	HP	8447F	OPT H64	1GHz-26.5GHz	3/15/2016	1 Year
6.	Color Monitor	SUNSP0	SP-140A	N/A	--	3/15/2016	1 Year
7.	Single Line Filter	JIANLI	XL-3	N/A	--	3/15/2016	1 Year
8.	Single Phase Power Line Filter	JIANLI	DL-2X100B	N/A	--	3/15/2016	1 Year
9.	3 Phase Power Line Filter	JIANLI	DL-4X100B	N/A	--	3/15/2016	1 Year
10.	DC Power Filter	JIANLI	DL-2X50B	N/A	--	3/15/2016	1 Year
11.	Cable	Schwarzbeck	PLF-100	549489	9KHz-3GHz	3/15/2016	1 Year
12.	Cable	Rosenberger	CIL02	A0783566	9KHz-3GHz	3/15/2016	1 Year
13.	Cable	Rosenberger	RG 233/U	525178	9KHz-3GHz	3/15/2016	1 Year
14.	Signal Analyzer	Rohde & Schwarz	FSV30	103040	9KHz-40GHz	3/15/2016	1 Year
15.	Horn Antenna	Schwarzbeck	BBHA9120D	9120D-1272	1GHz-18GHz	3/15/2016	1 Year
16.	Horn Antenna	Schwarzbeck	BBHA 9170	BBHA9170399	14GHz -26.5GHz	3/15/2016	1 Year
17.	Power Amplifier	LUNAR EM	LNA1G18-40	J10100000081	1GHz-26.5GHz	3/15/2016	1 Year
18.	Cable	H+S	CBL-26	N/A	1GHz-26.5GHz	3/15/2016	1 Year
19.	Cable	H+S	CBL-26	N/A	1GHz-26.5GHz	3/15/2016	1 Year
20.	Cable	H+S	CBL-26	N/A	1GHz-26.5GHz	3/15/2016	1 Year

7.4 Radiated Emission Limit

The emissions from an intentional radiator shall not exceed the field strength levels specified in the following table 15.209(a):

Frequencies (MHz)	Field Strength (micorvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

15.205 Restricted bands of operation

MHz	MHz	MHz	GHz
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
¹ 0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 - 156.52525	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.7 - 156.9	2690 - 2900	22.01 - 23.12
8.41425 - 8.41475	162.0125 - 167.17	3260 - 3267	23.6 - 24.0
12.29 - 12.293	167.72 - 173.2	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	240 - 285	3345.8 - 3358	36.43 - 36.5
12.57675 - 12.57725	322 - 335.4	3600 - 4400	(²)

Remark 1. Emission level in dBuV/m=20 log (uV/m)

: 2. Measurement was performed at an antenna to the closed point of EUT distance of meters.

3. Only spurious frequency is permitted to locate within the Restricted Bands specified in provision of § 15.205, and the emissions located in restricted bands also comply with 15.209 limit.

7.5 Measurement Result

Below 30MHz:

Operation Mode:	TX	Test Date :	August 14, 2016
Frequency Range:	9KHz~30MHz	Temperature :	28℃
Test Result:	PASS	Humidity :	65 %
Measured Distance:	3m	Test By:	Leon

Freq. (MHz)	Ant.Pol. H/V	Emission Level (dBuV/m)	Limit 3m (dBuV/m)	Over (dB)
--	--	--	--	--

Note: The low frequency, which started from 9KHz-30MHz, was pre-scanned and the result which was 20dB lower than the limit line per 15.31(o) was not reported.

Below 1000MHz:

Pass.

All the modulation modes were tested the data of the worst mode (GFSK TX 2441MHz) are recorded in the following pages and the others modulation methods do not exceed the limits.

Please refer to the following data.

Adapter 1: Becky



No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		60.0700	42.35	-19.09	23.26	40.00	-16.74	QP		
2	*	135.7300	51.36	-17.73	33.63	43.50	-9.87	QP		
3		149.3100	45.13	-18.56	26.57	43.50	-16.93	QP		
4		171.6200	47.20	-19.56	27.64	43.50	-15.86	QP		
5		212.3600	42.63	-17.81	24.82	43.50	-18.68	QP		
6		264.7400	38.60	-16.43	22.17	46.00	-23.83	QP		

*:Maximum data x:Over limit !:over margin

Operator: washington



Site: Chamber #1

Polarization: **Vertical**

Temperature: 26

Limit: (RE)FCC PART 15 class B 3m

Power: AC 120V/60Hz

Humidity: 55 %

Mode: TX2441


Note: SW0903000-I04

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Antenna Height cm	Table Degree	Comment
1		47.4918	46.13	-14.50	31.63	40.00	-8.37	QP		
2	*	136.7000	55.22	-17.83	37.39	43.50	-6.11	QP		
3		154.1600	51.32	-18.96	32.36	43.50	-11.14	QP		
4		197.8100	47.15	-18.82	28.33	43.50	-15.17	QP		
5		211.3900	40.35	-17.93	22.42	43.50	-21.08	QP		
6		939.8600	29.50	-2.31	27.19	46.00	-18.81	QP		

*:Maximum data x:Over limit !:over margin

Operator: washington

Adapter 2:Gangqi

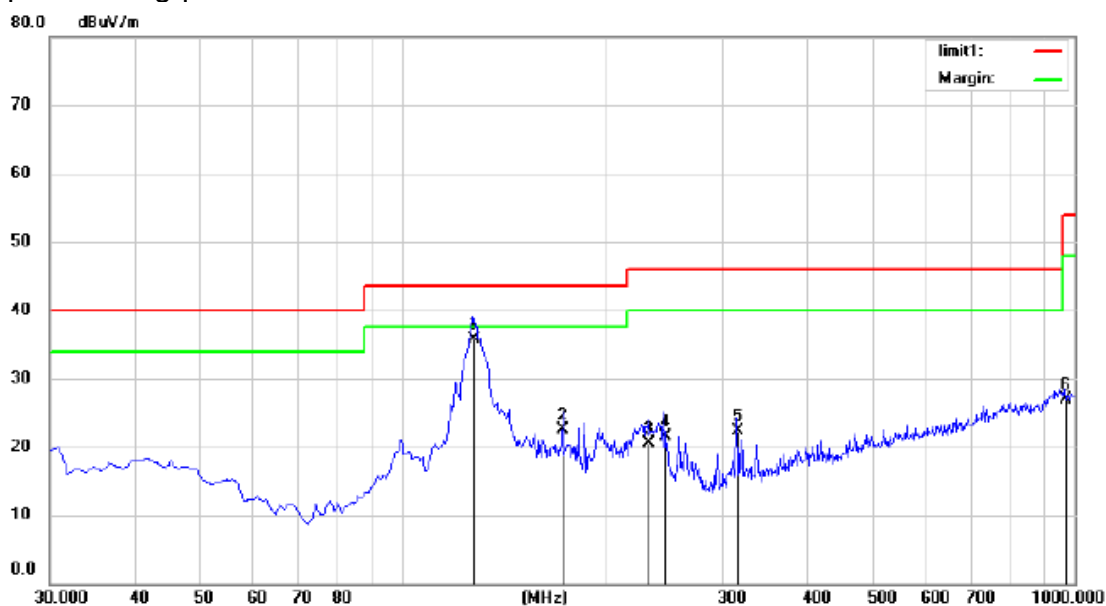

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	Antenna	Table	
		MHz	Level	Factor	ment			Height	Degree	
			dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1	*	127.9700	53.16	-17.53	35.63	43.50	-7.87	QP		
2		173.5600	42.19	-19.65	22.54	43.50	-20.96	QP		
3		232.7300	37.50	-16.99	20.51	46.00	-25.49	QP		
4		245.3400	38.20	-16.67	21.53	46.00	-24.47	QP		
5		315.1800	36.25	-14.01	22.24	46.00	-23.76	QP		
6		967.0200	29.00	-2.17	26.83	54.00	-27.17	QP		

*:Maximum data x:Over limit !:over margin

Operator: washington



Site: Chamber #1 Polarization: **Vertical** Temperature: 26
 Limit: (RE)FCC PART 15 class B 3m Power: AC 120V/60Hz Humidity: 55 %
 Mode: TX2441
 Note: GQ30-090300-AU

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	Antenna	Table	
		MHz	Level	Factor	ment			Height	Degree	Comment
			dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	
1		128.9400	49.30	-17.51	31.79	43.50	-11.71	QP		
2	*	136.7000	50.30	-17.83	32.47	43.50	-11.03	QP		
3		146.4000	44.35	-18.48	25.87	43.50	-17.63	QP		
4		163.8600	47.15	-19.44	27.71	43.50	-15.79	QP		
5		178.4100	48.60	-19.83	28.77	43.50	-14.73	QP		
6		219.1500	42.30	-17.25	25.05	46.00	-20.95	QP		

*:Maximum data x:Over limit !:over margin

Operator: washington

Adapter 1: Becky

Above 1000MHz~10th Harmonics:

Operation Mode: GFSK (CH1: 2402MHz) Test Date : August 14, 2016

Freq. (MHz)	Ant. Pol. H/V	Emission Level(dBuV/m)		Limit 3m(dBuV/m)		Margin(dB)	
		PK	AV	PK	AV	PK	AV
4804	V	65.03	44.15	74	54	-8.97	-9.85
7206	V	63.25	43.62	74	54	-10.75	-10.38
9608	V	62.01	42.15	74	54	-11.99	-11.85
12010	V	61.58	41.05	74	54	-12.42	-12.95
14412	V	60.55	40.69	74	54	-13.45	-13.31
16814	V	60.43	40.05	74	54	-13.57	-13.95
4804	H	65.36	45.25	74	54	-8.64	-8.75
7206	H	64.15	44.05	74	54	-9.85	-9.95
9608	H	63.05	43.62	74	54	-10.95	-10.38
12010	H	62.17	42.15	74	54	-11.83	-11.85
14412	H	61.48	41.04	74	54	-12.52	-12.96
16814	H	60.25	40.69	74	54	-13.75	-13.31

Operation Mode: GFSK (CH40: 2441MHz) Test Date : August 14, 2016

Freq. (MHz)	Ant. Pol. H/V	Emission Level(dBuV/m)		Limit 3m(dBuV/m)		Margin(dB)	
		PK	AV	PK	AV	PK	AV
4882	V	66.36	44.35	74	54	-7.64	-9.65
7323	V	65.25	43.62	74	54	-8.75	-10.38
9764	V	64.15	42.15	74	54	-9.85	-11.85
12205	V	63.25	41.05	74	54	-10.75	-12.95
14646	V	62.15	40.78	74	54	-11.85	-13.22
17087	V	60.42	40.52	74	54	-13.58	-13.48
4882	H	65.35	45.16	74	54	-8.65	-8.84
7323	H	64.15	44.05	74	54	-9.85	-9.95
9764	H	63.25	43.62	74	54	-10.75	-10.38
12205	H	62.04	42.15	74	54	-11.96	-11.85
14646	H	61.5	41.07	74	54	-12.5	-12.93
17087	H	60.85	40.85	74	54	-13.15	-13.15

Operation Mode: GFSK (CH79: 2480MHz) Test Date : August 14, 2016

Freq. (MHz)	Ant. Pol. H/V	Emission Level(dBuV/m)		Limit 3m(dBuV/m)		Margin(dB)	
		PK	AV	PK	AV	PK	AV
4960	V	66.35	45.35	74	54	-7.65	-8.65
7440	V	63.15	44.15	74	54	-10.85	-9.85
9920	V	62.05	43.69	74	54	-11.95	-10.31
12400	V	61.45	42.05	74	54	-12.55	-11.95
14880	V	60.25	41.24	74	54	-13.75	-12.76
17360	V	59.68	40.58	74	54	-14.32	-13.42
4960	H	65.15	44.15	74	54	-8.85	-9.85
7440	H	64.05	43.25	74	54	-9.95	-10.75
9920	H	63.27	42.62	74	54	-10.73	-11.38
12400	H	62.05	41.05	74	54	-11.95	-12.95
14880	H	61.57	40.69	74	54	-12.43	-13.31
17360	H	60.49	39.59	74	54	-13.51	-14.41

Operation Mode: Pi/4-DQPSK (CH1: 2402MHz) Test Date : August 14, 2016

Freq. (MHz)	Ant. Pol. H/V	Emission Level(dBuV/m)		Limit 3m(dBuV/m)		Over(dB)	
		PK	AV	PK	AV	PK	AV
4804	V	65.03	44.15	74	54	-8.97	-9.85
7206	V	64.15	43.62	74	54	-9.85	-10.38
9608	V	63.05	42.11	74	54	-10.95	-11.89
12010	V	62.15	41.35	74	54	-11.85	-12.65
14412	V	61.11	40.58	74	54	-12.89	-13.42
16814	V	60.58	39.25	74	54	-13.42	-14.75
4804	H	64.35	45.72	74	54	-9.65	-8.28
7206	H	63.25	44.01	74	54	-10.75	-9.99
9608	H	62.15	43.62	74	54	-11.85	-10.38
12010	H	61.04	42.15	74	54	-12.96	-11.85
14412	H	60.58	41.58	74	54	-13.42	-12.42
16814	H	59.85	40.48	74	54	-14.15	-13.52

Operation Mode: Pi/4-DQPSK (CH40: 2441MHz) Test Date : August 14, 2016

Freq.	Ant. Pol.	Emission Level(dBuV/m)		Limit 3m(dBuV/m)		Over(dB)	
(MHz)	H/V	PK	AV	PK	AV	PK	AV
4882	V	64.35	45.35	74	54	-9.65	-8.65
7323	V	63.15	44.15	74	54	-10.85	-9.85
9764	V	62.05	43.62	74	54	-11.95	-10.38
12205	V	61.42	42.15	74	54	-12.58	-11.85
14646	V	60.58	41.05	74	54	-13.42	-12.95
17087	V	59.72	40.35	74	54	-14.28	-13.65
4882	H	65.36	44.15	74	54	-8.64	-9.85
7323	H	64.15	43.62	74	54	-9.85	-10.38
9764	H	63.25	42.15	74	54	-10.75	-11.85
12205	H	62.14	41.08	74	54	-11.86	-12.92
14646	H	61.05	40.59	74	54	-12.95	-13.41
17087	H	60.48	39.57	74	54	-13.52	-14.43

Operation Mode: Pi/4-DQPSK (CH79: 2480MHz) Test Date : August 14, 2016

Freq.	Ant. Pol.	Emission Level(dBuV/m)		Limit 3m(dBuV/m)		Over(dB)	
(MHz)	H/V	PK	AV	PK	AV	PK	AV
4960	V	64.36	44.15	74	54	-9.64	-9.85
7440	V	63.25	43.62	74	54	-10.75	-10.38
9920	V	62.15	42.05	74	54	-11.85	-11.95
12400	V	61.05	41.24	74	54	-12.95	-12.76
14880	V	60.48	40.88	74	54	-13.52	-13.12
17360	V	59.25	39.52	74	54	-14.75	-14.48
4960	H	64.35	45.15	74	54	-9.65	-8.85
7440	H	63.25	44.05	74	54	-10.75	-9.95
9920	H	62.15	43.62	74	54	-11.85	-10.38
12400	H	61.08	42.15	74	54	-12.92	-11.85
14880	H	60.24	41.05	74	54	-13.76	-12.95
17360	H	59.48	40.69	74	54	-14.52	-13.31

Operation Mode: 8DPSK (CH1: 2402MHz) Test Date : August 14, 2016

Freq.	Ant. Pol.	Emission Level(dBuV/m)		Limit 3m(dBuV/m)		Over(dB)	
(MHz)	H/V	PK	AV	PK	AV	PK	AV
4804	V	64.36	45.35	74	54	-9.64	-8.65
7206	V	63.25	44.15	74	54	-10.75	-9.85
9608	V	62.15	43.62	74	54	-11.85	-10.38
12010	V	61.04	42.15	74	54	-12.96	-11.85
14412	V	60.52	41.05	74	54	-13.48	-12.95
16814	V	59.35	40.35	74	54	-14.65	-13.65
4804	H	65.48	44.25	74	54	-8.52	-9.75
7206	H	64.25	43.62	74	54	-9.75	-10.38
9608	H	63.25	42.1	74	54	-10.75	-11.9
12010	H	62.15	41.05	74	54	-11.85	-12.95
14412	H	61.05	40.36	74	54	-12.95	-13.64
16814	H	60.35	39.25	74	54	-13.65	-14.75

Operation Mode: 8DPSK (CH40: 2441MHz) Test Date : August 14, 2016

Freq.	Ant. Pol.	Emission Level(dBuV/m)		Limit 3m(dBuV/m)		Over(dB)	
(MHz)	H/V	PK	AV	PK	AV	PK	AV
4882	V	65.35	44.15	74	54	-8.65	-9.85
7323	V	64.05	43.62	74	54	-9.95	-10.38
9764	V	63.21	42.05	74	54	-10.79	-11.95
12205	V	62.05	41.24	74	54	-11.95	-12.76
14646	V	61.48	40.36	74	54	-12.52	-13.64
17087	V	60.55	39.56	74	54	-13.45	-14.44
4882	H	64.35	45.15	74	54	-9.65	-8.85
7323	H	63.26	44.62	74	54	-10.74	-9.38
9764	H	62.01	43.24	74	54	-11.99	-10.76
12205	H	61.58	42.15	74	54	-12.42	-11.85
14646	H	60.49	41.05	74	54	-13.51	-12.95
17087	H	59.48	40.69	74	54	-14.52	-13.31

Operation Mode: 8DPSK (CH79: 2480MHz) Test Date : August 14, 2016

Freq. (MHz)	Ant. Pol. H/V	Emission Level(dBuV/m)		Limit 3m(dBuV/m)		Over(dB)	
		PK	AV	PK	AV	PK	AV
4960	V	65.35	45.35	74	54	-8.65	-8.65
7440	V	64.25	44.15	74	54	-9.75	-9.85
9920	V	63.15	43.62	74	54	-10.85	-10.38
12400	V	62.05	42.05	74	54	-11.95	-11.95
14880	V	61.48	41.58	74	54	-12.52	-12.42
17360	V	60.36	40.36	74	54	-13.64	-13.64
4960	H	64.35	46.35	74	54	-9.65	-7.65
7440	H	63.05	45.15	74	54	-10.95	-8.85
9920	H	62.15	44.24	74	54	-11.85	-9.76
12400	H	61.42	43.05	74	54	-12.58	-10.95
14880	H	60.59	42.15	74	54	-13.41	-11.85
17360	H	60.48	41.69	74	54	-13.52	-12.31

Adapter 2:Gangqi

Operation Mode: GFSK (CH1: 2402MHz) Test Date : August 14, 2016

Freq. (MHz)	Ant. Pol. H/V	Emission Level(dBuV/m)		Limit 3m(dBuV/m)		Margin(dB)	
		PK	AV	PK	AV	PK	AV
4804	V	66.93	46.84	74	54	-7.07	-7.16
7206	V	66.62	45.77	74	54	-7.38	-8.23
9608	V	65.22	45.46	74	54	-8.78	-8.54
12010	V	63.88	43.72	74	54	-10.12	-10.28
14412	V	63.08	42.62	74	54	-10.92	-11.38
16814	V	62.17	41.37	74	54	-11.83	-12.63
4804	H	66.71	45.49	74	54	-7.29	-8.51
7206	H	65.44	44.38	74	54	-8.56	-9.62
9608	H	63.47	44.01	74	54	-10.53	-9.99
12010	H	62.53	43.38	74	54	-11.47	-10.62
14412	H	61.89	42.36	74	54	-12.11	-11.64
16814	H	61.27	41.59	74	54	-12.73	-12.41

Operation Mode: GFSK (CH40: 2441MHz) Test Date : August 14, 2016

Freq. (MHz)	Ant. Pol. H/V	Emission Level(dBuV/m)		Limit 3m(dBuV/m)		Margin(dB)	
		PK	AV	PK	AV	PK	AV
4882	V	66.59	46.69	74	54	-7.41	-7.31
7323	V	65.79	45.32	74	54	-8.21	-8.68
9764	V	64.41	44.36	74	54	-9.59	-9.64
12205	V	63.09	42.45	74	54	-10.91	-11.55
14646	V	60.81	40.47	74	54	-13.19	-13.53
17087	V	59.02	39.49	74	54	-14.98	-14.51
4882	H	65.56	44.43	74	54	-8.44	-9.57
7323	H	64.37	43.68	74	54	-9.63	-10.32
9764	H	62.45	42.74	74	54	-11.55	-11.26
12205	H	60.86	41.36	74	54	-13.14	-12.64
14646	H	60.14	40.53	74	54	-13.86	-13.47
17087	H	59.49	40.05	74	54	-14.51	-13.95

Operation Mode: GFSK (CH79: 2480MHz) Test Date : August 14, 2016

Freq. (MHz)	Ant. Pol. H/V	Emission Level(dBuV/m)		Limit 3m(dBuV/m)		Margin(dB)	
		PK	AV	PK	AV	PK	AV
4960	V	66.22	45.43	74	54	-7.78	-8.57
7440	V	64.96	45.19	74	54	-9.04	-8.81
9920	V	64.42	44.62	74	54	-9.58	-9.38
12400	V	63.24	43.46	74	54	-10.76	-10.54
14880	V	62.1	42.51	74	54	-11.9	-11.49
17360	V	61.58	41.63	74	54	-12.42	-12.37
4960	H	66.29	45.67	74	54	-7.71	-8.33
7440	H	65.83	45.19	74	54	-8.17	-8.81
9920	H	64.57	44.32	74	54	-9.43	-9.68
12400	H	62.46	42.28	74	54	-11.54	-11.72
14880	H	62.18	41.85	74	54	-11.82	-12.15
17360	H	61.27	40.87	74	54	-12.73	-13.13

Operation Mode: Pi/4-DQPSK (CH1: 2402MHz) Test Date : August 14, 2016

Freq.	Ant. Pol.	Emission Level(dBuV/m)		Limit 3m(dBuV/m)		Over(dB)	
(MHz)	H/V	PK	AV	PK	AV	PK	AV
4804	V	65.82	46.12	74	54	-8.18	-7.88
7206	V	65.38	45.04	74	54	-8.62	-8.96
9608	V	64.48	44.26	74	54	-9.52	-9.74
12010	V	63.84	43.77	74	54	-10.16	-10.23
14412	V	62.28	42.24	74	54	-11.72	-11.76
16814	V	61.48	42.61	74	54	-12.52	-11.39
4804	H	66.62	46.76	74	54	-7.38	-7.24
7206	H	65.83	45.56	74	54	-8.17	-8.44
9608	H	65.57	45.38	74	54	-8.43	-8.62
12010	H	64.46	44.18	74	54	-9.54	-9.82
14412	H	63.08	43.57	74	54	-10.92	-10.43
16814	H	62.42	42.36	74	54	-11.58	-11.64

Operation Mode: Pi/4-DQPSK (CH40: 2441MHz) Test Date : August 14, 2016

Freq.	Ant. Pol.	Emission Level(dBuV/m)		Limit 3m(dBuV/m)		Over(dB)	
(MHz)	H/V	PK	AV	PK	AV	PK	AV
4882	V	64.62	44.79	74	54	-9.38	-9.21
7323	V	64.37	44.38	74	54	-9.63	-9.62
9764	V	63.84	43.44	74	54	-10.16	-10.56
12205	V	62.26	42.13	74	54	-11.74	-11.87
14646	V	61.85	41.71	74	54	-12.15	-12.29
17087	V	60.52	41.05	74	54	-13.48	-12.95
4882	H	65.25	44.48	74	54	-8.75	-9.52
7323	H	64.48	43.65	74	54	-9.52	-10.35
9764	H	63.62	43.23	74	54	-10.38	-10.77
12205	H	63.21	42.29	74	54	-10.79	-11.71
14646	H	62.14	41.44	74	54	-11.86	-12.56
17087	H	61.42	40.29	74	54	-12.58	-13.71

Operation Mode: Pi/4-DQPSK (CH79: 2480MHz) Test Date : August 14, 2016

Freq.	Ant. Pol.	Emission Level(dBuV/m)		Limit 3m(dBuV/m)		Over(dB)	
(MHz)	H/V	PK	AV	PK	AV	PK	AV
4960	V	64.48	44.28	74	54	-9.52	-9.72
7440	V	63.67	43.52	74	54	-10.33	-10.48
9920	V	62.36	42.46	74	54	-11.64	-11.54
12400	V	61.95	42.05	74	54	-12.05	-11.95
14880	V	60.76	41.42	74	54	-13.24	-12.58
17360	V	59.28	40.17	74	54	-14.72	-13.83
4960	H	65.82	45.32	74	54	-8.18	-8.68
7440	H	64.94	45.03	74	54	-9.06	-8.97
9920	H	63.58	44.29	74	54	-10.42	-9.71
12400	H	62.87	43.16	74	54	-11.13	-10.84
14880	H	62.15	42.68	74	54	-11.85	-11.32
17360	H	61.26	41.81	74	54	-12.74	-12.19

Operation Mode: 8DPSK (CH1: 2402MHz) Test Date : August 14, 2016

Freq.	Ant. Pol.	Emission Level(dBuV/m)		Limit 3m(dBuV/m)		Over(dB)	
(MHz)	H/V	PK	AV	PK	AV	PK	AV
4804	V	64.18	44.17	74	54	-9.82	-9.83
7206	V	63.66	43.58	74	54	-10.34	-10.42
9608	V	62.28	43.04	74	54	-11.72	-10.96
12010	V	61.86	42.23	74	54	-12.14	-11.77
14412	V	60.22	40.7	74	54	-13.78	-13.3
16814	V	59.65	39.66	74	54	-14.35	-14.34
4804	H	66.16	46.38	74	54	-7.84	-7.62
7206	H	65.52	45.62	74	54	-8.48	-8.38
9608	H	64.96	45.21	74	54	-9.04	-8.79
12010	H	64.26	44.36	74	54	-9.74	-9.64
14412	H	62.24	42.27	74	54	-11.76	-11.73
16814	H	61.45	41.61	74	54	-12.55	-12.39

Operation Mode: 8DPSK (CH40: 2441MHz) Test Date : August 14, 2016

Freq. (MHz)	Ant. Pol. H/V	Emission Level(dBuV/m)		Limit 3m(dBuV/m)		Over(dB)	
		PK	AV	PK	AV	PK	AV
4882	V	65.42	45.27	74	54	-8.58	-8.73
7323	V	64.48	44.64	74	54	-9.52	-9.36
9764	V	64.12	43.76	74	54	-9.88	-10.24
12205	V	63.47	42.64	74	54	-10.53	-11.36
14646	V	62.28	42.28	74	54	-11.72	-11.72
17087	V	62.04	41.65	74	54	-11.96	-12.35
4882	H	65.27	46.01	74	54	-8.73	-7.99
7323	H	64.93	45.58	74	54	-9.07	-8.42
9764	H	63.75	43.97	74	54	-10.25	-10.03
12205	H	62.56	42.62	74	54	-11.44	-11.38
14646	H	62.23	42.33	74	54	-11.77	-11.67
17087	H	61.56	42.18	74	54	-12.44	-11.82



Operation Mode: 8DPSK (CH79: 2480MHz) Test Date : August 14, 2016

Freq. (MHz)	Ant. Pol. H/V	Emission Level(dBuV/m)		Limit 3m(dBuV/m)		Over(dB)	
		PK	AV	PK	AV	PK	AV
4960	V	65.75	45.58	74	54	-8.25	-8.42
7440	V	65.41	44.72	74	54	-8.59	-9.28
9920	V	64.53	43.98	74	54	-9.47	-10.02
12400	V	63.43	42.87	74	54	-10.57	-11.13
14880	V	62.41	42.52	74	54	-11.59	-11.48
17360	V	61.57	41.51	74	54	-12.43	-12.49
4960	H	65.78	45.52	74	54	-8.22	-8.48
7440	H	64.83	44.93	74	54	-9.17	-9.07
9920	H	63.42	43.81	74	54	-10.58	-10.19
12400	H	62.61	42.57	74	54	-11.39	-11.43
14880	H	62.06	42.15	74	54	-11.94	-11.85
17360	H	61.17	41.28	74	54	-12.83	-12.72

Other harmonics emissions are lower than 20dB below the allowable limit.

- Note:**
- (1) All Readings are Peak Value and AV.
 - (2) Emission Level= Reading Level+ Probe Factor +Cable Loss.
 - (3) The average measurement was not performed when the peak measured data under the limit of average detection.
 - (4) Measuring frequencies from 1GHz to 25GHz.

7.5 Radiated Measurement Photos:

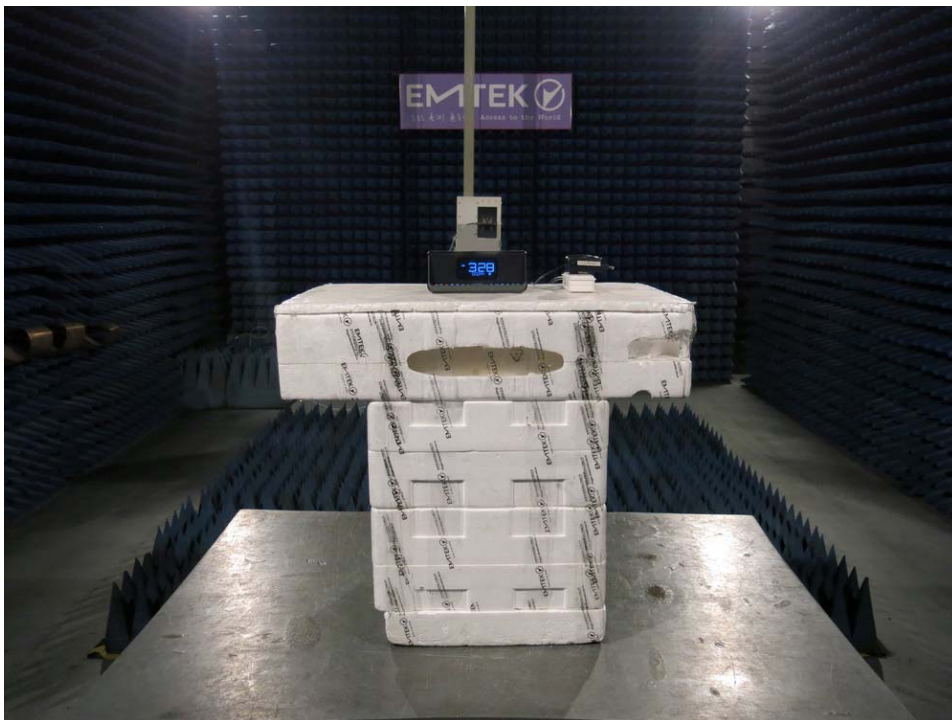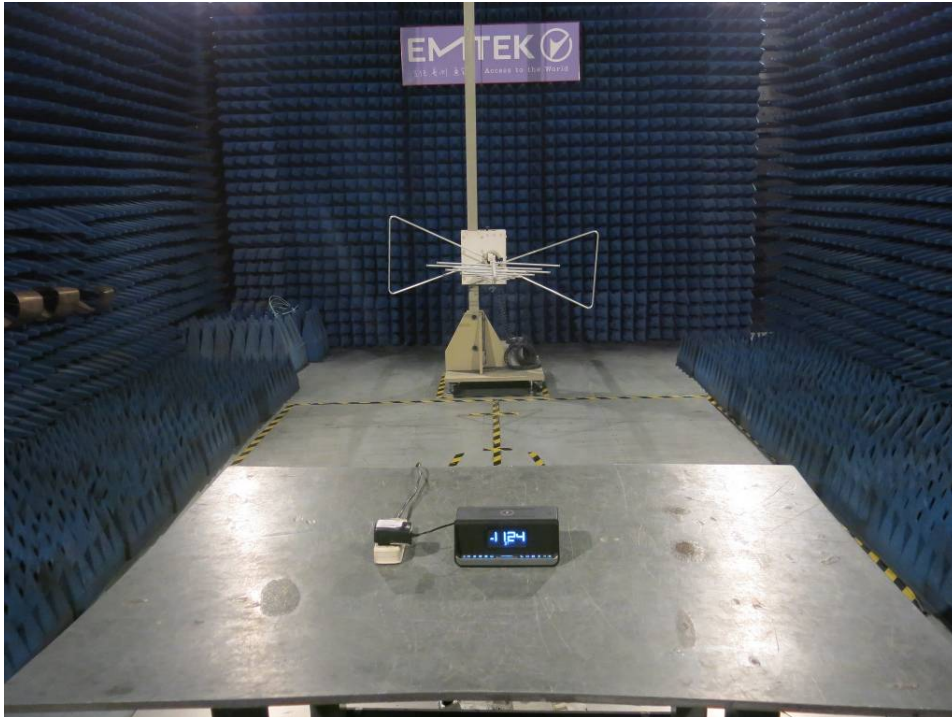


8. Channel Separation test

8.1 Measurement Procedure

The EUT was operating in hopping mode or could be controlled its channel. Printed out the test result from the spectrum by hard copy function.

8.2 Test SET-UP (Block Diagram of Configuration)



8.3 Measurement Equipment Used:

EQUIPMENT TYPE	MFR	MODEL NUMBER	SERIAL NUMBER	Characteristics	LAST CAL.	CAL DUE.
Spectrum Analyzer	Rohde & Schwarz	FSV30	1321.3008K	10Hz-30GHz	03/15/2016	03/14/2017
Coaxial Cable	CDS	79254	46107086	10Hz-30GHz	03/15/2016	03/14/2017
Antenna Connector	ARTHUR-YANG	2244-N1TG1	N/A	10Hz-30GHz	03/15/2016	03/14/2017


Remark: The temporary antenna connector is soldered on the PCB board in order to perform conducted tests and this temporary antenna connector is listed in the equipment list.



8.4 Measurement Results:

Refer to attached data chart.

Spectrum Detector:	PK	Test Date :	August 14, 2016
Test By:	Leon	Temperature :	24°C
Test Result:	PASS	Humidity :	53 %
Modulation:	GFSK		


Channel number	Channel frequency (MHz)	Separation Read Value (kHz)	Separation Limit 2/3 20dB Down BW(kHz)
1	2402	1000	>750
40	2441	1000	>743
79	2480	1000	>744


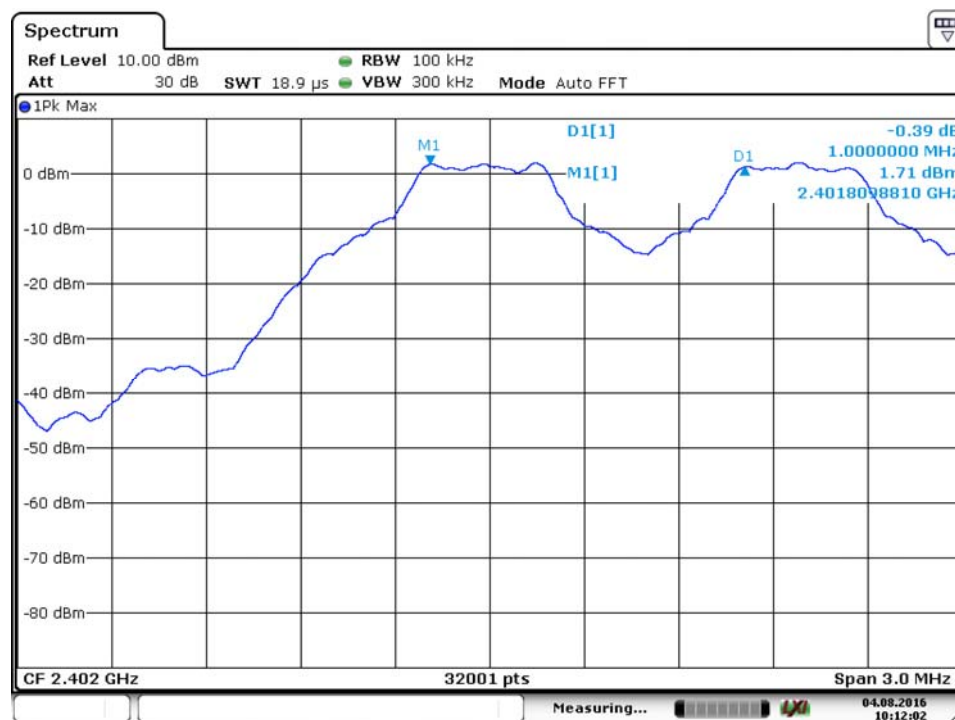


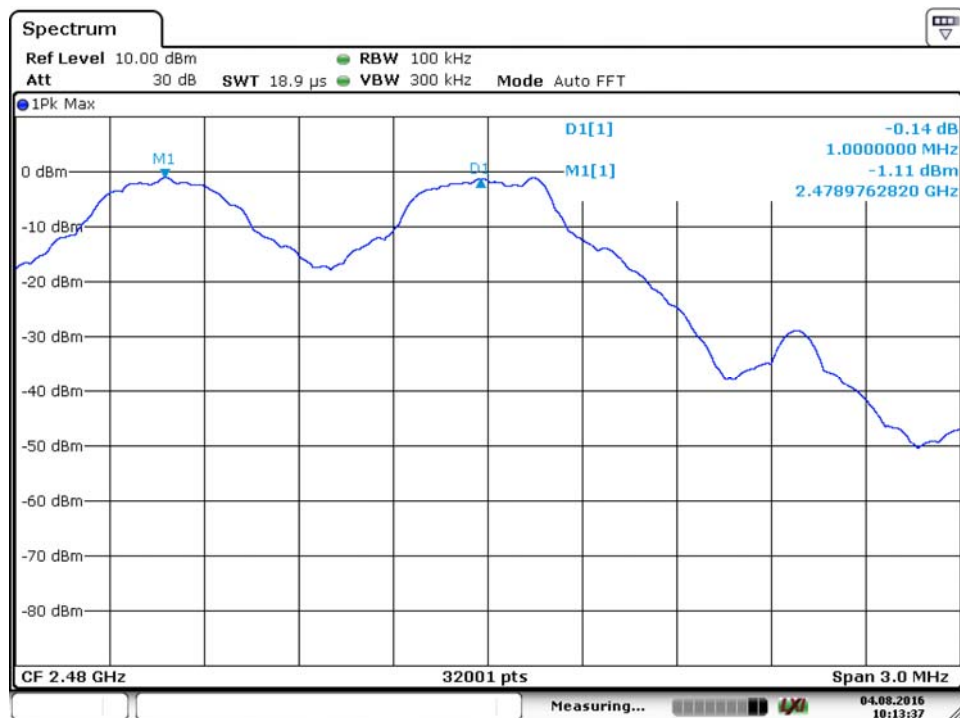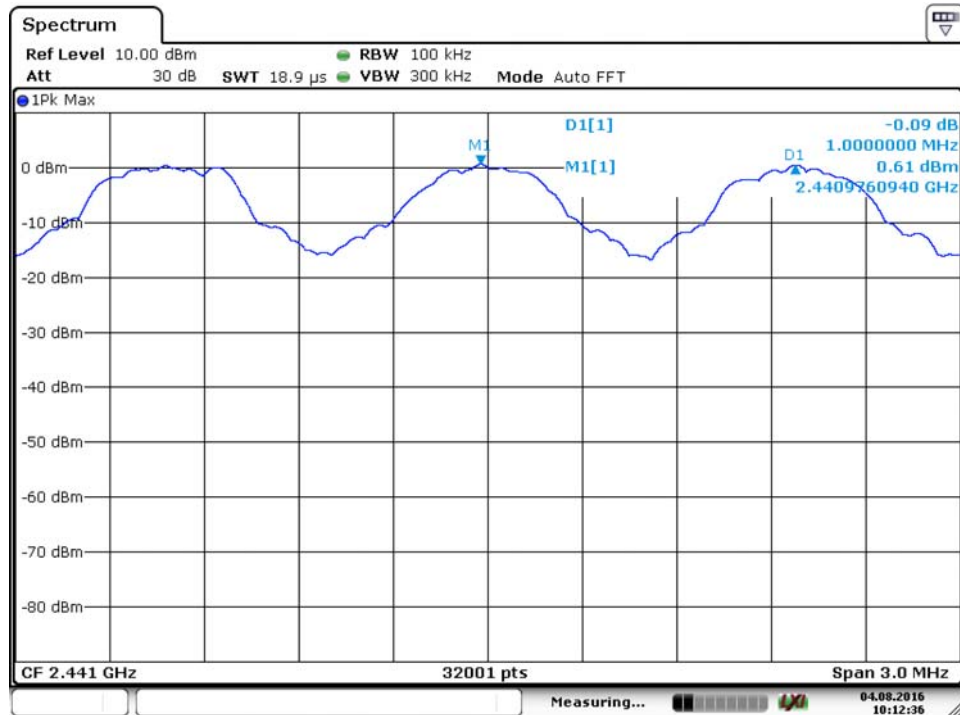

Spectrum Detector:	PK	Test Date :	August 14, 2016
Test By:	Leon	Temperature :	24°C
Test Result:	PASS	Humidity :	53 %
Modulation:	Π/4-DQPSK		


Channel number	Channel frequency (MHz)	Separation Read Value (kHz)	Separation Limit 2/3 20dB Down BW(kHz)
1	2402	1000	>926
40	2441	1000	>948
79	2480	1000	>973


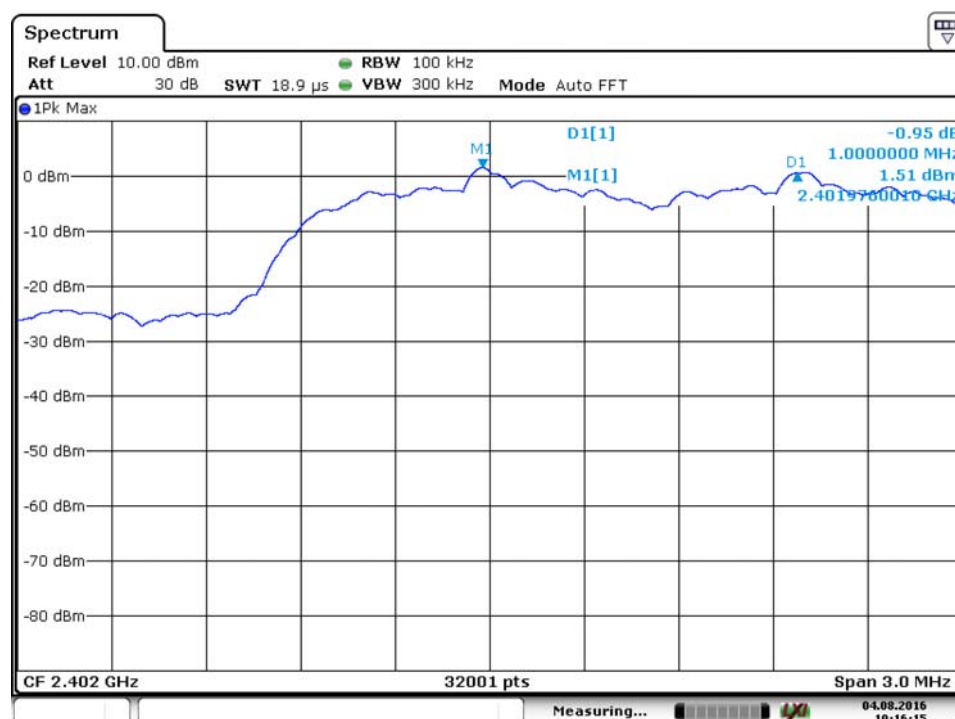


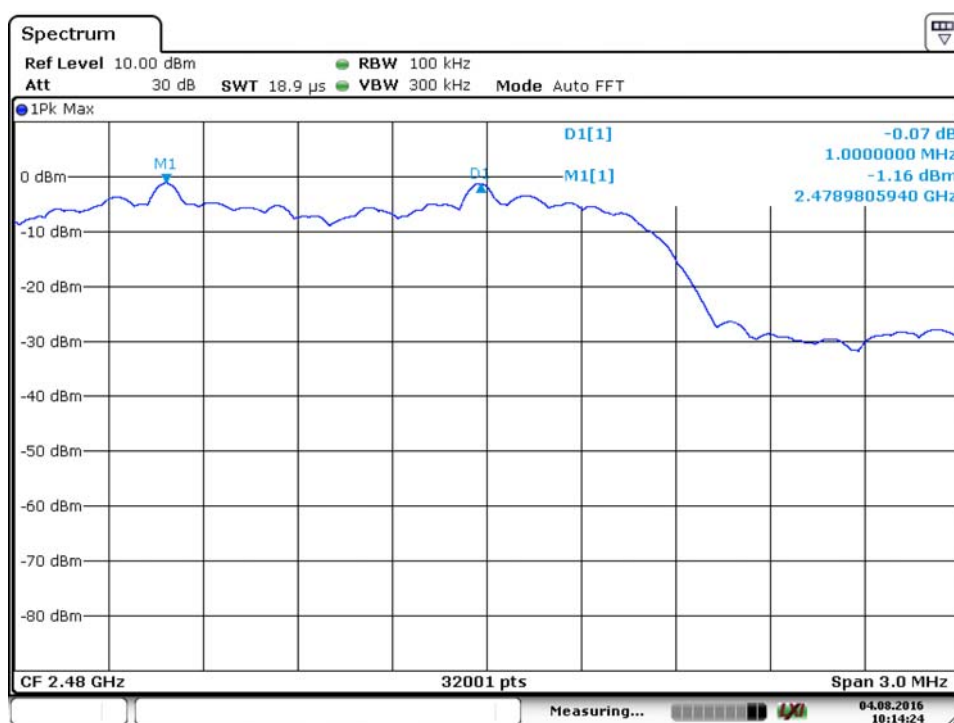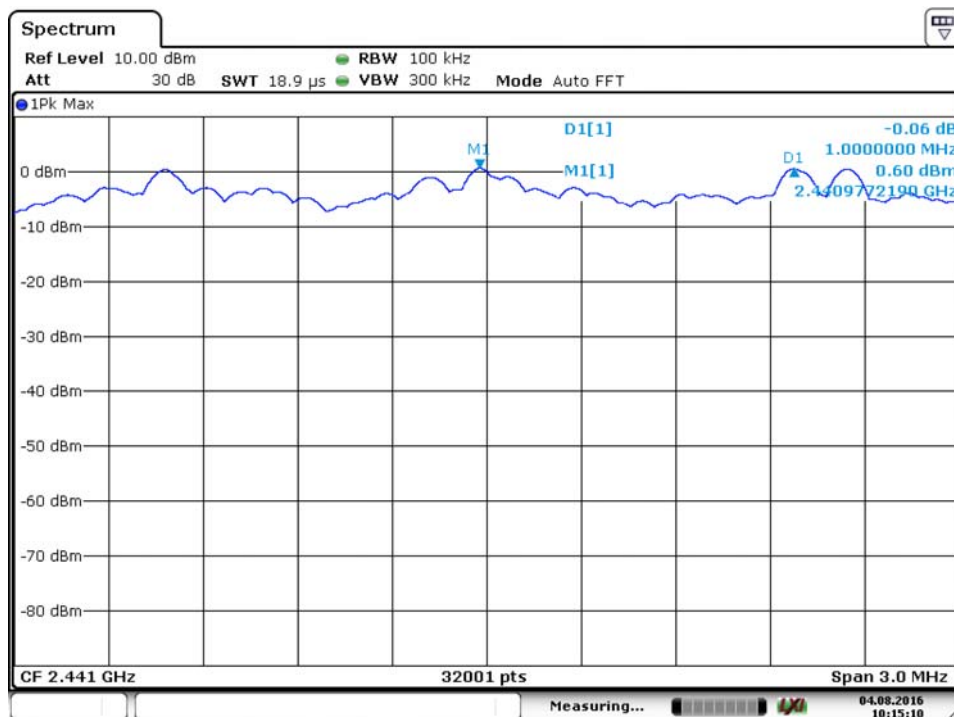

Spectrum Detector:	PK	Test Date :	August 14, 2016
Test By:	Leon	Temperature :	24°C
Test Result:	PASS	Humidity :	53 %
Modulation:	8DPSK		

Channel number	Channel frequency (MHz)	Separation Read Value (kHz)	Separation Limit 2/3 20dB Down BW(kHz)
1	2402	1000	>932
40	2441	1000	>965
79	2480	1000	>976

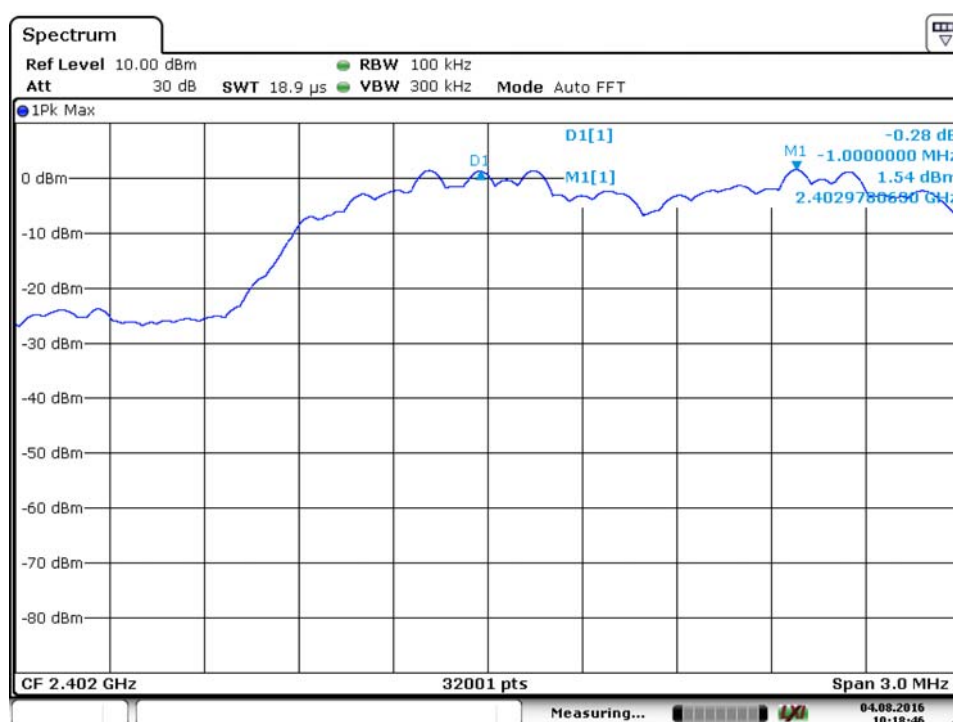

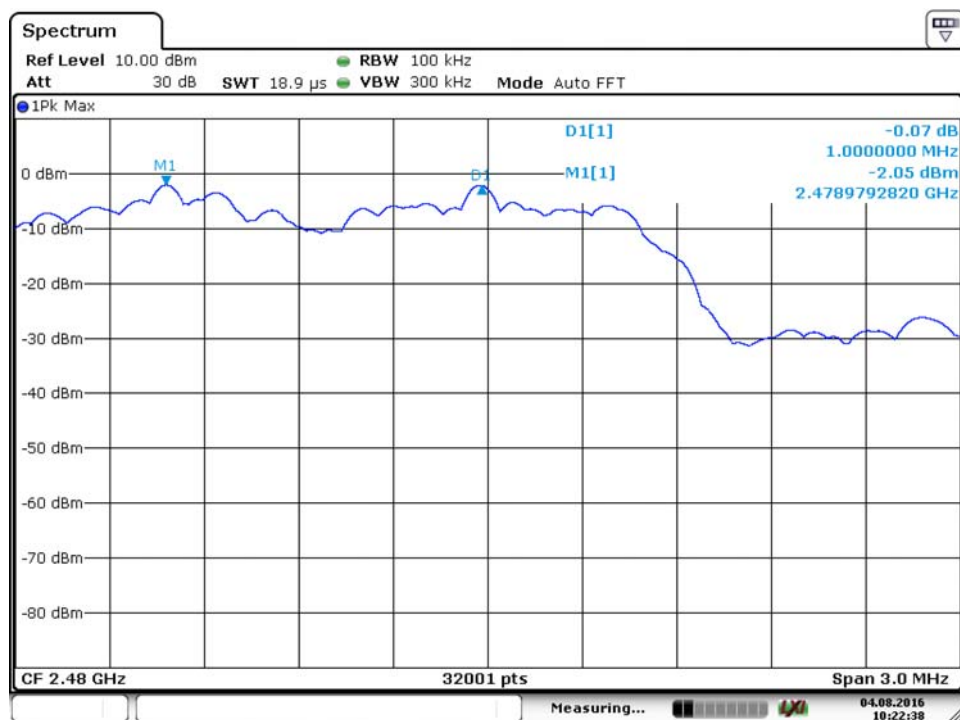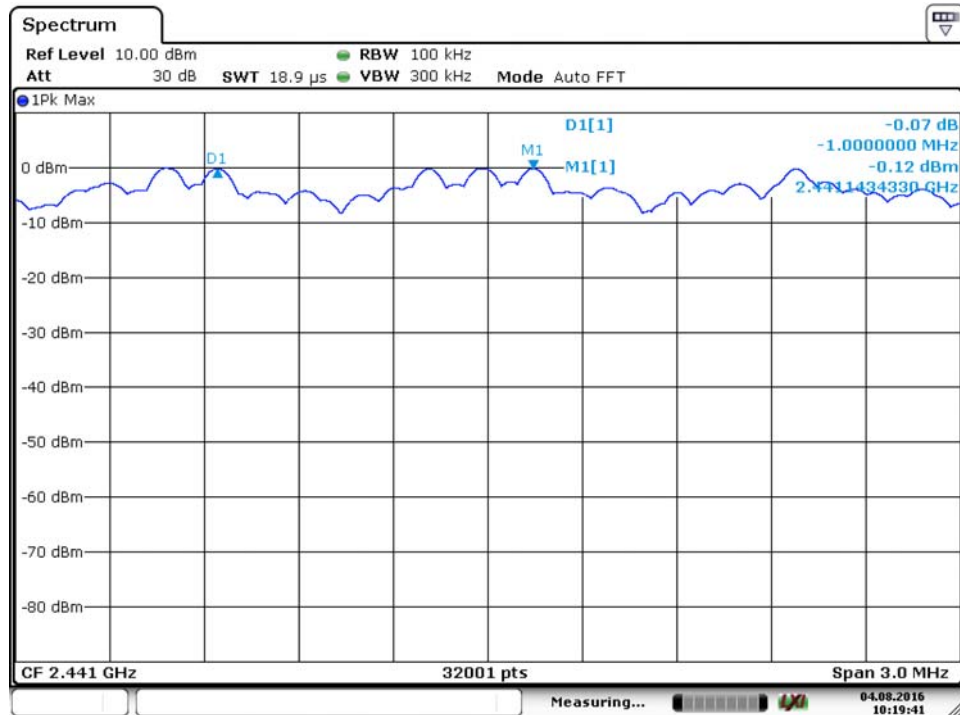


9. 20dB Bandwidth test

9.1 Measurement Procedure

The EUT was operating in hopping mode or could be controlled its channel. Printed out the test result from the spectrum by hard copy function.

9.2 Test SET-UP (Block Diagram of Configuration)



9.3 Measurement Equipment Used:

EQUIPMENT TYPE	MFR	MODEL NUMBER	SERIAL NUMBER	Characteristics	LAST CAL.	CAL DUE.
Spectrum Analyzer	Rohde & Schwarz	FSV30	1321.3008K	10Hz-30GHz	03/15/2016	03/14/2017
Coaxial Cable	CDS	79254	46107086	10Hz-30GHz	03/15/2016	03/14/2017
Antenna Connector	ARTHUR-YANG	2244-N1TG1	N/A	10Hz-30GHz	03/15/2016	03/14/2017



Remark: The temporary antenna connector is soldered on the PCB board in order to perform conducted tests and this temporary antenna connector is listed in the equipment list.


9.4 Measurement Results:

Refer to attached data chart.

Spectrum Detector:	PK	Test Date :	August 14, 2016
Test By:	Leon	Temperature :	24°C
Test Result:	PASS	Humidity :	53 %
Modulation:	GFSK		



Channel number	Channel frequency (MHz)	20dB Down BW(kHz)
1	2402	1126
40	2441	1120
79	2480	1118

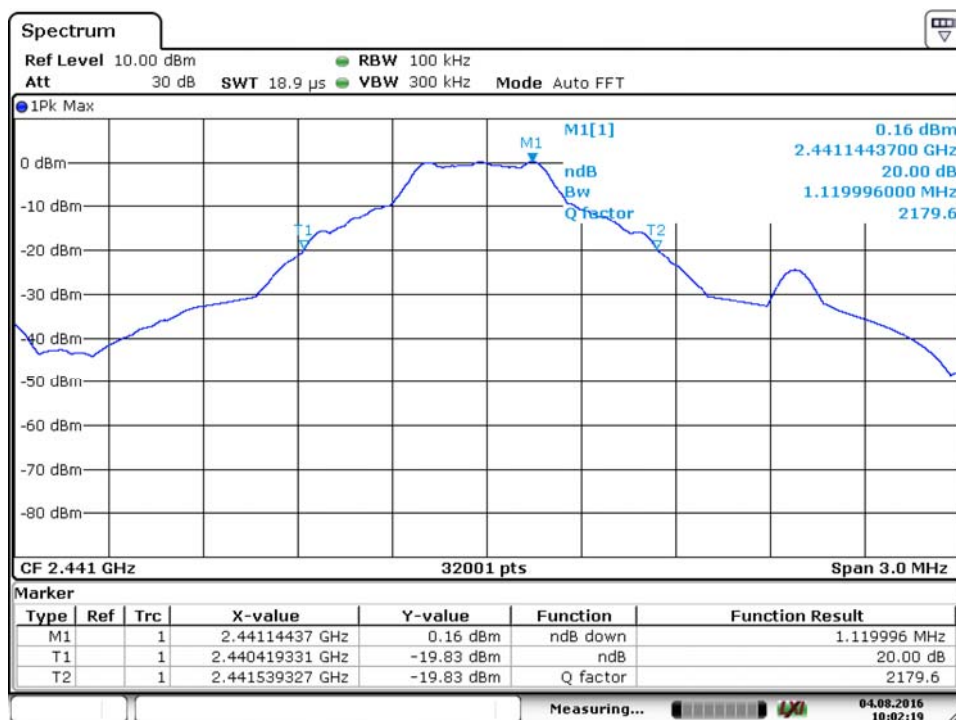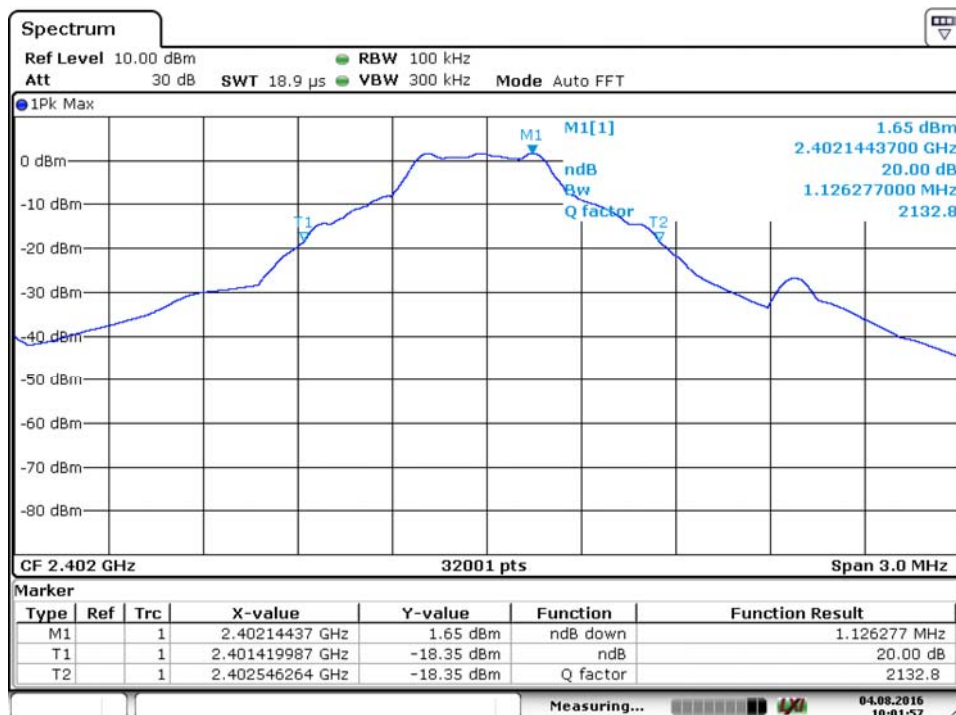


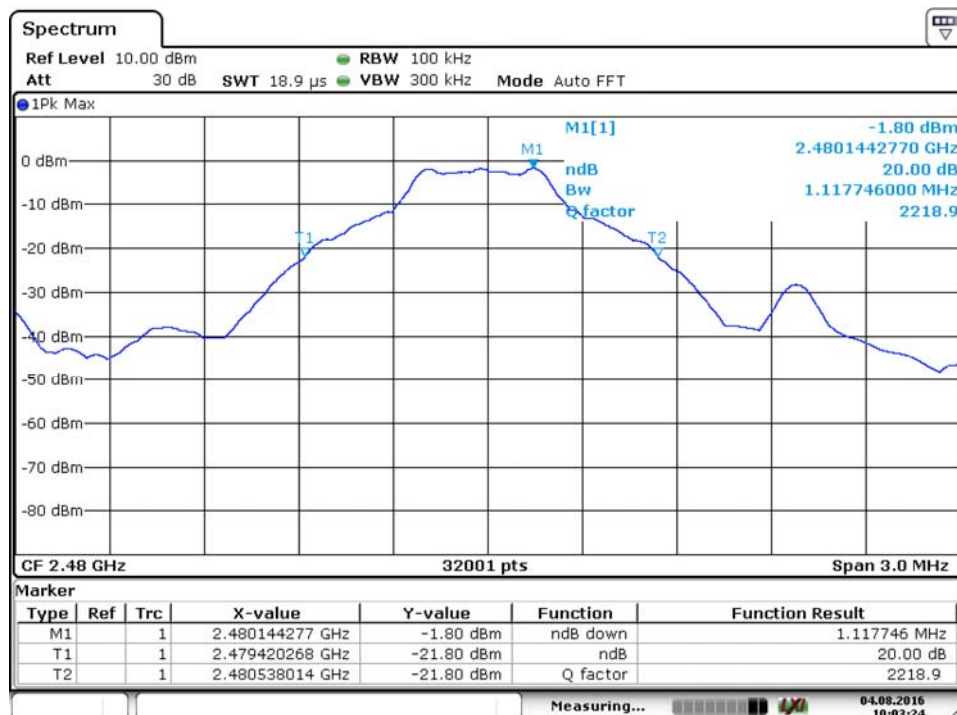

Spectrum Detector:	PK	Test Date :	August 14, 2016
Test By:	Leon	Temperature :	24°C
Test Result:	PASS	Humidity :	53 %
Modulation:	$\pi/4$ -DQPSK		



Channel number	Channel frequency (MHz)	20dB Down BW(kHz)
1	2402	1414
40	2441	1427
79	2480	1413

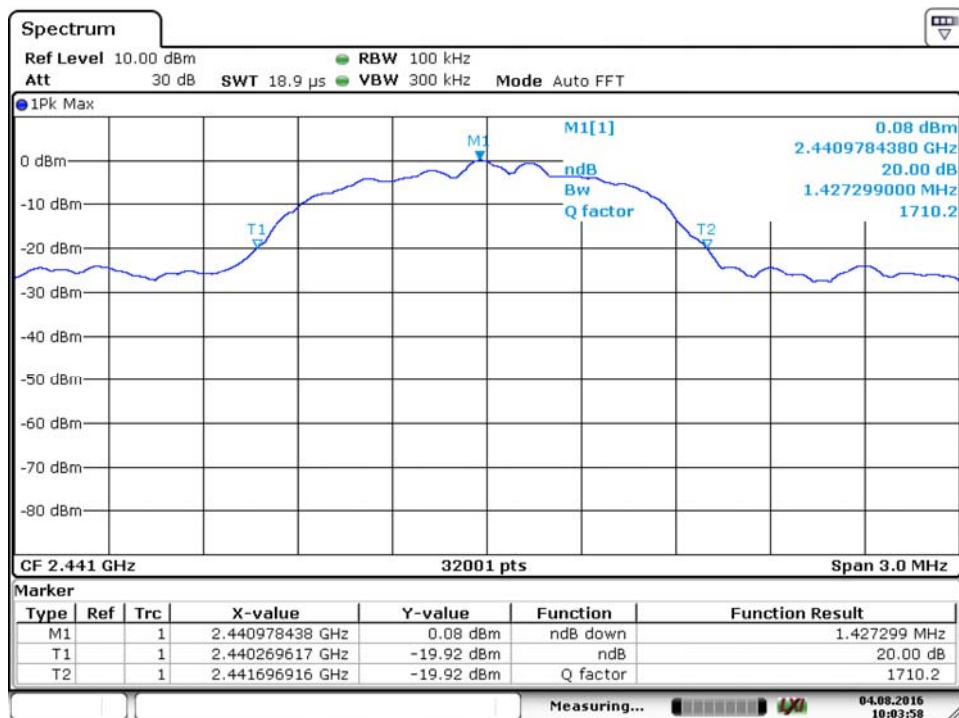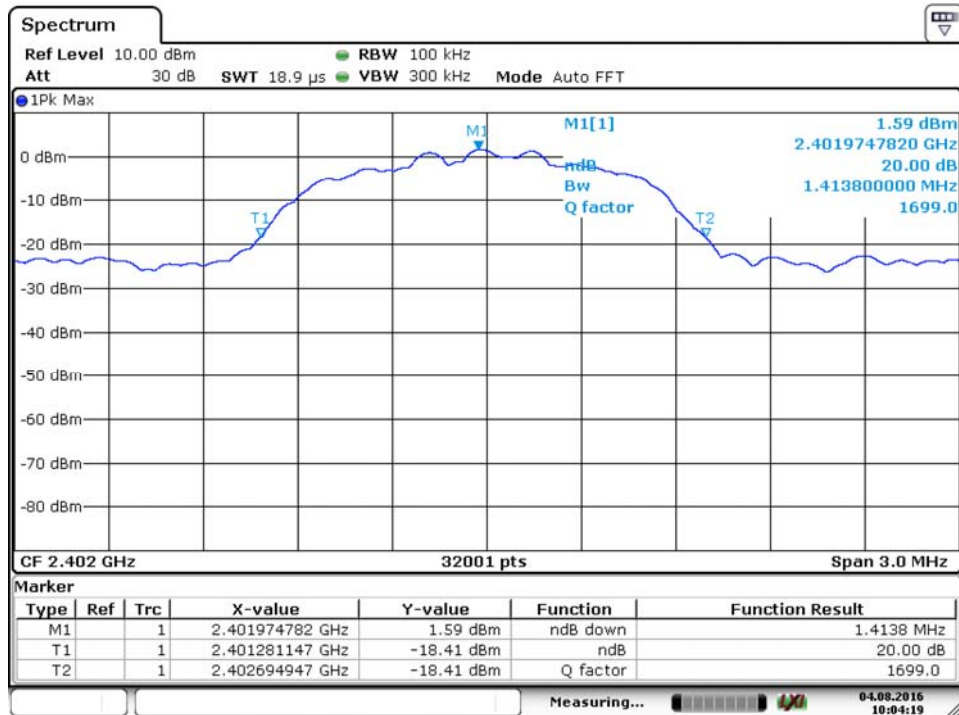


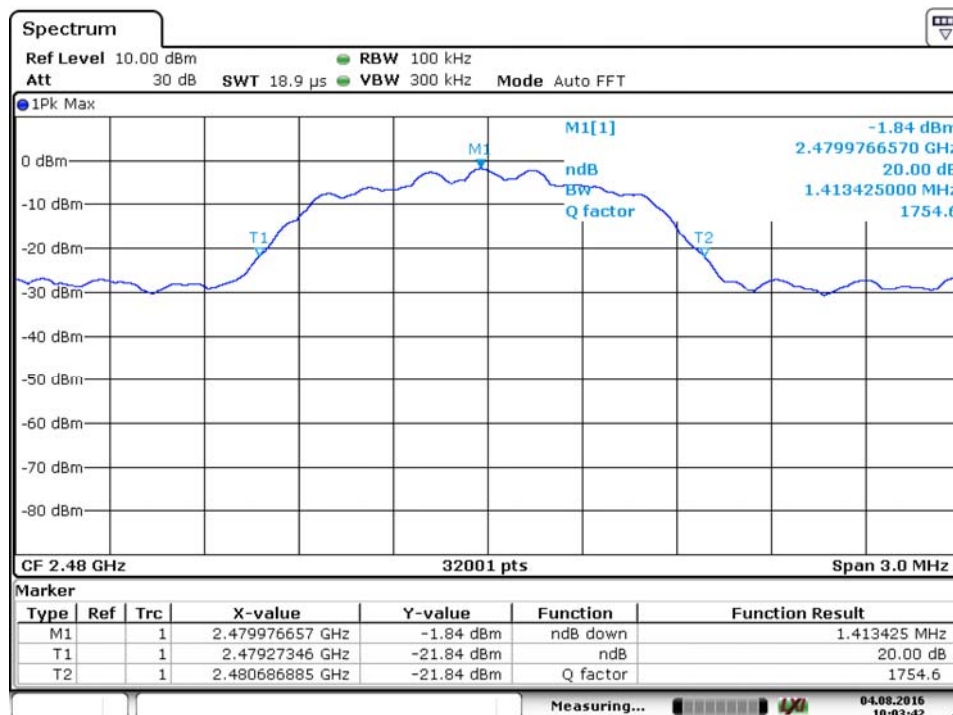

Spectrum Detector: PK Test Date : August 14, 2016
 Test By: Leon Temperature : 24 °C
 Test Result: PASS Humidity : 53 %
 Modulation: 8DPSK

Channel number	Channel frequency (MHz)	20dB Down BW(kHz)
1	2402	1427
40	2441	1437
79	2480	1411

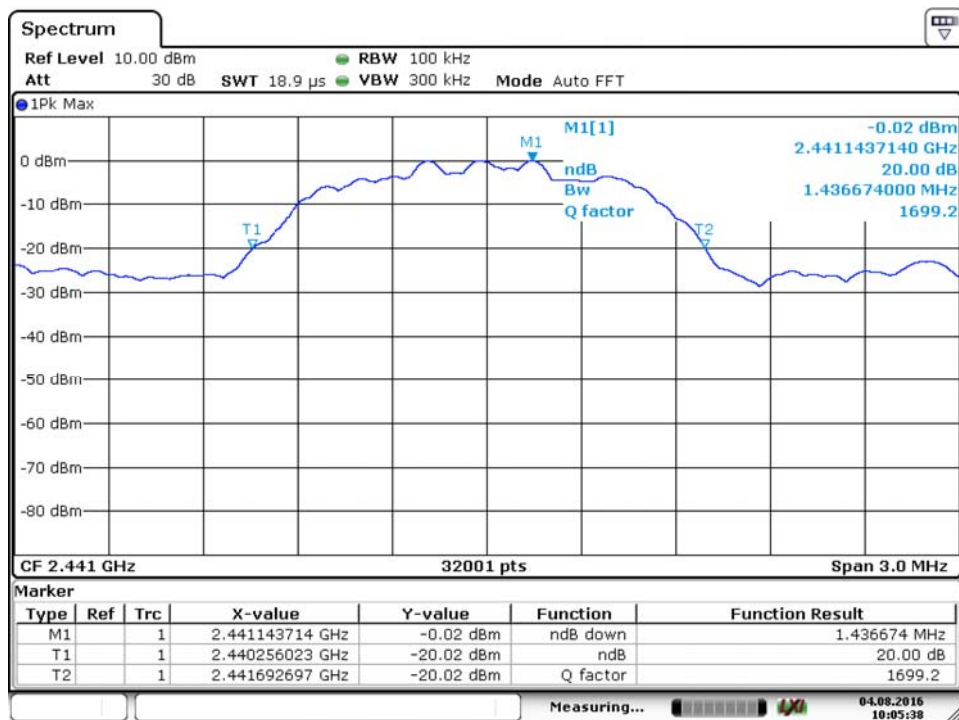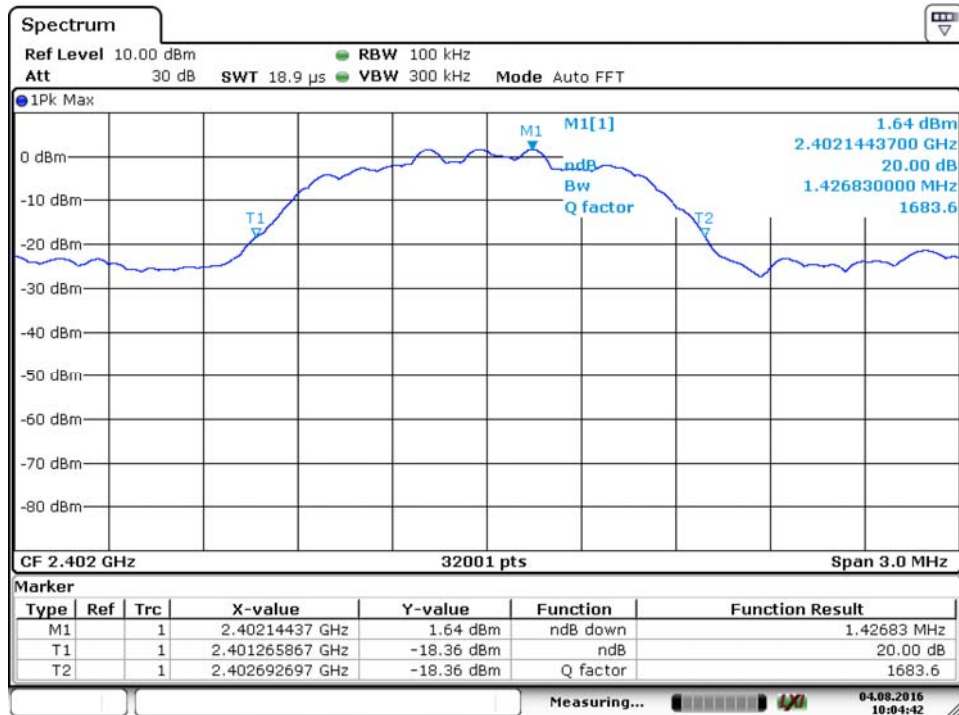

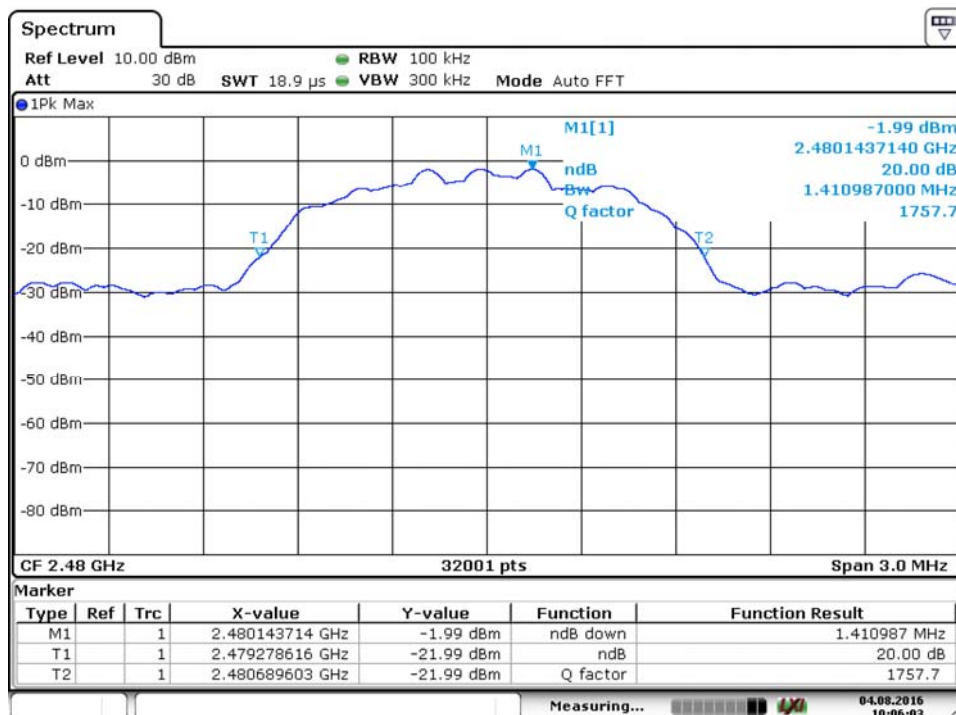


10. Quantity of Hopping Channel Test

10.1 Measurement Procedure

The EUT was operating in hopping mode or could be controlled its channel. Printed out the test result from the spectrum by hard copy function.

10.2 Test SET-UP (Block Diagram of Configuration)



10.3 Measurement Equipment Used:

EQUIPMENT TYPE	MFR	MODEL NUMBER	SERIAL NUMBER	Characteristics	LAST CAL.	CAL DUE.
Spectrum Analyzer	Rohde & Schwarz	FSV30	1321.3008K	10Hz-30GHz	03/15/2016	03/14/2017
Coaxial Cable	CDS	79254	46107086	10Hz-30GHz	03/15/2016	03/14/2017
Antenna Connector	ARTHUR-YANG	2244-N1TG1	N/A	10Hz-30GHz	03/15/2016	03/14/2017


Remark: The temporary antenna connector is soldered on the PCB board in order to perform conducted tests and this temporary antenna connector is listed in the equipment list.

10.4 Measurement Results:

Refer to attached data chart.

Worst Test Mode	GFSK	Test Date :	August 14, 2016
Test By:	Leon	Temperature :	25 °C
Test Result:	PASS	Humidity :	50 %

Hopping Channel Frequency Range	Quantity of Hopping Channel	Quantity of Hopping Channel
2402-2480	79	> 15

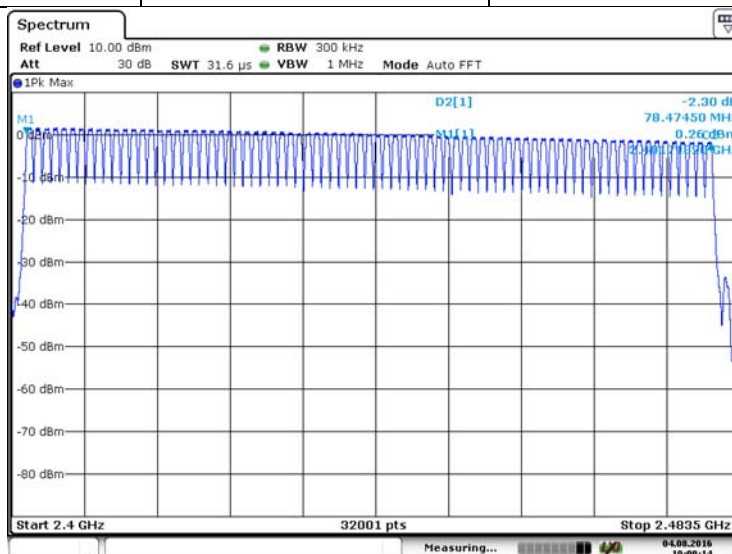

11. Time of Occupancy (Dwell Time) test

11.1 Test Description

The Equipment Under Test (EUT) was set up to perform the dwell time measurements. The EUT was connected to the spectrum analyzer via a short coax cable. The dwell time is calculated by:


Dwell time = time slot length * hop rate / number of hopping channels * 31.6s

with:

- hop rate = $1600 \times 1/s$ for DH1 packets = 1600 s^{-1}
- hop rate = $1600/3 \times 1/s$ for DH3 packets = 533.33 s^{-1}
- number of hopping channels = 79
- $31.6 \text{ s} = 0.4 \text{ seconds}$ multiplied by the number of hopping channels = $0.4 \text{ s} \times 79$

The highest value of the dwell time is reported.

11.2 Test SET-UP (Block Diagram of Configuration)



11.3 Measurement Equipment Used:

EQUIPMENT TYPE	MFR	MODEL NUMBER	SERIAL NUMBER	Characteristics	LAST CAL.	CAL DUE.
Spectrum Analyzer	Rohde & Schwarz	FSV30	1321.3008K	10Hz-30GHz	03/15/2016	03/14/2017
Coaxial Cable	CDS	79254	46107086	10Hz-30GHz	03/15/2016	03/14/2017
Antenna Connector	ARTHUR-YANG	2244-N1TG1	N/A	10Hz-30GHz	03/15/2016	03/14/2017

Remark: The temporary antenna connector is soldered on the PCB board in order to perform conducted tests and this temporary antenna connector is listed in the equipment list.

11.4 Test Requirements / Limits

FCC Part 15, Subpart C, §15.247 (a) (1) (iii)


Frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Since the Bluetooth technology uses 79 channels this period is calculated to be 31.6seconds. Refer to attached data chart.

11.5 Test result


Mode	Number of transmission in a 31.6(79 Hopping*0.4)	Length of transmissions time(msec)	Result (msec)	Limit (msec)
DH1	$1600/(2*79) \times 31.6 = 320$	0.421	134.72	400
DH3	$1600/(4*79) \times 31.6 = 160$	1.677	268.32	400
DH5	$1600/(6*79) \times 31.6 = 106.67$	2.926	312.12	400

Remark: The results of worst cased was recorded.


DH1:

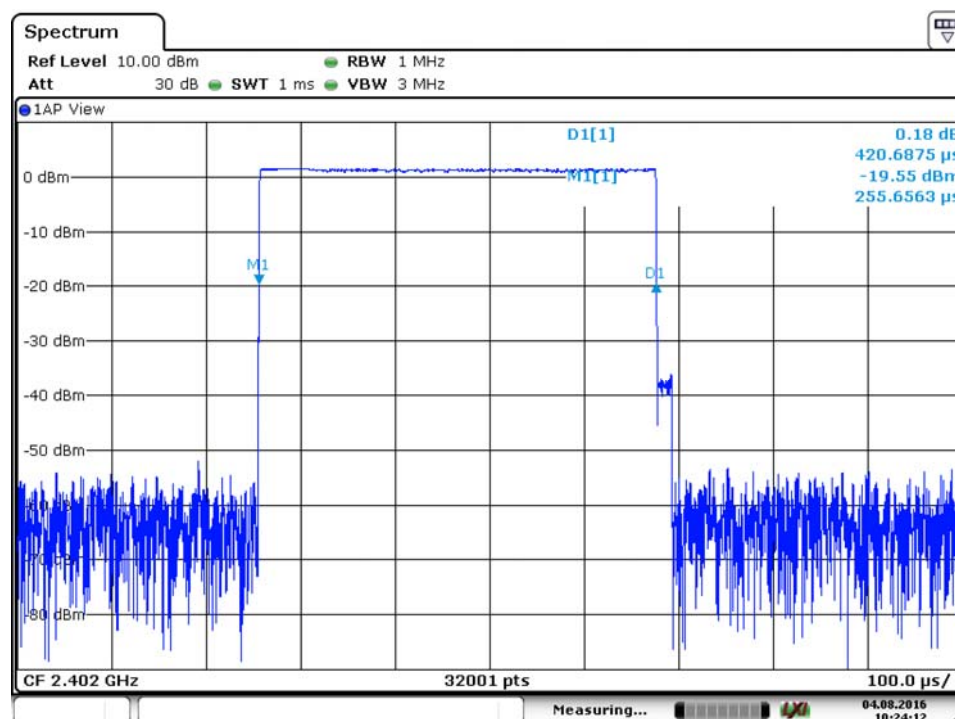

DH3:

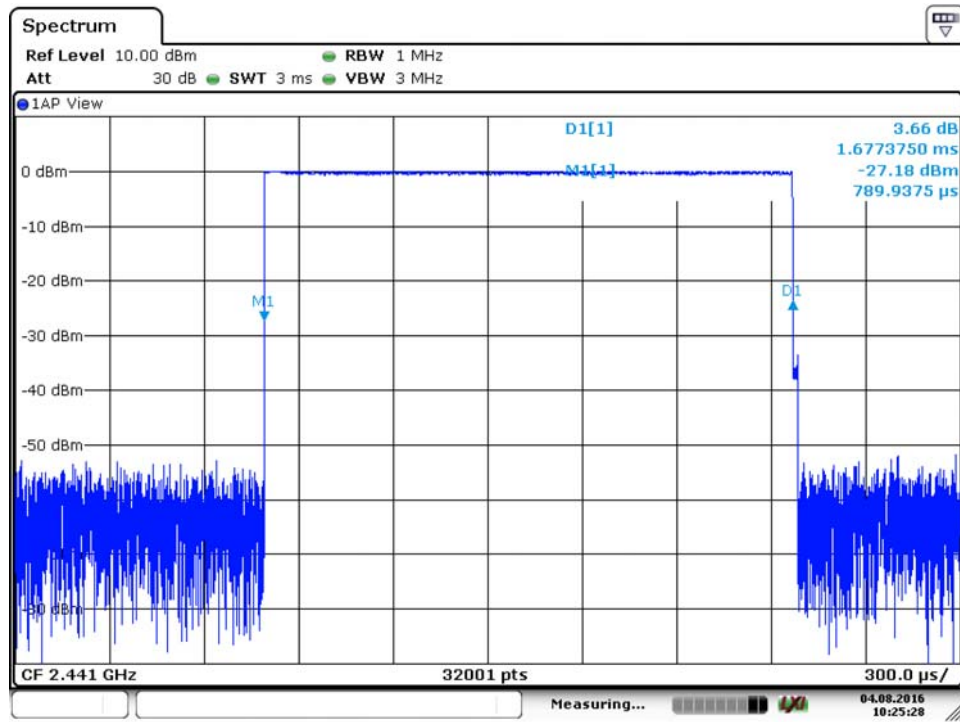

DH5:

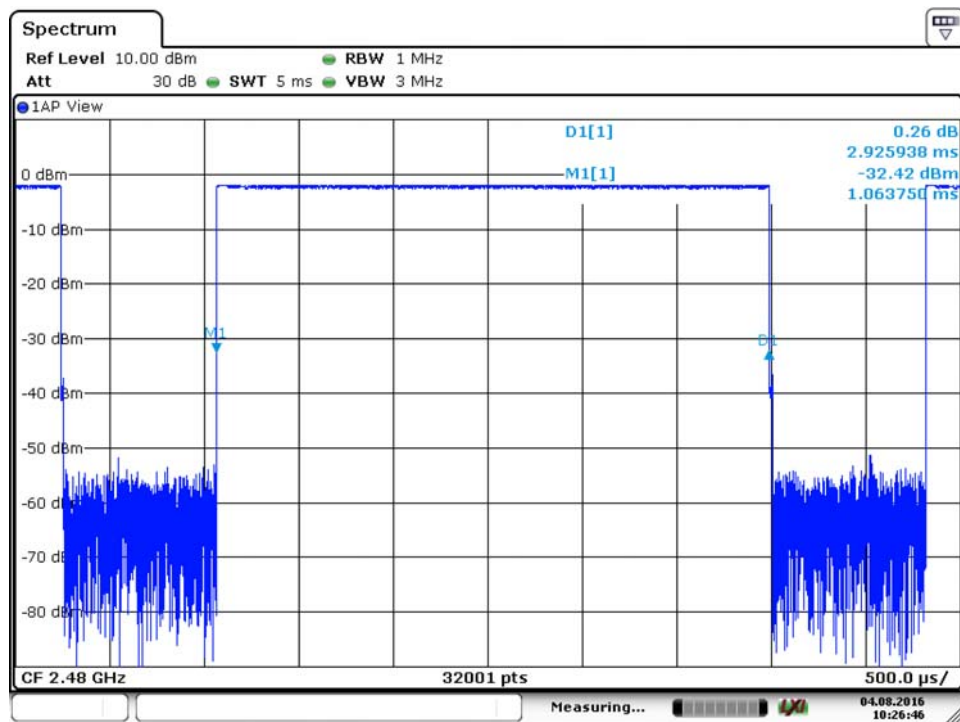


12. MAXIMUM PEAK OUTPUT POWER TEST

12.1 Measurement Procedure

- Check the calibration of the measuring instrument(SA) using either an internal calibrator or a known signal from an external generator.
- Turn on the EUT and connect it to measurement instrument. Then set it to any one convenient frequency within its operating range. Set a reference level on the measuring instrument equal to the highest peak value.
- The center frequency of the spectrum analyzer is set to the fundamental frequency and using proper RBW and VBW setting.
- Measure the captured power within the band and recording the plot.
- Repeat above procedures until all frequencies required were complete.

12.2 Test SET-UP (Block Diagram of Configuration)



12.3 Measurement Equipment Used:

EQUIPMENT TYPE	MFR	MODEL NUMBER	SERIAL NUMBER	Characteristics	LAST CAL.	CAL DUE.
Spectrum Analyzer	Rohde & Schwarz	FSV30	1321.3008K	10Hz-30GHz	03/15/2016	03/14/2017
Coaxial Cable	CDS	79254	46107086	10Hz-30GHz	03/15/2016	03/14/2017
Antenna Connector	ARTHUR-YANG	2244-N1TG1	N/A	10Hz-30GHz	03/15/2016	03/14/2017


Remark: The temporary antenna connector is soldered on the PCB board in order to perform conducted tests and this temporary antenna connector is listed in the equipment list.



12.4 Measurement Results:

Refer to attached data chart.

Spectrum Detector:	PK	Test Date :	August 14, 2016
Test By:	Leon	Temperature :	25 °C
Test Result:	PASS	Humidity :	50 %
Modulation:	GFSK		


Channel number	Channel Frequency (MHz)	Peak Power output(dBm)	Peak Power output(mW)	Peak Power Limit(mW)	Pass/Fail
01	2402	1.46	1.400	1000	PASS
40	2441	-0.05	0.989	1000	PASS
79	2480	-2.01	0.630	1000	PASS


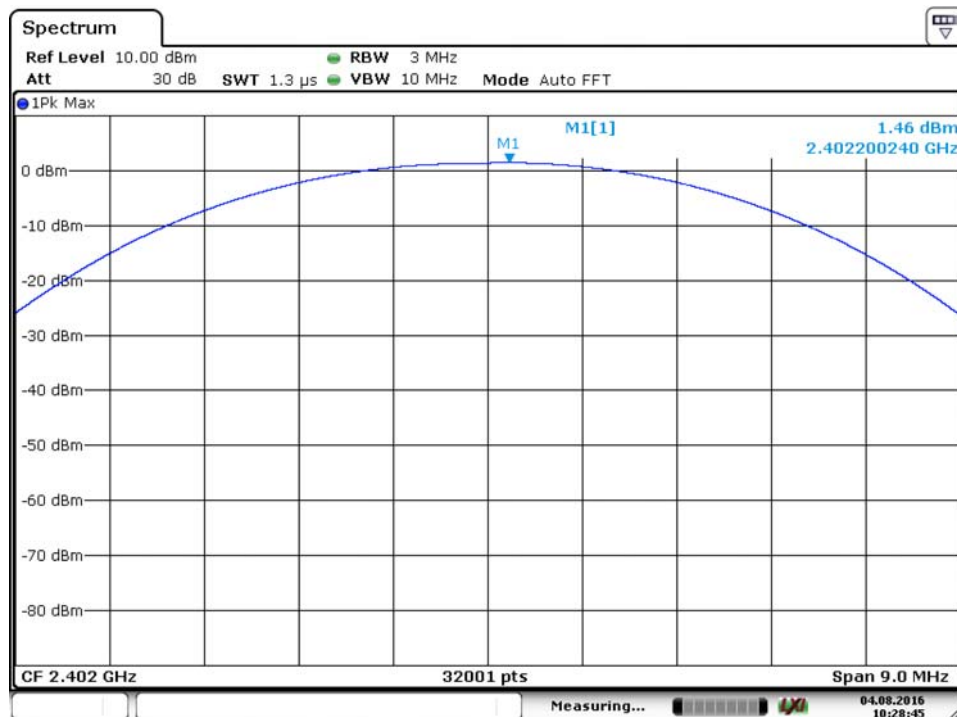


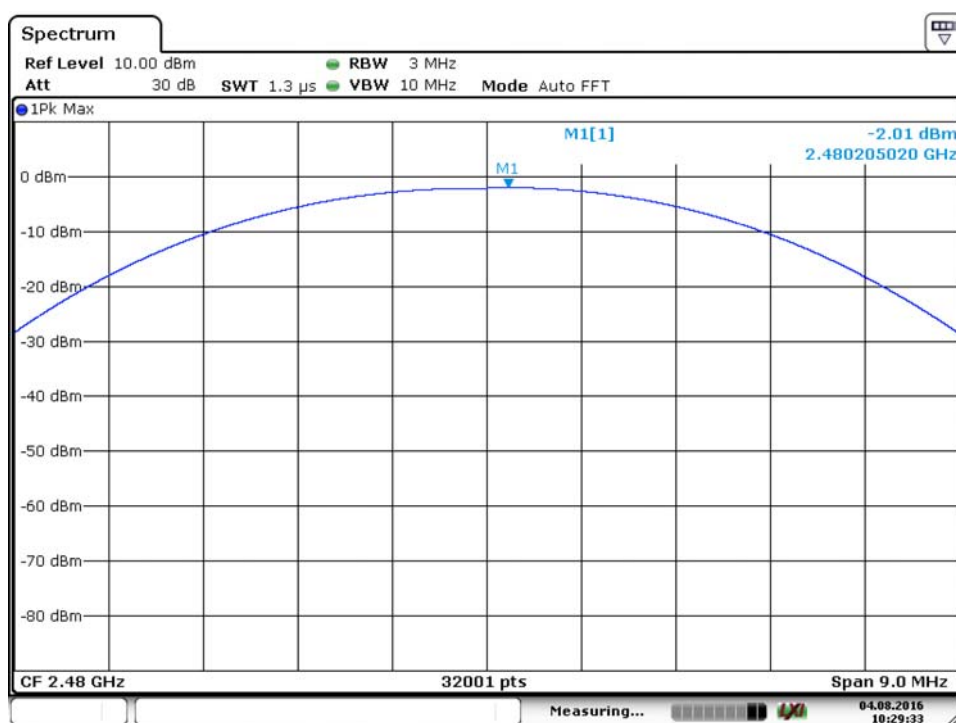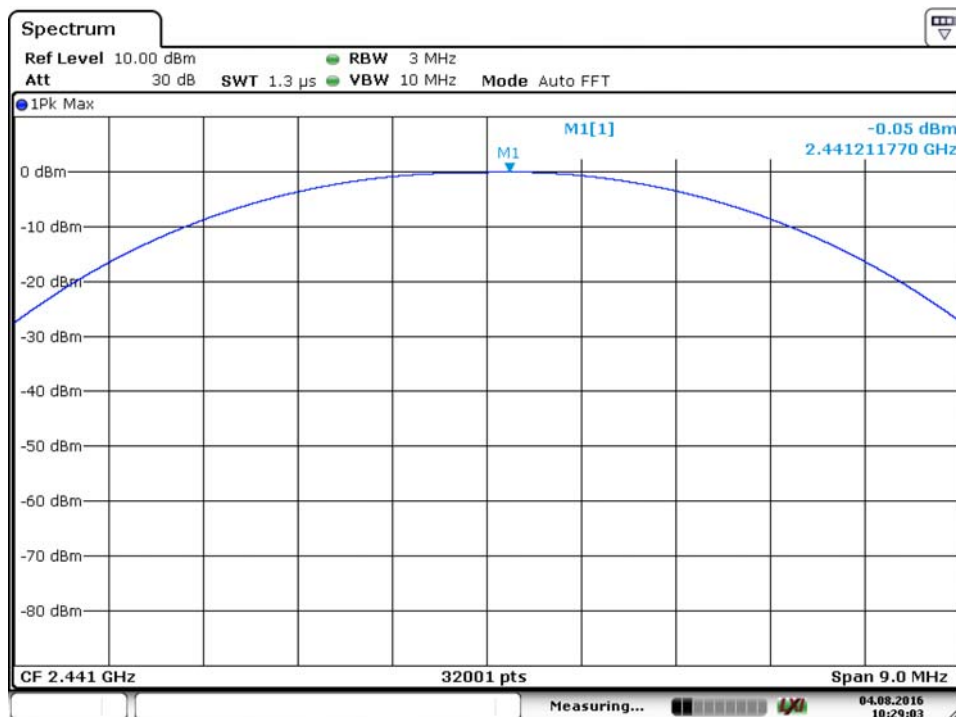

Spectrum Detector: PK Test Date : August 14, 2016
 Test By: Leon Temperature : 25 °C
 Test Result: PASS Humidity : 50 %
 Modulation: $\pi/4$ -DQPSK


Channel number	Channel Frequency (MHz)	Peak Power output(dBm)	Peak Power output(mW)	Peak Power Limit(mW)	Pass/Fail
01	2402	1.71	1.483	125	PASS
40	2441	0.18	1.042	125	PASS
79	2480	-1.75	0.668	125	PASS


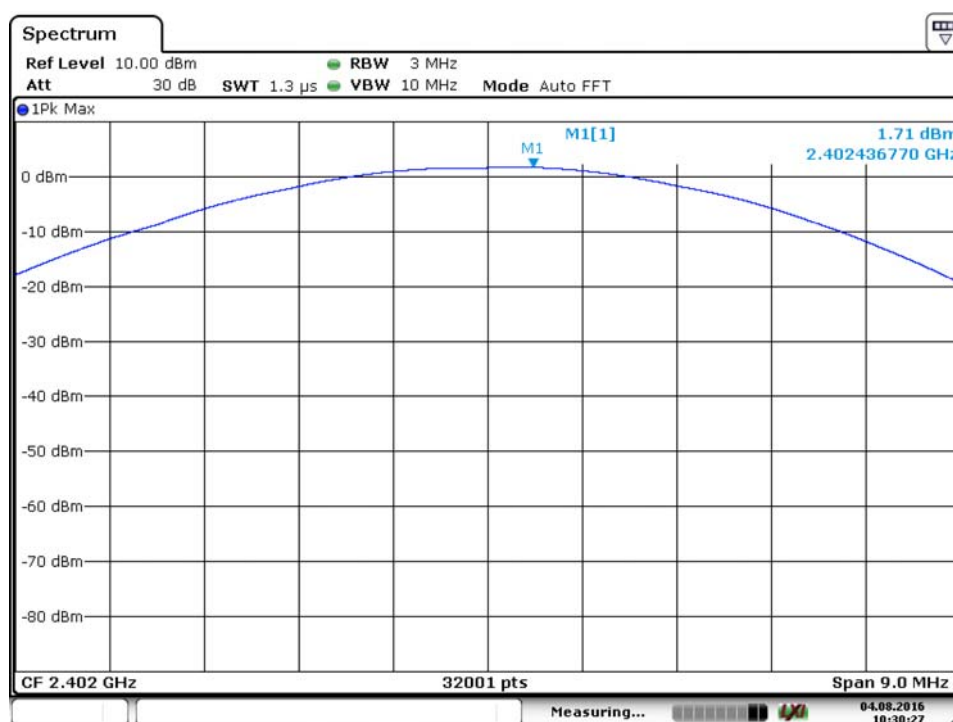


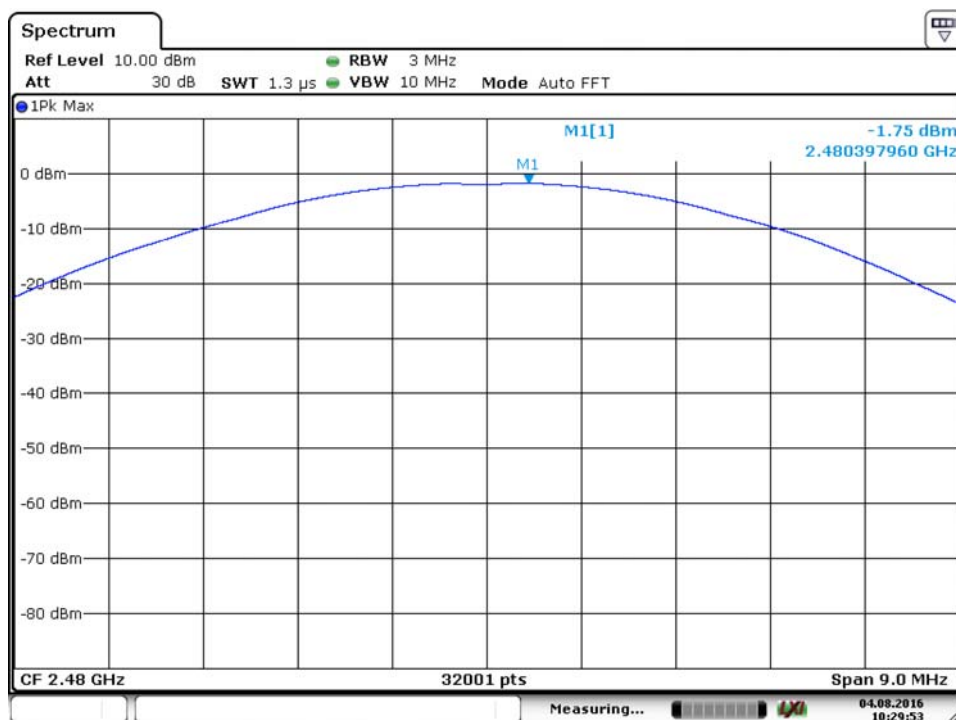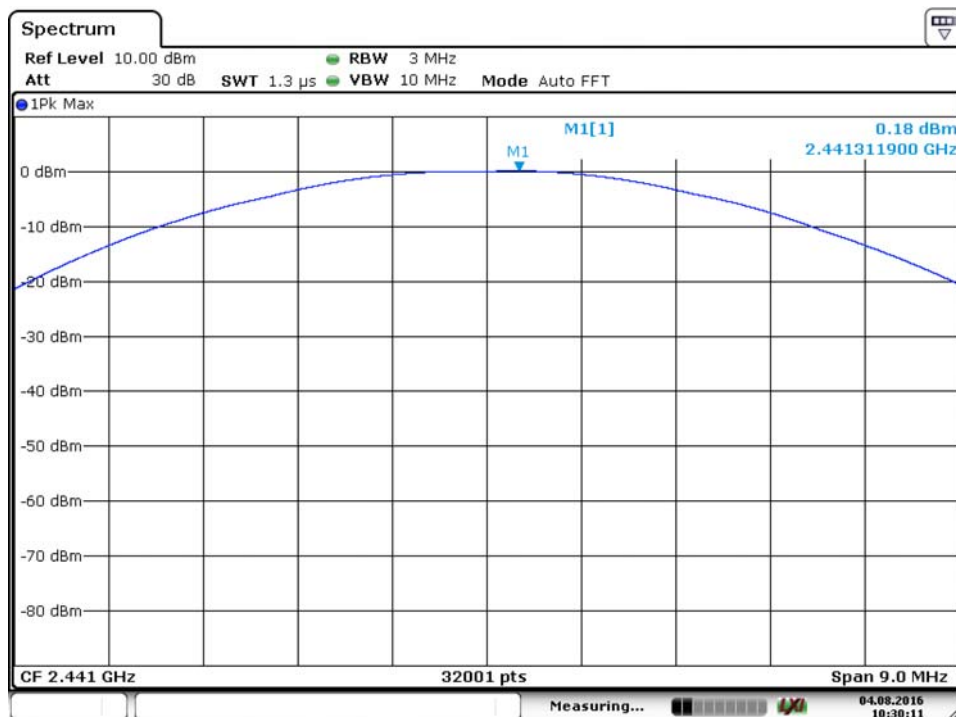

Spectrum Detector:	PK	Test Date :	August 14, 2016
Test By:	Leon	Temperature :	25 °C
Test Result:	PASS	Humidity :	50 %
Modulation:	8DPSK		

Channel number	Channel Frequency (MHz)	Peak Power output(dBm)	Peak Power output(mW)	Peak Power Limit(mW)	Pass/Fail
01	2402	1.69	1.476	125	PASS
40	2441	0.26	1.062	125	PASS
79	2480	-1.63	0.687	125	PASS

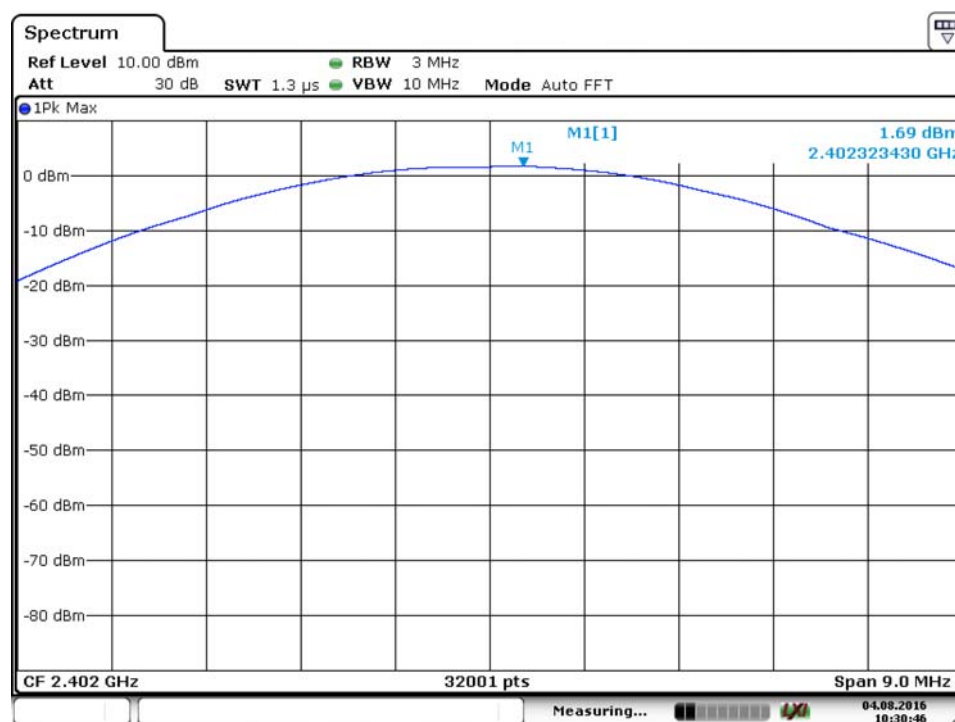

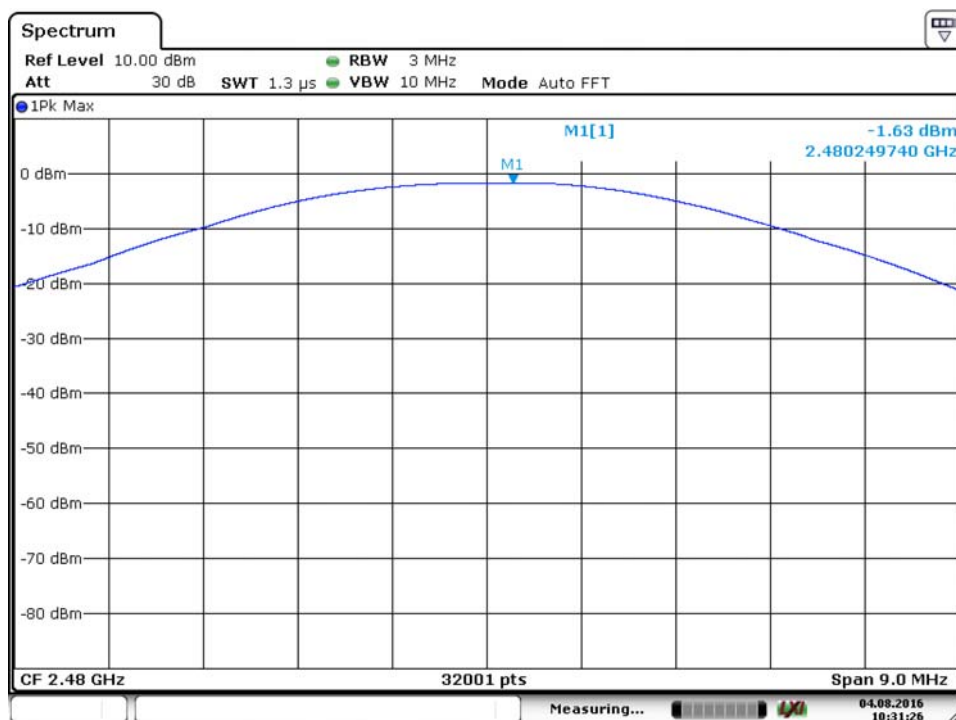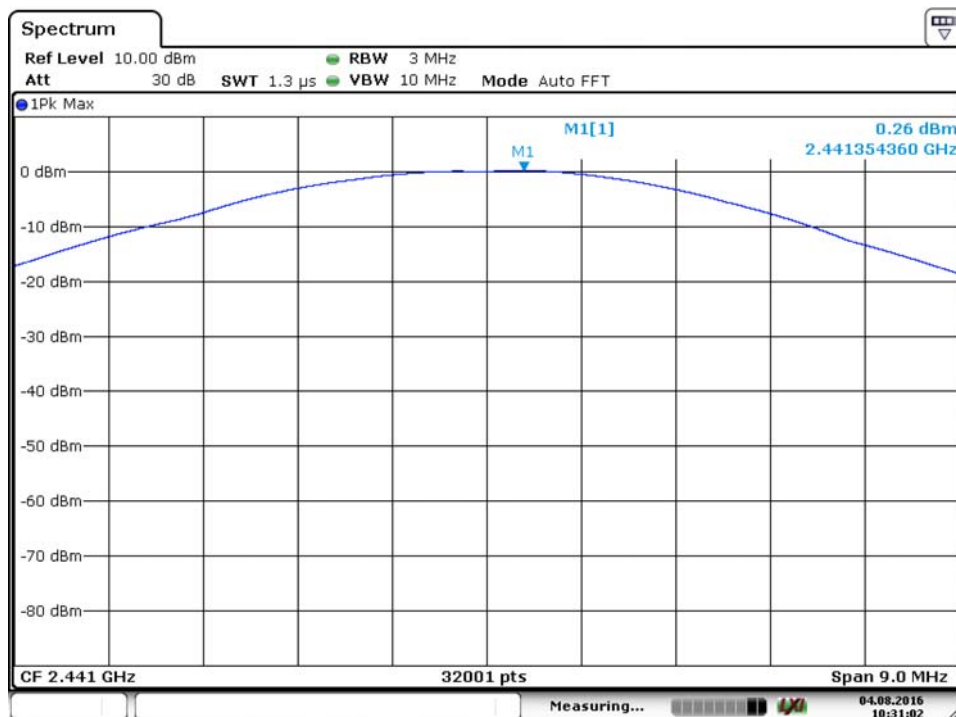

13. Band EDGE test

13.1 Measurement Procedure

For Conducted Test

1. The transmitter output is connected to a spectrum analyzer. The resolution bandwidth is set to 100KHz. The video bandwidth is set to 300KHz.
2. The spectrum from 30MHz to 26 GHz is investigated with the transmitter set to the lowest, middle, and highest channels.

EMI Test Receiver	Setting
Attenuation	Auto
RBW	100KHz
VBW	300KHz
Detector	Peak
Trace	Max hold

For Radiated emission Test

The EUT was placed on a styrofoam table which is 1.5m above ground plane.

The measurement procedure at the band edges was simplified by performing the measurement in just one plot. Both, the in-band-emission and the unwanted emission were encompassed by the span. After trace stabilization, the maximum peak was determined by a peak detector and the value was marked by an appropriate limit line. The second limit line, which is 20dB below the first, marks the limit for the emissions in the unrestricted band. A maximum-peak-detector marks the highest emission in the unrestricted band next to the band edge.

The measurements were performed at the lower end of the 2.4GHz band.

Use the following spectrum analyzer settings:

For Restricted Band, When spectrum scanned above 1GHz setting resolution bandwidth 1MHz, video bandwidth 3MHz:


EMI Test Receiver	Setting
Attenuation	Auto
RBW	1MHz
VBW	3MHz
Detector	Peak
Trace	Max hold

For Non-Restricted Band, When spectrum scanned above 1GHz setting resolution bandwidth 100KHz, video bandwidth 300KHz:


EMI Test Receiver	Setting
Attenuation	Auto
RBW	100KHz
VBW	300KHz
Detector	Peak
Trace	Max hold

13.2 Test SET-UP (Block Diagram of Configuration)

For Conducted Test



For Radiated emission Test

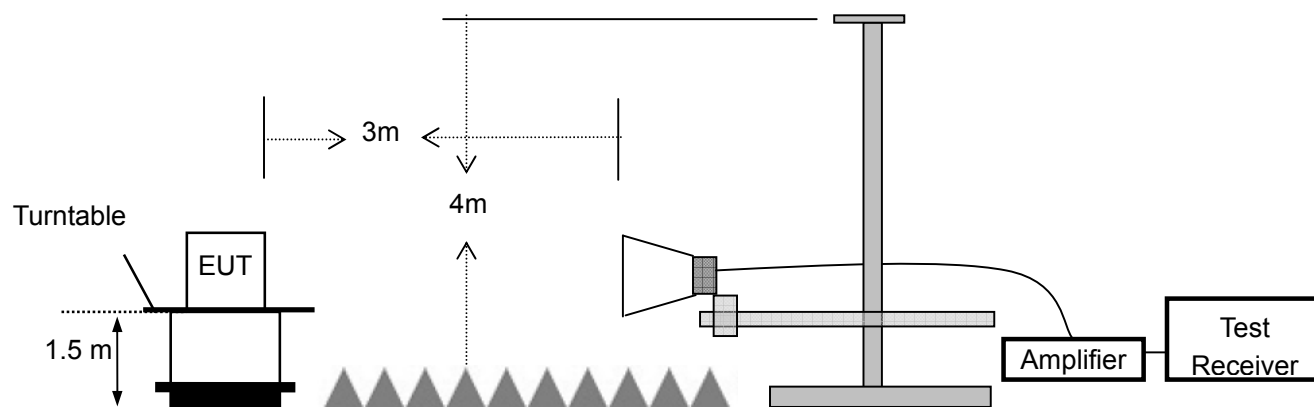

13.3 Measurement Equipment Used:

For Conducted Test

EQUIPMENT TYPE	MFR	MODEL NUMBER	SERIAL NUMBER	Characteristics	LAST CAL.	CAL DUE.
Spectrum Analyzer	Rohde & Schwarz	FSV30	1321.3008K	10Hz-30GHz	03/15/2016	03/14/2017
Coaxial Cable	CDS	79254	46107086	10Hz-30GHz	03/15/2016	03/14/2017
Antenna Connector	ARTHUR-YANG	2244-N1TG1	N/A	10Hz-30GHz	03/15/2016	03/14/2017

Remark: The temporary antenna connector is soldered on the PCB board in order to perform conducted tests and this temporary antenna connector is listed in the equipment list.

For Radiated emission Test

Item	Equipment	Manufacturer	Model No.	Serial No.	Characteristics	Last Cal.	Cal. Interval
1	Signal Analyzer	Rohde & Schwarz	FSV30	103040	9KHz-40GHz	3/15/2016	1 Year
2	Horn Antenna	Schwarzbeck	BBHA9120D	9120D-1272	1GHz-18GHz	3/15/2016	1 Year
3	Power Amplifier	LUNAR EM	LNA1G18-40	J10100000081	1GHz-26.5GHz	3/15/2016	1 Year
4	Cable	H+S	CBL-26	N/A	1GHz-26.5GHz	3/15/2016	1 Year
5	Cable	H+S	CBL-26	N/A	1GHz-26.5GHz	3/15/2016	1 Year
6	Cable	H+S	CBL-26	N/A	1GHz-26.5GHz	3/15/2016	1 Year

13.4 Measurement Results:

Refer to attached data chart.

Spectrum Detector:	PK	Test Date :	August 14, 2016
Test By:	Leon	Temperature :	25 °C
Test Result:	PASS	Humidity :	50 %

1. Conducted Test

For Non-Hopping Mode:

Frequency (MHz)	Modulation	Peak Power Output(dBm)	Emission read Value(dBm)	Result of Band edge(dBc)	Band edge Limit(dBc)
2400	GFSK	1.39	-41.96	43.35	>20dBc
2400	pi/4-DQPSK	1.5	-33.55	35.05	>20dBc
2400	8DPSK	1.56	-33.73	35.29	>20dBc
2383.5	GFSK	-2.02	-50.72	48.7	>20dBc
2383.5	pi/4-DQPSK	-1.93	-49.67	47.74	>20dBc
2383.5	8DPSK	-1.93	-44.49	42.56	>20dBc

For Hopping Mode:

Frequency (MHz)	Modulation	Peak Power Output(dBm)	Emission read Value(dBm)	Result of Band edge(dBc)	Band edge Limit(dBc)
2400	GFSK	1.33	-43.51	44.84	>20dBc
2400	pi/4-DQPSK	1.51	-34.16	35.67	>20dBc
2400	8DPSK	1.5	-35.41	36.91	>20dBc
2483.5	GFSK	-2.02	-50.97	48.95	>20dBc
2483.5	pi/4-DQPSK	-1.99	-50.1	48.11	>20dBc
2483.5	8DPSK	-1.94	-46.13	44.19	>20dBc

2. Radiated emission Test

Worst test modulation GFSK

For Non-Hopping Mode:

Frequency (MHz)	Antenna polarization (H/V)	Emission (dBuV/m)		Band edge Limit (dBuV/m)		Margin (dB)	
		PK	AV	PK	AV	PK	AV
2398.92	H	65.54	43.55	74	54	-8.46	-10.45
2399.04	V	66.36	46.54	74	54	-7.64	-7.46
2484.13	H	61.34	40.75	74	54	-12.66	-13.25
2483.95	V	63.56	44.53	74	54	-10.44	-9.47

For Hopping Mode:

Frequency (MHz)	Antenna polarization (H/V)	Emission (dBuV/m)		Band edge Limit (dBuV/m)		Margin (dB)	
		PK	AV	PK	AV	PK	AV
2398.83	H	64.45	40.96	74	54	-9.55	-13.04
2399.17	V	65.76	45.63	74	54	-8.24	-8.37
2484.25	H	62.12	40.78	74	54	-11.88	-13.22
2483.88	V	65.96	45.95	74	54	-8.04	-8.05

14. Antenna Application

14.1 Antenna requirement

The EUT'S antenna is met the requirement of FCC part 15C section 15.203 and 15.247.

FCC part 15C section 15.247 requirements:

Systems operating in the 2402-2480MHz band that are used exclusively for fixed, point-to-point operations may employ transmitting antennas with directional gain greater than 6dBi provided the maximum peak output power of the intentional radiator is reduced by 1dB for every 3dB that the directional gain of the antenna exceeds 6dBi.

14.2 Result

The EUT's antenna, permanent attached antenna, used a PCB antenna and integrated on PCB, The antenna's gain is 2.3dBi and meets the requirement.

APPENDIX I (Photos of EUT)







