

**ELECTROMAGNETIC EMISSIONS COMPLIANCE REPORT
INTENTIONAL RADIATOR CERTIFICATION TO
FCC PART 15 SUBPART C REQUIREMENT**

OF

**Bluetooth Bedside/Home Office Speaker System with Qi Wireless
Charging**

**Model No.: iBTW39, iBTW39X (X means A-Z, denote as color of
cabinet)**

Trademark: iHome

FCC ID: EMOIBTW39

Report No.: ES180524003E3

Issue Date: June 14, 2018

Prepared for

**SDI TECHNOLOGIES INC.
1299, Main Street, Rahway, NJ 07065, U.S.A.**

Prepared by

EMTEK(SHENZHEN) CO., LTD.

**No.281, Guantai Road, Nancheng District,
Dongguan, Guangdong, China
TEL: 86-769-22807078
FAX: 86-769-22807079**

**This report shall not be reproduced, except in full, without the written approval of
EMTEK(SHENZHEN) CO., LTD.**

VERIFICATION OF COMPLIANCE

Applicant:	SDI Technologies Inc. 1299, Main Street, Rahway, NJ 07065, U.S.A.
Manufacturer:	SDI Technologies Inc. 1299, Main Street, Rahway, NJ 07065, U.S.A.
Factory:	DongGuan Synst Electronics Co., Ltd. The Science &Technology Industrial Park, Houjie Town, DongGuan, China.
Product Description:	Bluetooth Bedside/Home Office Speaker System with Qi Wireless Charging
Trade Mark:	iHome
Model Number:	iBTW39, iBTW39X (X means A-Z, denote as color of cabinet) (Note: The samples are the same except difference color of appearance and model number, Here iBTW39 was selected for full test.)

We hereby certify that:

The above equipment was tested by EMTEK(SHENZHEN) CO., LTD. The test data, data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in ANSI C63.10-2013 and the energy emitted by the sample EUT tested as described in this report is in compliance with conducted and radiated emission limits of FCC Rules Part 15C.

Date of Test : May 24, 2018 to June 13, 2018

Yaping Shen

Prepared/Tested by : _____

Yaping Shen/Editor

Joe Xia

Reviewer : _____

Joe Xia/Supervisor

Approved & Authorized
Signer :

Lisa Wang

Lisa Wang/Manager

Modified Information

Version	Summary	Revision Date	Report No.
Ver.1.0	Original Report	/	ES180524003E3

Table of Contents

1	GENERAL INFORMATION.....	5
1.1	PRODUCT DESCRIPTION.....	5
1.2	RELATED SUBMITTAL(S) / GRANT(S).....	6
1.3	TEST METHODOLOGY.....	6
1.4	SPECIAL ACCESSORIES.....	6
1.5	EQUIPMENT MODIFICATIONS.....	6
1.6	TEST FACILITY.....	6
2	SYSTEM TEST CONFIGURATION.....	7
2.1	EUT CONFIGURATION.....	7
2.2	EUT EXERCISE.....	7
2.3	TEST PROCEDURE.....	7
2.4	CONFIGURATION OF TESTED SYSTEM.....	8
3	SUMMARY OF TEST RESULTS.....	8
4	DESCRIPTION OF TEST MODES.....	9
5	CONDUCTED EMISSIONS TEST.....	10
5.1	MEASUREMENT PROCEDURE.....	10
5.2	TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION).....	10
5.3	MEASUREMENT EQUIPMENT USED.....	10
5.4	CONDUCTED EMISSION LIMIT.....	10
5.5	MEASUREMENT RESULT.....	11
5.6	CONDUCTED MEASUREMENT PHOTO.....	16
6	RADIATED EMISSION TEST.....	17
6.1	MEASUREMENT PROCEDURE.....	17
6.2	TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION).....	17
6.3	MEASUREMENT EQUIPMENT USED.....	18
6.4	RADIATED EMISSION LIMIT.....	18
6.5	MEASUREMENT RESULT.....	20
6.6	RADIATED MEASUREMENT PHOTOS.....	25
7	20DB BANDWIDTH.....	26
7.1	20dB BANDWIDTH LIMIT.....	26
7.2	TEST INSTRUMENTS.....	26
7.3	TEST PROCEDURE.....	26
7.4	TEST SETUP.....	26
7.5	TEST RESULT.....	26
8	ANTENNA APPLICATION.....	28
8.1	ANTENNA REQUIREMENT.....	28
8.2	RESULT.....	28
9	PHOTOS OF EUT.....	28

1 General Information

1.1 Product Description

Characteristics	Description
Product Name	Bluetooth Bedside/Home Office Speaker System with Qi Wireless Charging
Model number	iBTW39
Operation Mode	Qi-5W Wireless Charging,9W Sumsung Fast Wireless Charging
Input Rating	DC 9V from adapter
Power Supply	AC120V/60Hz for adapter
Adapter	Model number:S030A0903000U Input rating: 100-240V~, 50/60Hz, 800mA Max. Output rating: DC 9V, 3000mA
Operating Frequency	145-290KHz
Modulation Technique	Induction
Antenna Type	Induction coil
Radio Software Version	iBTW39_20180601_1622_v0.19
Radio Hardware version	V1.2

1.2 Related Submittal(s) / Grant(s)

This submittal(s) (test report) is intended for FCC ID: EMOIBTW39 filing to comply with the FCC Part 15, Subpart C Rules.

1.3 Test Methodology

Both conducted and radiated testing was performed according to the procedures in ANSI C63.10 (2013). Radiated testing was performed at an antenna to EUT distance 3 meters.

1.4 Special Accessories

Not available for this EUT intended for grant.

1.5 Equipment Modifications

Not available for this EUT intended for grant.

1.6 Test Facility

Site Description
EMC Lab.

: Accredited by CNAS, 2016.10.24
The certificate is valid until 2022.10.28
The Laboratory has been assessed and proved to be in compliance with
CNAS-CL01:2006 (identical to ISO/IEC 17025:2005)
The Certificate Registration Number is L2291.

Accredited by TUV Rheinland Shenzhen 2016.5.19
The Laboratory has been assessed according to the requirements ISO/IEC
17025.

Accredited by FCC, August 03, 2017
Designation Number: CN1204
Test Firm Registration Number: 882943

Accredited by Industry Canada, November 24, 2015
The Certificate Registration Number is 4480A.

Accredited by A2LA, July 31, 2017
The Certificate Number is 4321.01.

Name of Firm : EMTEK(SHENZHEN) CO., LTD.
Site Location : Bldg 69, Majialong Industry Zone, Nanshan District, Shenzhen,
Guangdong, China.

2 System Test Configuration

2.1 EUT Configuration

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner which intends to maximize its emission characteristics in a continuous normal application.

2.2 EUT Exercise

The Transmitter was operated in the normal operating mode. The TX frequency was fixed which was for the purpose of the measurements.

2.3 Test Procedure

2.3.1 Conducted Emissions

The EUT is placed on a turn table which is 0.8 m above ground plane. According to the requirements in Section 13.1.4.1 of ANSI C63.10-2013 Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30 MHz using CISPR Quasi-Peak and average detector mode.

2.3.2 Radiated Emissions

The EUT is placed on a turn table which is 0.8 m above ground plane. The turn table shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3m away from the receiving antenna which varied from 1m to 4m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the max. emission, the fixed in a particular direction according to the requirements in Section 13.1.4.1 of ANSI C63.10-2013.

2.4 Configuration of Tested System

Fig. 2-1 Configuration of Tested System

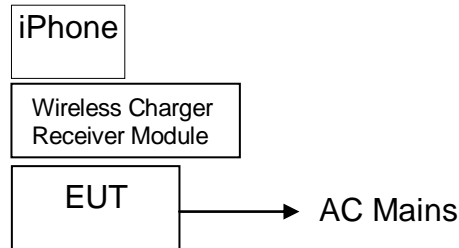


Table 2-1 Equipment Used in Tested System

Item	Equipment	Trade Mark	Model No.	FCC ID	Note
1.	Bluetooth Bedside/Home Office Speaker System with Qi Wireless Charging	iHome	iBTW39	EMOIBTW39	<i>EUT</i>
2.	Adapter	iHome	S030A0903000U	N/A	<i>Support EUT</i>
3.	iPhone	Apple	A1524	N/A	<i>Support Equipment</i>
4.	Wireless Charger Receiver Module	Universal	N/A	N/A	<i>Support Equipment</i>
5.	SAMSUNG S9	Samsung	Samsung Galaxy S9	N/A	<i>Support EUT</i>

Note:

- (1) Unless otherwise denoted as EUT in 『Remark』 column, device(s) used in tested system is a support equipment.

3 Summary of Test Results

FCC Rules	Description Of Test	Result
§15.207	AC Power Conducted Emission	Compliant
§15.209	Radiated Emission	Compliant
§2.1049	20dB Bandwidth	Compliant
§15.203	Antenna Requirement	Compliant

4 Description of test modes


Channel	Frequency(KHz)
Low frequency	145
Mid frequency	220
High frequency	290

5 Conducted Emissions Test

5.1 Measurement Procedure

1. The EUT was placed on a table which is 0.8m above ground plane.
2. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
3. Repeat above procedures until all frequency measured was complete.

5.2 Test SET-UP (Block Diagram of Configuration)

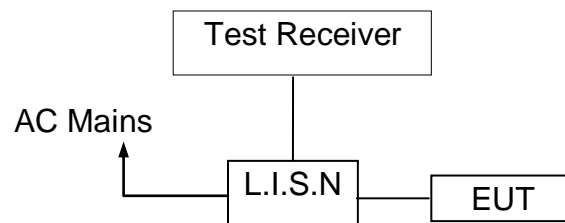

5.3 Measurement Equipment Used

Conducted Emission Test Site					
EQUIPMENT TYPE	MFR	MODEL NUMBER	SERIAL NUMBER	Last Cal.	Due date
Test Receiver	Rohde & Schwarz	ESCS30	100018	05/16/2018	05/15/2019
L.I.S.N	Rohde & Schwarz	ENV216	100017	05/16/2018	05/15/2019
RF Switching Unit	CDS	RSU-M2	38401	05/16/2018	05/15/2019
Coaxial Cable	CDS	79254	46107086	05/16/2018	05/15/2019

5.4 Conducted Emission Limit

Conducted Emission Frequency(MHz)	Quasi-peak	Average
0.15-0.5	66-56	56-46
0.5-5.0	56	46
5.0-30.0	60	50

- Note:** 1. The lower limit shall apply at the transition frequencies
 2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50MHz.


5.5 Measurement Result

Operation Mode:	TX	Test Date :	May 11, 2018
Frequency Range:	0.15MHz~30MHz	Temperature :	28°C
Test Result:	PASS	Humidity :	65 %
Test By:	Yaping Shen		

Pass

We pretested two power and three modes (max load, mid load, min load) for EUT. The worst mode (max load) test data see follow the table.


Qi-5W Wireless Charging

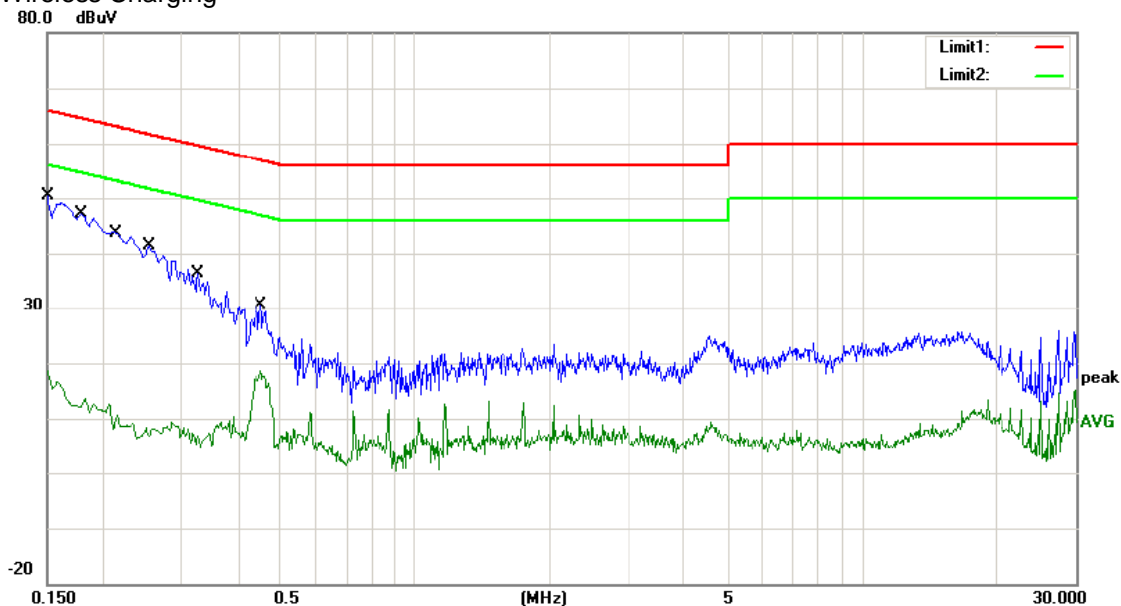

Site site #1 Phase: **L1** Temperature: 25
 Limit: (CE)FCC PART 15 C_QP Power: AC 120V/60Hz Humidity: 55 %
 Mode: Wireless Charging(Full Load)
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV	dBuV	dB		
1	*	0.1500	47.28	0.00	47.28	66.00	-18.72	QP	
2		0.1500	18.74	0.00	18.74	56.00	-37.26	AVG	
3		0.1780	44.15	0.00	44.15	64.58	-20.43	QP	
4		0.1780	13.12	0.00	13.12	54.58	-41.46	AVG	
5		0.2162	40.30	0.00	40.30	62.96	-22.66	QP	
6		0.2162	9.51	0.00	9.51	52.96	-43.45	AVG	
7		0.2540	38.25	0.00	38.25	61.63	-23.38	QP	
8		0.2540	8.11	0.00	8.11	51.63	-43.52	AVG	
9		0.3260	33.49	0.00	33.49	59.55	-26.06	QP	
10		0.3260	7.33	0.00	7.33	49.55	-42.22	AVG	
11		0.4500	27.60	0.00	27.60	56.88	-29.28	QP	
12		0.4500	18.68	0.00	18.68	46.88	-28.20	AVG	

*:Maximum data x:Over limit !:over margin Comment: Factor build in receiver. Operator: Yaping shen

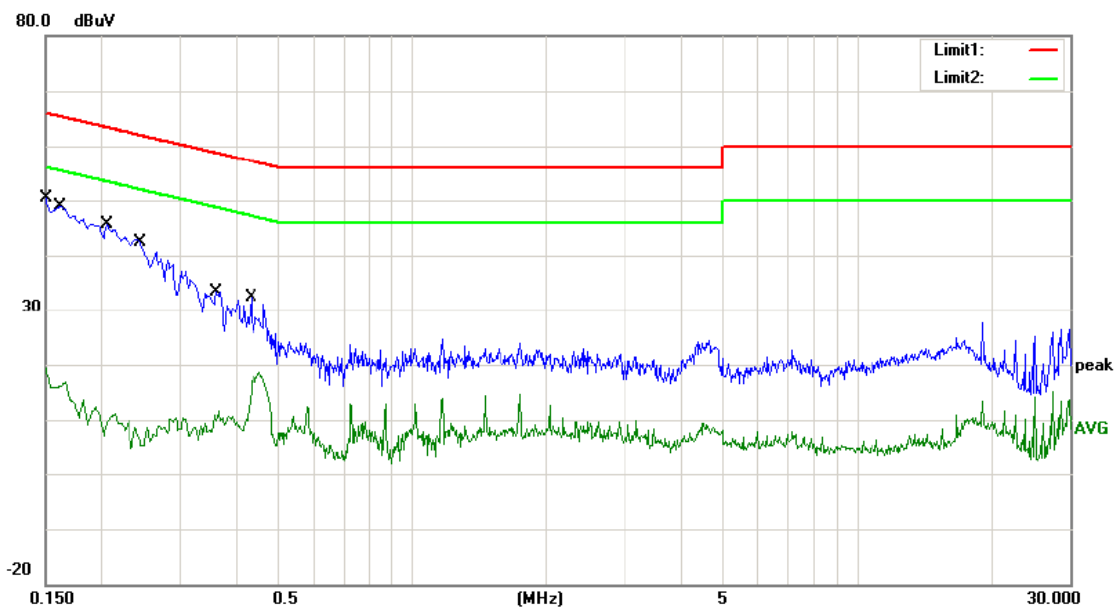


Site site #1 Phase: **N** Temperature: 25
 Limit: (CE)FCC PART 15 C_QP Power: AC 120V/60Hz Humidity: 55 %
 Mode: Wireless Charging(Full Load)
 Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector	Comment
1	*	0.1500	47.29	0.00	47.29	66.00	-18.71	QP	
2		0.1500	19.39	0.00	19.39	56.00	-36.61	AVG	
3		0.1620	45.97	0.00	45.97	65.36	-19.39	QP	
4		0.1620	16.90	0.00	16.90	55.36	-38.46	AVG	
5		0.2060	42.53	0.00	42.53	63.37	-20.84	QP	
6		0.2060	10.20	0.00	10.20	53.37	-43.17	AVG	
7		0.2467	38.61	0.00	38.61	61.87	-23.26	QP	
8		0.2467	8.73	0.00	8.73	51.87	-43.14	AVG	
9		0.3620	30.36	0.00	30.36	58.68	-28.32	QP	
10		0.3620	11.65	0.00	11.65	48.68	-37.03	AVG	
11		0.4340	29.26	0.00	29.26	57.18	-27.92	QP	
12		0.4340	17.94	0.00	17.94	47.18	-29.24	AVG	

*:Maximum data x:Over limit l:over margin Comment: Factor build in receiver. Operator: Yaping shen


9W Sumsung Fast Wireless Charging

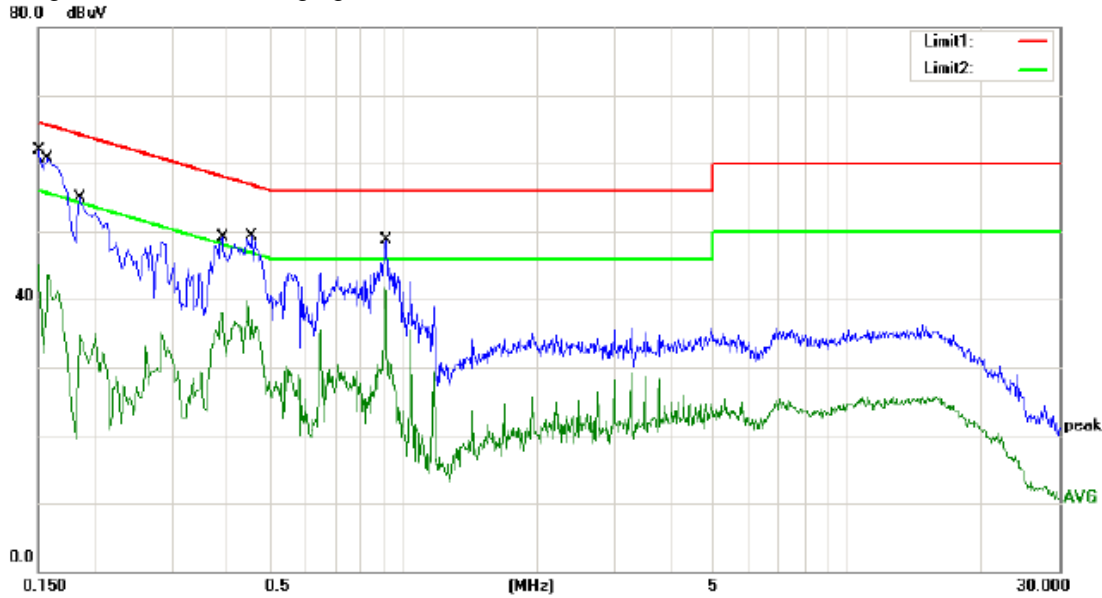

Site site #1 Phase: **L1** Temperature: 25
 Limit: (CE)FCC PART 15 B_QP Power: AC 120V/60Hz Humidity: 55 %
 Mode: Samsung Fast Wireless Charging(Full Load)
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV	dBuV	dB		
1		0.1500	58.14	0.00	58.14	66.00	-7.86	QP	
2		0.1500	45.19	0.00	45.19	56.00	-10.81	AVG	
3		0.1580	57.70	0.00	57.70	65.57	-7.87	QP	
4		0.1580	43.58	0.00	43.58	55.57	-11.99	AVG	
5		0.1860	51.84	0.00	51.84	64.21	-12.37	QP	
6		0.1860	34.73	0.00	34.73	54.21	-19.48	AVG	
7		0.3900	46.13	0.00	46.13	58.06	-11.93	QP	
8		0.3900	38.15	0.00	38.15	48.06	-9.91	AVG	
9		0.4540	46.25	0.00	46.25	56.80	-10.55	QP	
10		0.4540	39.70	0.00	39.70	46.80	-7.10	AVG	
11		0.9100	45.31	0.00	45.31	56.00	-10.69	QP	
12	*	0.9100	41.65	0.00	41.65	46.00	-4.35	AVG	

*:Maximum data x:Over limit !:over margin Comment: Factor build in receiver. Operator: Yaping shen

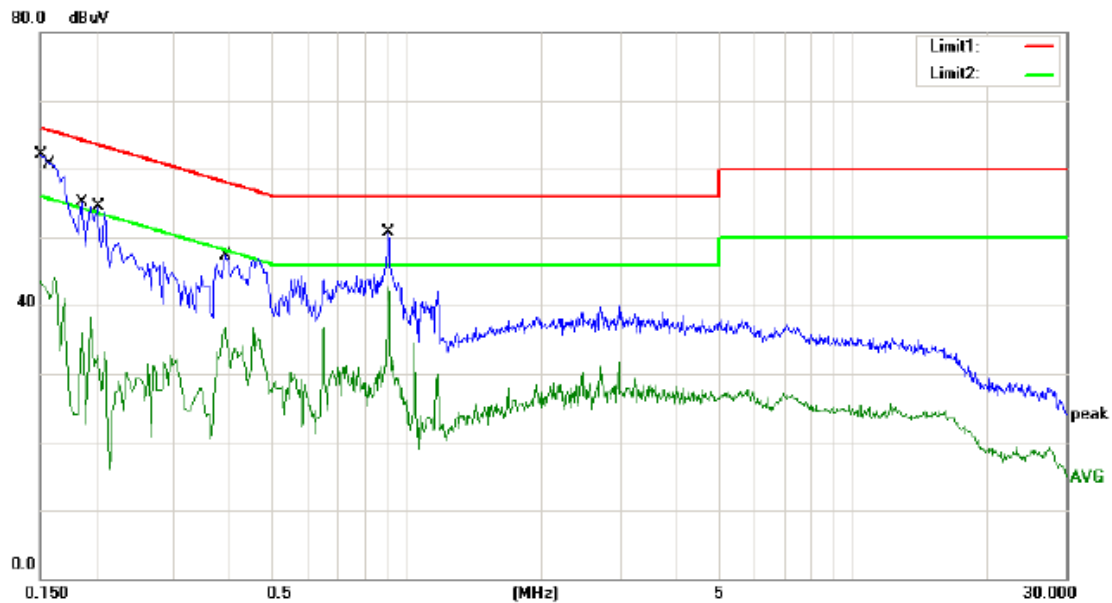

Site site #1 Phase: **N** Temperature: 25
 Limit: (CE)FCC PART 15 B_QP Power: AC 120V/60Hz Humidity: 55 %
 Mode: Samsung Fast Wireless Charging(Full Load)
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV	dBuV	dB		
1		0.1500	59.14	0.00	59.14	66.00	-6.86	QP	
2		0.1500	43.51	0.00	43.51	56.00	-12.49	AVG	
3		0.1590	57.54	0.00	57.54	65.52	-7.98	QP	
4		0.1590	44.14	0.00	44.14	55.52	-11.38	AVG	
5		0.1860	52.64	0.00	52.64	64.21	-11.57	QP	
6		0.1860	36.14	0.00	36.14	54.21	-18.07	AVG	
7		0.2020	51.48	0.00	51.48	63.53	-12.05	QP	
8		0.2020	33.30	0.00	33.30	53.53	-20.23	AVG	
9		0.3900	44.21	0.00	44.21	58.06	-13.85	QP	
10		0.3900	36.68	0.00	36.68	48.06	-11.38	AVG	
11		0.9060	47.74	0.00	47.74	56.00	-8.26	QP	
12	*	0.9060	42.68	0.00	42.68	46.00	-3.32	AVG	

*:Maximum data x:Over limit l:over margin Comment: Factor build in receiver. Operator: Yaping shen

5.6 Conducted Measurement Photo




6 Radiated Emission Test

6.1 Measurement Procedure


1. The EUT was placed on a turn table which is 0.8m above ground plane.
2. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
3. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
4. Repeat above procedures until all frequency measured were complete.

6.2 Test SET-UP (Block Diagram of Configuration)

(A) Radiated Emission Test Set-Up, Frequency Below 30MHz

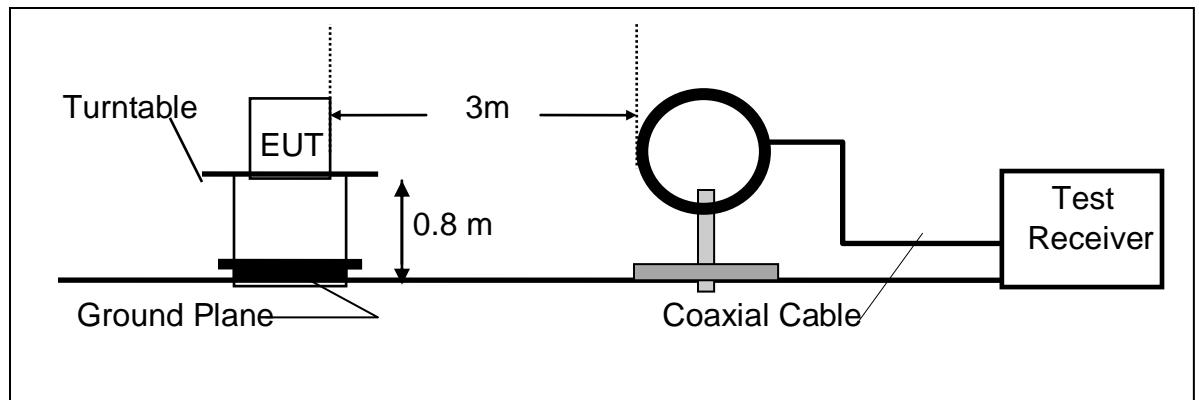

(B) Radiated Emission Test Set-Up, Frequency Below 1000MHz

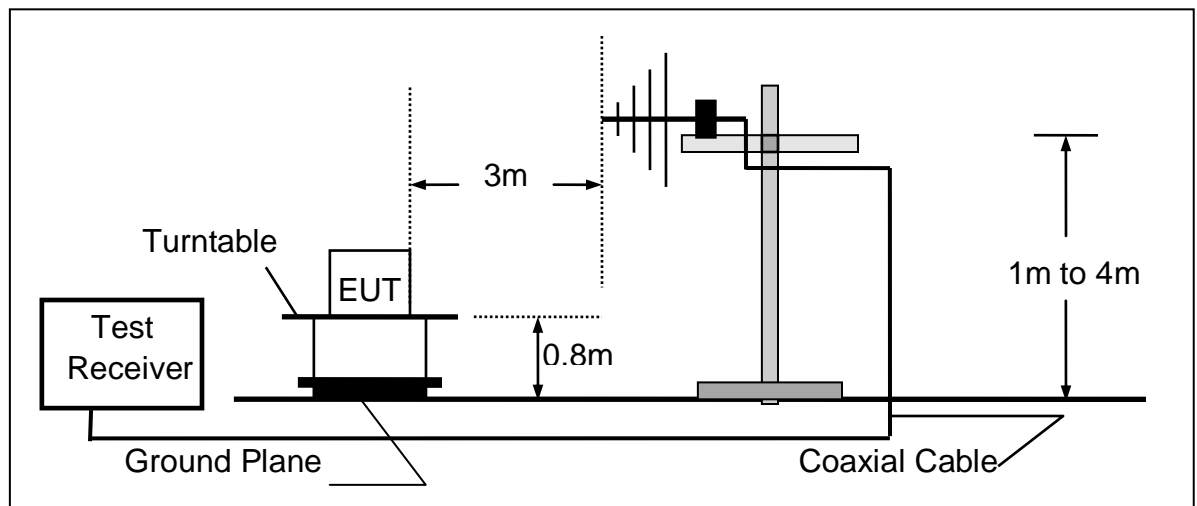

6.3 Measurement Equipment Used

Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Due date
Test Receiver	Rohde & Schwarz	ESCI	1166.5950.03	05/16/2018	05/15/2019
Signal Analyzer	Rohde & Schwarz	FSV30	103040	05/16/2018	05/15/2019
Loop Antenna	Schwarzbeck	FMZB 1519	012	05/16/2018	05/15/2019
Bilog Antenna	Schwarzbeck	VULB9163	000141	05/16/2018	05/15/2019
Power Amplifier	CDS	RSU-M352	818	05/16/2018	05/15/2019
Power Amplifier	HP	8447F	OPT H64	05/16/2018	05/15/2019
Color Monitor	SUNSP0	SP-140A	N/A	05/16/2018	05/15/2019
Single Line Filter	JIANLI	XL-3	N/A	05/16/2018	05/15/2019
Single Phase Power Line Filter	JIANLI	DL-2X100B	N/A	05/16/2018	05/15/2019
3 Phase Power Line Filter	JIANLI	DL-4X100B	N/A	05/16/2018	05/15/2019
DC Power Filter	JIANLI	DL-2X50B	N/A	05/16/2018	05/15/2019
Cable	Schwarzbeck	PLF-100	549489	05/16/2018	05/15/2019
Cable	Rosenberger	CIL02	A0783566	05/16/2018	05/15/2019
Cable	Rosenberger	RG 233/U	525178	05/16/2018	05/15/2019

6.4 Radiated Emission Limit

The emissions from an intentional radiator shall not exceed the field strength levels specified in the following table 15.209(a):

FCC Part 15.209				
Frequency (MHz)	Field Strength Limitation		Field Strength Limitation Frequency tion at 3m Measurement Dist	
	(uV/m)	Dist	(uV/m)	(dBuV/m)
0.009 – 0.490	2400 / F(KHz)	300m	10000 * 2400/F(KHz)	20log 2400/F(KHz) + 80
0.490 – 1.705	24000 / F(KHz)	30m	100 * 24000/F(KHz)	20log 24000/F(KHz) + 40
1.705 – 30.00	30	30m	100* 30	20log 30 + 40
30.0 – 88.0	100	3m	100	20log 100
88.0 – 216.0	150	3m	150	20log 150
216.0 – 960.0	200	3m	200	20log 200
Above 960.0	500	3m	500	20log 500

15.205 Restricted bands of operation

MHz	MHz	MHz	GHz
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
¹ 0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 - 156.52525	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.7 - 156.9	2690 - 2900	22.01 - 23.12
8.41425 - 8.41475	162.0125 - 167.17	3260 - 3267	23.6 - 24.0
12.29 - 12.293	167.72 - 173.2	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	240 - 285	3345.8 - 3358	36.43 - 36.5
12.57675 - 12.57725	322 - 335.4	3600 - 4400	(²)

- Remark:
1. Emission level in dBuV/m=20 log (uV/m)
 2. Measurement was performed at an antenna to the closed point of EUT distance of meters.
 3. Only spurious frequency is permitted to locate within the Restricted Bands specified in provision of ξ 15.205, and the emissions located in restricted bands also comply with 15.209 limit.

6.5 Measurement Result

We pretested two power and three modes (max load, mid load, min load) for EUT. The worst mode (9W Samsung Fast Wireless charging max load) and worst test frequency(Low frequency: 145KHz)test data see follow the table.


Operation Mode:	Low frequency	Test Date :	June 11, 2018
Frequency Range:	9KHz~30MHz	Temperature :	20℃
Test Result:	PASS	Humidity :	55 %
Measured Distance:	3m	Test By:	Yaping Shen

Freq. (MHz)	Ant.Pol. H/V	Emission Level (dBuV/m)	Limit 3m (dBuV/m)	Over (dB)	Note
0.14568(F)	H	73.46	104.34	-30.88	PK
0.291	H	65.21	98.33	-33.12	PK
0.437	H	63.85	94.79	-30.94	PK
0.583	H	62.72	72.29	-9.57	PK
0.728	H	60.68	70.36	-9.68	PK
0.14568(F)	V	75.72	104.34	-28.62	PK
0.291	V	64.32	98.33	-34.01	PK
0.437	V	62.15	94.79	-32.64	PK
0.583	V	66.76	72.29	-5.53	PK
0.728	V	63.25	70.36	-7.11	PK

- Note:**
- (1) All Readings are Peak Value.
 - (2) Emission Level= Reading Level+Probe Factor +Cable Loss.
 - (3) The average measurement was not performed when the peak measured data under the limit of average detection.
 - (4) EUT lying on the table position is the worst case result in the report.

We pretested two power and three modes (max load, mid load, min load) for EUT. The worst mode (max load) and worst test frequency(High frequency: 290KHz)test data see follow the page.


Qi-5W Wireless Charging

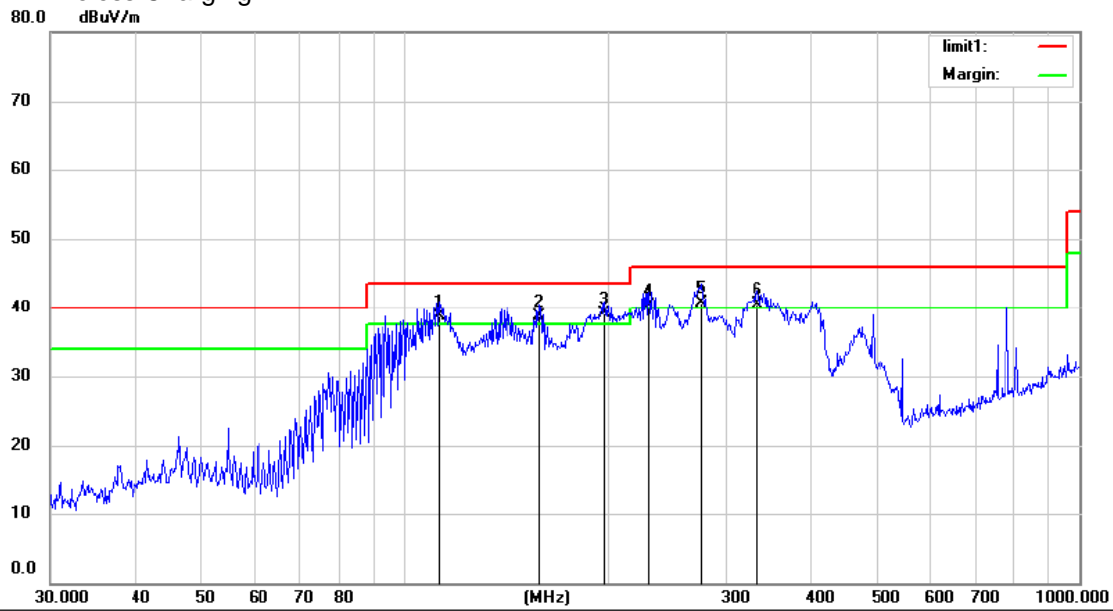

Site Chamber #1 Polarization: **Horizontal** Temperature: 22
 Limit: (RE)FCC PART 15 C Power: AC 120V/60Hz Humidity: 50 %
 Mode: Wireless Charging(Full Load)
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1	!	112.9196	52.14	-13.47	38.67	43.50	-4.83	QP		
2	!	158.6677	54.36	-15.64	38.72	43.50	-4.78	QP		
3	*	197.8928	51.47	-12.46	39.01	43.50	-4.49	QP		
4	!	230.9067	51.66	-11.29	40.37	46.00	-5.63	QP		
5	!	275.1570	50.16	-9.47	40.69	46.00	-5.31	QP		
6	!	333.6867	48.66	-8.15	40.51	46.00	-5.49	QP		

*:Maximum data x:Over limit !:over margin Comment: Factor build in receiver. Operator: Yaping shen

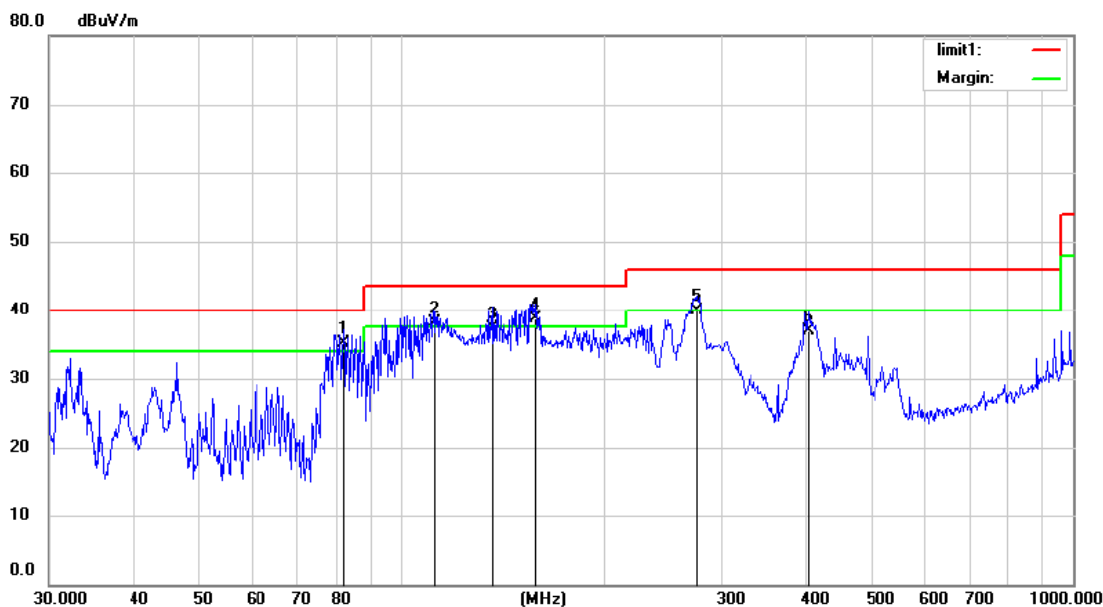


Site Chamber #1 Polarization: **Vertical** Temperature: 22
 Limit: (RE)FCC PART 15 C Power: AC 120V/60Hz Humidity: 50 %
 Mode: Wireless Charging(Full Load)
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree
1	*	82.0705	52.15	-16.99	35.16	40.00	-4.84	QP	
2	I	111.7380	51.47	-13.35	38.12	43.50	-5.38	QP	
3		136.9391	53.66	-16.26	37.40	43.50	-6.10	QP	
4	I	158.6677	54.26	-15.64	38.62	43.50	-4.88	QP	
5		275.1570	49.36	-9.47	39.89	46.00	-6.11	QP	
6		404.6665	43.88	-6.88	37.00	46.00	-9.00	QP	

*:Maximum data x:Over limit I:over margin Comment: Factor build in receiver. Operator: Yaping shen


9W Sumsung Fast Wireless Charging

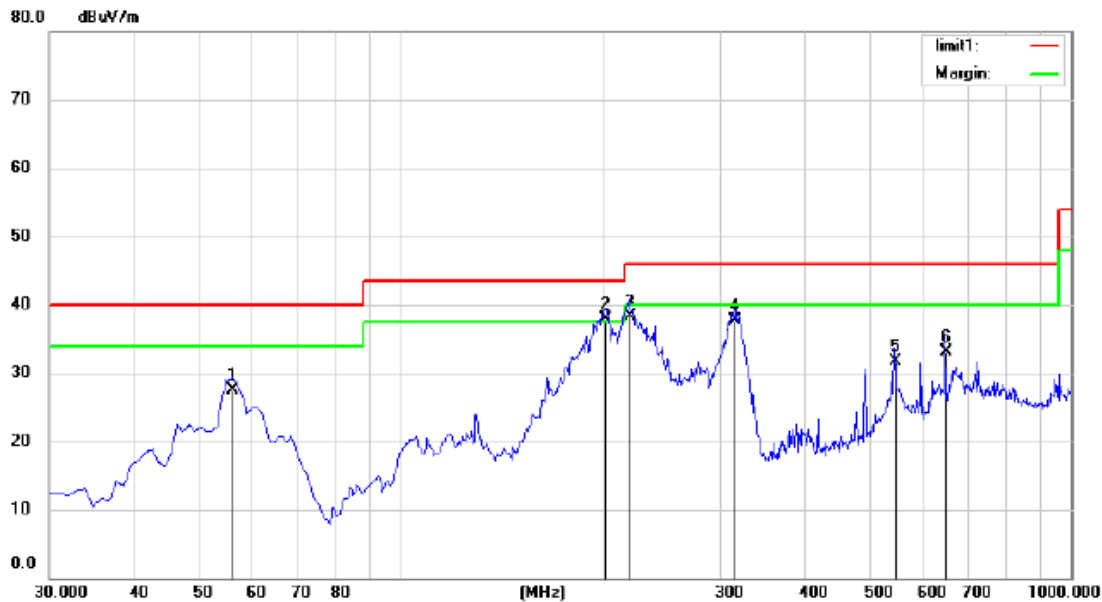

Site: Chamber #1 Polarization: *Horizontal* Temperature: 25
 Limit: (RE)FCC PART 15 C 3m Power: AC 120V/60Hz Humidity: 55 %
 Mode: Samsung Fast Wireless Charging(Full Load)
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree
1		56.1900	43.69	-16.14	27.55	40.00	-12.45	QP	
2	*	202.6600	55.23	-17.27	37.96	43.50	-5.54	QP	
3		219.1500	55.22	-16.82	38.40	46.00	-7.60	QP	
4		315.1800	51.30	-13.58	37.72	46.00	-8.28	QP	
5		546.0400	39.58	-7.83	31.75	46.00	-14.25	QP	
6		649.8300	38.20	-5.17	33.03	46.00	-12.97	QP	

*:Maximum data x:Over limit !:over margin Comment: Factor build in receiver. Operator: Yaping shen


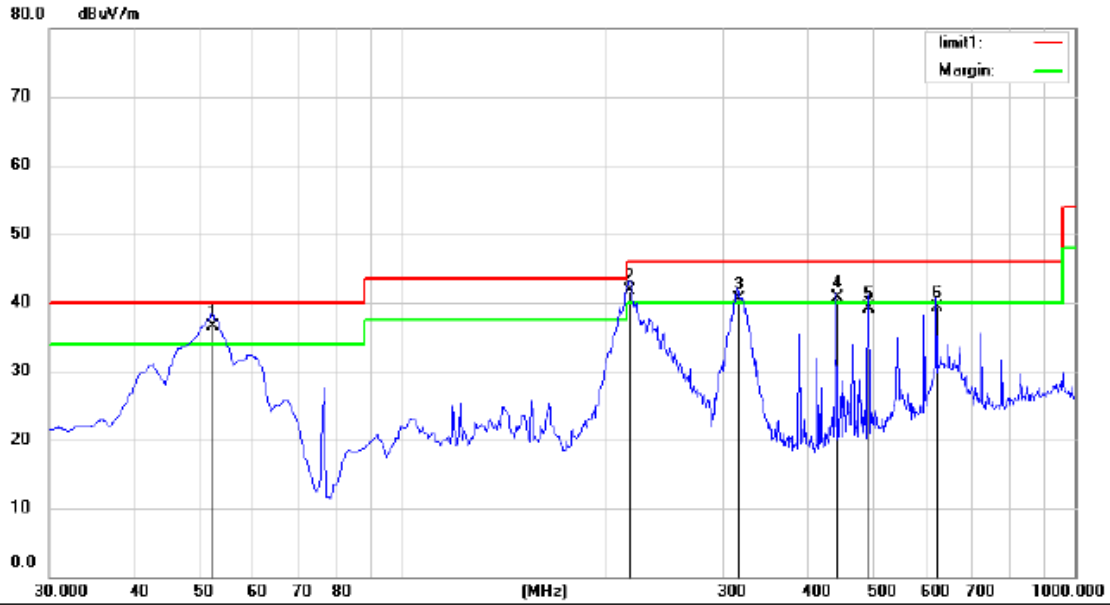


Site Chamber #1 Polarization: **Vertical** Temperature: 25
 Limit: (RE)FCC PART 15 C 3m Power: AC 120V/60Hz Humidity: 55 %
 Mode: Samsung Fast Wireless Charging(Full Load)
 Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Antenna Height cm	Table Degree degree	Comment
1	*	52.3100	52.30	-15.80	36.50	40.00	-3.50	QP		
2	!	218.3084	58.63	-16.91	41.72	46.00	-4.28	QP		
3	!	316.1500	54.36	-13.89	40.47	46.00	-5.53	QP		
4	!	442.2500	51.60	-10.94	40.66	46.00	-5.34	QP		
5		493.6600	49.00	-9.80	39.20	46.00	-6.80	QP		
6		624.6100	46.30	-7.08	39.22	46.00	-6.78	QP		

*:Maximum data x:Over limit !:over margin Comment: Factor build in receiver. Operator: Yaping shen

6.6 Radiated Measurement Photos

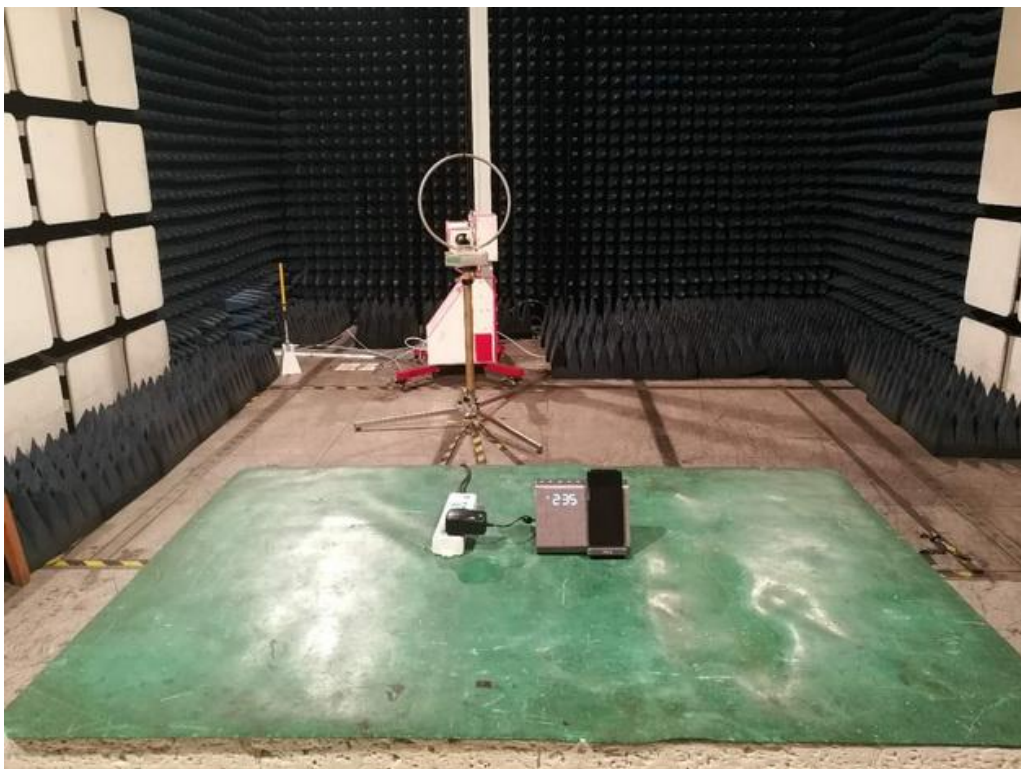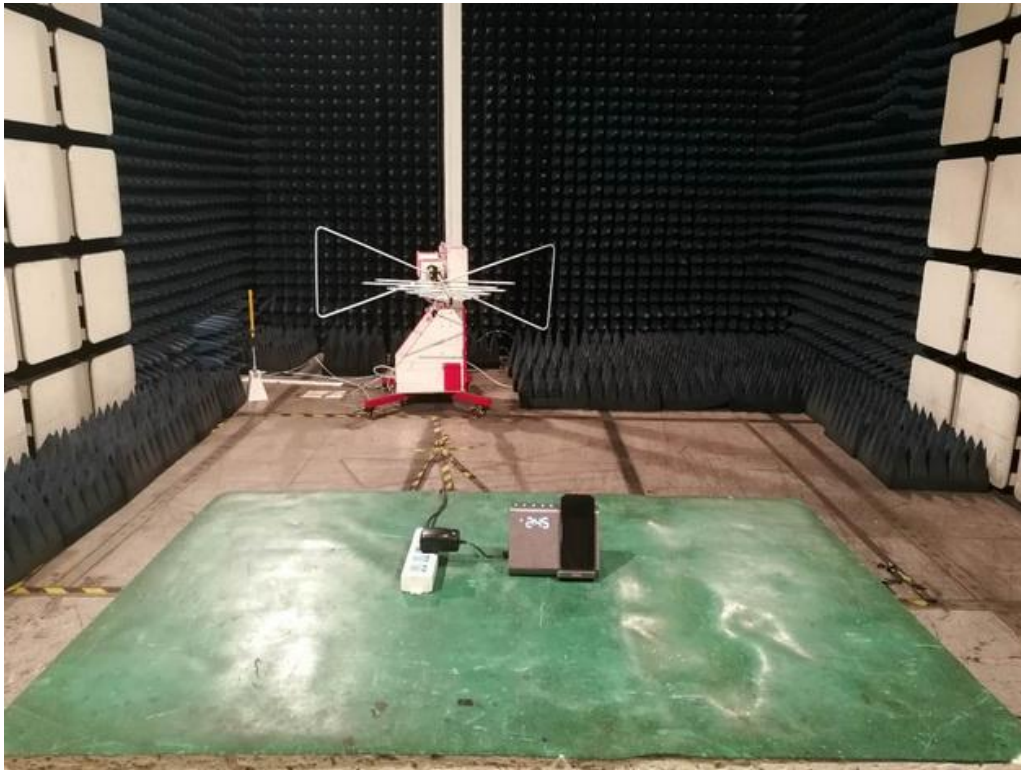

7 20db Bandwidth

7.1 20dB Bandwidth Limit

None: for reporting purposed only.


7.2 Test Instruments

Refer a test equipment and calibration data table in this test report.

7.3 Test Procedure

The bandwidth of the fundamental frequency was measured by spectrum analyzer with 10Hz RBW and 30Hz VBW. The 20dB bandwidth is defined as the total spectrum the power of which is higher than peak power minus 20dB.


7.4 Test Setup



7.5 Test Result

Frequency (KHz)	20dB Bandwidth (Hz)	Results
145.68	47.18	PASS

20 dB Bandwidth Test plot

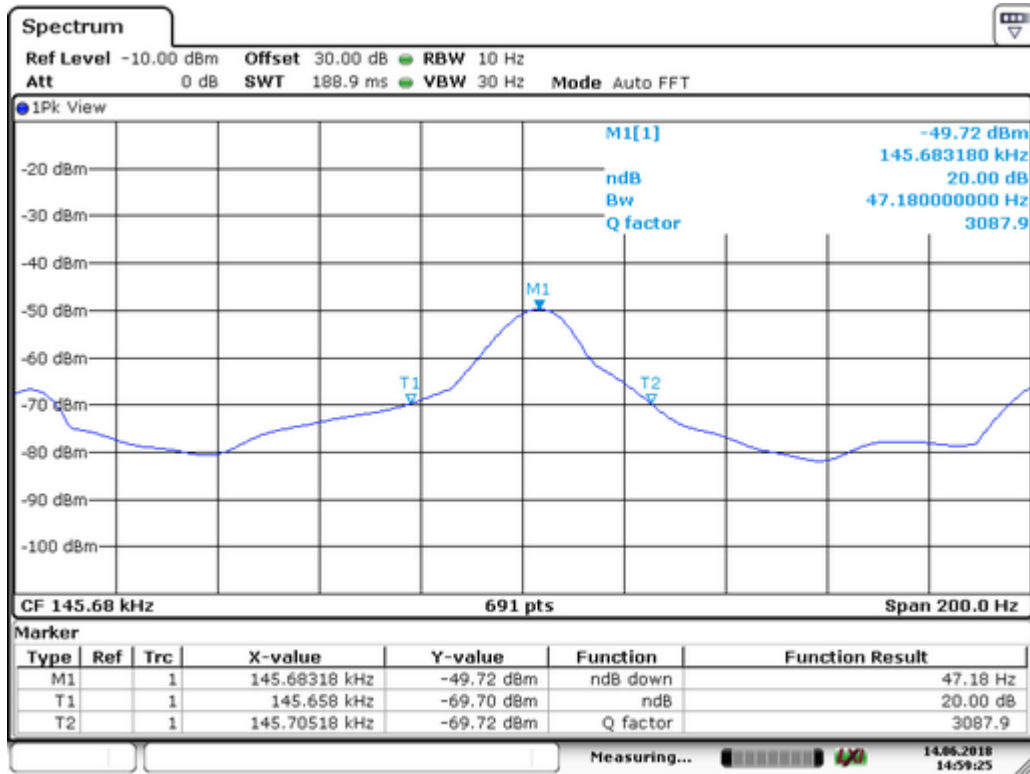

8 Antenna Application

8.1 Antenna requirement

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

8.2 Result

The EUT's antenna, permanent attached antenna, used an Induction coil and integrated on PCB, The antenna's gain meets the requirement.

9 Photos of EUT

Please refer to external photos and internal photos.